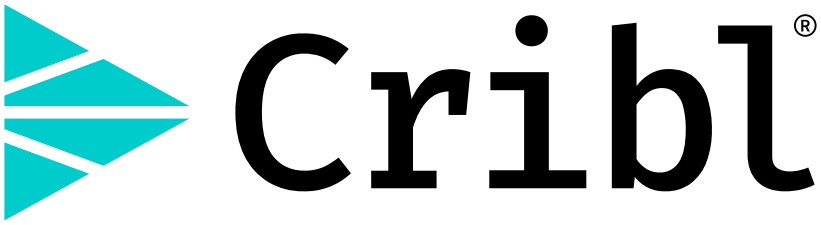

Cribl Stream Documentation Manual

Version: v4.2

Generated: 2023-08-16 13:44:14

1. Introduction 12
1.1. About Cribl Stream 12
1.2. Basic Concepts 14
1.3. QuickConnect 19
1.4. Getting Started Guide 28
1.5. Distributed Quick Start 50
1.6. Projects 83
1.6.1. Configuring Projects 90
1.6.2. Configuring Subscriptions 95
2. Cribl.Cloud 100
2.1. Launch Guide 100
2.2. Cloud SSO Setup 125
2.2.1. Cribl.Cloud SSO Setup 125
2.2.2. Common SSO Setup Steps 128
2.2.3. OIDC/Okta Setup Example 130
2.2.4. SAML/Azure AD Setup Examples 138
2.2.5. SAML/Okta Setup Examples 141
2.2.6. Final SSO Steps & Troubleshooting 152
3. CrowdStream 154
4. Planning and Sizing 174
4.1. Deploying Cribl Stream Software 174
4.1.1. Deployment Planning 174
4.1.2. Sizing and Scaling 178
4.1.3. Architectural Considerations 187
4.1.4. Reference Architectures 196
4.1.4.1. All-in-One Reference Architecture 197
4.1.4.2. Syslog Reference Architecture 199
4.1.4.3. Multiple Agents Reference Architecture 205
4.1.4.4. Comprehensive Reference Architecture 212
4.2. Manual Deployment 214
4.2.1. Deployment Types 214
4.2.2. Single-Instance Deployment 216
4.2.3. Distributed Deployment 225
4.2.4. Splunk App Deployment 252
4.2.5. Bootstrap Workers from Leader 255
4.2.6. Leader High Availability/Failover 266

4.2.7. Converting a Single Instance to Distributed Deployment 273
4.3. Orchestrated Deployment 275
4.3.1. Kubernetes/Helm Deployment 275
4.3.2. K8s Worker Deployment 289
4.4. Docker Deployment 296
5. Administering 300
5.1. Licensing 300
5.2. Version Control 307
5.3. GitOps 326
5.3.1. GitOps/GitHub Tutorial 334
5.4. About Load Balancing 341
5.5. Persistent Queues 343
5.6. Worker Group Settings 352
5.7. Monitoring 354
5.7.1. Internal Metrics 372
5.7.2. Internal Logs 381
5.8. Notifications 386
5.8.1. Configuring Targets 395
5.9. Scripts 400
5.10. Upgrading 402
5.11. Uninstalling 413
6. Access Management 414
6.1. Authentication 415
6.2. Members and Permissions 422
6.3. Local Users 429
6.4. Roles 431
6.5. SSO with Okta and OIDC 441
6.6. SSO with Okta and SAML 457
7. Securing 471
7.1. Securing the Leader's Auth Token 471
7.2. Securing Cribl Stream (TLS/SSL, Certs, Keys) 473
7.2.1. KMS Configuration 480
7.3. Securing Communications 485
7.4. System Proxy Configuration 495
7.5. Securing Data 501
7.6. Encryption 502
7.7. Decryption 507

8. Working With Data 511
8.1. Event Model 511
8.2. Event Processing Order 513
8.3. Routes 515
8.4. Pipelines 523
8.5. Packs 531
8.5.1. Packs Publication Standards 557
8.6. Using Datagens 565
8.7. Data Preview 571
8.8. Data Onboarding 588
9. Functions 592
9.1. Auto Timestamp 598
9.2. Aggregations 603
9.3. CEF Serializer 613
9.4. Chain 615
9.5. Clone 617
9.6. Code 619
9.7. Comment 622
9.8. DNS Lookup 624
9.9. Drop 630
9.10. Dynamic Sampling 632
9.11. Eval 635
9.12. Event Breaker 639
9.13. Flatten 642
9.14. GeoIP 644
9.15. Grok 647
9.16. JSON Unroll 649
9.17. Lookup 651
9.18. Mask 657
9.19. Numerify 664
9.20. Parser 666
9.21. Publish Metrics 678
9.22. Redis 684
9.23. Regex Extract 694
9.24. Regex Filter 699
9.25. Rename 700
9.26. Rollup Metrics 703
9.27. Sampling 705

9.28. Serialize 707
9.29. Suppress 710
9.30. Tee 713
9.31. Trim Timestamp 716
9.32. Unroll 719
9.33. XML Unroll 721
9.34. Prometheus Publisher (Deprecated) 724
9.35. Reverse DNS (deprecated) 727
10. Sources 729
10.1. Collector Sources 735
10.1.1. Azure Blob Storage 739
10.1.2. Database 745
10.1.3. File System/NFS 752
10.1.4. Google Cloud Storage 756
10.1.5. Health Check 763
10.1.6. REST / API Endpoint 776
10.1.7. S3 792
10.1.8. Script 801
10.1.9. Splunk Search 806
10.1.10. Scheduling and Running 812
10.1.11. Job Limits 821
10.2. Amazon 824
10.2.1. Amazon Kinesis Firehose 824
10.2.2. Amazon Kinesis Streams 830
10.2.3. Amazon S3 835
10.2.4. Amazon SQS 844
10.3. Azure 850
10.3.1. Azure Blob Storage 850
10.3.2. Azure Event Hubs 862
10.4. Google Cloud 869
10.4.1. Google Cloud Pub/Sub 869
10.5. Kafka 873
10.5.1. Kafka 873
10.5.2. Confluent Cloud 881
10.5.3. Amazon MSK 888
10.6. Office 365 895
10.6.1. Office 365 Activity 895

10.6.2. Office 365 Message Trace 904
10.6.3. Office 365 Services 911
10.7. Prometheus 917
10.7.1. Prometheus Scraper 917
10.7.2. Prometheus Remote Write 924
10.7.3. Grafana 930
10.7.4. Loki 936
10.8. Splunk 942
10.8.1. Splunk HEC 942
10.8.2. Splunk Search 952
10.8.3. Splunk TCP 957
10.9. Internal 964
10.9.1. Datagen 964
10.9.2. Cribl Internal 967
10.9.3. Cribl HTTP 973
10.9.4. Cribl TCP 980
10.9.5. Cribl Stream (Deprecated) 986
10.10. System 992
10.10.1. Exec 992
10.10.2. File Monitor 995
10.10.3. Journal Files 1003
10.10.4. System Metrics 1007
10.10.5. System State 1012
10.11. AppScope 1023
10.12. CrowdStrike FDR 1031
10.13. Datadog Agent 1036
10.14. Elasticsearch API 1045
10.15. HTTP/S (Bulk API) 1054
10.16. Raw HTTP/S 1062
10.17. Metrics 1068
10.18. OpenTelemetry (OTel) 1074
10.19. SNMP Trap 1081
10.20. Syslog 1085
10.21. TCP JSON 1092
10.22. TCP (Raw) 1099
10.23. UDP (Raw) 1105
10.24. Windows Event Forwarder 1109

11. Destinations 1124
11.1. Amazon 1129
11.1.1. Amazon CloudWatch Logs 1129
11.1.2. Amazon Kinesis Streams 1134
11.1.3. Amazon S3 Compatible Stores 1139
11.1.4. Amazon SQS 1147
11.2. Azure 1152
11.2.1. Azure Blob Storage 1152
11.2.2. Azure Event Hubs 1158
11.2.3. Azure Monitor Logs 1164
11.2.4. Azure Sentinel 1169
11.3. Data Lakes 1175
11.3.1. Amazon S3 1175
11.3.2. Amazon Security Lake 1181
11.4. Google Cloud 1188
11.4.1. Google Chronicle 1188
11.4.2. Google Cloud Logging 1193
11.4.3. Google Cloud Pub/Sub 1198
11.4.4. Google Cloud Storage 1203
11.5. Kafka 1208
11.5.1. Kafka 1208
11.5.2. Confluent Cloud 1214
11.5.3. Amazon MSK 1220
11.6. Metrics 1226
11.6.1. Graphite 1226
11.6.2. StatsD 1229
11.6.3. StatsD Extended 1232
11.7. New Relic Ingest 1235
11.7.1. New Relic Events 1235
11.7.2. New Relic Logs & Metrics 1240
11.8. Prometheus 1245
11.8.1. Prometheus 1245
11.8.2. Grafana Cloud 1250
11.8.3. Loki 1257
11.9. Splunk 1262
11.9.1. Splunk HEC 1262
11.9.2. Splunk Single Instance 1269

11.9.3. Splunk Load Balanced 1275
11.10. Internal 1285
11.10.1. Cribl HTTP 1285
11.10.2. Cribl TCP 1291
11.10.3. Cribl Stream (Deprecated) 1298
11.10.4. Default 1303
11.10.5. DevNull 1305
11.10.6. Output Router 1306
11.11. CrowdStrike Falcon LogScale 1309
11.12. Datadog 1314
11.13. DataSet 1320
11.14. Elasticsearch 1325
11.15. Filesystem/NFS 1331
11.16. Honeycomb 1336
11.17. InfluxDB 1340
11.18. MinIO 1344
11.19. OpenTelemetry (OTel) 1351
11.20. SignalFx 1357
11.21. SNMP Trap 1361
11.22. Sumo Logic 1363
11.23. Syslog 1367
11.24. TCP JSON 1381
11.25. Wavefront 1387
11.26. Webhook 1391
12. Knowledge Objects 1400
12.1. Lookups Library 1401
12.2. Event Breakers 1405
12.3. Parsers Library 1419
12.4. Global Variables Library 1421
12.5. Regex Library 1423
12.6. Grok Patterns Library 1426
12.7. Schemas Library 1428
12.8. Parquet Schemas 1431
12.9. Database Connections 1439
12.10. AppScope Configs 1443
13. Reference 1451
13.1. API Docs 1451
13.2. Cribl Expression Syntax 1460

13.3. Cribl Expressions 1463
13.4. CLI Reference 1476
13.5. Environment Variables 1493
13.6. Config Files 1499
13.6.1. cribl.yml 1503
13.6.2. breakers.yml 1509
13.6.3. certificates.yml 1510
13.6.4. groups.yml 1511
13.6.5. inputs.yml 1512
13.6.6. instance.yml 1593
13.6.7. jobs.yml 1594
13.6.8. job-limits.yml 1615
13.6.9. licenses.yml 1616
13.6.10. limits.yml 1617
13.6.11. logger.yml 1618
13.6.12. mappings.yml 1619
13.6.13. messages.yml 1620
13.6.14. outputs.yml 1621
13.6.15. parsers.yml 1692
13.6.16. policies.yml 1693
13.6.17. regexes.yml 1696
13.6.18. roles.yml 1697
13.6.19. samples.yml 1698
13.6.20. schemas.yml 1699
13.6.21. scripts.yml 1700
13.6.22. vars.yml 1701
14. Techniques & Tips 1702
14.1. Tips and Tricks 1702
14.2. Integrating with Other Services 1706
14.2.1. Amazon S3 Better Practices 1706
14.2.2. Amazon Security Lake Integration 1735
14.2.3. Cribl Edge as a Sidecar Container in AWS ECS 1743
14.2.4. Moogsoft/Webhook Integration 1748
14.2.5. Nightfall Integration 1754
14.2.6. Managing QRadar Licenses 1760
14.2.7. Splunk to Elasticsearch 1765
14.2.8. Splunk to Exabeam 1773
14.2.9. Splunk Stream to Cribl Stream 1782

14.2.10. Syslog Best Practices 1786
14.2.11. Palo Alto Syslog to Cribl.Cloud 1800
14.2.12. System Metrics to Grafana 1807
14.2.13. Tanium to Cribl Stream 1812
14.3. Lookup Applications 1819
14.3.1. Ingest-Time Lookups 1819
14.3.2. Managing Large Lookups 1824
14.3.3. Lookups as Filters for Masks 1828
14.3.4. Lookups and Regex Magic 1831
14.3.5. Updating Lookups in Multiple Packs 1843
14.3.6. Updating Lookups with a REST API 1847
14.4. Sampling Applications 1850
14.4.1. Sampling 1850
14.4.2. Sample Logs 1852
14.4.3. Access Logs: Apache, ELB, CDN, S3, etc. 1858
14.4.4. Firewall Logs: VPC Flow Logs, Cisco ASA, Etc. 1861
14.5. Using Other Functions 1864
14.5.1. Code Function Examples 1864
14.5.2. Ingest-time Fields 1876
14.5.3. Masking and Obfuscation 1880
14.5.4. Reducing Windows XML Events 1884
14.5.5. Regex Filtering 1900
14.6. Using Collectors 1902
14.6.1. Using S3 Storage and Replay 1902
14.6.2. Using REST/API Collectors 1911
14.6.3. Lacework API Collection 1934
14.6.4. Microsoft Graph API Collection 1942
14.6.5. Wiz API Collection 1948
14.6.6. ServiceNow API Collection 1963
14.6.7. Creating a Custom Collector 1970
14.7. Securing Cribl Stream 1996
14.7.1. AWS Cross-Account Data Collection 1996
14.7.2. Encrypting Sensitive Data 2002
14.7.3. SELinux Configuration 2008
15. Setup Guides 2012
15.1. Cribl Edge to Cribl Stream 2013
15.2. Configuring Upstream Logging Agents 2019

15.3. Azure AD + OpenID Configuration 2029
15.4. Azure Sentinel SIEM Integration 2037
15.4.1. DCR Template with Stream Values 2041
15.5. Azure Event Hubs Integrations 2071
15.6. Preparing the Azure Workspace 2077
15.7. BigPanda/Webhook Integration 2083
15.8. Splunk Cloud and BYOL Integrations 2087
15.9. Sumo Logic/Webhook Integration 2102
15.10. Configuring WEF for Cribl Stream 2107
15.11. Zscaler NSS Integration 2122
16. Troubleshooting 2129
16.1. Known Issues 2129
16.2. Working with Cribl Support 2207
16.3. Diagnosing Issues 2213
16.4. Common Errors and Warnings 2217
16.5. Git Push Errors 2228
16.6. Git Remote Repos & Trusted CAs 2230
16.7. Sample Logs for Login Scenarios 2233
17. Third-Party Software 2236
17.1. Credits 2236

1. Introduction

1.1. About Cribl Stream

All the docs to goat you started with Cribl Stream

- Download all docs as a PDF – v.4.2.1 | Download Cribl Stream | Get Cribl Cloud
- Questions not answered here? We'd love to help you. Meet us in #Cribl Community Slack – sign up here.

What Is Cribl Stream?

Cribl Stream helps you process machine data – logs, instrumentation data, application data, metrics, etc. – in real time, and deliver them to your analysis platform of choice. It allows you to:

- Add context to your data, by enriching it with information from external data sources.
- Help secure your data, by redacting, obfuscating, or encrypting sensitive fields.
- Optimize your data, per your performance and cost requirements.

Sources, Cribl Stream, Destinations

Cribl Stream ships in a single, no-dependencies package. It provides a refreshing and modern interface for working with and transforming your data. It scales with – and works inline with – your existing infrastructure, and is transparent to your applications.

Who Is Cribl Stream For?

Cribl Stream is built for administrators, managers, and users of operational/DevOps and security intelligence products and services.

1.2. Basic Concepts

Notable features and concepts to get a fundamental understanding of Cribl Stream

As we describe features and concepts, it helps to have a mental model of Cribl Stream as a system that receives events from various sources, processes them, and then sends them to one or more destinations.

Sources, Cribl Stream, Destinations

Let's zoom in on the center of the above diagram, to take a closer look at the processing and transformation options that Cribl Stream provides internally. The basic interface concepts to work with are Sources, which collect data; and Routes, which manage data flowing through Pipelines, which consist of Functions.

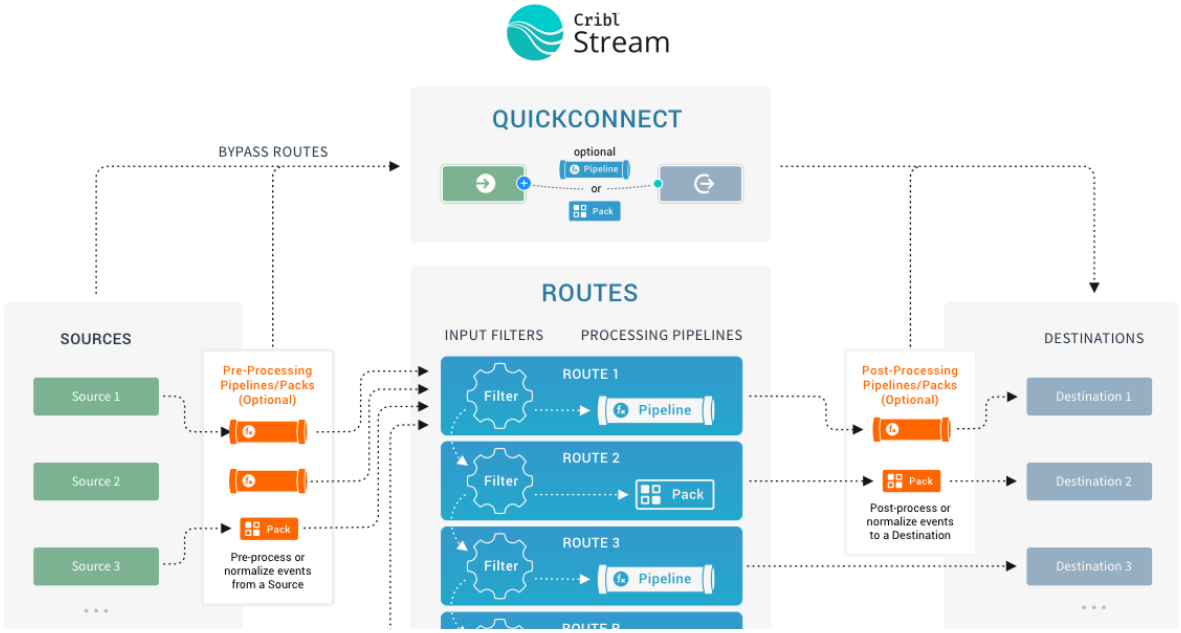

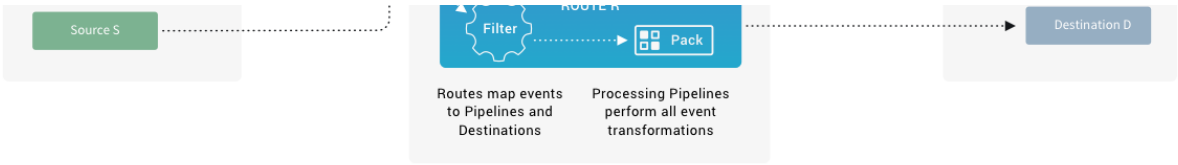

Routes, Pipelines, Functions

Sources

Sources are configurations that enable Cribl Stream to receive data from remote senders (Splunk, TCP, Syslog, etc.), or to collect data from remote file stores or the local machine.

QuickConnect

QuickConnect is a graphical interface for setting up data flow through your Cribl Stream deployment. You can quickly drag and drop connections between Sources and Destinations, optionally including – or excluding – Pipelines or Packs.

The only major constraint is that QuickConnect completely bypasses Routes. So QuickConnect configurations have no Routing table, and no conditional cloning, cascading, or routing of data – every QuickConnect connection is parallel and independent.

You use the top nav's **Routing** menu to toggle between the **Data Routes** and **QuickConnect** interfaces.

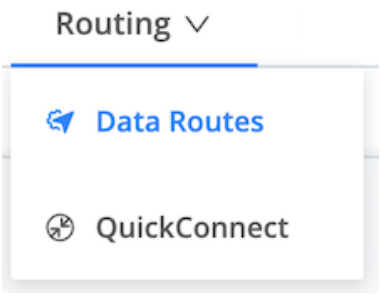

Select Data Routes to use the Routing table, or QuickConnect to bypass Routes

Routes

Routes evaluate incoming events against **filter** expressions to find the appropriate Pipeline to send them to. Routes are **evaluated in order**. Each Route can be associated **with only one** Pipeline and one output (configured as a Cribl Stream **Destination**).

By default, each Route is created with its `Final` flag set to `Yes`. With this setting, a Route-Pipeline-Destination set will consume events that match its filter, and that's that.

However, if you disable the Route's `Final` flag, one or more event **clones** will be sent down the associated Pipeline, while the original event continues down Cribl Stream's Routing table to be evaluated against other configured Routes. This is very useful in cases where the same set of events needs to be processed in multiple ways, and delivered to different destinations. For more details, see Routes.

Pipelines

A series of Functions is called a Pipeline, and the order in which you specify the Functions determines their execution order. Events are delivered to the beginning of a Pipeline by a Route, and as they're processed by a Function, the events are passed to the next Function down the line.



Pipelines attached to Routes are called **processing Pipelines**. You can optionally attach **pre-processing Pipelines** to individual Cribl Stream Sources, and attach **post-processing Pipelines** to Cribl Stream Destinations. All Pipelines are configured through the same UI – these three designations are determined only by a Pipeline's placement in Cribl Stream's data flow.

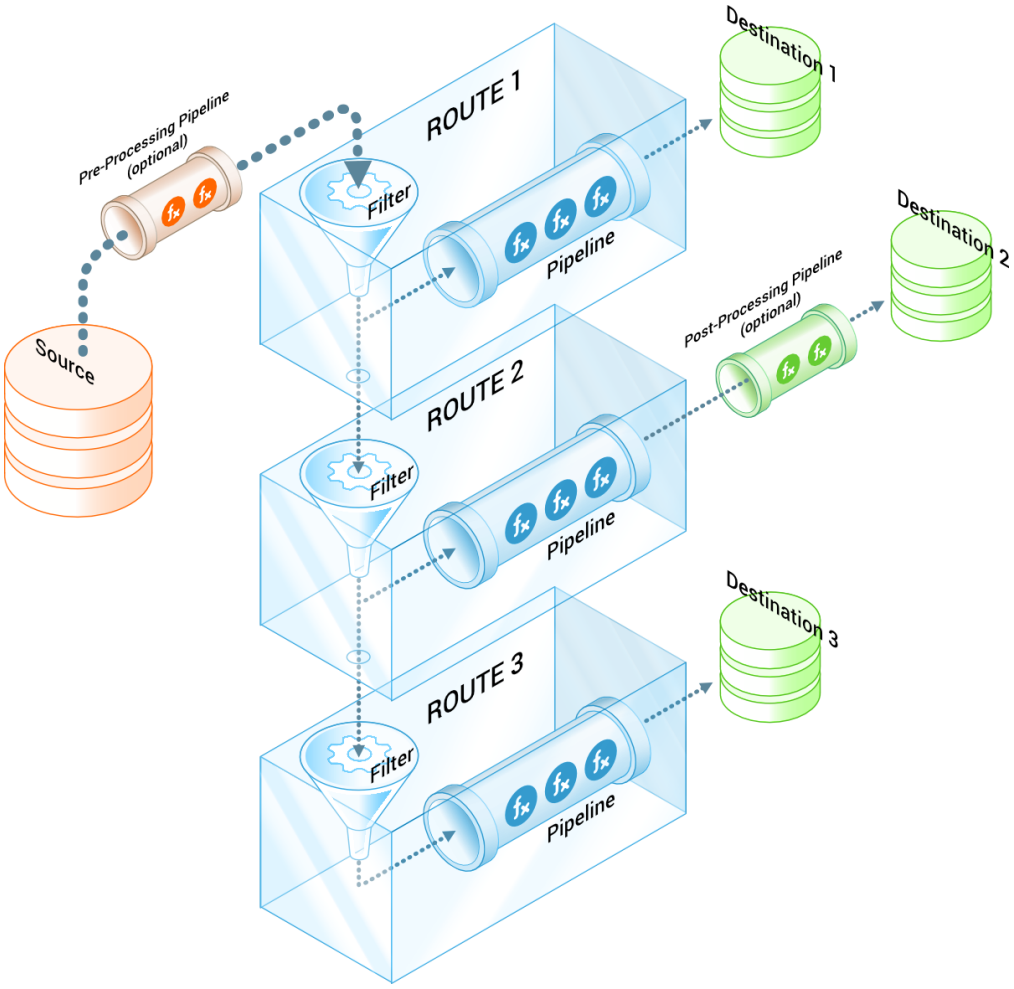

Pipelines categorized by position

Events only move forward – toward the end of a Pipeline, and eventually out of the system. For more details, see Pipelines.

Functions

At its core, a **Function** is a piece of code that executes on an event, and that encapsulates the smallest amount of processing that can happen to that event. For instance, a very simple Function can be one that replaces the term `foo` with `bar` on each event. Another one can hash or encrypt `bar`. Yet another function can add a field – say, `dc=jfk-42` – to any event with `source=*us-nyc-application.log`.

#	Function	Filter	All
1	Comment	Replace 'foo' with 'bar' (very important)	···
2	Eval	`"_raw includes('foo')"`	On ···
3	Comment	Mask sensitive information: MD5 hash of a social security number; MD...	···
4	Mask	`sourcetype=='business_event'`	On ···

Functions stacked in a Pipeline

Functions process each event that passes through them. To help improve performance, Functions can optionally be configured with filters, to limit their processing scope to matching events only. For more details, see Functions.

A Scalable Model

You can scale Cribl Stream up to meet enterprise needs in a distributed deployment. Here, multiple Cribl Stream Workers (instances) share the processing load. But as you can see in the preview schematic below, even complex deployments follow the same basic model outlined above.

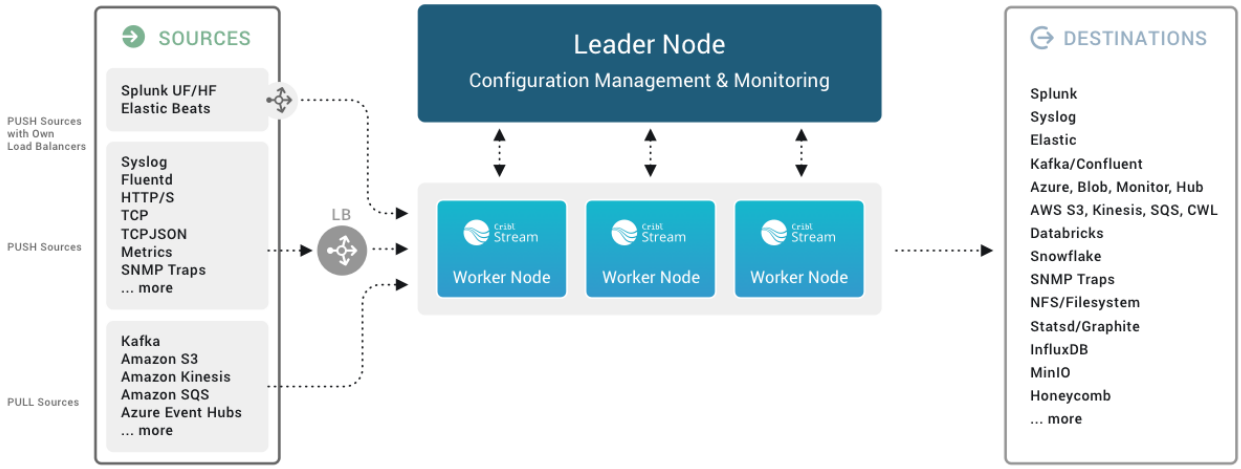

Distributed deployment architecture

1.3. QuickConnect

Cribl Stream 3.2 introduces the QuickConnect visual rapid-development UI. Here, you can visually connect Cribl Stream inputs (Sources) to outputs (Destinations) through simple drag-and-drop.

You can insert Pipelines or Packs into the connections, to take advantage of Cribl Stream's full range of data-transformation Functions. Or you can omit these processing stages entirely, to send incoming data directly to Destinations – with minimal configuration fuss.

QuickConnect was designed as a simple, quick way to prototype, test, and send data flowing through Cribl Stream. But it's also entirely suitable for configuring a production deployment, if your needs are restricted to sending data through parallel paths, and you don't need to use Routes.
(See QuickConnect Versus Routes to help you clarify that choice.)

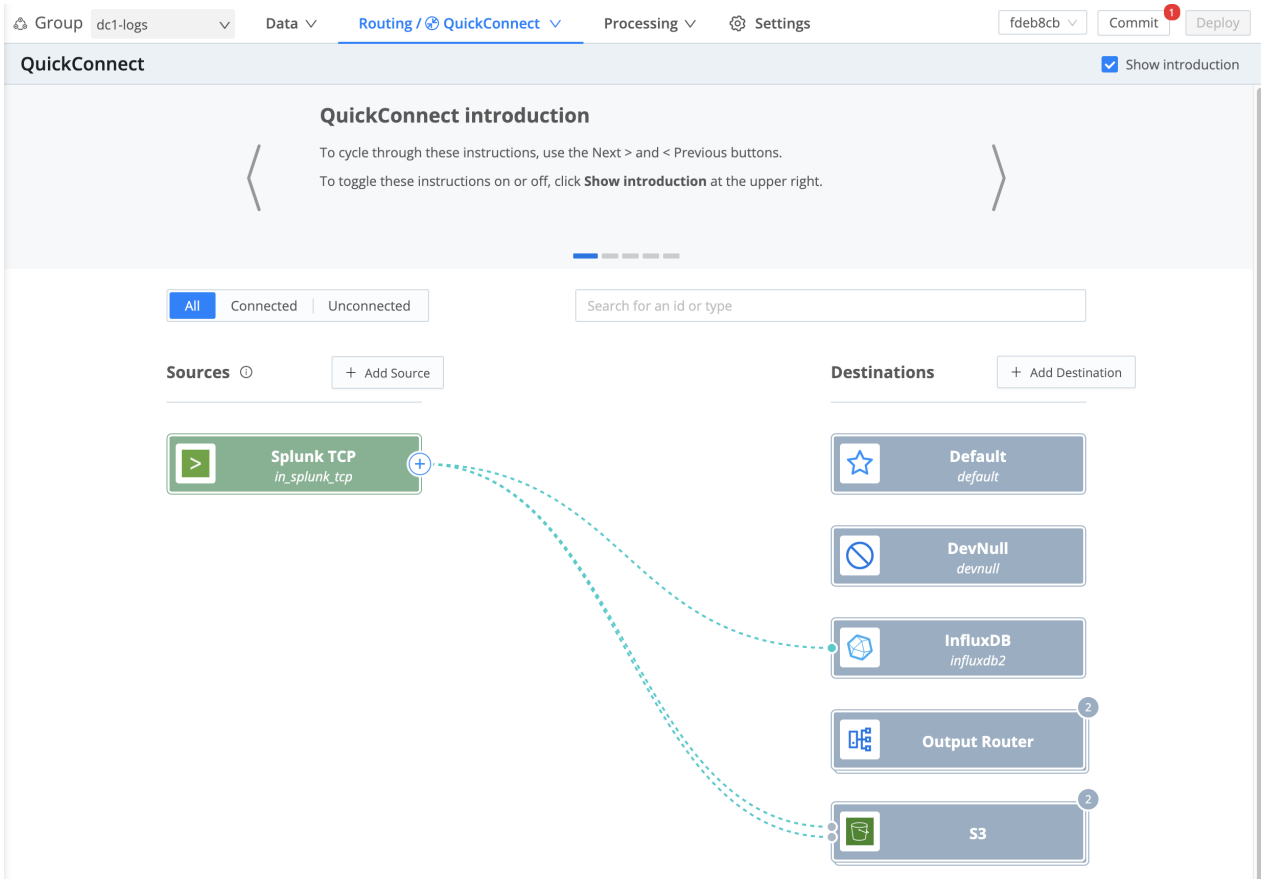

QuickConnect UI

> You also have the option to start with simple direct connections, and later add Pipelines' and/or Packs' processing power at up to three stages of each connection.

Initiating QuickConnect

When you display the home page of a Cribl Stream (LogStream) 3.2+ single instance or Worker Group, you'll see tiles that prompt you to choose between the **QuickConnect** versus **Route** configuration UIs. Click the left tile to start using QuickConnect.

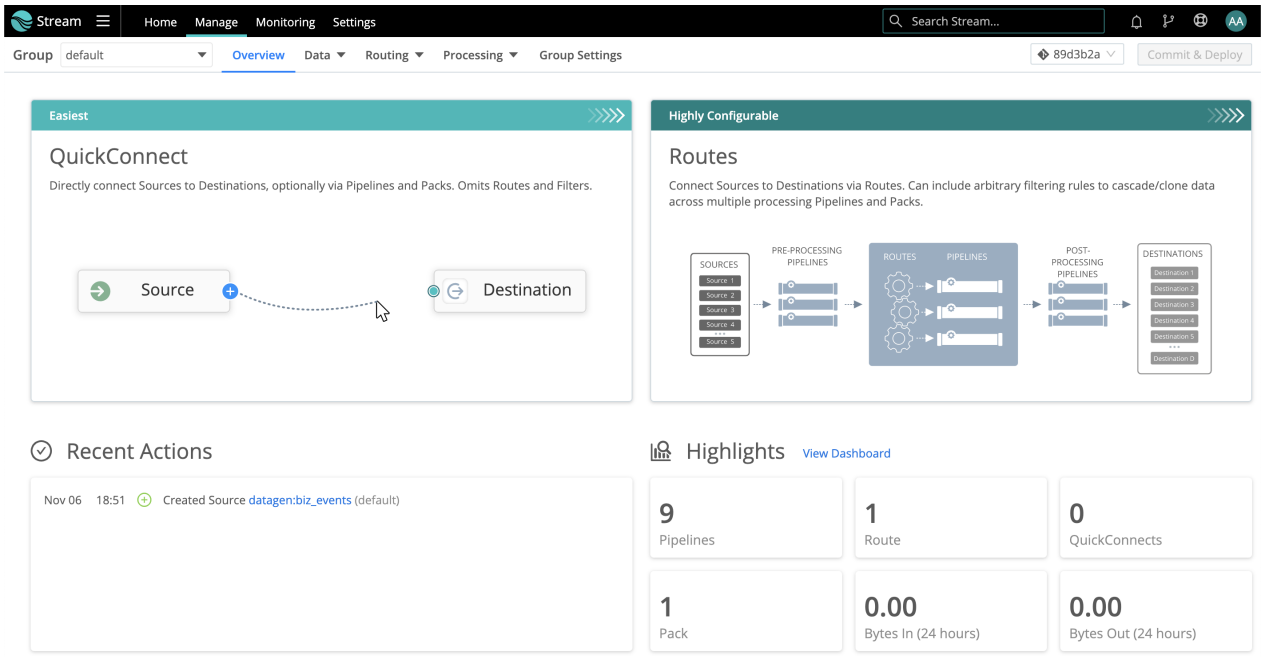

QuickConnect versus Routing UIs

To display the above landing page in a distributed deployment, you must first select a Group. Click the top nav's **Manage** link to select the `default` or a different Group; or click a Group's tile on the distributed landing page, as shown below.

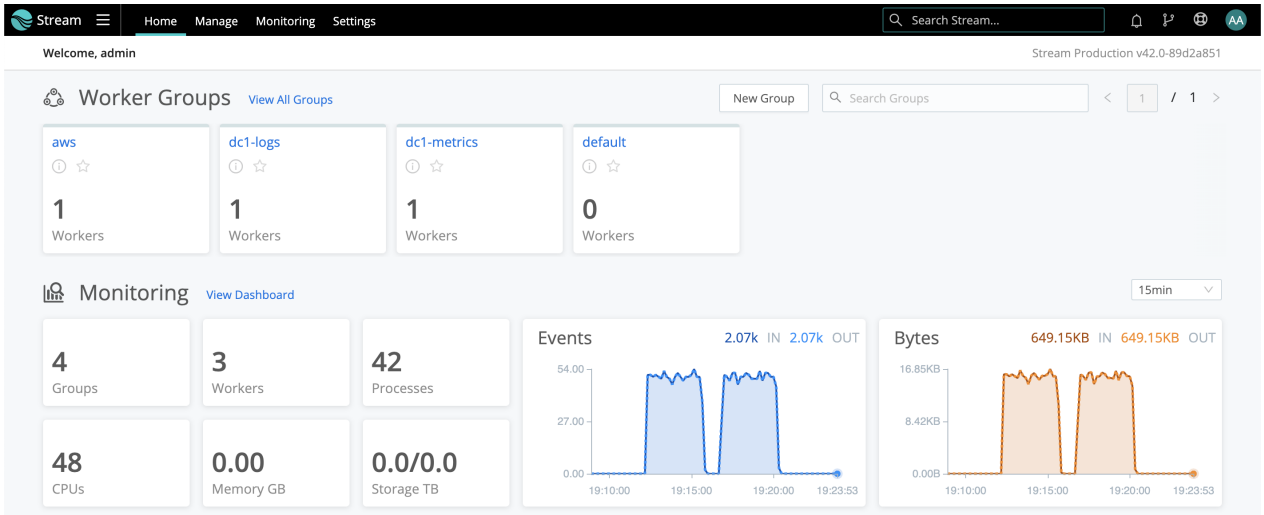

Selecting a Group

You can switch to Cribl Stream's Routes UI at any time from the top nav by selecting **Routing** > **Data Routes**. To toggle back, select **Routing** > **QuickConnect**.

QuickConnect Versus Routes

QuickConnect provides access to most of Cribl Stream's configuration options, with a few restrictions (in exchange for the simplified visual interface):

- QuickConnect completely bypasses Routes – which is why every QuickConnect path is independent and parallel. There is no Route-level data filtering, and you forego the Cribl Stream Routing table's options to clone and cascade data across Pipelines.
- Most Sources are available to fully configure. However, you'll need to use **Routing** > **Data Routes** to configure Collector Sources.
- Each supported Source's config can be created in either QuickConnect or Routes, and will reside only in that context. But you can switch a config between the two contexts, or you can create an identical config on the opposite side.
- All Destinations are available to fully configure.
- Everything you configure in QuickConnect exists separately from everything you configure in Data Routes. (But remember that you can use the **Routing** menu to toggle between contexts, and then replicate a QuickConnect configuration on the Data Routes side, or vice versa.)

Using QuickConnect

QuickConnect is designed to be nearly self-documenting, with **Introduction** help text available at the top of the UI. Here's a little extra help on help, keyed to the orange, numbered callouts in the screenshot below:

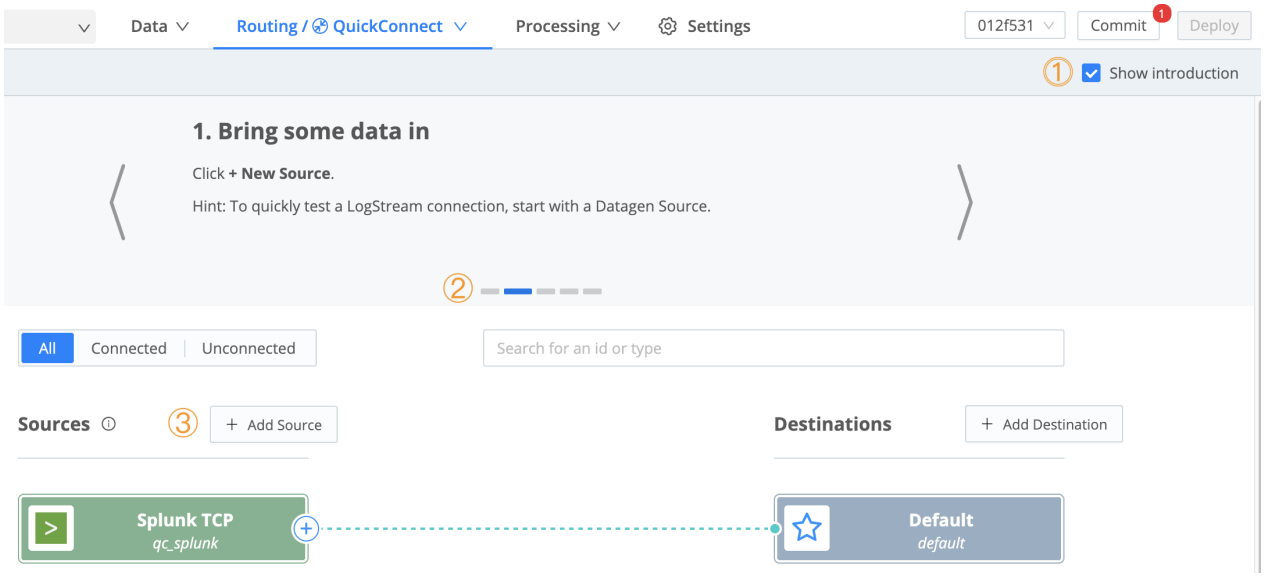

QuickConnect Introduction/help carousel

1. Use the **Show introduction** check box at the upper right to toggle the help text on and off.
2. Use the dashed buttons to advance or rewind the help text's carousel (whose position is independent of your connection state).
3. Once you've added at least one Source, the **New Source** button (mentioned in the help text) becomes an **Add Source** button beside the **Sources** header.

Enabling Sources and Destinations

When you click to add Sources and Destinations, their configuration options will open in a drawer. Fill in a unique **Input ID**, and any other required fields marked by an asterisk (*). Then click **Save**.

Switching Contexts

If you switch an **existing** Source to QuickConnect – for example, one of the preconfigured Sources that ship with Cribl Stream – you'll see the dialog shown below. This is due to QuickConnect's independence from the Routes interface – you need to confirm your choice to move the existing configuration from the Data Routes world to the QuickConnect world.

Switching a Source/Destination between worlds

> If you switch an existing Source config to QuickConnect, its data will no longer flow through its configured Route.

You can also go the opposite way: move a Source originally configured in QuickConnect to the Routing interface. In the Source's drawer or config modal, select the **Connected Destinations** left tab, and then click the resulting tab's **Send to Routes** button. Here again, you'll need to confirm your choice before proceeding.

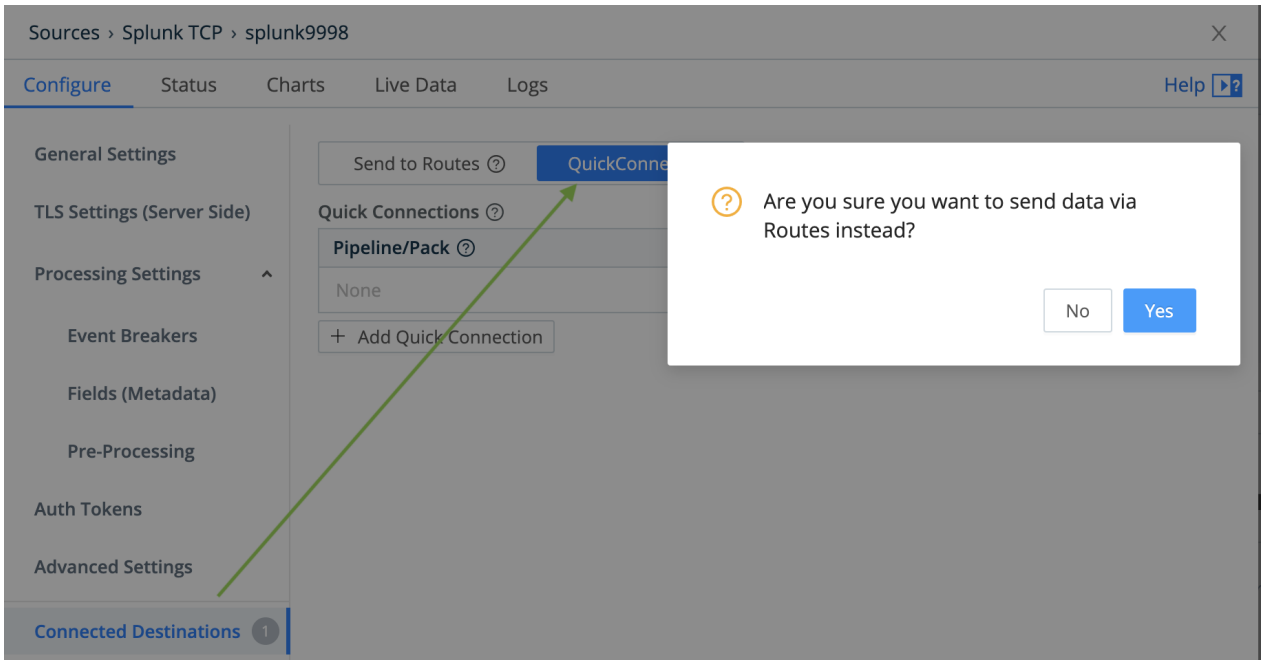

Switching a Source/Destination between worlds

Selecting a Pipeline or Pack

When you add or modify a connection line, the **Connection Configuration** modal will prompt you to select a **Passthru**, **Pipeline**, or **Pack** connection. Selecting either **Pipeline** or **Pack** will open an **Add...** modal like this:

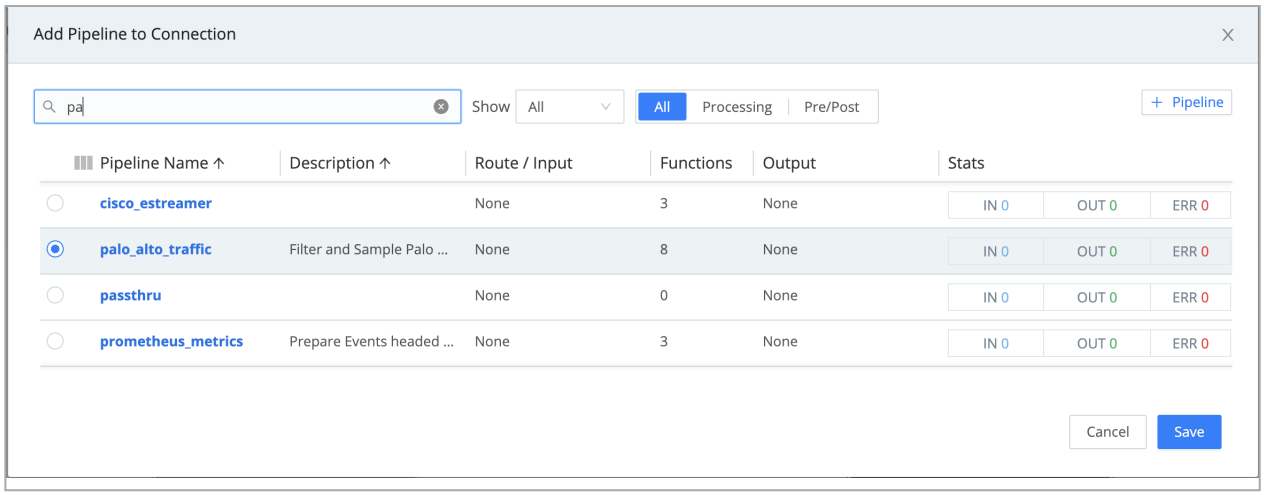

Adding a Pipeline

Here, you're using the radio buttons at left to select among already-configured Pipelines or Packs. **Resist the temptation to click on a bold blue Pipeline or Pack name.** (Doing so will open the Pipeline's or Pack's config in a new modal, which might offer more configuration than you bargained for.)

Instead, click the radio button to the left of the Pipeline or Pack you want to select. (Or click on some black text around the center of your desired Pipeline's/Pack's row, which will fill in its radio button.) Then click **Save** to confirm your choice and close the modal.

If you've attached Tags to your Pipelines or Packs, you can use the filter field to search against them. Use the format: **TAGS/tag_name**.

Editing a Pipeline

If you want to modify a Pipeline, this is where you do want to click its blue link in the **Add Pipeline to Connection** modal. For the options available here, see Pipelines.

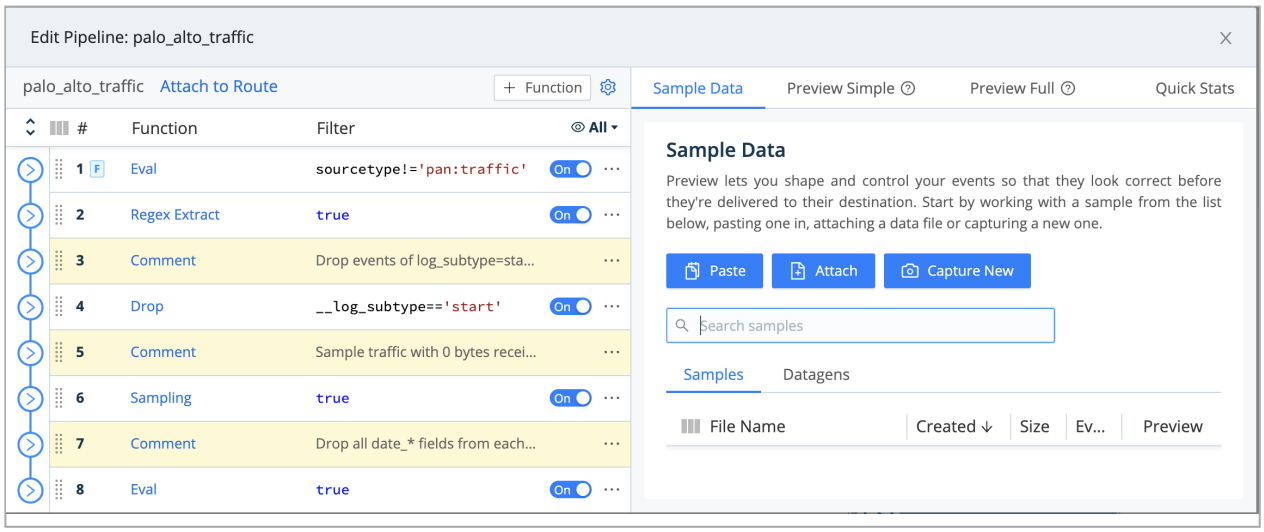

Multiple Connections

You can drag multiple connection lines between a given Source/Destination pair. (You might do this, for example, to configure parallel Pipelines to handle different data types.)

Also, you can connect one Source to multiple Destinations, or multiple Sources to one Destination. Let's isolate examples of both, from the screen capture we started with:

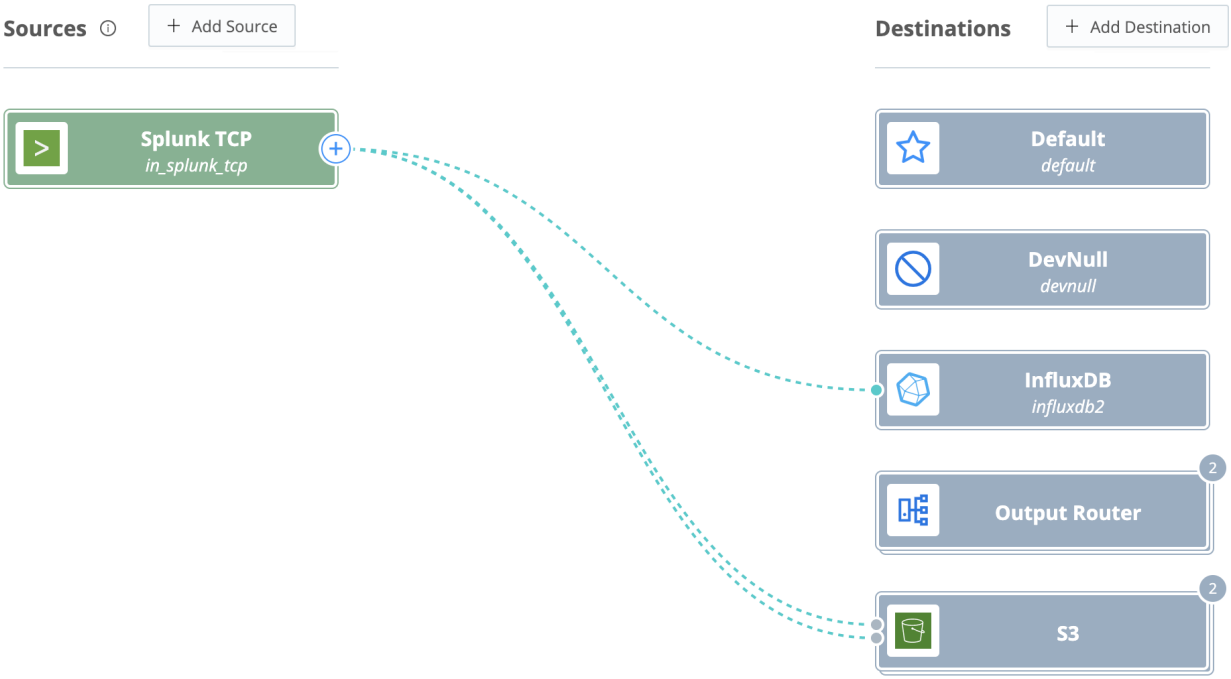

Multiple connections out, multiple connections in

Source/Destination Tiles' Hover Options

Once you've configured a Source or Destination, hovering over its tile will display options like these:

Signed, sealed, delivered: tiles' on-hover options

The leftmost button is an indicator of the Source's/Destination's state. Live means healthy; disabled, error, or warning states will also appear here. Note that a Source will appear as **Disabled** until you connect it to a Destination.

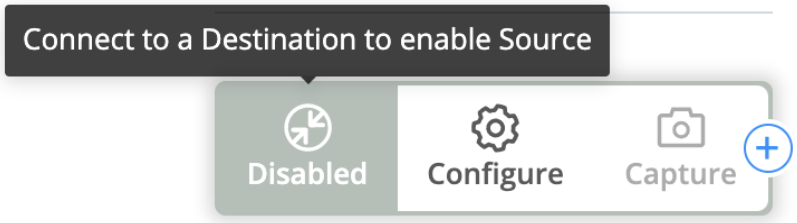

This Source is not misconfigured – it's just lonely

Clicking the middle **Configure** button reopens the Source's Destination's configuration drawer, where you can address any problems or simply update the configuration.

The right **Capture** button captures a sample of data flowing through the Source or Destination, in a drawered version of the Source's/Destinations's config modal > Live tab. (Not to be confused with a healthy tile's left **Live** indicator.)

Group Connections

Once you've configured two or more copies of the same Source or Destination type – for example, to support different configurations of one integration or protocol – QuickConnect stacks their tiles together to keep the display clean.

4 similar Destinations, stacked

> The number at the stack's upper right shows how many tiles it contains.

Hovering over a stack doesn't change its options...until you click on it. This will expand all the tiles in the group, so each tile can now reveal the on-hover options described above.

You can drag multiple connection lines from, or to, the same stack. If you drag or modify a connection from or to a stacked group, the UI will prompt you whether to similarly expand the group to access individual tiles.

1.4. Getting Started Guide

This guide walks you through planning, (optionally) installing, and configuring a basic deployment of Cribl Stream. You'll capture some realistic sample log data, and then use Cribl Stream's built-in Functions to redact, parse, refine, and shrink the data.

By the end of this guide, you'll have assembled all of Cribl Stream's basic building blocks: a Source, Route, Pipeline, several Functions, and a Destination. You can complete this tutorial using Cribl Stream's included sample data, without connections to – or licenses on – any inbound or outbound services.

Assuming a cold start (from first-time setup of a Cribl.Cloud or self-hosted instance), this guide might take about an hour. But you can work through it in chunks, and Cribl Stream will persist your work between sessions.

> If you've already launched a Cribl Stream instance (either Cribl.Cloud or self-hosted), skip ahead to Get Data Flowing.
>
> If you'd prefer a similar tutorial based on Cribl Stream's simplified, visual QuickConnect UI, see our CrowdStream setup guide. All the steps shown there work in Cribl.Cloud as well.
>
> Once you've mastered all the techniques in this tutorial, check out its Distributed Quick Start successor.

Cloud or Self-Hosted?

To quote Robert Frost and Robert Plant (of Led Zeppelin), there are two paths that you can go by:

- Do this tutorial with a free Cribl.Cloud instance, hosted by Cribl. Follow the registration instructions in the section just below. This skips you past all the requirements and installation sections below – you'll have nothing to install or host. Because Cribl.Cloud always runs in distributed mode, this will require a few extra clicks (all clearly labeled) later in the tutorial's body. But it will give you immediate experience with Cribl Stream's typical production mode.

- Do this tutorial by downloading and installing Cribl Stream software on your own hardware or virtual machine. Follow the Requirements and Download and Install instructions below. You'll need to provide your own infrastructure. But if you're planning to use self-hosted/on-prem Cribl Stream in production, this will walk you through its realistic setup.

> To fully experience a real-world, self-hosted production setup, you can switch your Cribl Stream installation to distributed mode. And then chase this tutorial with our Distributed Quick Start, which fully exercises distributed mode's multiple Workers and Worker Groups.

Quick Start with a Cloud Instance

As indicated just above, you can skip installing Cribl Stream software – and skip this tutorial's next several sections – by registering a free Cribl.Cloud instance. Cribl will quickly spin up a fully functioning copy of Cribl Stream for you, and manage it on your behalf. To use this fastest option:

1. In the Cribl.Cloud Launch Guide, follow the four steps listed in Registering a Cribl.Cloud Portal.
2. In the same Cribl.Cloud Launch Guide, jump ahead to follow the four steps listed in Managing Cribl.Cloud.
3. That's it! Come right back to this tutorial, and skip ahead to Get Data Flowing.

> Really, skip all the other sections of the linked Cloud Guide, and all this tutorial's sections between here and Get Data Flowing. We told you this was a quick start!

Requirements for Self-Hosted Cribl Stream

The minimum requirements for running this tutorial are the same as for a Cribl Stream production single-instance deployment.

OS (Intel Processors)

- Linux 64-bit kernel >= 3.10 and glibc >= 2.17
- Examples: Ubuntu 16.04, Debian 9, RHEL 7, CentOS 7, SUSE Linux Enterprise Server 12+, Amazon Linux 2014.03+

OS (ARM64 Processors)

- Linux 64-bit
- Tested so far on Ubuntu (14.04, 16.04, 18.04, and 20.04), CentOS 7.9, and Amazon Linux 2

System

- +4 physical cores, +8GB RAM – all beyond your basic OS/VM requirements
- 5GB free disk space (more if persistent queuing is enabled)

> We assume that 1 physical core is equivalent to 2 virtual/hyperthreaded CPUs (vCPUs) on Intel/Xeon or AMD processors; and to 1 (higher-throughput) vCPU on Graviton2/ARM64 processors.

Browser Support

- Firefox 65+, Chrome 70+, Safari 12+, Microsoft Edge

Network Ports

By default, Cribl Stream listens on the following ports:

COMPONENT	DEFAULT PORT
UI default	`9000`
HTTP Inbound, default	`10080`
User options	+ Other data ports as required.

You can override these defaults as needed.

Plan for Production

For higher processing volumes, users typically enable Cribl Stream's Distributed Deployment option. While beyond the scope of this tutorial, that option has a few additional requirements, which we list here for planning purposes:

- Port `4200` must be available on the Leader Node for Workers' communications.
- Git (1.8.3.1 or higher) must be installed on the Leader Node, to manage configuration changes.

See Sizing and Scaling for further details about configuring Cribl Stream to handle large data streams.

Download and Install Cribl Stream

To avoid permissions errors, you should both install and run (next section) Cribl Stream as the same Linux user. For details on creating a new user (addressing both systemd and initd distro's), see Enabling Start on Boot.

Download the latest version of Cribl Stream at https://cribl.io/download/.

Un-tar the resulting `.tgz` file in a directory of your choice (e.g., `/opt/`). Here's general syntax, then a specific example:

```
tar xvzf cribl-<version>-<build>-<arch>.tgz
tar xvzf cribl-3.5.0-fa5eb040-linux-x64.tgz
```

You'll now have Cribl Stream installed in a `cribl` subdirectory, by default: `/opt/cribl/`. We'll refer to this `cribl` subdirectory throughout this documentation as `$CRIBL_HOME`.

Run Cribl Stream

In your terminal, switch to the `$CRIBL_HOME/bin` directory (e.g,: `/opt/cribl/bin`). Here, you can start, stop, and verify the Cribl Stream server using these basic `./cribl` CLI commands:

- **Start**: `./cribl start`
- **Stop**: `./cribl stop`
- **Get status**: `./cribl status`

> For other available commands, see CLI Reference.

Next, in your browser, open `http://<hostname>:9000` (e.g., `http://localhost:9000`) and log in with default credentials (`admin`, `admin`).

Register your copy of Cribl Stream when prompted.

After registering, you'll be prompted to change the default password.

That's it!

Get Data Flowing

With Cribl Stream now running – either in Cribl.Cloud or in your self-hosted copy – you're ready to configure a working Cribl Stream deployment. You'll set up a Source, Destination, Pipeline, and Route, and will assemble several built-in Functions to refine sample log data.

Add a Source

Each Cribl Stream Source represents a data input. Options include Splunk, Elastic Beats, Kinesis, Kafka, syslog, HTTP, TCP JSON, and others.

For this tutorial, we'll enable a Cribl Stream built-in datagen (i.e., data generator) that generates a stream of realistic sample log data.

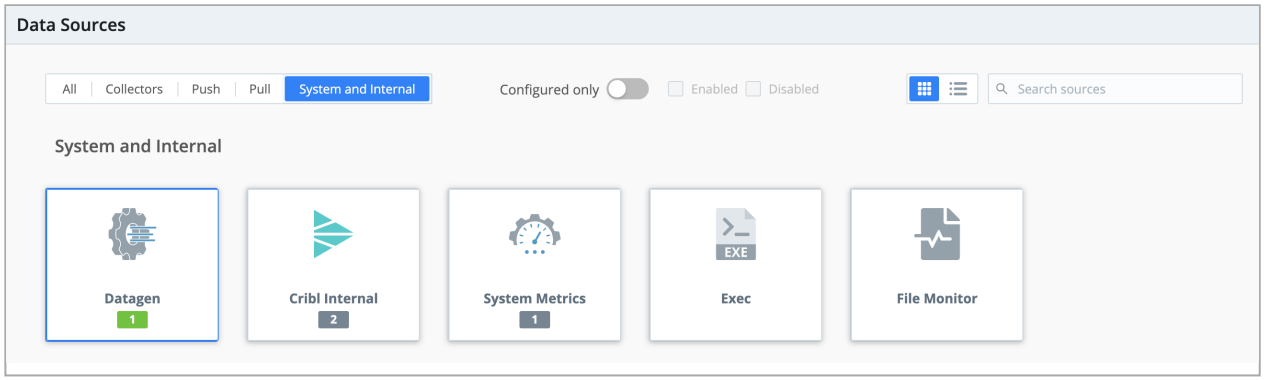

Adding a datagen Source

> If you're on Cribl.Cloud or any other distributed mode, first click the top nav's **Manage** tab to select the `default` (or another) Worker Group.

1. From Cribl Stream's **Manage** submenu, select **Data** > **Sources**.
2. From the **Data Sources** page's tiles or left menu, select **Datagen**.

   (You can use the search box to jump to the **Datagen** tile.)
3. Click **Add Source** to open the **New Source** modal.
4. In the **Input ID** field, name this Source `businessevent`.
5. In the **Data Generator File** drop-down, select `businessevent.log`.

   This generates...log events for a business scenario. We'll look at their structure shortly, in Capture and Filter Sample Data.

6. Click **Save**.

> If you're on Cribl.Cloud or any other distributed mode, click **Commit & Deploy** at Cribl Stream's upper right before proceeding. Then, in the resulting dialog box, click **Commit & Deploy** to confirm. You'll see a **Commit successful** message.

The **Yes** slider in the **Enabled** column indicates that your Datagen Source has started generating sample data.

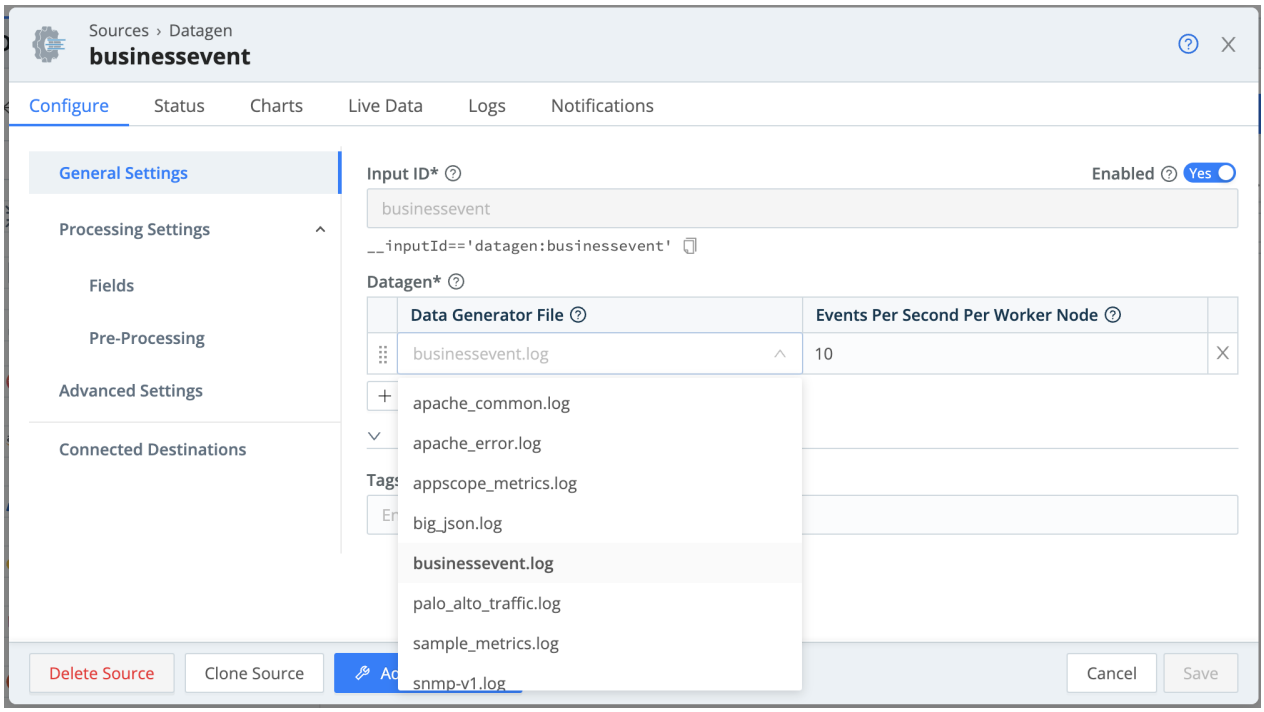

Configuring a datagen Source

Add a Destination

Each Cribl Stream Destination represents a data output. Options include Splunk, Kafka, Kinesis, InfluxDB, Snowflake, Databricks, TCP JSON, and others.

For this tutorial, we'll use Cribl Stream's built-in **DevNull** Destination. This simply discards events – not very exciting! But it simulates a real output, so it provides a configuration-free quick start for testing Cribl Stream setups. It's ideal for our purposes.

To verify that **DevNull** is enabled, let's walk through setting up a Destination, then setting it up as Cribl Stream's default output:

> On Cribl.Cloud or any other distributed mode, first click the top nav's **Manage** tab to select the `default` (or another) Worker Group.

1. From Cribl Stream's top menu, select **Data** > **Destinations**.
2. From the **Data Destinations** page's tiles or left menu, select **DevNull**.

   (You can use the search box to jump to the **DevNull** tile.)
3. On the resulting **devnull** row, look for the **Live** indicator under **Status**. This confirms that the **DevNull** Destination is ready to accept events.
4. From the **Data Destinations** page's left nav, select the **Default** Destination at the top.
5. On the resulting **Manage Default Destination** page, verify that the **Default Output ID** drop-down points to the **devnull** Destination we just examined.

> If you're on Cribl.Cloud or any other distributed mode, click **Commit & Deploy** at Cribl Stream's upper right (if available) before proceeding. Then, in the resulting dialog box, click **Commit & Deploy** to confirm. You'll see a **Commit successful** message.

We've now set up data flow on both sides. Is data flowing? Let's check.

Monitor Data Throughput

Click the top nav's **Monitoring** tab. This opens a summary dashboard, where you should see a steady flow of data in and out of Cribl Stream. The left graph shows events in/out. The right graph shows bytes in/out.

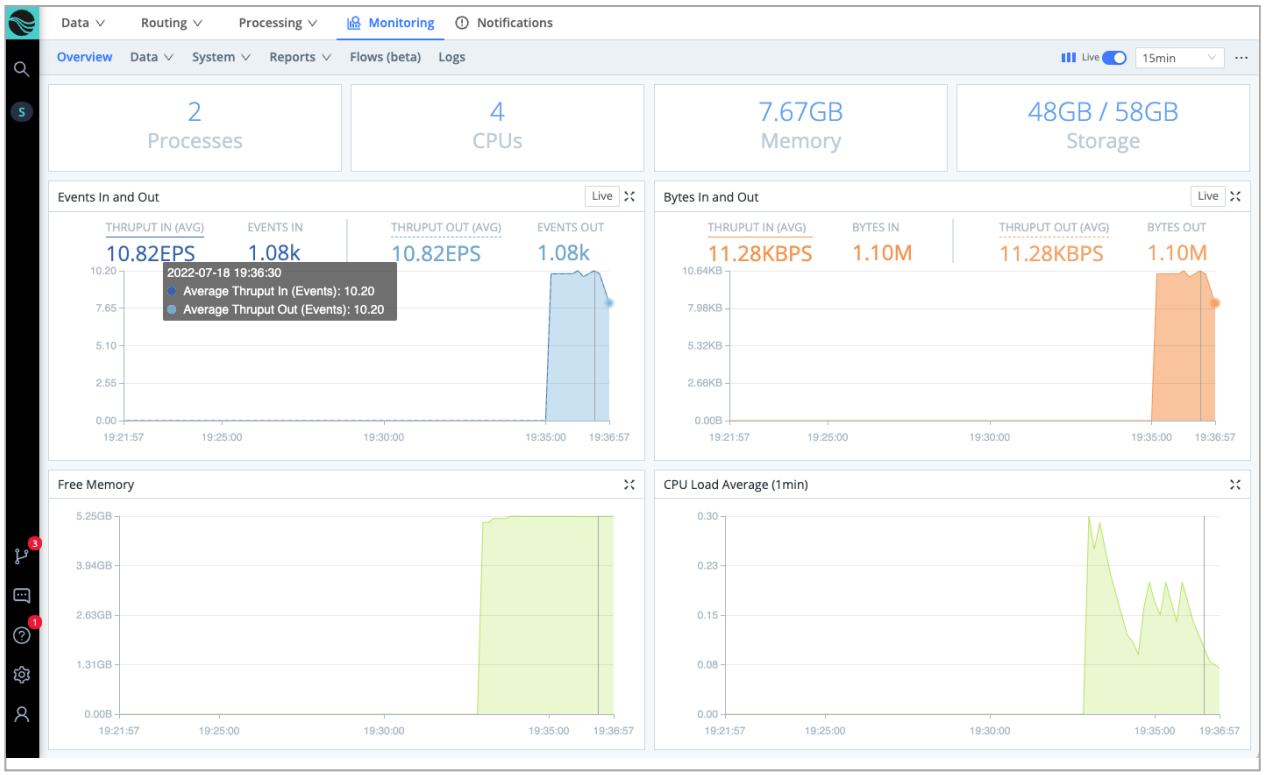

Monitoring dashboard

Monitoring displays data from the preceding 24 hours. You can use the **Monitoring** submenu to open detailed displays of Cribl Stream components, collection jobs and tasks, and Cribl Stream's own internal logs. Click **Sources** on the lower submenu to switch to this view:

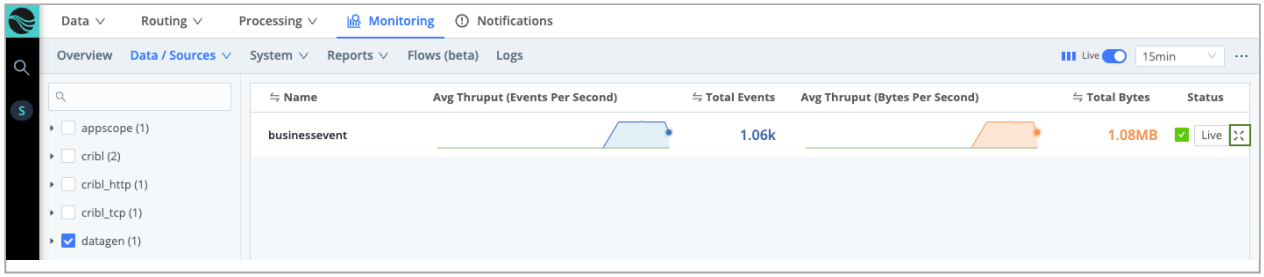

Monitoring Sources

This is a compact display of each Source's inbound events and bytes as a sparkline. You can click each Source's Expand button (highlighted at right) to zoom up detailed graphs.

Click **Destinations** on the lower submenu. This displays a similar sparklines view, where you can confirm data flow out to the **devnull** Destination:

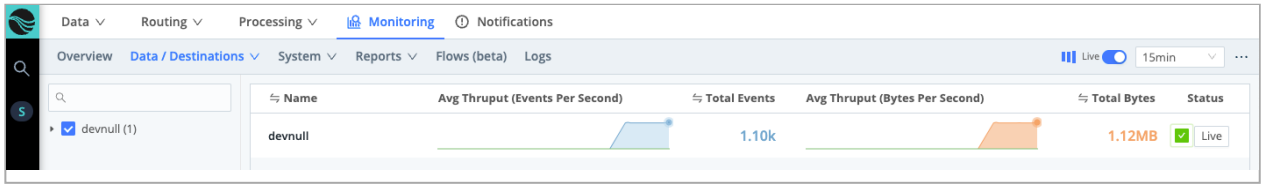

With confidence that we've got data flowing, let's send it through a Cribl Stream Pipeline, where we can add Functions to refine the raw data.

Create a Pipeline

A Pipeline is a stack of Cribl Stream Functions that process data. Pipelines are central to refining your data, and also provide a central Cribl Stream workspace – so let's get one going.

> On Cribl.Cloud or any other distributed mode, first click the top nav's **Manage** tab to select the `default` (or another) Worker Group.

1. From the top menu, select **Processing** > **Pipelines**.

   You now have a two-pane view, with a **Pipelines** list on the left and **Sample Data** controls on the right. (We'll capture some sample data momentarily.)

2. At the **Pipelines** pane's upper right, click **Add Pipeline**, then select **Create Pipeline**.

3. In the new Pipeline's **ID** field, enter a unique identifier. (For this tutorial, you might use `slicendice`.)

4. Optionally, enter a **Description** of this Pipeline's purpose.

5. Click **Save**.

Now scroll through the right **Preview** pane. Depending on your data sample, you should now see multiple events struck out and faded – indicating that Cribl Stream will drop them before forwarding the data.

> If you're on Cribl.Cloud or any other distributed mode, click **Commit & Deploy** at Cribl Stream's upper right before proceeding. Then, in the resulting dialog box, click **Commit & Deploy** to confirm. You'll see a **Commit successful** message.

Your empty Pipeline now prompts you to preview data, add Functions, and attach a Route. So let's capture some data to preview.

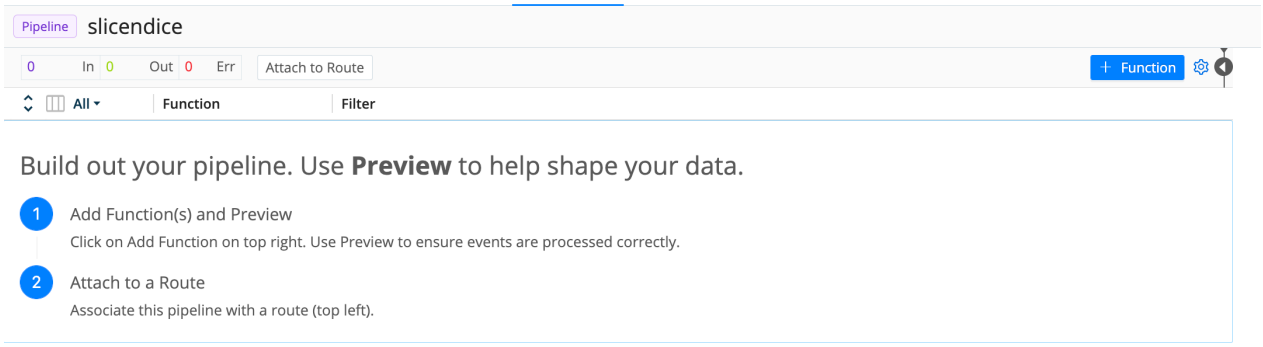

Pipeline prompt to add Functions

Capture and Filter Sample Data

The right **Sample Data** pane provides multiple tools for grabbing data from multiple places (inbound streams, copy/paste, and uploaded files); for previewing and testing data transformations as you build them; and for saving and reloading sample files.

Since we've already got live (simulated) data flowing in from the datagen Source we built, let's grab some of that data.

Capture New Data

1. In the right pane, click **Capture New**.
2. Click **Capture**, then accept the drop-down's defaults – click **Start**.
3. When the modal finishes populating with events, click **Save as Sample File**.
4. In the **SAMPLE FILE SETTINGS** fly-out, change the generated **File Name** to a name you'll recognize, like `be_raw.log`.
5. Click **Save**. This saves to the **File Name** you entered above, and closes the modal. You're now previewing the captured events in the right pane. (Note that this pane's **Preview Simple** tab now has focus.)
6. Click the **Show more** link to expand one or more events.

By skimming the key-value pairs within the data's `_raw` fields, you'll notice the scenario underlying this preview data (provided by the `businessevents.log` datagen): these are business logs from a mobile-phone provider.

To set up our next step, find at least one `marketState` K=V pair. Having captured and examined this raw data, let's use this K=V pair to crack open Cribl Stream's most basic data-transformation tool, Filtering.

Filter Data and Manage Sample Files

1. Click the right pane's **Sample Data** tab.
2. Again click **Capture New**.
3. In the **Capture Sample Data** modal, replace the **Filter Expression** field's default `true` value with this simple regex: `_raw.match(/marketState=TX/)`

   We're going to Texas! If you type this in, rather than pasting it, notice how Cribl Stream provides typeahead assist to complete a well-formed JavaScript expression.

   You can also click the Expand button at the **Filter Expression** field's right edge to open a modal to validate your expression. The adjacent drop-down enables you to restore previously used expressions.

Expand button and history drop-down

4. Click **Capture**, then **Start**.

   Using the **Capture** drop-down's default limits of 10 seconds and 10 events, you'll notice that with this filter applied, it takes much longer for Cribl Stream to capture 10 matching events.
5. Click **Cancel** to discard this filtered data and close the modal.
6. On the right pane's **Sample Data** tab, click **Simple** beside `be_raw.log`.

This restores our preview of our original, unfiltered capture. We're ready to transform this sample data in more interesting ways, by building out our Pipeline's Functions.

Refine Data with Functions

Functions are pieces of JavaScript code that Cribl Stream invokes on each event that passes through them. By default, this means all events – each Function has a **Filter** field whose value defaults to `true`. As we just saw with data capture, you can replace this value with an expression that scopes the Function down to particular matching events.

In this Pipeline, we'll use some of Cribl Stream's core Functions to:

- Redact (mask) sensitive data
- Extract (parse) the `_raw` field's key-value pairs as separate fields.
- Add a new field.
- Delete the original `_raw` field, now that we've extracted its contents.
- Rename a field for better legibility.

Mask: Redact Sensitive Data

In the right **Preview** pane, notice each that event includes a **social** key, whose value is a (fictitious) raw Social Security number. Before this data goes any further through our Pipeline, let's use Cribl Stream's `Mask` Function to swap in an md5 hash of each SSN.

1. In the left **Pipelines** pane, click **Add Function**.
2. Search for `Mask`, then click it.
3. In the new Function's **Masking Rules**, click the into **Match Regex** field.

   Now we want to build the **Match Regex**/**Replace Expression** row shown just below.
4. Enter or paste this regex, which simply looks for the string `social=`, followed by any digits: `(social=)(\d+)`
5. In **Replace Expression**, paste the following hash function. The backticks are literal: `` `${g1}${C.Mask.md5(g2)}` ``
6. Note that **Apply to Fields** defaults to `_raw`. This is what we want to target, so we'll accept this default.
7. Click **Save**.

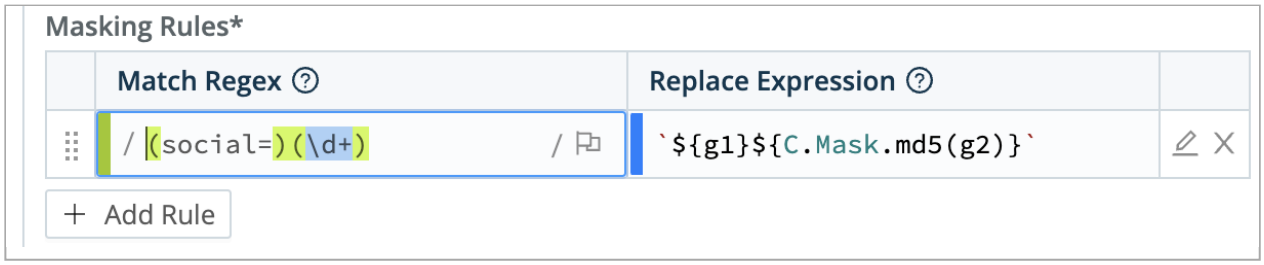

Entering a Masking Rule to hash Social Security numbers

You'll immediately notice some obvious changes:

- The **Preview** pane has switched from its **IN** to its **OUT** tab, to show you the outbound effect of the Pipeline you just saved.

- Each event's `_raw` field has changed color, to indicate that it's undergone some redactions.

Now locate at least one event's **Show more** link, and click to expand it. You can verify that the `social` values have now been hashed.

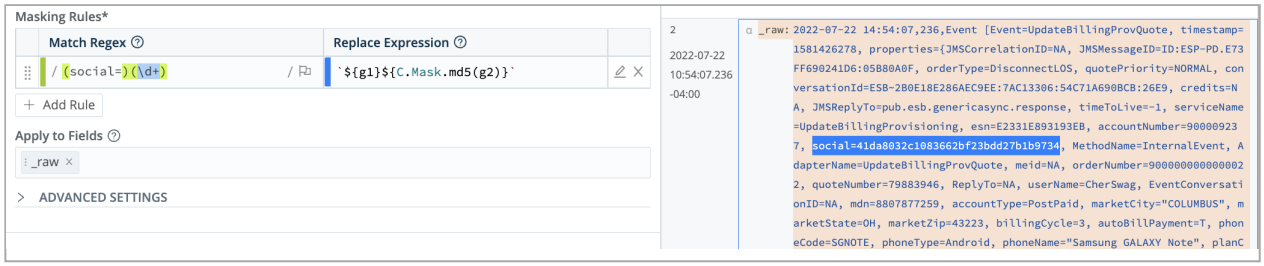

Mask Function and hashed result

Parser: Extract Events

Having redacted sensitive data, we'll next use a Parser function to lift up all the `_raw` field's key-value pairs as fields:

1. In the left **Pipelines** pane, click **Add Function**.

2. Search for `Parser`, then click it.

3. Leave the **Operation Mode** set to its `Extract` default.

4. Set the **Type** to `Key=Value Pairs`.

5. Leave the **Source Field** set to its `_raw` default.

6. Click **Save**.

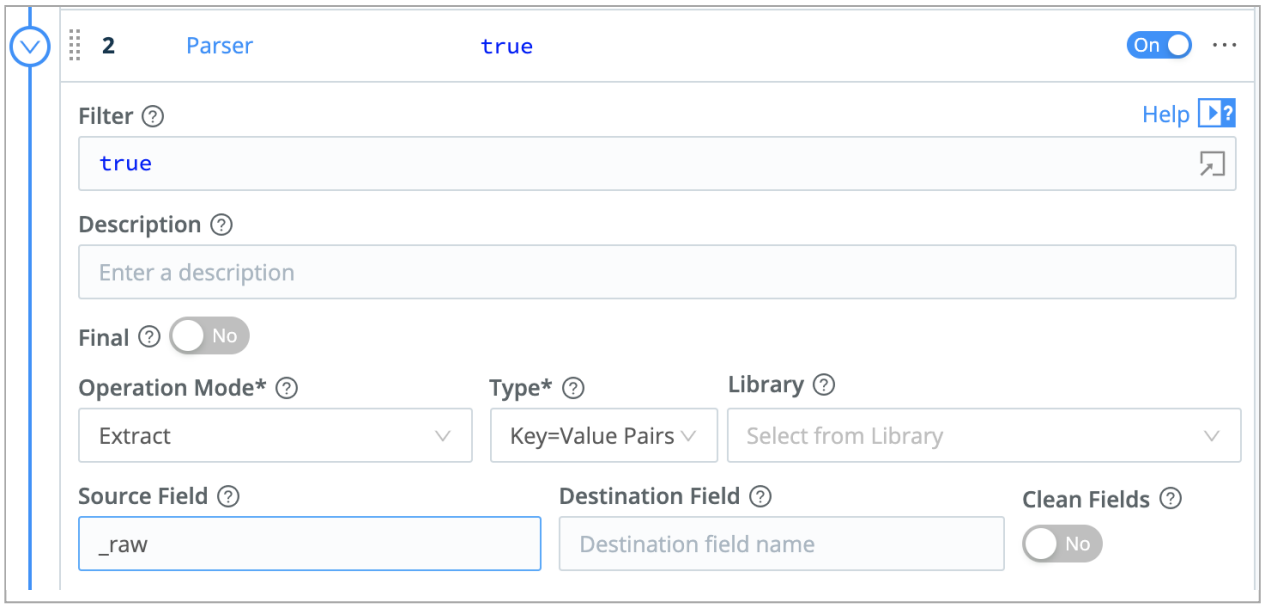

Parser configured to extract K=V pairs from `_raw`

You should see the **Preview** pane instantly light up with a lot more fields, parsed from `_raw`. You now have rich structured data, but not all of this data is particularly interesting: Note how many fields have `NA` ("Not Applicable") values. We can enhance the **Parser** Function to ignore fields with `NA` values.

1. In the Function's **Fields Filter Expression** field (near the bottom), enter this negation expression: `value!='NA'`.

   Note the single-quoted value. If you type (rather than paste) this expression, watch how typeahead matches the first quote you type.

2. Click **Save**, and watch the **Preview** pane.



Filtering the Parser Function to ignore fields with 'NA' values

Several fields should disappear – such as `credits`, `EventConversationID`, and `ReplyTo`. The remaining fields should display meaningful values. Congratulations! Your log data is already starting to look better-organized and less bloated.

Missed It?

If you didn't see the fields change, slide the Parser Function **Off**, click **Save** below, and watch the **Preview** pane change. Using these toggles, you can preserve structure as you test and troubleshoot

each Function's effect.

Note that each Function also has a **Final** toggle, defaulting to **Off**. Enabling **Final** anywhere in the Functions stack will prevent data from flowing to any Functions lower in the UI.

Be sure to toggle the Function back **On**, and click **Save** again, before you proceed!

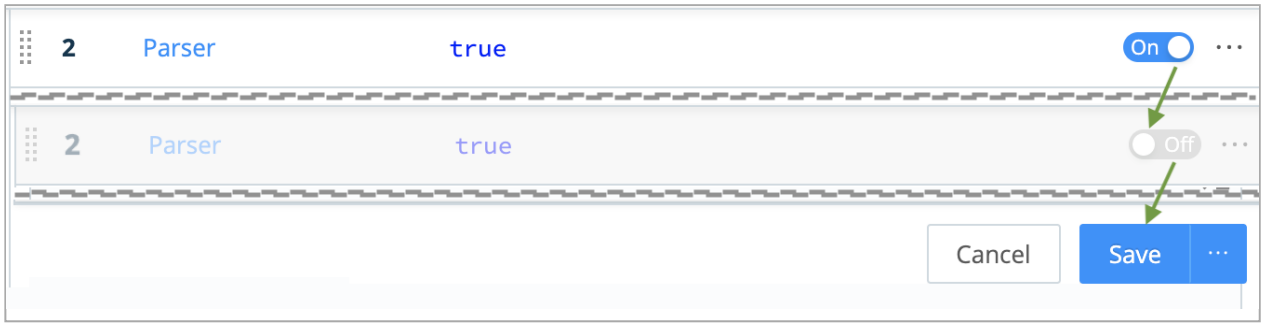

Toggling a Function off and on

Next, let's add an extra field, and conditionally infer its value from existing values. We'll also remove the `_raw` field, now that it's redundant. To add and remove fields, the **Eval** Function is our pal.

Eval: Add and Remove Fields

Let's assume we want to enrich our data by identifying the manufacturer of a certain popular phone handset. We can infer this from the existing `phoneType` field that we've lifted up for each event.

Add Field (Enrich)

1. In the left **Pipelines** pane, click **Add Function**.
2. Search for `Eval`, then click it.
3. Click **Add Field** to open the **Evaluate Fields** table.

   Here you add new fields to events, defining each field as a key-value pair. If we needed more key-value pairs, we could click `+ Add Field` for more rows.
4. In the table's first row, click into the **Name** field and enter: `phoneCompany`.
5. In the adjacent **Value Expression** field, enter this JS ternary expression that tests `phoneType`'s value: `phoneType.startsWith('iPhone') ? 'Apple' : 'Other'` (Note the `?` and `:` operators, and the single-quoted values.)

6. Click **Save**. Examine some events in the **Preview** pane, and each should now contain a `phoneCompany` field that matches its `phoneType`.

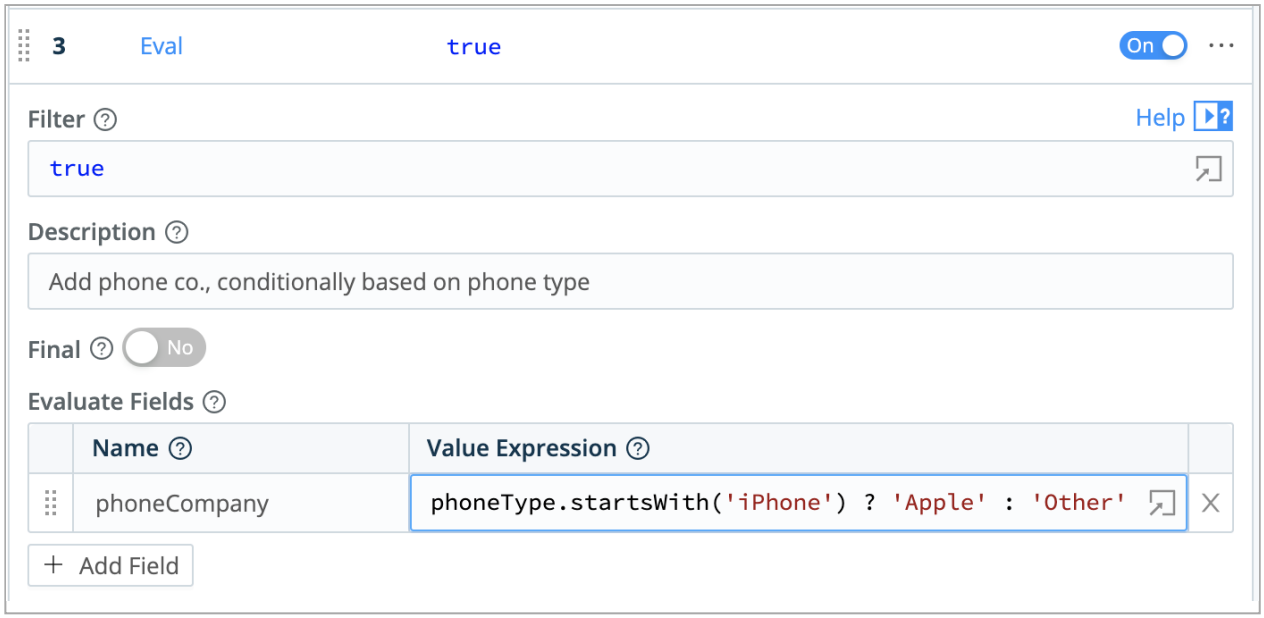

Adding a field to enrich data

Remove Field (Shrink Data)

Now that we've parsed out all of the `_raw` field's data – it can go. Deleting a (large) redundant field will give us cleaner events, and reduced load on downstream resources.

1. Still in the **Eval** Function, click into **Remove Fields**.
2. Type: `_raw` and press **Tab** or **Enter**.
3. Click **Save**.

The **Preview** pane's diff view should now show each event's `_raw` field stripped out.



Removing a field to streamline data

Our log data has now been cleansed, structured, enriched, and slimmed-down. Let's next look at how to make it more legible, by giving fields simpler names.

Rename: Refine Field Names

1. In the left **Pipelines** pane, click `Add Function`.

   This rhythm should now be familiar to you.

2. Search for `Rename`, then click it.

3. Click **Add fields** to open the **Rename fields** table.

4. Click into the new Function's **Rename fields** table.

   This has the same structure you saw above in Eval: Each row defines a key-value pair.

5. In **Current name**, enter the longhaired existing field name: `conversationId`.

6. In **New name**, enter the simplified field name: `ID`.

7. Watch any event's `conversationId` field in the **Preview** pane as you click **Save** at left. This field should change to `ID` in all events.

Drop: Remove Unneeded Events

We've already refined our data substantially. To further slim it down, a Pipeline can entirely remove events that aren't of interest for a particular downstream service.

> As the "Pipeline" name implies, your Cribl Stream installation can have multiple Pipelines, each configured to send out a data stream tailored to a particular Destination. This helps you get the right data in the right places most efficiently.

Here, let's drop all events for customers who use prepaid monthly phone service (i.e., **not** postpaid):

1. In the left **Pipelines** pane, click **Add Function**.

2. Search for `Drop`, then click it.

3. Click into the new Function's **Filter** field.

4. Replace the default `true` value with this JS negation expression: `accountType!='PostPaid'`

5. Click **Save**.

Now scroll through the right **Preview** pane. Depending on your data sample, you should now see multiple events struck out and faded – indicating that Cribl Stream will drop them before forwarding the data.

A Second Look at Our Data

Torture the data enough, and it will confess. By what factor have our transformations refined our data's volume? Let's check.

In the right **Preview** pane, click the **Basic Statistics** button:

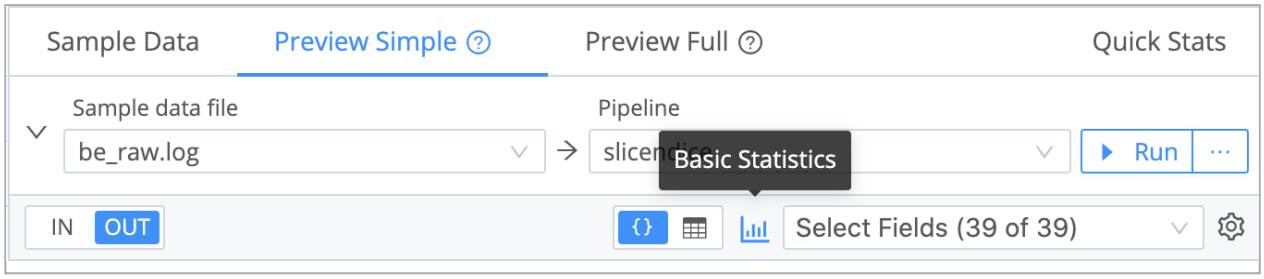

Displaying Basic Statistics

Even without the removal of the `_raw` field (back in Eval) and the dropped events, you should see a substantial % reduction in the **Full Event Length**.

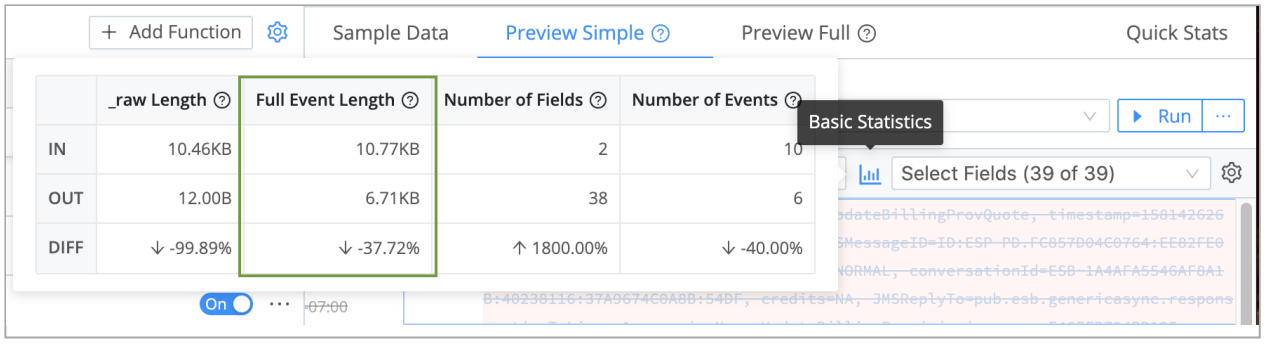

Data reduction quantified

Woo hoo! Before we wrap up our configuration: If you're curious about individual Functions' independent contribution to the data reduction shown here, you can test it now. Use the toggle **Off** > **Save** > **Basic Statistics** sequence to check various changes.

Add and Attach a Route

We've now built a complete, functional Pipeline. But so far, we've tested its effects only on the static data sample we captured earlier. To get dynamic data flowing through a Pipeline, we need to filter that data in, by defining a Cribl Stream Route.

1. At the **Pipelines** page's top left, click **Attach to Route**.

This displays the **Routes** page. It's structured very similarly to the **Pipelines** page, so the rhythm here should feel familiar.

2. Click `Add Route`.

3. Enter a unique, meaningful **Route Name**, like `demo`.

4. Leave the **Filter** field set to its `true` default, allowing it to deliver all events.

   Because a Route delivers events to a Pipeline, it offers a first stage of filtering. In production, you'd typically configure each Route to filter events by appropriate `source`, `sourcetype`, `index`, `host`, `_time`, or other characteristics. The **Filter** field accepts JavaScript expressions, including AND (`&&`) and OR (`||`) operators.

5. Set the **Pipeline** drop-down to our configured `slicendice` Pipeline.

6. Leave the **Enable Expression** field set to its **No** default. Toggling this field to **Yes** changes the **Output** field to an **Output Expression** field where you can enter a JavaScript expression for your **Destination** name.

7. Set the **Output** drop-down to either `devnull` or `default`.

   This doesn't matter, because we've set `default` as a pointer to `devnull`. In production, you'd set this carefully.

8. You can leave the **Description** empty, and leave **Final** set to **Yes**.

9. Grab the new Route by its left handle, and drag it above the `default` Route, so that our new Route will process events first. You should see something like the screenshot below.

10. Click **Save** to save the new Route to the Routing table.

> If you're on Cribl.Cloud or any other distributed mode, click **Commit & Deploy** at Cribl Stream's upper right before proceeding. Then, in the resulting dialog box, click **Commit & Deploy** to confirm. You'll see a **Commit successful** message.

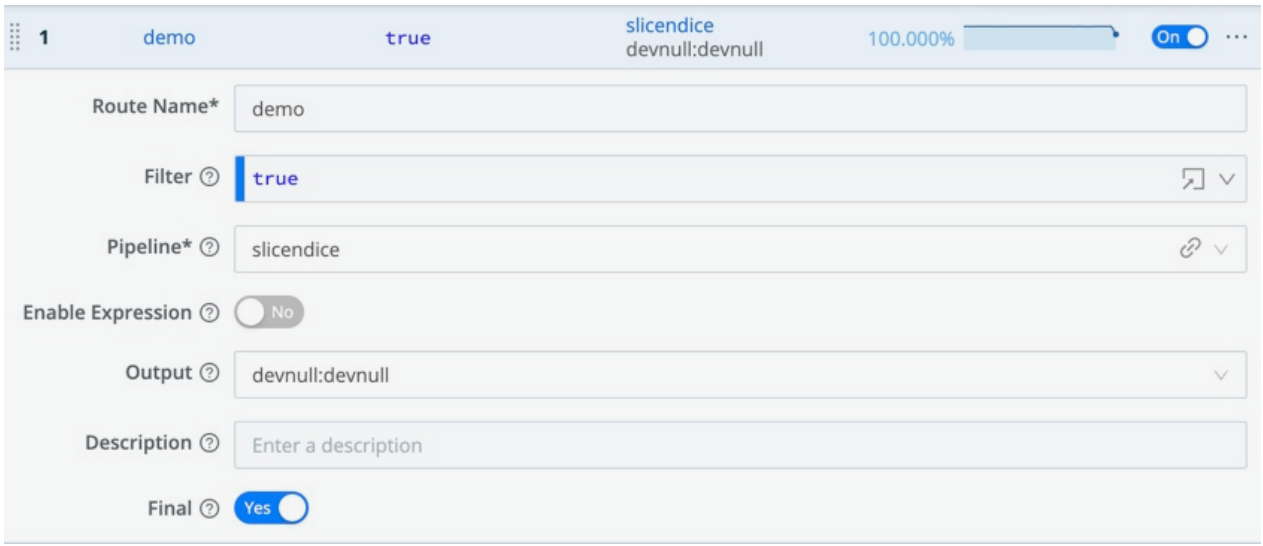

Configuring and adding a Route

The sparklines should immediately confirm that data is flowing through your new Route:

Live Routes

To confirm data flow through the whole system we've built, select **Monitoring > Data > Routes** and examine `demo`.

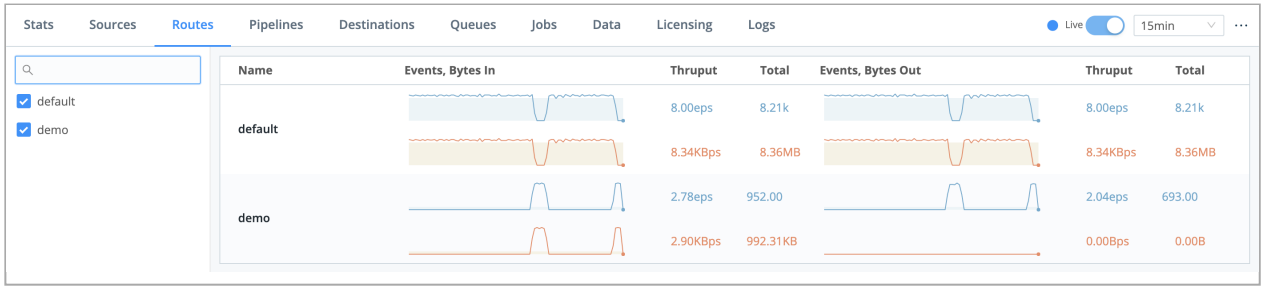

Monitoring data flow through Routes

Also select **Monitoring > Data > Pipelines** and examine `slicendice`.

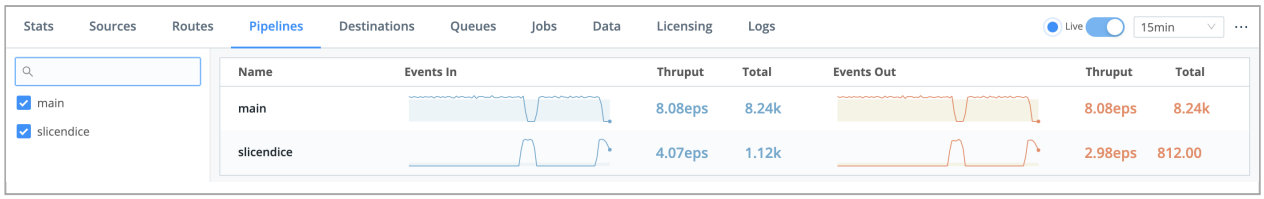

Monitoring data flow through Pipelines

What Have We Done?

Look at you! Give yourself a pat on the back! In this short, scenic tour – with no hit to your cloud-services charges – you've built a simple but complete Cribl Stream system, exercising all of its basic components:

- Downloaded, installed, and run Cribl Stream.
- Configured a Source to hook up an input.
- Configured a Destination to feed an output.
- Monitored data throughput, and checked it twice.
- Built a Pipeline.
- Configured Cribl Stream Functions to redact, parse, enrich, trim, rename, and drop event data.
- Added and attached a Route to get data flowing through our Pipeline.

Next Steps

Interested in guided walk-throughs of more-advanced Cribl Stream features? We suggest that you next check out these further resources.

- Cribl Stream Sandboxes: Work through general and specific scenarios in a free, hosted environment, with terminal access and real data inputs and outputs.
- Distributed Quick Start: Building on this tutorial that you've just completed, launch and configure a Cribl Stream distributed deployment. You'll work with a small but realistic model of a fully scaleable production deployment.
- Use Cases documentation: Bring your own services to build solutions to specific challenges.
- Cribl Concept: Pipelines – Video showing how to build and use Pipelines at multiple Cribl Stream stages.
- Cribl Concept: Routing – Video about using Routes to send different data through different paths.

Cleaning Up

Oh yeah, you've still got the Cribl Stream server running, with its `businessevent.log` datagen still firing events. If you'd like to shut these down for now, in reverse order:

1. Go to **Data > Sources > Datagen**.
2. Slide `businessevent` to **Off**, and click **Save**. (Refer back to the screenshot above.)
3. In your terminal's `$CRIBL_HOME/bin` directory, shut down the server with: `./cribl stop`

That's it! Enjoy using Cribl Stream.

1.5. Distributed Quick Start

This tutorial builds on our Getting Started Guide by walking you through a distributed deployment – Cribl Stream's typical deployment type for production.

> For concepts and deeper details underlying the techniques presented here, see Distributed Deployment.

Requirements

To exercise these distributed features, you'll need the following prerequisites.

Licenses and Instances

This tutorial is tiered to accommodate different Cribl Stream license types:

- With a Cribl Stream Free, One, or Standard license, you'll install three Cribl Stream instances on one or multiple physical or virtual machines – one Leader Node, and two Worker Nodes.
- To do the **optional** section on adding and managing multiple Worker Groups, you'll need an Enterprise or Sales Trial license/plan.

Basic Setup

Basic building blocks are identical to the Getting Started Guide. Please refer to the following sections of that tutorial for details, as needed:

- (System) Requirements
- Download and Install Cribl Stream
- Run Cribl Stream

To set up the multiple instances you'll need, choose among the options below in Three Instances, Pick Any Medium. But first, let's lay out the division of labor in a single Worker Group.

Distributed Deployment (Identical Workers)

A distributed deployment enables Cribl Stream to scale out to handle higher data volumes, load-balancing with failover, and parallel data processing based on conditional mapping and routing.

A single Leader Node manages multiple Worker Nodes. The Leader distributes and updates configuration on the Workers, handles version control, and monitors the Workers' health and activity metrics. The Workers do all the data processing.

Here, we'll show how this works by configuring a Leader and two Workers. This configuration is compact, and can be demonstrated without an Enterprise (or other paid) license/plan. But you can extrapolate the same technique to setting up enterprise-scale deployments of hundreds of Workers, to handle petabytes of data.

> Cribl Stream Free, One, and Standard licenses support only a single Worker Group (named `default`), so in this example, all Workers share identical configuration. With an Enterprise license/plan, you can organize Workers into multiple Groups, with varying configurations to handle scenarios like on-premises versus cloud tech stacks, or data centers in different geographic locations. For details, see Worker Groups – What Are They and Why You Should Care.

Three Instances, Pick Any Medium

You'll need to deploy three Cribl Stream instances – with SSH access – on one or more physical machines, virtual machines, or containers. If you haven't already provisioned this infrastructure, you have several alternatives, listed in the following subsections:

- Docker Containers
- Curl
- Amazon Lightsail
- AWS/EC2 (CloudFormation Optional)
- Kubernetes/Helm

Pick whichever approach will make it easiest for you to get the infrastructure launched – based on familiarity, preference, or availability.

> **We Don't Need No Stinkin' Permissions Errors!**
>
> Cribl's Docker containers come with Cribl Stream preinstalled. If you select any other option, be sure to both install and run Cribl Stream as the same Linux user. (For details on creating a new user – addressing both systemd and initd distro's – see Enabling Start on Boot.)

Docker Containers

You can use the Docker Compose (`docker-compose.yml`) file below to easily stand up a Cribl Stream distributed deployment of a Leader and multiple Workers on one machine.

> **Before you use the Docker Compose file**
>
> 1. Open the `docker-compose.yml` file in a text editor.
> 2. Replace both instances of `INSERT_TOKEN` with a unique, secure token value.
> 3. Save the updated `docker-compose.yml` file.

```
version: '3.8'
services:
  master:
    image: cribl/cribl:latest
    environment:
      - CRIBL_DIST_MODE=master
      - CRIBL_DIST_MASTER_URL=tcp://INSERT_TOKEN@0.0.0.0:4200
      - CRIBL_VOLUME_DIR=/opt/cribl/config-volume
    ports:
      - "19000:9000"
    volumes:
      - "~/cribl-config:/opt/cribl/config-volume"
  workers:
    image: cribl/cribl:latest
    depends_on:
      - master
    environment:
      - CRIBL_DIST_MODE=worker
      - CRIBL_DIST_MASTER_URL=tcp://INSERT_TOKEN@master:4200
    ports:
      - 9000
```

This uses a local directory, `~/cribl-config` , as the configuration store for Cribl Stream. You must create this directory (it can be empty) before you run the `docker-compose` command.

If you prefer to use ephemeral storage, you can delete line 8 (the `CRIBL_VOLUME_DIR` definition) and lines 11–12 (the `volumes` configuration) before running the `docker-compose` command. But this will make it hard to stop and restart the same infrastructure, if you want to do the tutorial in chunks.

To deploy a Leader Node, plus (e.g.) two Workers already configured and wired up to the Leader, use this command:

```
docker-compose up -d --scale workers=2
```

To deploy a different number of Workers, just change the `workers=2` value. By default, the above command pulls the freshest stable image (tagged `cribl/cribl:latest`) from Cribl's Docker Hub. It defaults to the

following URLs and ports:

- Leader URL: `http://localhost:19000`
- Worker URLs: `http://localhost:<automatically-assigned-host-ports>`

If you're running the container itself on a virtual machine, replace `localhost` with the VM's IP address. The automatic assignment of available host-OS ports to the Workers prevents port collisions. **Within** the Docker container, these ports will forward over TCP to port 9000. To see the ports assigned on the OS, enter:

```
docker ps
```

You should see results like these:

```
CONTAINER ID   IMAGE                 COMMAND                  CREATED          STATUS
PORTS                                              NAMES
a3de9ea8f46f   cribl/cribl:latest    "/sbin/entrypoint.sh…"   12 seconds ago   Up 10
seconds   0.0.0.0:63411->9000/tcp                  docker_workers_1
40aa687baefc   cribl/cribl:latest    "/sbin/entrypoint.sh…"   12 seconds ago   Up 10
seconds   0.0.0.0:63410->9000/tcp                  docker_workers_2
df362a65f7d1   cribl/cribl:latest    "/sbin/entrypoint.sh…"   13 seconds ago   Up 11
seconds   0.0.0.0:19000->9000/tcp, :::19000->9000/tcp   docker_master_1
```

The **PORTS** column shows the host-OS ports on the left, forwarding to the container-internal ports on the right. You can use the `docker_workers_N` ports if you want to log directly into Workers. In the above example:

- Worker1 URL: `http://localhost:63411`
- Worker2 URL: `http://localhost:63410`

If your Leader is crashing with two Workers, make sure you are allocating enough memory to Docker.

Once your three instances are running, proceed to Configure Leader Instance.

Curl

Use our Download page's `curl` command to directly install Cribl Stream onto your chosen infrastructure.

For x64 processors, use: `curl -Lso - $(curl https://cdn.cribl.io/dl/latest-x64) | tar zxv`

For ARM64 processors: `curl -Lso - $(curl https://cdn.cribl.io/dl/latest-arm64) | tar zxv`

Once you've configured the first Cribl Stream instance as a Leader, you can bootstrap Workers from the Leader. Or you can create Workers (with tags) from the Leader, using a `curl` command of this form:

```
curl 'http://<leader-ip-or-hostname>:9000/init/install-worker.sh?token=criblmaster&tag=<tag1>&tag=<tag2>'
```

E.g.: `curl 'http://localhost:9000/init/install-worker.sh?token=criblmaster&tag=dev&tag=test''`

> Once your three instances are running, proceed to Configure Leader Instance.

Amazon Lightsail

Amazon Lightsail provides a quick, simple way to deploy Cribl Stream to AWS instances. Amazon's Get Started with Linux/Unix-based Instances in Amazon Lightsail tutorial walks you through setting up your instances and connecting via SSH.

- The free (first month) tier is all you need for this tutorial.
- As the "platform," Cribl recommends selecting **Amazon Linux 2 (default CentOS)**.
- Lightsail doesn't support IAM roles assigned to instances, or advanced load balancing, but it's adequate for this tutorial, which is not a production deployment.

> Once your three instances are running, proceed to Configure Leader Instance.

AWS/EC2 (CloudFormation Optional)

You can deploy Cribl Stream's AWS EC2 instances using Cribl's CloudFormation template, see our AWS/EC2 Quick Start Guide on GitHub. Follow the **Cribl Stream Distributed** instructions. (You'll be responsible for the costs of your AWS infrastructure.)

If you prefer to deploy your own EC2 instances, the free tier is fine for this tutorial. Cribl recommends selecting **Amazon Linux 2 (default CentOS)** AMIs. Relevant instructions are linked below.

1. See any of these AWS Docs for EC2 deployment:
    - Tutorial: Getting Started with Amazon EC2 Linux Instances
    - Launching an Instance Using the Old Launch Instance Wizard
    - How Can I Create and Connect to an Amazon Linux EC2 Instance?

2. See these AWS instructions for SSH access:
    - Connect to Your Linux Instance Using an SSH Client

> Once your three instances are running, proceed to Configure Leader Instance.

Kubernetes/Helm

Use Cribl's Helm charts to deploy Kubernetes pods, then proceed to the next section:

- Kubernetes Leader Deployment
- Kubernetes Worker Deployment

Configure Leader Instance

Once you've set up your Leader and Worker instances via your chosen approach above, you're ready to configure these instances and their communication.

> If you used an installation option like Docker Containers above, it has already preconfigured all three instances for you. This section and the next Configure Workers section will show you how to verify, and/or modify, these preset configurations.
>
> If you want to jump ahead, your next required configuration step is Add a Source, further down.

Configure the first instance in Leader mode, and open port 4200.

1. Log into the Leader. Depending on the deployment method you chose, this will be at `http://<localhost-or-IP-address>:9000` or `http://<localhost-or-IP-address>:19000`. Use the default `admin` / `admin` credentials.

2. Complete the registration form.

3. From the UI's **Settings** > **Global Settings** > **System** > **Distributed Settings** > **General Settings**, select **Mode**: `Leader`.

4. Click the **Leader Settings** left tab, and make sure the **Port** is set to `4200`.
   (This port must be open for Workers to communicate with the Leader.)

5. Click **Save** to restart the Cribl server in Leader mode.

Keep the Leader's tab open, so that we can verify connectivity with the Workers after configuring them (in the next section).

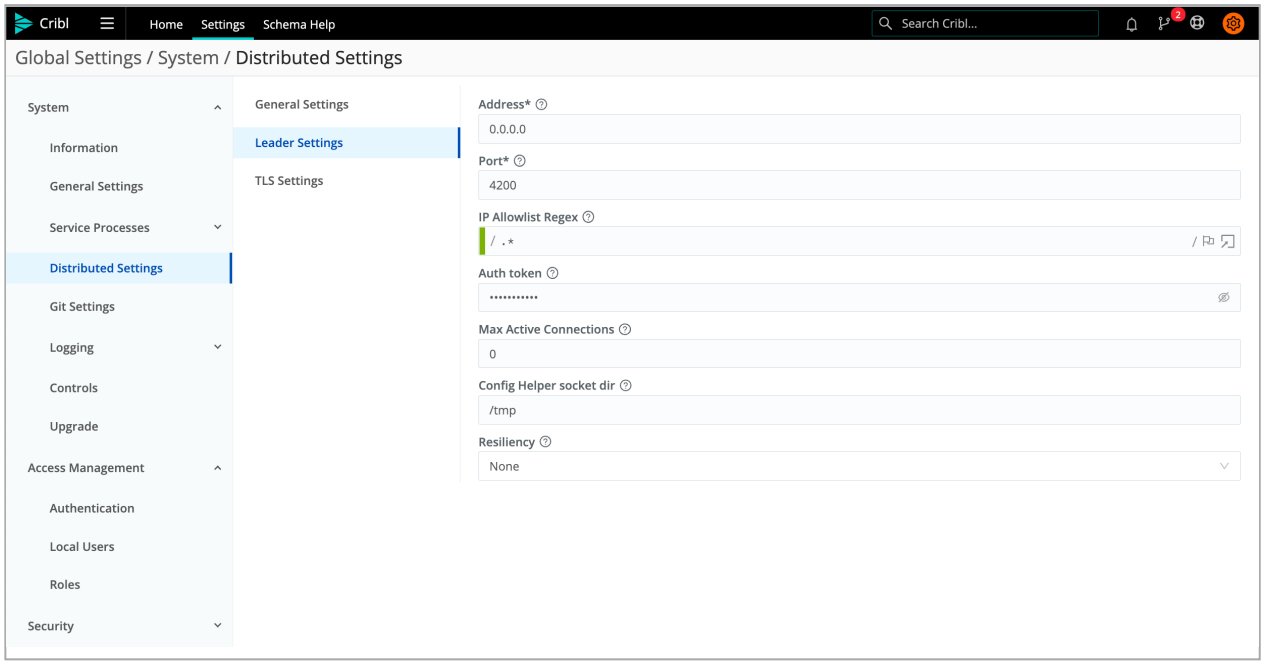

Distributed > Leader Settings – the whole enchilada

6. Change the value of **Auth token** from the default to a unique, secure value. Do this **before** adding any Workers.

7. Optional but recommended: From Cribl Stream's top nav, click **Manage** > **Groups**. Then enable the **UI access** slider for your Group(s). This way, you will be able to click through from the Leader's **Manage** > **Workers** tab to view and manage each Worker's UI, distinguished by a purple border. (This option handles authentication for you, so you don't need to manage or enter the Workers' credentials.)

Configure Workers

Next, configure the two other instances as Workers that report to the Leader to receive processing instructions. We'll configure one instance through the UI, and (optionally) bootstrap the other from the Leader.

Configure Worker via UI

1. Log into the first Worker instance. Depending on the deployment method you chose, this will be at `http://<localhost-or-IP-address>:9000` or at: `http://<localhost-or-IP-address>:<automatically-assigned-host-port>`. Use the default `admin` / `admin` credentials.

2. Complete the registration form, if displayed.

3. From the UI's **Settings** > **Global Settings** > **Distributed Settings** > **Distributed Management** > **General Settings**, select **Mode**: `Stream: Managed Worker (managed by Leader)`.

4. Leave other settings on this tab unchanged, including **Default Group**: `default`.
   (This is the literal name of the single Worker Group available with free licenses.)

5. On the **Leader Settings** tab, make sure the **Address** matches the domain of the Leader you previously configured.

6. On the same **Leader Settings** tab, display the **Auth token** value.
   (Optionally, you can change this from the default `criblmaster`.)

7. Leave other settings unchanged, and click **Save** to restart this instance as a managed Worker.

Bootstrap Worker from Leader

You can (if you choose) configure the second Worker instance using exactly the same procedure you used just above. But here, we'll offer you a simplified version of Cribl Stream's Bootstrapping Workers from Leader procedure for downloading the config from the Leader to the second Worker:

First, switch to the terminal/console of the instance you've reserved for this second Worker.

Next, if you didn't change the default **Auth token** value when you previously configured the Leader, run this command as root user:

```
curl http://<leader-hostname-or-IP>:9000/init/install-worker.sh | sh -
```

If you cannot run as root, insert `sudo` as you pipe to the shell:

```
curl http://<leader-hostname-or-IP>:9000/init/install-worker.sh | sudo sh -
```

To instead pipe to a bash shell:

```
curl http://<leader-hostname-or-IP>:9000/init/install-worker.sh | [sudo] bash -
```

If you substituted a custom **Auth token** value on the Leader, enter:

```
curl http://<leader-hostname-or-IP>:9000/init/install-worker.sh?token=<your-custom-
token> | [sudo] sh -
```

Or, for bash:

```
curl http://<leader-hostname-or-IP>:9000/init/install-worker.sh?token=<your-custom-token> | [sudo] bash -
```

> The bootstrap script will install Cribl Stream into `/opt/cribl` on the target instance.

Verify Workers' Communication with the Leader

With both Workers configured, next make sure they're visible to the Leader.

1. Switch back to Cribl Stream's UI on the Leader instance you previously configured.
2. From Cribl Stream's top nav, click **Manage**.
3. Below that, click the **Workers** tab.
4. On the resulting **Manage Workers** page, you should now see both Workers, mapped to the `default` **Group**.

If one or both Workers are missing, repeat the preceding Configure Worker via UI and/or Bootstrap Worker from Leader procedures until the Workers show up.

Otherwise, if both Workers are present, we can now configure a few more resources to get data flowing through this distributed setup.

> If you're interested in details about the communication among Cribl Stream instances, see How Do Workers and Leader Work Together.
>
> Once you've configured a Worker to point to the Leader Node, the Leader will assign the Worker a new, random admin password. This secures each Worker from unintended access. If you need to reconfigure the Worker later, you can either:
>
> - Enable the Leader's **UI access** option, as recommended above; or
> - Reset the password on the Worker Group – see Set Worker Passwords.

Add a Source

To minimize dependencies, this section walks you through enabling a Cribl Stream built-in Datagen Source to get some (fake) events flowing into your Workers. (This is the same approach used in our single-instance Getting Started Guide tutorial, but using a different datagen.)

If you prefer to configure Cribl Stream to receive events from a real data input that you've already set up, see our Sources topic for a link to the appropriate instructions.

1. In the Leader UI's top nav, click **Manage** > **Groups**.
2. From the resulting Groups page, click the Group name.
   (Working with a free license, we're implicitly configuring this Source on the `default` Group.)
3. From the top nav, select **Manage** > **Data** > **Sources**.
4. From the **Data Sources** page's tiles or left menu, select **Datagen**.
   (You can use the search box to jump to the **Datagen** tile.)
5. Click **Add Source** to open a **New Source** modal.
6. In the **Input ID** field, name this Source `weblog` (or any unique name).
7. In the **Data Generator File** drop-down, select `weblog.log`.
   This generates...simulated log events for a website.
8. Keep the **Events per Second per Worker Node** at the default `10` EPS for now.
9. Click **Save**.

   In the **Enabled** column, the slider set to **Yes** indicates that your Datagen Source has started generating sample data.
10. Click **Commit & Deploy** at the upper right, enter a commit message, and click **Commit and Deploy**.
    This uses Cribl Stream's `git` integration to record the `default` Group's new configuration and deploy it to your Workers.

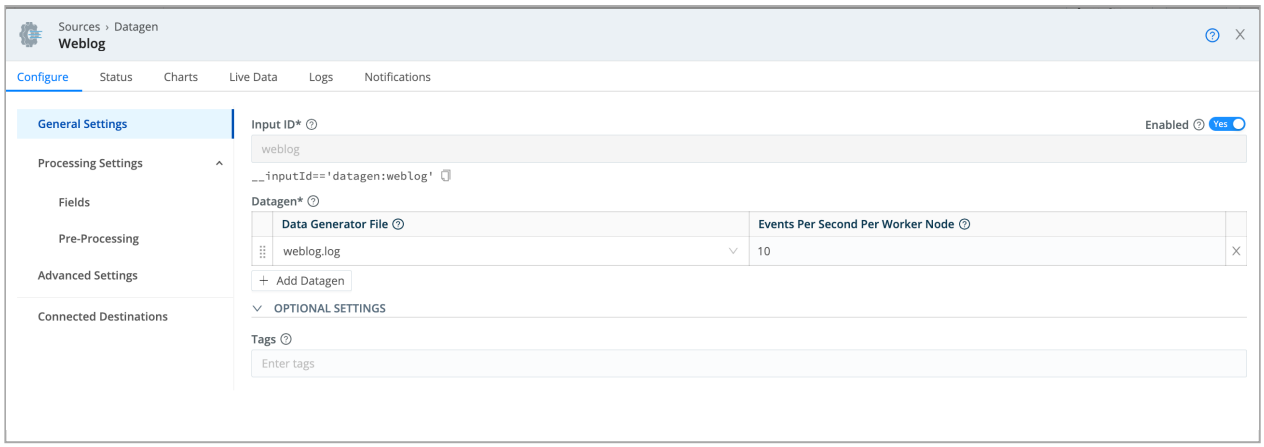

Source (Datagen) configuration

> If you'd like to verify that the Datagen is sending events, wait about a minute for them to start accumulating. Then, on the **Manage Sources** / **Datagen** page, click the **Live** button beside your configured Source. On the resulting **Live Data** tab, you should see events arrive within the default 10-second capture.

Add a Destination

On the output side, choose any of these options:

- To configure a realistic output, but with no real dependencies and no license requirement, follow the Simulated Splunk Destination instructions just below.
- For a simpler option, jump to the Internal Destination instructions further down.
- To send data to a real receiver that you've already set up, see our Destinations topic for a link to the appropriate instructions.

Simulated Splunk Destination

Here, you'll go through the steps of configuring a typical Splunk Destination, but you'll use netcat to spoof the receiver on port 9997.

1. In the Cribl Stream Leader's UI, configure a Splunk Single Instance Destination, following these instructions. For this simulated output:
   - Set the **Address** to `127.0.0.1` (i.e., localhost).
   - Do not precede this IP address with any `http://` or `https://`
   - Leave the **Port** at the default `9997`.

- Set the **Backpressure behavior** to `Drop Events`.

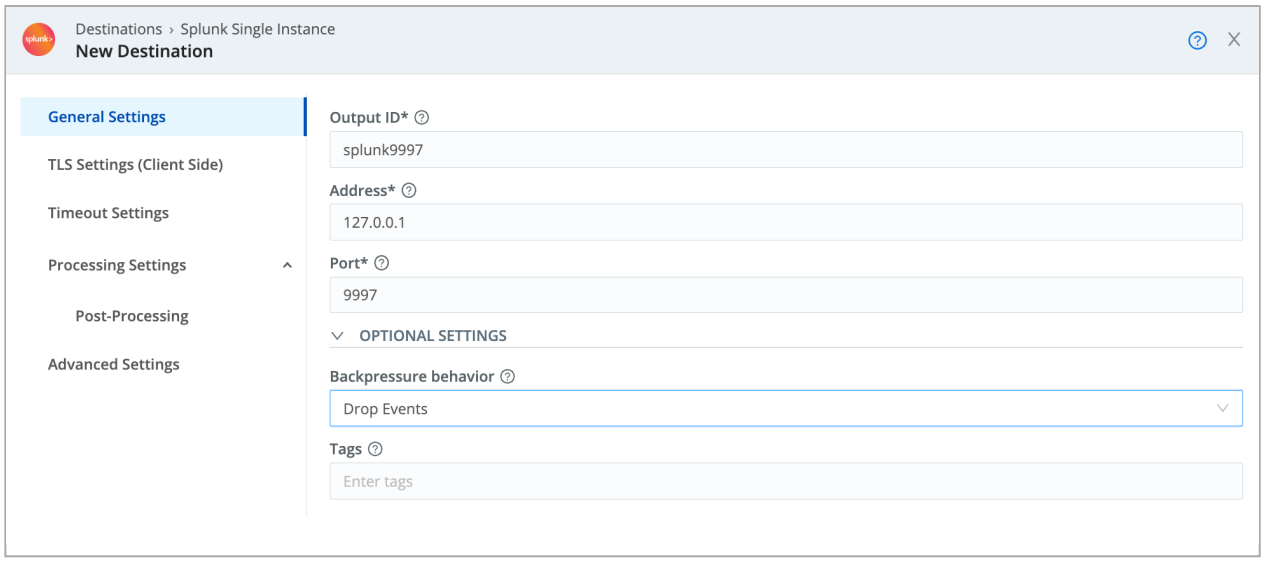

A glorious spoofed Splunk Destination config

2. Click **Commit** at the upper right, enter a commit message, and confirm the commit.

3. Click **Deploy** at the upper right to deploy this new configuration to your Workers.

4. In the first Worker instance's terminal/console, shell in, then enter `cd /opt/cribl/bin` to access Cribl Stream's CLI.

5. Enter `nc -h` to check whether netcat is installed on this Linux instance.

   If the command fails, follow your Linux distro's steps for installing netcat. (E.g., for Ubuntu instructions, see Docker Notes below.)

6. Enter `./cribl nc -l -p 9997` to have netcat listen on port 9997, but simply discard data.

Docker Notes

If you're using a container like Docker, before shelling in at step 4 above, you'll need to first open a shell inside that container: `docker exec -it <CONTAINER ID> /bin/bash`

In the above Docker Containers deployment example, you'd want to open the shell on the `docker_workers_1` container, whose `<CONTAINER ID>` was `a3de9ea8f46f`.

Cribl's Docker containers currently run Ubuntu 20.04. You can install netcat with this sequence of commands:

```
apt update
apt install netcat
```

The data you'll now see displayed in the terminal will be gibberish, because of Splunk's proprietary data format.

If data isn't flowing, you might need to restart Workers. You can do this through Cribl Stream's UI. With Docker containers, use `docker-compose down`, followed by `docker-compose up`.

> You can streamline future Commit and Deploy steps by entering a **Default Commit Message**, and by collapsing actions to a combined **Commit and Deploy** button. Both options are available at **Settings** > **Global Settings** > **System** > **Git Settings** > **General**.

Internal Destination

As an alternative to the Splunk instructions above, you can configure Cribl Stream's built-in DevNull Destination to capture events and discard them. (This is the same Destination used in our single-instance Getting Started Guide tutorial.)

1. In the Leader UI's top nav, click **Manage** > **Groups**.
2. From the resulting **Groups** tab, click the Group name.
   (Working with a free license, we're implicitly configuring this Source on the `default` Group.)
3. From the top nav, select **Data** > **Destinations**.
4. Select **DevNull** from the **Data Destinations** page's tiles or left menu.
   (You can use the search box to jump to the **DevNull** tile.)
5. On the resulting **devnull** row, look for the **Live** indicator under **Enabled**. This confirms that the **DevNull** Destination is ready to accept events.
6. From the **Data Destinations** page's left nav, select the **Default** Destination at the top.
7. On the resulting **Manage Default Destination** page, verify that the **Default Output ID** drop-down points to the **devnull** Destination we just examined.
8. Click **Commit** at the upper right, enter a commit message, and confirm the commit.
9. Click **Deploy** at the upper right to deploy this new configuration to your Workers.

Add a Pipeline

To complete this distributed deployment with realistic infrastructure, let's set up a Pipeline and Route.

If you've already done the Getting Started Guide, you've already created a `slicendice` Pipeline. In the following steps, skip ahead to adding an Eval Function.

1. From the current Group's submenu, select **Processing** > **Pipelines**.
2. At the **Pipelines** pane's upper right, click **Add Pipeline**, then select **Create Pipeline**.
3. In the new Pipeline's **ID** field, enter a unique identifier (e.g., `slicendice`).
4. Optionally, enter a **Description** of this Pipeline's purpose.
5. Click **Save**.

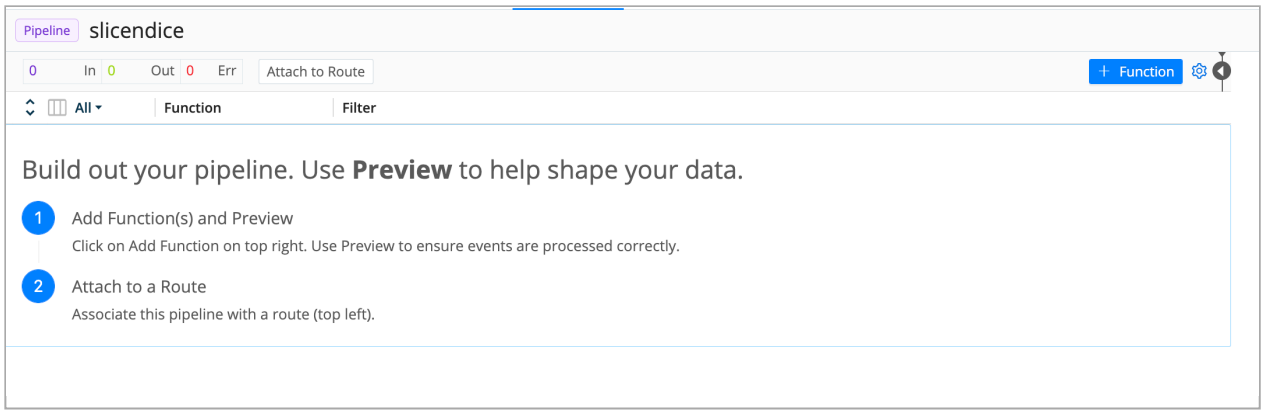

Pipeline saved

Add an Eval Function

Now add an Eval Function to the Pipeline:

1. At the **Pipelines** pane's upper right, click **Add Function**.
2. Search for the `Eval` Function, and click its link to add it.
3. In the new Function's **Evaluate Fields** section, click **Add Field**.
4. In the new row's **Name** column, name the field `origin`.
5. In the new row's **Value Expression** column, enter: `host+" "+source`

This new `origin` field will concatenate the host and source fields from incoming events.

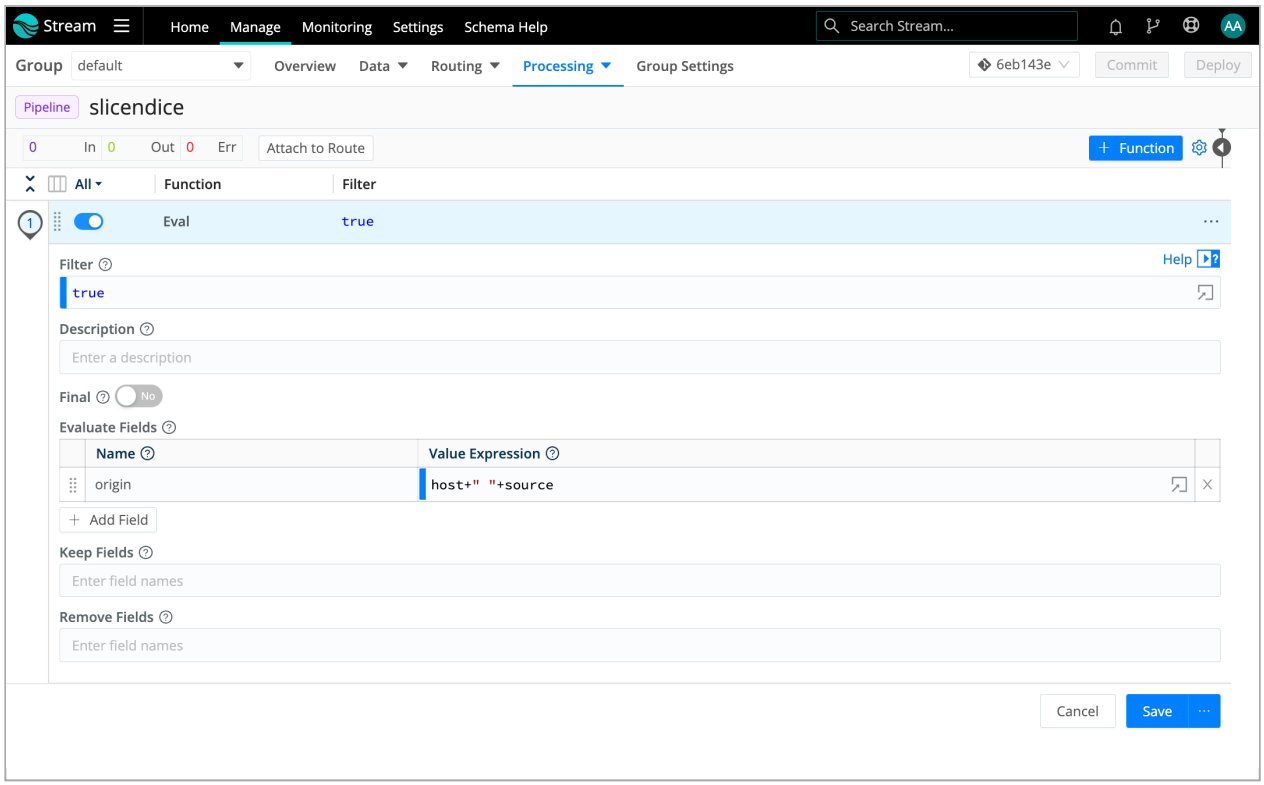

Adding Eval Function to Pipeline

6. Click **Save** to store the Function's configuration.

7. **Commit** and **Deploy** the new Pipeline configuration.

8. Optionally, open the right pane and click **Capture Data** to verify throughput.

Add a Route

If you've already done the Getting Started Guide, you've already created a `demo` Route, attached to the `slicendice` Pipeline. In the following steps, just modify the Route to send data to the new Destination you configured above.

1. At the **Pipelines** page's top left, click **Attach to Route**.
   This displays the **Data Routes** page.

2. Click `Add Route`.

3. Enter a unique **Route Name**, like `demo`.

4. Leave the **Filter** field set to its `true` default, allowing it to deliver all events.

5. Set the **Pipeline** drop-down to our configured `slicendice` Pipeline.

6. Set the **Output** drop-down to the Destination you configured above. If you boldly chose the Simulated Splunk Destination, this will be named something like `splunk:splunk9997`.

7. You can leave the **Description** empty, and leave **Final** set to **Yes**.

8. Grab the new Route by its left handle, and drag it to the top of the Routing table, so that our new Route will process events first. You should see something like the screenshot below.

9. Click **Save** to save the new Route configuration.

10. **Commit** and **Deploy** your changes.

11. Still assuming you configured a simulated Splunk output, look at the terminal where you're running netcat. You should now see events arriving.

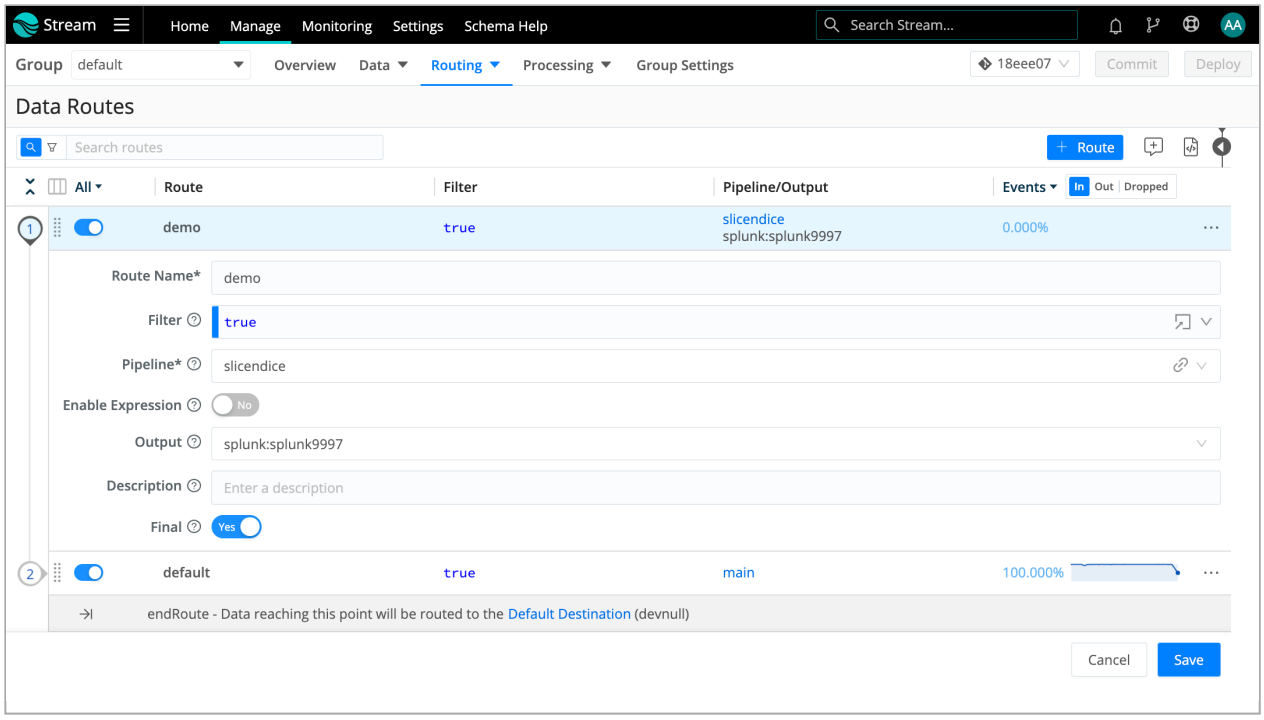

Route attached to Pipeline and Destination

Managing Workers (Scaling)

With all our infrastructure in place, let's look at how a Cribl Stream distributed deployment scales up to balance the incoming event load among multiple Workers.

1. In the Leader UI's top nav, click **Manage** > **Groups**.

2. From the Groups page, click the Group name.
   (Working with a free license, we're implicitly configuring this Source on the `default` Group.)

3. From the top nav, select **Manage** > **Data** > **Sources**, and find the **Datagen** Source you configured earlier.

4. Click this Datagen's row to reopen its config modal.

5. Reset the **Events per Second per Worker Node** from the default `10` EPS to a high number, like `200` EPS.

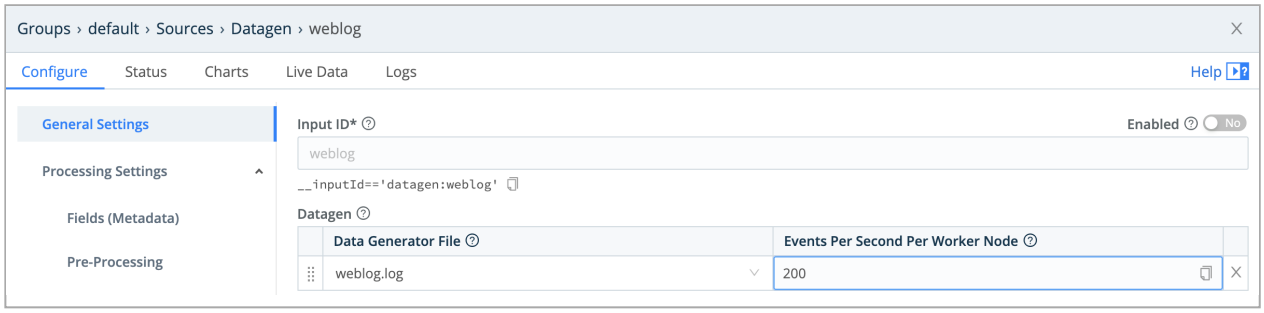

Flooding events into Cribl Stream

6. Click **Save**, then **Commit** and **Deploy** this higher event load.

7. From the Leader's top nav, also select **Global Config** > **Commit** to commit the Leader's newest config version. In the resulting modal, click **Commit** again to confirm.

   This uses Cribl Stream's `git` integration to save a global configuration point for your whole deployment, which you can roll back to.

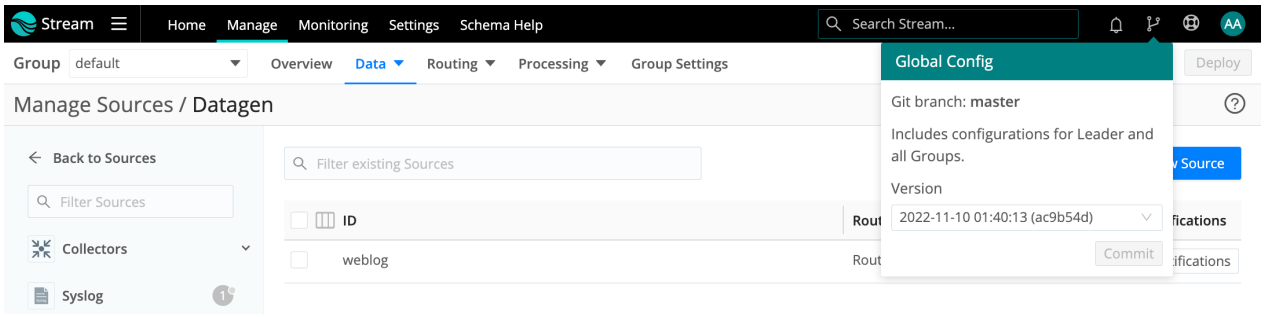

Committing Leader's config

8. From the Leader's top nav, click **Monitoring**.

Monitoring tab

9. On the resulting **Monitoring** page, watch as the following changes unspool over the next few minutes:

- The **CPU Load Average (1 min)** will spike as the higher event volume floods the system.
- The **Workers** indicator at upper left will drop to `0` as the Workers restart with the new configuration you've deployed to them, and then rebound to `2`.
- If you use the **All Workers** drop-down at upper right to toggle between your two individual Workers, you should see that Cribl Stream is balancing roughly equal event loads among them.

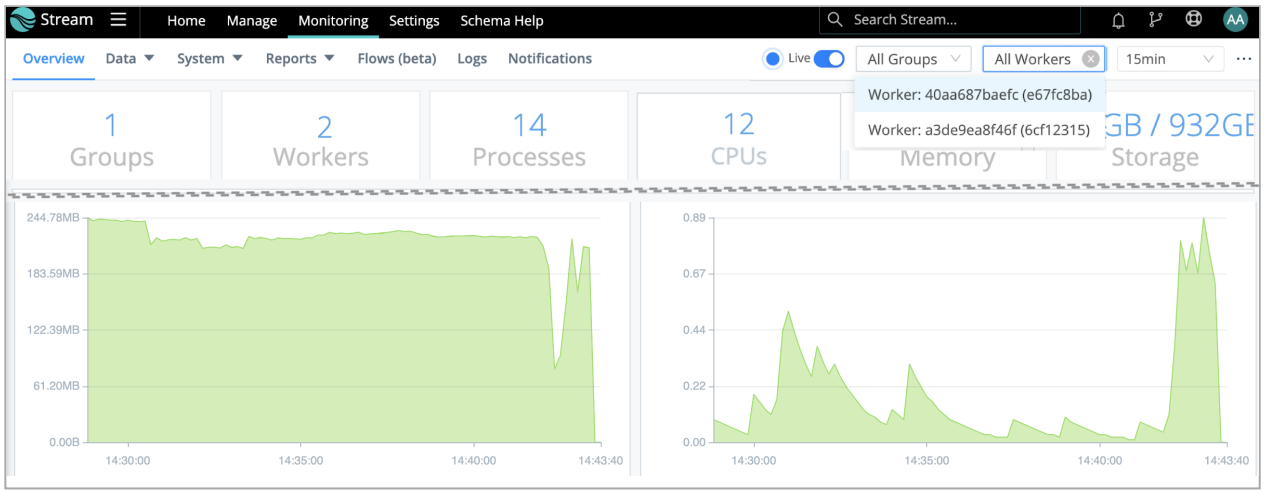

10. To confirm both Workers' `alive` status: Click **Manage**, then click the **Workers** tab.

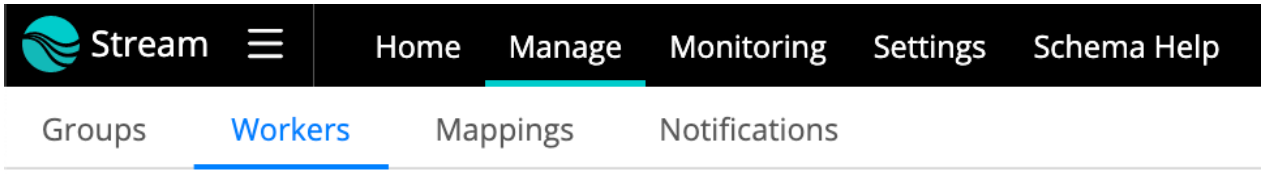

Workers tab

11. To wrap up, repeat this procedure's first six steps to set the Datagen's rate back down to `10` EPS, and then save, commit, and deploy all changes.

What Have We Done?

This completes your setup of a basic distributed deployment, using a free license, and configuring a single Worker Group of two identically configured Worker Processes. (You can extrapolate these same techniques you've just mastered to spin up virtually any number of Workers in the same way.)

To see how you can set up multiple Worker Groups – with separate configurations optimized for separate data flows – continue to the next section, noting its licensing prerequisites.

If you're deferring or skipping that option, jump ahead to Cleaning Up.

Add and Manage Multiple Worker Groups (Optional)

To add and manage more than one Worker Group – everything in this optional section – you'll need an Enterprise or Sales Trial license for your on-prem Cribl Stream deployment, or an Enterprise (or equivalent) plan for your Cribl.Cloud Organization. For details on adding multiple Worker Groups on Cribl.Cloud, see Cribl.Cloud Worker Groups.

> See Licensing for how to acquire and install one of the above license types. Install the license on your Leader instance, and then commit this as a Leader config change (top nav's **Global Config** dialog), before you proceed.

Here, we'll build on the infrastructure we've created so far to:

- Configure Mapping Rules.
- Verify how Cribl Stream balances large data volumes among Worker Processes.
- Add a second Worker Group, data Source, and Destination.
- Add a second Pipeline and attach it to its own Route.
- Reconfigure Mapping Rules to send each Source's data through a separate Group.

To keep this Quick Start tutorial focused on techniques, rather than on configuring lots of infrastructure, we'll assign just one Worker to each Worker Group – one of the two Workers we launched above. But in production, you'll be able to apply the same principles to setting up any number of Worker Groups, with any number of Workers.

Multiple-Group Setup

With an Enterprise or Sales Trial license/plan, Cribl Stream's UI adds some extra features.

The **Manage** > **Groups** page, shown here, now supports multiple Groups. (For now, you still see only the single `default` Group – but we'll change that a few sections down.)

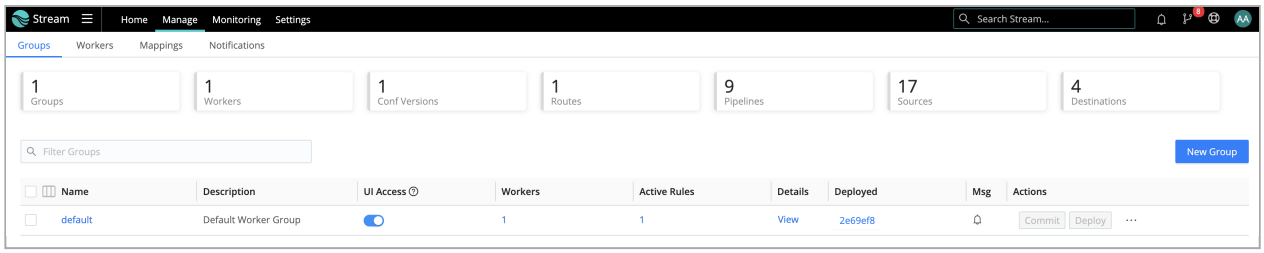

UI for multiple Worker Groups

> On Cribl.Cloud, the **Groups** page adds extra columns. You'll see each Group's Worker type (hybrid versus Cloud/Cribl-managed) and, for Cloud Groups, the anticipated ingress rate and Provisioned status. For details, see Cribl.Cloud Worker Groups.

Note that if you've enabled Worker UI access, you can click directly through to each of your Workers. This feature will come in handy just below. To try it out:

1. Either click the link in the desired Group's **Workers** column, or click the submenu's **Workers** tab.
2. Either way, from the resulting **Workers** tab, click the desired Worker's link in the **GUID** column.
3. A purple header indicates that you're viewing a Worker's UI.
4. To return to the Leader's UI, just click the top nav's **Manage** option.)

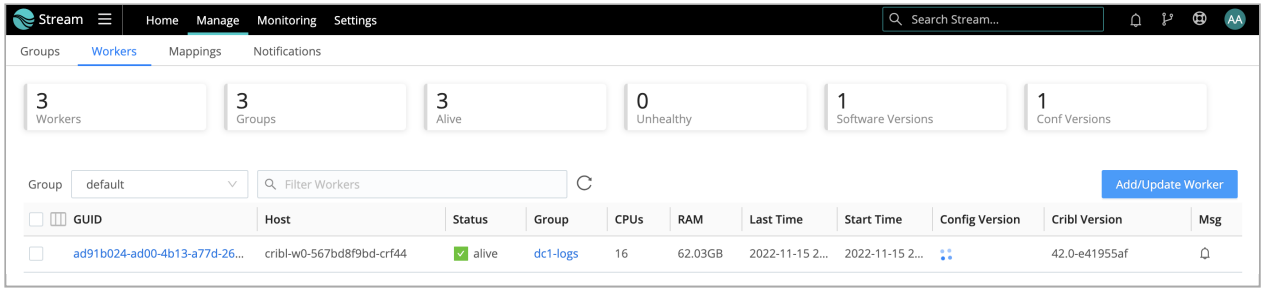

Select a Worker's GUID link to tunnel to that Worker

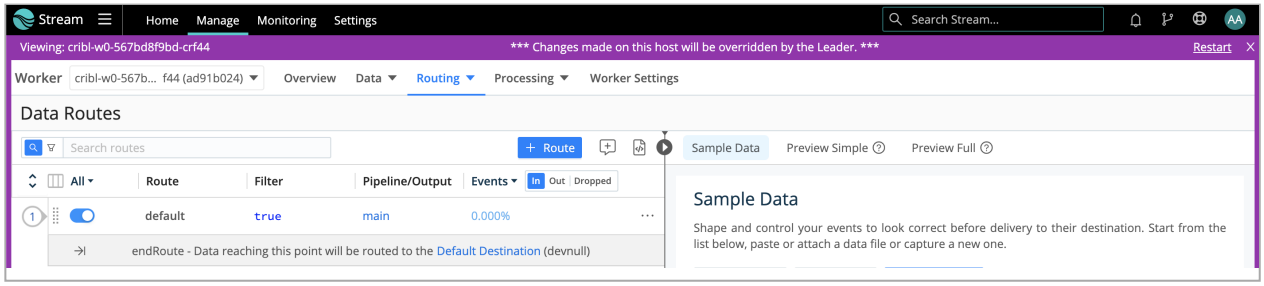

Leader's remote view of Worker's UI

Check/Restart Workers

For the remaining steps, we want to make sure both our Workers (configured earlier) are up. Cribl Stream's top header should indicate `2 WORKERS`. You can verify that they're `alive` by clicking the top nav's **Manage** > **Workers** tabs, as shown earlier. If so, proceed to Map Groups by Config.

If either or both Workers are down, restart them:

1. Make sure you've enabled Worker UI access. (It's time!)
2. To click through to a dormant Worker's UI, use either of the left-nav options covered just above: either the **Workers** page, or the **Manage** > **Groups** > `default` submenu of individual Worker IDs.
3. When you see that Worker's UI (purple header), click **Restart** at the upper right.
4. Confirm your choice, and wait for a **Server has been restarted** message to appear for a few seconds.
5. Click the top nav's **Manage** option to return to the Leader's UI.
6. If the other Worker is down, repeat the above steps to restart it as well.

Map Groups by Config

With both Workers confirmed up, let's look at how Cribl Stream has automatically mapped all these existing workers to the `default` Group.

1. From the Leader's top nav, click **Manage** > **Mappings**.
2. You now see a default Mapping Ruleset, also literally named `default`. Click it.

   > A Cribl Stream Leader can have multiple Mapping Rulesets configured, but only one can be active at a time.

3. This `default` Ruleset contains one initial Rule, literally named `Default Mappings`. Expand its accordion as shown below.

   (The `default` Ruleset and Rule naming are separate from the `default` Group's naming. All of these out-of-the-box starting configurations have been named...literally.)

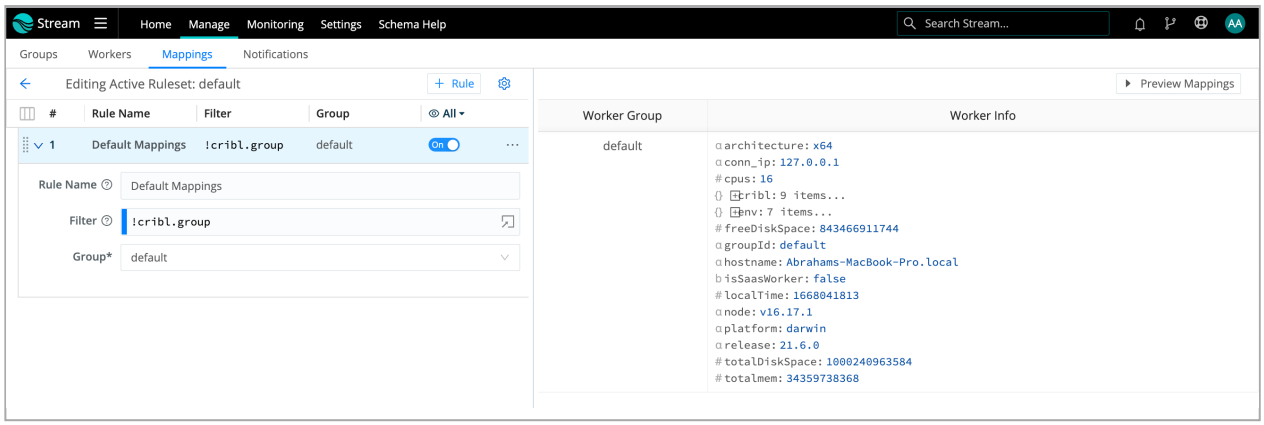

Default Mapping Rule

Below the **Rule Name**, a Mapping Rule has two functional fields:

- **Filter**: `!cribl.group` – this value expression specifies "Not already assigned to a Worker Group."
- **Group**: `default` – this value specifies "Assign to the `default` Group."

So this is a catch-all rule. By following it, the Leader has assigned all (both) registered Workers to the `default` Group.

Let's make a more-specific rule, mapping a specific Worker (by hostname) to this Group, which receives events from our `weblog` Datagen Source.

Add Mapping Rules

1. Click **Add Rule** at the upper right. Then configure the new Rule as shown below:
    - **Rule Name**: `weblog` – for simplicity.
    - **Filter**: `platform=="<this-worker's-platform>"` – get this value from the right Preview pane. Look for the `platform` field's value. In the example shown below, we got `"darwin"`.
    - **Group**: `default` – this is the only option available.

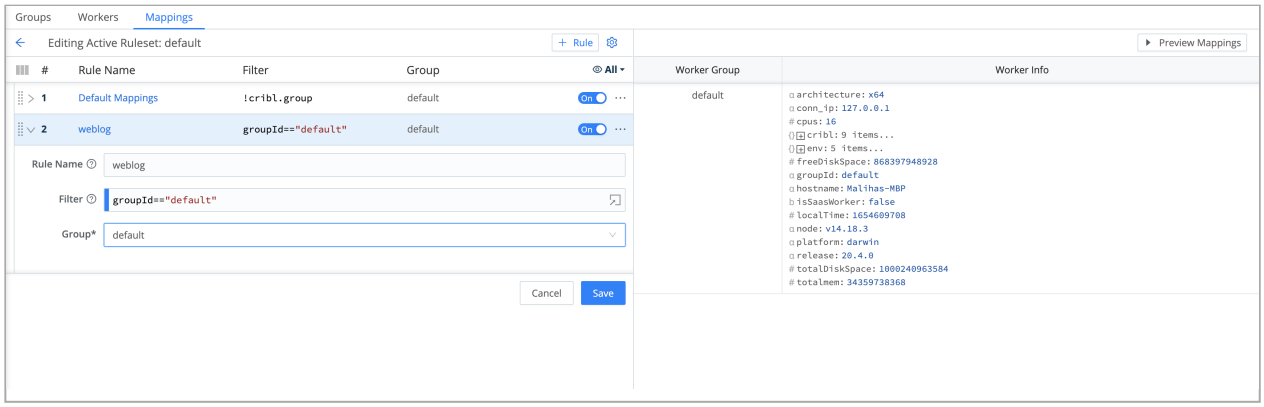

A specific Mapping Rule by Filter condition

2. Click **Save** to add this Rule.

3. Confirm the warning that changes will take effect immediately.

4. From the top nav, select **Global Config** > **Commit** to commit the Leader's new config.

> For more Mapping Rules/Rulesets details and examples, see Distributed Deployment.

Next, we'll add a second Worker Group; add a second Source (relaying Cribl Stream's internal metrics); and then add another Mapping Rule, to map our second Worker to the new Group.

Add Another Worker Group

1. From the Leader's top nav, click **Manage** > **Groups**.

2. On the resulting Groups page, click **New Group**.

3. Name the new Group `CriblMetrics` to match its purpose.

4. Set the **UI access** slider to `Yes`.

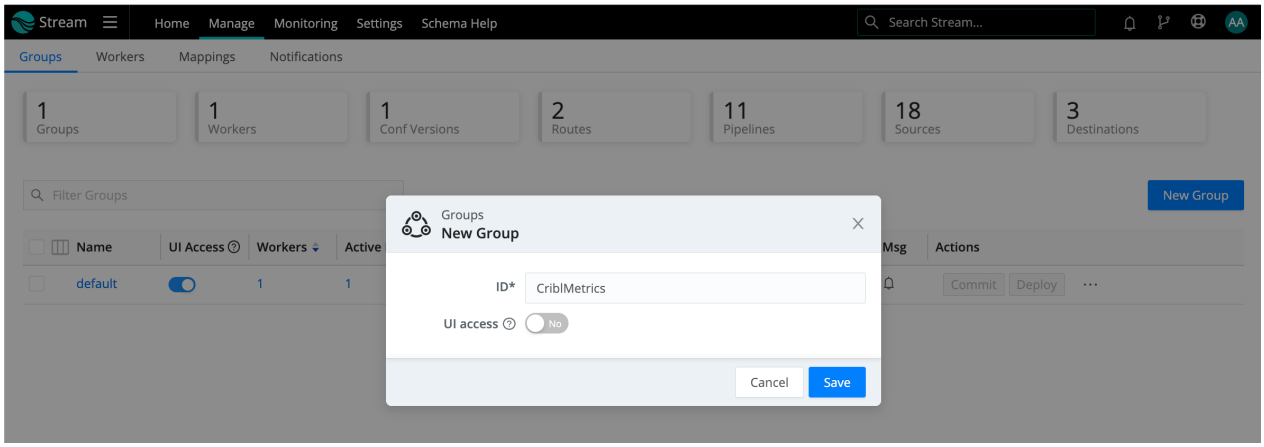

Creating a new Group

4. Save the Group.

5. Click **Deploy** on the new Group's row, and confirm your choice. The new Group should deploy immediately.

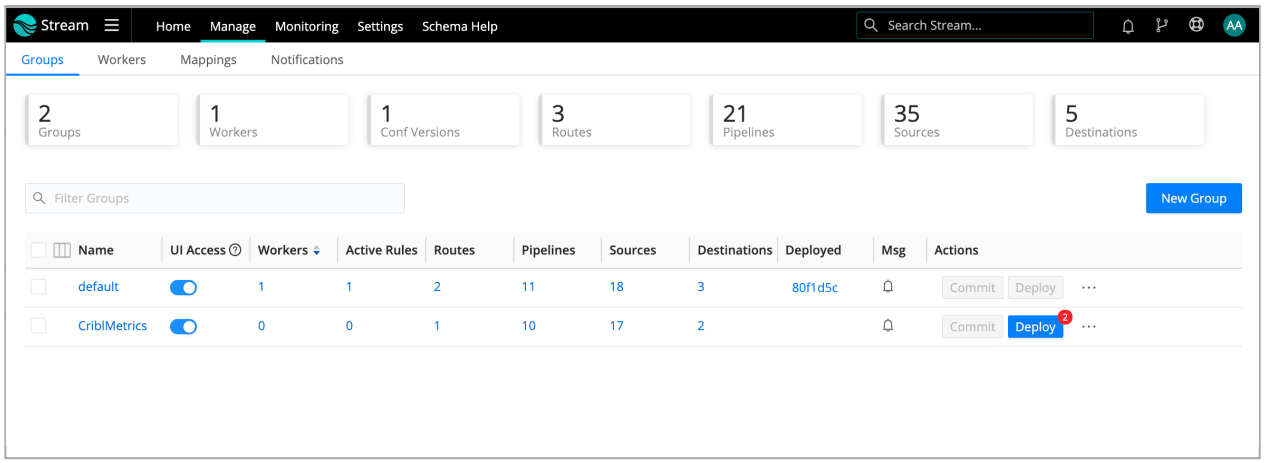

Second Groups saved, ready to Deploy

6. From the top nav, select **Global Config** > **Commit** to commit the new config on the Leader.

Add Another Source

On the new Group, we'll now enable a **Cribl Internal: Metrics** Source, representing a second data type.

1. From the Leader's top nav, click **Manage** > **Groups** > `CriblMetrics`.
2. From the resulting submenu, click **Data** > **Sources**.
3. From the **Data Sources** page's tiles or left menu, select **Cribl Internal**.
4. On the **Manage Sources** / **Cribl Internal** page, toggle **Enable** to `Yes` in the `CriblMetrics` row.
5. Confirm that you want to enable `CriblMetrics`.

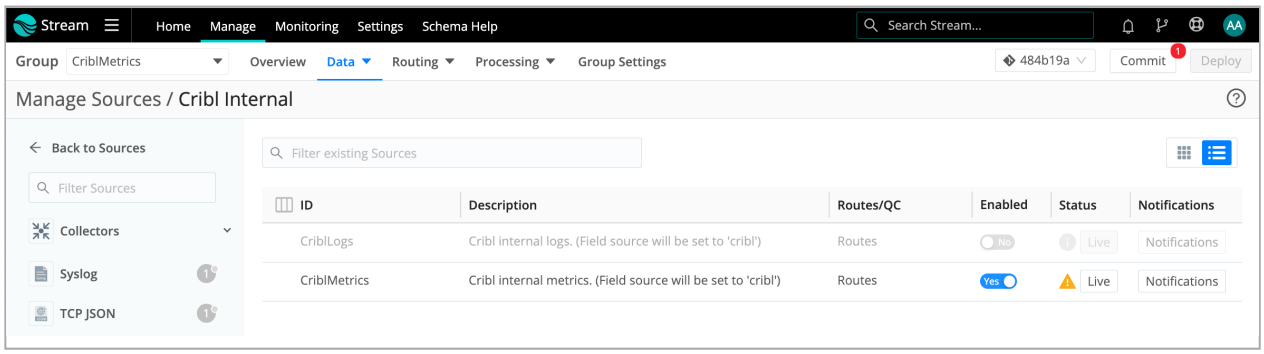

CriblMetrics Source enabled

6. From the top nav, select **Global Config** > **Commit** to commit the new config on the Leader and Group.
7. Click **Deploy** at the upper right to deploy this new configuration to your Workers.

Map Workers to Groups

Now let's map this new group to the CriblMetrics Source's incoming events:

1. From the Leader's top nav, click **Manage** > **Groups**.
2. From the Groups page, click the **Mappings** tab.
3. Click the `default` Mapping Ruleset to open it.
4. Click **Add Rule** at the upper right. Then configure the new Rule as shown below:

- **Rule Name**: `CriblMetrics` – for simplicity.
- **Filter**: `hostname=="<this-worker's-hostname>"` – get this value from the right Preview pane. In the second Worker down, look for the `hostname` field's value. In the example shown below, we got `"2ca68fec7de0"`.
- **Group**: `CriblMetrics` – this is the Group we want to map.

5. Move the `Default Mappings` rule to the bottom of the Ruleset, reflecting its catch-all function.
6. Click **Save** to store the new configuration.
7. Confirm the warning that changes will take effect immediately.

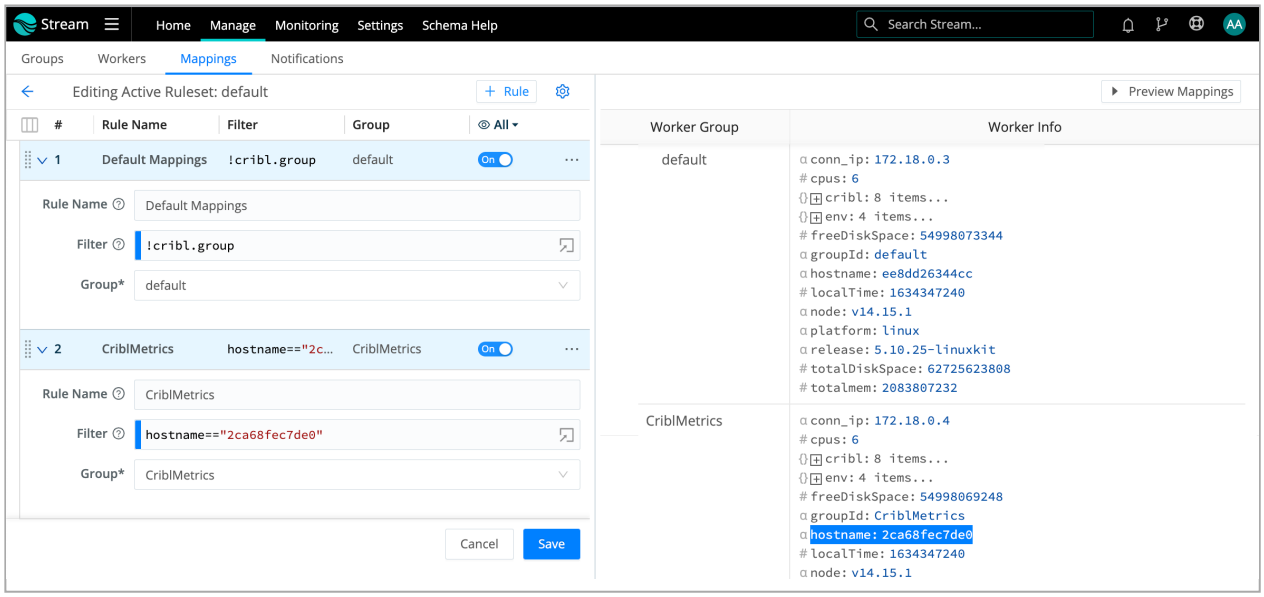

Adding a Rule to map the CriblMetrics Worker to its own Group

8. From the top nav, select **Global Config** > **Commit** to commit the Leader's new config.

We now have two data Sources and two Worker Groups – one each for (Web) logs versus (Cribl Internal) metrics – along with two Mapping Rules to map data accordingly. To confirm the Workers' assignment to the two Groups, click the top nav's **Manage** tab, then select **Groups** from the submenu:

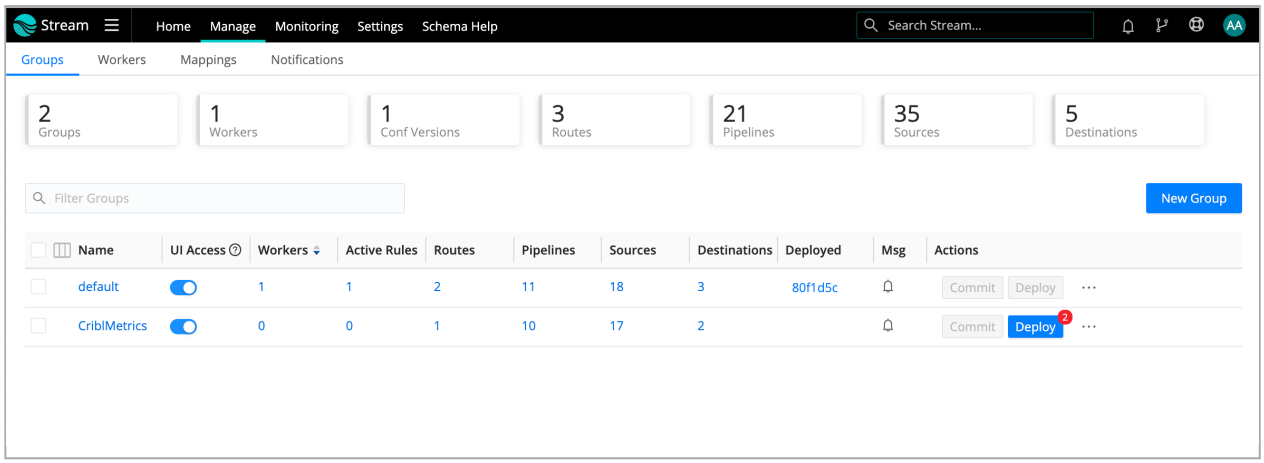

Manage Groups page confirms Workers' mapping and assignment

To confirm further details about the Workers, click the **Workers** tab, and on the resulting **Workers** page, click anywhere on the Worker Node's row to reveal more details:

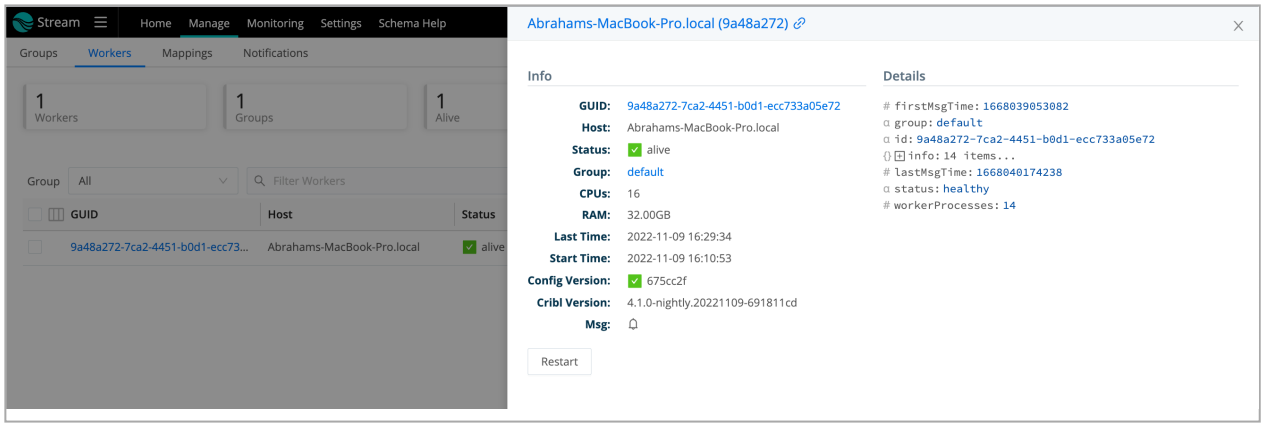

Worker Node Details

Configure Metrics Output

With incoming metrics now mapped to our second Worker Group, we next need to configure this Group's output. Here, we'll rely on a metrics-oriented Pipeline and a Destination that ship with Cribl Stream, and create a new Route to connect everything up.

Examine the Metrics Pipeline

1. From the Leader's top nav, click **Manage** > **Groups** > `CriblMetrics`.

2. From the resulting submenu, select **Processing** > **Pipelines**.

3. On the **Pipelines** page, find the `cribl_metrics_rollup` Pipeline, and click it to expand it.

4. Expand this Pipeline's Functions (including Comments) to see its configuration. It's preconfigured with a Rollup Metrics Function to aggregate metrics to a 30-second time window. Next is an Eval Function that filters for Cribl (Cribl Stream) internal metrics and tags them on outgoing events with a new field.

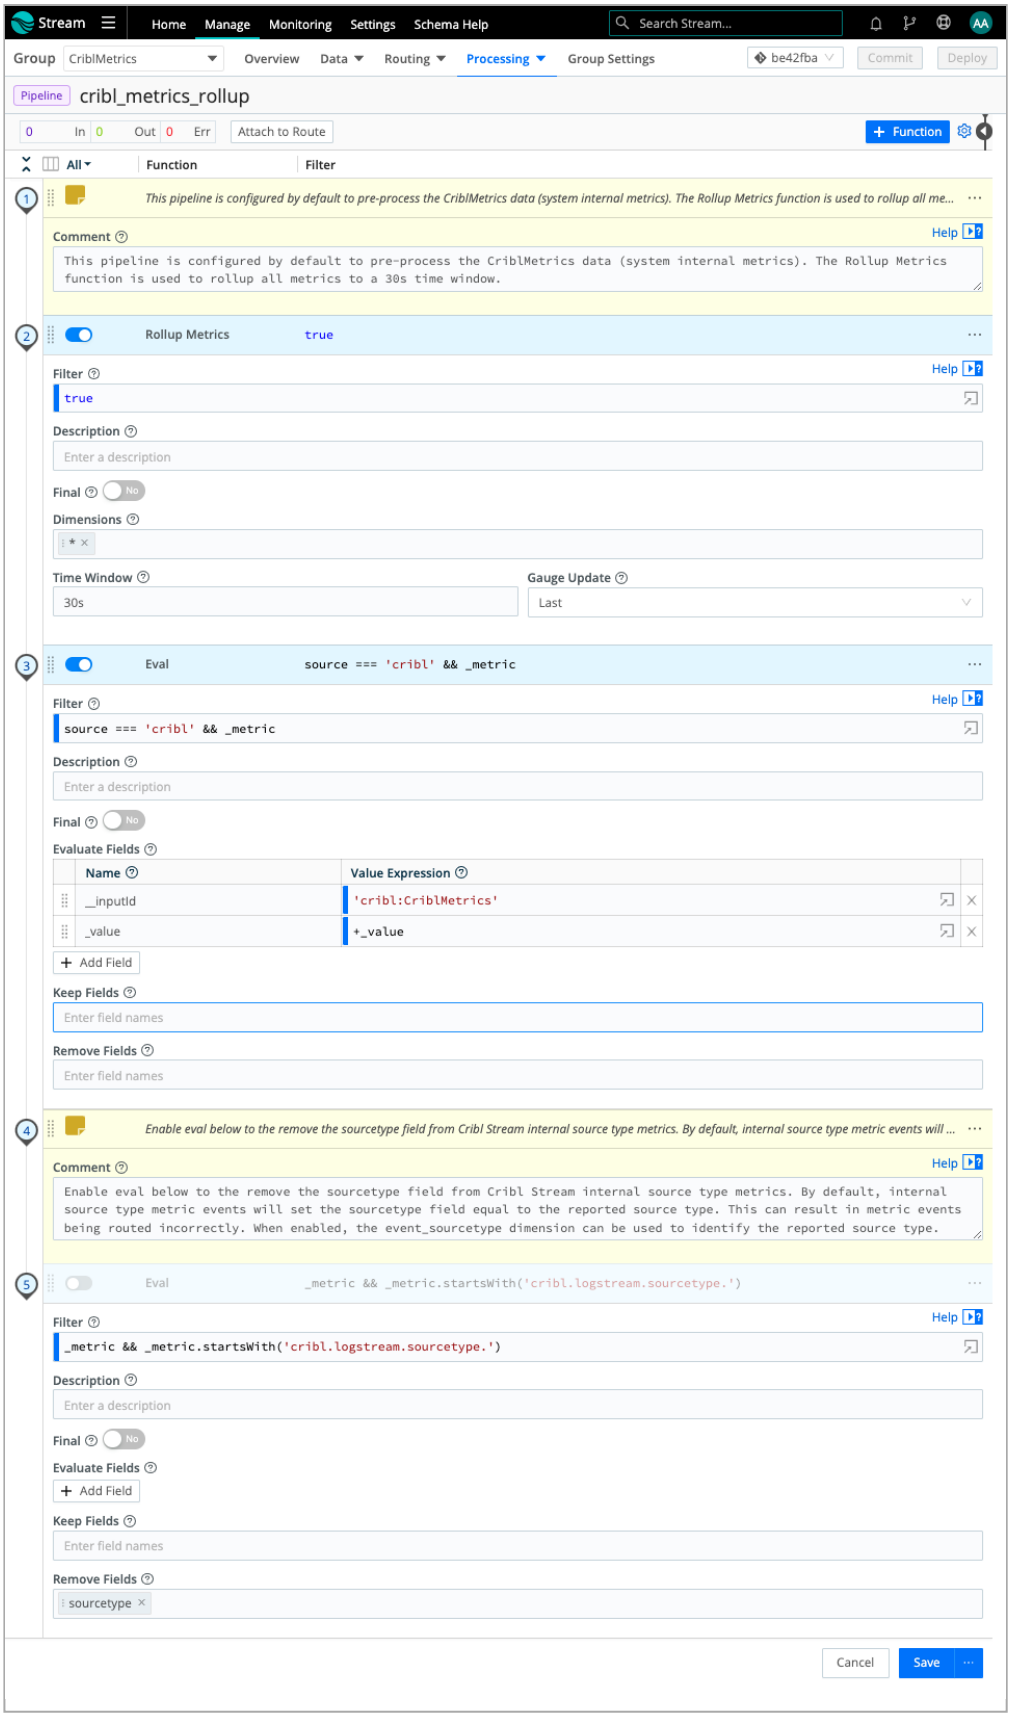

cribl_metrics_rollup Pipeline, shipped with Cribl Stream

Add Another Route

We'll connect this existing Pipeline to a new Route:

1. At the **Pipelines** page's top left, click **Attach to Route**.
   This displays the **Data Routes** page.

2. Click `Add Route`.

3. Enter a unique **Route Name**, like `metrics`.

4. Leave the **Filter** field set to its `true` default, allowing it to deliver all events.

5. Make sure the **Pipeline** drop-down is set to `cribl_metrics_rollup`.

6. As the **Output** (Destination), select our old friend `devnull:devnull`.

   This is Cribl Stream's preconfigured Destination that simulates a downstream service while simply dropping events.

7. You can leave the **Description** empty, and leave **Final** set to **Yes**.

8. Grab the new Route by its handle, and drag it to the top of the Routing table, so that our new Route will process events first. You should see something like the screenshot below.

9. Click **Save** to save the new Route configuration.

10. **Commit** and **Deploy** your changes.

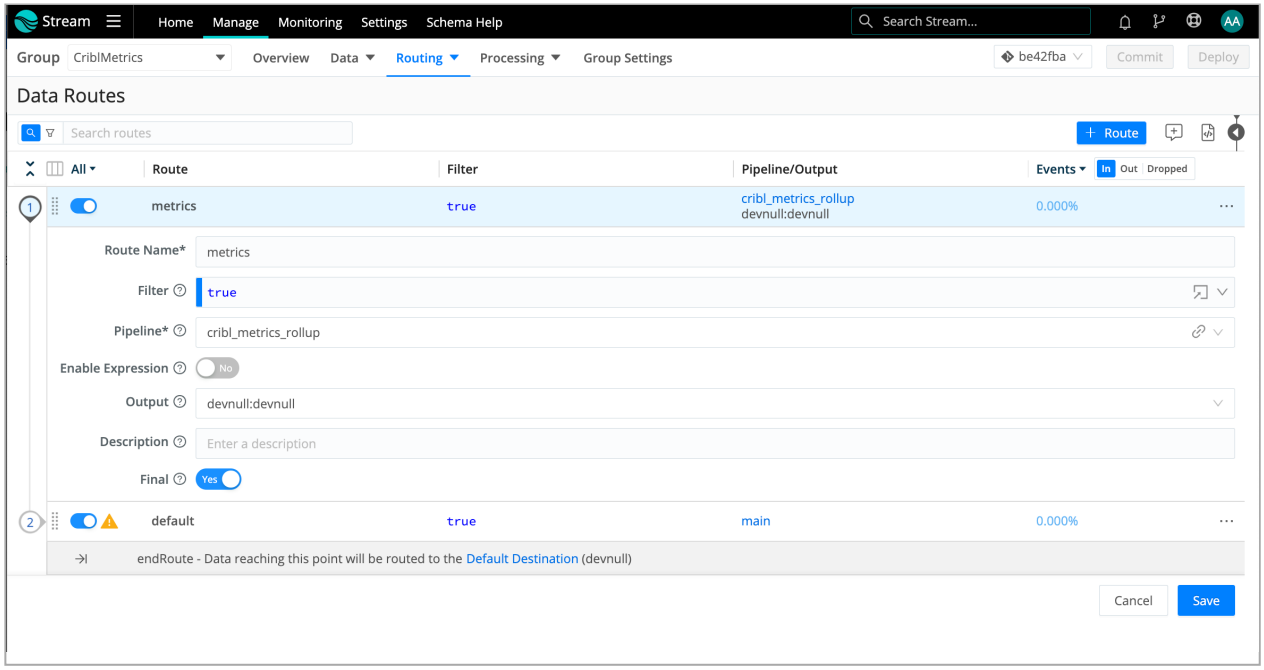

Cribl metrics Route, Pipeline, and Destination wired up

Verify the Multi-Group Deployment

From the sparkline on the Route you just configured (see the screenshot above), you can already see that metrics data is flowing all the way "out" of Cribl Stream – simulated here by the DevNull Destination.

To verify the whole configuration you've created, click the top nav's **Monitoring** tab. On the **Monitoring** page, toggle the **All Groups** drop-down (upper right), toggle between the two Worker Groups to see the division of labor:

- Group `default` (the out-of-the-box Group we configured first) handles the `weblog.log` data.
- Group `CriblMetrics` handles the metrics data.

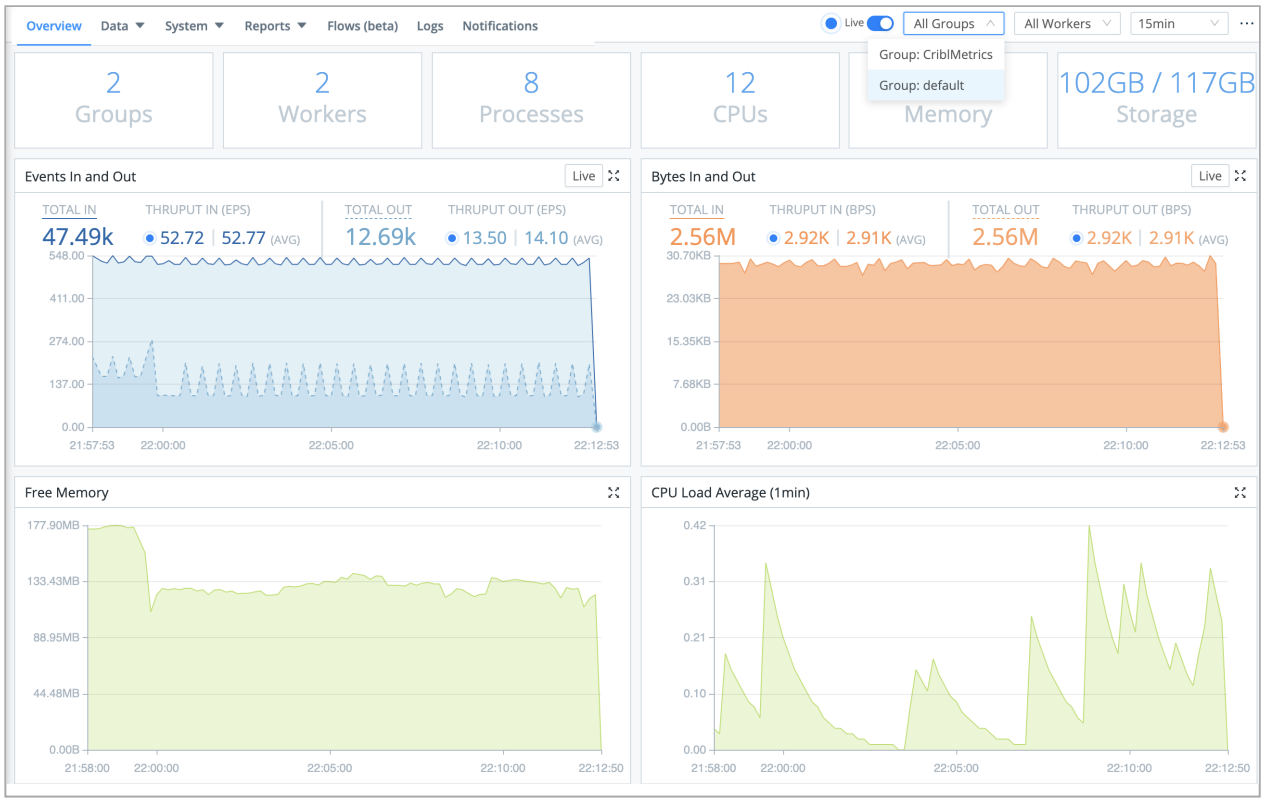

Monitoring individual Worker Groups' throughput

All the Distributed Things – Review

Before a final section where you can tear down your infrastructure, here's a recap of the simple (but expandable) distributed model we've created, with some ideas for expanding it:

- A distributed deployment enables Cribl Stream to scale out to higher data volumes. This load-balancing occurs even with a single Worker Group, in which all Workers share the same configuration.

- By adding multiple Worker Groups, you can partition Worker Nodes (and their data flows) by different configurations. In this demonstration, we simply mapped Workers to Groups by the Workers' `hostname`. But you can map by a range of arbitrary criteria to meet your production needs.

- E.g.: Different Groups can be managed by different teams. You can filter on DNS rules to send relevant data to the relevant team's Group.

- Different Groups can also maintain configurations for different regions' data privacy or data retention requirements.

- You can also Map workers arbitrarily using Tags and other options.

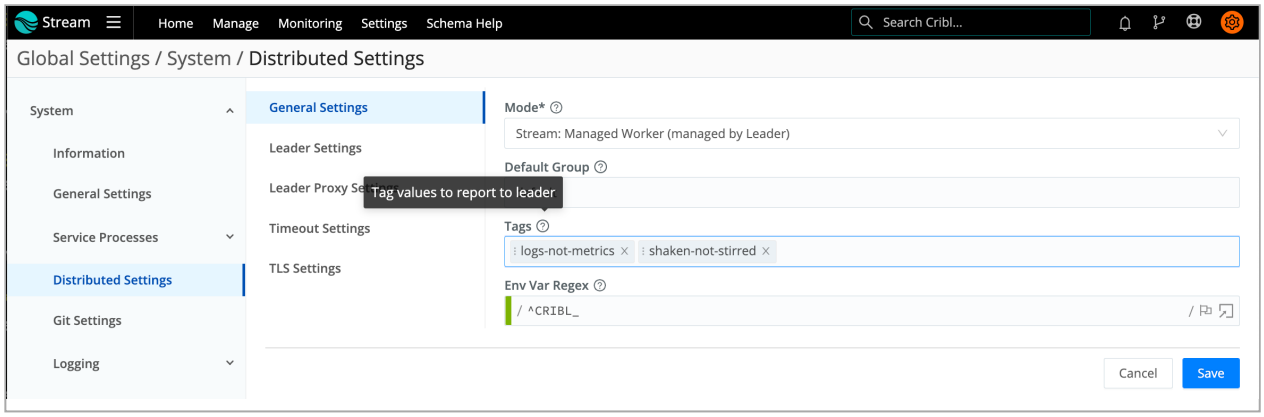

Setting arbitrary Tags on a managed Worker

More About Worker Groups, Nodes, and Processes – Definitions

Cribl Stream refers to "Workers" at several levels. Now that you've been initiated into building distributed deployments, here's a guide to the fine points of distinguishing these levels:

- A **Worker Group** holds one or multiple **Worker Nodes**.

- Each Worker Node functions like an independent Cribl Stream single-instance deployment. Worker Nodes don't coordinate directly with each other – they're coordinated only through communication to/from the Leader Node.

- Each Worker Node contains a configured number of **Worker Processes**. Unlike the above grouping abstractions, this is the level that actually processes data. To load-balance among Worker Processes, Cribl Stream's API Process round-robins incoming connections to them.

> When deploying on AWS/EKS, Worker Groups should not span Availability Zones. If you have EBS persistent volumes, and a node fails, its replacement won't be able to access the peer volume across AZs.

Cleaning Up

If and when you choose to shut down the infrastructure you've configured for this demonstration:

- Navigate to Cribl Stream's `default` Group > **Data** > **Sources** > **Datagen**, and switch off the slider beside `weblog.log`.
- If you configured a second Worker Group: Navigate to Cribl Stream's `CriblMetrics` Group > **Data** > **Sources** > **Cribl Internal**, and switch off the slider beside **CriblMetrics**.
- If you have `netcat` running on a Worker's terminal/console, `^C` it.
- There's no need (or way) to switch off the **DevNull** Destination – it just is.
- If desired, **Commit** and **Deploy** these changes.
- If you're running the Cribl Stream server(s) on cloud instances that will (ultimately) incur charges, you're now free to shut down those cloud resources.

Next Steps

Interested in guided walk-throughs of more-advanced Cribl Stream features? We suggest that you next check out these further resources.

- Distributed Deployment: All the details behind the deployment approach you just mastered in this tutorial.
- Cribl Stream Sandboxes: Work through general and specific scenarios in a free, hosted environment, with terminal access and real data inputs and outputs.
- Use Cases documentation: Bring your own services to build solutions to specific challenges.
- Cribl Concept: Pipelines – Video showing how to build and use Pipelines at multiple Cribl Stream stages.
- Cribl Concept: Routing – Video about using Routes to send different data through different paths.

1.6. Projects

Projects (also called Stream Projects) diversify who can use Cribl Stream, and how:

- Projects create isolated spaces for teams and users to share and manage their data. Project editors get a streamlined visual UI.
- Cribl admins can filter users' access to specific data and Destinations – scoping the access to match what's relevant to those users' work.

This self-service approach to Cribl Stream data can benefit its immediate users, by offering them accelerated access to relevant data, with minimal configuration requirements. It can also benefit their peers.

Project editors get isolated workspaces, and they can customize these workspaces to meet their needs, with no impact on other Cribl Stream users across their organization. Data can be forked into (for example) full-fidelity versus redacted views, to match different groups' authorization and needs.

> **Breaking Change**
>
> Any Projects you created in v.4.1.x are deleted when you upgrade to v.4.2. You must re-create your Projects after you upgrade. You should also delete and re-create any Subscriptions that carry over during the upgrade.
>
> In v.4.2 and later, Projects/Subscriptions rely entirely on the fine-grained Members/Permissions access control available in the same versions. See Adding Users to Projects for details.

Use-Case Scenario

Imagine that a Cribl administrator wants to filter data from a shared set of firewall Sources, splitting the data between her organization's Security and Ops teams. A requirement is that each team's data should be isolated, with neither team having access to the other team’s data. The Security team uses Splunk, while the Operations team uses Elasticsearch.

Projects enable this filtering and isolation. Each team gets secure access to its own sets of data, and each team's data transformations and configuration changes don't affect the other team’s data or configs.

Requirements

Enabling Projects requires either an Enterprise license and a distributed on-prem deployment, or a Cribl.Cloud Enterprise plan.

Projects' Subscriptions can ingest data only from Cribl Stream Sources configured as **Send to Routes**, not from QuickConnect Sources. (This is despite Projects' QuickConnect-like Project view, introduced below.)

Components

This feature relies on the following building blocks:

- Subscriptions
- Data Projects
- Roles and Permissions

Data Projects

The **Data Projects** tab is where Cribl admins can add and configure Projects, share access to those Projects, and associate Subscriptions with specific Destinations.

Admins see an expanded version of the same drag-and-drop visual UI that Project editors can use to connect configured Subscription with configured Destinations.

Subscriptions

Each Subscription filters a subset of a Worker Group's incoming data to expose to Project editors, along with processing options for that data.

Members and Permissions

In Cribl Stream 4.2 and later, Projects work with the Members and Permissions authorization system available in the same versions. Cribl Stream admins – users who hold the Stream- or Worker Group-level `Admin` or `Editor` Permission, or the legacy `stream_admin` Role – can create and configure Projects and Subscriptions. They can access resources outside individual Projects to build the Projects.

As a Stream Admin, you also control users' access to Projects and Subscriptions. For details, see Adding Users to Projects.

How the Components Fit Together

The components' names and relationship are easiest to remember in terms of the publish/subscribe model long used by Cribl Stream integrations like Kafka or Google Cloud Pub/Sub:

- A **Project** is a microcosm of a whole Cribl Stream deployment – gathering together Subscriptions' incoming data, routing/processing, Destinations, and authorized users.
- A **Subscription** specifies a subset of available data to retrieve, and how to import the data.

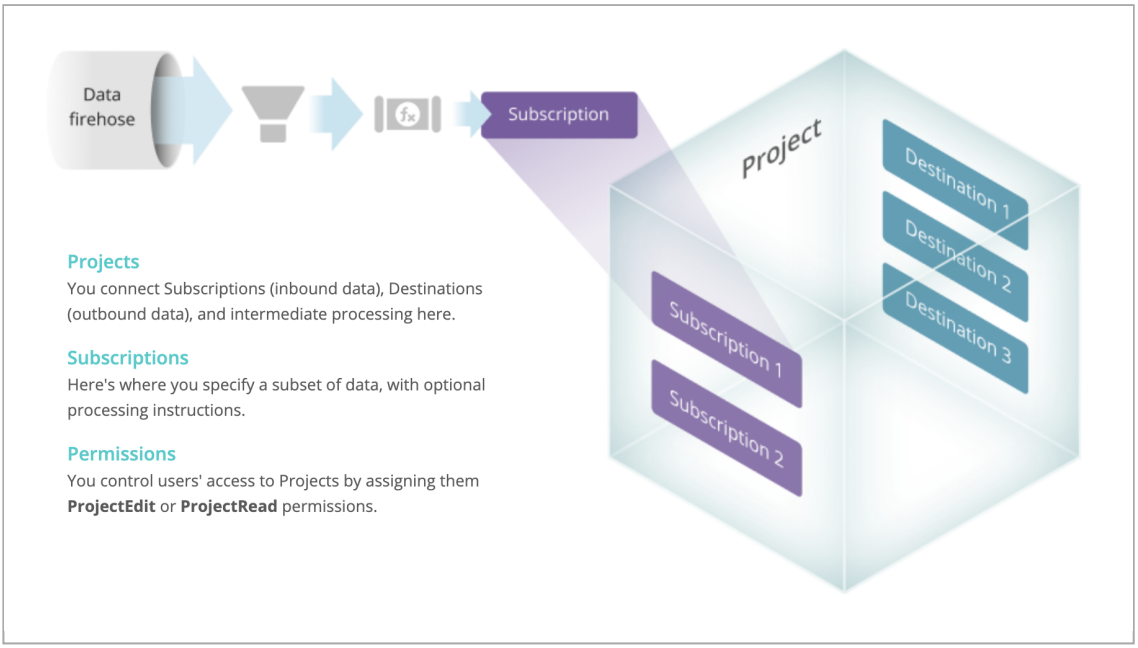

How Subscriptions and Projects filter incoming data

Getting Started with Projects

You interact with Projects in either of two ways, depending on your Cribl Stream Permissions.

As a Project Editor

When you log into Cribl Stream and navigate to a Group, you'll find your Projects and Subscriptions already set up for you in a convenient visual UI.

You can adjust your Projects' data flow by connecting Subscriptions to Destinations. You can insert and configure Pipelines, and can insert Packs, that are part of the Project. You can also commit your configuration changes to Git. This all works the same way as in QuickConnect.

As a Cribl Admin

To access Projects configuration options:

1. Navigate to a Worker Group. (Projects and their components are configured per Group, providing a first layer of isolation).
2. Select **Manage** > **Projects**. This exposes two lower tabs: **Data Projects** (the default, also called the Projects view) and **Subscriptions**.
3. See the following pages for details on configuring each of these components for Project editors.

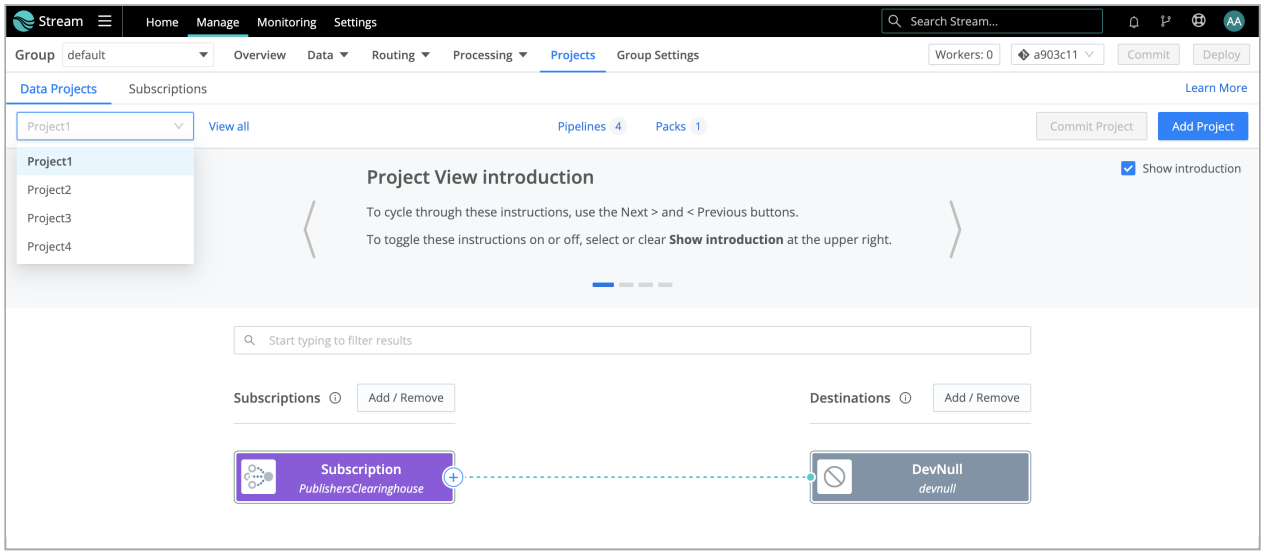

Accessing the Project view

Adding Users to Projects

As a Stream admin, you control Members' access to individual Projects by assigning Permissions to those Members, as outlined below.

> **Breaking Change**
>
> In v.4.2 and later, Projects and Subscriptions rely entirely on the fine-grained Members/Permissions access control available in the same versions. The 4.1.x `project_user` Role and `ProjectSourceSubscribe` Policy, which provided access to all Projects, are now retired. To migrate Projects configured in v.4.1.x, you'll find those projects' users visible in Stream as Members. Assign them appropriate new Permissions, as outlined here.

Project-Level Permissions

You can share a Project with a Cribl Stream Member using the following Permissions, with some constraints inherited from the Member's Permissions at higher levels (Cribl Organization, Cribl Stream, and Worker Group).

PERMISSION	DESCRIPTION
Maintainer	Admin-level Permission. Allows freely editing or deleting the Project and its settings. (Shared, by inheritance, only with Members who have the `Admin` or `Editor` Permission at higher levels.)
Editor	Can configure connections among the Project's Subscriptions, Packs, and Destinations, but cannot modify or delete these resources. Can create, modify, and delete Pipelines within the Project. (**Use this Permission to share a Project with** Project editors.
Read Only	Can view Project and Subscription settings and connections, but not modify or delete them. (Designed specifically for support personnel. Members who have the product-level `Read Only` Permission will inherit, and will be locked to, this Permission.)
No Access	Self-explanatory: a Member's default state on a Project that has not (yet) been shared with them.

> Members who have the `User` Permission at the top (Organization) level are the most malleable at the Project level. These are the Members with whom you can readily share a Project-specific `Editor` Permission, to authorize them as a Project editor.

Sharing a Project (Example)

To share a Project with an eligible Cribl Stream Member:

1. Select **Settings** > **Global Settings** > **Members**.
2. Make sure each applicable Member has the `User` **Org Permission**, and the `User` **Stream Permission**. (Click an existing Member's row to adjust their Permissions; click **Add Member** to create a new Member.
3. From the top-left product switcher, select **Stream**. Then select **Settings** > **Stream Settings** > **Members**.

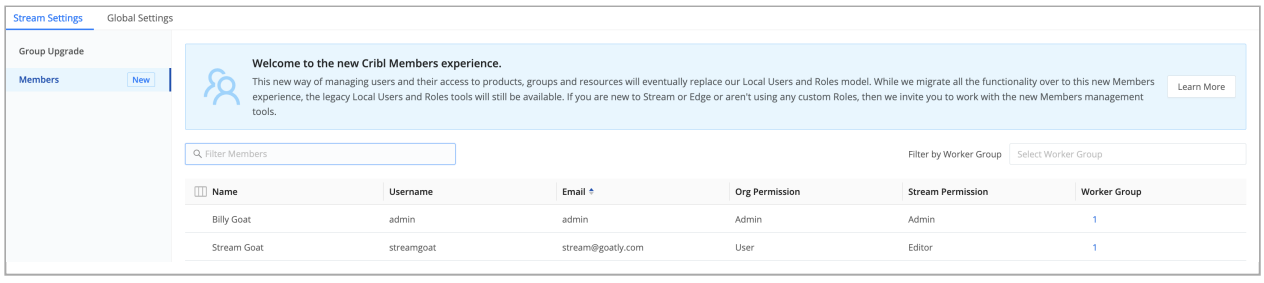

Stream Settings > Members

4. Click each applicable Member's row to open their **User Details** drawer.

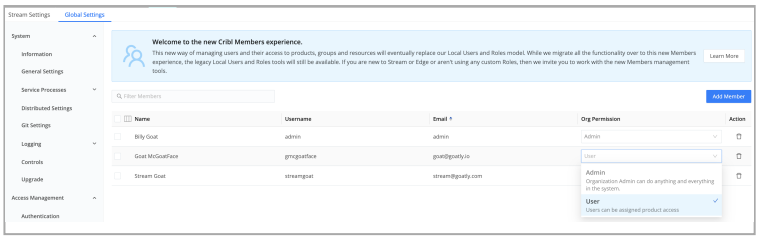

Stream Members > User Details

5. Grant the Member a `User` Permission on the applicable Project's parent Group. (Higher permissions here are not applicable to Project editors.)
6. Select **Manage** and click the same Group to give it focus.
7. Select **Projects** > **Data Projects** > **View all**.

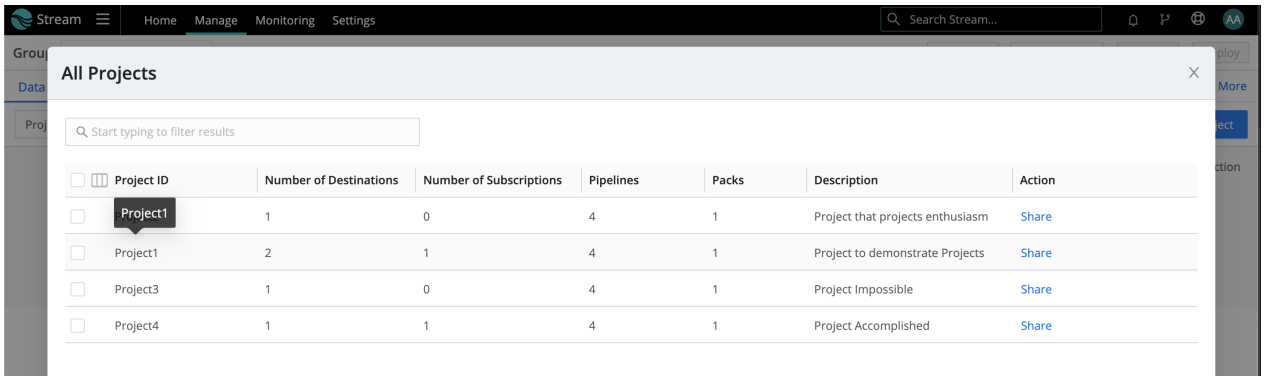

View all > All Projects modal

8. In the resulting **All Projects** modal, click the Project's **Share** link to open the **Project Members** drawer. Here, you can see all the Group's Members with whom this Project can be (or has been) shared.
9. Grant each applicable Member an `Editor` Permission on the Project. (The alternative `Read Only` Permission is intended for support users. It does not enable configuring connections or Pipelines.)

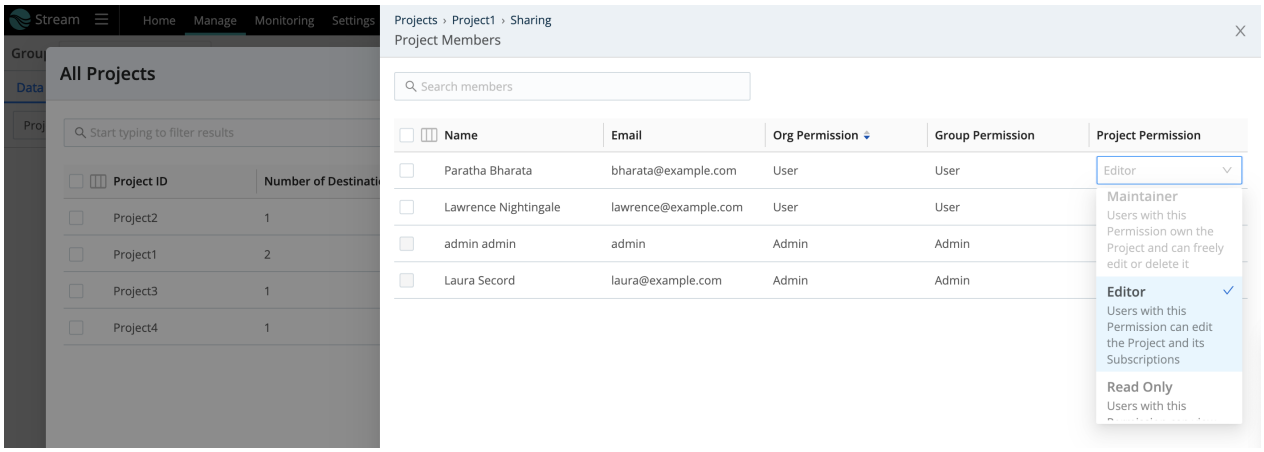

Project Sharing drawer – assigning `Editor` Permission

10. Click **Save** to confirm your changes, then click outside the drawer to close it.
11. Commit your changes, and deploy the Group if prompted.

These Members who now have Project `Editor` Permissions – and no higher Stream Permissions – view data filtered through the Projects UI. They also have read access to Cribl Stream Data Monitoring and Notifications.

> You can reopen the same drawer to modify Members' Permission levels. To remove a Member from the Project, assign them `No Access`.

Enabling Metrics for Projects

Metrics are disabled, by default, for Projects. To enable metrics:

1. Enable Project metrics:
    i. Navigate to **Settings** > **Global Settings** > **System** > **General Settings** > **Limits** > **Metrics**.
    ii. Delete **project** from the **Disabled field metrics** list.
    iii. Click **Save**.

2. Enable Group Project metrics:
    i. Open a Group, and then navigate to **Group Settings** > **System** > **General Settings** > **Limits** > **Metrics**.
    ii. Delete **project** from the **Disabled field metrics** list.
    iii. Click **Save**.

3. Commit and deploy the changes.

1.6.1. Configuring Projects

Projects define the data that the Project's users can consume, where that data can be sent, and who has access to the Project. A Project associates specific Subscriptions with specific Destinations. For fine-grained access control, you can share each Project with specific Members.

By connecting incoming data sources (Subscriptions) to specific Destinations, Projects function like a Route's Output selection. We expand on this similarity in Subscriptions and Routes.

Accessing Projects

From your Worker Group's **Manage** submenu, select **Projects** to open the default **Data Projects** lower tab.

This is the "Project view," an expanded version of the UI in which Project editors will manage connections among the resources you define here. From left to right, the options in this administrator's view are:

- Projects drop-down list: To bring a different Project into the Project view, select it here.
- **View all** link: Click to open the **All Projects** modal, where you can configure and share existing Projects.
- **Pipelines** link: Click to open a modal where you can manage Pipelines that are scoped to this Project.
- **Packs** link: Works the same way as the **Pipelines** link. The modal will show only Packs that are part of this Project. For Project editors, Packs will be read-only resources – Project editors can insert or remove Packs, but not modify them.
- **Commit Project** button: Commit changes from this Project to Git.
- **Add Project** button: Creates a new Project. Covered just below.

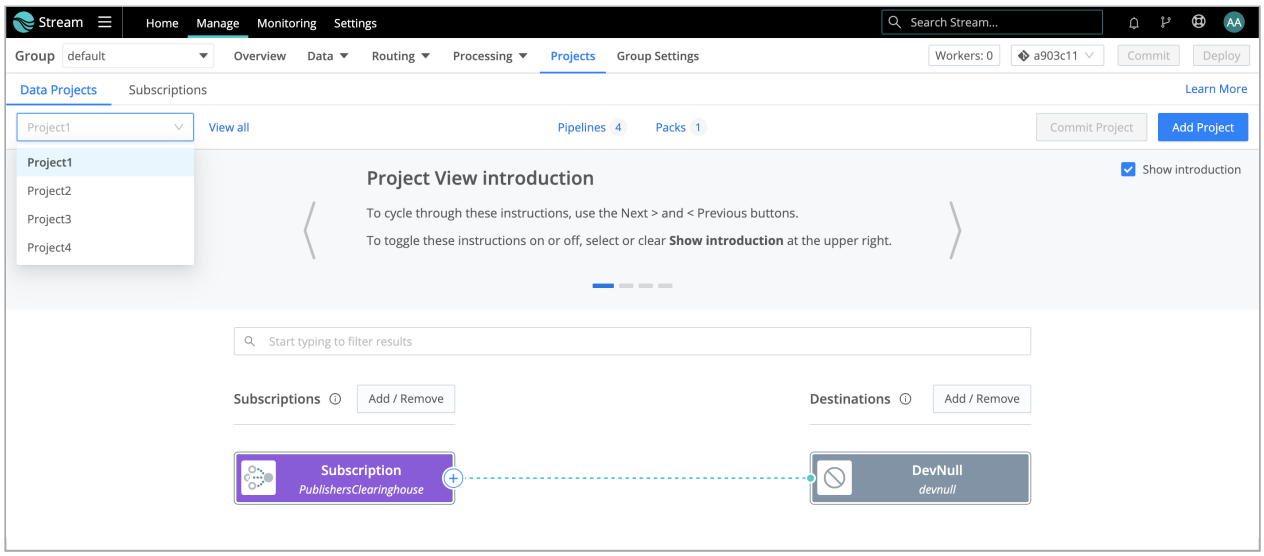

Configuring a New Project

1. From the Project view shown above, click **Add Project** to open the **Add New Project** modal shown below.

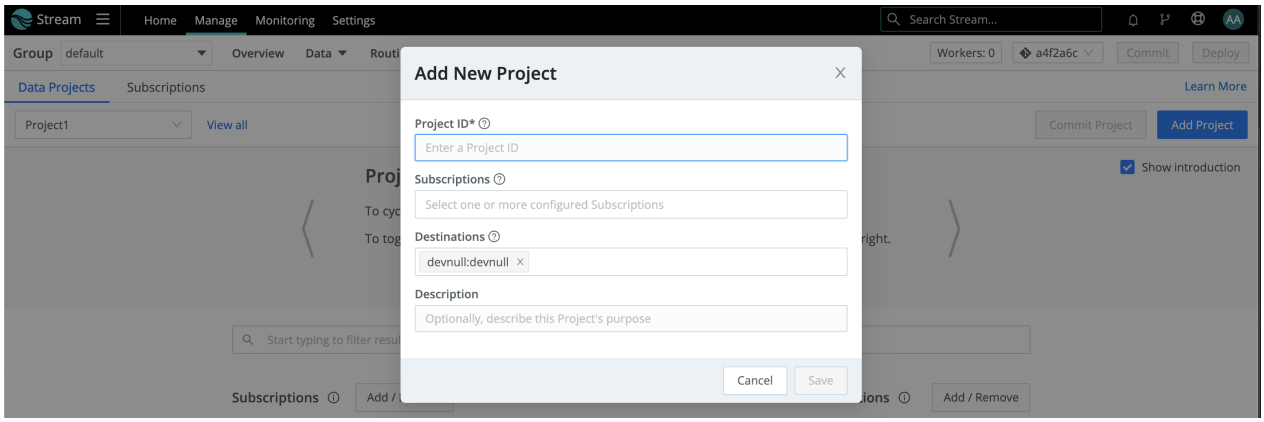

Configuring a new Project

2. Assign this Project a unique **Project ID**. (This can include letters, numbers, `_`, and `-`. IDs are case-sensitive, so entering the same characters with different capitalization will create a separate ID.)
3. Select one or more configured Subscriptions. (You can access only Subscriptions that are already configured in this Project. But you can reopen this modal later to add newly configured Subscriptions. Also, the Subscriptions UI enables you to add Subscriptions to Projects.)
4. Select one or more configured Destinations that will have access to this Project's data. (You can access only Destinations that are already configured in this Project – but you can configure and add more Destinations in the next section.)
5. Optionally, add a **Description** of the Project's purpose.
6. Click **Save** to finish configuring your Project.
7. Commit and deploy your changes.

> To view **Live Data** on your configured **Destination**, you must **Commit** and **Deploy** your changes.

Testing a Project (Managing Data Flow)

After you return to the Project view, make sure your desired Project has focus in the upper-left drop-down list. You can now use the Project view's visual UI to expand the Project and enable its data flow. The options here include:

- Connect the Project's already configured Subscriptions and Destinations, optionally adding a Pipeline or Pack to each connection.
- Click **Subscriptions** > **Add / Remove** to open a drawer where you can expose any Subscription you've already configured in the Project, remove Subscriptions from the Project view, or add new Subscriptions.

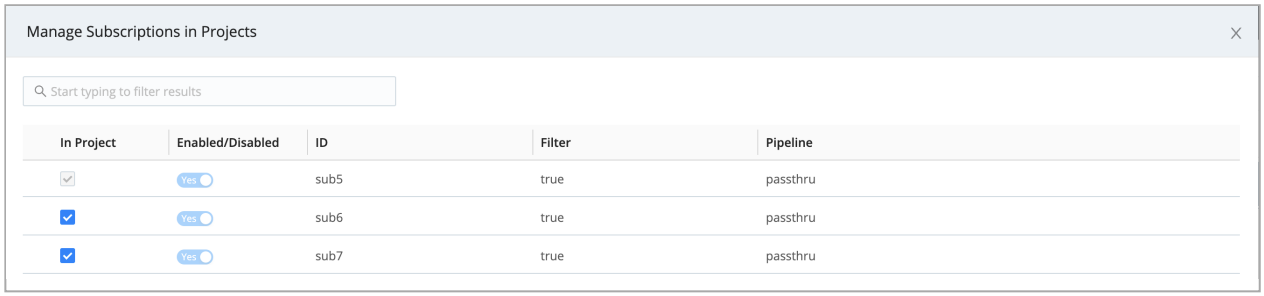

- Click **Destinations** > **Add / Remove** to open a drawer where you can expose and configure any Destination type available in your Cribl Stream deployment. (Any Destination that you add here will automatically be added to the Project's configuration modal when you next reopen it.)

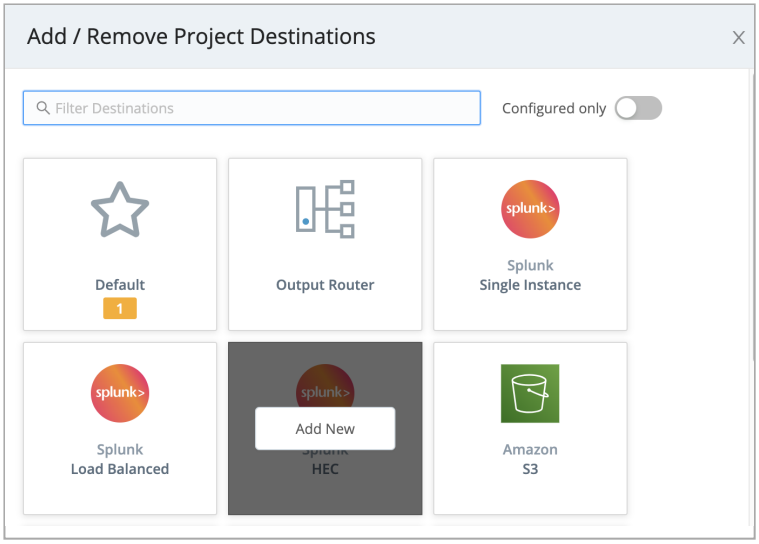

As you configure and test your Project, beware of high ingestion rates that could overwhelm downstream receivers. To prevent dropped events, enable Persistent Queues on Destinations that support them.

Enabling Pipelines and Packs

Each Project that you configure opens with a basic set of Pipelines and one default Pack. To manage these, click the upper **Pipelines** or **Packs** link, respectively. Each opens a modal similar to Cribl Stream's standard Pipelines or Packs UI, with access to standard Sample Data and Preview options on the right.

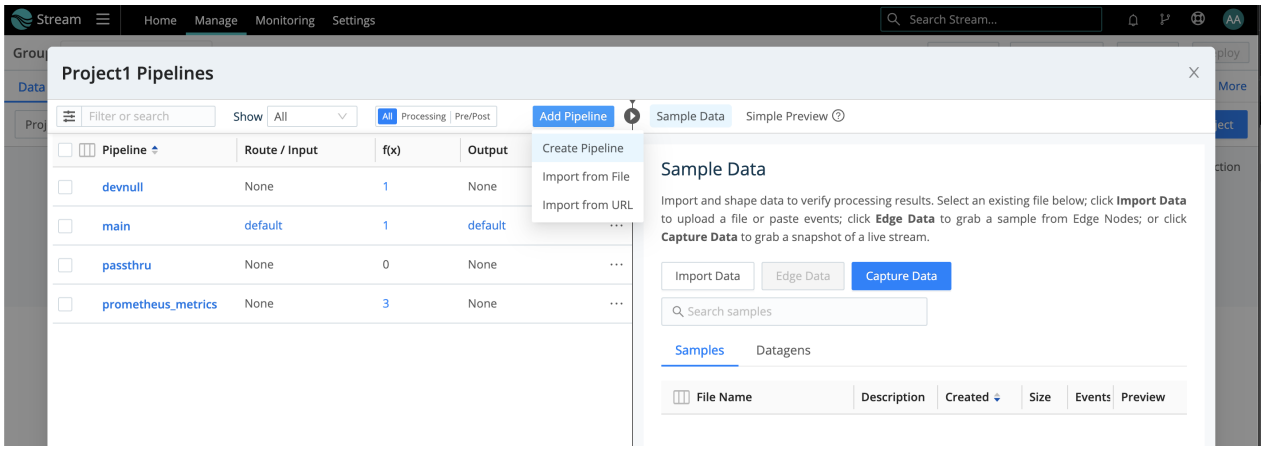

Managing Project Pipelines

To offer Project editors additional processing resources to insert on Subscription/Destination connections, click the modal's **Add Pipeline** or **Add Packs** button. You can then enable new Pipelines and Packs in the Project, with these constraints:

- You can create a new Pipeline or Pack here. It will be available only in the current Project.
- You can import an existing Pipeline or Pack. Any modifications that you make here will similarly be scoped to the current Project.
- To import an existing Pipeline from your Cribl Stream deployment, you must export it as JSON, then select the **Import from Pipeline** drop-down option shown above. (You can also **Import from URL**.)
- You can import Packs from an exported JSON file, a URL, or the Dispensary or Git options shown on the drop-down below.

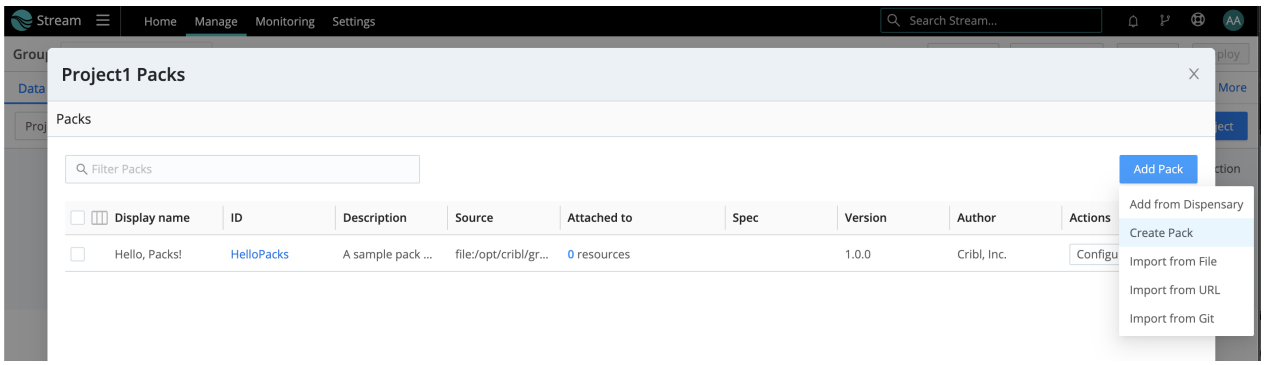

Adding Project Packs

Editing a Project

To update an existing Project, click the Project view's upper-left **View all** link. From the resulting **All Projects** modal, click the Project's row to reopen its configuration in a modal similar to the **Add New Project** modal covered above.

You can also click any row's **Share** link to open a drawer in which to manage users' access to the Project.

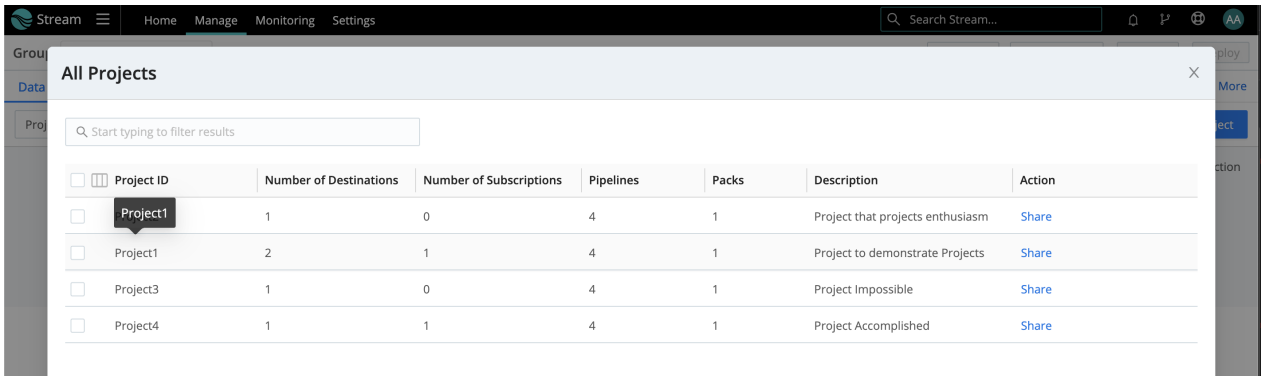

View all > All Projects modal

1.6.2. Configuring Subscriptions

You use a Subscription's **Filter** expression to specify a subset of a Worker Group's overall incoming data stream to forward to Destinations. Optionally, you can also specify a Pre-processing Pipeline to condition that data before it leaves the Subscription.

You gather Subscriptions into Projects, where you match them up with Destinations and share them with authorized users.

A Project can contain multiple Subscriptions. In Cribl Stream 4.2 and later, each Subscription can be associated with multiple Projects. Each Project's copy of the Subscription will share the same configuration, but will have independent data flow.

Subscriptions and Routes

From the UI similarity, you've probably noticed that Subscriptions look and function much like Routes. There are both similarities and differences – which we'll consider in reverse order.

Subscriptions/Routes Differences

Compared to Routes, Subscriptions present these exceptions:

- Subscriptions lack a Route's **Output** or **Output Expression** field. (Instead, you associate Subscriptions with Projects, where Project editors can process the data and send it to Destinations.
- Subscriptions have no **Final** flag. So a Subscription is similar to a Route with the **Final** toggle switched off.
- Subscriptions do not relay backpressure upstream to data senders. (This is by design, to prevent any Subscription from affecting data flow through parallel Subscriptions, Projects, or Routes/Pipelines.) If any backpressure occurs, a Subscription will drop data.

Subscriptions/Routes Similarities

A further link to Cribl Stream's Data Routes interface is that Subscriptions can ingest data **only** from Sources configured (at the Cribl Stream product level) as **Send to Routes**. (Subscriptions and Projects cannot ingest data from QuickConnect Sources, despite the similarity of Projects' visual UI (the Project view).

This also means that Subscriptions tap exactly the same overall flow of inbound data that Data Routes do, in parallel. So there are cases where, after you've configured Subscriptions to ingest certain data, you might

want to configure a Pipeline at the top of the Routing table to drop the same data. This will prevent Cribl Stream from processing the same events twice.

Usage Tips

Compared to sending the same data flow through Routes, adding Subscriptions can have a performance impact, because each Subscription creates a copy of the data that Cribl Stream needs to process. Therefore, your resource requirements could change with the number of Subscriptions you add.

Please work with your Cribl Solutions Engineer to select an architecture that best balances your needs for performance versus segmented data/configuration access.

Cribl recommends that you configure a separate Subscription – and corresponding Pipeline(s) – for each data type you ingest. This enables you to filter by data type in the Subscription's definition, and again in individual Pipeline Functions.

Accessing Subscriptions

1. From your Worker Group's **Manage** submenu, select **Projects**.

2. Select the **Subscriptions** lower tab.

   Any Subscriptions you've already configured will appear here. Expand the accordions to access each Subscription's configuration.

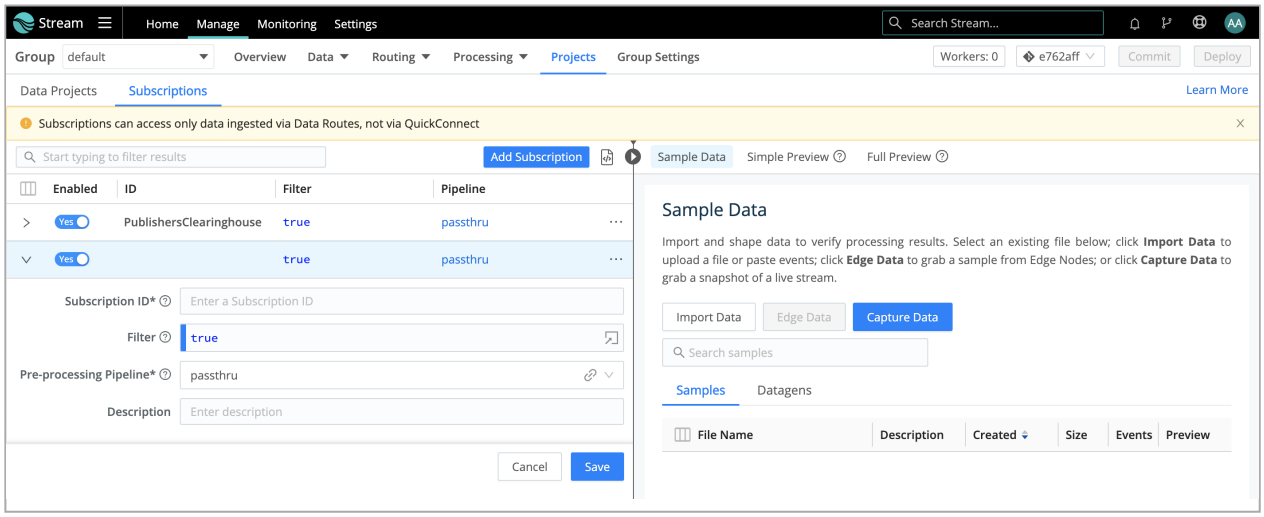

Configuring a new Subscription

Configuring a New Subscription

1. From the **Subscriptions** lower tab, click **Add Subscription** to open the configuration options described below.

2. Assign this Subscription a unique **Subscription ID**. (This can include letters, numbers, `_`, and `-`. IDs are case-sensitive, so entering the same characters with different capitalization will create a separate ID.)

3. Modify the **Filter** by replacing the default `true` with a JavaScript expression that selects a subset of events to filter through this Subscription. (Your expression can specify an upstream sender, a data type, the presence of particular fields, etc. For examples, see Cribl Expression Syntax.)

4. Modify (as needed) the Source's default `passthru` Pre-processing Pipeline.

5. Optionally, add a **Description** of the Subscription's purpose.

6. Optionally, assign the Subscription to one or more Projects. (You can also import Subscriptions from individual Projects' configurations, and can control Subscriptions' visibility in the Project view.)

7. Click **Save** to save the new Subscription to the Subscriptions table.

8. Commit and deploy your changes.

> A Subscription must specify a Pre-processing Pipeline, even if this is the default `passthru`, which performs no processing.

Adding and Previewing More Subscriptions

From the **Subscriptions** tab, you can click **Add Subscription** repeatedly to define multiple Subscriptions. These stack on the left, like Routes in Cribl Stream's Routing table.

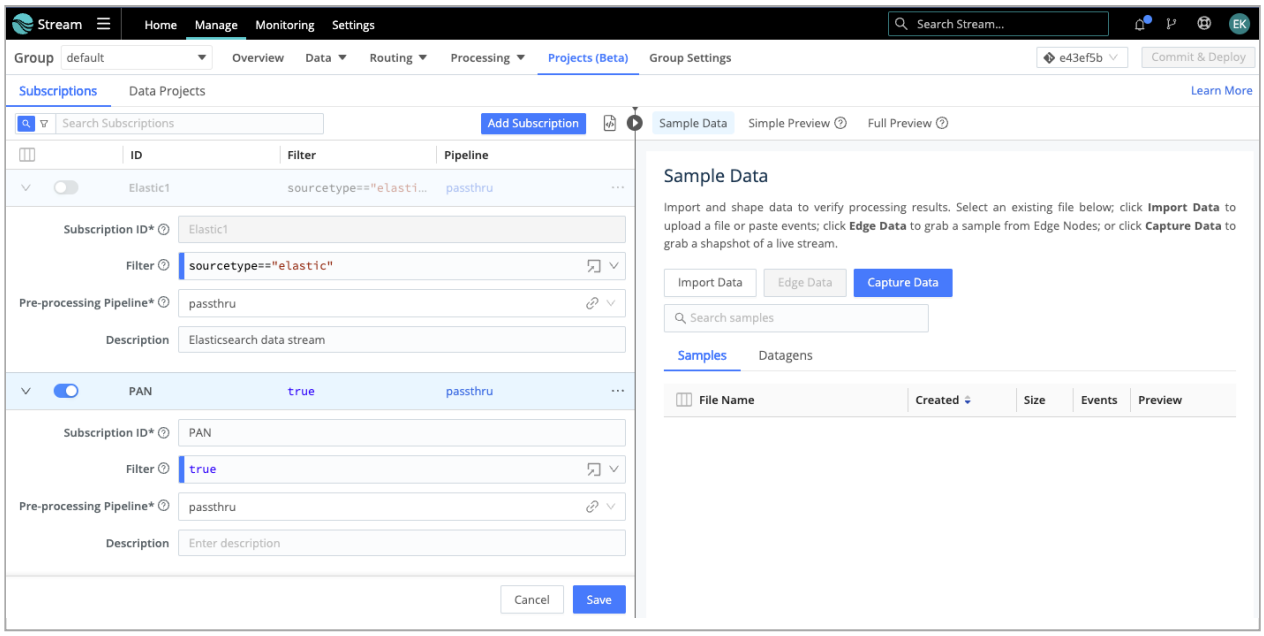

Stacking Subscriptions

Note these further similarities to the Routing table:

- Each Subscription's blue title bar has a slider that you can use to disable the Subscription from gathering data, while preserving its configuration.
- On the right, you can capture, import, and save sample data, and. You can use these samples to preview how your Subscriptions transform incoming data.

Editing a Subscription

To update an existing Subscription, just click its accordion in the Subscriptions table. This will reopen the same configuration options outlined above.

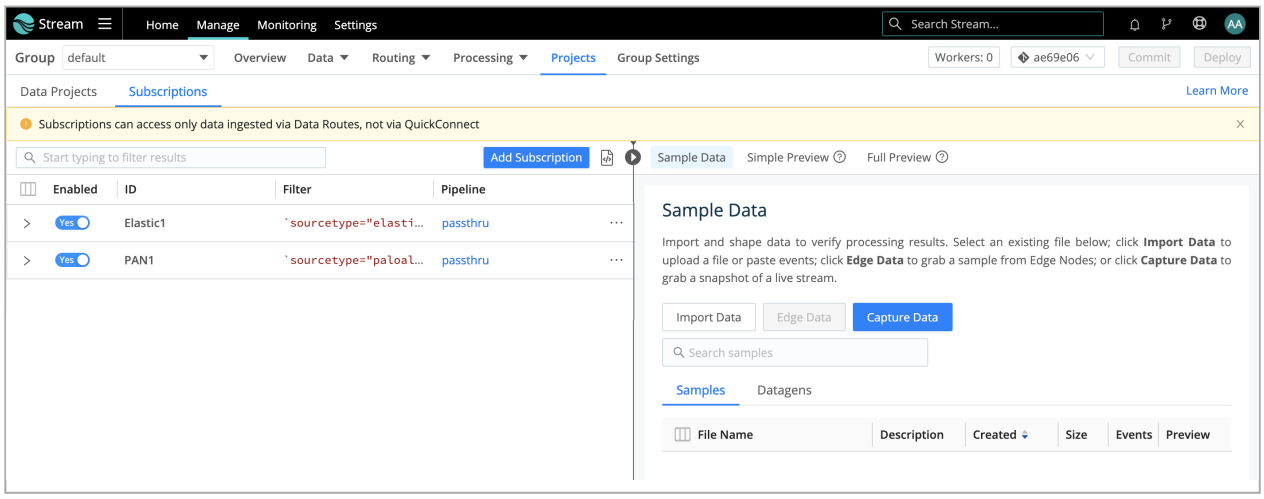

Subscriptions table

2. Cribl.Cloud

2.1. Launch Guide

The fast alternative to downloading and self-hosting Cribl Stream software is to launch Cribl.Cloud. This SaaS version, whether free or paid, places the Leader and the Worker Node in Cribl.Cloud, where Cribl assumes responsibility for managing the infrastructure.

By upgrading to a Cribl.Cloud Enterprise plan, you can implement a hybrid deployment of any complexity. In hybrid deployments, the Leader (the control plane) resides in Cribl.Cloud, while the Workers that process the data (the data plane) can reside in any combination of Cribl-managed Workers/Edge Nodes, on-prem or private cloud instances that you manage, and your data centers.

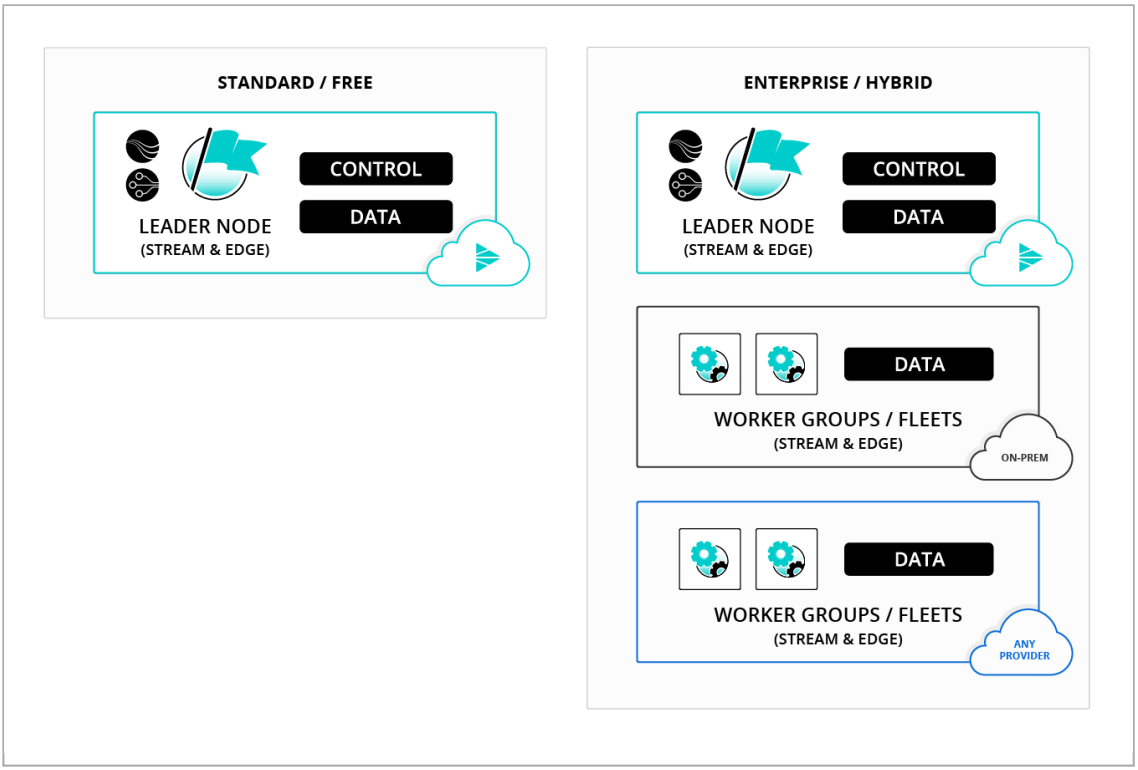

Standard/free versus Enterprise/hybrid deployment

For an overview of additional features available on Enterprise plans, see Pricing.

Why Use Cloud Deployment? (Advantages)

Cribl.Cloud is designed to simplify deployment, and to provide certain advantages over using your own infrastructure, in exchange for some current restrictions (because Cribl will manage some configuration on your behalf):

- Tap Cribl Stream's power, with no responsibility to install or manage software. Cribl.Cloud is fully hosted and managed by Cribl. so you can launch a configured instance within minutes.
- Automated delivery of upgrades and new features.
- Encrypted data at rest (configuration, sample files, etc.) at the disk level for Leader and Cribl-managed Worker instances.
- Free, up to 1 TB/day of data throughput (data ingress + egress) for all new accounts.
- Quickly expand your Cribl.Cloud deployment beyond the free tier's limits by purchasing credits toward metered billing. Pay only for what you use.

Getting Started

Your first step is to sign up on the Cribl.Cloud portal (see Registering a Cribl.Cloud Portal below), to create your Cribl.Cloud Organization.

Your Organization will display a dedicated Portal, a network and access boundary that isolates your Cribl resources from all other users. Each Cribl.Cloud account provisions a separate AWS account. Your instances of Cribl Stream, Cribl Edge, and Cribl Search are deployed inside a virtual private cloud (VPC) in this account.

The Portal will initially be on a **free** Cribl.Cloud plan. Certain throughput and administration limits apply to a free account. When you need more capacity and/or options, it's easy to upgrade to a paid or Enterprise plan – just click the **Go Enterprise** button at the top of your Portal.

> As of November 2022, the Cribl.Cloud Suite is listed on AWS Marketplace. When you're ready for a paid plan, you can use your Enterprise Discount Program (EDP) credits here to run Cribl products, billed through your AWS account – with no need for a separate procurement process.
>
> As of June 2022, Cribl completed its SOC 2 (Service Organization Control 2) Type II security compliance attestation.

About Cribl Stream (and This Document)

If you're new to Cribl Stream, please see our Basic Concepts page and Getting Started Guide for orientation. The current topic focuses on a Cloud deployment's differences from other deployment options – referred to below as "Cribl Stream binaries" or "customer-managed deployments."

Cribl.Cloud always runs in distributed mode – see Simplified Distributed Architecture below for details.

Registering a Cribl.Cloud Portal

Ready to take the red pill? The next few sections explain how to register and manage a Cribl.Cloud instance.

First, if you haven't already signed up on Cribl.Cloud:

1. Start at: https://cribl.cloud/signup/
2. Select the **New User? Free signup** option, and register with your work email address.
3. Use the verification code from Cribl's email to confirm your registration.
4. On the **Create Organization** page, optionally enter an **Organization Name** (a friendly alias for the randomly generated ID that Cribl will assign to your Organization).
5. Select an AWS Region to host your Cribl.Cloud Leader and Cribl-managed Workers. Cribl currently supports either the `US West (Oregon)` or `US East (Virginia)` Region.
6. Bookmark your Cribl.Cloud portal page, for all that follows.

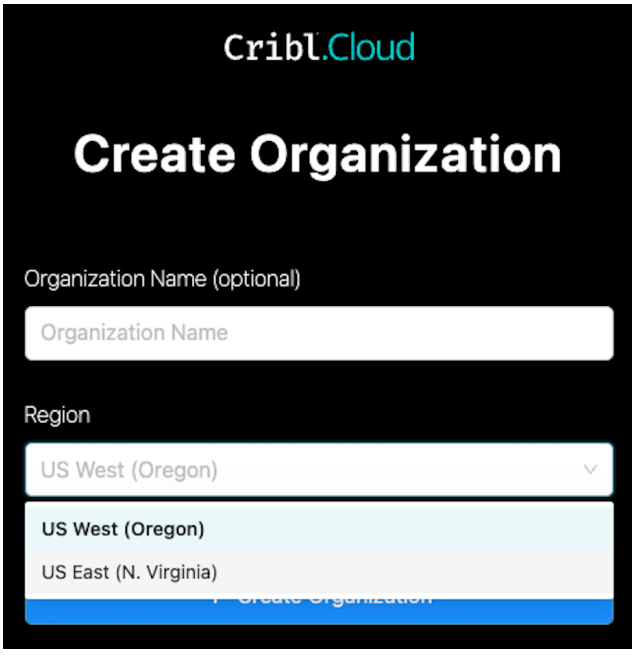

Create Organization page – selecting a host Region

Note that each user can register only one active Organization. For details, see notes on Member Permissions.

Troubleshooting Resources

> Cribl University's Troubleshooting Criblet on How to Log Into Cribl.Cloud walks you through the whole registration and login flow. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Troubleshooting Criblets and Advanced Troubleshooting short courses.

Select Organization Page

When you own or are a member of multiple Cribl.Cloud Organizations, the **Select Organization** splash page – displayed after you sign in – enables you to select which Organization you want to work with.

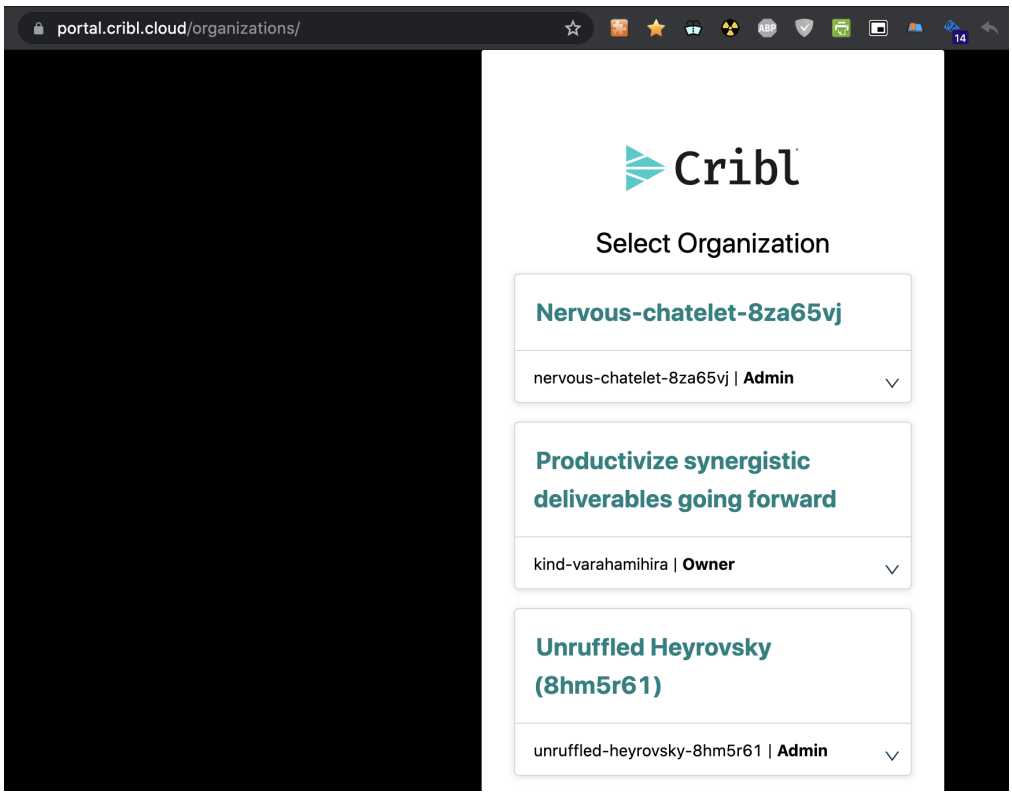

Select Organization interstitial page

Click any tile's \/ accordion to reveal a detailed description, if provided. Click the appropriate tile (or its open accordion's **Dashboard** button) to configure that Organization.

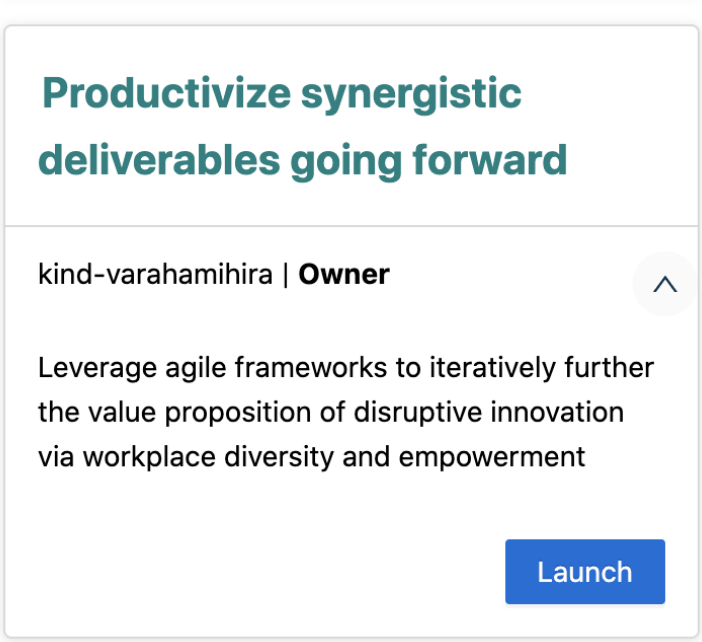

Organization tile's details and controls

You can click **Leave** if you want to remove yourself as a member of another owner's Organization. This option requires confirmation – proceed only if you're sure! (You won't see this button on Organizations that you own.)

Exploring the Cribl.Cloud Portal

Now that you're here – explore the furniture. The Cribl.Cloud portal's top navigation allows you to navigate among the following pages/links:

- Portal (**Cribl.Cloud** logo)
- Messages
- Learning
- Software
- Account (including Organization details)

Portal Page (Cribl.Cloud Logo)

When you log into the Cribl.Cloud portal, you'll land here. The main events here are the **Manage Stream**, **Manage Edge**, and **Explore [Search]** buttons. Click these to launch (respectively) Cribl Stream, Cribl Edge, or Cribl Search in a new tab.

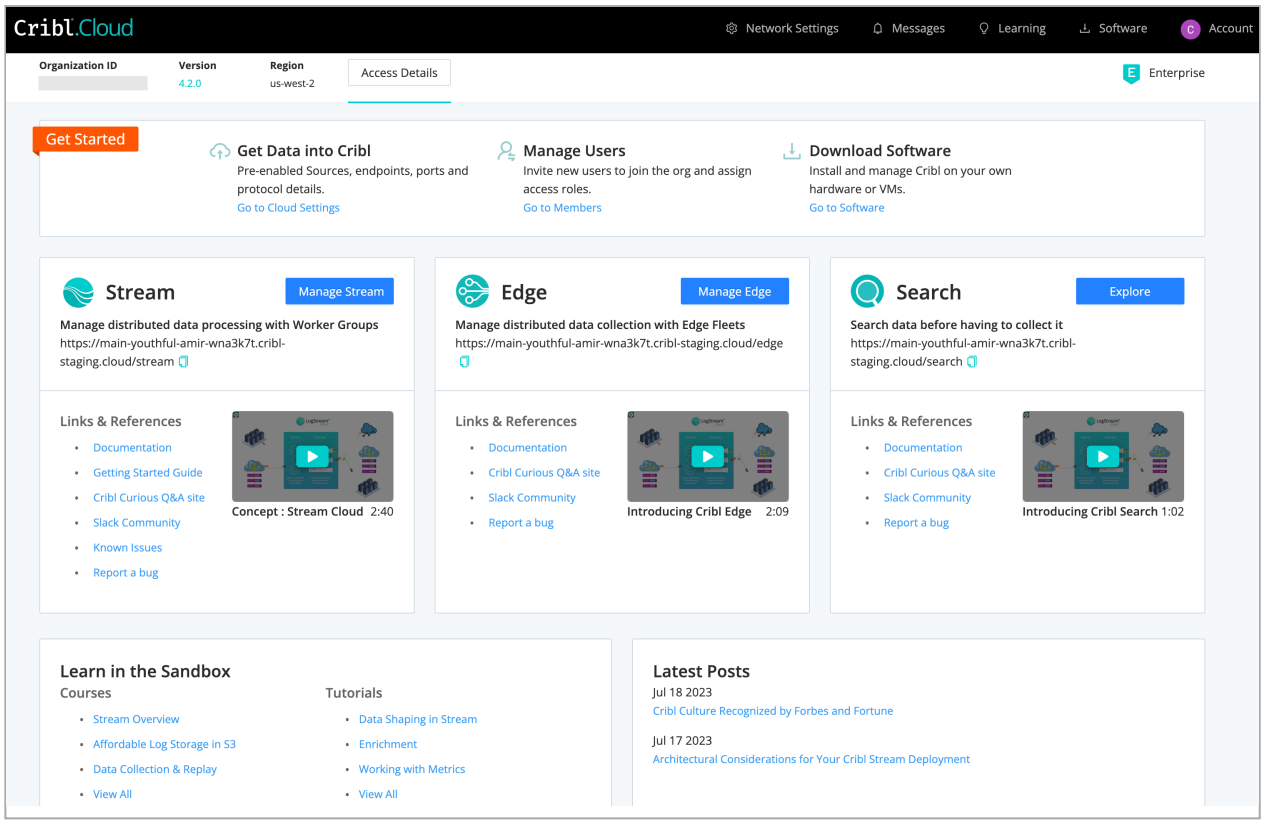

Cribl.Cloud portal

However, the surrounding page offers lots more useful information:

- On the page body, you'll find links to multiple Cribl resources – documentation, support (Community Slack and bug reporting), free Sandbox training, and blog posts.
- In the Overview strip just below the top black menu, you'll find detailed configuration information about your Cloud Organization.
- By clicking the top nav's **Network Settings** link, you can check and manage connectivity details – data Sources, access control, and trust relationships – for your Cribl-managed Cloud Workers.

Overview Strip and Access Details (Group Details) Modal

From left to right, this upper strip displays the following config details:

Org ID: Domain at which you access the associated Cribl.Cloud Organization.

Version: The version of Cribl Stream/Edge applications deployed to your Organization and its Cribl-managed Workers.

Region: The AWS Region where you're running Cribl applications. (Cribl.Cloud currently supports either the **us-west-2** or **us-east-1** Region.)

Access Details: Click this button to open a modal whose right column provides a consolidated, read-only display of the following **Stream Worker Group Details**. Some of these options are configured on different tabs, as noted below.

- **Worker Group**: Use this drop-down to select any Group of Cribl-managed Workers that you've configured (including `default`). The remaining fields on the right will display details specific to that Group.
- **Provision Now**: This button will replace all the fields listed below when a Group is dormant. Click the button when you're ready to provision infrastructure for the Group. After a lag, the Group will be ready to process data, and this modal's remaining fields will populate.

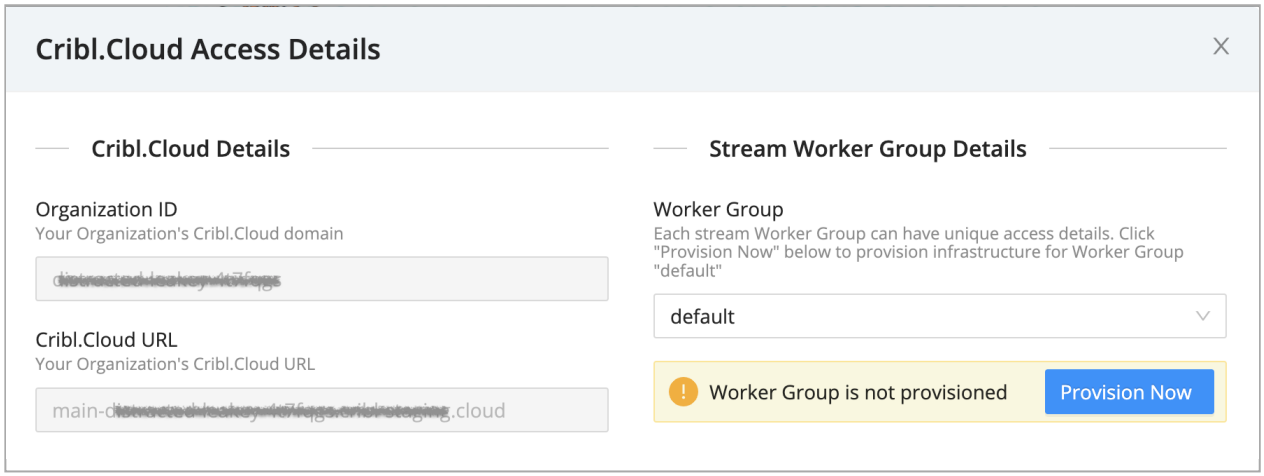

Access Details modal for an unprovisioned Group

- **Trust**: Role ARN for Workers in this Group. You configure these ARNs on the Trust Tab.
- **Ingress IPs**: The IPv4 ingress addresses associated with your Cribl.Cloud Organization's endpoints. These addresses will remain constant, so you can build firewall rules around these addresses.
- **Public ingress address**: Each Group's domain for inbound data. This address prepends the Group name to the Organization's global domain name. It does not append ports per data type – you can obtain these from the Data Sources tab.
- **Egress IPs**: Your Cribl.Cloud Organization's current public IP addresses. These addresses are Group-specific and also dynamic: Cribl will occasionally update them when we need to rescale core infrastructure. Cribl.Cloud currently does not offer static egress IPs.

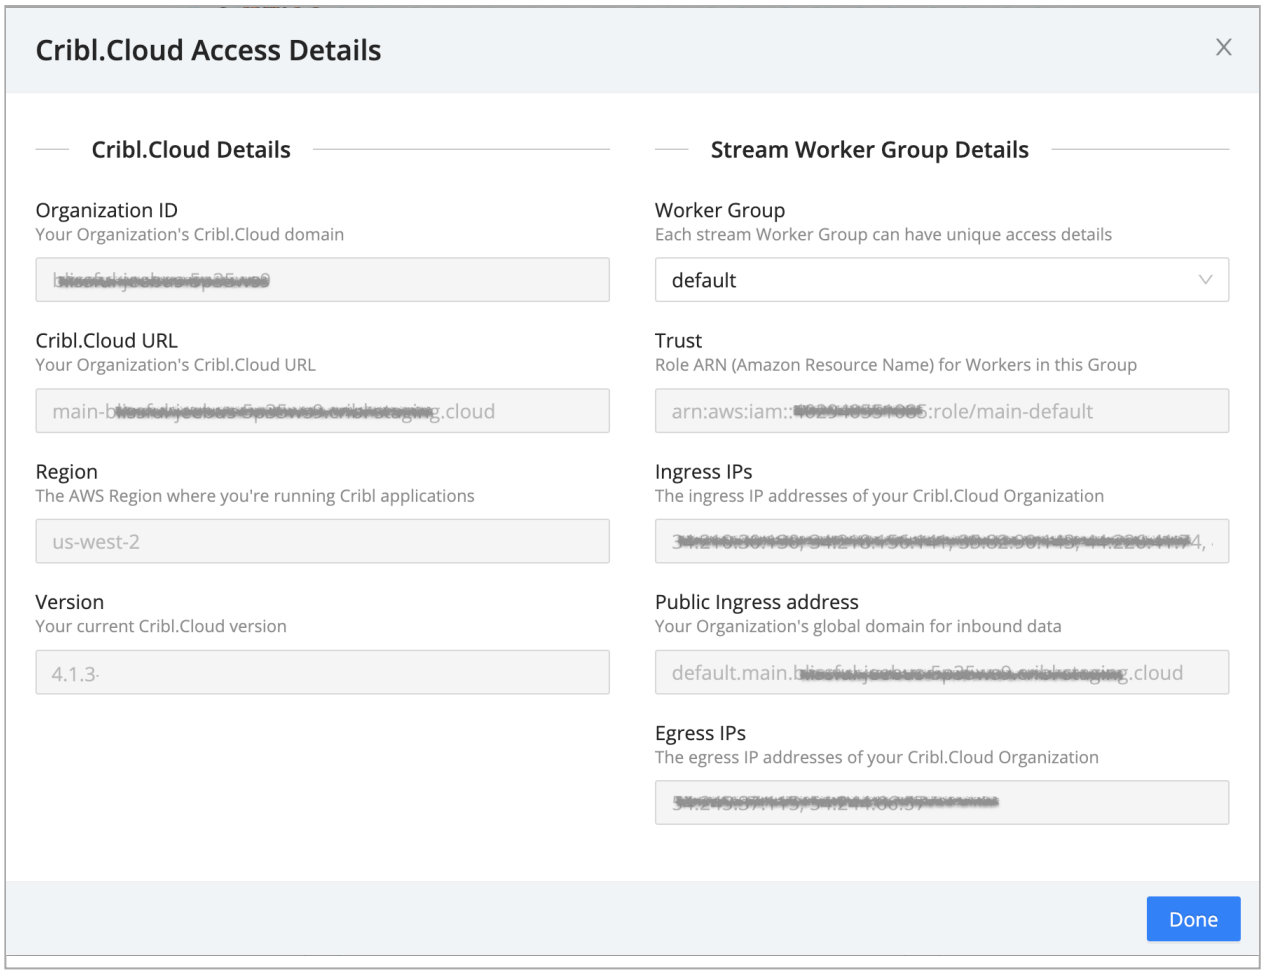

Access Details modal for a provisioned Group

> Configuring Stream Groups (beyond the `default` Group) requires an Enterprise plan. For details about creating and provisioning Groups, see Cribl.Cloud Worker Groups.
>
> The **Access Details** modal's left side displays Organization-wide access details, including the **Cribl.Cloud URL** of your Org's Leader/control pane. You'd use this URL for certain API calls and certain Collection operations coordinated by the Leader. Use the right-side details to configure data flow through individual Groups.

Network Settings Page

Clicking the top nav's **Network Settings** link opens a page with connectivity details, spread across three upper tabs: **Data Sources**, **ACL**, and **Trust**.

Data Sources Tab

The **Data Sources** tab lists ports, protocols, and data ingestion inputs that are open and available to use. Use the **Group** drop-down to filter these details per Group of Cribl-managed Workers in the Stream app. Return to

this tab to copy Ingest Addresses (endpoints) as needed. For details, see Available Ports and TLS Configurations.

Trust Tab

The **Trust** tab provides **Worker ARN**s (Amazon Resource Names) that you can copy and paste to attach a Trust Relationship to an AWS account's IAM role. Use the **Group** drop-down to display the ARN for any Group of Cribl-managed Stream Workers.

Attaching a Trust Relationship enables the `AssumeRole` action, providing cross-account access. For usage details, see the AWS Cross-Account Data Collection topic's **Account B Configuration** section.

> This option applies only to your Cribl-managed Workers. You cannot use this technique to enable access to hybrid Workers on customer-managed Cribl Stream instances.

ACL Tab

This **Access Control List** defines Rules (IPv4 CIDR ranges) to restrict data sent to your data sources. The Rules you define here are global to all your Cribl-managed Groups of Stream Workers.

The default `0.0.0.0/0` rule (modifiable) imposes no limits. Click `+` to add more rules, or click `X` to remove rules. End a rule with `/32` to specify a single IP address, or with `/24` to enable a whole CIDR block from `x.x.x.0` to `x.x.x.255`.

Click **Save** after adding, modifying, or removing rules. Each change takes up to 5 minutes to propagate. Cribl.Cloud will display an `ACL update in progress...` banner, notifying you that rules edits are temporarily disabled to prevent conflicts. A successful update proceeds silently – you will not see a confirmation message.

> The **ACL** options apply only to your Cribl-managed Workers. You cannot use this technique to set access rules on hybrid Workers running in customer-managed Cribl Stream instances.

Cribl Stream UI Access

Clicking the **Manage Stream** or **Manage Edge** button opens (respectively) your Stream or Edge Leader in a new browser tab. All of the application's Cloud-supported features are available from this landing page.

Messages Drawer

Clicking the top nav's **Messages** link opens the **Message Center** right drawer. Here, you will find Cribl.Cloud status and update notifications from Cribl, with **Unread** messages above the **Read** group.

Learning Page

Clicking the top nav's **Learning** link opens the **Learning** page, which provides links to everything you need to learn about Cribl Stream in order to goat forth and do great things:

- Sandboxes (free, interactive tutorials on fully hosted integrations).
- Documentation.
- Product and plans overview (pricing comparison).
- Cribl events (including future and archived Webinars).
- Concept/demo videos.

Software Page

If you prefer to take the blue pill, this page offers download links for Cribl Stream, Cribl Edge, and AppScope software. You can download either binaries or Docker containers (hosting Ubuntu 20.04), to install and manage on your own hardware or virtual machines.

Account Menu

This menu offers a self-explanatory **Sign Out** link, and an **Organization Selection** submenu (fly-out) that works like the Select Organization page: click its links to traverse to other Organizations. For an Organization's owner only, it also includes a link to the Organization page.

Account tab

Organization Page

Displayed only to an Organization's owner, this page offers Details, Members, and (where applicable) Billing and SSO tabs along its top.

Details Tab

The **Organization** > **Details** tab offers these controls to make your Cribl.Cloud deployment more recognizable than its randomly generated **Organization ID** (displayed at the top):

Alias: Optionally, enter a "friendly" name for your Organization. Upon signing in, members will see this alias above the Organization ID on the Select Organization page.

Description: Optionally, use this field to add further details about your Organization. On the Select Organization page, members can view these details by expanding the Organization's tile.

Opt in to beta features: If displayed, this toggle enables access to new options that Cribl has not yet made generally available. As with all beta features, expect some instability in exchange for advancing to the cutting edge of your Cloud.

Click **Save** to immediately apply your changes.

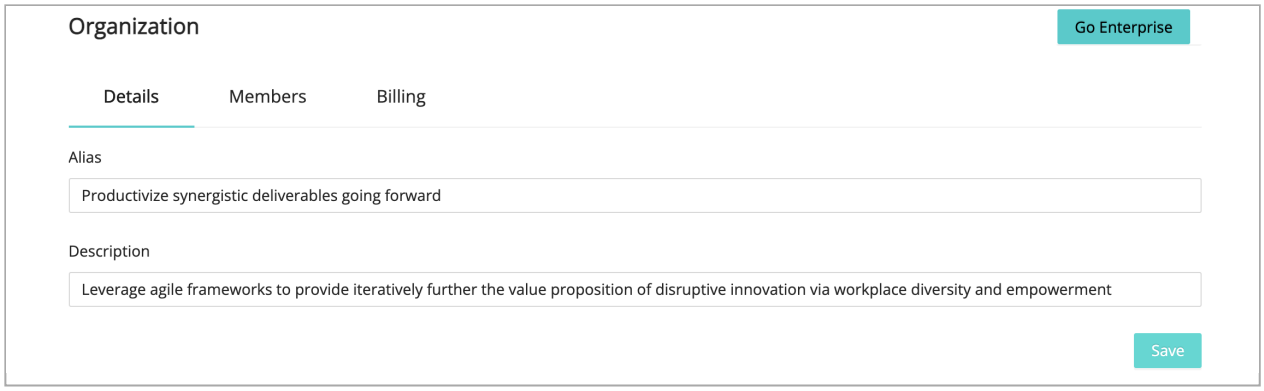

Organization Details tab

Members Tab

The **Organization** > **Members** upper tab provides access to inviting and managing other users.

Billing Tab

The **Organization** > **Billing** upper tab is displayed only to owners of an Organization on a paid license plan. It provides Plan and Usage left tabs.

Plan & Invoices Tab

The **Plan & Invoices** left tab displays a mercury bar of purchased, used, and available **Credits** on your account. Color-coding breaks down usage by infrastructure versus processing (data throughput).

Below that is an expandable **Plan** details section. Expandable **Monthly Usage History** rows offer details about your credits usage in the current and prior months. Here, you can break out usage on Cribl Search, on hybrid Workers (ingest billing only), and on Groups of Cribl-managed Workers (with ingest versus infrastructure breakouts per Group).

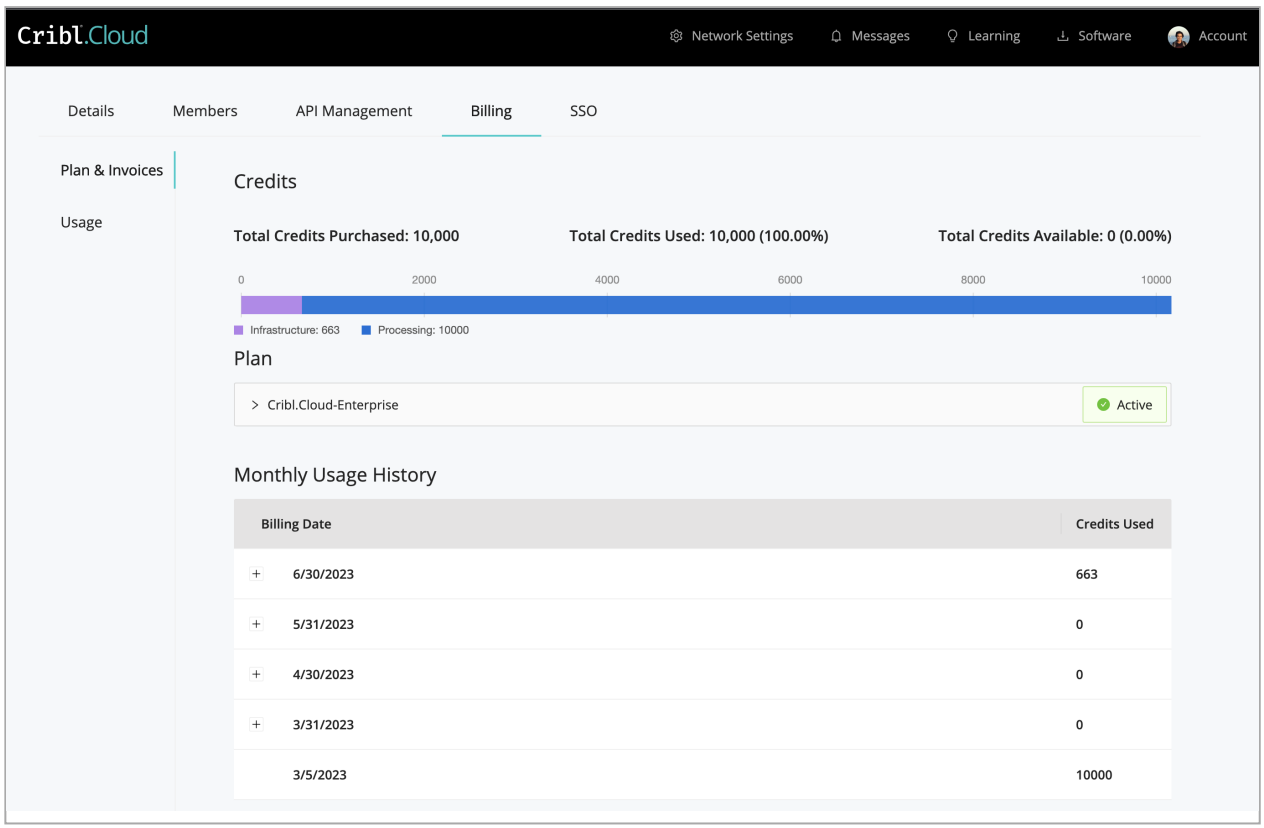

Billing > Plan & Invoices tab

> Credits carry over across billing periods, as long as you renew your Cribl.Cloud plan.

Usage Tab

The **Usage** left tab provides nested tabs for **Stream** versus **Search**. (If you're keeping tabs, this is a third level of selectable tabs.)

The **Stream** tab graphs credits usage for **Data in**, **Data out**, and **Infrastructure** over a selectable trailing period of 7 days to 1 year. The trend line shows daily averages, and you can hover over data points to pop out details.

At the right side of each graph is a total for the selected period. On the left drop-down, you can filter the aggregate display down to individual Cribl-managed Groups, or to all hybrid Groups.

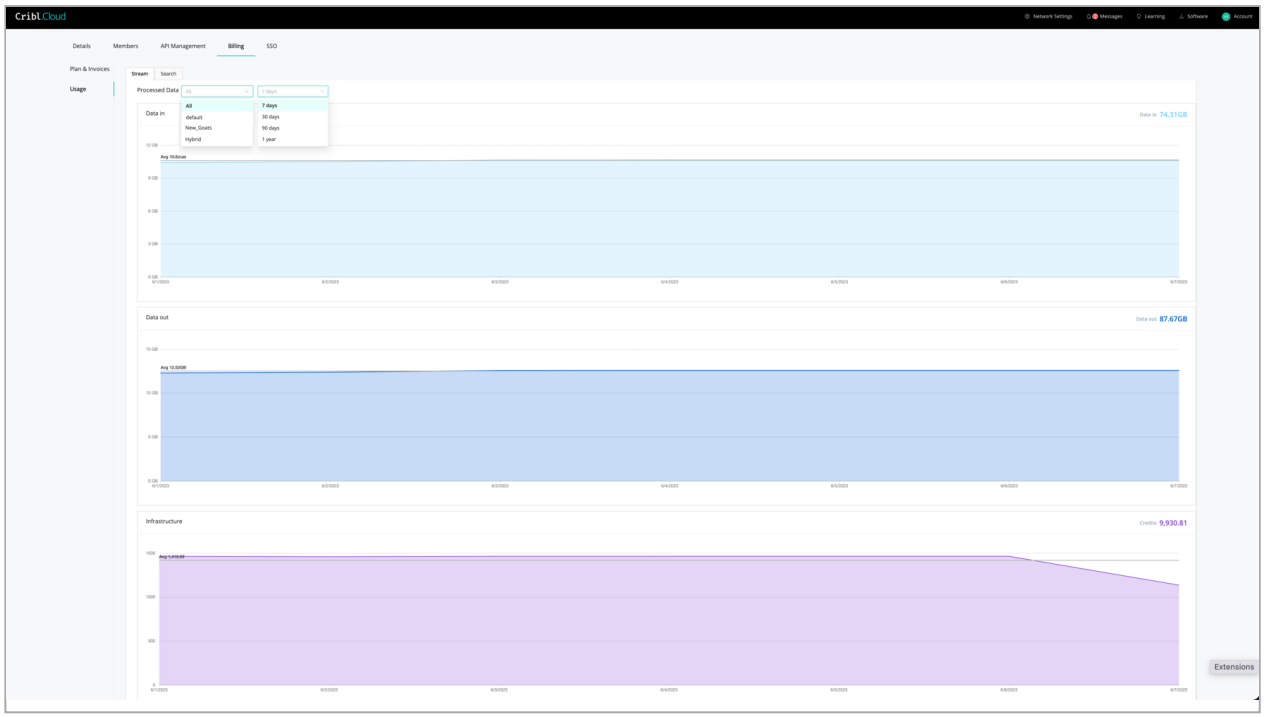

Billing > Usage tab

The **Search** tab displays billed compute CPU hours. It provides a similar graph, with averages over time and a total per period. You'll find the same options for time granularity.

SSO Tab

This tab appears on an Enterprise plan, enabling you to configure federated authentication to your Cribl.Cloud Organization from an OIDC or SAML identity provider. For details, see Cribl.Cloud SSO Setup.

Managing Cribl.Cloud

Once you've registered on the portal, here's how to access Cribl.Cloud:

1. Sign in to your Cribl.Cloud portal page.
2. Select the Organization to work with.
3. From the portal page, select **Manage Stream**, **Manage Edge**, or **Explore [Search]**.
4. The selected application's UI will open in a new tab or window – ready to goat!

Note the **Cribl.Cloud** link at the Cribl.Cloud home page's upper left, under the **Welcome!** message. You can click this link to reopen the Cribl.Cloud portal page and all its resources.

Cribl.Cloud link takes you back to the portal

Inviting and Managing Other Users

From the **Organization** > **Members** tab, an Organization's owner can invite new users to join the Organization, assign access Permissions to new and existing members, remove pending invites, and remove existing members.

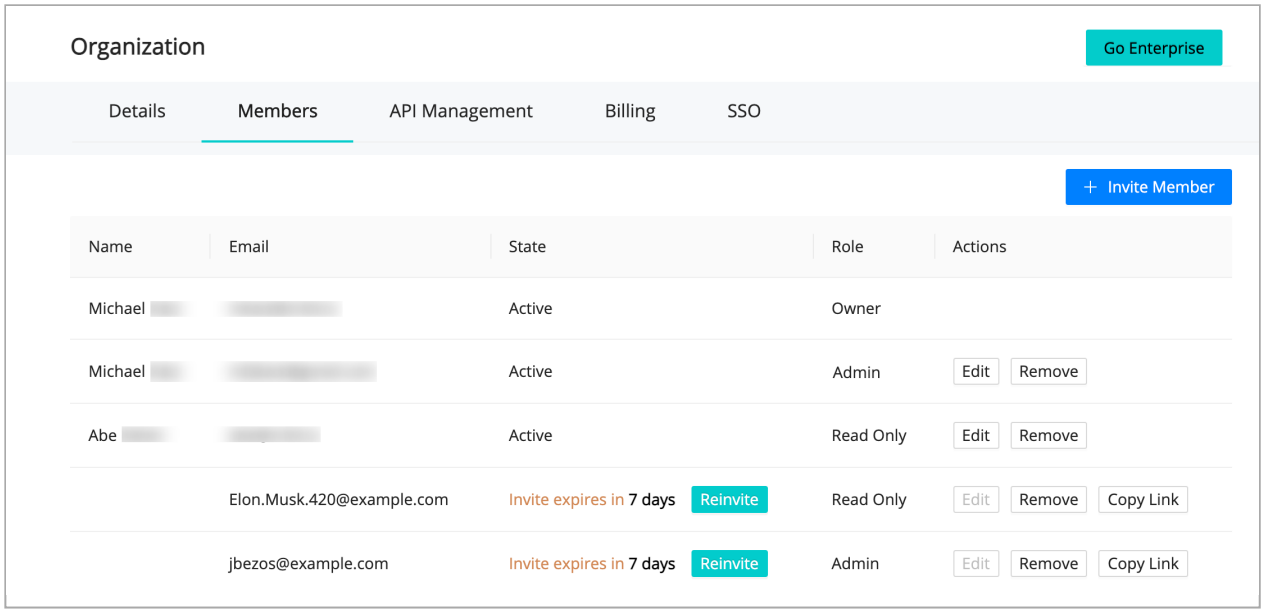

Organization > Members tab: Managing Invites and Members

Inviting Members

Click **Invite Member** to open the modal shown below. Enter the **Email address** of the new user you want to invite, assign them appropriate **Permission** on your Organization (explained just below), and then click **Invite** to send the invitation.

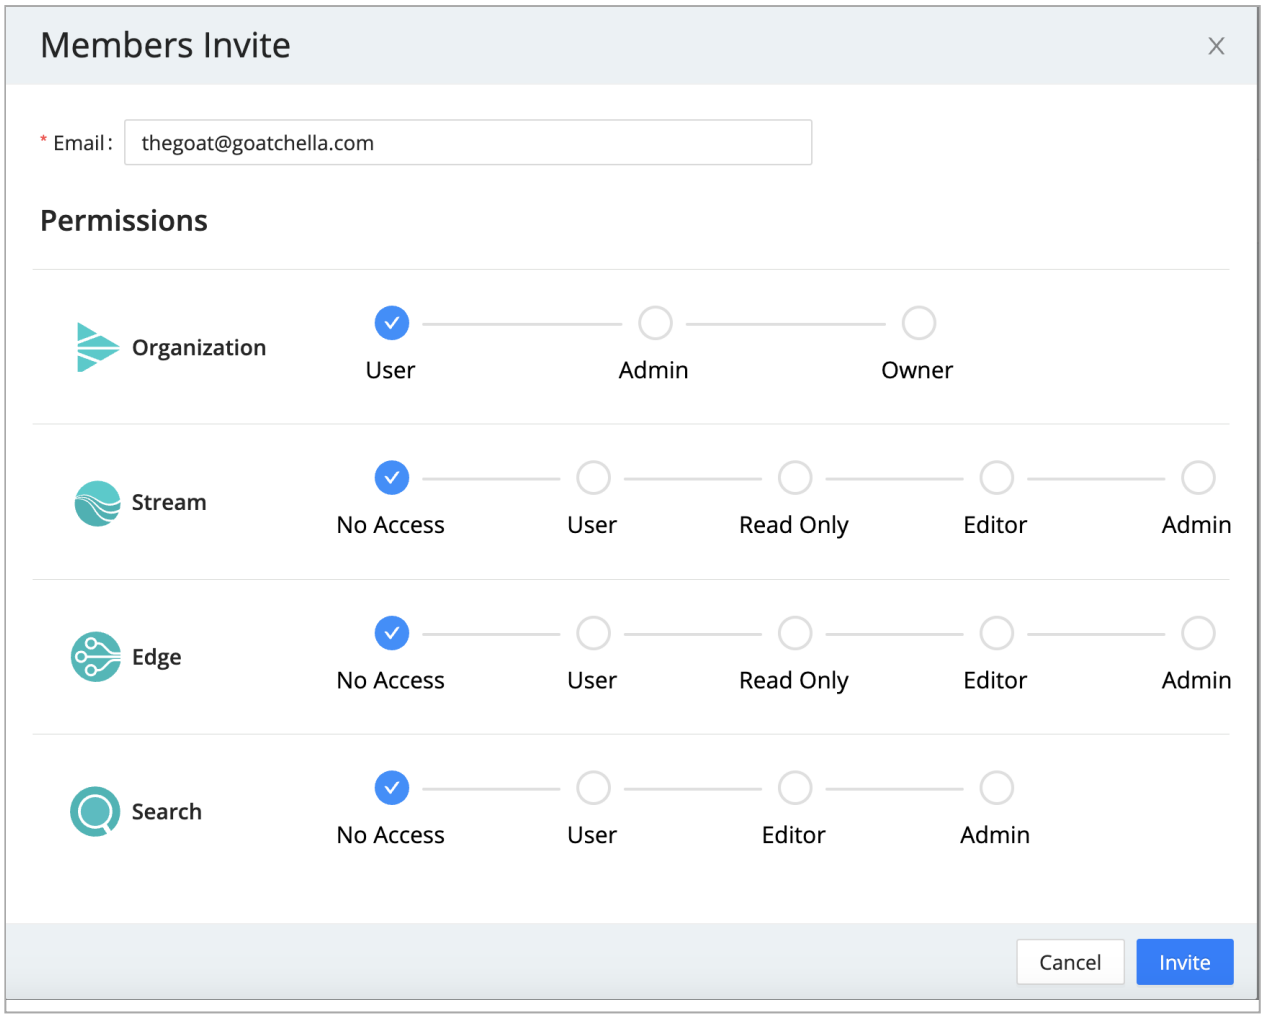

Invite User modal

Organization Member Permissions

Newly configured Members start out with the permissions they were granted when they were invited at the Organization level, as well as the self-explanatory **No Access** Permission on each product. An Organization's Owner can assign the following Permissions at the Organization level.

> For Permissions that you can assign at the lower product, Worker Group, and resource levels (with an Enterprise plan), see our Members and Permissions topic, which also covers on-prem counterparts to the Cribl.Cloud Organization-level Permissions listed here.

PERMISSION	DESCRIPTION
User	The lowest level of access. At the Organization level, gets the Member into the system, allows them to update their own Member profile, and allows them to view (but not configure) any Stream Worker Groups they have been given access to.

PERMISSION	DESCRIPTION
Admin	This Permission grants the `Read Only` Permission on all Products, plus the ability to view and execute Leader commits, and the ability to view and modify Global Settings.
Owner	This is a superuser Permission. An Owner can manage Organization Members, update their own Member profile, manage ACLs (Access Control Lists), view and update SSO settings, view Data Sources and Trust Policies, view and update Organization Details, delete an Organization, manage API Credentials, view and manage Cribl Suite Global Settings, view and manage (provision, update, and delete) Stream Worker Groups, view and execute Leader commits, and view the Org's Billing dashboards. Owners also get **Admin** access on all products.

Note that:

- Without an Enterprise plan, a Cribl.Cloud Organization's Owner can assign only the `Owner` or `Admin` Permission to other users. (For all available Enterprise features, see Pricing.)
- An Enterprise plan is also required for expanded Permission-based access control – i.e., the ability to manage Permissions on individual products, Worker Groups, and resources.
- Only an Organization's Owner can manage the Organization's Details tab.
- An Organization's Owner Permission can be shared among multiple users. (Among other use cases, this provides a way to gradually transfer primary ownership.) Also, a user can be invited to the Owner Permission on multiple Organizations.
- However, each user – as defined by their email address – can register only one active Organization, and only if they are not already the Owner of a different Organization.
- You assign Permissions per individual user, when you invite them to your Organzation. Cribl.Cloud does not currently support globally predefining or assigning group Permissions, as with on-prem Cribl Stream. However, Owners can change users' Permissions after those users join their Organization.
- Cribl.Cloud has retired the access-management model of Local Users and Roles/Policies that Cribl applications used prior to v.4.2. Create and configure only **Members** on Cribl applications – references elsewhere in Cribl docs to Local Users do not apply to Cribl.Cloud.

Responding to Invites

At the address you entered, the new member receives an email with an **Accept Invitation** link to either sign into their existing Cribl.Cloud account, or else sign up to create an account and its credentials.

After signing in, they'll have access to your Organization and Cribl Stream instance at the Permission level you've specified.

Managing Invites

While an invite is pending, the **Organization** > **Members** tab offers you these options to deal with commonly encountered issues:

- **Reinvite**: If your invited member didn't receive your invitation email, you can click this button to resend it.
- **Copy Link**: If emails aren't getting through at all, click this button to copy and share a URL that will take the invitee directly to the signup page. This target page encapsulates the same identity, Organization, and Permission you specified in the original email invite.
- **Remove**: This is for scenarios where you need to revoke a pending invite. (You sent someone a duplicate invite, your invitee is spending too much time in space to be a productive collaborator, etc.) After clicking this button, you'll see a confirmation dialog.

After 7 days, if an invite has been neither accepted nor revoked, it expires. In this case, it is removed from the **Members** tab.

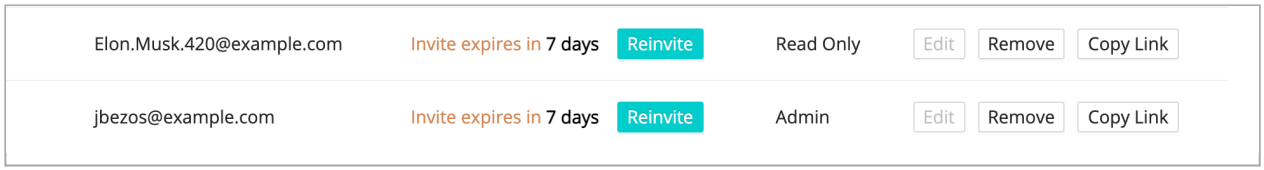

Managing Invites

Managing Members

Once a user has accepted an invite, the **Organization** > **Members** tab offers you these options to modify their membership in your Organization:

- **Edit**: Switch this member to a different Permission. (The **Edit** option is displayed only if you have an Enterprise plan.)
- **Remove**: Remove this member from your Organization. After clicking this button, you'll see a confirmation dialog. (Proceeding will not affect this user's access to any other Cribl.Cloud Organizations they might own or be members of.)

Cloud Pricing

Beyond the free tier, an optional paid Cribl.Cloud account – whether Standard or Enterprise – offers direct support, plus expanded daily data throughput according to your needs. At the top of your Cribl.Cloud portal, select **Go Enterprise** to submit an inquiry about upgrading your free account, and Cribl will respond.

You'll pay only for what you use – the data you send to Cribl Stream, and the data sent to external destinations. However, data sent to your AWS S3 storage is always free. For details, see Pricing.

Differences from Self-Hosted Cribl Stream

A Cribl.Cloud deployment can differ from an on-prem/customer-managed Cribl Stream deployment in the following ways. Keep in mind all these differences as you navigate Cribl Stream's current UI, in-app help (including tooltips), and documentation.

Simplified Administration

Cribl.Cloud has been designed with options to accommodate everyone – from first-time evaluators, to Enterprise customers managing a worldwide network of private-cloud, public-cloud, and/or data-center deployments.

Cribl.Cloud's free offering is designed to help you launch Cribl Stream – and to start processing data – as quickly and easily as possible. Cribl manages many features on your behalf, allowing for a streamlined Settings left nav.

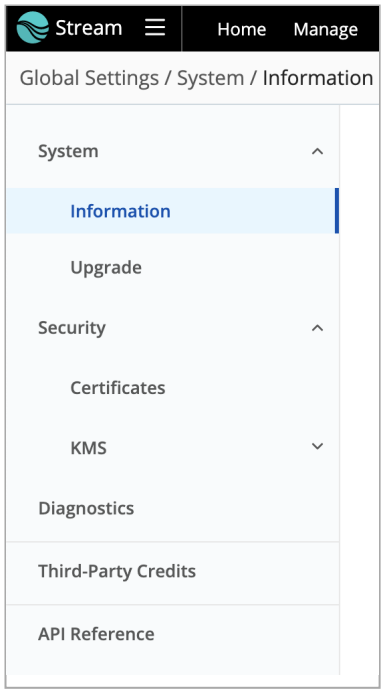

Cribl.Cloud Leader's Global Settings navigation

Below are the key options streamlined out of the free Cloud offering. Bear in mind that upgrading to an Enterprise plan will make many of these options configurable:

Simplified Distributed Architecture

Cribl.Cloud is preconfigured as a distributed deployment for Cribl Stream or Cribl Edge. With a Free or Standard plan, allows only a single Worker Group.

Compared to self-hosted Cribl Stream, the **Settings** > **Worker Processes** and **Settings** > **Distributed Settings** links are omitted.

With an Enterprise plan, Cribl always provides at least two Workers, and will scale up further Workers as needed to meet your peak load. With an Enterprise plan, you also have the option to configure additional hybrid Worker Nodes and Worker Groups.

Git Preconfigured

Without an Enterprise plan, the **Settings** > **Global Settings** > **System** > **Git Settings** section is omitted. A local `git` client is preconfigured in your Cribl.Cloud portal. On Cribl.Cloud's top nav, use the **Global Config** link (branched icon) to commit/push changes to `git`. Select **Deploy** to deploy your committed changes. Cribl.Cloud does not support Git remote repos.

Automatic Restarts and Upgrades

Without an Enterprise plan, the **Settings** > **Controls** and **Settings** > **Upgrade** links are omitted. Cribl handles restarts and version upgrades automatically on your behalf.

Simplified Access Management and Security

In Cribl.Cloud, you can manage access control for your Organization by clicking **Account** > **Organization** and selecting the **Members** tab. The options on this tab will vary depending on your plan.

If you have a Cribl.Cloud Enterprise plan, you can use the Key Management Service (KMS), which maintains the keys Cribl Stream uses to encrypt secrets on Worker Groups and Worker Nodes. Go to **Settings** > **Security** > **KMS** to configure KMS.

If you add an Enterprise Plan, Cloud and hybrid Leaders support Local and Google SSO authentication, along with OpenID Connect (OIDC) and SAML federated authentication. Cribl.Cloud does not currently support LDAP.

Permission- and Role-based access control (RBAC) is simplified in Cribl.Cloud. For details, see Member Permissions.

Transparent Licensing

The top nav's **Settings** > **Global Settings** > **Licensing** link is omitted. Your license is managed by your parent Cribl.Cloud portal, where you can check credits and usage history on the Billing tab.

Other Simplified Settings

Cribl is gradually narrowing the limitations listed in this section, as Cribl.Cloud gains feature parity with on-prem deployments:

- The Script Collector is available only on hybrid, customer-managed Workers. (This feature is currently not available on Cribl-managed Workers.)
- The System State Source is unavailable on Cribl-managed Workers. It is available on Cribl-managed Edge Nodes, however.
- The AppScope Source's **Filter Settings** are unavailable on Cribl-managed Workers. It is available on Cribl-managed Edge Nodes, however.
- The top nav's **Settings** > **Global Settings** > **Scripts** link is omitted from Cribl.Cloud, which currently does not support configuring or running shell scripts on hybrid or Cribl-managed Worker Nodes.
- The File System Collector and Filesystem Destination are available only on hybrid Worker Nodes.
- Persistent Queues can be configured on both hybrid and Cribl-managed Worker Nodes, with an Enterprise plan. On hybrid Worker Nodes, you can freely define the **Max queue size**, based on the disk space you provision. On Cribl-managed Worker Nodes, each Source or Destination's queue is allocated a maximum of 1 GB disk space per Worker Process. (Given this automatic configuration, Cribl-managed Sources and Destinations expose only limited PQ controls.)
- File-based Destinations support staging directories only on hybrid (not Cribl-managed) Worker Nodes.
- The Tee Function is available only on hybrid (not Cribl-managed) Worker Nodes.

Support Options

At **Settings** > **Diagnostics**, you can generate diagnostic bundles and send them directly to Cribl Support. Currently, you cannot download diags. For all support options, see Working with Cribl Support.

Available Ports and TLS Configurations

To get data into Cribl.Cloud, your Cribl.Cloud portal provides several data Sources and ports already enabled for you, plus 11 additional TCP ports (`20000` - `20010`) that you can use to add and configure more Cribl Stream Sources.

The Cribl.Cloud portal's **Data Sources** tab displays the pre-enabled Sources, their endpoints, the reserved and available ports, and protocol details. For each existing Source listed here, Cribl recommends using the preconfigured endpoint and port to send data into Cribl Stream.

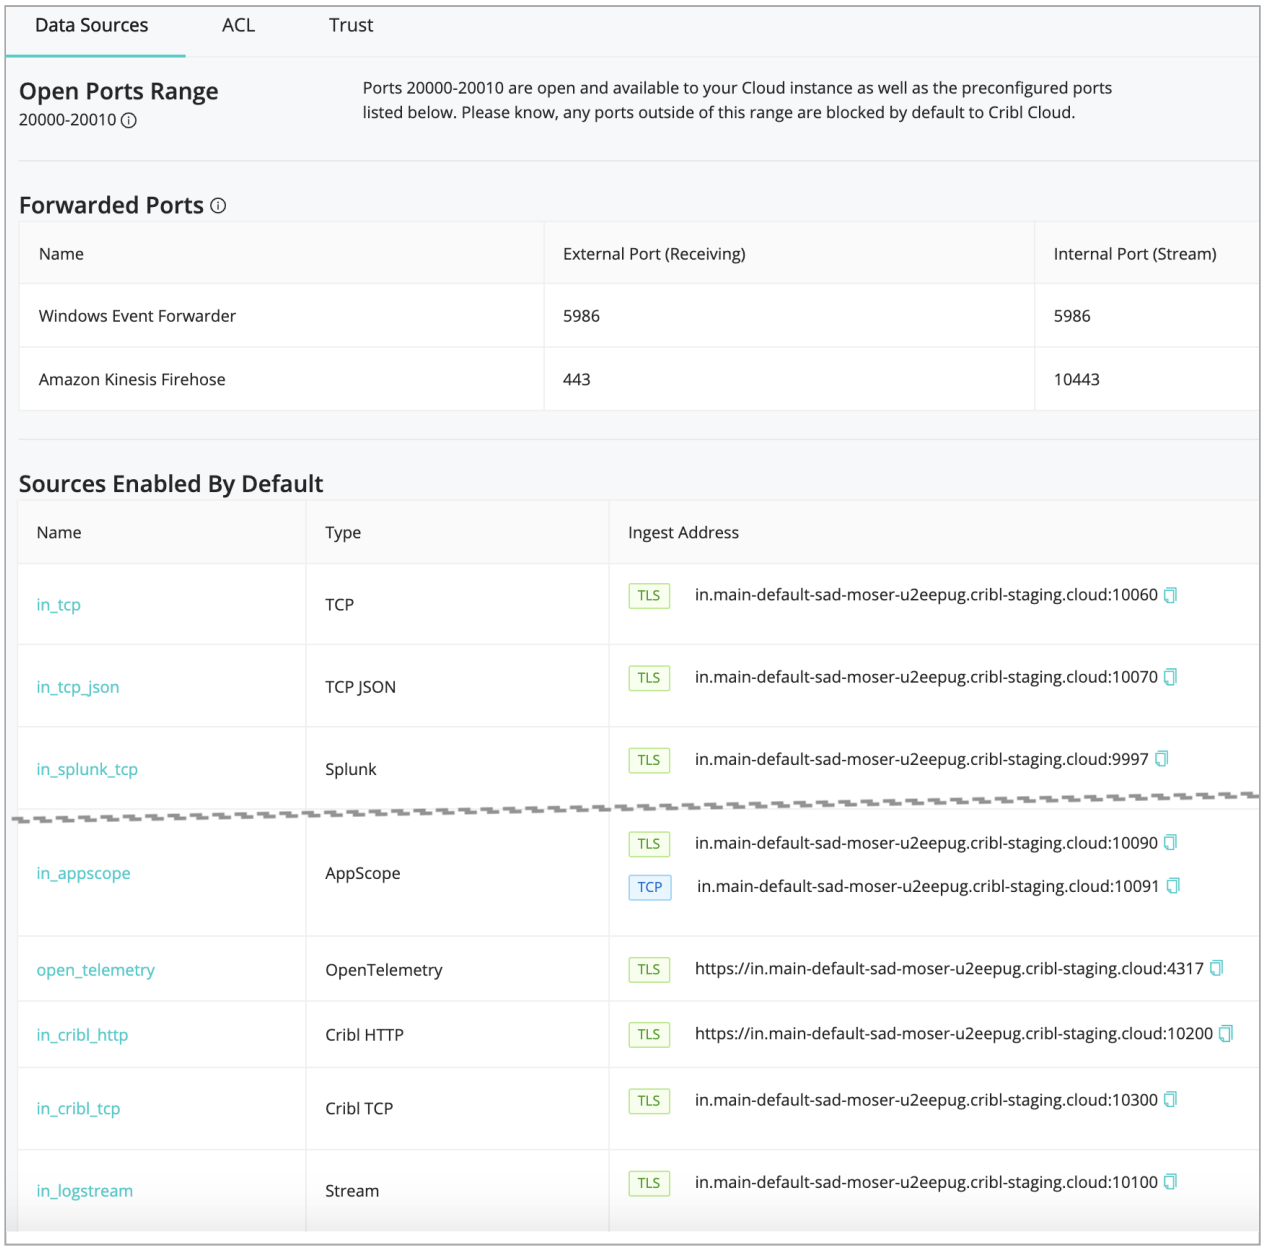

Available ports and TLS certificates

TLS Details

TLS encryption is pre-enabled for you on several Sources, also indicated on the Cribl.Cloud portal's **Data Sources** tab. All TLS is terminated by individual Nodes.

To enable TLS settings for additional Sources, use these configuration settings:

- **Private key path:** `/opt/criblcerts/criblcloud.key`

- **CA certificate path**: `/opt/criblcerts/criblcloud.crt`
- **Minimum TLS version**: `TLSv1.2`

Currently, Cribl.Cloud does not enable you to import your own certificates for mutual TLS authentication. Cribl.Cloud uses TLS to provide encryption in the wire, but leaves authentication at the protocol layer – e.g., Splunk HEC or S2S tokens, Kafka authorization, etc.

> **Cribl HTTP and Cribl TCP Sources/Destinations**
>
> Use the Cribl HTTP Destination and Source, and/or the Cribl TCP Destination and Source, to relay data between Worker Nodes connected to the same Leader. This traffic does not count against your ingestion quota, so this routing prevents double-billing. (For related details, see Exemptions from License Quotas.)

Simplified Source, Collector, and Destination Configuration

Several commonly used Sources are preconfigured for you within Cribl.Cloud's UI, and are ready to use.

The Exec Source is unavailable on Cribl-managed Workers, but is available on hybrid Workers.

The Cribl Internal Source's CriblLogs option is unavailable in Cribl-managed Stream instances, but it is available in Cribl Edge, and in hybrid Workers' Stream instances. The Cribl Internal > CriblMetrics option is available in all of the above combinations.

> In a preconfigured Source's configuration, never change the **Address** field, even though the UI shows an editable field. If you change these fields' value, the Source will not work as expected.
>
> After you create a Source and deploy the changes, it can take a few minutes for the Source to become available in Cribl.Cloud's load balancer. However, Cribl Stream will open the port, and will be able to receive data, immediately.

Enterprise Cloud

With a Cribl.Cloud Enterprise plan, you have the same options and flexibility as with an Enterprise license for an on-prem Cribl Stream distributed deployment – and more. (See Pricing for comparisons between Cloud plans and on-prem licenses.)

These options include configuring and managing multiple Worker Groups or Fleets, Notifications, Google SSO authentication, and Permission- or Role-based access control to Cribl Stream resources.

For other Enterprise features, see Pricing.

Cribl.Cloud Enterprise also adds:

- Full control of Member Permissions on your Cribl.Cloud Organization.
- The hybrid deployment option, described just below.
- The Leader resides in Cribl.Cloud, with access to diverse Worker deployments. Cribl manages the Leader's availability.

Hybrid Deployment

The diagrams below show the comparative flexibility of a Cribl.Cloud hybrid deployment. The Leader (control plane) resides in Cribl.Cloud, while the Workers that process the data can be in any combination of the following environments:

- In Cribl.Cloud, managed by Cribl.
- In public or private cloud instances that you manage.
- On-premises in your data centers.

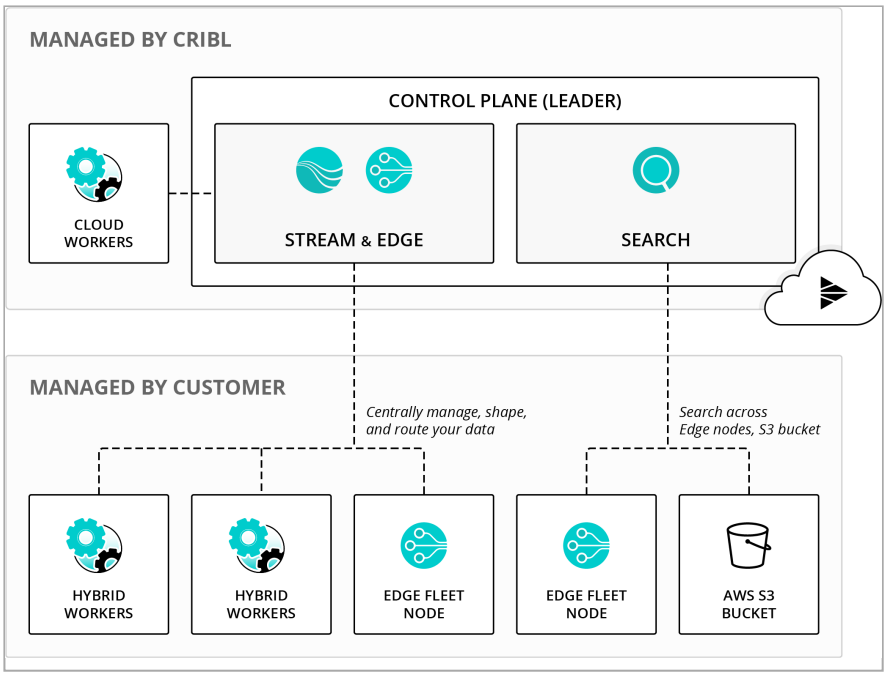

Enterprise hybrid deployment, with control plane and Cribl-managed Workers in Cribl.Cloud

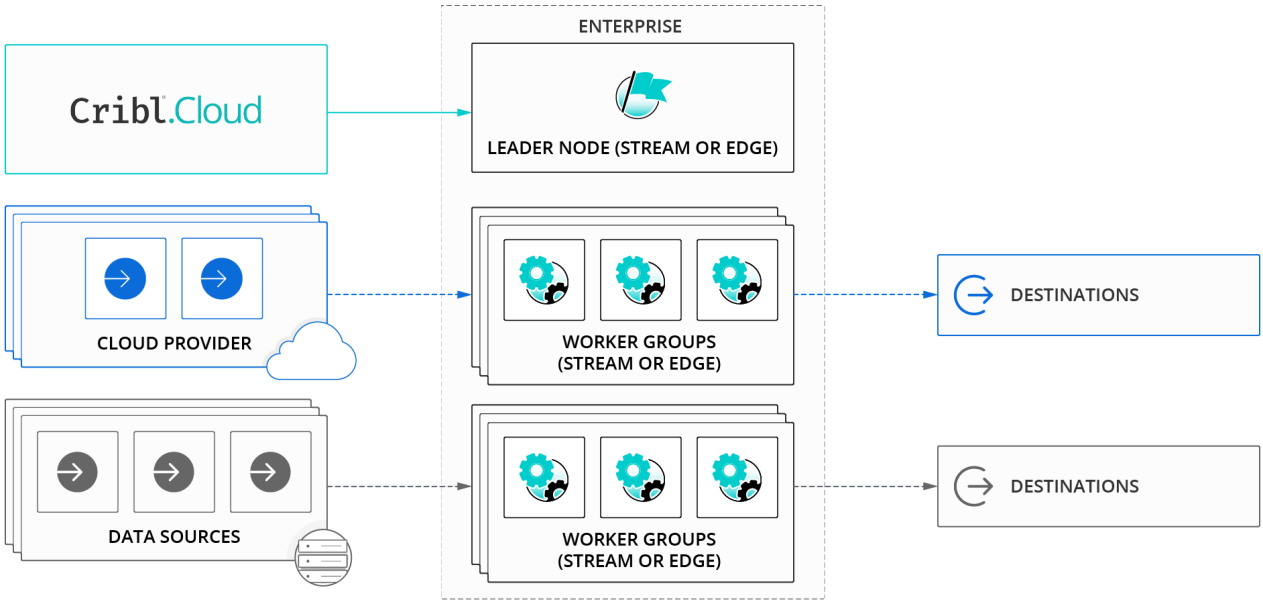

Enterprise hybrid deployment, with only control plane in Cribl.Cloud

As the footprint of your operations grows or changes, this flexibility makes it easy to reconfigure Cribl Stream in tandem. You can rapidly expand Cribl Stream observability into new cloud regions – and replace monitored hardware data centers with cloud instances – all while maintaining one centralized point of control.

You can also add Workers or Edge Nodes, and reassign them to different Worker Groups, by easily auto-generating stream or Edge command-line scripts within Cribl Stream's UI.

Hybrid Requirements

A hybrid deployment imposes these configuration requirements:

- Hybrid Workers (meaning, Workers that you deploy on-prem, or in cloud instances that you yourself manage) must be assigned to a different Worker Group) than the Cribl-managed `default` Group – which can contain its own Worker Nodes.
- All Worker Nodes' hosts must allow outbound communication to the Cribl.Cloud Leader's port 4200, to enable configuration and workload management by the Leader.
- On all Worker Nodes' hosts, firewalls must allow outbound communication on port 443 to the Leader, and on port 443 to https://cdn.cribl.io.
- All Worker Nodes require connectivity to https://cdn.cribl.io/telemetry/. For details on testing this connectivity, on the metadata transmitted to Cribl, and on how we use that data, see Telemetry Data.
- If this traffic must go through a proxy, see System Proxy Configuration for configuration details.
- To verify your Leader's Region and public URL, open the Access Details modal.

Note that you are responsible for data encryption and other security measures on Worker Node instances that you manage.

Adding (Bootstrapping) Workers

To add Workers to your Cloud hybrid deployment, Cribl recommends that you use the script outlined in Bootstrap Workers from Leader. Hosts for the new Workers must open the same ports (4200 and 443) listed in Hybrid Requirements.

You have three options for generating the script, outlined in these subsections of the Bootstrap topic linked above:

- Auto-generate it from the Leader's UI.
- Make a `GET` API request to the Leader.
- curl the same API request.

> In Cribl Edge, you access all these bootstrap options via the Manage Edge Nodes page's **Add/Update Edge Node** control.

Hybrid Cribl HTTP/Cribl TCP Configuration

If you use the Cribl HTTP Destination and Source pair, or the Cribl TCP Destination and Source pair, to relay data between Worker Nodes connected to the same Leader, configuring hybrid Workers demands particular care:

- The Worker Nodes that host each pair's Destination and Source must specify exactly the same Leader Address. Otherwise, token verification will fail – breaking the connection, and preventing data flow.
- Configure hybrid Workers by logging directly into their UI, then selecting **Settings** > **Global Settings** > **Distributed Settings**. Make sure the **Mode** is set to **Managed Worker** or **Managed Edge** (which might require a restart).
- Then select the **Leader Settings** left tab, and ensure a consistent entry in the **Address** field.
- In Cloud hybrid deployments, the Leader's Address format is `main-<your-Org-ID>.cribl.cloud`. When configuring a hybrid Worker, use that format in the **Address** field.

2.2. Cloud SSO Setup

2.2.1. Cribl.Cloud SSO Setup

The pages in this section outline how, with a Cribl.Cloud Enterprise plan, you can set up a Single Sign-On (SSO) integration between your identity provider and your Cribl.Cloud portal. The following pages cover both OIDC and SAML authentication options:

- Common SSO Setup Steps
- OIDC/Okta Setup Example
- SAML/Okta Setup Examples
- SAML/Azure AD Setup Examples
- Final SSO Steps & Troubleshooting

SSO integration requires you to perform certain configuration steps in your identity provider (IDP), and to then submit corresponding information to Cribl. As of Cribl Stream 4.0, you can submit these details directly on your Cribl.Cloud portal's Organization page.

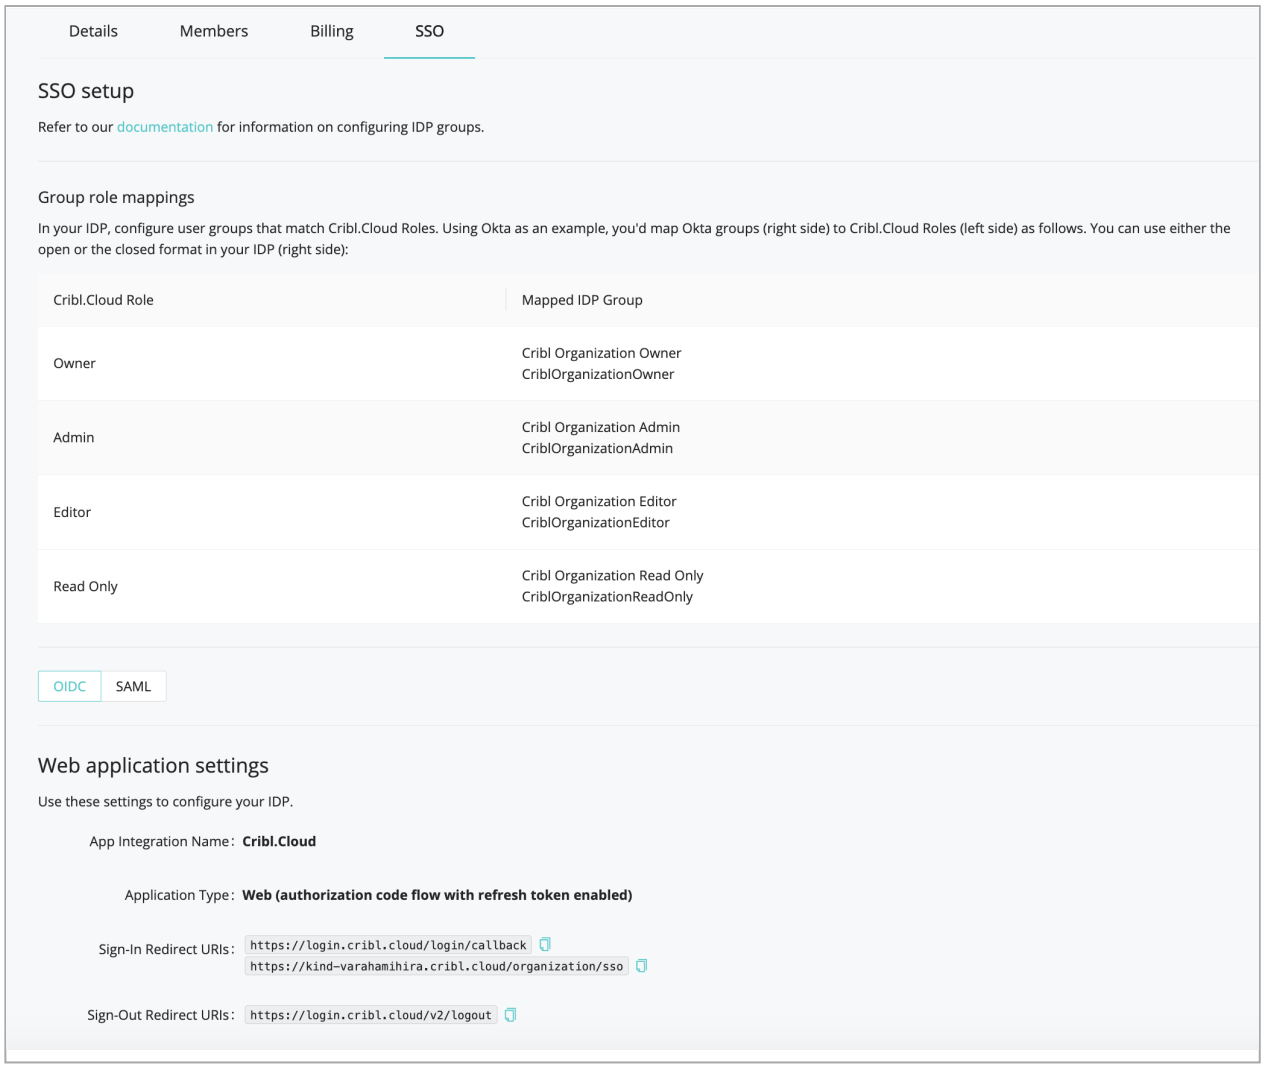

Organization page SSO tab

This section covers both sides of the process. For additional details specifically about integrating Cribl Stream with Okta, see SSO/Okta Configuration.

The general steps to set up a Single Sign-On (SSO) integration between your identity provider and your Cribl.Cloud portal are:

1. Invite at least one SSO admin to your Cribl.Cloud Organization from a fallback, separate email domain.
2. In your identity provider (IDP), configure user groups that map to Cribl.Cloud's four predefined Roles.
3. In your IDP, create an OIDC or SAML application.

> If creating an OIDC application, you must use backchannel authentication. Cribl.Cloud does not support front-channel authentication via OIDC.

4. Submit your app's configuration details to Cribl on your Cribl.Cloud portal's **Organization** page > **SSO** tab. (This will complete your SSO setup on the Cribl side.)

5. In your IDP, assign groups to your users, matching the Role that each group of users should have in Cribl.Cloud.

6. In your IDP, assign the OIDC/SAML app to the Organization's owner, and to other Cribl.Cloud users.

2.2.2. Common SSO Setup Steps

Whether you're configuring Single Sign-On (SSO) via OIDC or SAML, these initial preparation steps are the same.

Set Up Fallback Access

From your Cribl.Cloud Organization, send at least one administrator of your IDP a duplicate member invitation at an email domain that's separate from the corporate domain on which you're configuring SSO. This will ensure backup access if SSO configuration breaks.

Configure Groups

In your IDP, configure user groups that match Cribl.Cloud Roles. Using Okta as an example, you'd map Okta groups (right side) to Cribl.Cloud Roles (left side) as follows.

You can use either the open or the closed format in your IDP (right side). You can also add prefixes or suffixes, as outlined below in Group Configuration Options.

CRIBL.CLOUD ROLE	IDP GROUP NAME
Owner	Cribl Organization Owner /or/ CriblOrganizationOwner
Admin	Cribl Organization Admin /or/ CriblOrganizationAdmin
Editor	Cribl Organization Editor /or/ CriblOrganizationEditor
Read-Only	Cribl Organization Read Only /or/ CriblOrganizationReadOnly

Group Configuration Best Practices

- A Cribl.Cloud Organization's Owner Role can be shared and transferred among multiple users. This facilitates gradual ownership transfers, corporate reorganizations, and other scenarios.
- Those users should be in both the Owner and Admin groups in your IDP.
  (This enables them to acquire all needed permissions across Cribl's two corresponding Roles.)
- Aside from dual-assigning the Owners, you should assign every other user only one group in your IDP.
  (Cribl's Admin and Editor Roles include all the permissions of the Roles below them.)

Group Configuration Options

You can freely add prefixes or suffixes to Group Names that follow the above examples' formats. Cribl will ignore these additions when mapping IDP groups to Cribl Roles. Examples:

- `APP-SIEM-203916-ISRM-CriblOrganizationOwner`
- `CriblOrganizationEditor-420`

Here's an example of how groups configuration (at an early stage) might look in Okta's UI:

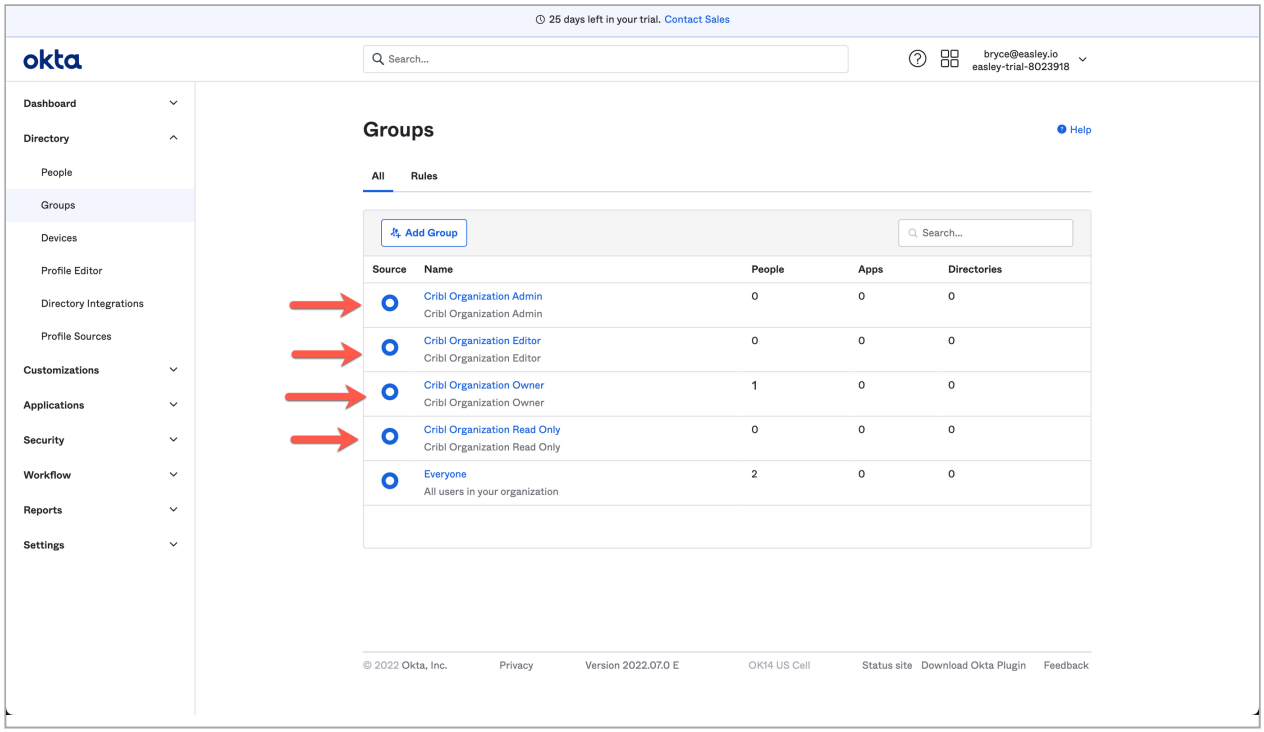

Mapping Okta groups to Cribl.Cloud Roles

2.2.3. OIDC/Okta Setup Example

This page expands on the overview for OIDC, offering a detailed walkthrough with Okta as the example IDP.

> Cribl.Cloud supports only OIDC backchannel authentication, not front-channel.

Create OIDC App Integration

To create your app integration within Okta, start here:

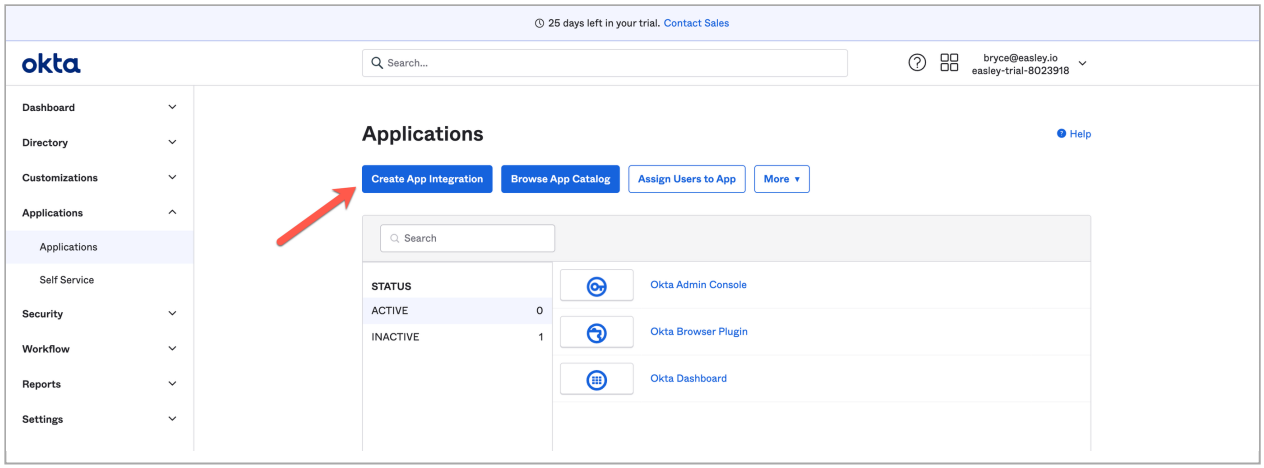

Creating an app integration

Next, configure the app integration with the options below.

- **Sign-in method**: `OIDC - OpenID Connect`
- **Application type**: `Web Application`

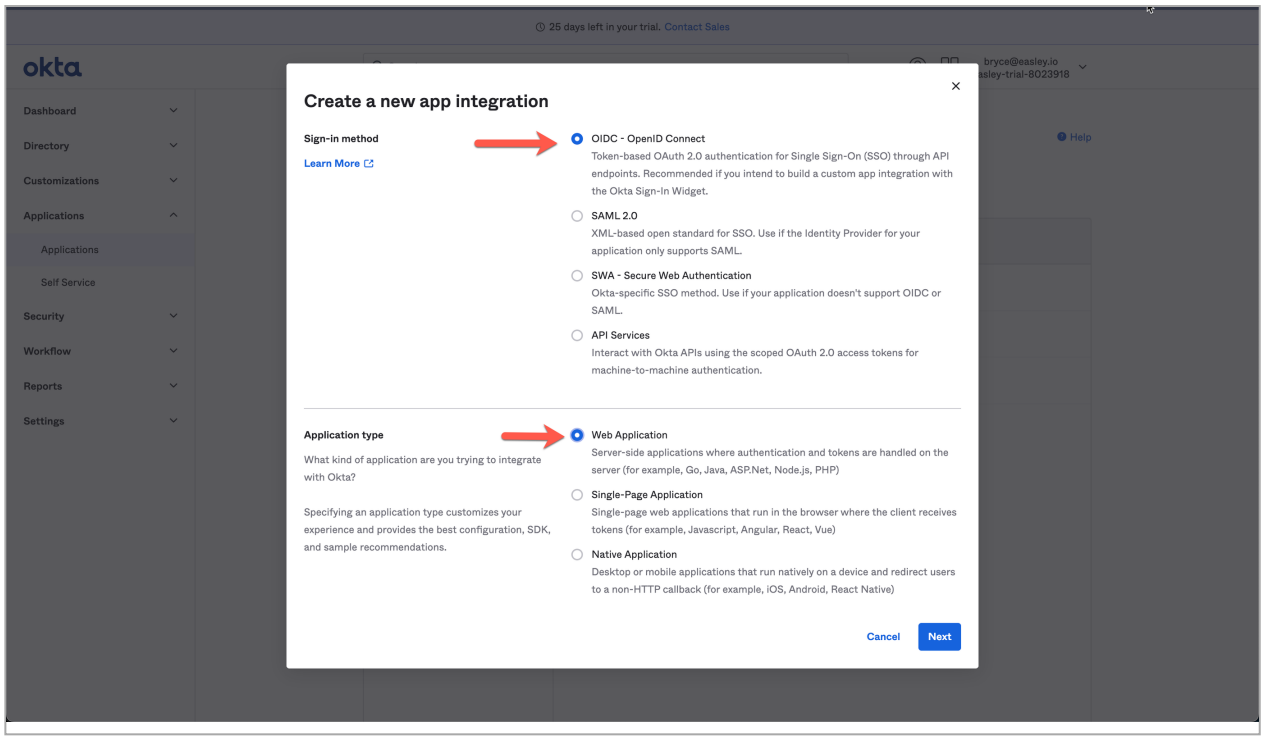

Configuring new Okta app integration

General Settings

Configure the app integration's **General Settings** with the options below.

- **App Integration Name**: `Cribl.Cloud`
- **Sign-In Redirect URIs**: https://login.cribl.cloud/login/callback
- **Sign-Out Redirect URIs**: https://login.cribl.cloud/v2/logout
- **Grant Type**: `Authorization Code, Refresh Token`
- **Scopes**: `openid profile email groups`

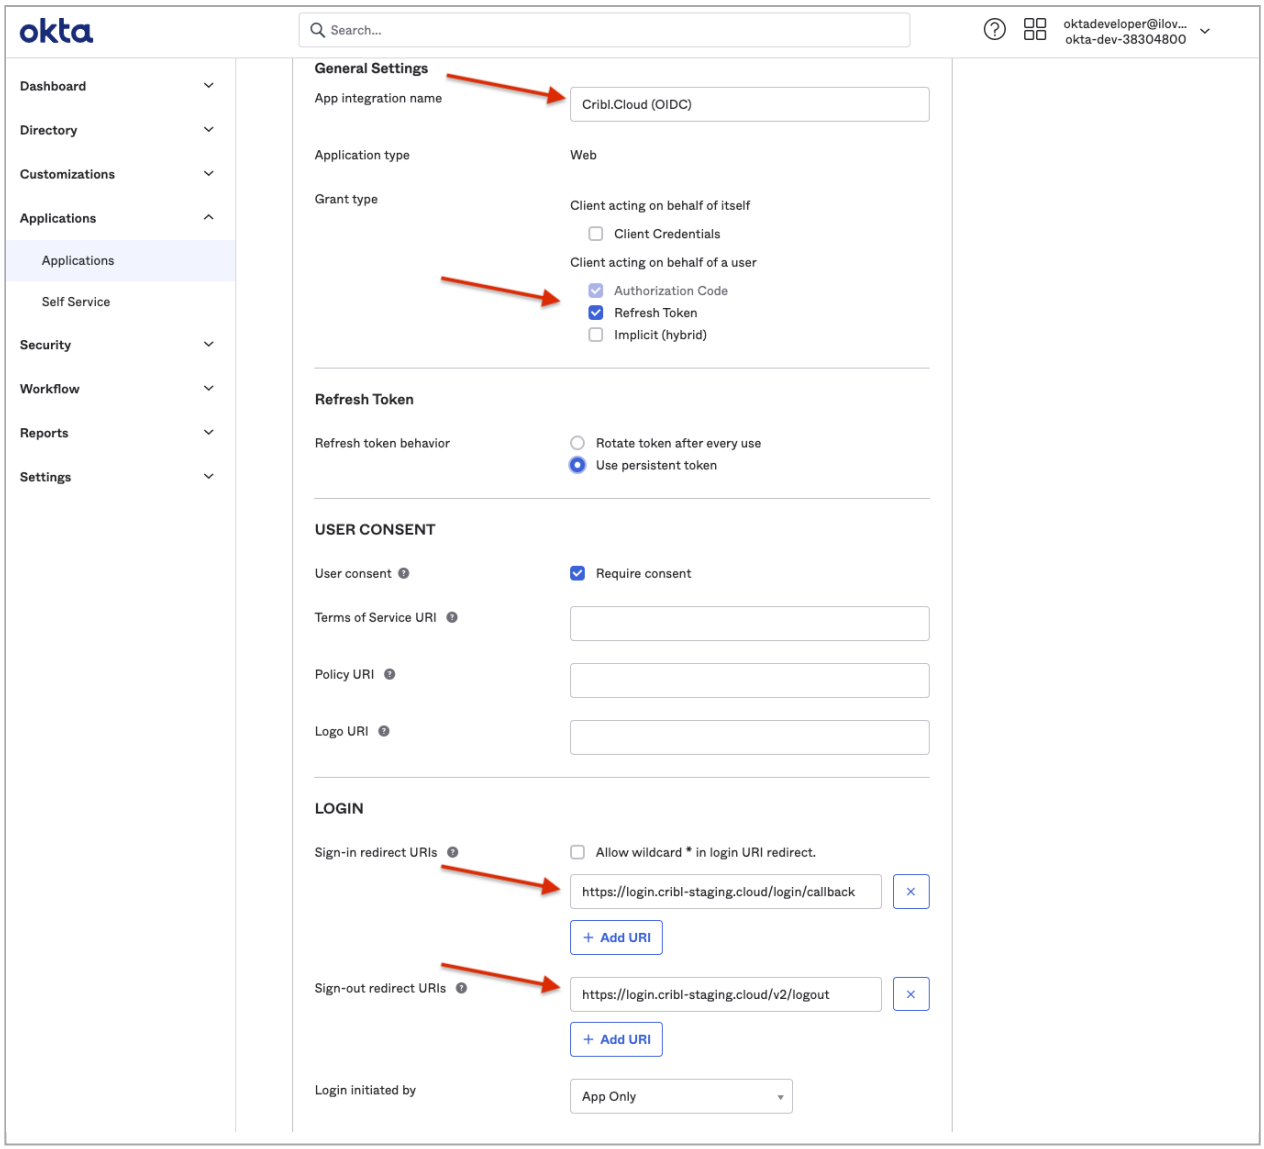

App integration name and URIs

If your IDP is PingOne, you must also configure this (non-Okta) option:

- **Authentication Options**: `Allow Client Secret`

Assignments

Configure the **Assignments** pane with the options below.

- **Controlled access**: `Limited access to selected groups`
- **Selected groups**: <The groups you mapped in Configuring Groups>

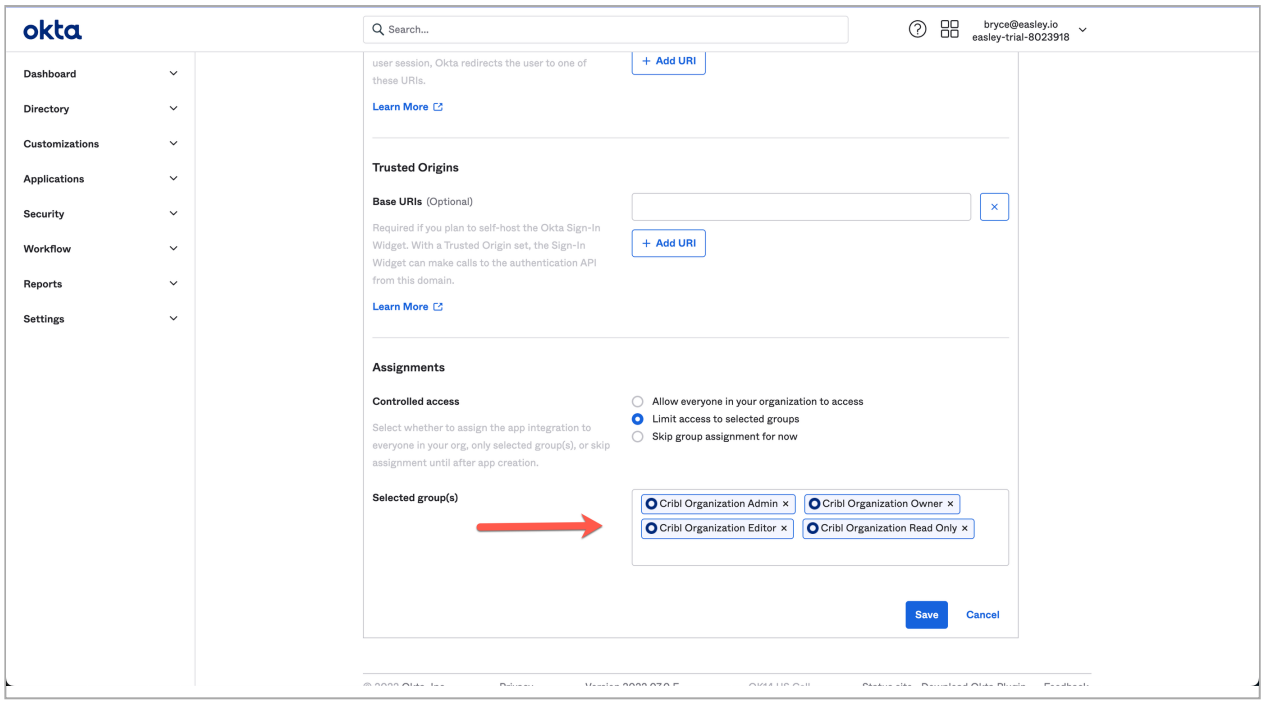

Assignments configuration

Sign-On Tab

Edit the **OpenID Connect ID Token** section, as shown here:

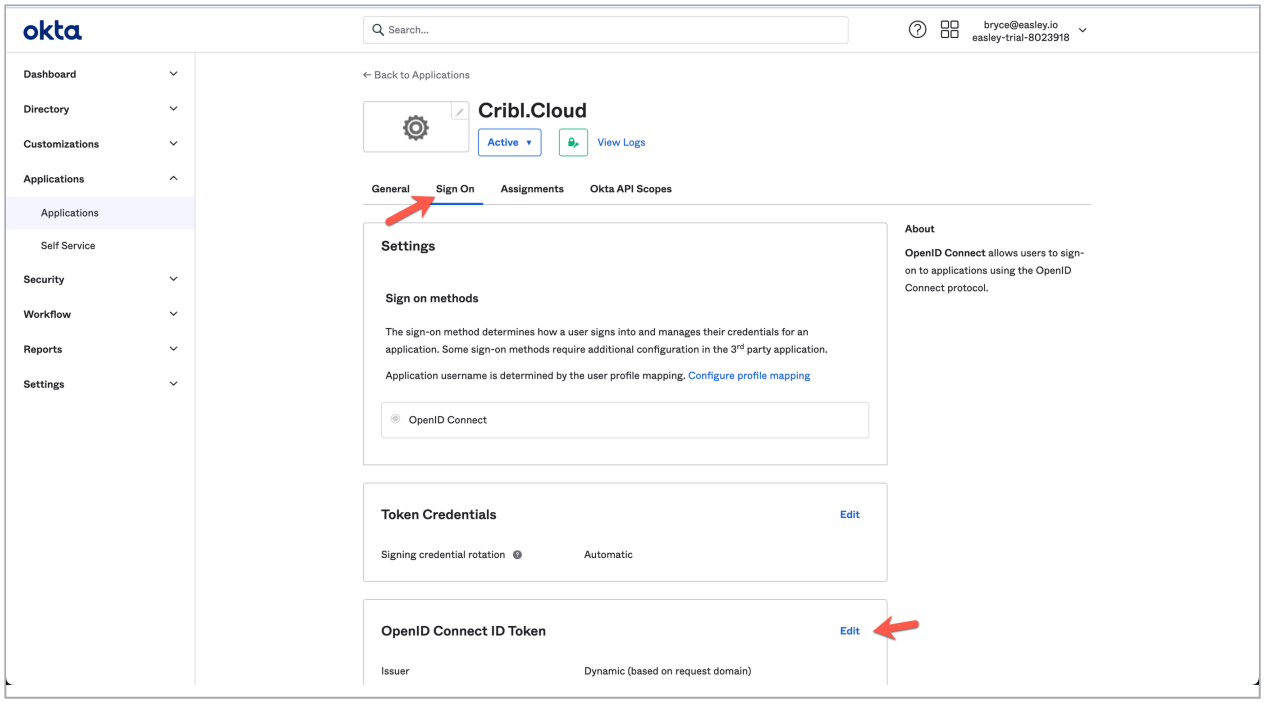

Sign-On tab's Settings/Tokens sections

Set the **Groups claim filter** to: `groups : Starts with : Cribl`, as shown below:

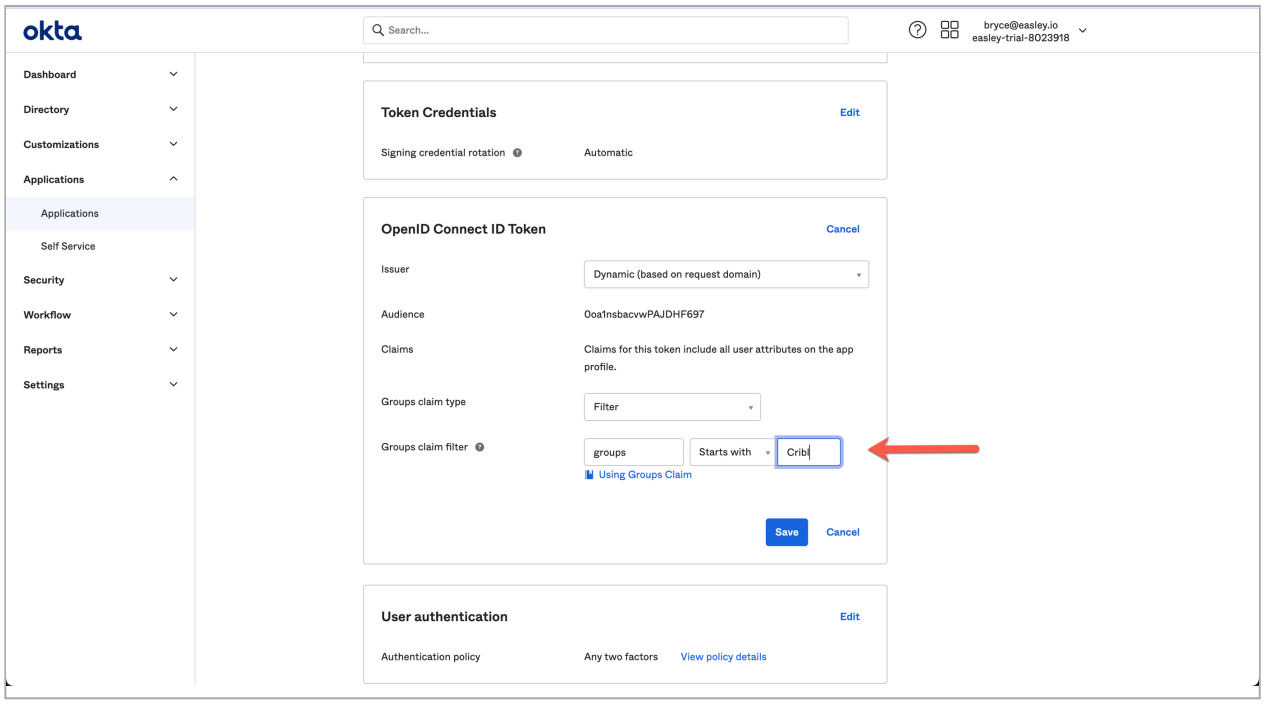

OIDC token: configuring Groups claim filter

Change the **Issuer** from `Dynamic` to `Okta URL`, to get the **Issuer URL** to provide to Cribl in the next section:

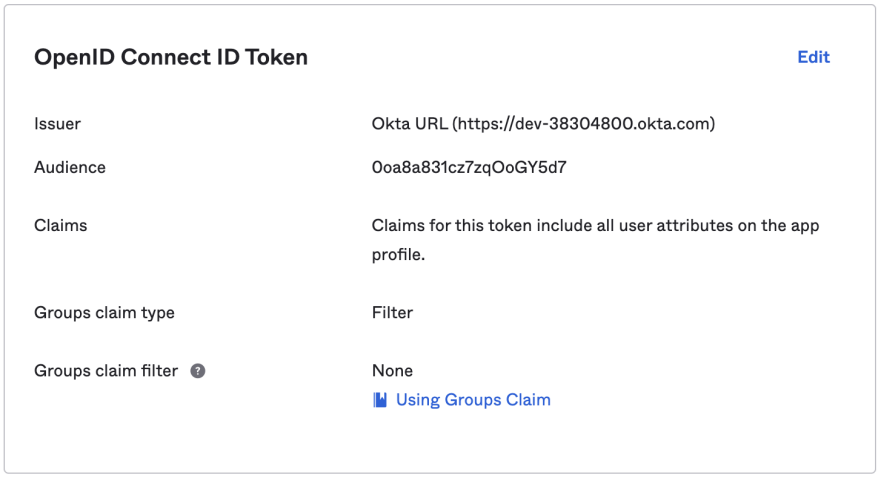

OIDC token: obtaining Issuer URL

Submit Your App Info to Cribl

This concludes the setup you need to do in Okta (or other IDP). Next, provide Cribl essential details about your application, to implement SSO setup on the Cribl side.

On your Cribl.Cloud portal's Organization page > **SSO** tab, select the **OIDC** lower tab.

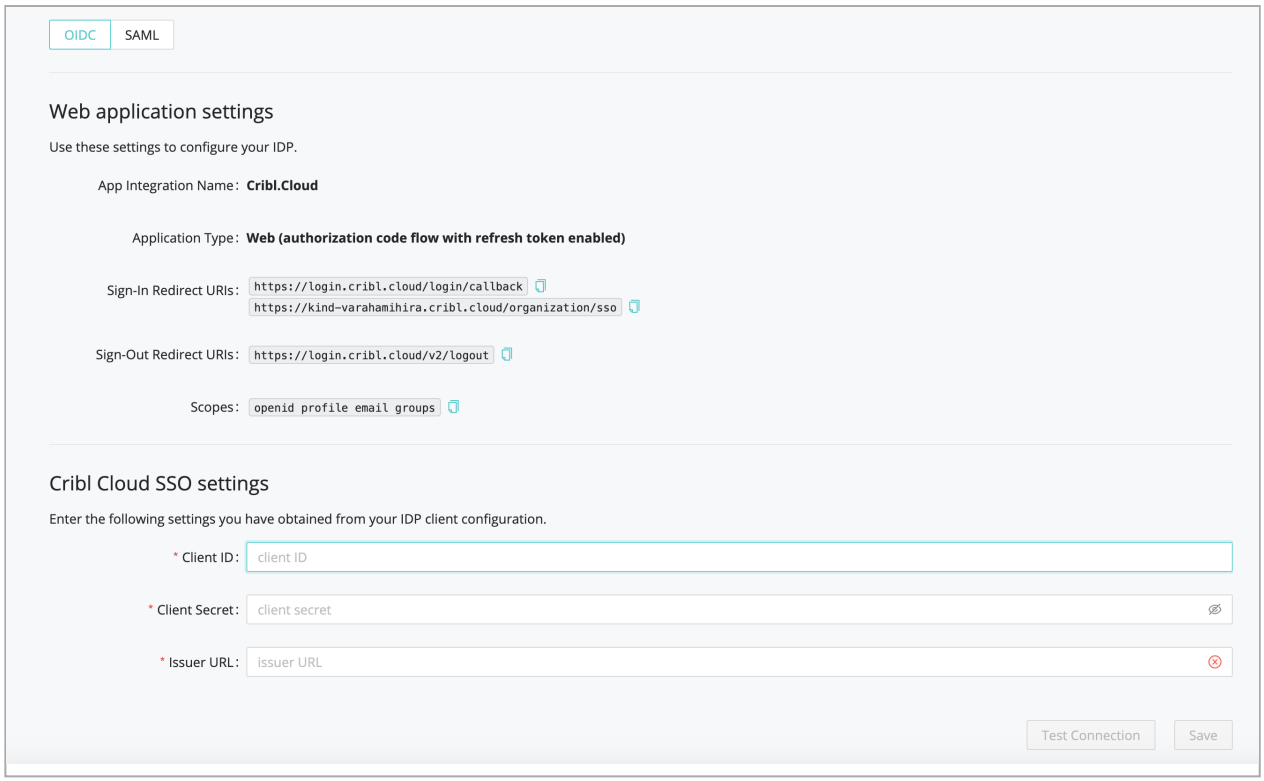

SSO > OIDC lower tab

The **Web Application Settings** are prefilled for you, so you only need to fill in the **Cribl Cloud SSO Settings** section with the following details from your IDP client configuration:

- Client ID
- Client Secret
- Issuer URL

Continuing with our Okta example, here's where you'd copy the Issuer URL from your Okta app:

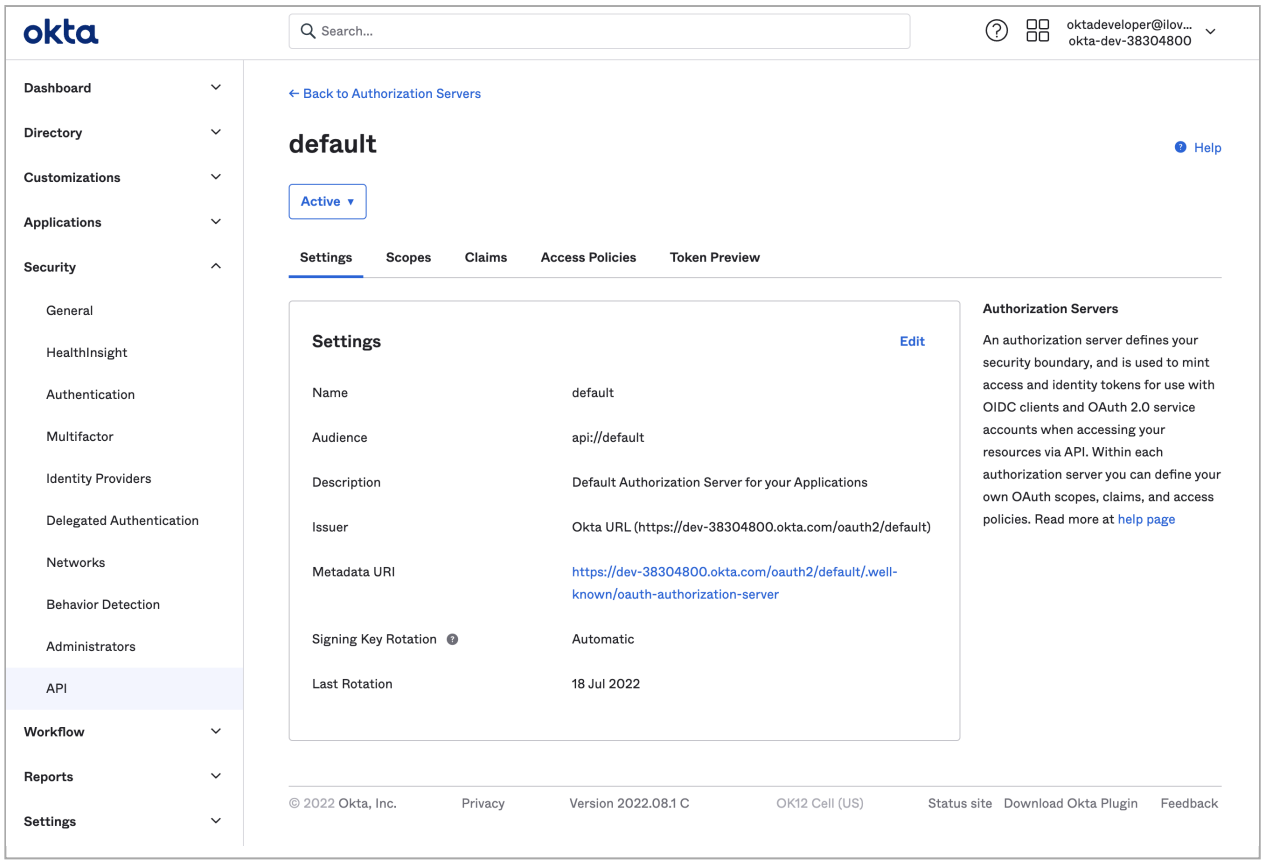

Obtaining Issuer URL from Okta

OIDC/Okta Chiclet Setup (Optional)

If you want to initiate login from your Okta instance with OIDC authentication configured, an Okta admin can configure an app integration as follows:

1. From Okta's left nav, select the **Applications** page.
2. Find the OIDC application created earlier in the OIDC/Okta Setup Example.
3. Click that application, and select **General Settings** > **Edit**.
4. In the **Initiate login URI** field, enter `https://portal.cribl.cloud/login?connection=<organizationID>` (where `<organizationID>` is your Cribl.Cloud Organization's ID).

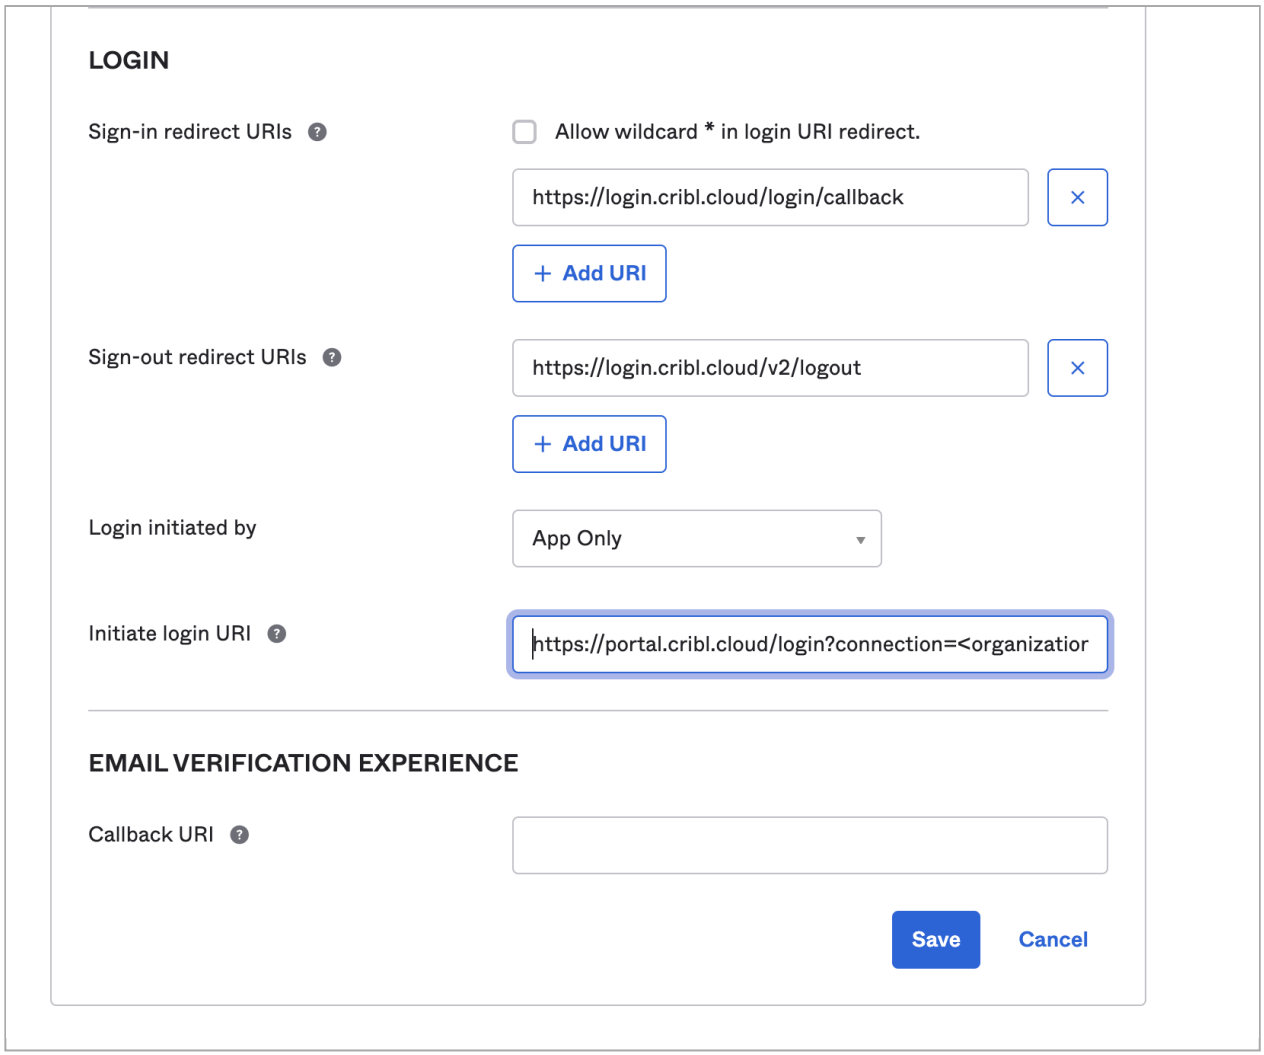

Adding the Initiate Login URI value

5. Click **Save** to complete the chiclet.

Link Existing Users

To ensure that your Cribl.Cloud Organization's local users have a smooth transition to SSO, see Final SSO Steps & Troubleshooting.

2.2.4. SAML/Azure AD Setup Examples

This example uses Azure Active Directory as the identity provider (IDP).

Get URL and ID from Cribl

Cribl's terminology corresponds to Azure AD's terminology as follows:

CRIBL.CLOUD	AZURE AD
Single Sign-On URL	Reply URL (Assertion Consumer Service URL)
Audience URI	Identifier (Entity ID)

Create an Enterprise Application

In Azure Active Directory:

1. Select **Enterprise applications** (on the left) > **New application** > **Create your own application**.
2. Name your new app `Cribl.Cloud` (or any name you prefer).
3. Select **Integrate any other application you don't find in the gallery (Non-gallery)**.
4. Click **Create**.

Assign Groups

From Azure AD's left nav:

1. Select **Users and groups**.
2. Select **Add user/group**.
3. Add the Cribl groups you created in Configure Groups.
4. Click **Assign** after selecting Groups.

Configure Single Sign-On

From Azure AD's left nav, select **Single sign-on** > **SAML** to open the **Basic SAML Configuration** page. Then, as shown in the screenshot below:

1. Select **Add identifier** and enter the **Audience URI** value from Cribl.Cloud's SAML setup page.
2. Select **Add reply URL** and enter the two **Single Sign-on URL** values from Cribl.Cloud's SAML setup page.
3. Of these two URLs, identify the one with the `connection` query parameter, and check the checkbox to make it the **Default**.

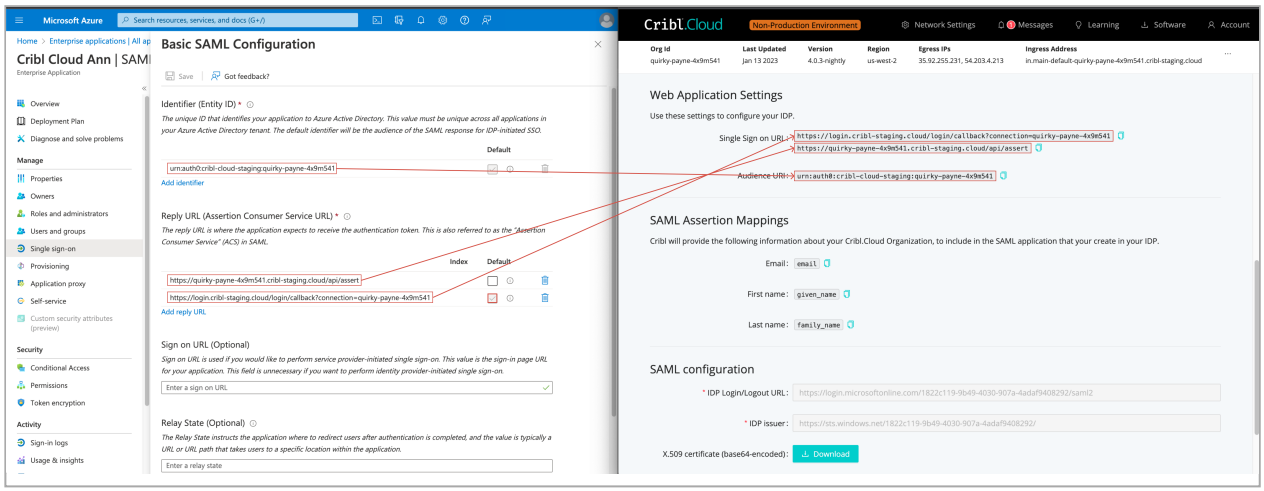

Configuring SSO in Azure AD

Configure Attributes and Groups Claims

In Azure AD, edit **Attribute & Claims** as follows. Start with the claim names:

1. Change `surname` to `family_name`.
2. Change `emailaddress` to `email`.
3. Change `givenname` to `given_name`.

Next, add a group claim:

1. Select **Groups assigned to the application**.
2. As the **Source Attribute**, select: `Cloud-only group display names (Preview)`.
3. Accept the defaults for everything else, and save the new settings.

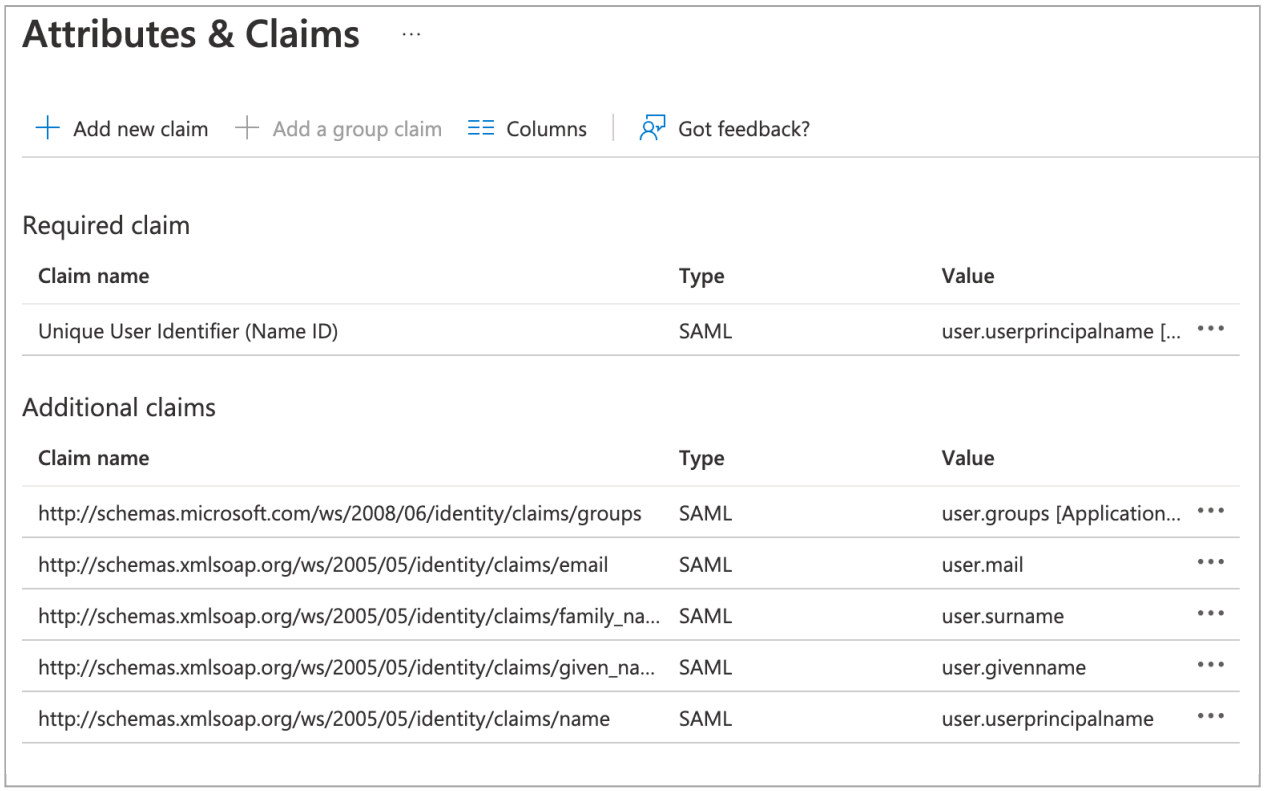

SAML Azure AD Attribute

Submit Your App Info to Cribl

After you've created the SAML app integration in your IDP, provide Cribl essential metadata about your application, to implement SSO setup on the Cribl side.

1. On your Cribl.Cloud portal's Organization page > **SSO** tab, select the **SAML** lower tab.
2. Set the **IDP Login/Logout URL** to your Azure AD's **Set up CloudSAML** section > **Login URL** value.
3. Set the **IDP issuer** to your Azure AD's **Set up CloudSAML** section > **Azure AD Identifier** value.
4. To set the **X.509 certificate (base64-encoded)**, navigate to Azure AD's **SAML Certificates** section and download your **Base64 Certificate**.
5. Click **Test Connection**.
6. When you've verified the connection, click **Save** to complete your submission.

Link Existing Users

To ensure that your Cribl.Cloud Organization's local users have a smooth transition to SSO, see Final SSO Steps & Troubleshooting.

2.2.5. SAML/Okta Setup Examples

This example uses Okta as the identity provider (IDP).

Get URL and ID from Cribl

Cribl will provide the following information about your Cribl.Cloud Organization, to include in the SAML application that you create in your IDP:

1. Assertion Consumer Service URL.

   Okta calls this a "Single sign-on URL," and this is the first of two URLs that your Cribl Organization's **SSO** > **SAML** tab lists under the same label. Example: `https://login.cribl.cloud/login/callback?connection=<$organizationID>`

2. Test SSO URL.

   Required to test your connection. Okta accepts this under "Other Requestable SSO URLs," and this is the second URL that your **SSO** > **SAML** tab lists under "Single sign-on URL." Example: `https://<$organizationID>.cribl.cloud/api/assert`

3. Entity ID.

   Okta calls this an "Audience URI (SP Entity ID)," and your **SSO** > **SAML** tab calls it just an "Audience URI." Example: `urn:auth0:cribl-cloud-prod:<$organizationID>`

Create SAML 2.0 App Integration

Using Okta as our example, create a SAML app integration. Start here:

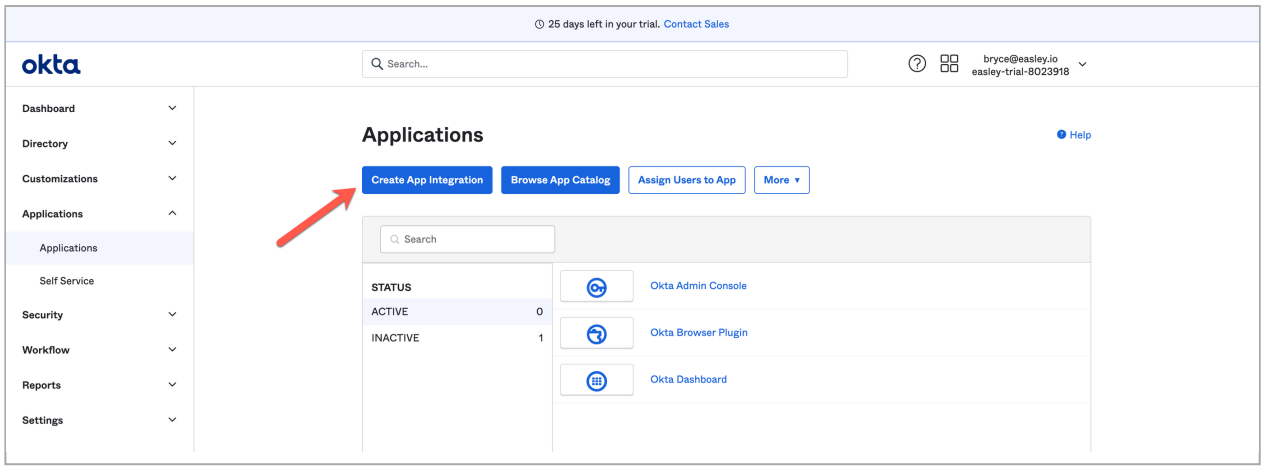

Creating an app integration

Next, create the app integration with **Sign-in method**: `SAML 2.0`.

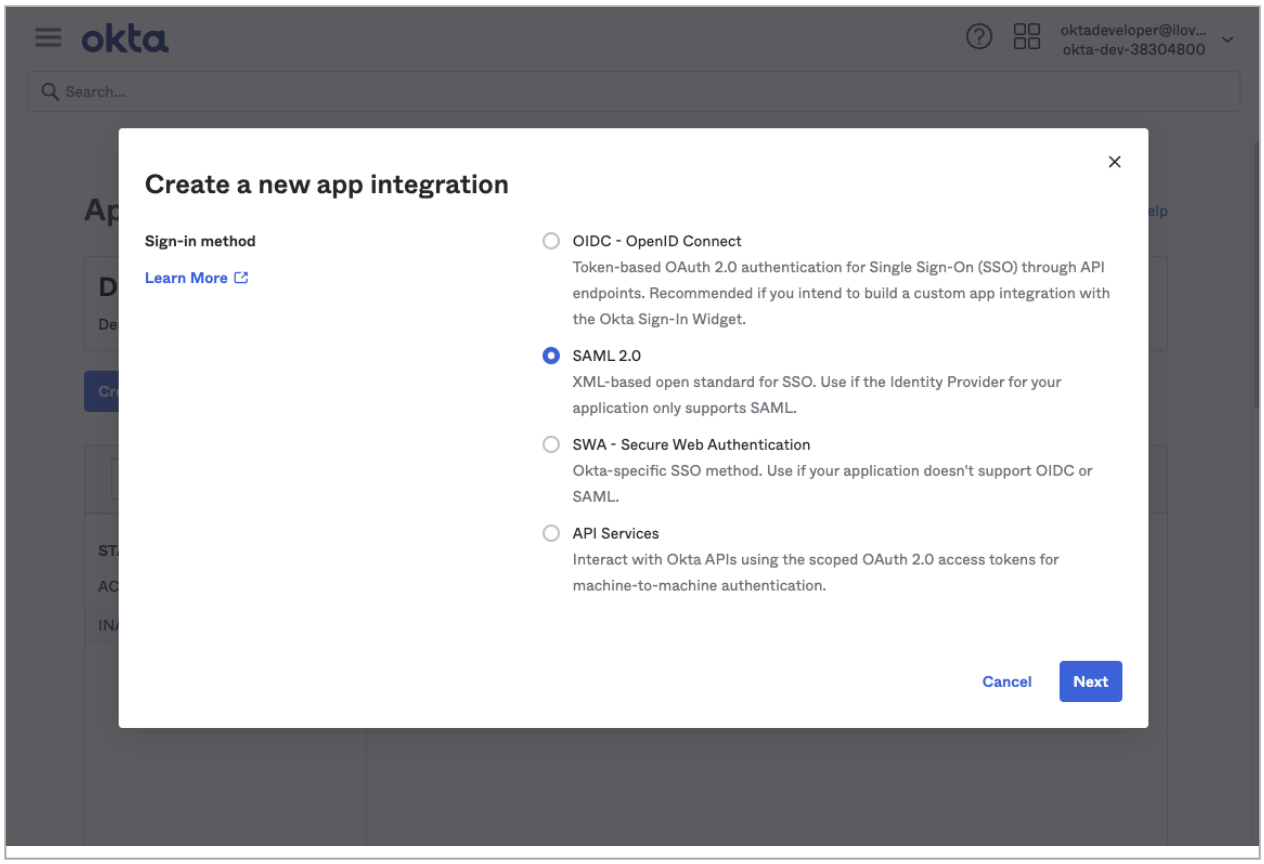

Specifying SAML 2.0 sign-in

Configure SAML Settings

In the app integration **SAML Settings** section, configure the following options.

- **Single sign-on URL (Assertion Consumer Service URL)**: `https://login.cribl.cloud/login/callback?connection=<$organizationID>`
- **Audience URI (SP Entity ID)**: `urn:auth0:cribl-cloud-prod:<$organizationID>`
- **Application username**: `Email`

> The `nameidentifier` assertion in SAML responses must be the user's `Email`.

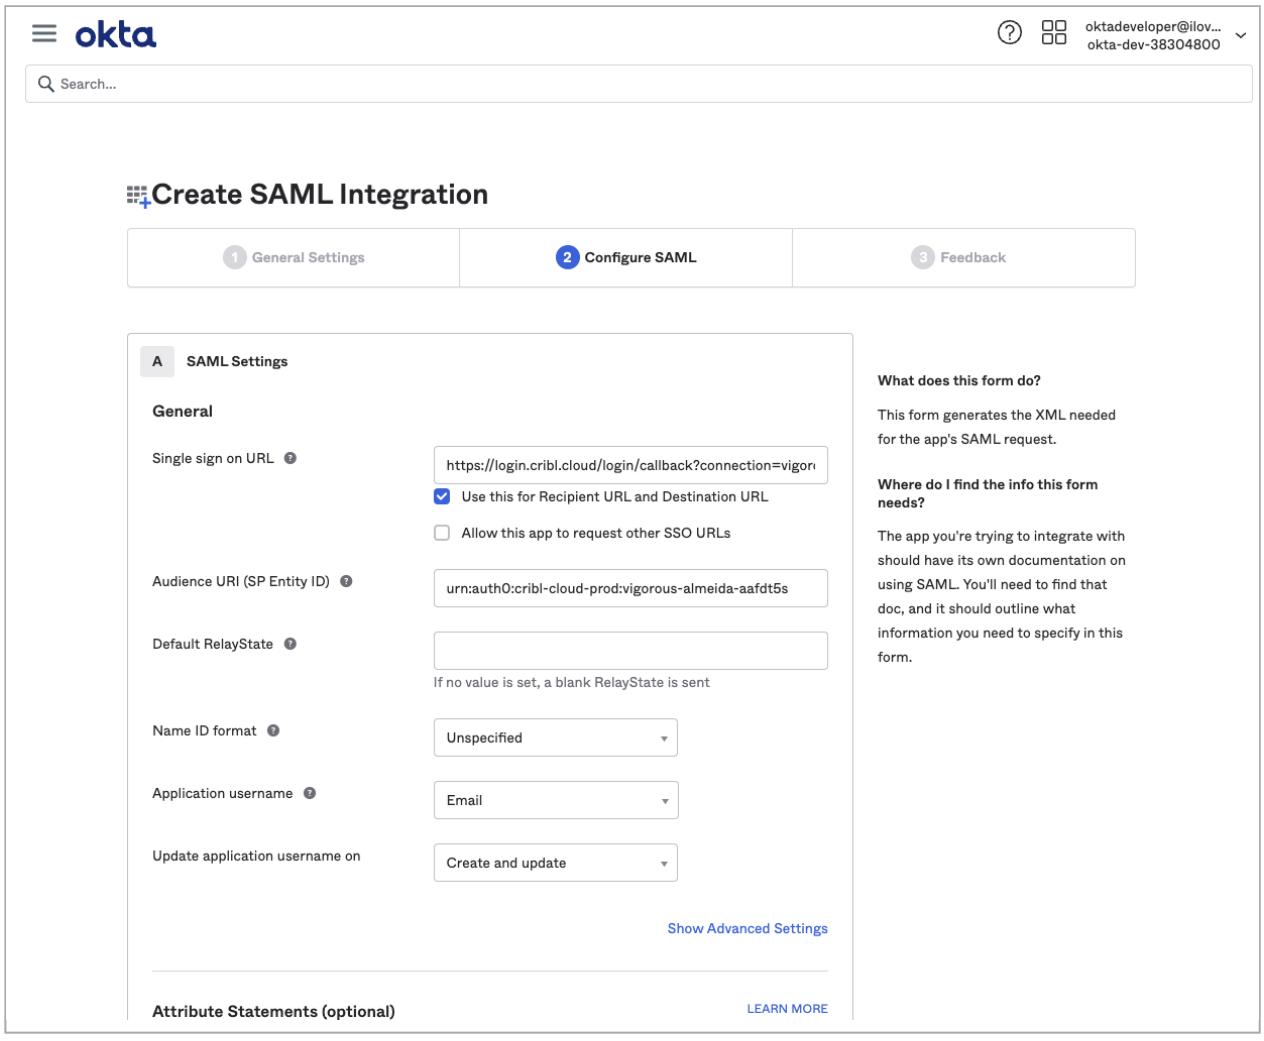

Configuring SAML Settings

Next, click the **SAML Settings** section's **Show Advanced Settings** link. Then navigate down to configure a single row of **Other Requestable SSO URLs**, as follows:

- **URL**: From your Cribl.Cloud Organization's **SSO** > **SAML** tab, this is the second **Single sign-on URL**. It will be in this format: `https://<$organizationID>.cribl.cloud/api/assert`

- **Index**: Set this to `0`.

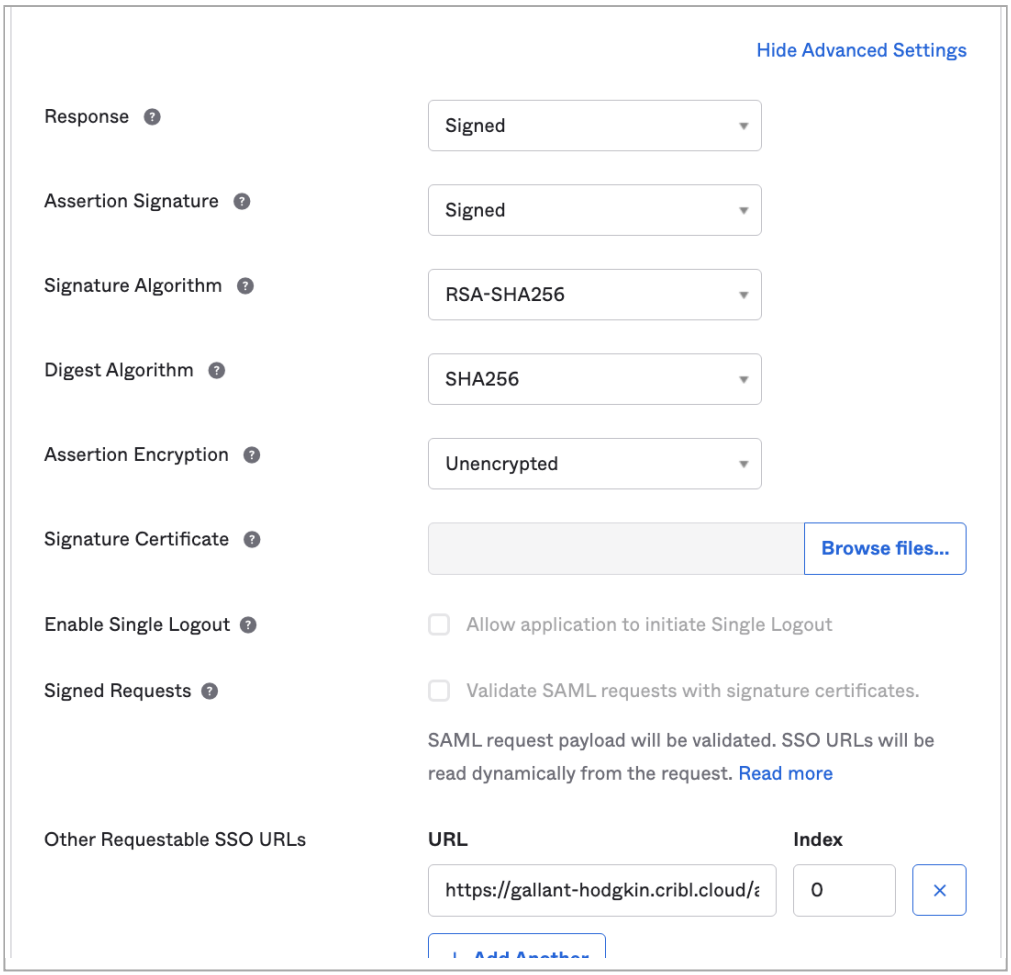

Configuring SAML Advanced Settings

Configure Attribute Statements

Configure **Attribute Statements** for these attributes, as shown below. Then save your app integration:

- `email`
- `given_name`
- `family_name`
- `groups`

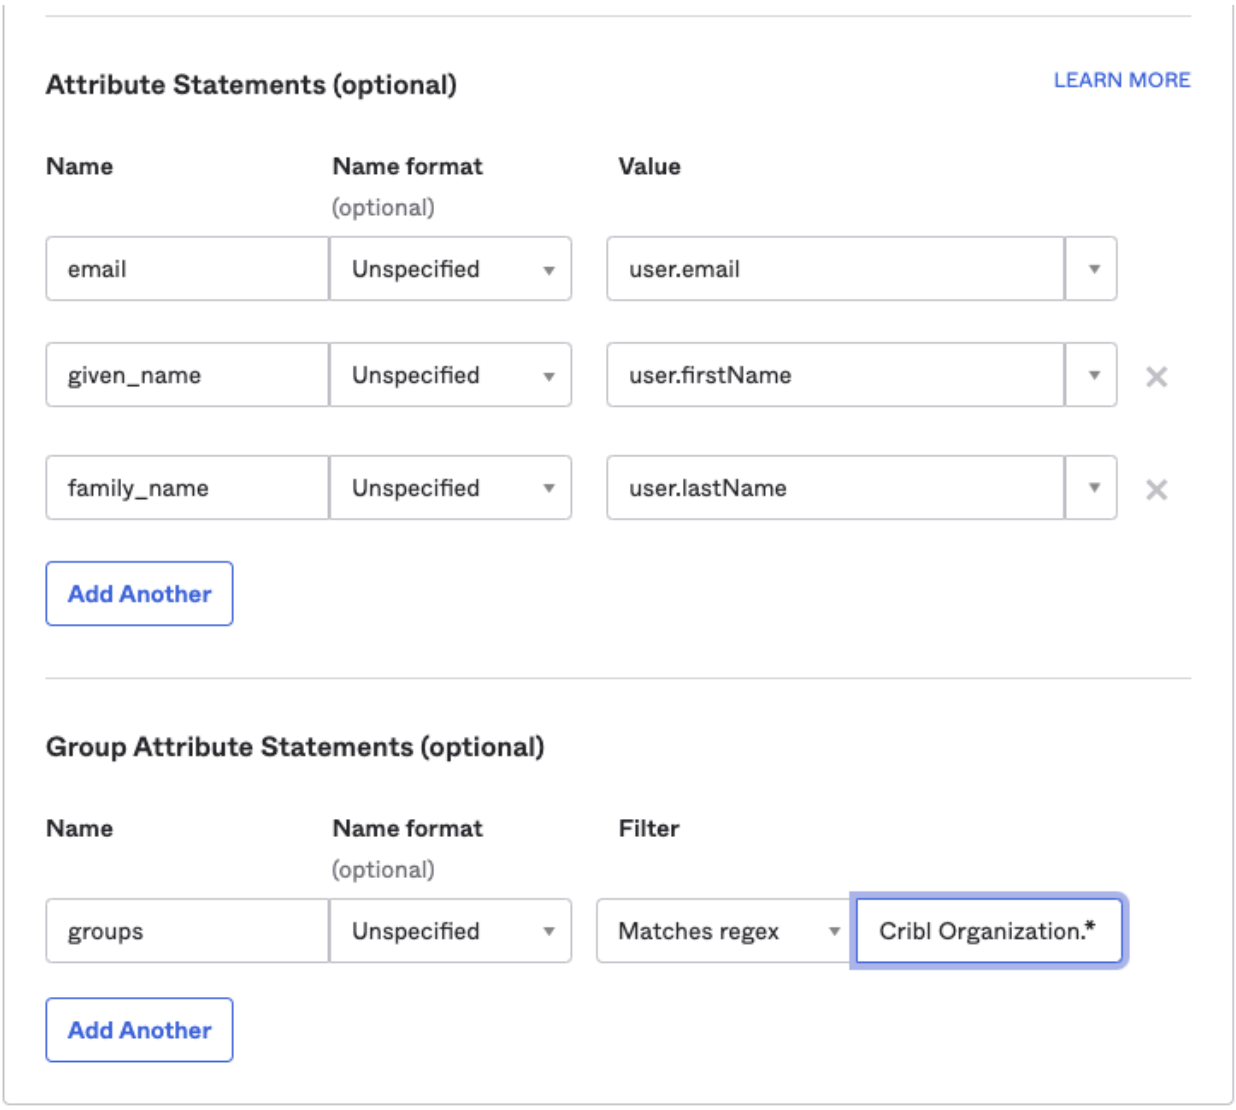

Configuring SAML Attribute Statements in Okta

Submit Your App Info to Cribl

After you've created the SAML app integration in your IDP, provide Cribl essential metadata about your application, to implement SSO setup on the Cribl side.

On your Cribl.Cloud portal's Organization page > **SSO** tab, select the **SAML** lower tab.

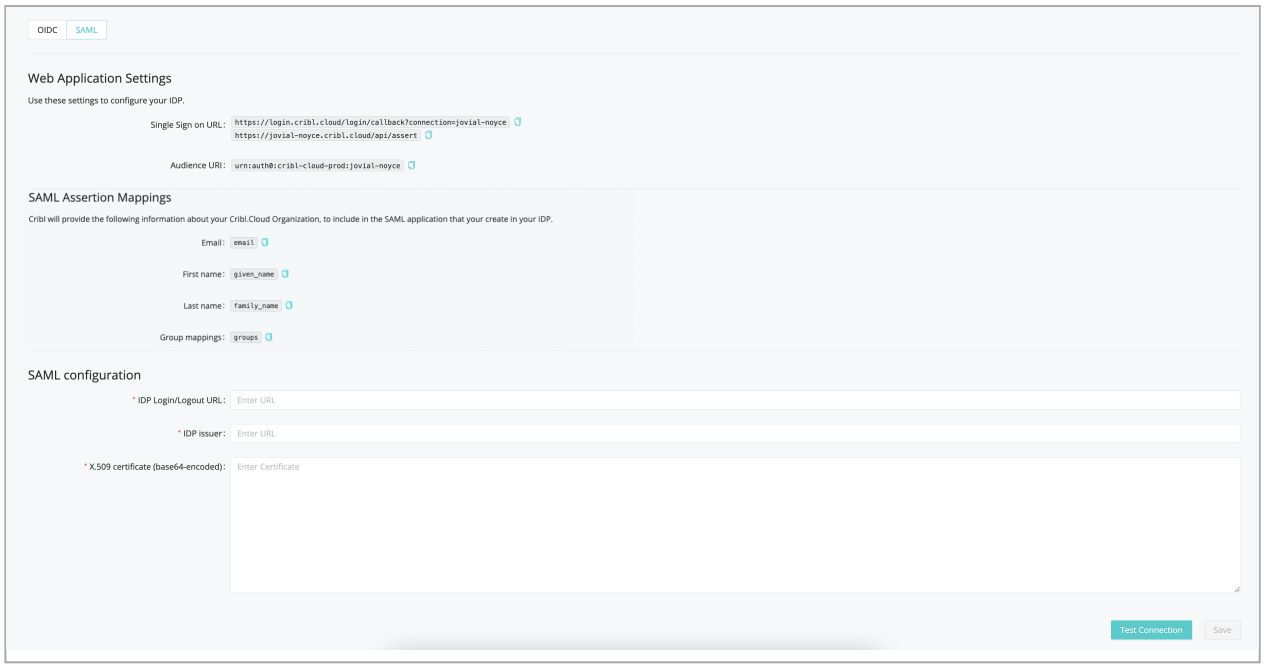

SSO > SAML lower tab

The **Web Application Settings** will be prefilled for you, and Cribl will also prefill the **SAML Assertion Mappings** based on the information you've registered with Cribl. So you only need to fill in the **SAML Configuration** section with the following details from your IDP client configuration:

- IDP SSO
- IDP Issuer
- X.509 Certificate

Continuing with our Okta example, these screenshots show how you'd export these metadata details from your Okta app:

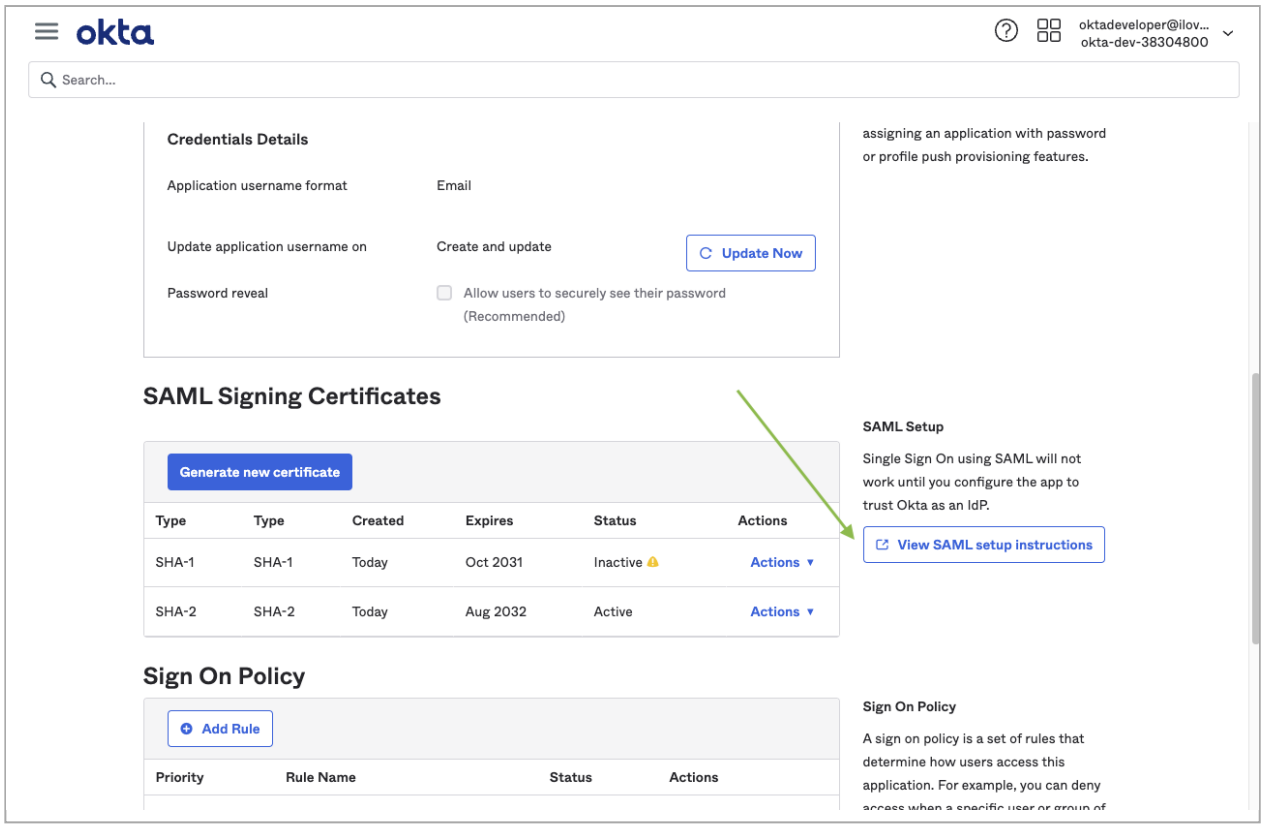

Exporting SAML metadata

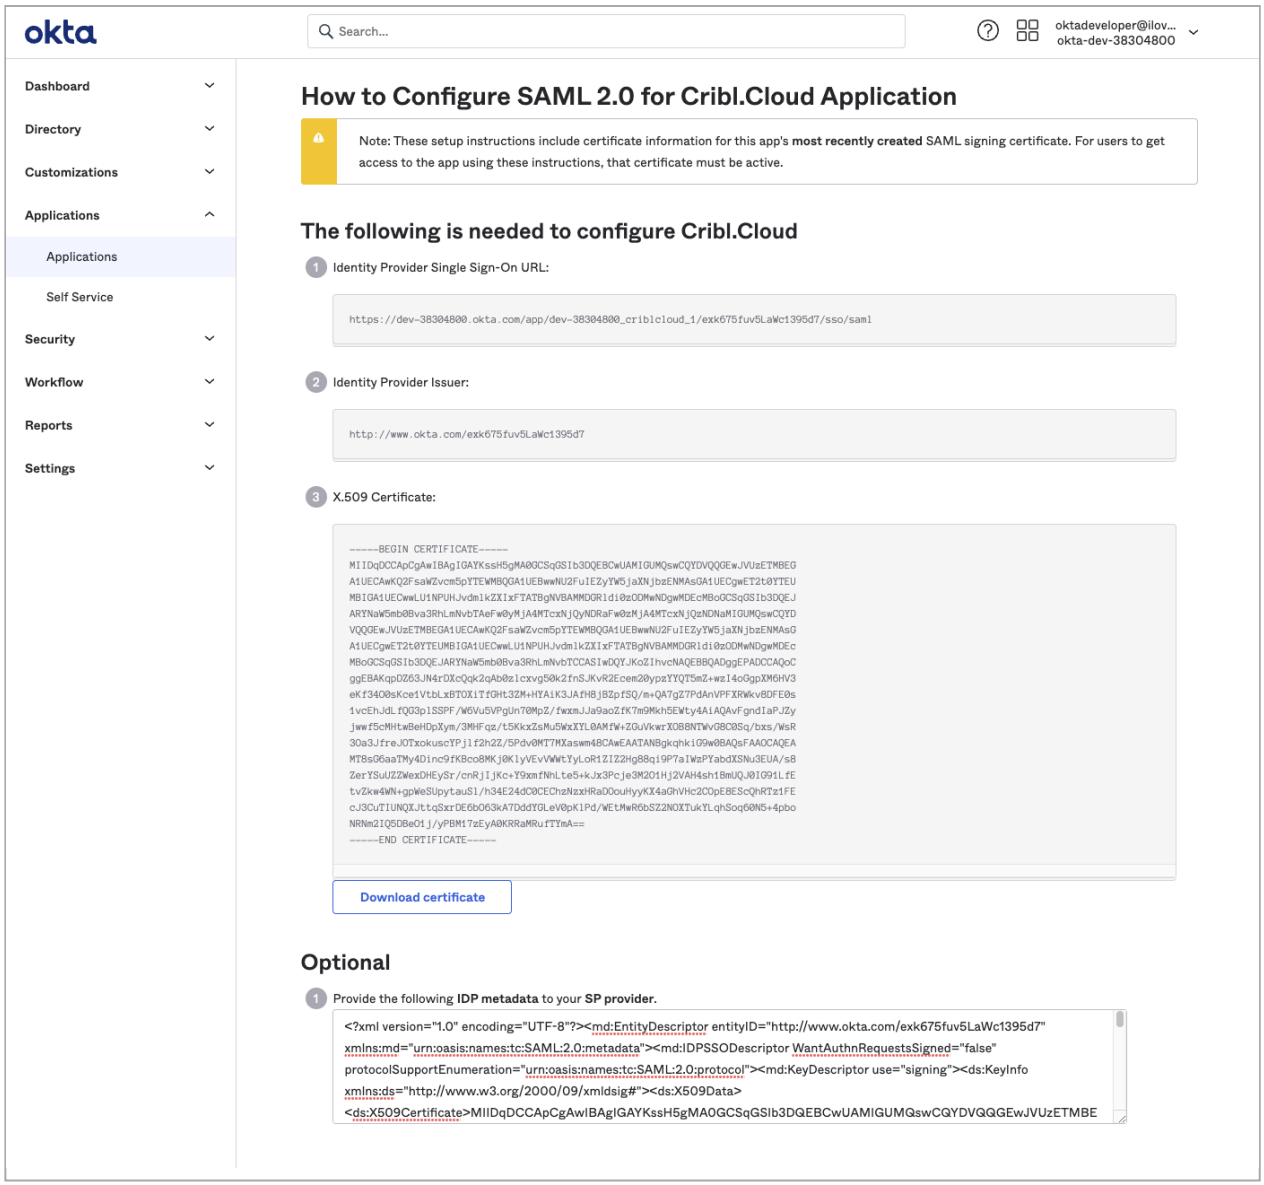

SAML metadata in Okta's UI

SAML/Okta Chiclet Setup (Optional)

If you want to initiate login from your Okta instance with SAML authentication configured, an Okta admin can configure an app integration as follows:

1. From Okta's left nav, select the **Applications** page.
2. Click **Browse App Catalog.**
3. From the resulting catalog, use the search bar to find and select the `Bookmark App` application.
4. From that application's page, click **Add Integration**.

5. On the **General settings** page, enter an **Application label** that will identify this app as supporting Cribl.Cloud login. (`Cribl.Cloud` is a good choice, but the label is arbitrary.)

6. In the **URL** field, enter `https://portal.cribl.cloud/login?connection=<organizationID>` (where `<organizationID>` is your Cribl.Cloud Organization's ID).

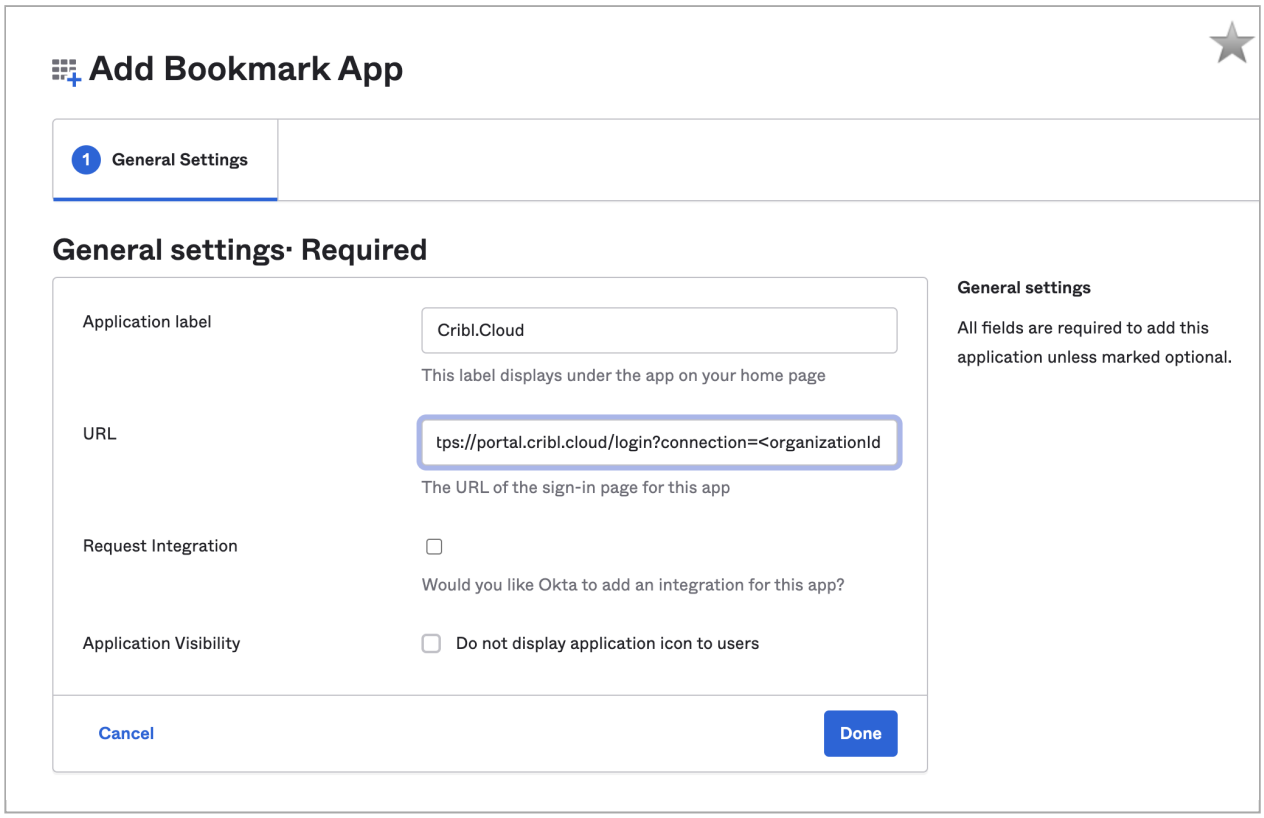

Creating a bookmark app in Okta

7. Click **Done**.

8. Click the **Assign** button, and assign all of the Cribl.Cloud groups to the application.

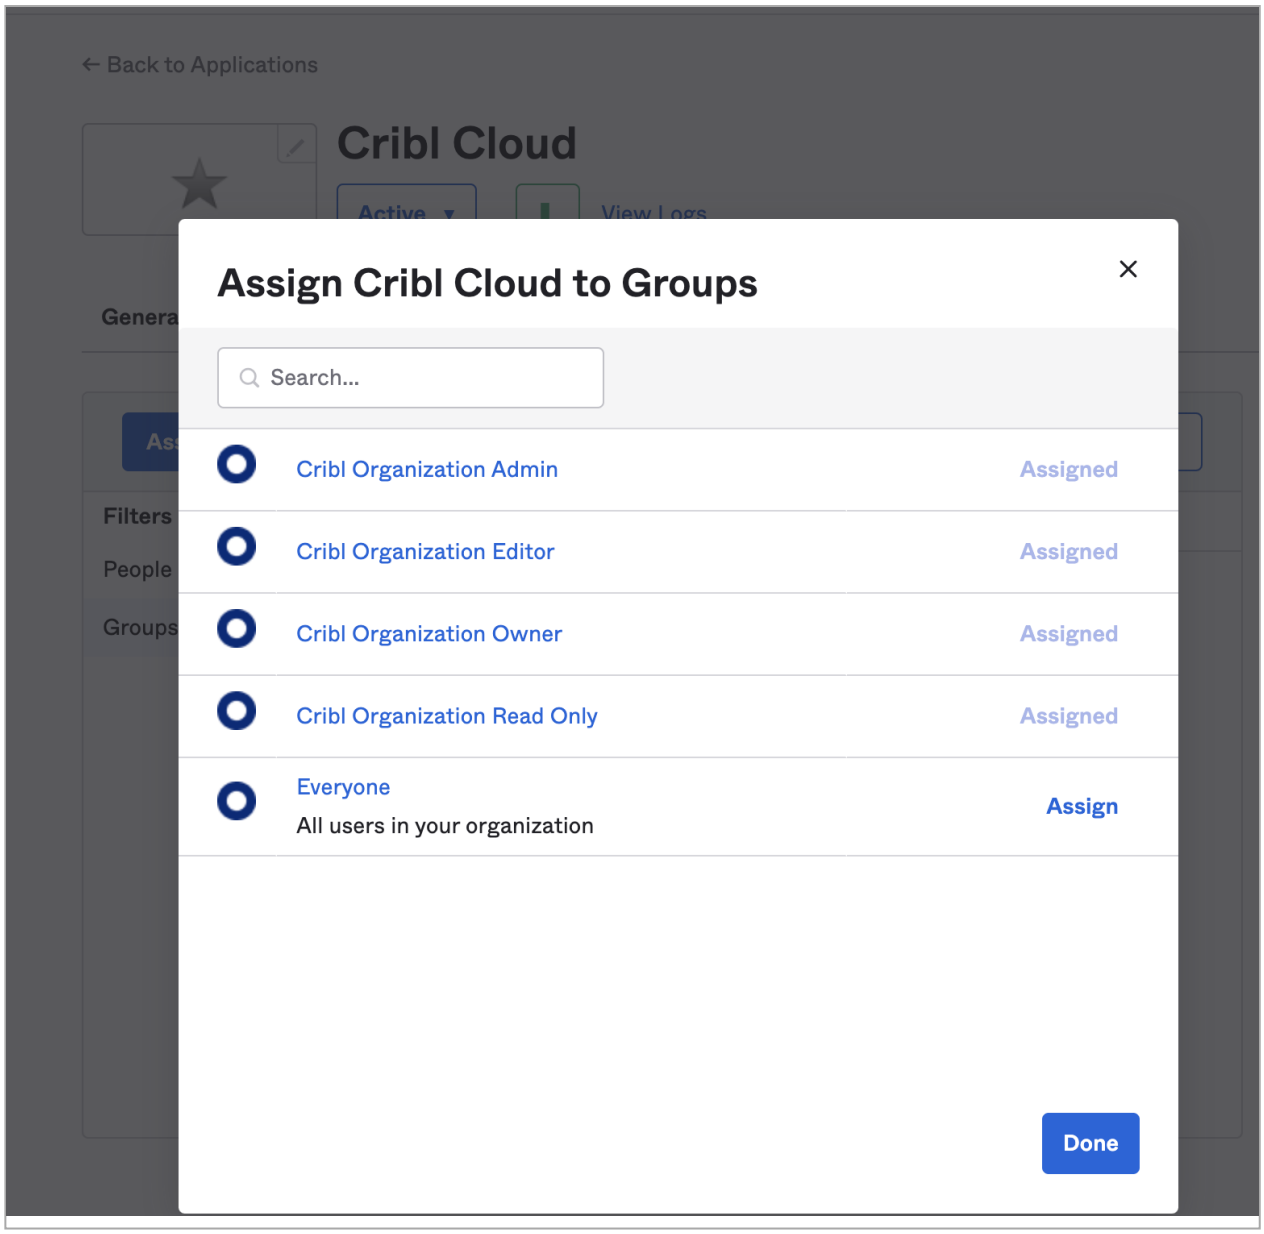

Assigning groups to the bookmark app

9. The Cribl.Cloud chiclet should now be available for all users in the Cribl groups you've assigned.

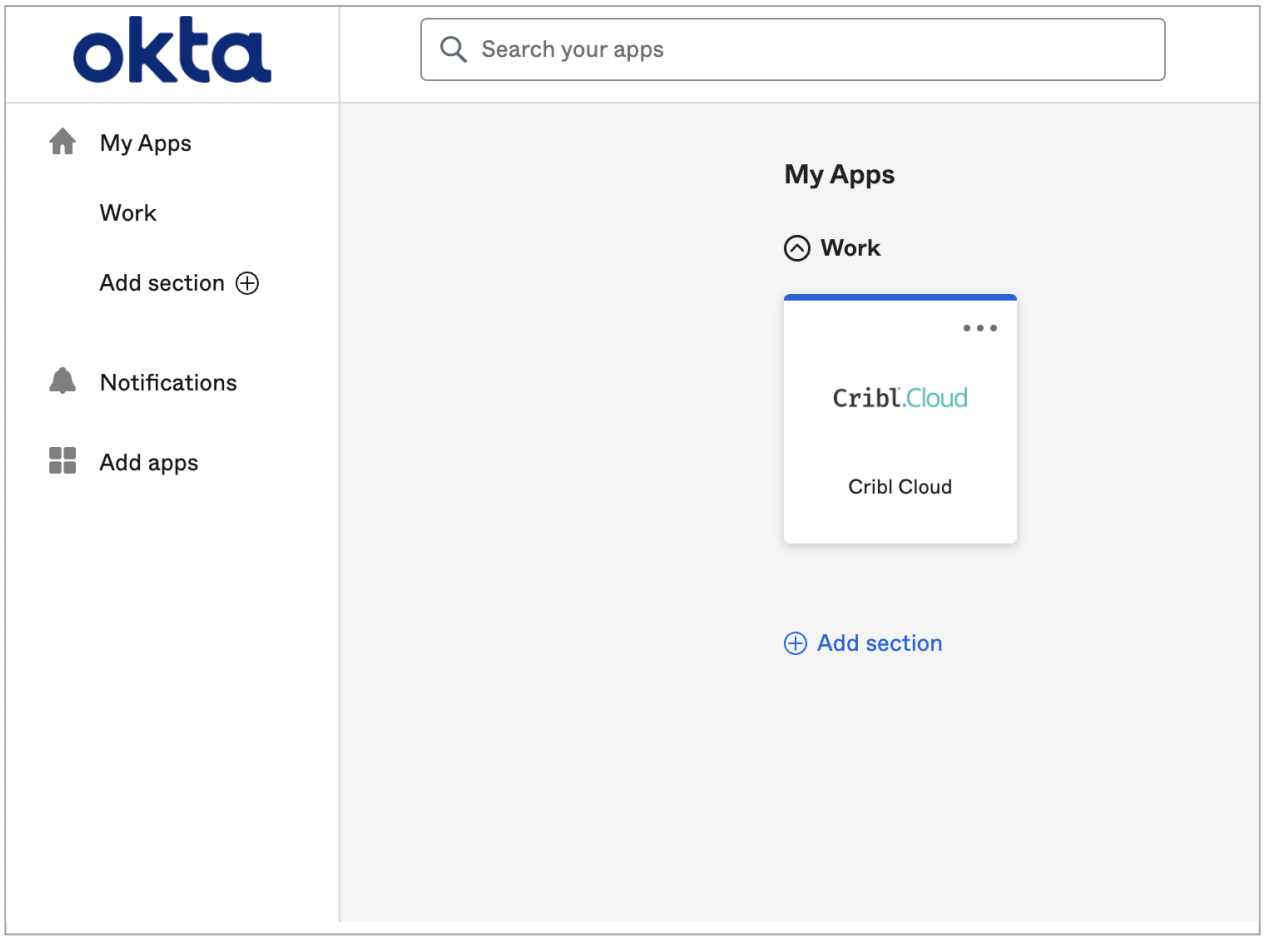

Okta Cribl.Cloud chiclet example

Link Existing Users

To ensure that your Cribl.Cloud Organization's local users have a smooth transition to SSO, see Final SSO Steps & Troubleshooting.

2.2.6. Final SSO Steps & Troubleshooting

Whether you're integrating with OIDC or SAML, there's one more step for users who had an existing username/password-based login on Cribl.Cloud before SSO was set up.

Upon first login with SSO, these users will see a prompt to link their identities. They should accept this prompt to ensure that their existing profile is linked with their SSO profile. (This can be a multi-step flow.)

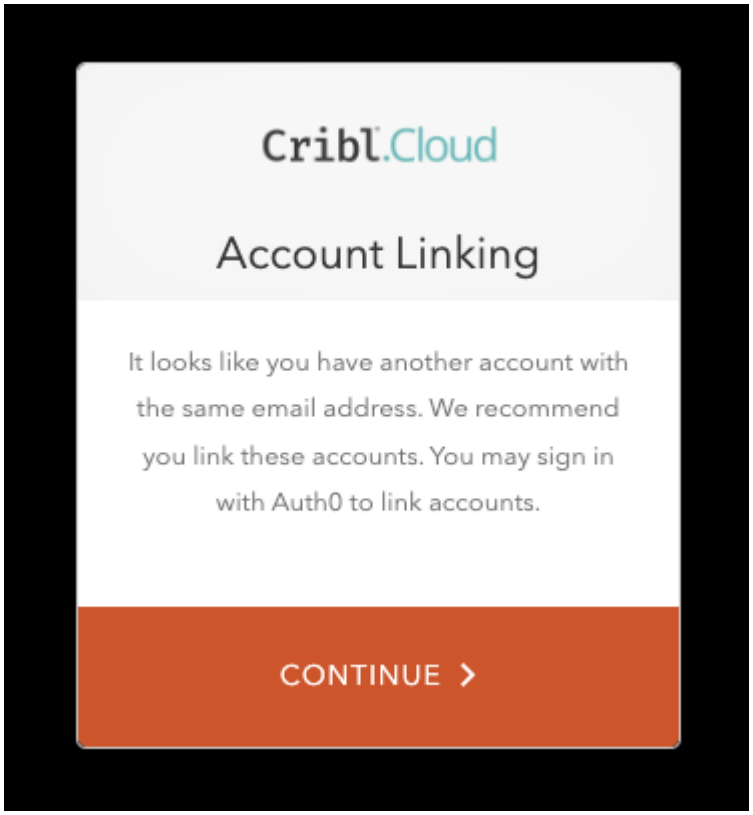

Prompt to link accounts

Troubleshooting Resources

Cribl University offers an SSO Integration – Cribl.Cloud – Okta Troubleshooting Criblet. To follow the direct course link, first log into your Cribl University account.

To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses. Cribl's training is always free of charge.

Once logged in, check out other useful Troubleshooting Criblets and Advanced Troubleshooting short courses.

3. CrowdStream

CrowdStream is a special Cloud-hosted version of Cribl Stream, available through CrowdStrike Falcon LogScale starting in June 2023. This collaboration is tailored to forward data from a wide range of sources into LogScale for XDR analysis and log management.

En route, you can process events using all of Stream's options for aggregating, sampling, redacting, cloning, and otherwise shaping and directing your data. CrowdStream provides parallel options to route data to cost-effective Amazon S3 storage, and to S3 data lakes, for later replay and analysis.

Getting Started

These steps assume that you've set up your CrowdStrike Falcon LogScale account, obtained your corresponding API token, and logged into LogScale.

1. On the **CrowdStream** tile at right, click the **Set up Cribl** link.

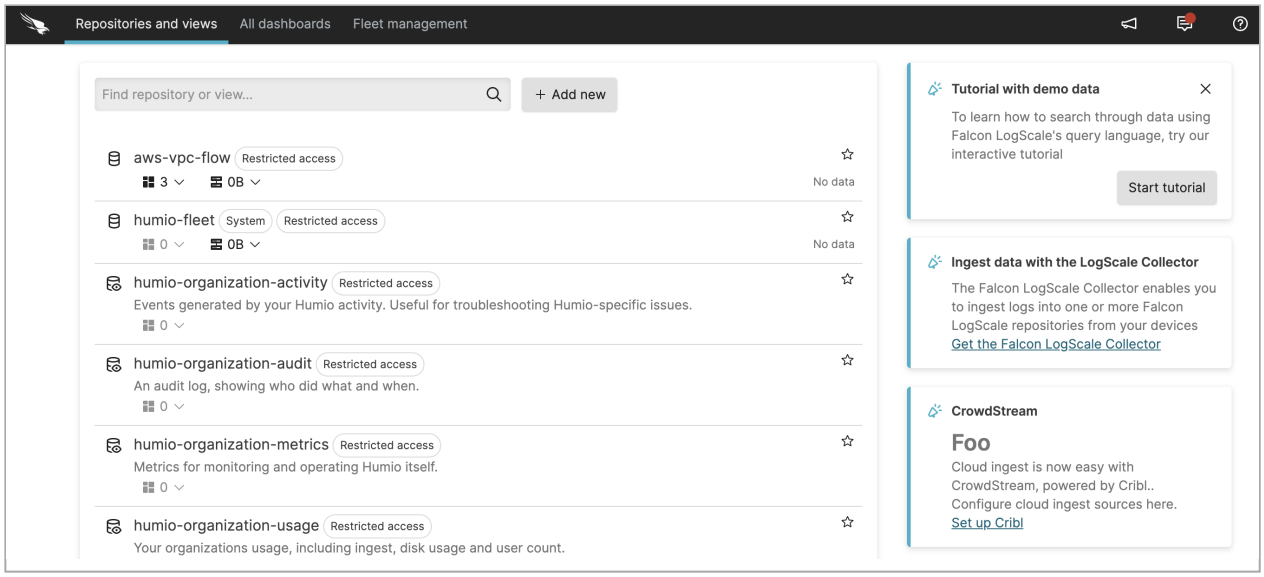

Navigating from LogScale to CrowdStream

2. On the resulting **Organization settings** page, click **Log in**.

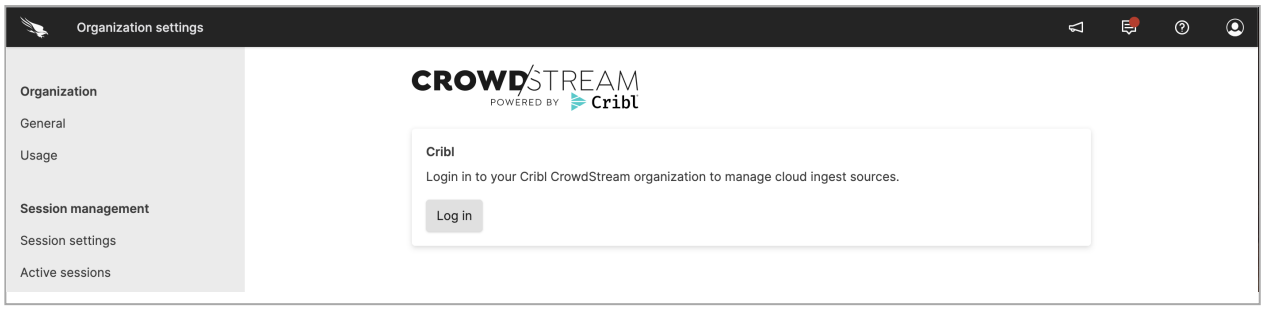

Logging into CrowdStream

3. This brings you to the CrowdStream home page. Click **Manage** on the **CrowdStream** tile at left.

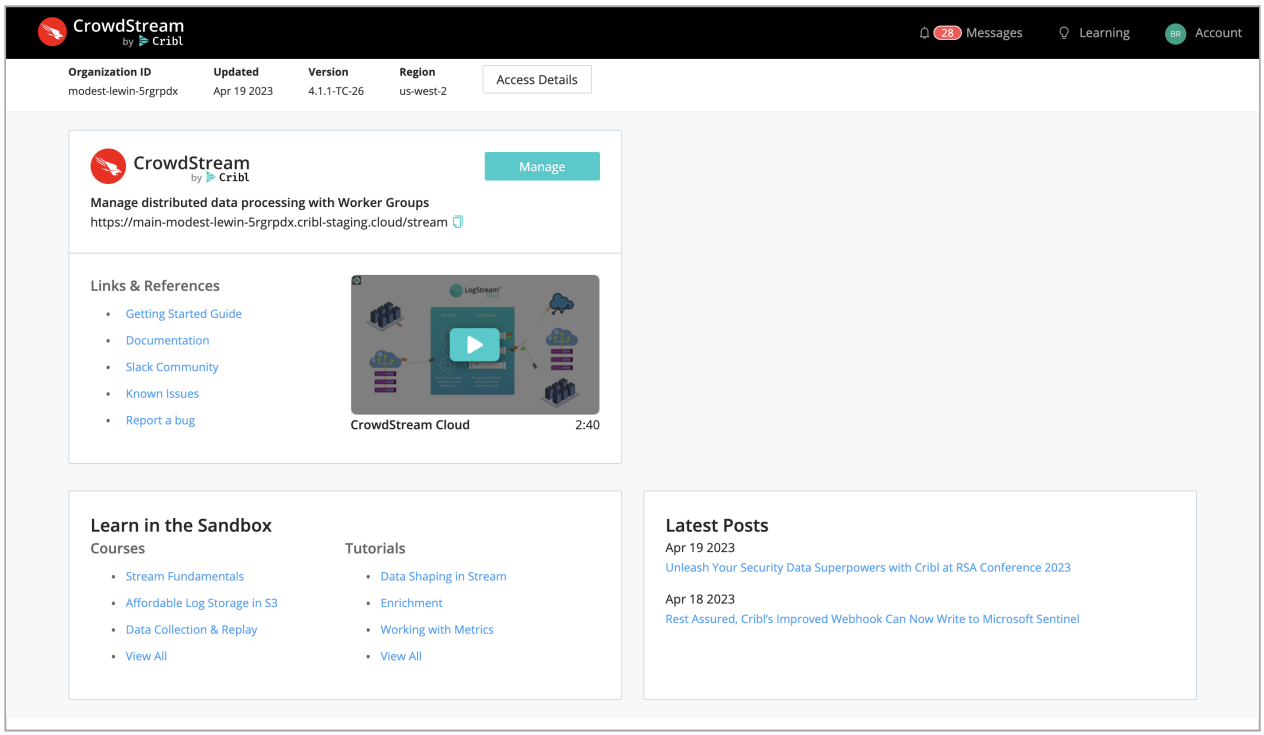

Selecting the CrowdStream app

4. On CrowdStream's **Worker Groups** page, click the **default** Group's tile at the upper left.

   (A Worker Group is a collection of processing instances that share the same configuration. For details, see Cribl Stream's Distributed Deployment topic.)

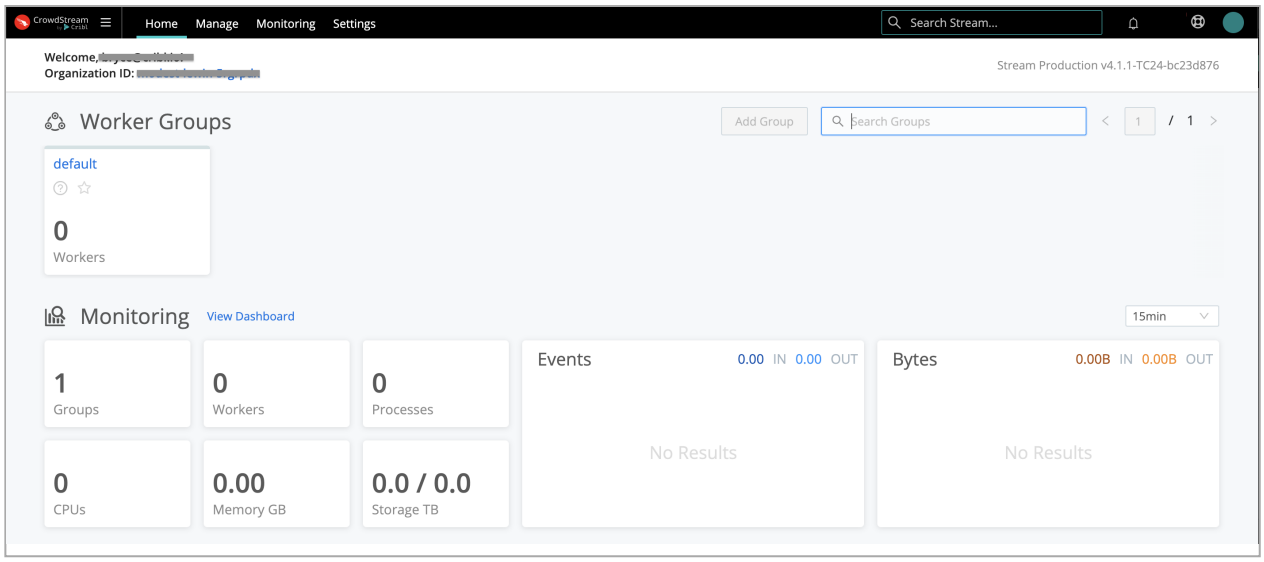

Selecting the **default** Group

5. This brings you to the **Manage** page of CrowdStream's top nav, and to the **Overview** tab of this Group's submenu.

   To begin configuring this Group, you now have a two-up choice of **QuickConnect** or **Routes** tiles. How to choose? See the next section.

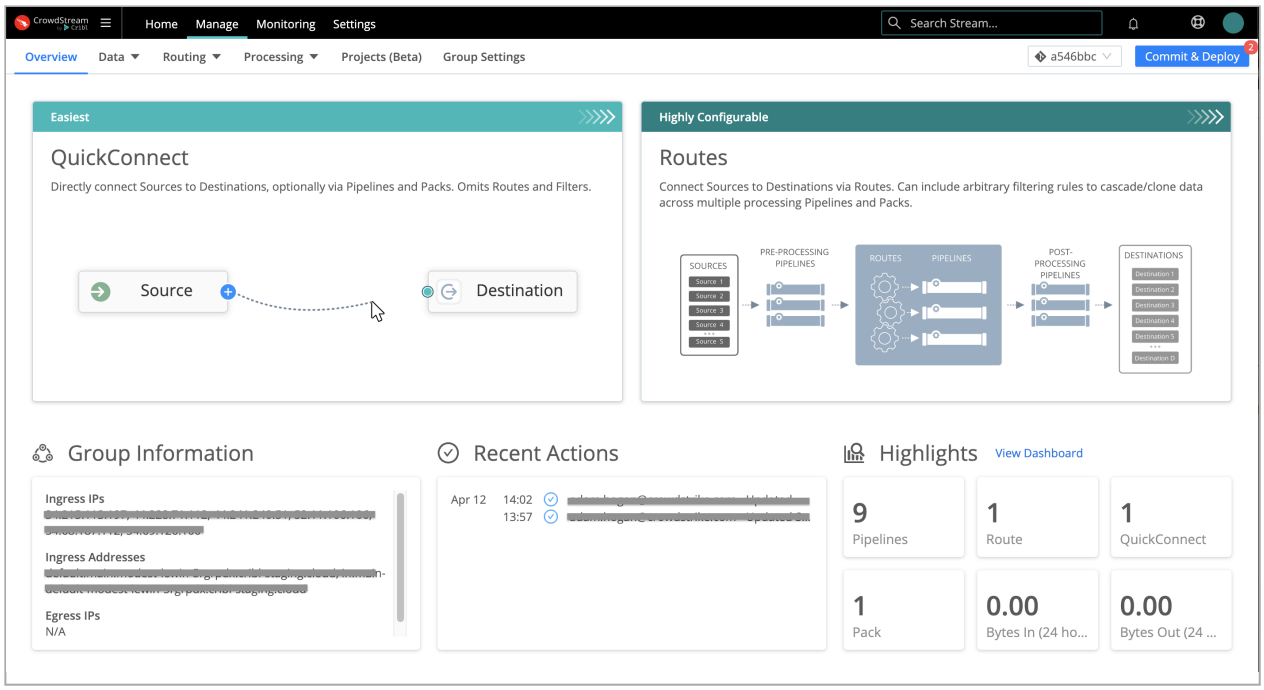

Group **Overview** page

For More Information

- Cribl.Cloud Launch Guide

Simple or Complex Routing?

Your first choice is how simply or intricately you want to configure data flow from the first data Source you set up. CrowdStream offers two user interfaces:

- QuickConnect (the left tile shown above) provides a simple visual UI. You drag and drop connections from Sources on the left to Destinations on the right. Each connection can include as much or as little intermediate processing as you like. To remove a connection, just drag it off the Destination (you'll get a confirmation modal). The only practical limitation here is that data flow through every Source -> Destination connection must be parallel and independent.

- Data Routing (the right tile shown above) provides fine-grained control, via a more traditional UI that you configure across separate modals and pages. You build a Routing table with conditional processing. This can cascade and clone data across multiple processing Routs, according to the arbitrary filtering rules and sequence that you define.

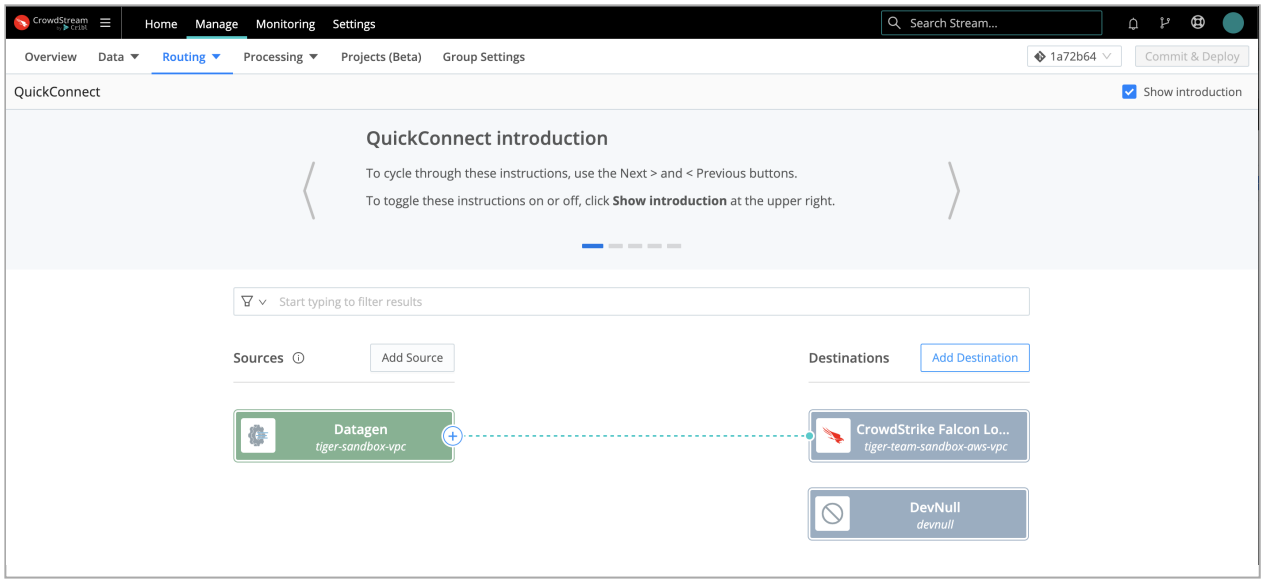

Configuring data flow in QuickConnect

So the trade-off between these two options is ease of use versus flexibility. These two options are separate, but not mutually exclusive: You can set up simultaneous data flows through QuickConnect and Data Routes.

You can also move Sources, and their connections to Destinations, between the two UIs. So one obvious option is to configure your first data flow in QuickConnect, and then move to the Routing UI as your familiarity and needs expand.

Here is a lightning-fast (one-minute) preview of **all** the configuration steps below, in QuickConnect:

01:14

Navigate Between User Interfaces

To work in QuickConnect, click the left tile shown above, or select **Routing** > **QuickConnect**.

To work in the Routing UI, click the right tile shown above, or select **Routing** > **Data Routes**.

> You can always switch between the two environments from a Group's **Manage** > **Overview** tab, by using the **Routing** submenu.

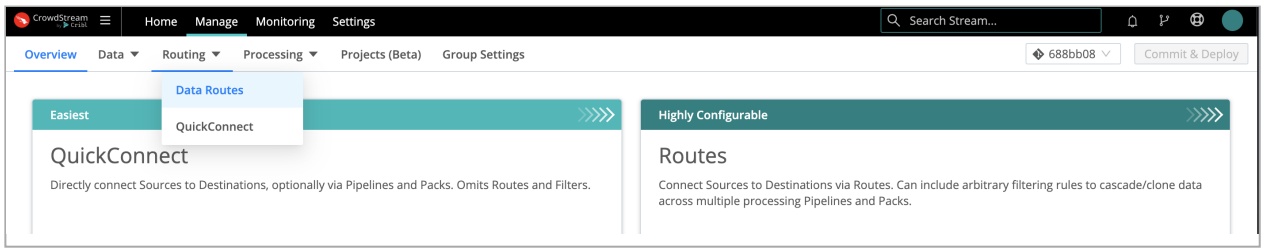

Traversing between QuickConnect and Data Routes

Configure a Source

A CrowdStream Source is a model of an upstream service sending data into the system. In this model, you configure authentication and/or other needed parameters.

You can configure multiple instances of a given Source type, each with different parameters. You can also attach processing that's specific to each instance. CrowdStream provides the Datagen Source type to generate sample inbound events for development and testing.

Using QuickConnect

In QuickConnect, click the **Add Source** button on the left (Sources) side. In the resulting left drawer, search for and click your desired Source type to begin configuring a new instance of that Source.

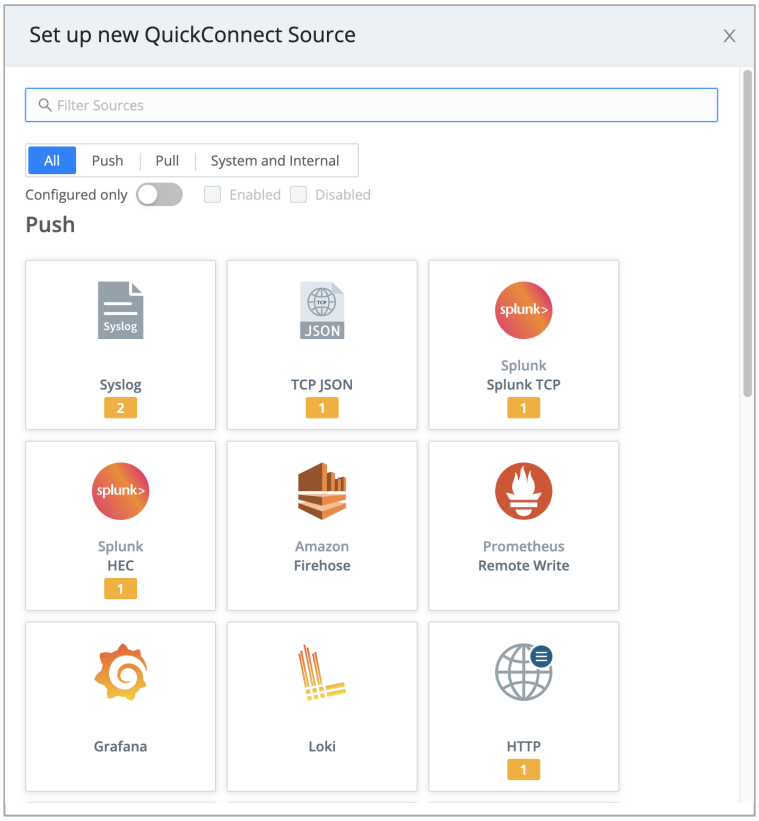

Selecting a Source through the QuickConnect UI

To configure (or reconfigure) a Source that's already present in QuickConnect, hover over its tile and click the **Configure** button. Note that for multiple Sources of the same type, tiles will display stacked until you hover over the stack.

Using Data Routes

In the Routing UI, first click **Data** > **Sources**.

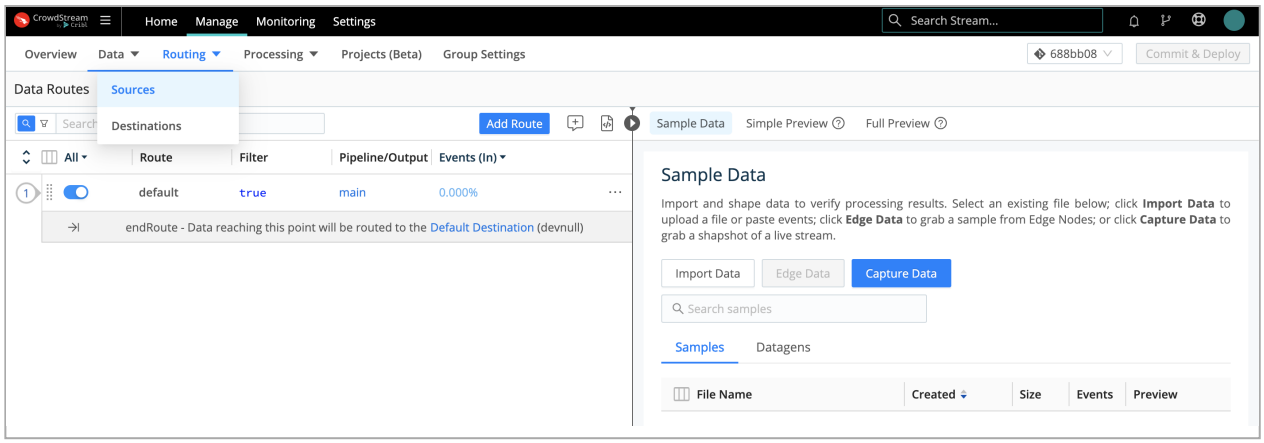

Selecting a Source through the Routing UI

On the resulting **Manage Sources** page, search for your desired Source type, then click its tile to begin configuring a new instance of that Source.

(After you click through to a Source, the same set of peer Sources will be available in the left nav.)

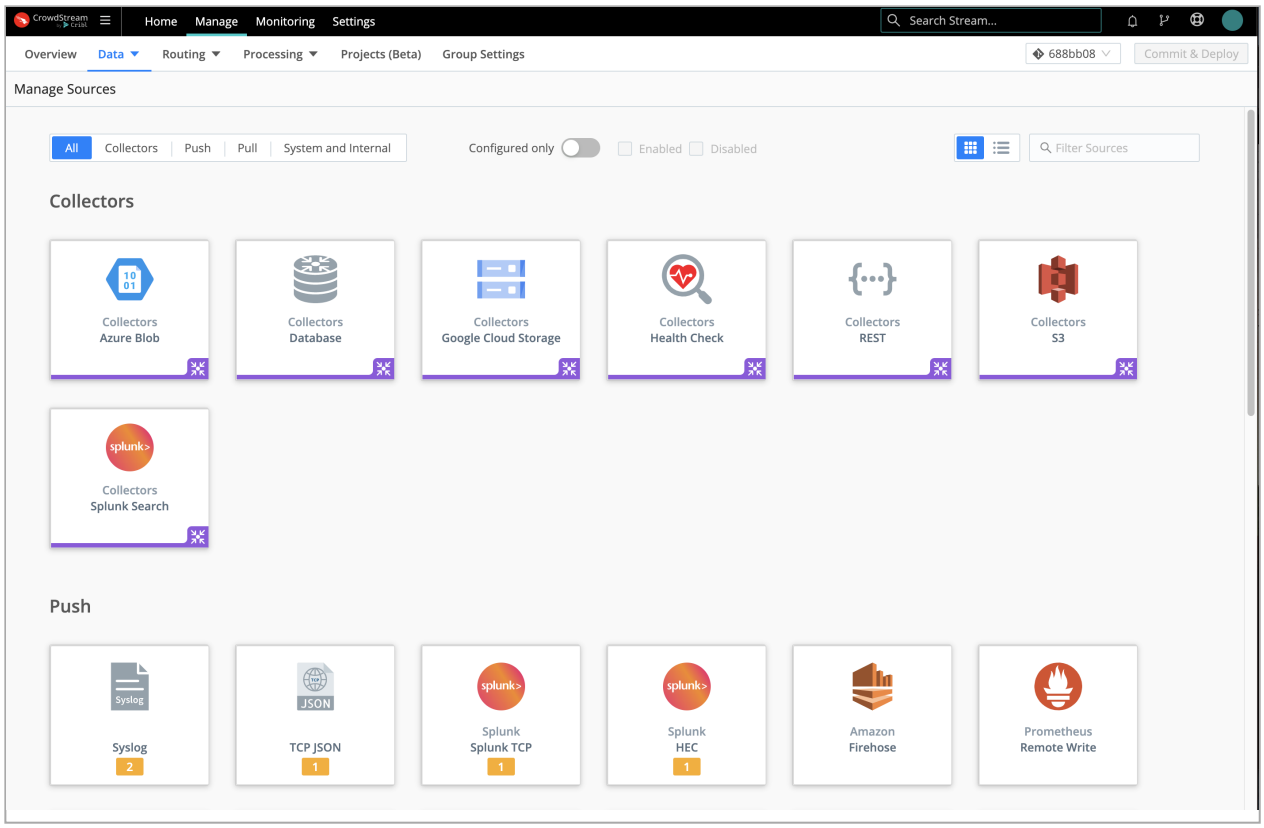

Manage Sources page

Click an existing Source's row here to access its configuration, or click **Add Source** to configure a new instance of that Source.

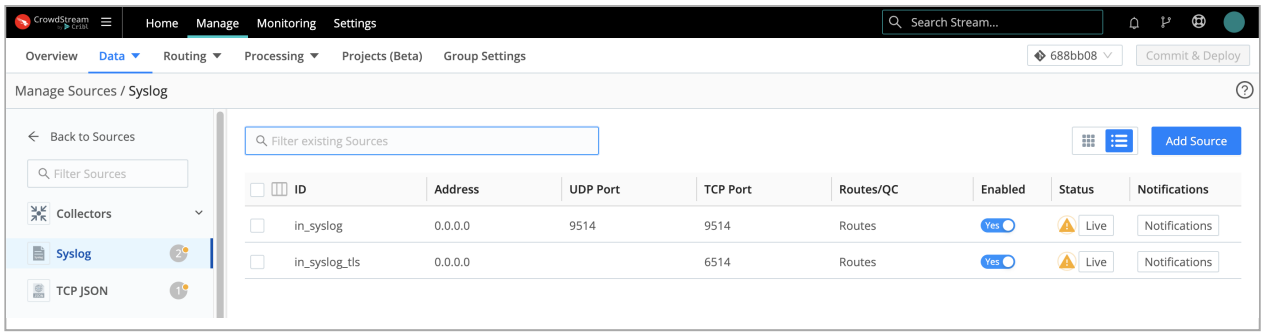

Manage Syslog Sources UI

You then configure (or reconfigure) the Source in a modal like this:

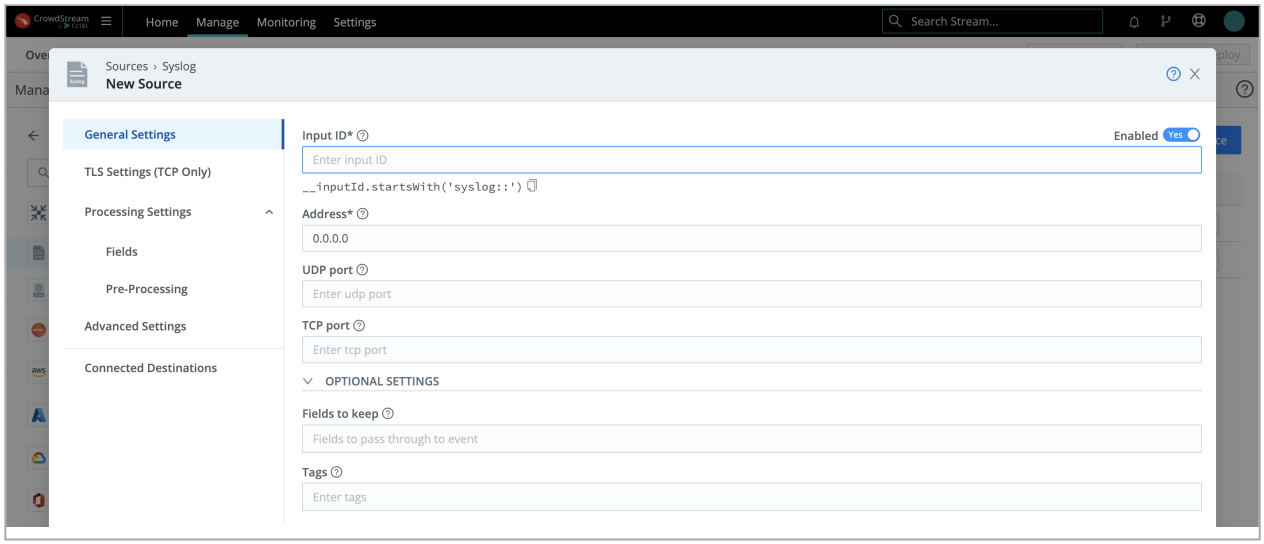

Syslog config modal

For More Information

- Sources
- Using Datagens
- QuickConnect
- Routes

Configure a Destination

A CrowdStream Destination is a model of a downstream receiver of events, enabling you to configure authentication and/or other needed parameters.

As with Sources, you can configure multiple instances of a given Destination type, each with different parameters. You can attach processing that's specific to each instance. CrowdStream provides the following Destinations:

- CrowdStrike Falcon LogScale – Set up your LogScale endpoint, token, and other parameters here.
- Amazon S3 Compatible Stores – Route full-fidelity data to cost-effective storage for later replay and analysis.
- Data Lakes > Amazon S3 – Store full-fidelity data for later retrieval or analysis. Compatible with Cribl Search (a separate product).
- DevNull – This output simply consumes and discards events, to facilitate development and testing.

Using QuickConnect

To connect a configured Source to a Destination tile already present on the right, just drag from the Source and drop the connector onto the Destination. A pop-up will prompt you to configure the connection via a Passthru, Pipeline or Pack (explained below).

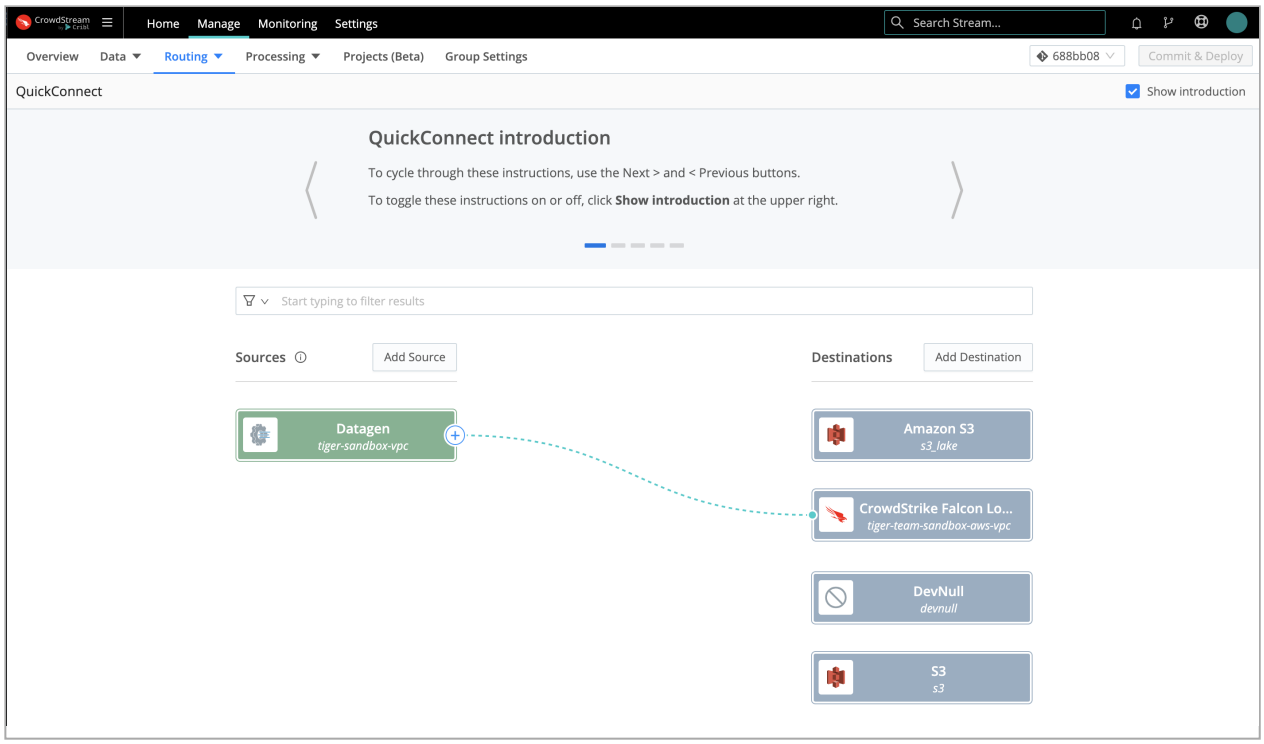

Multiple Destinations added to QuickConnect

To configure (or reconfigure) the Destination, hover over its tile and click the **Configure** button. For multiple Destinations of the same type, tiles will display stacked until you hover over the stack.

To add a new Destination, click the **Add Destination** button on the right (Destinations) side. In the resulting right drawer, search for and click your desired Destination type to begin configuring a new instance of that

Destination.

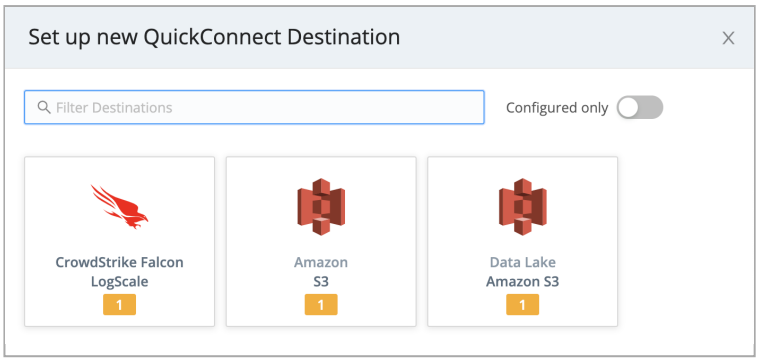

Selecting additional Destinations in QuickConnect

Using Data Routes

In the Routing UI, first click **Data** > **Destinations**. On the resulting **Manage Destinations** page, search for your desired Destination type, then click its tile to begin configuring it.

(After you click through to a Destination, the same set of peer Destinations will be available in the left nav.)

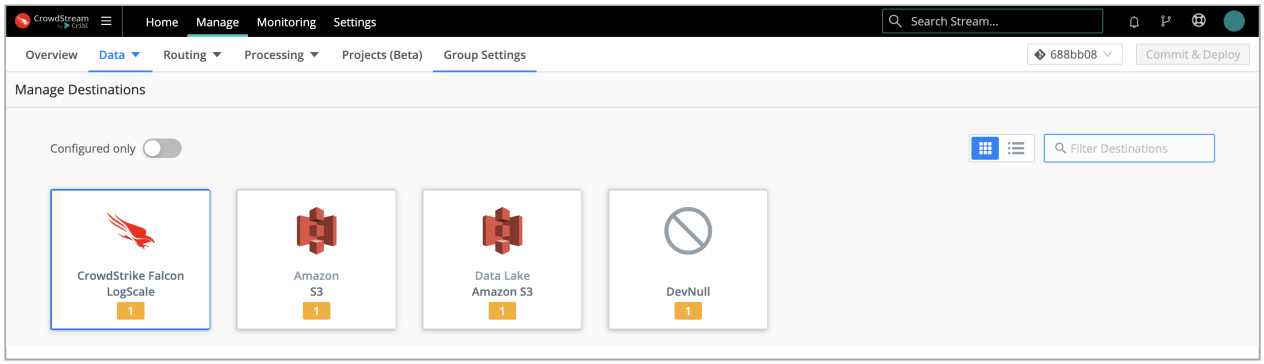

Manage Destinations page

Click an existing Destination's row here to access its configuration, or click **Add Destination** to configure a new instance of that Destination.

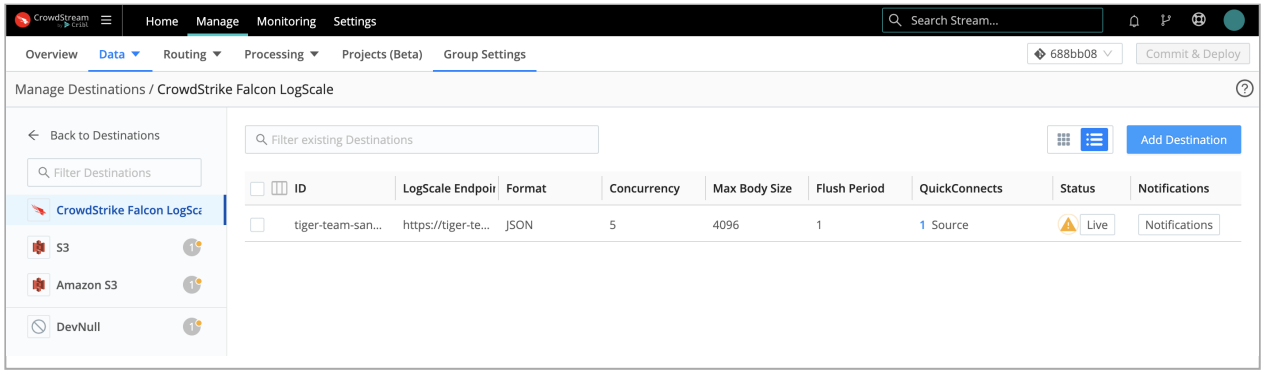

Manage LogScale Destinations UI

You then configure (or reconfigure) the Destination in a modal like this:

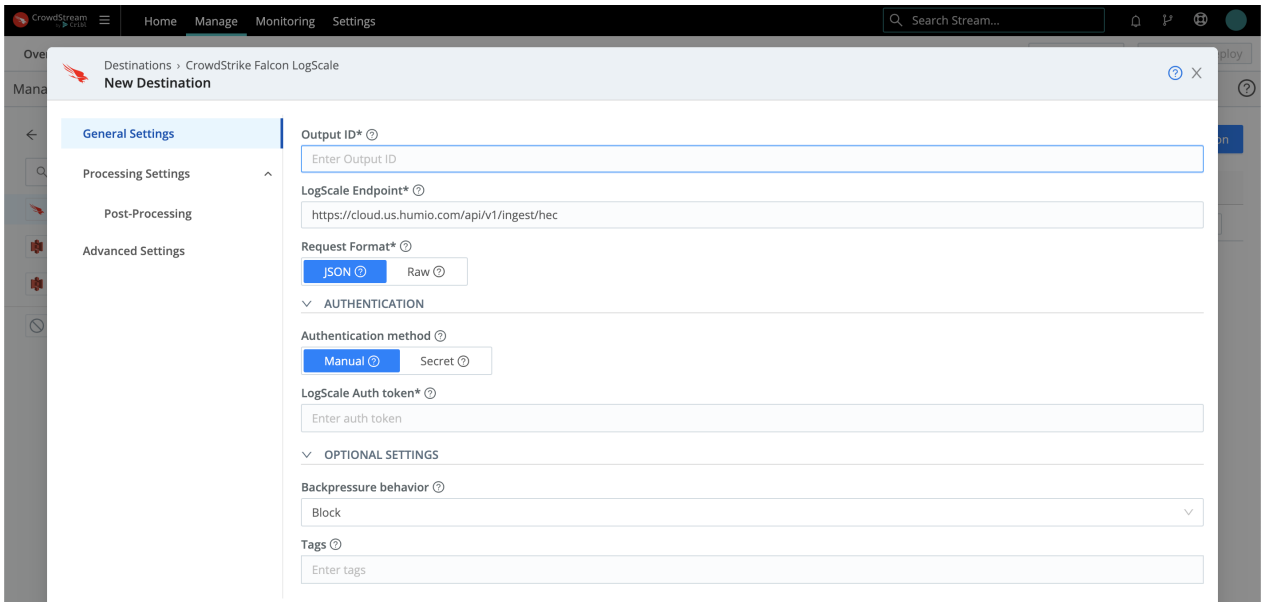

LogScale config modal

For More Information

- See the individual Destination topics linked at the head of this section.

Connect: Passthru, Pipeline, or Pack

In QuickConnect, as soon as you drag and drop a Source -> Destination connection, a pop-up dialog will prompt you to select a connection type: **Passthru**, **Pipeline**, or **Pack**. (In Data Routes, you'll make the same choices elsewhere.)

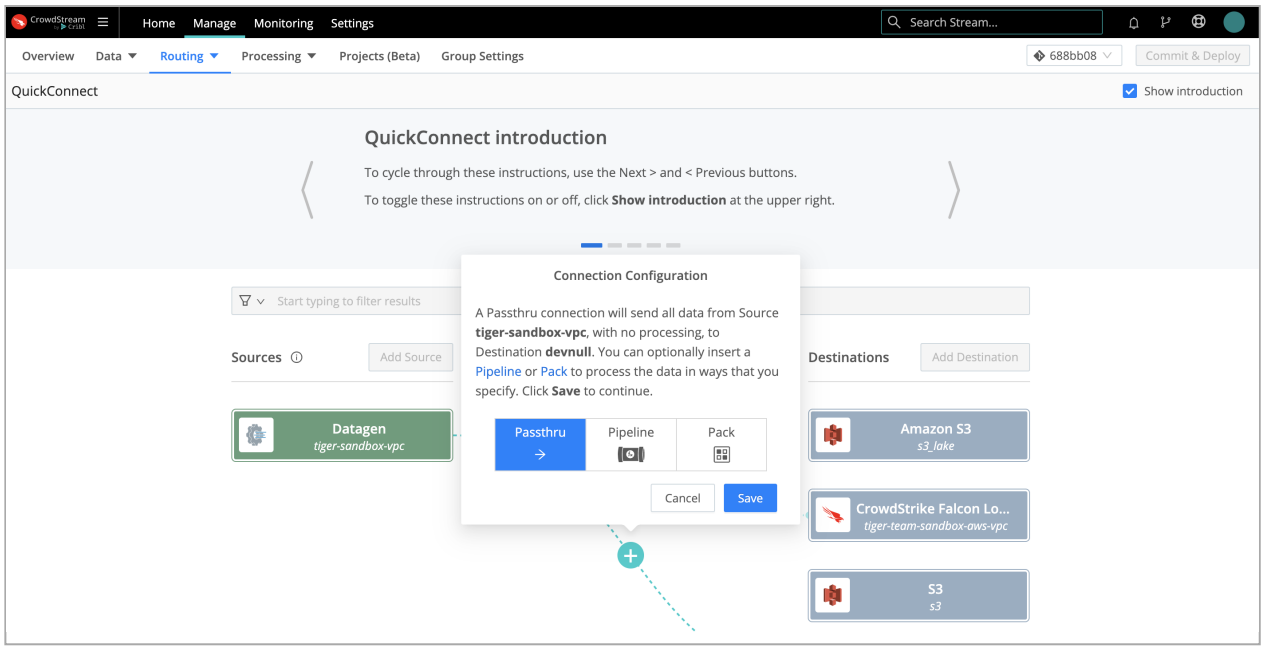

Connection-type selector in QuickConnect

What are these options?

- A **Passthru** establishes a simple direct connection between a Source -> Destination pair.
- A Pipeline hosts a stack of Functions to process your data, in the order you arrange them.
- A Pack is a microcosm of a whole CrowdStream configuration, designed to share configs between Worker Groups or deployments. A Pack can encapsulate its own Pipelines, Routes, Knowledge libraries, and sample data (but not data Sources or Destinations). A Pack can snap in wherever you can use a Pipeline.

So let's unpack Pipelines, where you'll define most of your event processing.

Pipeline Options

When you first create a new Pipeline, it's empty, making it equivalent to **Passthru**. CrowdStream provides a set of out-of-the-box Pipelines for specific purposes. As you can see below, one of these is a **passthru** Pipeline. This similarly contains no Functions – making it the Data Routes UI's equivalent of QuickConnect's **Passthru** button.

For these reasons, it's easy to start with an empty Pipeline, and then add Functions as you need them.

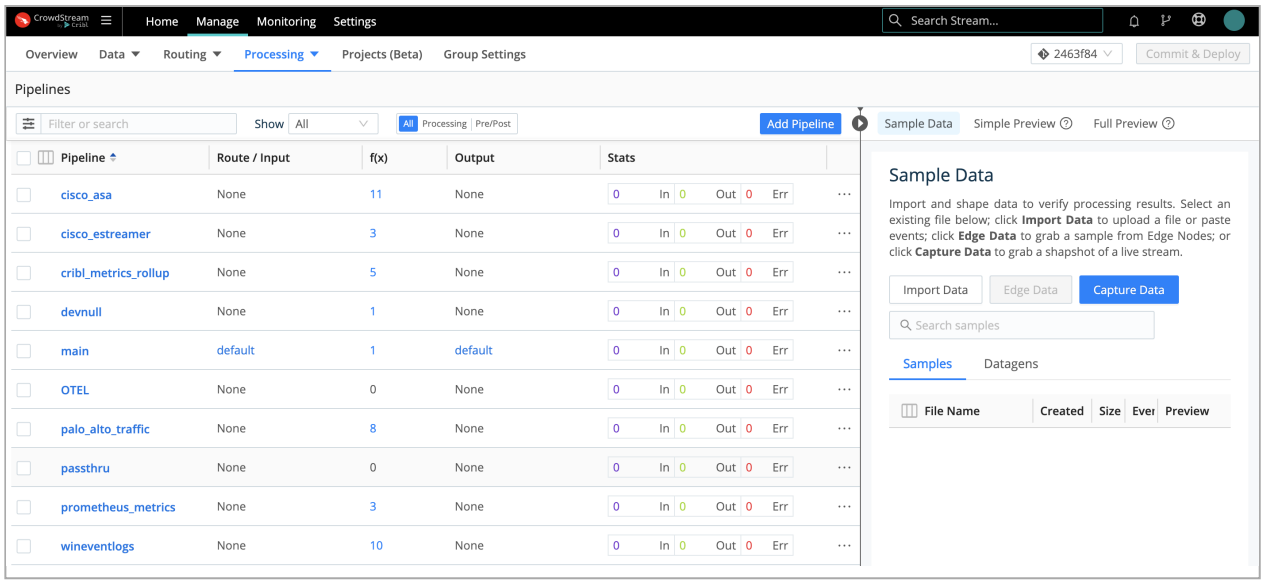

Pipelines Shipped with CrowdStream

A Pipeline, as you populate it, is a stack of processing Functions and optional comments. Use the accordions on the left to expand or collapse each Function. Use the sliders on the left to enable/disable each Function – preserving structure as you develop and debug.

Use the right **Sample Data** pane to preview how the Pipeline's current state transforms a set of events. (Controls here enable you to capture live data, save it to sample or Datagen files, and reload those files.)

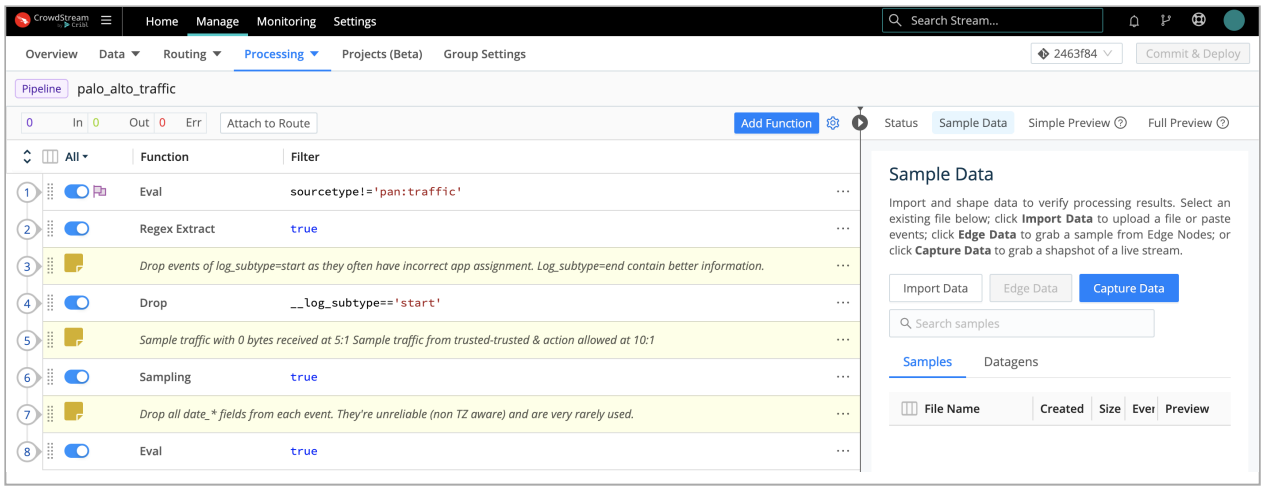

A Pipeline's Functions stack

Although you'll configure most data shaping in processing Pipelines between Sources and Destinations, you can also attach a pre-processing Pipeline to any Source instance, and a post-processing Pipeline to any Destination instance. Use these options when you need to "condition" the specific data type handled by a particular inbound or outbound integration.

Connect via QuickConnect

To select a connection type in QuickConnect, click the appropriate button in the pop-up dialog shown above. To accept the default **Passthru** option, just click **Save**. Your Source and Destination will now be connected.

If you select **Pipeline**, you'll see an **Add Pipeline to Connection** modal. Here, you can click to select an existing Pipeline, or click **Add Pipeline** to define a new one. Then click **Save** here to establish the connection.

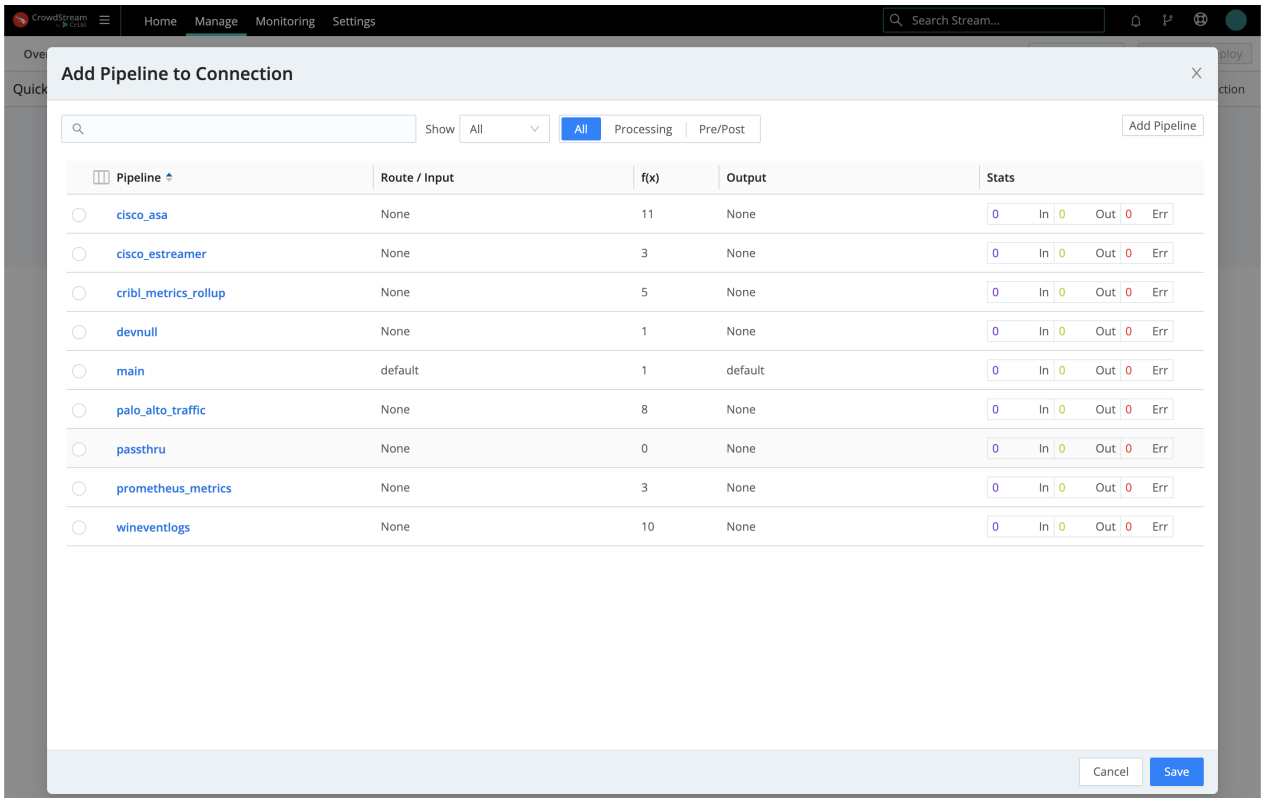

Add Pipeline to Connection modal

Selecting **Pack** opens an **Add Pack to Connection** modal that works exactly the same way.

Whichever option you choose here, your connection between this Source and Destination is now complete.

> To get data flowing, jump ahead to commit and deploy your new configuration.

Connect via Data Routes

The Data Routes UI enables you to finely configure multiple, interdependent connections between Sources and Destinations. Events clone and cascade across a Routing table, based on the filtering rules and sequence you define.

In exchange for this flexibility, you sacrifice QuickConnect's one-stop, snap-together UI metaphor. After configuring your Sources and Destinations – which you've already done above – you need to connect them

by separately setting up at least one Pipeline and one Route.

Pipelines Access

From a Group's **Manage** tab, select **Processing** > **Pipelines**. In addition to the minimal **passthru** Pipeline identified above, other simple building blocks here include **main** (which initially contains only a simple Eval Function) and **devnull** (which contains a single Function that just drops events).

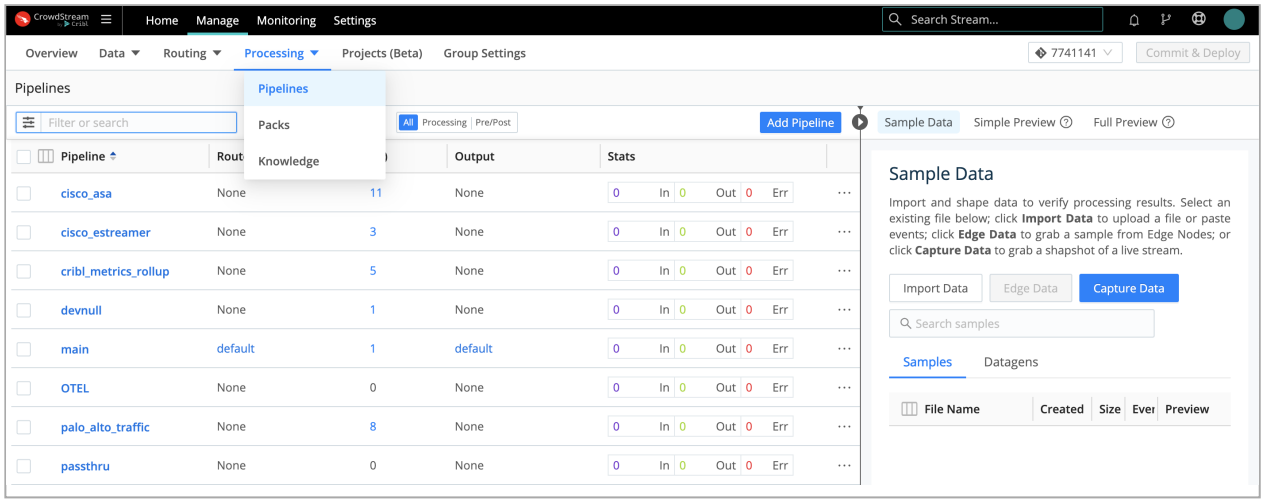

Routing to Pipelines

Out-of-the-box Pipelines are already connected to Routes. When you click into a Pipeline, you can hover to display the connected Route, as shown here. But as our final connection step, let's next look at how to connect up everything (Source, Pipeline, Destination) in a Route.

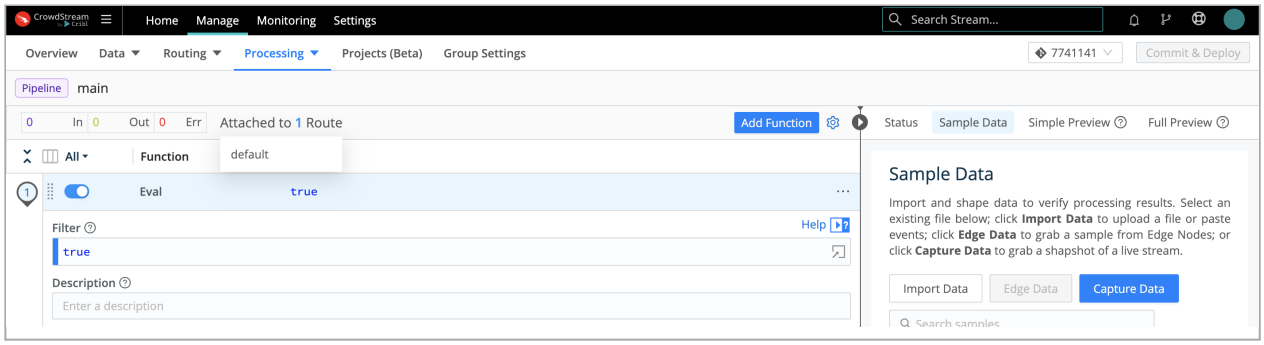

Checking Pipeline's Route connection

Configure a Route

In the Data Routes UI, a Route is where you complete a data-flow connection. Each Route connects exactly one Pipeline with exactly one Destination.

This combination can consume data from one, multiple, or all the Sources you've configured on the Data Routes side. (QuickConnect Sources are separate, but you can open those Sources' configs to move them to the Data Routes UI.) This is governed by the filtering we'll see below.

To open the Routing table, from a Group's **Manage** tab, select **Routing** > **Data Routes**.

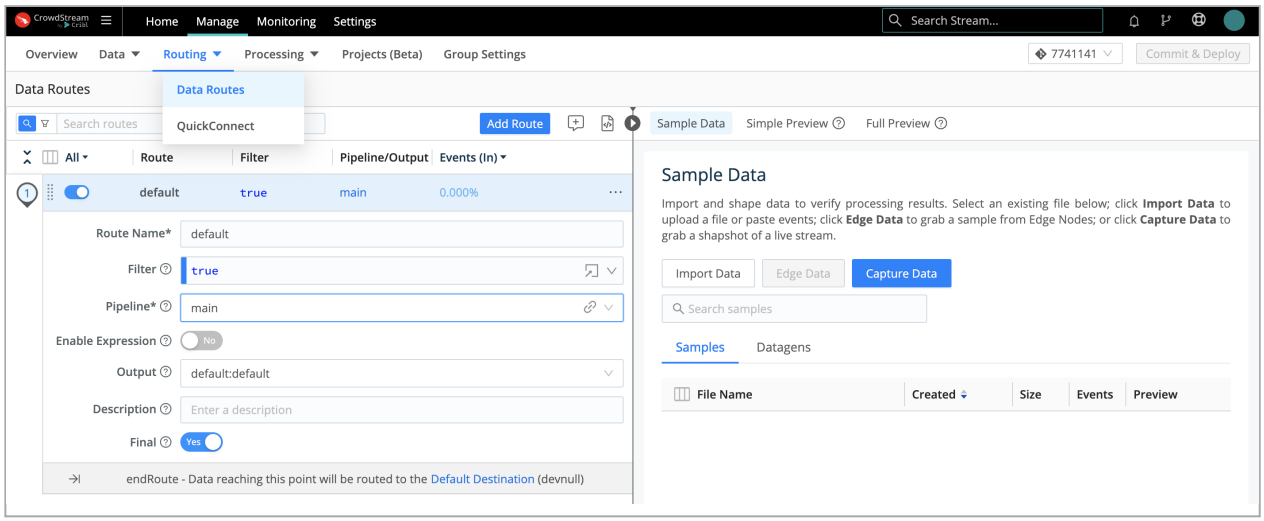

Accessing the Routing table

As you can see, CrowdStream ships with one starter Route named **default**. It's configured as follows:

- The **Filter** expression is set to **true**. This simple, default expression makes data from **all** active Sources available to this Route. (See finer filtering options below.)
- The **Pipeline** drop-down is where you set the 1:1 Pipeline:Route connection. This starter Route's Pipeline defaults to **main**, but you can select any one other configured Pipeline.
- The **Output** drop-down defines the single Destination for this Pipeline:Route connection. If this isn't already set to your LogScale Destination, you'll most likely want to select that here. (Note that each option displayed on this list corresponds to the unique, arbitrary **Output ID** set on one **instance** of a Destination type. So some names might initially be unfamiliar.)

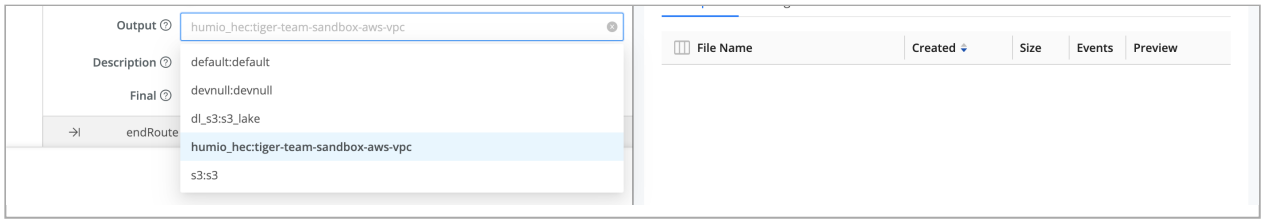

Changing a Route's Destination (Output)

To get data flowing, jump ahead to commit and deploy your new configuration.

Filter a Route's Input Data

When you want a Route to ingest data from only one Source, or a subset of Sources, you expand its **Filter** expression beyond the default **true** catch-all.

Filter is itself a drop-down. Open it to select among typeahead suggestions for several common inbound data types.

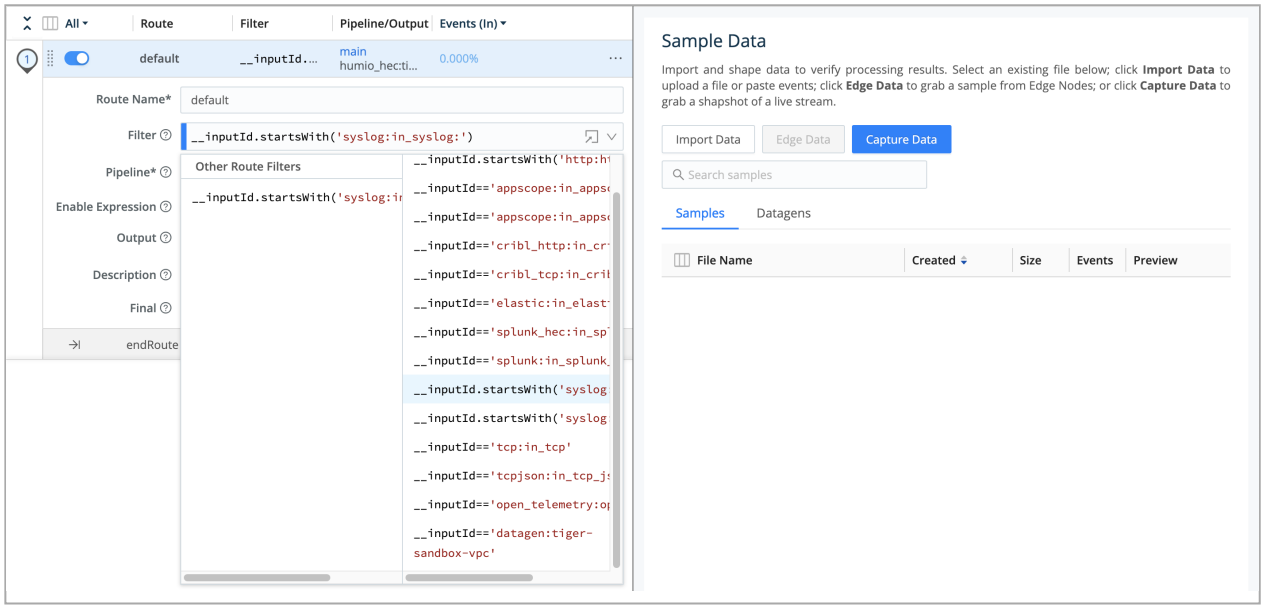

Tuning a Route's Filter expression

You can select one of these expressions and then modify it, using the same `__inputId` syntax. In the example expression below, note that the identifier after the `:` is – as with the **Output** options we saw above – the arbitrary name of one Syslog Source instance:

```
__inputId.startsWith('syslog:in_syslog:')
```

For More Information

- Cribl Expression Syntax > Filters

Commit/Deploy Config Changes

To get data flowing as you expect, you'll always need to use CrowdStream's built-in Git version-control integration to commit your configuration changes and deploy them to your event-processing Worker instances. After any significant configuration change, you'll be prompted with Group-level **Commit**/**Deploy** buttons like this at the upper right:

Commit & Deploy prompt

Depending on your version-control settings, **Commit** and **Deploy** might appear as separate buttons:

Commit and Deploy as separate buttons

Clicking either flavor of the **Commit** button will display a confirmation modal like this. You can either accept the default commit message, or enter a specific message. Then be sure to select the appropriate buttons to both commit **and** deploy your changes.

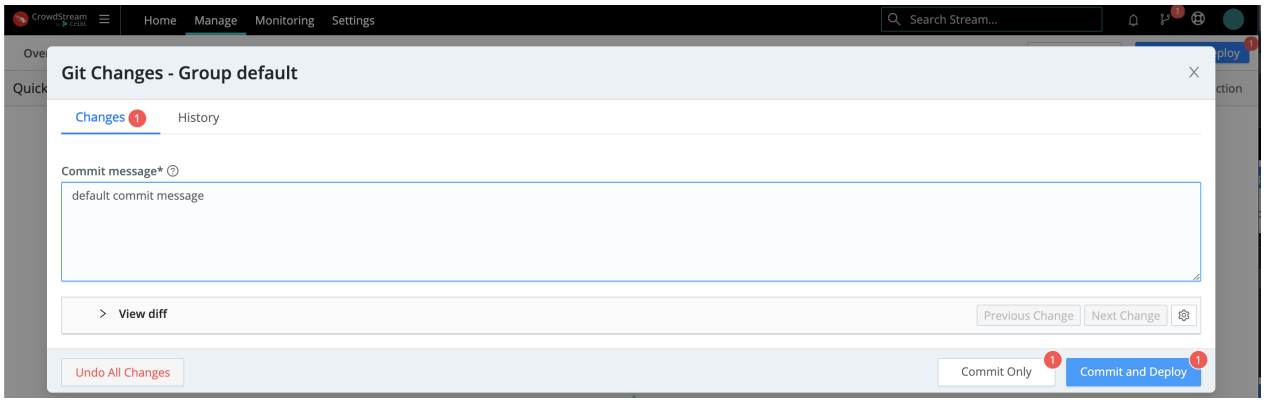

Confirming a commit

Data should now start flowing through the Workers. (You can check this by selecting the top nav's **Monitoring** link. This takes you to read-only dashboards, so remember to click **Manage** when you want to return to configuration options.)

In return for clearing all the red-dot prompts, your reward will be one more red dot, on the top nav's CrowdStream-wide Version Control button. This is because CrowdStream sees the preceding deploy to Workers as a change to record (commit) on the **Leader's** configuration.

Leader commit prompt

This top-level commit isn't necessary to enable data flow, but it backs up and safeguards your overall configuration. Click the button to display one final confirmation prompt:

Confirming a commit on the Leader

Click **Commit** here, and your configuration is complete!

For More Information

- Version Control > Committing Changes
- Version Control > Collapse Actions
- Monitoring

Moving Ahead with CrowdStream

To quote a fundamental treatise on DevSecOps: you know all the rules by now, and the fire from the ice. To delve deeper into CrowdStream's data shaping and routing options, follow these links to conceptual overview and reference topics.

For More Information

- Stream Basic Concepts
- Event Model
- Data Preview
- Functions
- Knowledge Objects

- Distributed Quick Start – This tutorial's middle sections walk you through configuring Pipelines, Functions, and Routes, and scaling Workers, via the Routing UI
- Techniques & Tips
- Setup Guides
- API, Expressions, etc. Reference

4. Deploying Cribl Stream Software

4.1. Planning and Sizing

4.1.1. Deployment Planning

There are at least **three** key factors that will determine the type of Cribl Stream deployment in your environment:

- Amount of Incoming Data: This is defined as the amount of data planned to be ingested per unit of time. E.g., how many MB/s or GB/day?
- Amount of Data Processing: This is defined as the amount of processing that will happen on incoming data. E.g., are there a lot of transformations, regex extractions, parsing functions, field obfuscations, etc.?
- Routing and/or Cloning: Is most data going to a single destination, or is it being cloned and routed to multiple places? This is important because destination-specific serialization tends to be relatively expensive.

These factors are covered in detail in Sizing and Scaling, and in our Architectural Considerations introduction to reference architectures.

Type of Deployment

- Use Cribl Cloud to quickly launch a Cribl-hosted deployment of the combined Cribl applications suite (Stream, Edge, and Search). With this option, Cribl assumes responsibility for provisioning and managing all infrastructure, on your behalf.
- Use Single-Instance Deployment when incoming data volume is low, and/or amount of processing is light.
- Use Distributed Deployment to accommodate increased load. (See Sizing and Scaling for detailed guidance. See Bootstrap Workers from Leader to streamline Workers' deployment via scripting.)

OS and System Requirements

Leader and Worker Nodes should have sufficient CPU, RAM, network, and storage capacity to handle your **specific** workload. It's very important to test this before deploying to production.

> In the table below, we assume that **1 physical core is equivalent to 2 virtual/hyperthreaded CPUs (vCPUs)**. This corresponds to Intel/Xeon or AMD processors. On Graviton2/ARM64 processors, where 1 core is equivalent to 1 vCPU – but with higher capacity – sizing can be slightly different. For details, see Sizing and Scaling and Requirements.

REQUIREMENT TYPE	REQUIREMENTS DETAILS
Minimum Leader and Worker Nodes.	**OS**: Linux: RedHat, CentOS, Ubuntu, AWS Linux, Suse (64bit) **System**: +4 physical cores, +8GB RAM, 5GB free disk space (more if persistent queuing is enabled on Workers)
Recommended Leader Node	**OS**: Linux: RedHat, CentOS, Ubuntu, AWS Linux, Suse (64bit) **System**: +4 physical cores, +8GB RAM, 5GB free disk space
Recommended Worker Nodes	**OS**: Linux: RedHat, CentOS, Ubuntu, AWS Linux, Suse (64bit) **System**: +8 physical cores, +32GB RAM, 5GB free disk space.

Browser Requirements

Most modern browsers will work, but here are the minimum supported versions as of this publication date: Firefox 65+, Chrome 70+, Safari 12+, Microsoft Edge.

Cluster Installation/Configuration Checklist

This section compiles basic checkpoints for successfully launching a distributed cluster.

1. Provision Hardware

- 1 Leader Node (see specs/requirements in OS and System Requirements above).
- 4 Worker Nodes (see specs/requirements in OS and System Requirements above).
- Acquire an evaluation (Sales Trial) License from the Cribl Sales Team.

2. Configure Leader Node

- Install `git` if not present (e.g., `yum install git`).
- Open the initial ports listed below:

DEFAULT PORT	PURPOSE
TCP:4200 or TCP:9000	Heartbeat/Metrics
TCP:9000	Cribl UI

- Download, Install, and Launch Cribl.
- Enable Start at Boot.
- Configure as a Leader.
- Confirm Worker Processes Settings at `-2` (via **Settings** > **Global Settings** > **System** > **Manage Processes**).
- Install License.
- Change the default auth token value.

3. Configure Worker Nodes

- Enable GUI Access. Administrators will need to connect to the following port on each node:

DEFAULT PORT	PURPOSE
TCP:9000	Cribl UI

  - Download, Install, and Launch Cribl.
  - Enable Start at Boot.
  - Configure as a Worker. (Give each Worker the (arbitrary) tag `POV`.)
  - Confirm Worker Processes Settings at `-2` (via **Settings** > **Global Settings** > **System** > **Manage Processes**).
  - Install License.

4. Map Workers to Groups

- On the Leader Node, create a Worker Group.
  - Name the Worker Group (arbitrarily) `POV`.

- On the Leader Node, confirm that workers are connecting.
  - From the Leader Node's top menu, select **Workers**.

- Map Workers to `dev` Worker Groups.
  - Use the Filter: `cribl.tags.includes('POV')`.

5. Other

If you will be using Cribl Stream's GeoIP enrichment feature, install the MaxMind database onto the Cribl Stream Leader and all Worker Nodes.

4.1.2. Sizing and Scaling

A Cribl Stream installation can be scaled **up** within a single instance and/or scaled **out** across multiple instances. Scaling allows for:

- Increased data volumes of any size.
- Increased processing complexity.
- Increased deployment availability.
- Increased number of destinations.

We offer specific examples below, and introduce reference architectures in Architectural Considerations.

Scale Up

A Cribl Stream installation can be configured to scale up and utilize as many resources on the host as required. In a single-instance deployment, you govern resource allocation through the **Settings** > **System** > **Worker Processes** section.

In a distributed deployment, you allocate resources per Worker Group. Navigate to **Manage** > `group-name` > **Group Settings** > **Worker Processes**.

Either way, these controls are available:

- **Process count**: Indicates the number of Worker Processes to spawn. Positive numbers specify an absolute number of Workers. Negative numbers specify a number of Workers relative to the number of CPUs in the system. like this: {`<number of CPUs available>` minus `<this setting>`}. The default is `-2`.

  Cribl Stream will correct for an excessive + or - offset, or a `0` entry, or an empty field. Here, it will guarantee at least the **Minimum process count** set below, but no more than the host's number of CPUs available.

- **Minimum process count**: Indicates the minimum number of Worker Processes to spawn. Overrides the **Process count**'s lowest result. A `0` entry is interpreted as "default," which here yields `2` Processes.

- **Memory (MB)**: Amount of memory available to each Worker Process, in MB. Defaults to `2048`. (See Estimating Memory Requirements below.)

For changes in any of the above controls to take effect, you must click the **Manage Processes** page's **Save** button, and then restart the Cribl Stream server via **Settings** > **Global Settings** > **System** > **Controls** > **Restart**. In a distributed deployment, also deploy your changes to the Groups.

For example, assuming a Cribl Stream system running on Intel or AMD processors with 6 physical cores hyperthreaded (12 vCPUs):

- If **Process count** is set to `4`, then the system will spawn exactly 4 processes.
- If **Process count** is set to `-2`, then the system will spawn 10 processes (12-2).

Scale Out

When data volume, processing needs, or other requirements exceed what a single instance can sustain, a Cribl Stream deployment can span multiple Nodes. This is known as a distributed deployment. Here, you can centrally configure and manage Nodes' operation using one administrator instance, called the Leader.

It's important to understand that Worker Processes operate in parallel, i.e., independently of each other. This means that:

1. Data coming in on a single connection will be handled by a single Worker Process. **To get the full benefits of multiple Worker Processes, data should come in over multiple connections.**
   E.g., it's better to have 5 connections to TCP 514, each bringing in 200GB/day, than one at 1TB/day.

2. Each Worker Process will maintain and manage its own outputs. E.g., if an instance with 2 Worker Processes is configured with a Splunk output, then the Splunk destination will see 2 inbound connections.
   For further details, see Shared-Nothing Architecture.

Capacity and Performance Considerations

As with most data processing applications, Cribl Stream's expected resource utilization will be proportional to the type of processing that is occurring. For instance, a Function that adds a static field on an event will likely perform faster than one that applies a regex to find and replace a string. Currently:

- A Worker Process will utilize up to 1 physical core (encompassing either 1 or 2 vCPUs, depending on the processor type.
- Processing performance is proportional to CPU clock speed.
- All processing happens in-memory.
- Processing does not require significant disk allocation.

Throughout these guidelines, we assume that **1 physical core** is equivalent to:

- 2 virtual/hyperthreaded CPUs (vCPUs) on Intel/Xeon or AMD processors.
- 1 vCPU on Graviton2/ARM64 processors.

> Overall guideline: Allocate 1 physical core for each 400GB/day of IN+OUT throughput.

Examples

Estimating Number of Cores

In estimating core requirements – per processor type, it's important to distinguish among vCPUs versus physical cores.

Intel/Xeon/AMD Processors with Hyperthreading Enabled

To estimate the number of cores needed: Sum your expected input and output volume, then divide by 400GB per day per physical core.

- Example 1: 100GB IN -> 100GB out to each of 3 destinations = 400GB total = 1 physical core (or 2 vCPUs).
- Example 2: 3TB IN -> 1TB out = 4TB total = 10 physical cores (or 20 VCPUs).
- Example 3: 4 TB IN -> full 4TB to Destination A, plus 2 TB to Destination B = 10TB total = 25 physical cores (or 50 vCPUs).

Graviton2/ARM64 Processors

Here, 1 physical core = 1 vCPU, but overall throughput is ~20% higher than a corresponding Intel or AMD vCPU. So, to estimate the number of cores needed: Sum your expected input and output volume, then divide by 480GB per day per vCPU.

- Example 1: 100GB IN -> 100GB OUT to each of 3 destinations = 400GB total = 1 physical core.
- Example 2: 3TB IN -> 1TB OUT = 4TB total = 8 physical cores.
- Example 3: 4 TB IN -> full 4TB OUT to Destination A, plus 2 TB OUT to Destination B = 10TB total = 21 physical cores.

Remember to also account for an additional core per Worker Node for OS/system overhead.

Estimating Number of Nodes

When sizing the number of Stream Worker Nodes, there are two other factors to consider:

- Number of Nodes sized for peak workloads;
- Number of Nodes offline.

This will allow you to create a robust Cribl Stream environment that can handle peak workloads even during rolling restarts and maintenance downtime.

General guidance includes:

- Per Node, Cribl recommends at least 4 ARM vCPUs, or at least 8 x86 vCPUs (i.e., 4 cores with hyperthreading). Below this theshold, the OS overhead from reserved threads claims an excessive percentage of your capacity.
- Per Node, Cribl recommends no more than 48 ARM vCPUs, or 48 x86 vCPUs (i.e., 24 cores with hyperthreading). This upper limit simply avoids wasting vCPU capacity due to running out of available sockets. It also handles disk I/O requirements when persistent queueing engages.
- Plan to successfully handle peak workloads even when 20% of your Worker Nodes are down. This allows for OS patching, and for conducting rolling Stream upgrades and restarts.
- For customers in the 5–20 TB range, size for 4-8 Worker Nodes per Worker Group.

Sizing Example for a Deployment

Step 1: Calculate the total inbound + outbound volume for a given deployment.

In this example, your deployment has 6TB/day streaming into Worker Nodes for a given site, and this data is being routed to both cheap mass storage (S3) and to your system of analysis – 10 TB/day going out.

Stream Workers must have enough CPUs to handle a total of 16 TB per day IN+OUT.

Step 2: From the available server configurations, size the correct number of Nodes for your environment.

You are considering an AWS Compute-optimized Graviton EC2 instance, with either 16-vCPU or 8-vCPU options. We'll walk you through how to calculate based on each option.

Using Graviton 16-vCPU instances

- Each Node would have 15 vCPUs available to Cribl Stream, each at 480 GB per day per vCPU.
- 15 vCPUs per Node at 480 GB per day per CPU = 7200 GB/day per Node.
- 7200 GB/day divided by 1024 GB/TB = 7 TB/day.
- To handle the workload of 16 TB/day, you need 3 Nodes. Make sure you always round up.

- 20% of 3 Nodes ≈ 1 Node. Make sure you always round up. To provide for redundancy during patching, maintenance, or restarts, you need one additional server.

With 4x 16-vCPU Nodes, you have 28 TB/day capacity, and can support 21 TB/day with one Node down.

Using Graviton 8-vCPU instances

- Each Node would have 7 vCPUs available to Stream, each at 480 GB per day per vCPU.
- 7 vCPUs per Node at 480 GB per day per CPU = 3360 GB/day per Node.
- 3360 GB/day divided by 1024 GB/TB = 3.3 TB/day.
- To handle the workload of 16 TB/day, you need 5 Nodes. Make sure you always round up.
- 20% of 5 Nodes = 1 Node. To provide for redundancy during patching, maintenance, or restarts, you need one additional server.

With 6x8-vCPU Nodes, you have 19.8 TB/day capacity, and can support 16.5 TB/day with one Node down.

If you are optimizing for price, AWS pricing is linear based on the total number of cores. So six 8-vCPU systems are roughly 75% the cost of four 16-vCPU systems.

If you are optimizing for potential future expansion, the 4x16-vCPU systems would offer ideal additional capacity.

Estimating Memory Requirements

The general guideline for memory allocation is to start with the default 2048 MB (2 GB) per Worker Process, and then add more memory as you find that you're hitting limits.

Memory use is consumed per component, per Worker Process, as follows:

1. Lookups are loaded into memory.
   (Large lookups require extra memory allocation – see Memory Sizing for Large Lookups.)
2. Memory is allocated to in-memory buffers to hold data to be delivered to downstream services.
3. Stateful Functions (Aggregations and Suppress) consume memory proportional to the rate of data throughput.
4. The Aggregations Function's memory consumption further increases with the number of **Group by**'s.
5. The Suppress Function's memory use further increases with the cardinality of events matching the **Key expression**. A higher rate of distinct event values will consume more memory.

Recommended AWS, Azure, and GCP Instance Types

You could meet the requirement above with multiples of the following instances:

AWS – Intel processors, Compute Optimized Instances. For other options, see here.

MINIMUM	RECOMMENDED
c5d.2xlarge (4 physical cores, 8vCPUs) c5.2xlarge (4 physical cores, 8vCPUs)	c5d.4xlarge or higher (8 physical cores, 16vCPUs) c5.4xlarge or higher (8 physical cores, 16vCPUs)

AWS – Graviton2/ARM64 processors, Compute Optimized Instances. For other options, see here.

MINIMUM	RECOMMENDED
c6g.2xlarge (8 physical cores, 8vCPUs) c6gd.2xlarge (8 physical cores, 8vCPUs)	c6g.4xlarge or higher (16 physical cores, 16vCPUs) c6gd.4xlarge or higher (16 physical cores, 16vCPUs)

Azure – Compute Optimized Instances

MINIMUM	RECOMMENDED
Standard_F8s_v2 (4 physical cores, 8vCPUs)	Standard_F16s_v2 or higher (8 physical cores, 16vCPUs)

GCP – Compute Optimized Instances

MINIMUM	RECOMMENDED
c2-standard-8 (4 physical cores, 8vCPUs) n2-standard-8 (4 physical cores, 8vCPUs)	c2-standard-16 or higher (8 physical cores, 16vCPUs) n2-standard-16 or higher (8 physical cores, 16vCPUs)

In all cases, reserve at least 5GB disk storage per instance, and more if persistent queuing is enabled.

Measuring CPU Load

You can profile CPU usage on individual Worker Processes.

Single-Instance Deployment

Go to **Settings** > **Global Settings** > **System** > **Worker Processes**, and click **Profile** on the desired row.

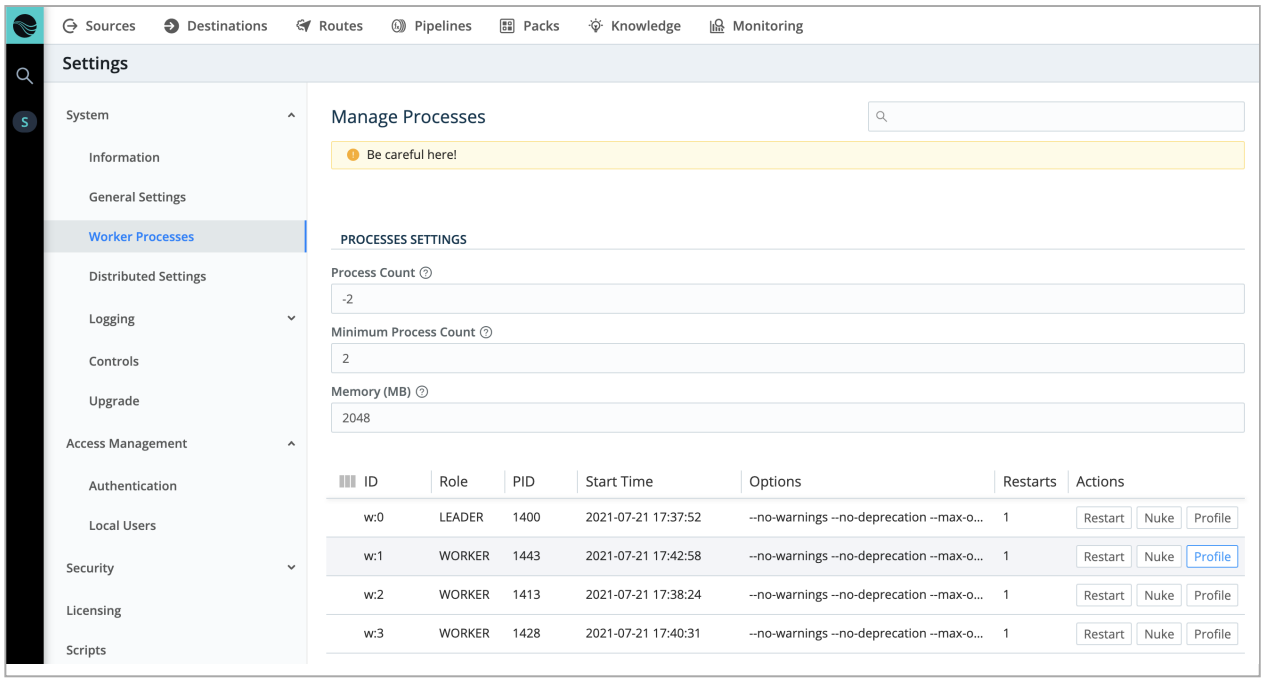

Worker CPU profiling (single-instance)

Distributed Deployment

This requires a few more steps:

1. Enable Worker UI Access if you haven't already.
2. From the top nav, select **Manage** > **Workers**.
3. Click on the **GUID** link of the Worker Node you want to profile. (You will now see that GUID in a **Worker** drop-down at the top left, above a purple header that confirms that you've tunneled through to the Worker Node's UI.)
4. Select **Settings** from that Worker Node's top nav.
5. Select **System** > **Worker Processes** from the resulting side nav.
6. Click **Profile** on the desired Worker Process.

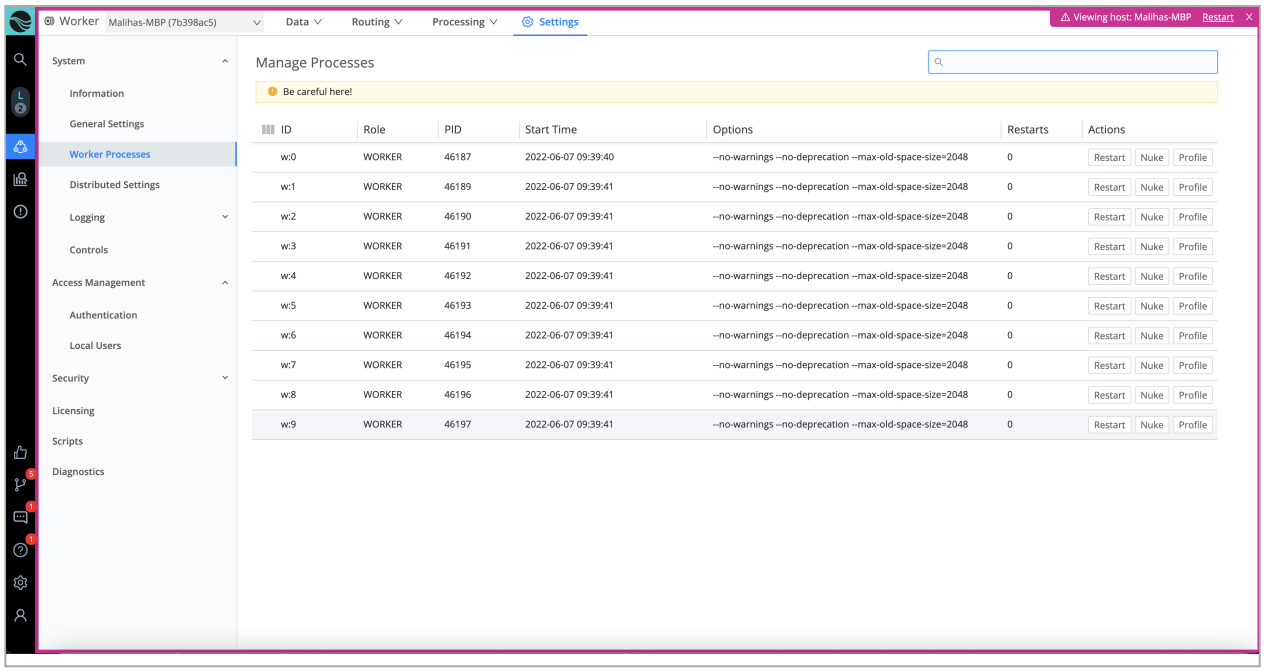

Worker CPU profiling (distributed)

Generating a CPU Profile

In either a single-instance or distributed deployment, you will now see a **Worker Process Profiler** modal.

The default **Duration (sec)** of `10` seconds is typically enough to profile continuous issues, but you might need to adjust this – up to several minutes – to profile intermittent issues. (Longer durations can dramatically increase the lag before Cribl Stream formats and displays the profile data.)

Click **Start** to begin profiling. After the duration you've chosen (watch the progress bar), plus a lag to generate the display, you'll see a profile something like this:

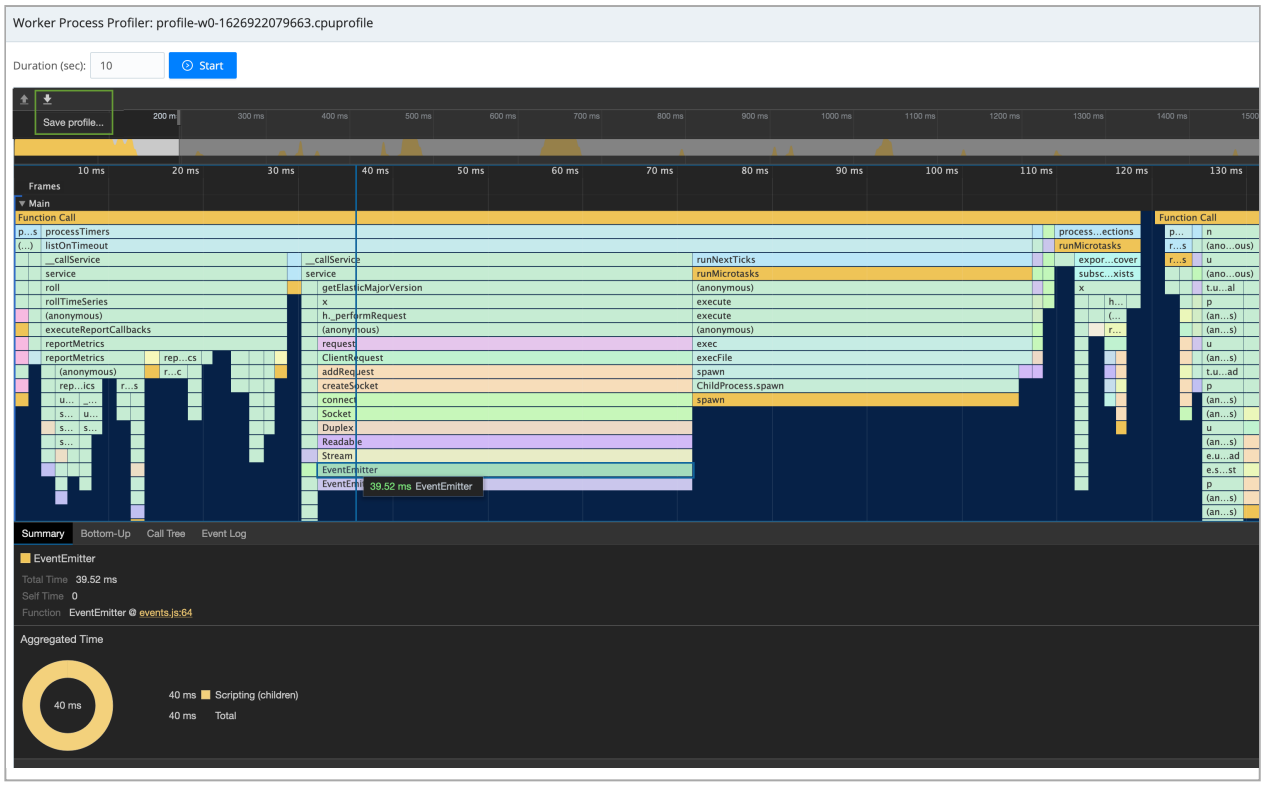

Worker CPU profile

Below the graph, tabs enable you to select among **Summary**, **Bottom-Up**, **Call Tree**, and **Event Log** table views.

To save the profile to a JSON file, click the very small tiny minuscule **Save profile** (🖫) button we've highlighted at the modal's upper left.

Whether you've saved or not, when you close the modal, you'll be prompted to confirm discarding the in-memory profile data.

See also: Diagnosing Issues > Including CPU Profiles.

4.1.3. Architectural Considerations

This guide introduces Cribl Stream reference architectures by outlining some considerations to keep in mind when architecting your deployment. It covers different potential architectures, with each approach's advantages, limitations, and alternatives.

Architecting a deployment is always about finding the balance between cost versus risk. Once you're familiar with the contents of this guide, you'll be able to consciously make decisions about where your deployment should sit on that spectrum.

> You can replay our first (42-minute) presentation of this material on our YouTube channel. Cribl plans further reference architecture presentations, which we'll announce in Community Slack.

"It Depends"

This guide is not intended to replace Sizing and Scaling, but rather to complement it by outlining the consequences of various architectural decisions. (As needed, please either read Sizing and Scaling first, or refer to it to look up concepts.)

Another great resource is Cribl's Sizing Calculator, where you can play with the numbers as you're considering different deployment options.

General Sizing Considerations

Some basic sizing variables are your processors, expected data throughput, and requirements for memory, disk space, connections volume, and the Stream Leader's own needs.

Processors

Your primary consideration in sizing processors is your data throughput capacity, which depends on the number of Worker Processes.

> Overall guideline: Allocate 1 physical core for each 400GB/day of IN+OUT throughput.

This can vary based on processor speeds or types. (For example, Graviton ARM processors' throughput is 20% higher than x86-64 processors' reference 400GB/day.) But in this guide's calculations, we'll assume 400GB/day IN+OUT per processor, and dig into what that really means. Please adjust your own calculations as needed.

Throughput

Where we reference total throughput capacity below: Because Cribl Stream can send events to multiple Destinations and filter out unneeded events, IN won't always be the same as OUT. For example, 400GB IN+OUT could mean 200GB IN + 200GB OUT, but it could also mean 300GB IN + 100GB OUT, or any combination of IN+OUT that adds up to 400GB/day.

Memory

Memory requirements also play into architecture considerations. Depending on what type of processing you'll be doing, those requirements might vary. You might know your memory requirements in advance. Or you might monitor memory usage and increase it as your processing complexity increases. The default of 2GB per Worker Process is a good starting point.

Disk Space

The base recommendation, 5GB of free disk space, applies to the volume where Cribl Stream is installed. Beyond that, if you choose to use Persistent Queues, you will need to calculate additional disk space – based on the velocity of your data, and your desired duration before reaching a full queue. Normally, you must define the maximum disk space a queue can use, per Worker Process, for each Source or Destination. However, if you use a separate volume for Persistent Queues, you can remove those limits, and allow the queues to take up the whole volume if needed.

Object-store Destinations use a staging directory to write out files before sending them out. If you're using one of these Destinations, please review our Amazon S3 Better Practices for sizing and architecture considerations.

In both cases, using fast disks is important, to prevent the disks from becoming bottlenecks.

Number of Connections

Beyond throughput and pipeline complexity, some resources get used for setting up and breaking down TCP connections. In the field, Cribl often sees one CPU core support 400 connections (or 200 for vCPUs), but that depends on EPS (events per second) and other demands on the system resources.

If your calculations show more than 250 connections per CPU core, you should look closer at EPS and processing complexity. In our testing, once you hit the higher end of the EPS spectrum, 150 connections per core at 100 EPS still leave almost 25% capacity in reserve for spikes.

When it comes to outgoing connections, you should also consider memory utilization if you have a lot of TCP receivers. This is because each Worker Process makes a separate connection and consumes 2-4MB of RAM. Some Destinations let you adjust the maximum number of connections.

Leader Node

All the above discussion concerns Worker Nodes, because they are the ones responsible for processing the data. The Leader Node's requirements should not need to expand beyond these initial recommendations, unless the Leader needs to manage Edge Fleets, in which case reference Cribl's Edge docs.

Finding the Balance Between Risk and Cost

Beyond your basic requirements, you should of course plan contingency capacity to support resource demands that exceed ideal circumstances.

Plan for Failure

Given the wrong circumstances, failure will happen. Your job, when architecting a deployment, is to examine the various failure scenarios and decide what level of resources you are willing to allocate to prevent failure. This is analogous to deciding how many nines of reliability you're willing to pay for.

Throughput Variability

The 400GB/day IN+OUT guidance mentioned above assumes that your data flow is relatively flat. This means you're expecting that every second, each Worker Process is handling about ~4.74MB of data IN+OUT. However, in reality, the load varies based on time of day or other system activities.

For example, you might experience higher load during business hours. Or you might have an hourly upstream process that causes spikes of activity. Also, depending on the nature of your organization, you might have certain days, or planned events, when you expect users' increased load on your systems. Then there are unplanned events, such as outages or DDoS attacks, that might lead to decreased capacity or increased demands.

Another factor to consider, if you're using Persistent Queues, is that flushing those queues will increase the total throughput demand – including on the downstream systems that need to be able to handle the burst.

Unfortunately, there are too many variables to have a generic recommendation here, but a starting point of ~10% headroom is a good idea. As we discuss in the conclusion, you'll need to test these assumptions.

Now that we're digging deeper into throughput, you should start thinking about where to set a threshold, beyond which you know your system is likely to fail. If you have data flowing into a system of analysis that can let you look at your current ingestion rate, this can be a good start.

You want to look at the busiest times, and drill down far enough to see what your historical maximum per-second throughput has been. Past performance is not guarantee of future results, but it will at least give you an idea of what to expect.

If you have new Sources, or if you don't have a good way of estimating current throughput, you'll have to make some assumptions about future behavior. In the end, take whatever you come up with for expected MB/sec throughput, add whatever safety margin you feel is appropriate, and multiply back out by 84 (24*60*60/1024) to get GB/day throughput.

Exceeding Capacity

As you are deciding how much safety margin to plan into your environment, it also helps to think through what happens when you exceed capacity. Depending on the types of Sources you have, an overloaded deployment might have different failure modes. This ranges from the possibility of immediate data loss in the case of UDP, to simple delays in the case of Pull Sources. Some Push Sources, such as Cribl Edge or Splunk Universal Forwarders, have the capacity to pause or buffer the data flow for some duration.

Single-Instance Deployment

The simplest type of deployment is single-instance. Let's look at the case of a 4 core (8 vCPUs), 16GB RAM, single-instance deployment:

RESOURCE	TOTAL	USED BY WPS	USED BY SYSTEM/API
Cores (vCPUs)	4 (8)	3 (6)	1 (2)
RAM	16GB	12GB	4GB

With the default assumption of 400GB/day IN+OUT, and sending to a single Destination, the above configuration can process an average of 1200GB/day.

Let's make a few more assumptions:

- Peak usage during the day is 2x average.

- Persistent Queues for 4 hours of data.
- We want to withstand a 2x burst over typical usage from the Source.
- Our Source is syslog UDP*, so going over capacity means lost data.

(* We're assuming that the load is distributed evenly among all Worker Processes. Further down, we'll talk about why we're making that assumption, and the dangers of "pinning" Worker Processes.)

We're working backwards for this one, but it's a good exercise. Taking the 1200GB/day capacity, dividing it by 2 for peak load, and then dividing by 2 again for burst tolerance, we come up with 300GB/day adjusted capacity. So with this deployment, we can safely say we can handle a 300GB/day stream of syslog UDP data.

Because we want the ability to keep 4 hours of data in a Persistent Queue, we want to use the peak-load number for that. Our upfront assumption is that peak load is 2x normal load, which is 600GB/day, or 25GB/hour. 100GB of disk space should be sufficient, unless we expect the 2x bursts to last a significant duration. If we want to withstand a 1-hour burst during peak times, 125GB of disk space would be needed.

Where Single-Instance Fails

The obvious practical limitation here is that all data is flowing through a single system. This means that if you bring your single-instance deployment down for patching, or experience an unexpected outage, you'll be losing data. This might be acceptable for test purposes, but in production, there are very few scenarios in which you **won't** lose data with a single-instance deployment:

- All your Sources are Pull Sources.
- Your Push Sources can pause the data flow when Stream Workers are not available.

A distributed deployment, with multiple Worker Nodes, is a more robust solution that doesn't have these limitations. So next, let's look at a simple distributed example.

Distributed Deployment

The simplest distributed deployment involves a Leader Node and one or more Worker Nodes. A single Worker Node suffers from the same limitations as the single-instance deployment, so in this section we'll look at scenarios with multiple Worker Nodes.

You might be sizing a Worker Group when working with either a Cribl.Cloud Leader or an on-prem Leader. For an on-prem Leader, use our recommended system requirements.

The main thing to consider with multiple Workers is that you'll need a load balancer for all Push Sources that don't natively support balancing across multiple Worker Nodes. You can see this added load balancer called

out (as **LB**) in our Distributed Deployment Architecture diagram:

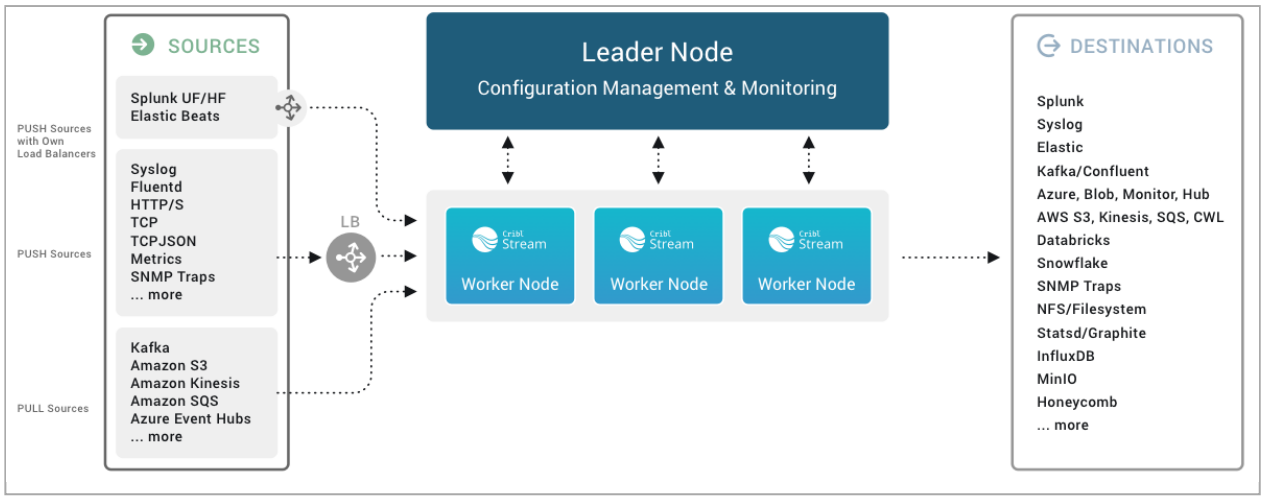

Distributed deployment architecture

How Many Worker Nodes?

The next consideration is, how many Worker Nodes do you need? Having multiple Worker Nodes allows you to continue processing data while one Node is down for maintenance – so your sizing is determined by the remaining Worker Nodes. Here, you have a matrix of adjusting scaling vertically vs. horizontally, so let's look at the math:

Effectively, 2 Worker Nodes means you lose 50% capacity when one is down. With 3 Nodes, you lose 33%. With 6 Nodes, you lose 17%. You will lose 2 vCPUs in overhead on each Node, but at larger scales, the benefits outweigh the costs.

Let's look at an example using the naive 400GB/day per core capacity (i.e., 200GB/day per vCPU or Worker Process). We'll pick approximately comparable desired throughput of 5.6-6TB/day, and see how the math works out.

2 Worker Nodes

32 vCPUs x2 Nodes = 64 vCPUs (- 2 vCPUs/Node for overhead) = 60 WPs

1 Node downs during patching: 30 WPs*0.2=6 TB capacity

6 TB/64 vCPUs = 0.09 TB/vCPU

3 Worker Nodes

16 vCPUs x3 Nodes = 48 vCPUs (-2 vCPUs/Node for overhead) = 42 WPs

1 Node downs during patching: 28 WPs*0.2=5.6 TB capacity

5.6 TB/48 vCPUs = 0.12 TB/vCPU

6 Worker Nodes

8 vCPUs x6 = 48 vCPUs (-2 vCPUs/Node for overhead) = 36 WPs

1 Node downs during patching: 30 WPs*0.2 TB/WP = 6 TB capacity

6TB/40 vCPUs = 0.15 TB/vCPU

As we can see, once your required throughput is high enough to make the 2 vCPU/Node tax negligible, a larger number of Worker Nodes is advantageous. You can do the math for your specific use case – remembering to adjust for expected peak usage and desired spike tolerance.

That said, having **3 Worker Nodes is usually the recommended minimum**, since this provides resilience against unplanned outages even when one Worker is down for planned maintenance.

Where a Single Worker Group Can Fail

Even provisioning an "adequate" number of Worker Nodes, in a single Worker Group, might not be fully resilient if you encounter connection pinning, data bursts, or other unexpected resource demands.

Pinning

In Single-Instance Deployment above, we included the caveat of “assuming that the load is distributed evenly among all Worker Processes.” In reality, you need to validate this assumption. In some situations, you'll need to take additional measures to assure that it’s true, or work around cases when it is not.

Pinning is a situation where a single TCP or UDP Source is sending a large amount of data over a single connection, causing that connection to be “pinned” to a single Worker Process. If the throughput is high enough, and the load balancer is unable to break up that connection, the affected Worker Processes might be overloaded and unable to keep up.

This situation is best resolved by having the sender establish separate connections. If that’s not possible, try isolating a Worker Group that receives this input from all other processing responsibilities – this will maximize the throughput that this Group can handle.

Burst Loads Affecting Push Sources

Most of the time, your Push Sources will generate a reasonably predictable, consistent load. Using the sizing considerations outlined above, you should be able to come up with a Worker Group sized appropriately for your desired risk-versus-cost balance.

However, this balance can be upset when you have a surge of data that makes your system temporarily busier than you accounted for. The greatest impact would be felt by Push Sources that have no way to handle backpressure, such as UDP Sources.

A prime example of data burst is an ad-hoc run of a large Collection job. With multiple Worker Groups, you can separate Push versus Pull Sources, and can even use an Auto Scaling group group for large Collection jobs if desired.

Unexpected Resource Hogs

Our throughput estimates are based on certain assumptions about the average level of complexity of operations performed on the data. As you're creating your Pipelines, at some point you might decide that you require additional resources to meet your data-processing needs. Certain combinations of Function, logic, and throughput will consume extra resources.

When expanded resource demands happen in a predictable, controlled manner, all is well. However, we've seen cases where an inefficient regular expression, or a memory-hungry custom Collection script, will cause a whole Worker Group to get overloaded. This leads to crashes, or to performance poor enough to cause data loss. Pipeline profiling, introduced in Cribl Stream v.4.0, helps with some of this. But using separate Worker Groups is an option to provide additional isolation.

Multiple Worker Groups

At the beginning of Distributed Deployment, we considered the limitations of a single Worker Group, and examined some strictly sizing-related reasons for multiple Worker Groups. Here, let's consider some other reasons you might decide to take advantage of multiple Worker Groups.

In some cases, it makes sense to create separate Worker Groups, each close to their data. In other cases, multiple Groups might be necessary for your architecture based on other needs. Here are a few examples, which might not be directly applicable to your scenario, but which should help you realize when multiple Groups might benefit your deployment:

- Keeping Workers close to their data to optimize syslog over UDP.
- Controlling egress costs, by reducing and compressing data before it leaves your cloud provider's region.
- Separating Push Sources versus Pull/Collector Sources.
- Geographical restrictions on data location, such as GDPR.

- Reducing or increasing the number of Workers connecting with a Source or a Destination.
- Centralize certain processing that is dependent on external systems, such as Redis lookups.
- Reducing the frequency of Stream config deployments, in cases where a deployment might disrupt data flow – such as triggering rebalancing among Kafka-based Sources.

Conclusion

As you can see by now, our "it depends" subtitle applies. But we hope that reading this guide has familiarized you with key aspects of what "it" depends on. There is no single "best practice" for sizing, because your own best architecture will depend on considering all options, including your risk-versus-cost balance, to define your own solution.

Equipped with the contents of this guide, you should be able to make better decisions about the potential risks and mitigations appropriate for your environment. After initial deployment, you can monitor utilization trends in the different resources we covered. As your needs evolve, so can your architecture. You'll make assumptions, and when the potential for failure is beyond your tolerance, you can adjust accordingly.

Some final considerations: Is it worth stress-testing your environment, or a downscaled version of it? What's the likelihood of everything going wrong at the same time – your throughput volume spiking to the highest acceptable level, while your Destinations are unavailable and your Persistent Queues are filling up? It depends.

To firm up your own architecture, consult Cribl support, Community Slack, or the Cribl Solutions Engineering or Professional Services experts dedicated to your deployment.

4.1.4. Reference Architectures

This section hosts a growing collection of diagrams representing possible Cribl Stream deployment architectures for different use cases. Please see the considerations, details, and disclaimers accompanying each diagram:

- All-in-One Reference Architecture
- Syslog Reference Architecture
- Multiple Agents Reference Architecture
- Comprehensive Reference Architecture

4.1.4.1. All-in-One Reference Architecture

This reference architecture shows one possibility for ingesting and replaying diverse data types from multiple senders. The Sources shown at left are just representative examples. The replay workers at right could be hosted on Linux servers, in Kubernetes Pods, etc.

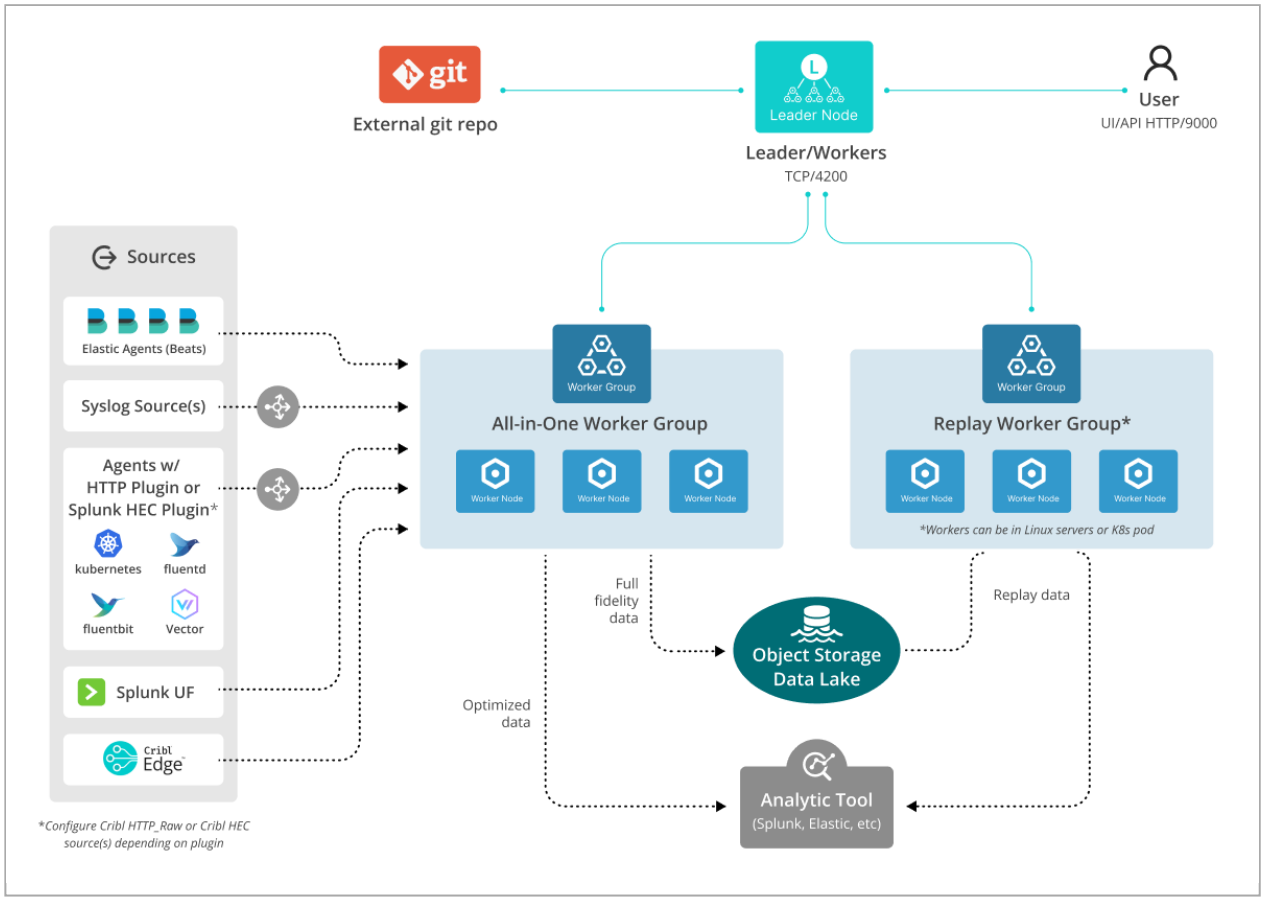

All-in-one reference architecture

> Download an editable version of this diagram here. Download Cribl stencils here.

Sizing Considerations

- An all-in one Worker Group works best with fewer than 2000 Sources (agents, syslog senders, etc.).
- Use Cribl's Sizing Calculator to adequately size your own deployment: number of nodes, CPUs, etc.
- Syslog over TCP should be under 200 GB/day from any one sender.
- Account for up to 50% bursts in traffic.

Disclaimers

All product names, logos, brands, trademarks, registered trademarks, and other marks listed in this document are the property of their respective owners. All such marks are provided for identification and informational purposes only. The use of these marks does not indicate affiliation, endorsement, or ownership of the marks or their respective owners.

This document is provided “as is” with NO EXPRESS OR IMPLIED WARRANTIES OR REPRESENTATIONS. It is intended to aid users in displaying system architecture, but might not be applicable or appropriate in all circumstances. You should not act on any information provided until you have formed your own opinion through investigation and research. Cribl is not responsible for any use of this document or the information provided herein.

4.1.4.2. Syslog Reference Architecture

This reference architecture shows one Cribl Stream deployment possibility for collecting syslog data from multiple geographic regions. This particular example processes all syslog data through a single Worker Group.

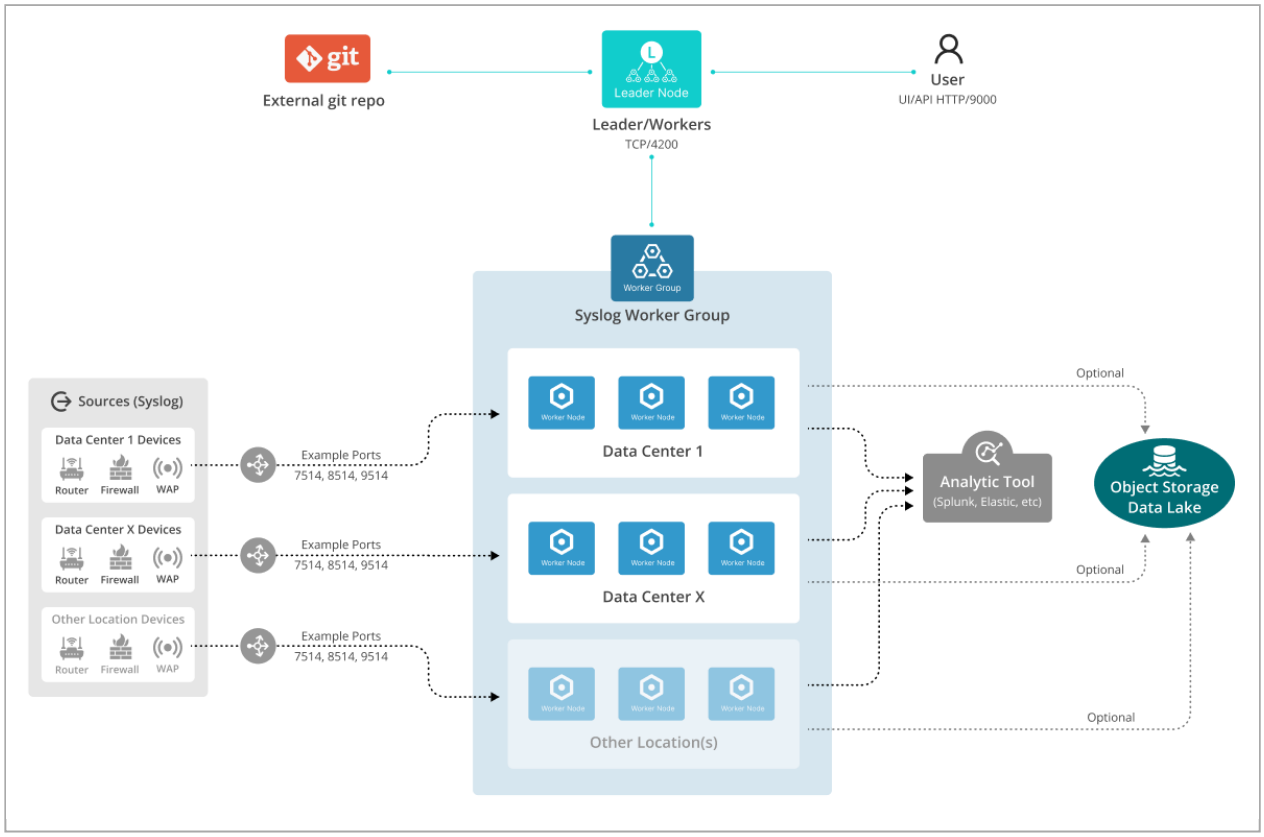

All-in-one reference architecture

Download an editable version of this diagram here. Download Cribl stencils here.

General Sizing Considerations

- Use Cribl's Sizing Calculator to adequately size the number of nodes, CPUs, etc.
- Syslog over TCP should be under 200 GB/day from any one sender.
- Account for up to 50% bursts in traffic.
- General sizing guideline is maximum 200 GB/day throughput per vCPU, or 400 GB/day/CPU core.
- Size for n+50% (to account for bursts and additional high availability).

- Sources that use long-lived TCP connections should be converted to UDP, or to protocols that batch data in different TCP sessions (e.g., most HTTP Push Sources). Sources that send over long-lived TCP connections are subject to "TCP pinning." They can send up to 200 GB/day (if the Stream Worker is built on CPU cores).

Single or Multiple Worker Groups?

The single-Group architecture shown here is one approach. It might or might not be desirable for your use case.

Pros of using a single Worker Group:

- Commit and deploy only once per change.
- Manage all syslog configuration in one Group.

Cons of using a single Worker Group:

- Additional filtering required if your data needs to be sent to diverse Destinations.

Cribl Source Config Considerations

- Syslog over UDP close to senders is ideal. *-If using Syslog over TCP, a single source can send up to 200 GB/day (if workers are built on CPU cores), or up to 100 GB/day (if workers are built on hyperthreaded vCPUs).

- The Worker Group can also process other data (such as from Filebeat source, Splunk forwarders, HTTP listeners, etc.). However, if the agent count reaches the thousands, a dedicated Worker Group per data type is better.
- Preferred practice: Different upstream technologies should send syslog on different syslog ports (e.g., PAN on 5514, Cisco ASA on 6514, Zscaler on 7514).

Cribl Route Config

Map this Route Filter example by technology: PAN, ASA, Windows, etc. This example assumes a Palo Alto Networks host that includes `PAN` or `FW` in its name:

- `__inputId.startsWith('syslog') && (host.indexOf('FW')> -1 || host.indexOf('PAN')> -1)` -> Palo Alto Pack as Pipeline.

- `__inputId=='PAN_Syslog'` -> Palo Alto Pack as Pipeline.
- `__inputId=='Imperva_Syslog'` -> Imperva Pack as Pipeline.

Cribl Output Router Config

This example shows sending to multiple instances of the same Destination type – data in DC1 should send to Splunk indexers in DC1, data in DC2 should send to Splunk indexers in DC2), etc. Stream's Output Router Destination works well for this use case.

Filter and Destination Examples

- Region== `East` , route to Splunk Virginia indexers.
- Region== `Central` , route Splunk Austin indexers.
- Owner== `Team420` , route to Elastic indexers.

Third-Party Load Balancer Configs

This section gathers LB configuration examples and resources for several syslog senders.

F5 BIG-IP Example

```
ltm virtual udpsyslog_514_vs {
destination 10.10.10.10:514
ip-protocol udp
mask 255.255.255.255
pool udpsyslog_514_pool
profiles {
    udp { }
}
Vlans-disabled
}

ltm pool udpsyslog_514_pool {
members {
    10.10.20.10:514 {
        address 10.10.20.10
        session monitor-enabled
        state up
    }
    10.10.20.20:514 {
        address 10.10.20.20
        session monitor-enabled
        state up
    }
}
monitor tcp
service-down-action reset
}
```

Citrix Netscaler Example

Reference: Load Balancing syslog Servers.

```
add service service1 192.0.2.10 SYSLOGUDP 514
add service service2 192.0.2.11 SYSLOGUDP 514
add service service3 192.0.2.11 SYSLOGUDP 514
add service service4 192.0.2.10 SYSLOGTCP 514
add service service5 192.0.2.11 SYSLOGTCP 514
add service service6 192.0.2.11 SYSLOGTCP 514
add lb vserver lbvserver1 SYSLOGUDP -lbMethod AUDITLOGHASH
add lb vserver lbvserver1 SYSLOGTCP -lbMethod AUDITLOGHASH
bind lb vserver lbvserver1 service1
bind lb vserver lbvserver1 service2
bind lb vserver lbvserver1 service3
bind lb vserver lbvserver1 service4
bind lb vserver lbvserver1 service5
bind lb vserver lbvserver1 service6
add syslogaction sysaction1 -lbVserverName lbvserver1 -logLevel All
add syslogpolicy syspol1 ns_true sysaction1
bind system global syspol1
```

AWS NLB Guide

Reference: UDP Load Balancing for Network Load Balancer.

NGINX Plus Guide

Reference: TCP and UDP Load Balancing.

HAProxy (Including TCP Break-Apart)

Reference: haproxy speaks syslog.

This example resides at `/usr/local/etc/haproxy/haproxy.cfg`:

```
ring worker1
format rfc5424
maxlen 1500
size 32764
timeout connect 5s
timeout server 10s
server worker1 worker1.example.com:1514
ring worker2
format rfc5424
maxlen 1500
size 32764
timeout connect 5s
timeout server 10s
server worker2 worker2.example.com:1514

# Add as many ring buffers as needed here

log-forward syslog-lb
# UDP Listener (IPv4/IPv6)
dgram-bind :::1514

# TCP Listener (IPv4/IPv6)
bind :::1514

# Load-balance outgoing messages on 2 TCP outputs
log ring@worker1 sample 1:2 local0
log ring@worker2 sample 2:2 local0

maxconn 65536
timeout client 10s
```

Disclaimers

All product names, logos, brands, trademarks, registered trademarks, and other marks listed in this document are the property of their respective owners. All such marks are provided for identification and

informational purposes only. The use of these marks does not indicate affiliation, endorsement, or ownership of the marks or their respective owners.

This document is provided “as is” with NO EXPRESS OR IMPLIED WARRANTIES OR REPRESENTATIONS. It is intended to aid users in displaying system architecture, but might not be applicable or appropriate in all circumstances. You should not act on any information provided until you have formed your own opinion through investigation and research. Cribl is not responsible for any use of this document or the information provided herein.

4.1.4.3. Multiple Agents Reference Architecture

This reference architecture shows one Cribl Stream deployment possibility for ingesting data from a large quantity of agents. Here, a single basic configuration is replicated across multiple Worker Groups, organized by geographic location.

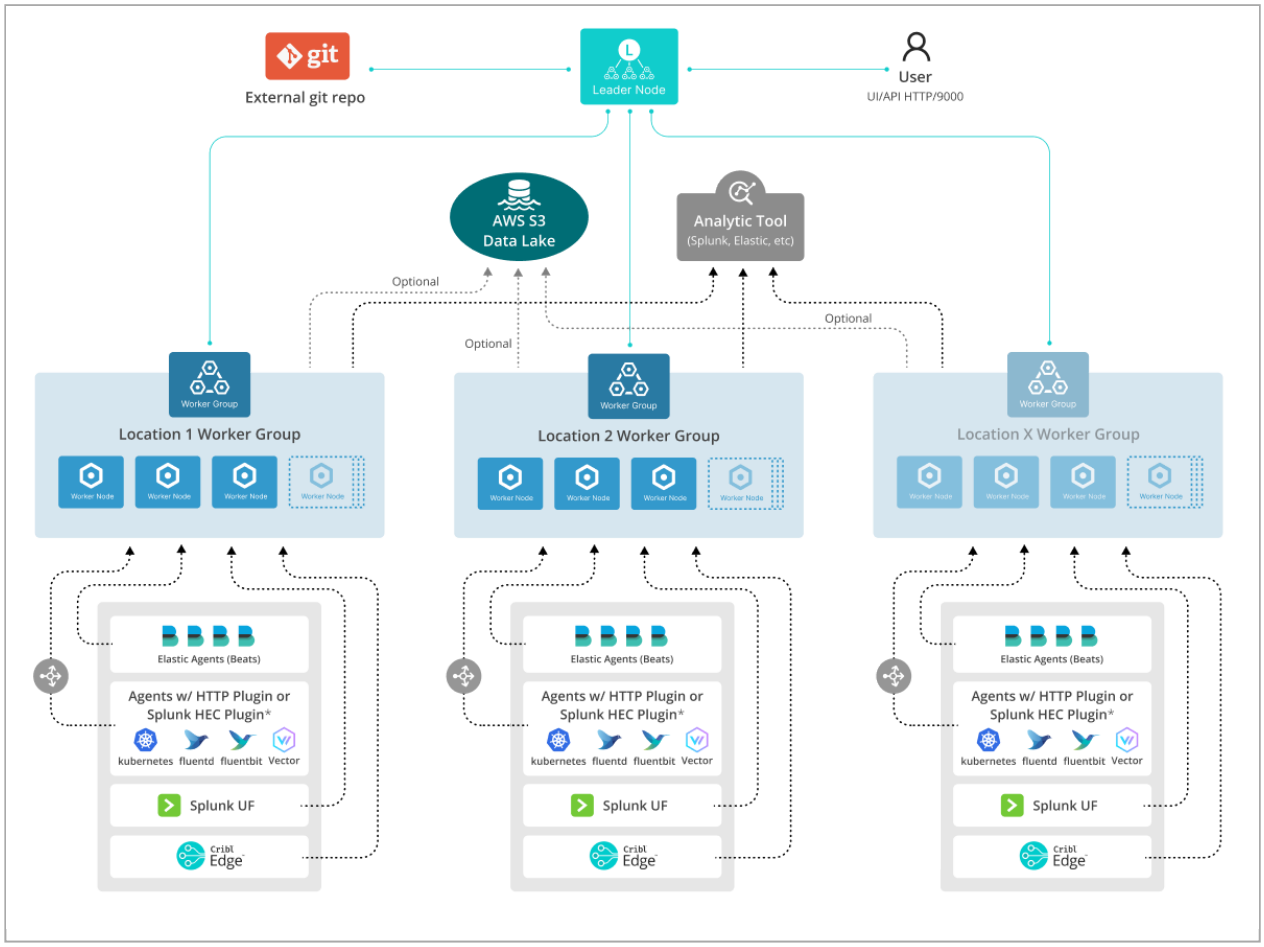

Multiple agents reference architecture

Download an editable version of this diagram here. Download Cribl stencils here.

Single or Multiple Worker Groups?

The multiple-Groups architecture shown here is one approach. It might or might not be desirable for your use case.

Pros of using multiple Worker Groups:

- Configuration granularity.
- Can use Packs to export/reuse configurations across Groups.

Cons of using multiple Worker Groups:

- Multiple configurations to maintain (even if shared via Packs).

General Sizing Considerations

- Size based on data throughput (in+out), and on number of incoming TCP connections.
- Use Cribl's Sizing Calculator to adequately size the the number of nodes, CPUs, etc., based on throughput.

Sizing Examples

Below are two scenarios demonstrating how to determine the number of Stream Worker Processes you'll need to allocate. Both scenarios assume the same distribution of chatty versus medium-chatty agents, but with a different balance of throughput volume versus agents volume.

How Many Events per Second?

We assume three tiers of "chatty" agents, based on events per second. You'll probably recognize your senders from these definitions:

- Chatty agents (100 EPS/agent) – Size 150 agents/vCPU. (Examples are domain controllers or intermediary agents.)
- Medium-chatty agents (30 EPS/agent) – Size 250 agents/vCPU. (Most servers will fall into this medium category.)
- Low-volume agents (3 EPS/agent) – Size 5000 agents/vCPU (Examples are workstations.)

For the most accurate sizing, obtain EPS reports from your current observability tools.

Using the Scenarios

In each scenario, to size based on the number of agents directly feeding Cribl Stream, take the **largest** vCPU count from the pair of volume versus ports calculations.

Scenario 1

40 TB/day throughput, 40,000 agents, 10% of them very chatty, 90% medium-chatty.

- Sizing for volume (non-hyperthreaded CPU cores): 205 Worker Processes.
- Sizing from TCP ports (non-hyperthreaded CPU cores): (0.10 x 40,000 / 150) + (0.90 x 40,000 / 250) = (27 + 144) = 171.
- Result: Allocate **205** Worker Processes, the larger of the two.

Scenario 2

4 TB/day throughput, 20,000 agents, 10% of them very chatty, 90% medium-chatty.

- Sizing from vCPUs (non hyperthreaded CPU Cores): 11 Worker Processes.
- Sizing from TCP ports (non-hyperthreaded CPU Cores): (0.10 x 20,000 / 150) + (0.90 * 20,000 / 250) = (14 + 72) = 86.
- Result: Allocate **86** Worker Processes, the larger of the two.

Elastic Agent Configuration

The configuration to use in `filebeat.yml` depends on your agent's version.

Versions 8.x+

```
setup.ilm.enabled: false
```

Versions 7.15 Through 7.17

```
output.elasticsearch:
hosts: ["https://<your-host-here>.com:9200/elastic"]
```

Or:

```
output.elasticsearch:
hosts: ["<server-name-here>:9200/elastic", "<another-server-name-
here>:9200/elastic"]
```

Versions 7.14 and Earlier

```
output.elasticsearch:
hosts: ["[https://<your-host-here>.com:9200](https://<your-host-here>.com:9200)"]
```

Or:

```
output.elasticsearch:
hosts: ["<server-name-here>:9200", "<another-server-name-here>:9200"]
```

Configure the agent's `worker` setting to avoid TCP pinning. See Configure the Elasticsearch Output.

Splunk Forwarder Configuration

Here are configurations for a few different scenarios.

Send All Data to Cribl

`outputs.conf` to send to both Splunk and Cribl:

```
[tcpout]
defaultGroup=splunk,stream
blockOnCloning=false

[tcpout:splunk]
server=10.1.1.197:9997,10.1.1.198:9997
blockOnCloning=false

[tcpout:stream]
server=10.1.1.200:9997,10.1.1.201:9997
sendCookedData=true
blockOnCloning=false
```

`outputs.conf` to send only to Cribl:

```
[tcpout]
defaultGroup=stream
blockOnCloning=false

[tcpout:stream]
server=10.1.1.200:9997,10.1.1.201:9997
sendCookedData=true
blockOnCloning=false
```

Send All Data (Minus Splunk Internal Logs) to Cribl

`inputs.conf` for internal logs:

```
# datasource1.log only gets sent to Splunk

[monitor:/path/to/log/datasource1.log]
_TCP_ROUTING = splunk
index = ds1_index
sourcetype = sourcetype1
```

`inputs.conf` for all other logs:

```
# datasource2.log will get sent to both Splunk and Stream

[monitor:/path/to/log/datasource2.log]
_TCP_ROUTING = splunk, stream
index = ds2_index
sourcetype = sourcetype2
```

`outputs.conf` for internal logs:

```
[tcpout]
defaultGroup=splunk,stream
blockOnCloning=false

[tcpout:splunk]
server=10.1.1.197:9997,10.1.1.198:9997
blockOnCloning=false

[tcpout:stream]
server=10.1.1.200:9997,10.1.1.201:9997
sendCookedData=true
blockOnCloning=false
```

Fluent Bit Configuration

Here are sample configurations for three different ways to ingest Fluent Bit data.

Splunk HEC Source on Cribl Workers

Fluent Bit reference

```
[OUTPUT]
Name cribl
Match *
host <HOST>
port 8088
Cribl_HEC_Token xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxx
Cribl_HEC_Send_Raw On #optional: to raw instead of event endpoint
TLS On
TLS.Verify Off #optional
```

Raw HTTP Source on Cribl Workers

Fluent Bit reference

```
[OUTPUT]
Name http
Match *
Host cribl_worker_load_balanced_vip
Port 10443
URI /optional/uri/for/filtering/in/cribl
Format json_lines
Header Authorization <Cribl-generated token>
Header X-Key-B Value_B
```

TCP JSON Source on Cribl Workers

Fluent Bit reference

```
[OUTPUT]
Name tcp
Format json_lines
Workers 2
tls on #optional for tls setting
json_date_key date
json_date_format epoch

# Note: Use mTLS, because this plugin doesn't appear to support authTokens
```

Cribl Destination Considerations

Adjust Cribl Destinations' **Advanced Settings** > **Max connections** setting (where available) to limit the load on receivers. E.g.: For a Splunk Load Balanced Destination, if you have 5 Worker Groups sending data to the same Splunk indexer cluster, with 25 indexers, set **Max connections** to between `5` - `10`.

Disclaimers

All product names, logos, brands, trademarks, registered trademarks, and other marks listed in this document are the property of their respective owners. All such marks are provided for identification and informational purposes only. The use of these marks does not indicate affiliation, endorsement, or ownership of the marks or their respective owners.

This document is provided “as is” with NO EXPRESS OR IMPLIED WARRANTIES OR REPRESENTATIONS. It is intended to aid users in displaying system architecture, but might not be applicable or appropriate in all circumstances. You should not act on any information provided until you have formed your own opinion through investigation and research. Cribl is not responsible for any use of this document or the information provided herein.

4.1.4.4. Comprehensive Reference Architecture

This reference architecture shows one Cribl Stream deployment possibility for sending data to a diverse mix of destinations, such as data centers, while minimizing data egress costs. The multiple Worker Groups might be organized functionally, or by geographic location.

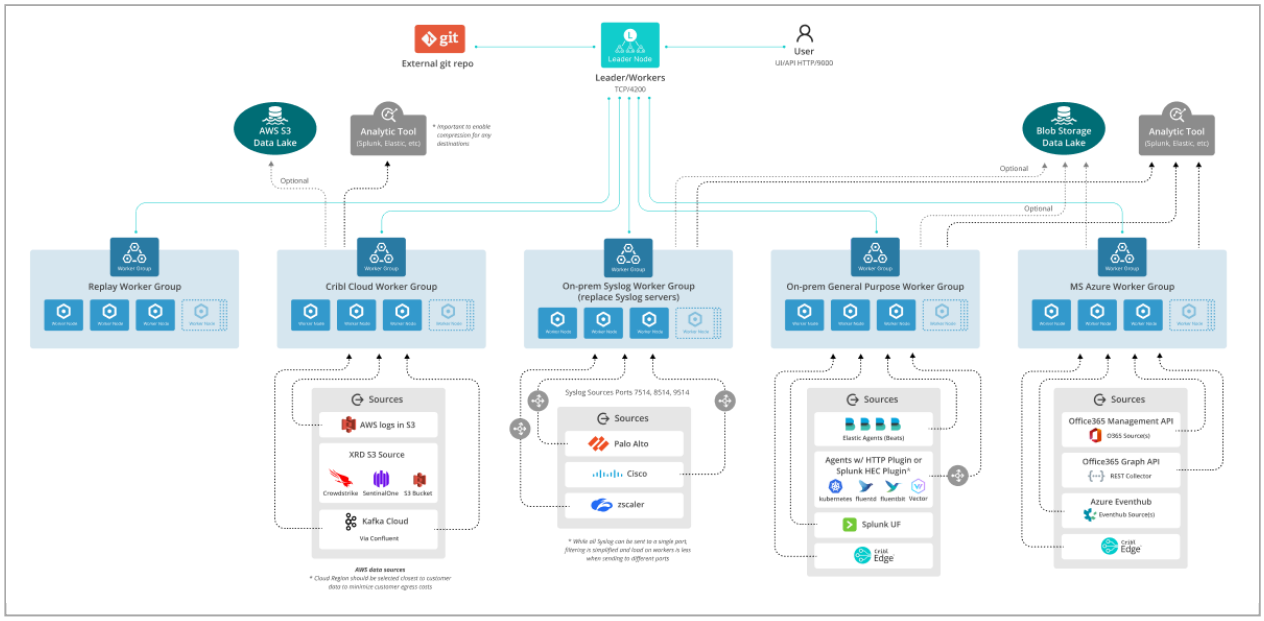

Comprehensive reference architecture

> Download an editable version of this diagram here. Download Cribl stencils here.

General Sizing Considerations

- Size based on data throughput (in+out), and on number of incoming TCP connections.
- Use Cribl's Sizing Calculator to adequately size the number of nodes, CPUs, etc., based on throughput.

Destination Considerations

Adjust Destinations' **Advanced Settings** > **Max connections** setting (where available) to limit the load on receivers. E.g.: For a Splunk Load Balanced Destination, if you have 5 Worker Groups sending data to the same Splunk indexer cluster, with 25 indexers, set **Max connections** to between `5` - `10`.

Disclaimers

All product names, logos, brands, trademarks, registered trademarks, and other marks listed in this document are the property of their respective owners. All such marks are provided for identification and informational purposes only. The use of these marks does not indicate affiliation, endorsement, or ownership of the marks or their respective owners.

This document is provided “as is” with NO EXPRESS OR IMPLIED WARRANTIES OR REPRESENTATIONS. It is intended to aid users in displaying system architecture, but might not be applicable or appropriate in all circumstances. You should not act on any information provided until you have formed your own opinion through investigation and research. Cribl is not responsible for any use of this document or the information provided herein.

4.2. Manual Deployment

4.2.1. Deployment Types

Deployment guide to get you started with self-hosted Cribl Stream

There are at least **two** key factors that will determine the type of Cribl Stream deployment in your environment:

- Amount of Incoming Data: This is defined as the amount of data planned to be ingested per unit of time. E.g. How many MB/s or GB/day?
- Amount of Data Processing: This is defined as the amount of processing that will happen on incoming data. E.g., is most data passing through and just being routed? Or are there a lot of transformations, regex extractions, field encryptions? Is there a need for heavy re-serialization?

Single-Instance Deployment

When volume is low and/or amount of processing is light, you can get started with a single instance deployment.

Distributed Deployment

To accommodate increased load, we recommend scaling up and perhaps out with multiple instances.

Splunk App Deployment

If you have an existing Splunk Heavy Forwarder infrastructure that you want to use, you can deploy Cribl App for Splunk. See the note below before you plan.

> **Cribl App for Splunk Deprecation Notice**
>
> Please see details here.

Kubernetes/Helm Deployment

You can deploy Cribl Stream Leader Nodes (or single instances) and Worker Nodes via Cribl's Helm charts.

Docker Deployment

You can deploy Cribl Stream instances using images from Cribl's public Docker Hub.

Shared-Nothing Architecture

All Cribl Stream deployments are based on a shared-nothing architecture pattern, where instances/Nodes and their **Worker Processes operate separately, serving all inputs, outputs, and event processing independently of each other**.

This allows the overall system to continue to operate even if individual Processes or Nodes fail. It also allows individual Nodes to upgrade without system-wide downtime.

4.2.2. Single-Instance Deployment

Getting started with Cribl Stream on a single instance

For small-volume or light processing environments – or for test or evaluation use cases – a single instance of Cribl Stream might be sufficient to serve all inputs, event processing, and outputs. This page outlines how to implement a single-instance deployment.

Architecture

Requirements

- **OS (Intel Processors):**
  - Linux 64-bit kernel >= 3.10 and glibc >= 2.17.
  - Examples: Ubuntu 16.04+, Debian 9+, RHEL 7+, CentOS 7+, SUSE Linux Enterprise Server 12+, Amazon Linux 2014.03+.
- **OS (ARM64 Processors):**
  - Linux 64-bit.
  - Tested so far on Ubuntu (14.04, 16.04, 18.04, and 20.04), CentOS 7.9, and Amazon Linux 2.

- **System:**
  - At least 4 physical cores.
  - At least 8GB RAM beyond system requirements.
  - 5GB free disk space (more if persistent queuing is enabled).
- **Browser Support**: Firefox 65+, Chrome 70+, Safari 12+, Microsoft Edge.
- **SELinux Support**: `enforcing` mode is supported, but not required.

All quantities listed above are minimum requirements. To fulfill these requirements using cloud-based virtual machines, see Recommended AWS, Azure, and GCP Instance Types.

> **System Requirements Details**
>
> We assume that 1 physical core is equivalent to 2 virtual/hyperthreaded CPUs (vCPUs) on Intel/Xeon or AMD processors; and to 1 (higher-throughput) vCPU on Graviton2/ARM64 processors. For additional details, see Estimating Number of Cores.
>
> Your total memory allocation per host must accommodate all Worker Processes' memory usage, plus host OS requirements. Each Worker Process might use up to the maximum heap size, plus some Node.js overhead that isn't part of heap, plus a third memory draw that will scale upward with configuration details like your type and number of Destinations. Always monitor your Nodes' memory usage – and especially, check for new requirements after configuration changes like adding new Destinations. For additional details, see Estimating Memory Requirements.

Network Ports

By default, Cribl Stream listens on the following ports:

COMPONENT	DEFAULT PORT
UI	`9000`
HTTP In	`10080`
Splunk to Cribl Stream data port	`localhost:10000` (Cribl App for Splunk)
`| criblstream` Splunk search command to Cribl Stream	`localhost:10420` (Cribl App for Splunk)
User options	+ Other data ports as required.

Overriding Default Ports

The above ports can be overridden in the following configuration files:

- Cribl UI port (`9000`): Default definitions for `host` , `port` , and other settings are set in `$CRIBL_HOME/default/cribl/cribl.yml` , and can be overridden by defining alternatives in `$CRIBL_HOME/local/cribl/cribl.yml` .

- Data Ports: HTTP In (`10080`), TCPJSON in (`10420`) Splunk to Cribl (`10000`) : Default definitions for `host` , `port` and other settings are set in `$CRIBL_HOME/default/cribl/inputs.yml` , and can be overridden by defining alternatives in `$CRIBL_HOME/local/cribl/inputs.yml` .

> **Setting the `CRIBL_HOME` Environment Variable**
>
> The `CRIBL_HOME` env is available in the Cribl Stream application, but not on your terminal. If you want to use `$CRIBL_HOME` , you can:
>
> - Assign it once, using the `export` command: `export CRIBL_HOME=/opt/cribl`
> - Set it as a default, by adding it to your to your terminal profile file.

Installing on Linux

- Install the package on your instance of choice. Download it here.
- Ensure that required ports are available (see Network Ports).
- Un-tar in a directory of choice, e.g., in `/opt/` :
  - `tar xvzf cribl-<version>-<build>-<arch>.tgz`

Installing Cribl Stream and Cribl Edge on the Same Host

You can run an Edge Node on a Cribl Stream Leader Node, or an Edge Node and a Worker Node on the same host. For details, see Installing Cribl Edge and Cribl Stream on the Same Host.

Running

Go to the `$CRIBL_HOME/bin` directory, where the package was extracted (e.g.: `/opt/cribl/bin`). Here, you can use `./cribl` to:

- **Start**: `./cribl start`
- **Stop**: `./cribl stop`
- **Reload**: `./cribl reload`

- **Restart**: `./cribl restart`
- **Get status**: `./cribl status`
- **Switch a distributed deployment to single-instance mode**: `./cribl mode-single` (uses the default address:port `0.0.0.0:9000`)

> Executing the `restart` or `stop` command cancels any currently running collection jobs. For other available commands, see CLI Reference.

Next, go to `http://<hostname>:9000` and log in with default credentials (`admin:admin`). You can now start configuring Cribl Stream with Sources and Destinations, or start creating Routes and Pipelines.

> In the case of an API port conflict, the process will retry binding for 10 minutes before exiting.

Shutdown and Restart Sequence

When a Worker Process receives an explicit shutdown command, it follows this sequence:

1. Shuts down internal system communications: stops receiving any commands from the API Process or distributed Leader.
2. Shuts down the input Sources.
3. When the input stream ends, receives a signal event from Cribl Stream's event processor to flush out any stateful Pipeline Functions (such as Aggregations, Sampling, Dynamic Sampling, and Suppress).
4. Waits for 10 seconds, to allow data to finish flowing through the streams processing engine. This wait is designed to allow all Destinations to flush out remaining data. However, any data not flushed within this interval – e.g., because of an error on downstream receivers – will be lost.
5. Exits.

Shutdown/Restart with PQ

Enabling Persistent Queues, on Destinations that support it, generally helps ensure data delivery to your downstream systems. However, note that when a Worker Process restarts, there is a potential for duplicate events to be sent through such Destinations.

This is because PQ doesn't mark events as safe to discard until they've been handed them off to the host OS to send out. So if the Worker Process exits at the final step above **before** all events have flushed, the final handful of events will not have been marked as committed and re moved. Upon restart, Cribl Stream will still see them, and will resend them.

Enabling Start on Boot

Cribl Stream ships with a CLI utility that can update your system's configuration to start Cribl Stream at system boot time. The basic format to invoke this utility is:

```
[sudo] $CRIBL_HOME/bin/cribl boot-start [enable|disable] [options] [args]
```

> You will need to run this command as root, or with `sudo`. For options and arguments, see the CLI Reference.

Most Linux distributions now use `systemd` to start processes at boot, while older distributions might still use `initd`. If you are not sure which service should be configured at startup, check with your Linux administrator. Then follow the corresponding procedure below.

Using systemd

To **enable** Cribl Stream to start at boot time with **systemd**, you need to run the `boot-start` command. Make sure you first create any user you want to specify to run Cribl Stream. E.g., to run Cribl Stream on boot as existing user `cribl`, you'd use:

```
sudo $CRIBL_HOME/bin/cribl boot-start enable -m systemd -u cribl
```

This will install a unit file (as shown below) named `cribl.service`, and will start Cribl Stream at boot time as user `cribl`. A `-configDir` option can be used to specify where to install the unit file. If not specified, this location defaults to `/etc/systemd/system/`.

If necessary, change ownership for the Cribl Stream installation:

```
[sudo] chown -R cribl $CRIBL_HOME
```

Next, use the `enable` command to ensure that the service starts on system boot:

```
[sudo] systemctl enable cribl
```

To **disable** starting at boot time, run the following command:

```
sudo $CRIBL_HOME/bin/cribl boot-start disable
```

Other available `systemctl` commands are:

```
systemctl [start|stop|restart|status] cribl
```

Note the file's default `65536` hard limit on maximum open file descriptors (known as a `ulimit`). The minimum recommended value is `65536`. Linux tracks this per user account. You can view the current soft `ulimit` for max open file descriptors with `$ ulimit -n` while logged in as the same user running the `cribl` binary.

```
[Unit]
Description=Systemd service file for Cribl Stream.
After=network.target

[Service]
Type=forking
User=cribl
Restart=always
RestartSec=5
LimitNOFILE=65536
PIDFile=/install/path/to/cribl/pid/cribl.pid
ExecStart=/install/path/to/cribl/bin/cribl start
ExecStop=/install/path/to/cribl/bin/cribl stop
ExecReload=/install/path/to/cribl/bin/cribl reload
TimeoutSec=60

[Install]
WantedBy=multi-user.target
```

Persisting Overrides on systemd

By default, disabling and re-enabling boot start will regenerate the `cribl.service` file. To persist any overrides – such as proxy or privileged port usage – use this command:

```
systemctl edit cribl
```

This opens a text editor that prompts you to enter overrides, then saves them to a persistent file at:

```
/etc/systemd/system/cribl.service.d/override.conf
```

> **Do NOT Run Cribl Stream as Root!**
>
> If Cribl Stream needs to listen on low ports 1–1024, it will need privileged access. You can enable this on systemd by adding this configuration key to your `override.conf` file:
>
> ```
> [Service]
> AmbientCapabilities=CAP_NET_BIND_SERVICE
> ```

If you want to add extra capabilities such as, reading certain resources (e.g., `/var/log/*`), add `CAP_DAC_READ_SEARCH` in a space-separated format as follows:

```
[Service]
AmbientCapabilities=CAP_NET_BIND_SERVICE CAP_DAC_READ_SEARCH
```

Using initd

To **enable** Cribl Stream to start at boot time with **initd**, you need to run the `boot-start` command. If the user that you want to run Cribl Streams does not exist, create it prior to executing. E.g., running Cribl Stream as user `cribl` on boot:

```
sudo $CRIBL_HOME/bin/cribl boot-start enable -m initd -u cribl
```

This will install an `init.d` script in `/etc/init.d/cribl.init.d`, and will start Cribl Stream at boot time as user `cribl`. A `-configDir` option can be used to specify where to install the script. If not specified, this location defaults to `/etc/init.d`.

If necessary, change ownership for the Cribl Stream installation:

```
[sudo] chown -R cribl $CRIBL_HOME
```

To **disable** starting at boot time, run the following command:

```
sudo $CRIBL_HOME/bin/cribl boot-start disable
```

To control Cribl Stream, you can use the following initd commands:

```
service cribl [start|stop|restart|status]
```

Persisting Overrides on initd

Notes on preserving required permissions across restarts and upgrades:

Do NOT Run Cribl Stream as Root!

If Cribl Stream is required to listen on ports 1–1024, it will need privileged access. On a Linux system with POSIX capabilities, you can achieve this by adding the `CAP_NET_BIND_SERVICE` capability. For example: `# setcap cap_net_bind_service=+ep $CRIBL_HOME/bin/cribl`

> On some OS versions (such as CentOS), you must add an `-i` switch to the `setcap` command. For example: `# setcap -i cap_net_bind_service=+ep $CRIBL_HOME/bin/cribl`
>
> **Important**: Upgrading Cribl Stream will remove the `CAP_NET_BIND_SERVICE` capability from the `cribl` executable, so you'll need to re-run the appropriate `setcap` command again after each upgrade.
>
> Upon starting the Cribl Stream server, a `bind EACCES 0.0.0.0:<port>` error in the API or Worker logs (depending on the service) might indicate that `setcap` did not successfully execute.

System Proxy Configuration

For details on configuring Cribl Stream to send and receive data through proxy servers, see our System Proxy Configuration topic.

Scaling Up

A single-instance installation can be configured to scale up and utilize as many resources on the host as required. See Sizing and Scaling for details.

Anti-Virus Exceptions

If you are running anti-virus software on a Cribl Stream instance's host OS, here are general guidelines for minimizing accidental blockage of Cribl Stream's normal operation.

Your overall goals are to prevent the anti-virus software from locking any files while Cribl Stream needs to write to them, and from triggering any changes that Cribl Stream would detect as needing to be committed.

First, if Persistent Queues are enabled on any Destinations, exclude any directories that these Destinations write to. This is especially relevant if you're writing queues to any custom locations outside of `$CRIBL_HOME`.

Next, for any non-streaming Destinations that you've configured, exclude their staging paths.

Next, exclude these subdirectories of `$CRIBL_HOME`:

- `state/`
- `log/`
- `.git/` (usually only exists on Leader Nodes)

- `groups/` (on Leader Nodes)
- `local/` (on Workers or Leader)

Finally, avoid scanning any processes. Except for the queueing/staging directories already listed above, Cribl Stream runs everything in memory, so scanning process memory will slow down Cribl Stream's processing and reduce throughput.

4.2.3. Distributed Deployment

Getting started with a distributed Cribl Stream deployment

To sustain higher incoming data volumes, and/or increased processing, you can scale from a single instance up to a multi-instance, distributed deployment. The Worker instances are centrally managed by a single Leader Node, which is responsible for keeping configurations in sync, and for tracking and monitoring the instances' activity metrics.

To sustain high availability, failover to an alternate Leader is available in Cribl Stream 3.5 and above.

> See common distributed deployment use cases in Worker Groups – What Are They and Why You Should Care.
>
> As of version 3.0, Cribl Stream's former "master" application components are renamed "leader." While some legacy terminology remains within CLI commands/options, configuration keys/values, and environment variables, this document will reflect that.

Concepts

Single Instance – a single Cribl Stream instance, running as a standalone (not distributed) installation on one server.

Leader Node – a Cribl Stream instance running in **Leader** mode, used to centrally author configurations and monitor Worker Nodes in a distributed deployment.

Worker Node – a Cribl Stream instance running as a **managed Worker**, whose configuration is fully managed by a Leader Node. (By default, will poll the Leader for configuration changes every 10 seconds.)

Worker Group – a collection of Worker Nodes that share the same configuration. You map Nodes to a Worker Group using a Mapping Ruleset.

Worker Process – a Linux process within a Single Instance, or within Worker Nodes, that handles data inputs, processing, and output. The process count is constrained by the number of physical or virtual CPUs available; for details, see Sizing and Scaling.

Mapping Ruleset – an ordered list of filters, used to map Workers Nodes into Worker Groups.

Options and Constraints

A Worker Node's local running config can be manually overridden/changed, but changes won't persist on the filesystem. To permanently modify a Worker Node's config: Save, commit, and deploy it from the Leader. See Deploying Configurations below.

With an Enterprise license, you can configure Permissions-based (Stream 4.2 and later) or Role-based access control at the Worker Group level. Non-administrator users will then be able to access Workers only within those Worker Groups on which they're authorized.

Aggregating Workers

To clarify how the above concepts add up hierarchically, let's use a military metaphor involving toy soldiers:

- Worker Process = soldier.
- Worker Node = multiple Worker Processes = squad.
- Worker Group = multiple Worker Nodes = platoon.

Multiple Worker Groups are very useful in making your configuration reflect organizational or geographic constraints. E.g., you might have a U.S. Worker Group with certain TLS certificates and output settings, versus an APAC Worker Group and an EMEA Worker Group, each with their own distinct certs and settings.

Architecture

This is an overview of a distributed Cribl Stream deployment's components.

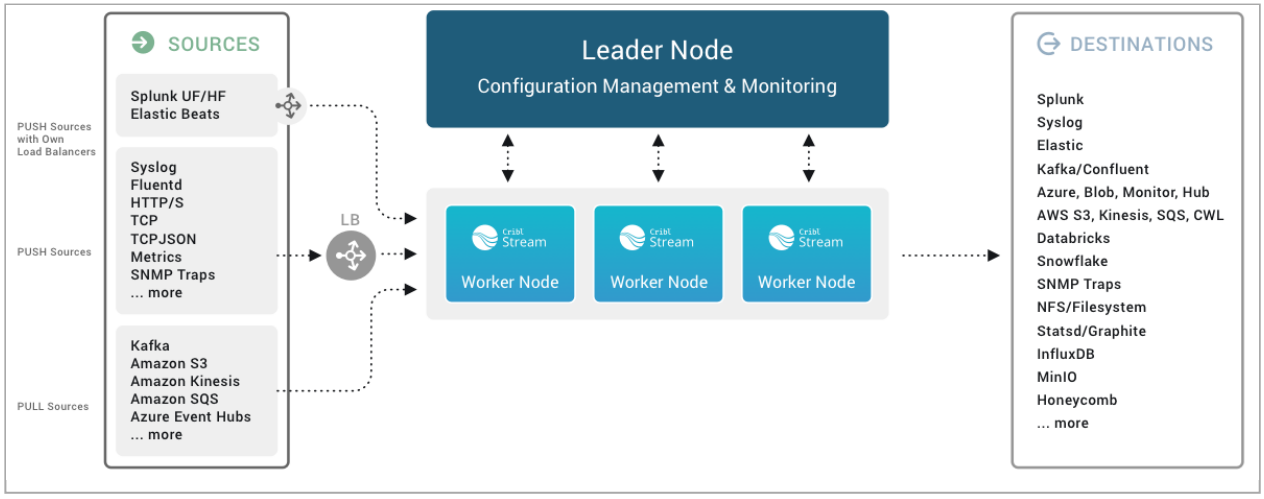

Distributed deployment architecture

Here is the division of labor among components of the Leader Node and Worker Node.

Leader Node

- API Process – Handles all the API interactions.
- *N* Config Helpers – One process per Worker Group. Helps with maintaining configs, previews, etc.

Worker Node

- API Process – Handles communication with the Leader Node (i.e., with its API Process) and handles other API requests.
- *N* Worker Processes – Handle all the data processing.

Single-Instance Architecture

For comparison, here's the simpler division of labor on a single-instance deployment, where the separate Leader versus Worker Nodes are essentially condensed into one stack:

- API Process – Handles all the API interactions.
- *N* Worker Processes – Handle all data processing,
- One of the Worker Processes is called the leader Worker Process. (Not to be confused with the Leader Node.) This is responsible for writing configs to disk, in addition to data processing.

So here, the API Process handles the same responsibilities as a Leader Node's API Process, while the Worker Processes correspond to the Worker Nodes' Worker Processes. The exception is that one Worker Process does double duty, also filling in for one of the Leader Node's Config Helpers.

System Requirements

Leader Node Requirements

- **OS**:
    - Linux: RedHat, CentOS, Ubuntu, AWS Linux (64bit).
- **System**:

    - +4 physical cores, +8 GB RAM.
    - 25 GB free disk space.
- **Git**: `git` must be available on the Leader Node. See details below.
- **Browser Support**: Firefox 65+, Chrome 70+, Safari 12+, Microsoft Edge

> We assume that 1 physical core is equivalent to 2 virtual/hyperthreaded CPUs (vCPUs). All quantities listed above are minimum requirements.
>
> We recommend deploying the Leader on stable, highly available infrastructure, because of its role in coordinating all Worker instances.

Worker Node Requirements

- See Single-Instance Deployment for requirements. (That page also covers options for enabling a Leader and Workers to automatically start on boot – including how to persist privileged port access on systemd and initd.)
- See Sizing and Scaling for capacity planning details.

Port Requirements

During installation of any Leader or Worker instance, firewalls on that instance's host must enable outbound communication to https://cdn.cribl.io on port 443.

Other ports must remain open continuously for a distributed deployment to function. The subsections below list these separately for the Leader versus Workers.

If any of this traffic must go through a proxy – except for cluster communication, which can't be proxied – see System Proxy Configuration for configuration details.

Network Ports – Leader Node

In a distributed deployment, Workers communicate with the Leader Node on these ports. Ensure that the Leader is reachable on those ports from **all** Workers.

COMPONENT	DEFAULT PORT	PROTOCOL
Cluster communications	`4200`	TCP (Raw)

COMPONENT	DEFAULT PORT	PROTOCOL
Config deployment	`4200`	HTTP/S
Bootstrap (optional)	`9000`	HTTP/S

In addition to the existing cluster connection, which is persistent, a separate HTTP connection is established for config deployments from Workers to the Leader on `TCP:4200`. This connection lasts only until the config is downloaded.

> Cluster communication cannot go through proxies because this communication is not HTTP-based.

Network Ports – Worker Nodes

By default, all Cribl Stream Worker instances listen on the following ports:

COMPONENT	DEFAULT PORT
UI	`9000`
User options	+ Other data ports as required.

Installing on Linux

See Single-Instance Deployment, as the installation procedures are identical.

Version Control with `git`

Cribl Stream requires `git` (version 1.8.3.1 or higher) to be available locally on the host where the Leader Node will run. **Configuration changes must be committed to git before they're deployed.**

If you don't have `git` installed, check here for details on how to get started.

The Leader node uses `git` to:

- Manage configuration versions across Worker Groups.
- Provide users with an audit trail of all configuration changes.
- Allow users to display diffs between current and previous config versions.

Setting Up Leader and Worker Nodes

This section covers:

1. Configuring a Leader Node
2. Configuring a Worker Node

Configuring a Leader Node

You can configure a Leader Node through the UI, through the `instance.yml` config file, or through the command line.

Using the UI

At **Settings** > **Distributed Settings** > **General Settings**, select **Mode**: **Leader**.

Next, on the **Leader Settings** left tab, confirm or enter the required Leader settings (**Address** and **Port**). Customize the optional settings if desired. Then click **Save** to restart.

> In Cribl Stream 4.0.3 and above, if you later configure Leader High Availability/Failover, further **Distributed Settings** changes will be locked in each Leader's UI. You can still update distributed settings by modifying configuration files, as outlined on the page linked above.

UI Access (Teleporting)

This useful option enables you to click through from the Leader's **Manage Worker Nodes** page to an authenticated view of each Worker's UI. The instructions below correspond to enabling the `groups.yml` file's `workerRemoteAccess` configuration key.

To enable (remote) UI access to Workers from the Leader's UI:

1. From Cribl Stream's top nav, click **Manage** > **Groups**.
2. On the **Groups** tab: For each desired Worker Group, toggle **UI Access** to `On`.

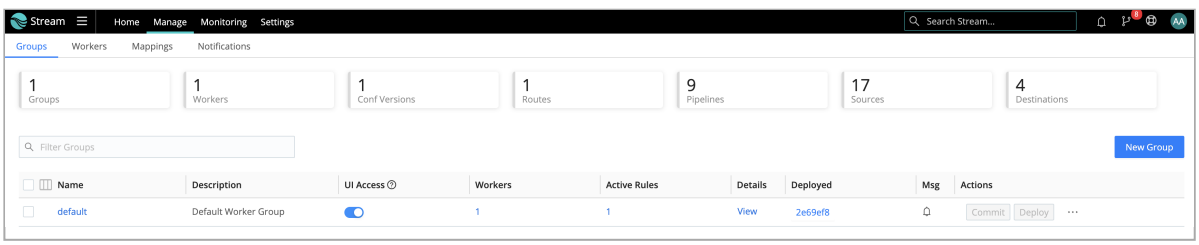

> On Cribl.Cloud, the **Groups** page adds extra columns. You'll see each Group's Worker type (hybrid versus Cloud/Cribl-managed) and, for Cloud Groups, the anticipated ingress rate and Provisioned status. For details, see Cribl.Cloud Worker Groups.

3. Select the **Workers** tab.

4. On the **Manage Workers** page: Click the link for any Worker you want to inspect.

   To confirm that you are remotely viewing a Worker's UI, Stream will add a magenta border, with a badge labeled **Viewing host:** `<host/GUID>`.

   At the upper right, you can click **Restart** to restart the Worker, or click the **X** close button to return to the **Manage Workers** page. Note that any changes you make here will not be propagated to the Leader.

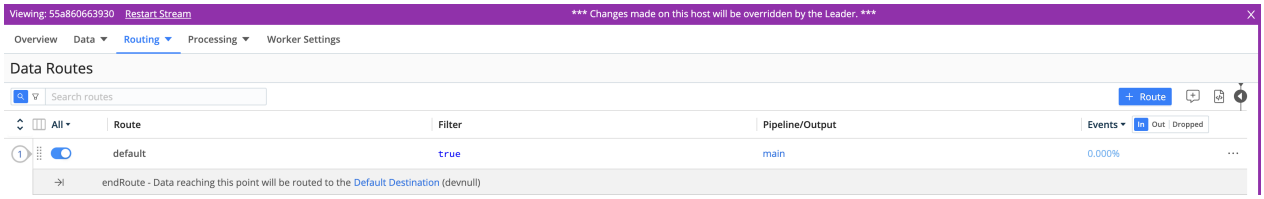

Authenticated view of a Worker

> Any changes that you make here will not be propagated to the Leader.
>
> Prior to Cribl Stream 3.4, **Worker UI access** was a global setting per deployment. If you upgrade from a pre-3.4. version to v.3.4 or higher, regardless of your prior configuration, **(Remote) UI access** will initially be set to `No` for all Worker Groups. Re-enable access for each desired Group, as shown above.

Using YAML Config File

In `$CRIBL_HOME/local/_system/instance.yml`, under the `distributed` section, set `mode` to `master`:

$CRIBL_HOME/local/_system/instance.yml

```
distributed:
  mode: master
  master:
    host: <IP or 0.0.0.0>
    port: 4200
    tls:
      disabled: true
    ipWhitelistRegex: /.&ast;/
    authToken: <auth token>
    enabledWorkerRemoteAccess: false
    compression: none
    connectionTimeout: 5000
    writeTimeout: 10000
```

Using the Command Line

You can configure a Leader Node using a CLI command of this form:

```
./cribl mode-master [options] [args]
```

For all options, see the CLI Reference.

Changing the Leader's Auth Token

The final step in configuring your Leader Node is to change the default auth token value, an important security practice.

Configuring a Worker Node

On each Cribl Stream instance you designate as a Worker Node, you can configure the Worker through the UI, the `instance.yml` config file, environment variables, or the command line.

Temporary License Restriction on Worker Node Startup

When you first start a Worker Node, logs might warn about a limit on Worker Processes:

```
{
  "time": "2023-02-10T15:11:48.609Z",
  "cid": "api",
  "channel": "cribl",
  "level": "warn",
  "message": "number of worker processes has been limited by the license",
  "requested": 14,
  "licenseLimit": 10,
  "source": "cribl.log"
}
```

Workers use the default license when they first start up, so a log entry like this one is expected. Once the worker checks with the Leader and gets a production license, the limit on Worker processes is lifted. You can ignore this message.

Using the UI

At **Settings** > **Global Settings** > **Distributed Settings** > **General Settings**, select **Mode**: **Managed Worker (managed by Leader)**.

Next, on the **Leader Settings** left tab, confirm or enter the required **Address** (e.g., `criblleader.mycompany.com`). Customize the optional settings if desired. Then click **Save** to restart.

> If you need to customize the Leader's port (from its default `4200`), you can do so via the CLI's mode-worker command.

Using YAML Config File

In `$CRIBL_HOME/local/_system/instance.yml`, under the `distributed` section, set `mode` to `worker`:

$CRIBL_HOME/local/_system/instance.yml

```
distributed:
  mode: worker
  envRegex: /^CRIBL_/
  master:
    host: <master address>
    port: 4200
    authToken: <token here>
    compression: none
    tls:
      disabled: true
    connectionTimeout: 5000
    writeTimeout: 10000
  tags:
      - tag1
      - tag2
      - tag42
  group: teamsters
```

Using Environment Variables

You can configure Worker Nodes via environment variables, as in this example:

```
CRIBL_DIST_MASTER_URL=tcp://criblmaster@masterHostname:4203 ./cribl start
```

See the Environment Variables section for more details.

Using the Command Line

You can configure a Worker Node using CLI commands of this form:

```
./cribl mode-worker -H <master-hostname-or-IP> -p <port> [options] [args]
```

The `-H` and `-p` parameters are required. For other options, see the CLI Reference. Here is an example command:

```
./cribl mode-worker -H 192.0.2.1 -p 4200 -u myAuthToken
```

Cribl Stream will need to restart after this command is issued.

> **Troubleshooting Resources**
>
> Cribl University offers a Troubleshooting Criblet on Attaching Workers to Leaders. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Troubleshooting Criblets and Advanced Troubleshooting short courses.

Persisting Socket Connections

A distributed deployment creates socket files for inter-process communication (IPC) between the Leader and distributed processes and services. These sockets are essential for ensuring that Workers successfully connect to the Leader, and for certain metrics services. On the Leader's host, the default location for these files is the operating system's temp directory (e.g., `/tmp`).

Many Linux distros maintain a system cleaner service (e.g., systemd-tmpfiles) that removes files from this directory periodically, such as every 10 days. If Cribl's sockets are removed, this breaks certain UI pages, such as Monitoring. You can protect the sockets in either of two ways.

Block the Cleaner

Stop the host OS from cleaning socket files out of `/tmp/cribl-*` subdirectories. For example, on Amazon Linux 2 instances, add a new file to `/etc/tmpfiles.d` with the line: `X /tmp/cribl-*`.

To restart the system cleaner here and reload its configuration, use this command:

```
systemctl restart systemd-tmpfiles-clean.service
```

Then restart the Cribl server, via the UI or command line.

Move the Sockets

Alternatively, you can move Cribl's socket files to a different directory. This directory must be relatively close to the root; and the Cribl admin must have user permissions to write to it. As one example of a protected directory, you could specify: `/var/tmp`

In the UI, you specify the directory at **Settings** > **Global Settings** > **System** > **Distributed Settings** > **Leader Settings** > **Helper processes socket dir**.

Menu Changes in Distributed Mode

Compared to a single-instance deployment, deploying in distributed mode changes Cribl Stream's menu structure in a few ways, enabling you to manage Workers and their assignments.

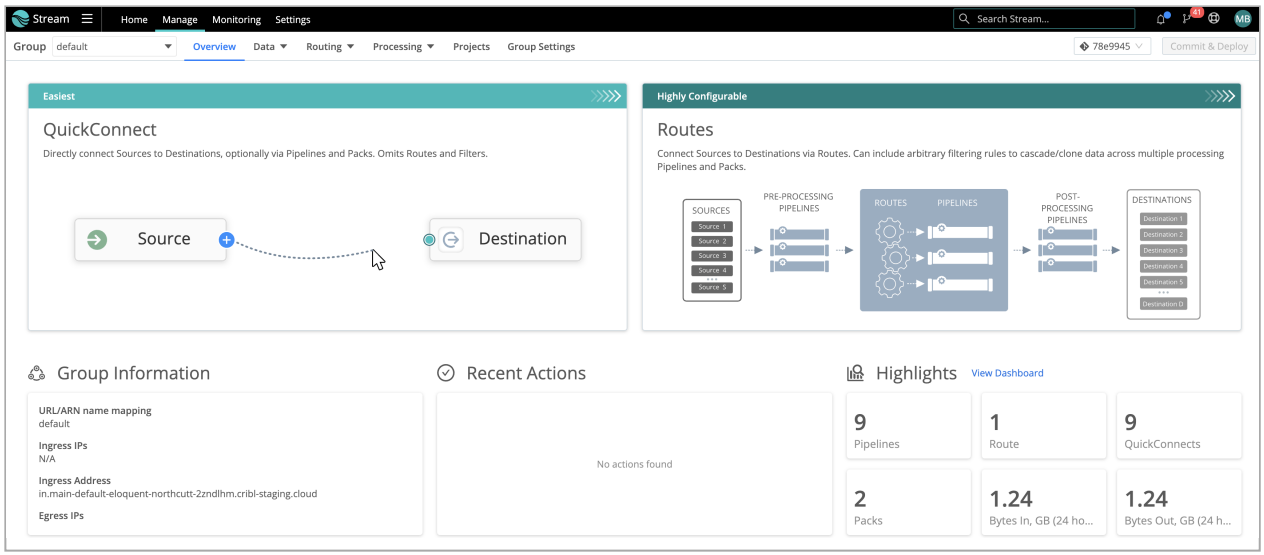

Distributed deployment: menu structure

To access the Group-specific top nav shown above, click **Manage**, then click the **Workers** tab. On the **Manage Workers** page click into your desired Worker Group. This contextual top nav also adds a **Settings** tab, through which you can manage configuration per Worker Group.

For comparison, here is a single-instance deployment's Home page:

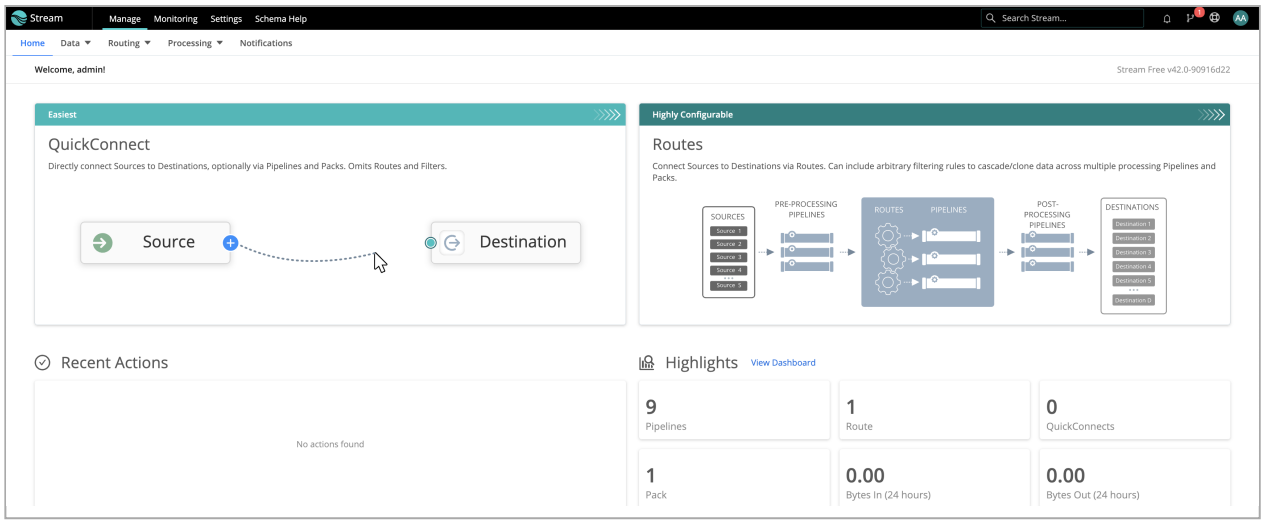

Home page in a single-instance deployment

Commit and Deploy Controls

Distributed mode adds a second set of (Group-specific) **Commit** and **Deploy** buttons at the upper right. The division of labor between these version-control buttons versus the global **Commit** button (on the top nav's **Global Config** dialog) is:

- The upper-right buttons commit and deploy configurations for the currently selected Worker Group/Fleet.
- The top nav's **Commit** button commits configurations for **all** Groups/Fleets, and for the Leader itself – but does not deploy the new configs to Groups/Fleets.

These controls will appear slightly differently depending on whether you have changes committed but not yet deployed, and on whether you've enabled the Collapse actions setting.

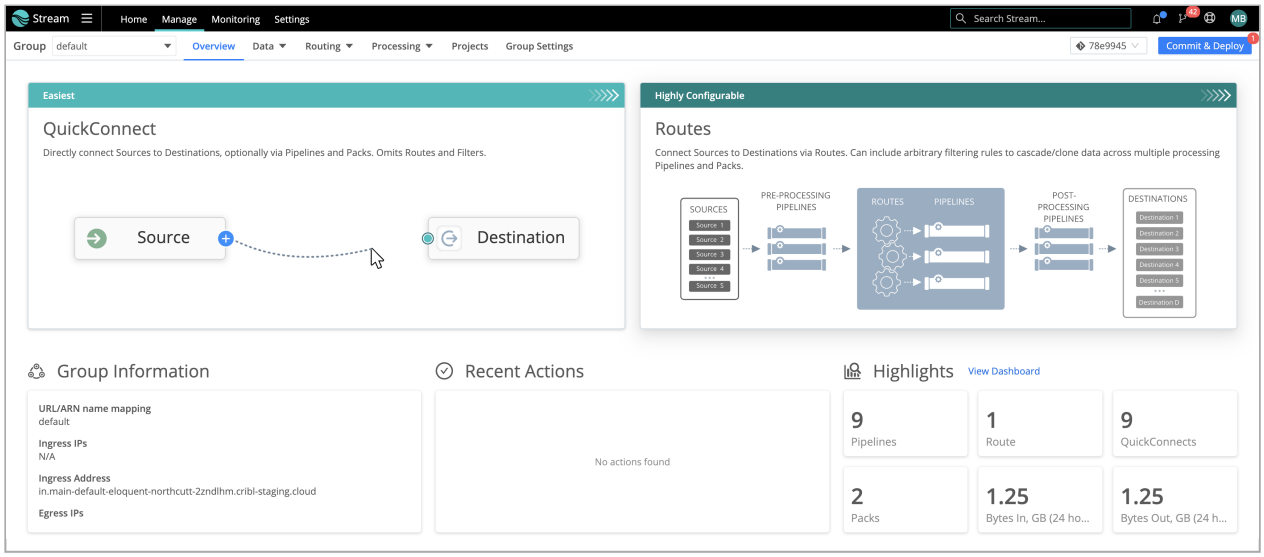

Commit and Deploy controls per Group/Fleet, at upper right

> Distributed mode's repositioning of navigation/menu links also applies to several instructions and screenshots that you'll see throughout this documentation.
>
> Where procedures are written around a single-instance scenario, just click into your appropriate Group to access the corresponding navigation links.

Managing Worker Nodes

To manage Worker Nodes, click the **Manage** tab in the top nav. This opens the Groups landing page with these upper tabs: **Groups**, **Workers**, and **Mappings**. (With a paid license, you will also see a Notifications tab to their right.)

Workers Tab

The **Workers** tab provides status information for each Worker Node in the selected Worker Group.

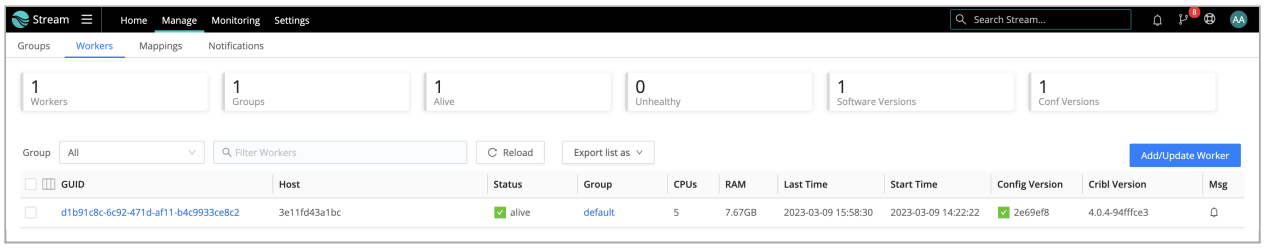

Worker Nodes status/controls

If you see unexpected results here, keep in mind that:

- Workers that miss 5 heartbeats, or whose connections have closed for more than 30 seconds, will be removed from the list.
- For a newly created Worker Group, the **Config Version** column can show an indefinitely spinning progress spinner for that Group's Workers. This happens because the Workers are polling for a config bundle that has not yet been deployed. To resolve this, click the **Deploy** option to force a deploy.

To export the list of Worker Nodes, click the **Export list as** drop-down. Select `JSON` or `CSV` as the export file format. If a list has any filters applied, the exported list will also be filtered. To export an entire list, remove any applied filters.

To reveal more details about a Worker Node, click anywhere on its row.

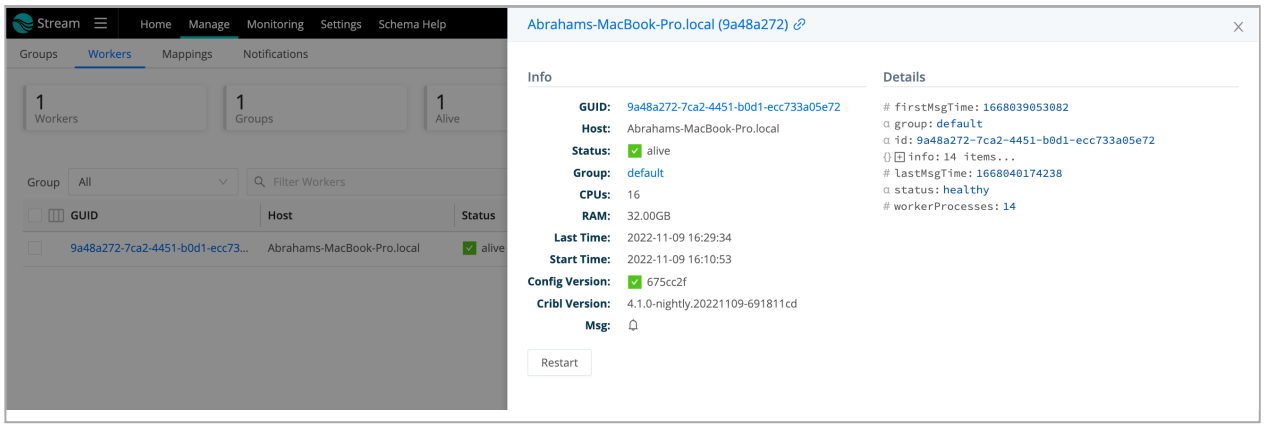

Worker Node details

Mappings Tab

Click the **Mappings** tab to display status and controls for the active Mapping Ruleset:

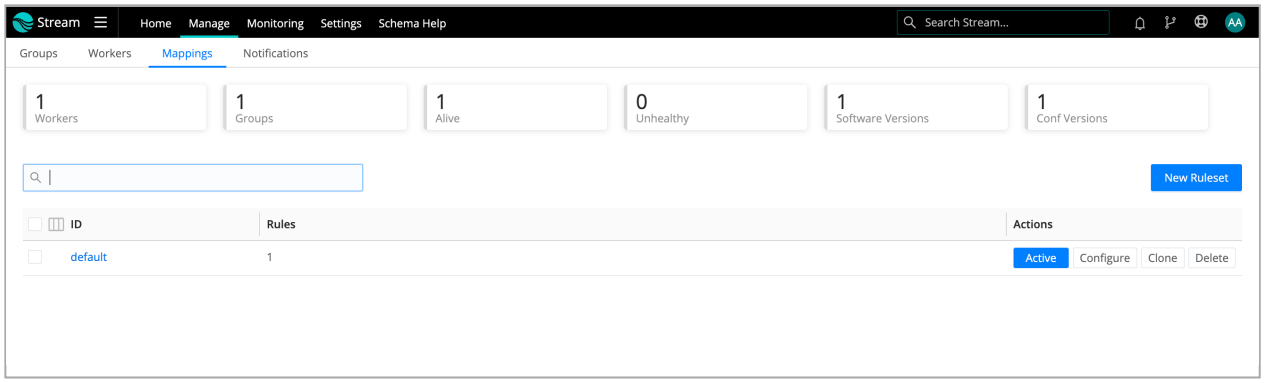

Mappings status/controls

Click into a Ruleset to manage and preview its contained Rules:

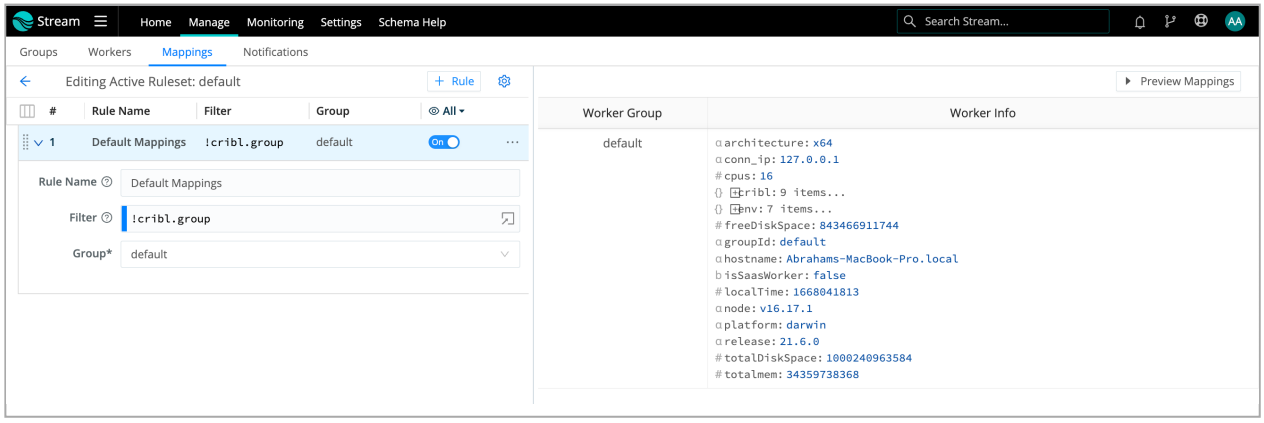

Editing the Active Ruleset

How Workers and Leader Work Together

The Leader Node has two primary roles:

1. Serves as a central location for Workers' operational metrics. The Leader ships with a monitoring console that has a number of dashboards, covering almost every operational aspect of the deployment.
2. Serves as a central location for authoring, validating, deploying, and synchronizing configurations across Worker Groups.

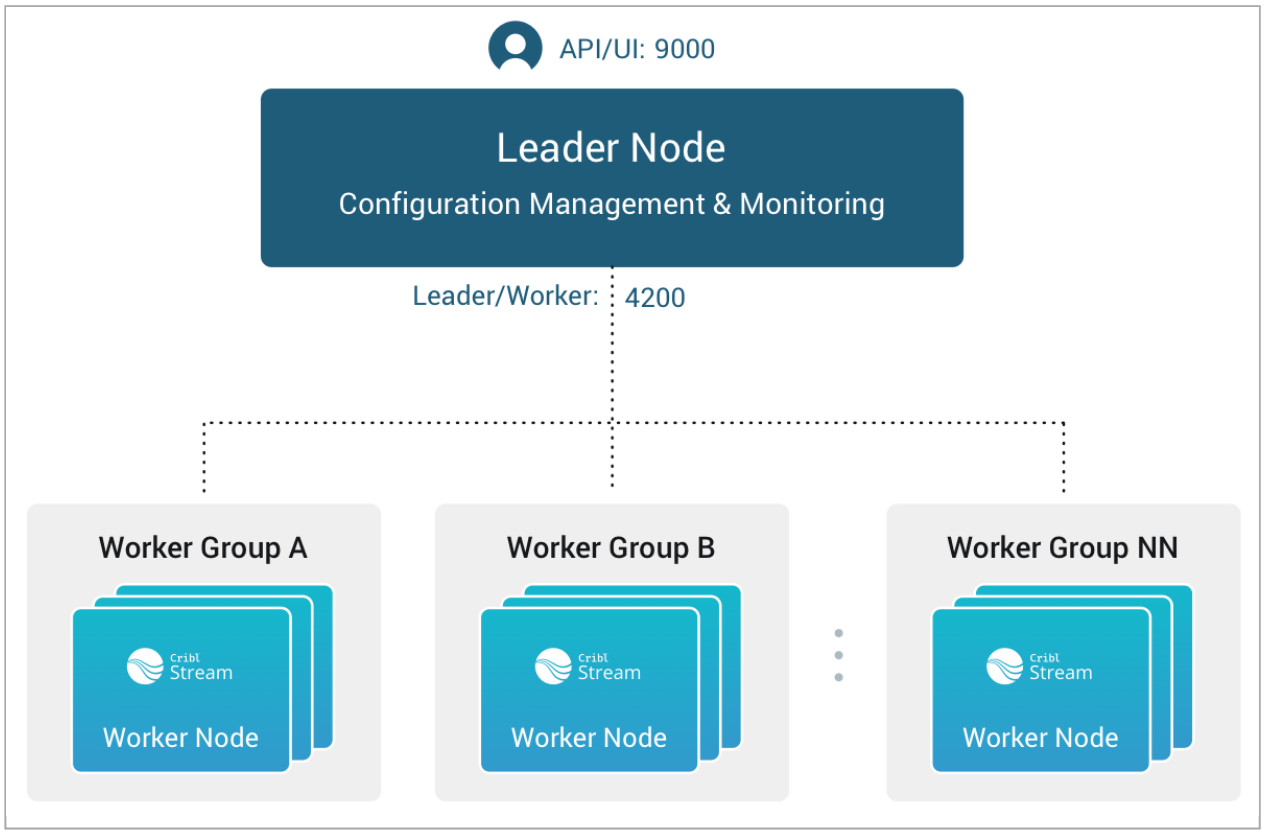

Leader Node/Worker Nodes relationship

Network Port Requirements (Defaults)

- UI access to Leader Node: TCP 9000.
- Worker Node to Leader Node: TCP 4200 (Heartbeat/Metrics/other).

Leader/Worker Node Communication

Workers will periodically (every 10 seconds) send a heartbeat to the Leader. This heartbeat includes information about themselves, and a set of current system metrics. The heartbeat payload includes facts – such as hostname, IP address, GUID, tags, environment variables, current software/configuration version, etc. – that the Leader tracks with the connection.

A Worker Node's failure to successfully send two consecutive heartbeat messages to the Leader will cause the respective Worker to be removed from the Workers page in the Leader's UI, until the Leader again receives a heartbeat message from the affected Worker.

When a Worker Node checks in with the Leader:

- The Worker sends heartbeat to Leader.
- The Leader uses the Worker's configuration, tags (if any), and Mapping Rules to map it to a Worker Group.
- The Worker Node pulls its Group's updated configuration bundle, if necessary.

Safeguarding In-Flight Data When a Worker Node Fails

If a Worker Node goes down, it loses any data that it's actively processing. With streaming senders (Push Sources), Cribl Stream normally handles that data only in-memory. So, to minimize the chance of data loss, configure persistent queues on Sources and/or Destinations that support it.

Leader/Worker Dependency

If the **Leader** goes down, Worker Groups can continue autonomously receiving and processing incoming data from most Sources. They can also continue executing Collection tasks already in process.

However, if the Leader fails, future scheduled Collection jobs will also fail. So will data collection on the Amazon Kinesis Streams, Prometheus Scraper, and all Office 365 Sources – which function as Collectors under the hood.

Config Bundle Management

Config bundles are compressed archives of all config files and associated data that a Worker needs to operate. The Leader creates bundles upon Deploy, and manages them as follows:

- Bundles are wiped clean on startup.
- While running, at most 5 bundles per group are kept.
- Bundle cleanup is invoked when a new bundle is created.

The Worker pulls bundles from the Leader and manages them as follows:

- Last 5 bundles and backup files are kept.
- At any point in time, all files created in the last 10 minutes are kept.
- Bundle cleanup is invoked after a reconfigure.

Worker Groups

Worker Groups facilitate authoring and management of configuration settings for a particular set of Workers. To create a new Worker Group, click the top nav's **Manage** tab, then make sure the submenu's **Groups** tab is selected. From the resulting **Groups** tab, click **Add Group**.

For on-prem or Cribl.Cloud hybrid Groups, enter a unique **Name** and (optionally) a **Description**. You can **Enable teleporting to Workers** now or later (details here).

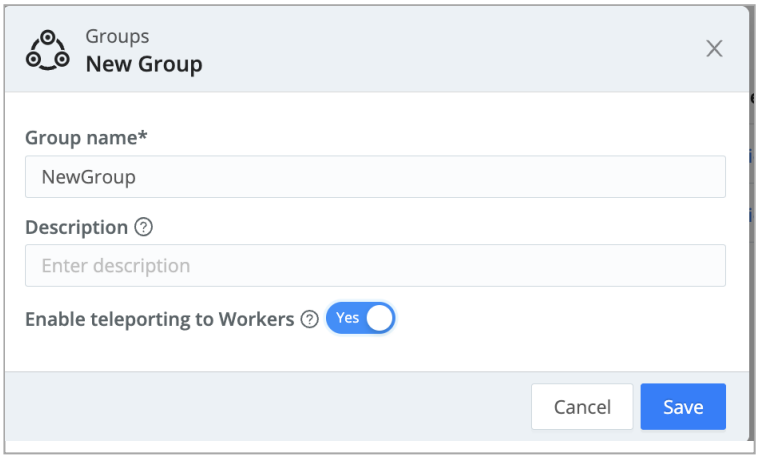

Editing the Active Ruleset

> Configuring multiple Worker Groups, or configuring more than 10 Worker Processes, requires a Cribl Stream Enterprise or Standard license.

Cribl.Cloud Worker Groups

In Cribl Stream 4.1 and later, Cribl.Cloud supports multiple Groups of Cribl-managed ("Cloud") Workers. (This expands earlier support for multiple Groups of hybrid Workers.) With this feature enabled – which requires an Enterprise plan – Cribl.Cloud's **New Group** modal will provide additional controls.

Your first choice is to select either the **Hybrid** or the **Cloud** button. Selecting **Cloud** adds **Anticipated data ingest rate** and **Provision infrastructure** controls.

Because adding more Groups can require Cribl to provision more infrastructure for you, you must anticipate how many MB/sec of data the new Group will ingest. When you create the Group, you indicate this using the drop-down shown below. Cribl will provision corresponding capacity, assuming a 1:2 ingest:egress ratio.

> For general guidance about capacity required for your deployment, see our Planning and Sizing

topics.

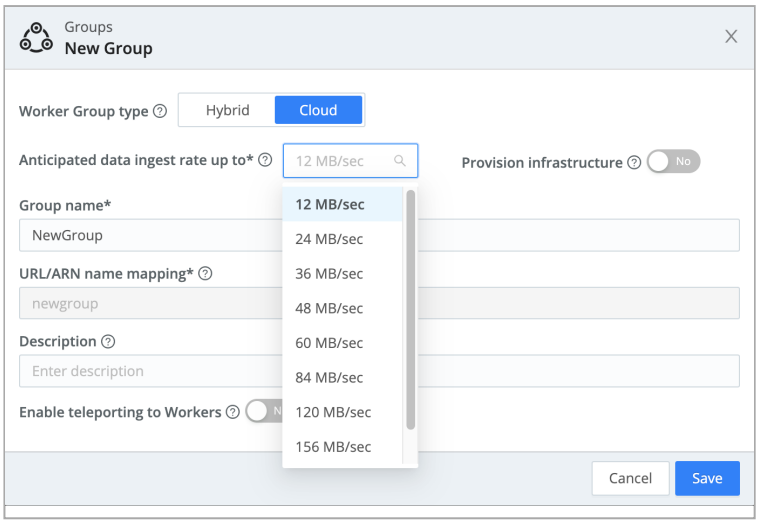

Adding and sizing a new Cloud Group

Controlling Costs

Cribl will draw down your Cribl.Cloud credits to cover the base cost of maintaining the infrastructure, as well as your normal cost for ingested data. However, you can manage your costs. One way is to set the **Anticipated data ingest rate** to its minimum `12 MB/sec` value. This will provision the minimum 2 Workers for this Group.

For the greatest savings, you can set **Provision infrastructure** to its **No** default. You can do so either when creating your Group, or at any later time when you are ingesting no data. With this setting, the Group will go dormant, and your base infrastructure cost for this Group will be `0`. In this state, the Group will contain no Workers and will ingest no data. But Stream will retain its configuration, enabling you to easily reprovision it when needed.

Provisioning and Managing Infrastructure

If you set **Provision Infrastructure** to **Yes**, the infrastructure will be provisioned about 30 minutes later. You will receive an in-portal notification confirming the change. The new Group will then process data according to youre new configuration, until you request a new infrastructure change.

You can change all these selections at any later time from the **Manage** > **Groups** page. As shown below, to change a Group's anticipated ingest rate, click the ••• (Options) menu on its row. and select **Edit Group**.

You can also disable the Group here by toggling off the slider on its row. This will stop data flow, and will stop infrastructure and ingest charges, while preserving the Group's configuration.

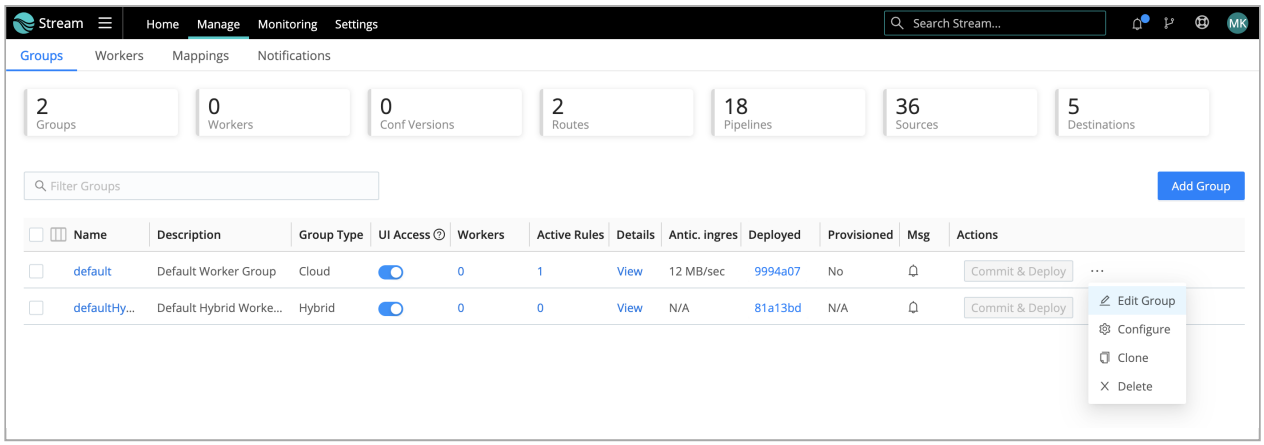

Changing an existing Group's sizing or provisioning

Configuring a Worker Group

To configure a newly created Group, select the top nav's **Manage** tab, then select the **Groups** tab below that, and then click the Group's name. This displays a submenu from which you can configure everything for this Group as if it were a Cribl Stream single instance – using a similar visual interface for Routes, Pipelines, Sources, Destinations, and Group-specific **Settings**.

Managing Worker Groups

On the Groups landing page's right side, beside each Worker Group's **Configure** and **Commit** and **Deploy** buttons, an ••• (Options) menu provides selections to clone Worker Groups' configurations to new Groups, or to delete Groups.

The `Clone` option copies everything configured on the original Group: Sources, Pipelines, Packs, Routes, and Destinations.

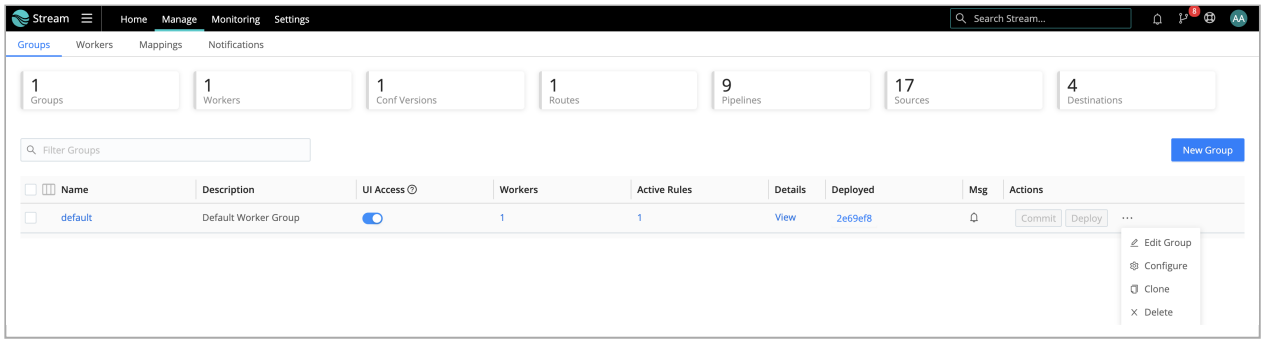

Manage Groups page: Options menu

Can't Log into the Worker Node as Admin User?

> To explicitly set passwords for Worker Groups, see User Authentication.

Recovering a Worker Group

If you delete a Worker Group, you lose the context required to access the Version Control menu. As a result, you also lose the option to recover the Worker Group before it was deleted.

You can recover a deleted Worker Group, using one of the following two methods:

- Creating a New Worker Group with the Same Name
- Temporarily Stopping the Cribl Server

Creating a New Worker Group with the Same Name

1. Create a new Worker Group with the same name as the one that was deleted. This action will restore the deleted Worker Group to the system.
2. Select a previous version of the deleted Worker Group from the Version Control menu if you previously committed the deletion of your Worker Group.

If you did not previously commit the deletion of your Worker Group, the system will automatically restore it.

Temporarily Stopping the Cribl Server

1. Stop the Cribl server.
2. Identify the last commit before the Worker Group was deleted.
3. Revert to that commit.
4. Restart the Cribl server.

Mapping Workers to Worker Groups

Mapping Rulesets are used to map Workers to Worker Groups. Within a ruleset, a list of rules evaluate Filter expressions on the information that Workers send to the Leader.

Only one Mapping Ruleset can be active at any one time, although a ruleset can contain multiple rules. At least one Worker Group should be defined and present in the system.

The ruleset behavior is similar to Routes, where the order matters, and the **Filter** section supports full JavaScript expressions. The ruleset matching strategy is first-match, and one Worker can belong to only one Worker Group.

Creating a Mapping Ruleset

To create a Mapping Ruleset, click the top nav's **Manage** tab, then click the submenu's **Mappings** tab. Click **NAdd Ruleset**, assign a unique **ID** in the resulting **New Ruleset** modal, and click **Save**.

> The **Mappings** link appears only when you have started Cribl Stream with **Settings** > **Global Settings** > **Distributed Settings** > **Mode** set to **Leader**.

On the resulting **Manage Mapping Rulesets** page, click your new ruleset's **Configure** button, and start adding rules by clicking on **Add Rule**. While you build and refine rules, the Preview in the right pane will show which currently reporting and tracked workers map to which Worker Groups.

A ruleset must be activated before it can be used by the Leader. To activate it, go to **Mappings** and click **Activate** on the required ruleset. The **Activate** button will then change to an **Active** toggle. Using the adjacent buttons, you can also **Configure** or **Delete** a ruleset, or **Clone** a ruleset if you'd like to work on it offline, test different filters, etc.

Although not required, Workers can be configured to send a Group with their payload. See below how this ranks in mapping priority.

Add a Mapping Rule – Example

Within a Mapping Ruleset, click **Add Rule** to define a new rule. Assume that you want to define a rule for all hosts that satisfy this set of conditions:

- IP address starts with `10.10.42`, AND:
- More than 6 CPUs OR `CRIBL_HOME` environment variable contains `w0`, AND:
- Belongs to `Group420`.

Rule Configuration

- **Rule Name**: `myFirstRule`
- **Filter**: `(conn_ip.startsWith('10.10.42.') && cpus > 6) || env.CRIBL_HOME.match('w0')`
- **Group**: `Group420`

Default Worker Group and Mapping

When a Cribl Stream instance runs as Leader, the following are created automatically:

- A `default` Worker Group.

- A `default` Mapping Ruleset,
  - with a `default` Rule matching all (`true`).

Mapping Order of Priority

Priority for mapping to a group is as follows: Mapping Rules > Group sent by Worker > `default` Group.

- If a Filter matches, use that Group.
- Else, if a Worker has a Group defined, use that.
- Else, map to the `default` Group.

Deploying Configurations

Your typical workflow for deploying Cribl Stream configurations is the following:

1. Work on configs.
2. Save your changes.
3. Commit (and optionally push).
4. Deploy.

Deployment is the last step after configuration changes have been saved and committed. **Deploying here means propagating updated configs to Workers.** You deploy new configurations at the Group level: Locate your desired Group and click on **Deploy**. Workers that belong to the group will start **pulling** updated configurations on their next check-in with the Leader.

> **Can't Log into the Worker Node as Admin User?**
>
> When a Worker Node pulls its first configs, the admin password will be randomized, unless specifically changed. This means that users won't be able to log in on the Worker Node with default credentials. For details, see User Authentication.

Configuration Files

On the Leader, a Worker Group's configuration lives under:
`$CRIBL_HOME/groups/<groupName>/local/cribl/`.

On the managed Worker, after configs have been pulled, they're extracted under:
`$CRIBL_HOME/local/cribl/`.

Lookup Files

On the Leader, a Group's lookup files live under: `$CRIBL_HOME/groups/<groupName>/data/lookups`.

On the managed Worker, after configs have been pulled, lookups are extracted under: `$CRIBL_HOME/data/lookups`. When deployed via the Leader, lookup files are distributed to Workers as part of a configuration deployment.

If you want your lookup files to be part of the Cribl Stream configuration's version control process, we recommended deploying using the Leader Node. Otherwise, you can update your lookup file out-of-band on the individual Workers. The latter is especially useful for larger lookup files (> 10 MB, for example), or for lookup files maintained using some other mechanism, or for lookup files that are updated frequently.

For other options, see Managing Large Lookups.

> Some configuration changes will require restarts, while many others require only reloads. See here for details.
>
> Restarts/reloads of each Worker Process are handled automatically by the Worker. Note that individual Worker Nodes might temporarily disappear from the Leader's **Workers** tab while restarting.

Worker Process Rolling Restart

During a restart, to minimize ingestion disruption and increase availability of network ports, Worker Processes on a Worker Node are restarted in a rolling fashion. **20% of running processes – with a minimum of one process – are restarted at a time.** A Worker Process must come up and report as **started** before the next one is restarted. This rolling restart continues until all processes have restarted. If a Worker Process fails to restart, configurations will be rolled back.

Auto-Scaling Workers and Load-Balancing Incoming Data

If data flows in via Load Balancers, make sure to register all instances. Each Cribl Stream node exposes a health endpoint that your Load Balancer can check to make a data/connection routing decision.

HEALTH CHECK ENDPOINT	HEALTHY RESPONSE
`curl http://<host>:<port>/api/v1/health`	`{"status":"healthy"}`

Environment Variables

- `CRIBL_DIST_MASTER_URL` – URL of the Leader Node. Format: `<tls|tcp>://<authToken>@host:port?group=defaultGroup&tag=tag1&tag=tag2&tls.<tls-settings below>`.

  Example: `CRIBL_DIST_MASTER_URL=tls://<authToken>@leader:4200`

  - `group` – The preferred Worker Group assignment.
  - `resiliency` – The preferred Leader failover mode.
  - `volume` – The location of the NFS directory to support Leader failover.
  - `tag` – A list of tags that you can use to assign the Worker to a Worker Group.
  - `tls.privKeyPath` – Private Key Path.
  - `tls.passphrase` – Key Passphrase.
  - `tls.caPath` – CA Certificate Path.
  - `tls.certPath` – Certificate Path.
  - `tls.rejectUnauthorized` – Validate Client Certs. Boolean, defaults to `false`.
  - `tls.requestCert` – Authenticate Client (mutual auth). Boolean, defaults to `false`.
  - `tls.commonNameRegex` – Regex matching peer certificate > subject > common names allowed to connect. Used only if `tls.requestCert` is set to `true`.

- `CRIBL_DIST_MODE` – `worker | master`. Defaults to `worker`, **if and only if** `CRIBL_DIST_MASTER_URL` is present.

- `CRIBL_HOME` – Auto setup on startup. Defaults to parent of `bin` directory.

- `CRIBL_CONF_DIR` – Auto setup on startup. Defaults to parent of `bin` directory.

- `CRIBL_NOAUTH` – Disables authentication. Careful here!!

- `CRIBL_TMP_DIR` – Defines the root of a temporary directory.

  Sources use this variable to construct temporary directories in which to stage downloaded Parquet data. If `CRIBL_TMP_DIR` is not set (the default), Cribl applications create subdirectories within your operating system's default temporary directory:

  - For Cribl Stream: `<OS_default_temporary_directory>/stream/`.
  - For Cribl Edge: `<OS_default_temporary_directory>/edge/`.

  For example, on Linux, Stream's default staging directory would be `/tmp/stream/`.

If you explicitly set this `CRIBL_TMP_DIR` environment variable, its value replaces this OS-specific default parent directory.

- `CRIBL_VOLUME_DIR` – Sets a directory that persists modified data between different containers or ephemeral instances. When set, `CRIBL_VOLUME_DIR` overrides `$CRIBL_HOME`. It also creates predefined folders in the specified directory. If that directory already contains folders with those names, they will be overwritten.

- `CRIBL_DIST_WORKER_PROXY` - Communicate to the Leader Node via a SOCKS proxy. Format: `<socks4|socks5>://<username>:<password>@<host>:<port>`. Only `<host>:<port>` are required.

  The default protocol is `socks5://`, but you can specify `socks4://proxyhost:port` if needed.

  To authenticate on a SOCKS4 proxy with username and password, use this format: `username:password@proxyhost:port`. The `proxyhost` can be a `hostname`, `ip4`, or `ip6`.

> See GitOps for a separate list of GitOps-oriented environment variables.

Deprecated Variables

These were removed as of LogStream 3.0:

- `CRIBL_CONFIG_LOCATION`.
- `CRIBL_SCRIPTS_LOCATION`.

Workers GUID

When you install and first run the software, Cribl Stream generates a GUID which it stores in a `.dat` file located in `CRIBL_HOME/local/cribl/auth`, e.g.:

```
$ cat /opt/cribl/local/cribl/auth/676f6174733432.dat
{"it":1647910738,"phf":0,"guid":"e0e48340-f961-4f50-956a-5153224b34e3","lics":
["license-free-3.4.0-XYZ98765"]}
```

When deploying Cribl Stream as part of a host image or VM, be sure to remove this file, so that you don't end up with duplicate GUIDs. Cribl Stream will regenerate the file on the next run.

Host Info/Metadata

Cribl Stream can add a `__metadata` property to every event produced from every enabled Source. The **Host Info** tab displays the metadata collected for each Worker Node.

The metadata surfaced by an Worker Node can be used to:

- Enrich events (with an internal `__metadata` field).
- Display metadata to users as a part of instance exploration.

You can customize the type of metadata collected at **Group Settings** > **Limits** > **Metadata**. Use the **Event metadata sources** drop-down list (and/or the **Add source** button) to add and select metadata sources.

> In Cribl Stream mode, all the **Event metadata sources** are disabled by default.

The sources that you can select here include:

- `os` : Reports details for the host OS and host machine, like OS version, kernel version, CPU and memory resources, hostname, network addresses, etc.
- `cribl` : Reports the Cribl Stream version, distributed mode, Workers (for managed instances), and config version.
- `aws` : Reports details on an EC2 instance, including the instance type, hostname, network addresses, tags, and IAM roles. For security reasons, we report only IAM role **names**.
- `env` : Reports environment variables.
- `kube` : Reports details on a Kubernetes environment, including the node, Pod, and container. For details, see __metadata.kube Property

When these metadata sources are enabled (and can get data), Cribl Stream will add the corresponding property to events, with a nested property for each enabled source.

> Some metadata sources work only in configured environments. For example, the `aws` source is available only when running on an AWS EC2 instance. And `kube` applies only to on-prem deployments.
>
> If your security tools report denied outbound traffic to IP addresses like `169.254.169.168` or `169.254.169.254`, you can suppress these by removing `aws` from the metadata sources described above. If you have a proxy setup, Cribl recommends adding these IP addresses to your `no_proxy` environment variable.

`__metadata.kube` Property

For the `__metadata.kube` property (`kube` on the UI) to report details on a Kubernetes environment, Cribl Stream needs to figure out where it is running. Set the `KUBE_K8S_POD` environment variable to the name of the Pod in which Cribl Stream is running. At this point, the `__metadata.kube` property will have information to report on the `node` and `pod` properties.

If the `/proc/self/cgroup` is working, then the `container` property information will be available, too.

> If you leave the `KUBE_K8S_POD` environment variable unset, and `/proc/self/cgroup` is not working, then Cribl Stream will not know what Pod it is running in. This state has multiple implications:
>
> - The Kubernetes Metrics Source will be unable to identify whether or not it is in a DaemonSet. The result will be redundant metrics from each node in the cluster.
> - The Kubernetes Metadata collector will not add the `__metadata.kube property`.
> - The Kubernetes Logs Source will also duplicate data. Every node in the cluster will collect logs for every container in the cluster.

4.2.4. Splunk App Deployment

Getting started with Cribl App for Splunk

Deploying Cribl App for Splunk

In an on-prem Splunk environment, you can install and configure Cribl Stream as a Splunk app (Cribl App for Splunk), on a Search Head. You **cannot** use Cribl App for Splunk in a Cribl Stream distributed deployment as a Leader, or as a managed Worker. You **cannot** install the app on Splunk Cloud or on a Splunk Heavy Forwarder. (See Single-Instance Deployment and Distributed Deployment for alternatives.)

Running on a Search Head (SH)

When running on an SH, Cribl Stream is set to **mode-searchhead**, the default mode for the app. It listens for **localhost traffic** generated by a custom command: `criblstream`. The command is used to forward search results to the Cribl Stream instance's TCP JSON input on port `10420`, but it's also capable of sending to any other Cribl Stream instance listening for TCP JSON.

Once received, data can be processed and forwarded to any of the supported Destinations. In addition, several out-of-the box saved searches are ready to run and send their results to Cribl with a single click.

Installing the Cribl App for Splunk on an SH

- Select an instance on which to install.
- Ensure that ports `10000`, `10420`, and `9000` are available. See the Requirements section for more info.
- Get the bits here, and install as a regular Splunk app.
- Restart the Splunk instance.
- Go to `https://<instance>/en-US/app/cribl` or `https://<instance>:9000`, and log in with Splunk **admin** role credentials.

Typical Use Cases for Search Head Mode

- Working with search results in a Cribl Stream pipeline.
- Sending search results to any Destination supported by Cribl Stream.

Commands and Examples

Below are some examples of how to use the `criblstream`, `criblencrypt`, and `cribldecrypt` commands available in this app.

> The `cribldecrypt` command can decrypt events originating from multiple Stream Worker Groups or Edge Fleets **only** if you use the same key material on all Worker Groups and Fleets encrypting data.

Forward Search Results to a Cribl Stream Instance

The basic command for sending events to a Cribl Pipeline is `criblstream`, for example:

criblstream command

```
index="my_index" | criblstream dest=host:port
```

Search for a Value

Suppose that you want to search events for a particular value. Because events are encrypted, one approach would be to decrypt all events and then search the unencrypted events for your target value. But decrypting large numbers of events takes a long time, and is extremely inefficient.

Here's a better approach, taking advantage of the fact that the encrypted form of a value is always the same:

1. Encrypt the target value.
2. Search the events (which are still encrypted) for the encrypted form of the target value.
3. If you find events that contain the (encrypted) target value, decrypt them if desired.

You can combine all three steps in a single command:

Search the index for the encrypted target value and decrypt matching events

```
index="encrypted" \
[ | makeresults | eval encrypted_field="target_value" \
| criblencrypt field=encrypted_field keyclass= 0 \
| fields encrypted_field ] | cribldecrypt
```

The `criblencrypt` command requires a `field`, and either a `keyclass` (as shown above) or a `keyid`. For details, see Encryption.

Internal Fields

The Cribl App for Splunk adds the following internal fields to events:

- `_CRIBL_QUEUE`
- `_CRIBL_TCP_ROUTING`

The app forwards these fields to Splunk, because the `transforms.conf` file that ships with the app relies on them.

Beginning with version 4.0, only the Cribl App for Splunk adds these fields. Cribl Stream and Cribl Edge do not. (Earlier versions of Cribl Stream did add these fields, but neither Stream itself nor Splunk receivers have processed them in recent versions.)

4.2.5. Bootstrap Workers from Leader

Boot fully provisioned Workers

Cribl Stream Workers can completely provision themselves, directly from the Leader, upon initial boot. This means that a fleet of any number of Nodes can launch and be fully functional within the cluster, in seconds.

How Does It Work?

A Cribl Stream Leader Node provides a bootstrap API endpoint, at `/init/install-worker.sh`, which returns a shell script. You can run this shell script on any supported machine (see Restrictions below), without Cribl Stream installed. This fully provisions the machine as a Worker Node.

Although you can specify the download URL when you execute the initial curl command, the Cribl Stream package is not downloaded until you generate the script via the API, and then execute it.

> For additional information on using environment variables to set the hostname, see Setting the Hostname.

Requirements

All Worker Nodes' hosts must enable ongoing outbound communication to the Leader's port 4200, to enable the Leader to manage the Workers. While the bootstrap script runs, firewalls on each Worker's host must also allow outbound communication on the following ports:

- Port 443 to https://cdn.cribl.io.
- Port 443 to a Cribl.Cloud Leader.
- Port 9000 to an on-premises Leader.

If any of this traffic must go through a proxy, see System Proxy Configuration for configuration details.
To anticipate and resolve edge cases not mentioned here, see Restrictions below.

> **Troubleshooting Root Access or SSL Errors**

The script will install Cribl Stream into `/opt/cribl`, and will make system-level changes. For systems like Ubuntu, which don't allow direct root access, you'll need to use the `sudo` prefix when executing the script.

The script will create a user named `cribl` to install, own, and run Cribl Stream/Edge.

If you encounter errors of this form:
`ssl certificate problem: self signed certificate in certificate chain`
...add the `-k` flag to disable certificate validation.

UI Access

Cribl Stream admins can use the UI to concatenate and copy/paste the bootstrap script, automating several steps below. You can use an adjacent option to grab a script that updates a Worker's Group assignment.

To use these options, you must have the `admin` Role on a distributed deployment's Leader Node, with an Enterprise license. You must also create the Worker Groups before using the following instructions to add or reassign Workers to them.

Add/Bootstrap New Worker

1. From Cribl Stream's top nav, select **Manage** > **Groups**.
2. Click the link in your desired Group's **Workers** column.
3. On the resulting **Workers** tab, click **Add/Update Worker** at the upper right.
4. Select **Bootstrap new** from the menu, as shown in the composite screenshot below.
5. In the resulting **Add Worker** modal, the **Cribl Stream package location** defaults to `Cribl CDN`. If desired, change this to `Download URL`. (For details about this option, see Adding Download URL.)
6. As needed, correct the target **Group**, as well as the **Leader hostname/IP** (URI).
7. Copy the resulting script to your clipboard.
8. Click either **OK** or **Cancel** to close the modal.
9. Paste the script onto your Worker Node's command line and execute it, to add the Worker.

- As needed (see the note above), prepend `sudo` to the generated **Script** field's contents, and/or append the `-k` flag.

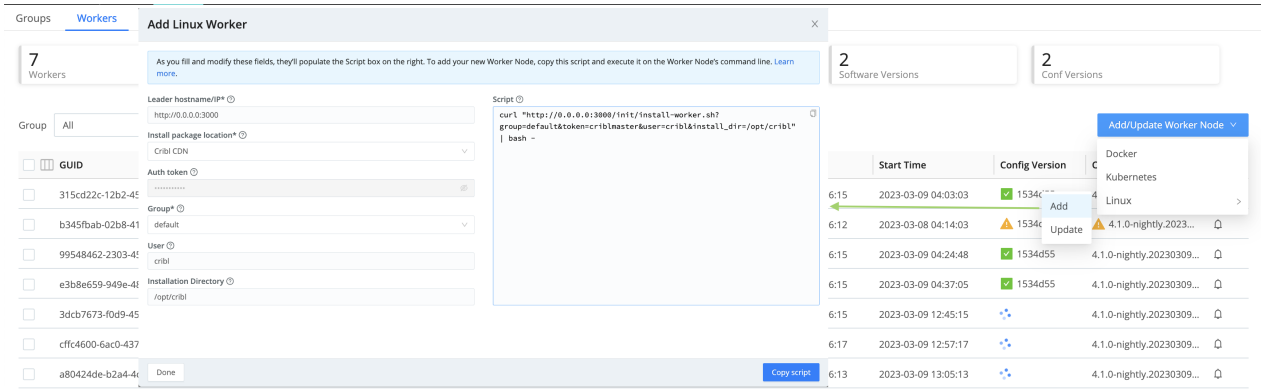

Add/Bootstrap Worker UI option (composite)

Update Existing Worker

You can also auto-generate a script that will update an existing Worker's Group assignment, and/or assign the Worker to a different Leader:

1. Follow steps 1–2 in Add/Bootstrap New Worker above.
2. From the **Add/Update Worker** menu, select **Update existing**.
3. In the resulting **Update Worker** modal, select the new target **Group** for this Worker.
4. As needed, correct or change the **Leader hostname/IP** and/or **Leader port number**.
5. The **Script type** drop-down defaults to the `Environment variable` option for generating the script's command. If you're not relying on environment variables, change this to `CLI`.
6. Copy the resulting script to your clipboard.
7. Click either **OK** or **Cancel** to close the modal.
8. Paste the script onto your Worker Node's command line and execute it, to update the Worker's assignment.
    - As needed (see the note above), prepend `sudo` to the generated **Script** field's contents, and/or append the `-k` flag.

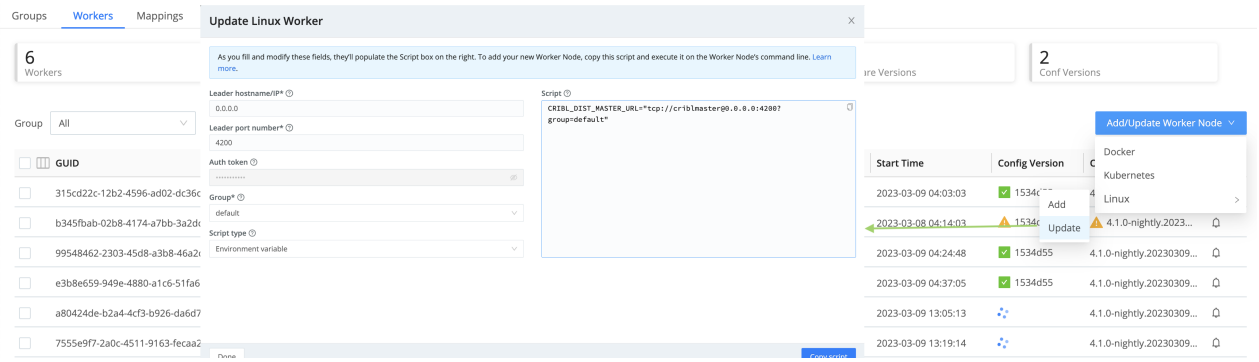

Update Worker UI option (composite)

API Spec

Request Format

```
GET http://<leader hostname or IP>:9000/init/install-worker.sh
```

Query Strings

STRING	REQUIRED?	DESCRIPTION
`token`	optional	Leader Node's shared secret (`authToken`). By default, this is set to `criblmaster` . You can find this secret in the Leader Node's **Distributed Settings** section.
`group`	optional	Name of the cluster's Worker Group. If not specified, falls back to `default` .
`download_url`	optional	Provide the complete URL to a Cribl Stream installation binary. This is especially useful if the Worker Nodes don't have access to the Internet to download from cribl.io.
`tag`	optional	When used in conjunction with Mapping Rules, enables you to specify the Worker Group you want the bootstrapped Worker to join. Multiple tags should be in the form `&tag=tag1&tag=tag2` .

Example HTTP Request

```
GET http://<leader hostname or IP>:9000/init/install-worker.sh?token=79364d6e-dead-beef-4c6e-554445664867
```

As of version 3.0, Cribl Stream's former "master" application components are renamed "leader." While some legacy terminology remains within CLI commands/options, configuration keys/values, and environment variables, this document will reflect that.

Example Response

```
#!/bin/sh

### START CRIBL LEADER TEMPLATE SETTINGS ###

CRIBL_MASTER_HOST="<Master FQDN/IP>"
CRIBL_AUTH_TOKEN="<Auth token string>"
CRIBL_VERSION="<Version>"
CRIBL_GROUP="<Default group preference>"
CRIBL_MASTER_PORT="<Master heartbeat port>"
CRIBL_DOWNLOAD_URL="<download url>"

### END CRIBL MASTER TEMPLATE SETTINGS ###

# Set defaults
checkrun() { $1 --help >/dev/null 2>/dev/null; }
faildep() { [ $? -eq 127 ] && echo "$1 not found" && exit 1; }
[ -z "${CRIBL_MASTER_HOST}" ] && echo "CRIBL_MASTER_HOST not set" && exit 1
CRIBL_INSTALL_DIR="${CRIBL_INSTALL_DIR:-/opt/cribl}"
CRIBL_MASTER_PORT="${CRIBL_MASTER_PORT:-4200}"
CRIBL_AUTH_TOKEN="${CRIBL_AUTH_TOKEN:-criblmaster}"
CRIBL_GROUP="${CRIBL_GROUP:-default}"
if [ -z "${CRIBL_DOWNLOAD_URL}" ]; then
    FILE="cribl-${CRIBL_VERSION}-linux-x64.tgz"
    CRIBL_DOWNLOAD_URL="https://cdn.cribl.io/dl/$(echo ${CRIBL_VERSION} | cut -d '-'
-f 1)/${FILE}"
fi
UBUNTU=0
CENTOS=0
AMAZON=0

echo "Checking dependencies"
checkrun curl && faildep curl
checkrun adduser && faildep adduser
checkrun usermod && faildep usermod
BOOTSTART=1
SYSTEMCTL=1
checkrun systemctl && [ $? -eq 127 ] && BOOTSTART=0
checkrun update-rc.d && [ $? -eq 127 ] && BOOTSTART=0

echo "Checking OS version"
lsb_release -d 2>/dev/null | grep -i ubuntu && [ $? -eq  0 ] && UBUNTU=1
cat /etc/system-release 2>/dev/null | grep -i amazon && [ $? -eq 0 ] && AMAZON=1

echo "Creating cribl user"
if [ $UBUNTU -eq 1 ]; then
    adduser cribl --home /home/cribl --gecos "Cribl Stream User" --disabled-password
fi
if  [ $CENTOS -eq 1 ] || [ $AMAZON -eq 1 ]; then
    adduser cribl -d /home/cribl -c "Cribl Stream User" -m
    usermod -aG wheel cribl
fi

echo "Installing Cribl Stream"
mkdir -p ${CRIBL_INSTALL_DIR}
curl -Lso ./cribl.tar.gz "${CRIBL_DOWNLOAD_URL}"
tar xzf ./cribl.tar.gz -C ${CRIBL_INSTALL_DIR} --strip-components=1
rm -f ./cribl.tar.gz
chown -R cribl:cribl ${CRIBL_INSTALL_DIR}
```

```
if [ $BOOTSTART -eq 1 ]; then
    echo "Setting Cribl Stream to start on boot"
    ${CRIBL_INSTALL_DIR}/bin/cribl boot-start enable -u cribl
fi

mkdir -p ${CRIBL_INSTALL_DIR}/local/_system
cat <<-EOF > ${CRIBL_INSTALL_DIR}/local/_system/instance.yml
distributed:
  mode: worker
  master:
    host: ${CRIBL_MASTER_HOST}
    port: ${CRIBL_MASTER_PORT}
    authToken: ${CRIBL_AUTH_TOKEN}
    tls:
      disabled: true
  group: ${CRIBL_GROUP}
EOF

chown -R cribl:cribl ${CRIBL_INSTALL_DIR}
if [ $BOOTSTART -eq 1 ]; then
  service cribl start
else
  ${CRIBL_INSTALL_DIR}/bin/cribl start
fi
```

curl Option

An easy way of wrapping HTTP methods is to use the `curl` command. Here is an example, which uses a `GET` operation by default, with the same URL used in the above HTTP example:

```
curl http://<leader hostname or IP>:9000/init/install-worker.sh?token=79364d6e-dead-beef-4c6e-554445664867
```

> Check Requirements above to avoid/resolve port or ownership issues.

Chaining Script Execution

The `GET` and `curl` procedures above will only output the contents of the script that needs executing – the script will still need to be manually executed.

However, you can automate that part, too, using a command like the one shown below. This passes the script's contents to the `bash` shell to immediately execute.

```
curl http://<leader hostname or IP>:9000/init/install-worker.sh?token=79364d6e-dead-beef-4c6e-554445664867 | bash -
```

As noted above, on Ubuntu and similar systems, you might need to insert `sudo` before the `bash`. If you don't have a bash shell available, you can pipe the command to `| sh -` instead.

Adding Download URL

By default, the script gets configured to download the Cribl Stream package from the public Cribl repository. If you want to specify a different download location in the script, you'll use the `download_url` parameter.

To successfully execute the `curl` command while also specifying the download URL, you must enclose the URL in double quotes. The reason for this is that the `&` character that joins multiple HTTP parameters is interpreted by the shell as the operator to run commands in the background. Double-quoting the URL, as shown in this example, prevents this.

```
curl "http://<leader hostname or IP>:9000/init/install-worker.sh?token=79364d6e-
dead-beef-4c6e-554445664867&download_url=https://<your_internal_webserver>/cribl-
2.2.0-4589617e-linux-x64.tgz" | sh -
```

curl Offline Option

To bootstrap Workers in an internet-disconnected (e.g., airgapped) environment, you can separate downloading the installation package from Cribl's repository versus running the `curl` command. Here's an example:

1. Download the installation package from Cribl's download page.
2. Rename the resulting file from `cribl-x.x.x-xxxxxxxx-linux-x64.tgz` to `cribl.tar.gz`.
3. Bootstrap the Worker from the file's current directory, by running a command of this form:

```
curl "https://<mycriblleader.mydomain.ext>:9000/init/install-worker.sh?
group=default&token=JOINTOKEN&download_url=/root/&user=cribl&install_dir=/opt/cribl
| bash -
```

Tagging to Assign Workers to Worker Groups

Cribl Stream uses Mapping Rulesets to map Workers to Worker Groups. When you create a Worker from a bootstrap script, you can take advantage of Mapping Rulesets to specify which Worker Group you want the newly-created Worker to join. This is done by adding tags to the download URL, in the form `&tag=tag1&tag=tag2`.

Basic Example

Suppose you have a Worker Group, `Group420`, that you want bootstrapped Workers to join.

In the active Mapping Ruleset for `Group420`, create a new rule that maps any Worker with the tag `awseast1` to the `Group420` Worker Group. You can do this with a filter:

```
cribl.tags.include('awseast1')
```

Then, in the bootstrap script, add a download URL with a tag that matches the filter you just created. For example:

```
curl "http://<logstream_leader>:9000/init/install-worker.sh?
tag=awseast1&token=criblmaster" | bash -
```

When you use the script to bootstrap a new Worker, the Worker will be assigned to `Group420`.

Advanced Example

Suppose you have four Worker Groups distributed between two regions and two platforms:

	AWS	AZURE
Region 1	`Group01`	`Group02`
Region 2	`Group03`	`Group04`

Using two tags (one for region and one for platform) you can represent all four possible combinations, and thus all four Worker Groups:

- `tag=aws&tag=region1` maps to `Group01`.
- `tag=azure&tag=region1` maps to `Group02`.
- `tag=aws&tag=region2` maps to `Group03`.
- `tag=azure&tag=region2` maps to `Group04`.

For each Worker Group, you'll create a Mapping Rule with a filter for the appropriate tag combination to match. For example, this filter would match `Group04`:

```
cribl.tags.includes('azure') && cribl.tags.includes('region2')
```

Then you can use the tag combination in the download URL of a bootstrap script. For example, the tags in this download URL map to `Group04`:

```
http://<logstream_leader>:9000/init/install-worker.sh?
tag=azure&tag=region2&token=criblmaster
```

Any Worker created by the script with the above download URL will be assigned to `Group04`.

Status Codes

STATUS CODE	REASON
200 – OK	All is well. You should have received the script as a response.
403 – Forbidden	Either the node is not configured as a Leader, or the token provided is invalid.

Restrictions

Keep the following in mind when using this feature:

- Each Worker must normally have access to the internet in order to download the Cribl Stream installation binary from cribl.io. Where this isn't feasible, you can use the `download_url` switch to point to a binary in a restricted location.
- TLS is not enabled by default. If enabled and configured, access to this feature will be over `https` instead of `http`.
- Red Hat, Ubuntu, CentOS, and Amazon Linux are the only supported Worker platforms.

User Data

For public-cloud customers, an easy way to use this feature is in an instance's user data. First, be sure to set the Leader Node to `mode = 'leader'`. Then use the following script (changing the command as needed. based on the information above). Upon launch, the Worker Node will reach out to the Leader, download the script, download the Cribl Stream package from the specified location, and then install and configure Cribl Stream:

```
#!/bin/bash
curl http://<leader-node-ip/host-address>:9000/init/install-worker.sh?token=<auth-
token> | sh -
```

4.2.6. Leader High Availability/Failover

To handle unexpected outages in your on-premises distributed deployment, Cribl Stream 3.5 and above supports configuring a second Leader for failover. This way, if the primary Leader goes down, Collectors and Collector-based Sources can continue ingesting data without interruption.

> Configuring a backup Leader requires a Cribl Stream Enterprise or Standard license.

How It Works

When you configure a second Leader, there will be only one active Leader Node at a time. The second Leader Node will be used only for failover. For this architecture to work, you must configure all failover Leaders' volumes to point at same the Network File System (NFS) volume/shared drive.

If the primary Leader Node goes down:

- Cribl Stream will recover by switching to the standby Leader Node.
- The new Leader Node will have the same configs, state, and metrics as the previous Leader Node.
- The Worker Nodes connect to the new Leader.

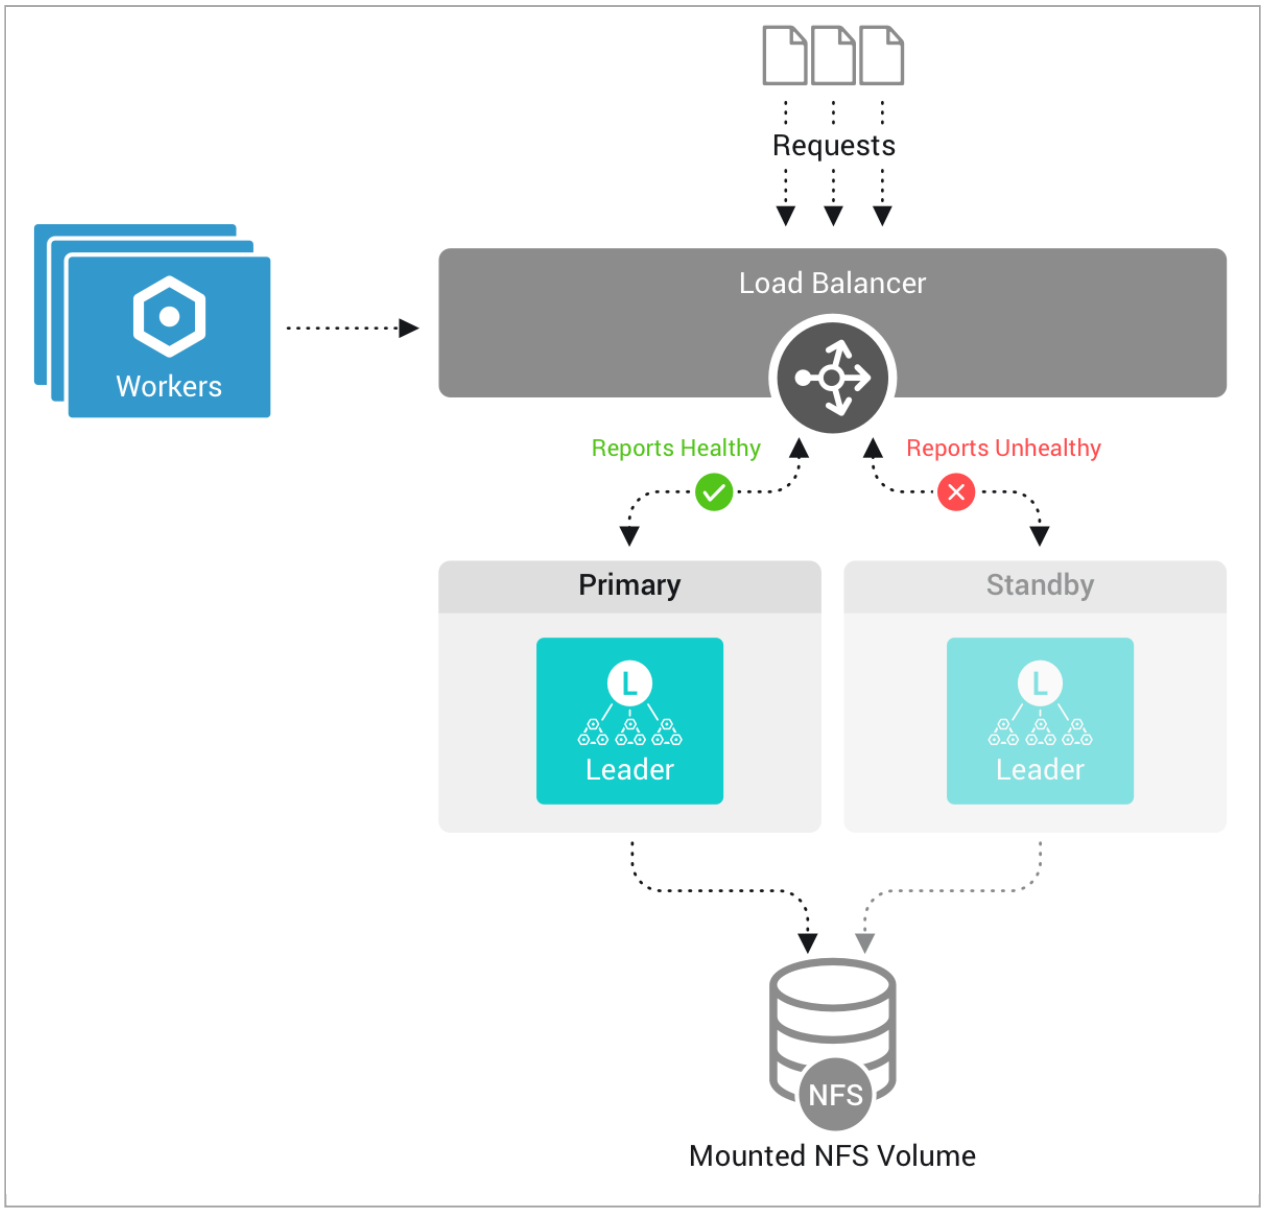

Leader High Availability/Failover Design

Required Configuration

Before adding a second Leader, ensure that you have the configuration outlined in this section.

Auth Tokens

Make sure that both Leaders have matching auth tokens. If you configure a custom **Auth token**, match its value on the opposite Leader.

- In the UI, check and match these values at each Leader's **Settings** > **Global Settings** > **Distributed Settings** > **Leader Settings** > **Auth token**.

- Or, from the filesystem, check and match all Leaders' instance.yml > `master` section > `authToken` values.

(If tokens don't match, Worker Nodes will fail to authenticate to the alternate Leader when it becomes active.)

NFS

- On all Leader Nodes, use the latest version of the NFS client. **NFSv4 is required.**
- Ensure that the NFS volume has at least 100 GB available disk space.
- Ensure that the NFS volume's IOPS (Input/Output Operations per Second) is ≥ 200. (Lower IOPS values can cause excessive latency.)
- Ensure that ping/latency between the Leader Nodes and NFS is < 50 ms.

> You can validate the NFS latency using a tool like `ioping`. Navigate to the NFS mount, and enter the following command:
>
> ```
> ioping .
> ```
>
> For details on this particular option, see the ioping docs.

NFS Mount Options

The Leader Node will access large numbers of files whenever you use the UI or deploy configurations to Cribl Stream Worker Nodes. When this happens, NFS's default behavior is to synchronize access time updates for those files, often across multiple availability zones and/or regions. To avoid the problematic latency that this can introduce, Cribl recommends that you add one of the following NFS mount options:

1. `relatime`: Update the access time only if it is more than 24 hours ago, or if the file is being created or modified. This allows you to track general file usage without introducing significant latency in Cribl Stream. To do the same for folders, add the `reldiratime` option.
2. `noatime`: Never update the access time. (Cribl Stream does not need access times to be updated to operate correctly.) This is the most performant option – but you will be unable to see which files are being accessed. To do the same for folders, add the `nodiratime` option.

Load Balancers

- Configure all Leaders behind a load balancer.

- Expose ports `9000` and `4200` via the load balancer.
- Load balancers must support health checks via `/api/v1/health endpoint`.

The following load balancers support health checks:

- Amazon Web Services (AWS) Network Load Balancer (NLB).
- HAProxy.
- NGINX Plus.

Recommended Configuration

Use the latest NFS client across all Leaders. If you are on AWS, we recommend the following:

- Use Amazon's Elastic File System (AWS EFS) for your NFS storage.
- Ensure that the user running Cribl Stream has read/write access to the mount point.
- Configure the EFS **Throughput mode** to `Enhanced > Elastic`.
- For details on NFS mount options, see Recommended NFS mount options.

For best performance, place your Leader Nodes in the same geographic region as the NFS storage. If the Leader and NFS are distant from each other, you might run into the following issues:

- Latency in UI and/or API access.
- Missing metrics between Leader restarts.
- Slower performance on data Collectors.

Set the primary Leader's **Resiliency** drop-down to `Failover`.

Configuring Additional Leader Nodes

You can configure additional Leader Nodes in the following ways. These configuration options are similar to configuring the primary Leader Node:

- Using the UI
- Updating the YAML config file
- Using the Command Line
- Using Environment Variables

Using the UI

1. In **Settings** > **Global Settings** > **Distributed Settings** > **General Settings**, select **Mode**: `Leader`.
2. Next, on the **Leader Settings** left tab, select **Resiliency**: `Failover`. This exposes several additional fields.
3. In the **Failover volume** field, enter the NFS directory to support Leader failover (e.g., `/mnt/cribl` or `/opt/cribl-ha`). Specify an NFS directory outside of `$CRIBL_HOME`. A valid solution is to use `CRIBL_DIST_MASTER_FAILOVER_VOLUME=<shared_dir>`. See Using Environment Variables for more information.
4. Optionally, adjust the **Lease refresh period** from its default `5s`. This setting determines how often the primary Leader refreshes its hold on the Lease file.
5. Optionally, adjust the **Missed refresh limit** from its default `3`. This setting determines how many Lease refresh periods elapse before standby Nodes attempt to promote themselves to primary.
6. Click **Save** to restart.

> In Cribl Stream 4.0.3 and later, when you save the **Resiliency**: `Failover` setting, further **Distributed Settings** changes via the UI will be locked on both the primary and backup Leader. (This prevents errors in bootstrapping Workers due to incomplete token synchronization between the two leaders.) However, you can still update each Leader's distributed settings by modifying its configuration files, as covered in the very next section.

Using the YAML Config File

In `$CRIBL_HOME/local/_system/instance.yml`, under the `distributed` section:

1. Set `resiliency` to `failover`.
2. Specify a volume for the NFS disk to automatically add to the Leader Failover cluster.

$CRIBL_HOME/local/_system/instance.yml

```
distributed:
  mode: master
  master:
    host: <IP or 0.0.0.0>
    port: 4200
    resiliency: failover
    failover:
      volume: /path/to/nfs
```

Note that `instance.yml` configs are local, not on the shared NFS volume.

Using the Command Line

You can configure another Leader Node using a CLI command of this form:

```
./cribl mode-master -r failover -v /tmp/shared
```

For all options, see the CLI Reference.

Using Environment Variables

You can configure additional Leader Nodes via the following environment variables:

- `CRIBL_DIST_MASTER_RESILIENCY=failover`: Sets the Leader's `Resiliency` to `Failover` mode.
- `CRIBL_DIST_MASTER_FAILOVER_VOLUME=<shared_dir>`: Sets the location (e.g., `/mnt/cribl`) of the NFS directory to support Leader failover.
- `CRIBL_DIST_MASTER_FAILOVER_MISSED_HB_LIMIT`: Determines how many Lease refresh periods elapse before the standby Nodes attempt to promote themselves to primary. Cribl recommends setting this to `3`.
- `CRIBL_DIST_MASTER_FAILOVER_PERIOD`: Determines how often the primary Leader refreshes its hold on the Lease file. Cribl recommends setting this to `5s`.

For further variables, see Environment Variables.

Monitoring the Leader Nodes

To view the status of your Leader Nodes, select **Monitoring** > **System** > **Leaders**.

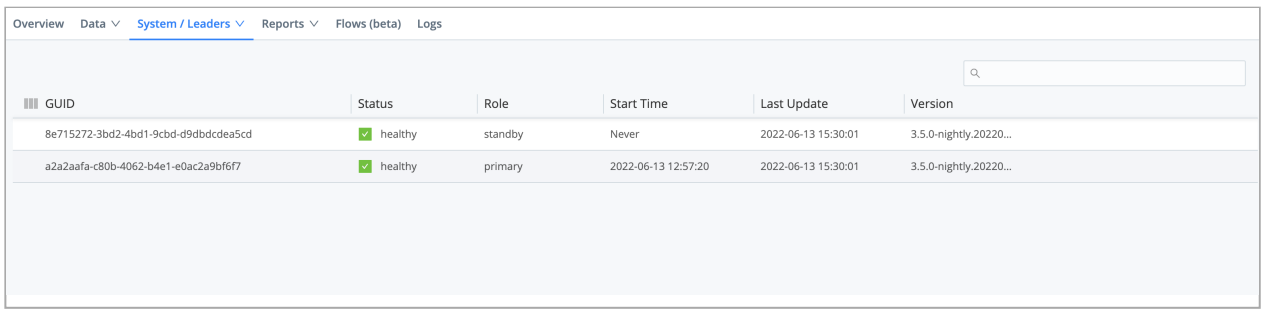

Upgrading

When upgrading:

- Stop both Leaders.
- Upgrade (Stream, Edge) the Primary Leader, Second Leader, and then each Worker Node, respectively.

Disabling the Second Leader

Cribl recommends that you maintain a second Leader to ensure continuity in your on-premises distributed environment. Should you decide to disable it, contact support to assist you.

4.2.7. Converting a Single Instance to Distributed Deployment

If you've configured a Cribl Stream single-instance deployment and now want to promote it to distributed, here are a couple of approaches to doing so, while retaining the configuration you've already created.

Simple Copy

We'll start with the simplest scenario, in which you plan to set up distributed mode with a single Worker Group. By default, this group will literally be named `default`. (We'll also explain how to extend this scenario.)

1. If you haven't already installed `git` (required for the Leader), do so as outlined here.
2. Stop the Cribl Stream server (`./cribl stop`).
3. Your single instance's configs are under Cribl Stream's `local/` subdirectory. So, copy `$CRIBL_HOME/local/cribl/*` to `$CRIBL_HOME/groups/default/local/cribl/`.

   This stages your configs for the `default` Worker Group.
4. Restart Cribl Stream, selecting **Distributed Mode**: `Leader`.
5. At this point, the Leader should have inherited your previous single-instance settings. Commit and deploy these settings to the `default` group, which should resume the same data processing that your single instance was executing.
6. If you want to replicate the same configs to additional Worker Groups, add those groups now via the **Manage** > **Groups** UI. Then repeat the preceding four steps, targeting the new subdirectories that have been created on the filesystem for the new groups.

> Creating multiple Worker Groups requires an Enterprise or Standard license.

rsync

This alternative approach uses `rsync` to replicate your single-instance configs.

1. Use this command to rsync your single-instance configuration to each of your distributed Groups (replacing the `<group-name>` placeholder here):

```
rsync -a $cribl/local/cribl newmaster:$cribl/groups/<group-name>/local/
```

2. Restart Cribl Stream, selecting **Distributed Mode**: `Leader`.

3. Commit and deploy the new configuration.

4.3. Orchestrated Deployment

4.3.1. Kubernetes/Helm Deployment

Boot fully provisioned Leader and Worker Nodes via Helm

Cribl's leader and workergroup Helm charts provide a fast way to deploy a distributed Cribl Stream environment to a Kubernetes cluster.

For up-to-date details on Prerequisites, Deploying, Upgrading, and running distributed on a Free License, see the Cribl Helm Charts repo's Readme.

K8s Leader Deployment

The rest of this page outlines how to deploy a Cribl Stream Leader Node (or single instance) to AWS via Kubernetes, using a Cribl-provided Leader Helm chart.

> This chart is a work in progress, provided as-is. Cribl expects to further develop and refine it.
>
> Cribl recommends deploying the Leader on stable, highly available infrastructure, because of its role in coordinating all Worker instances.

Deprecation Notice

This chart replaces the `logstream-master` chart, which was deprecated as of v.2.9.9. See Migration below for instructions on migrating to this new chart to access features newly provided in this and future versions.

New Capabilities

- Supports Cribl Stream v.4.1.0 (default version).

Deployment

As built, Cribl's chart will deploy a Cribl Stream Leader server for Cribl Stream, consisting of a deployment, two services, and a number of persistent volumes.

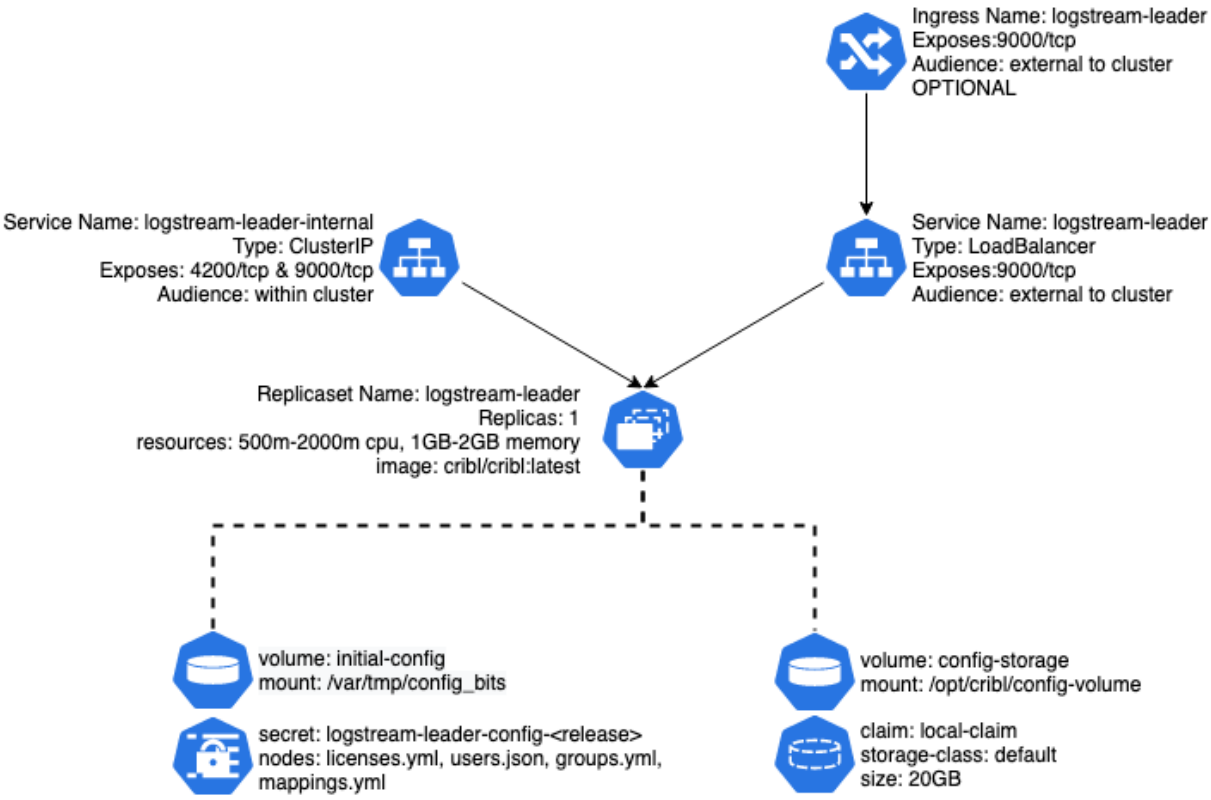

Deployment schematic

Note that this chart creates two load-balanced services:

- The main one (named after the Helm release), which is intended as the primary service interface for users.
- The "internal" one (named `<helm-release>-internal`), which is intended for the worker-group-to-leader communication.

> By default, this chart installs only a Cribl Stream Leader Node. To also deploy Cribl Stream Worker Groups/Fleets via Helm, you can use the Set Up Worker Groups/Mappings override described below.
>
> You can also use Cribl's separate logstream-workergroup chart. For details, see Kubernetes Deployment: Worker Group/Fleet in this documentation.

AWS and Kubernetes Prerequisites

This section covers both general and specific prerequisites, with a bias toward the EKS-oriented approach that Cribl uses for its own deployments.

Set Up AWS CLI

Install the AWS CLI, version 2, following AWS' instructions.

Next, create or modify your `~/.aws/config` file to include (at least) a `[profile]` section with the following SSO (single-sign-on) details:

```
[profile <your-profile-name>]
sso_start_url = https://<your-domain>/start#/
sso_region = <your-AWS-SSO-region>
sso_account_id = <your-AWS-SSO-account-ID>
sso_role_name = <your-AWS-role-name>
region = <your-AWS-deployment-region>
```

Set Up kubectl

You will, of course, need `kubectl` set up on your local machine or VM. Follow Kubernetes' installation instructions.

Add a Cluster to Your kubeconfig File

You must modify your `~/.kube/config` file to instruct kubectl what cluster (context) to work with.

1. Run a command of this form: `aws --profile <profile-name> eks update-kubeconfig --name <cluster-name>`
   This should return a response like this: `Added new context arn:aws:eks:us-west-2:424242424242:cluster/<cluster-name> to /Users/<username>/.kube/config`

2. In the resulting `~/.kube/config` file's `args` section, as the new first child, insert the profile argument that you provided to the aws command. For example:

```
args:
- --profile=<profile-name>
- --region
[...]
```

3. Also change the `command: aws` pair to include the full path to the `aws` executable. This is usually in `/usr/local/bin`, in which case you'd insert: `command: /usr/local/bin/aws`.

This section of `~/.kube/config` should now look something like this:

```
      args:
      - --profile=<profile-name>
      - --region
      - us-west-2
      - eks
      - get-token
      - --cluster-name
      - lab
      command: /usr/local/bin/aws
      env:
      - name: AWS_PROFILE
        value: <profile-name>
```

With these AWS and Kubernetes prerequisites completed, you're now set up to run `kubectl` commands against your cluster, as long as you have an active aws SSO login session.

Next, do the Helm setup.

Install Helm and Cribl Repo

1. You'll need Helm (preferably v.3.x) installed. Follow the instructions here.

2. Add Cribl's repo to Helm, using this command: `helm repo add cribl https://criblio.github.io/helm-charts/`

Persistent Storage

The chart requires persistent storage. It will use your default StorageClass, or (if you prefer) you can override `config.scName` with the name of a specific StorageClass to use.

Cribl has tested this chart primarily using AWS EBS storage, via the CSI EBS driver. The volumes are created as `ReadWriteOnce` claims. For details about storage classes, see Kubernetes' Storage Classes documentation.

AWS-Specific Notes

If you're running on EKS, Cribl highly recommends that you use Availability Zone–specific node groups. For details, see eksctl.io's Autoscaling documentation.

> Do not allow a single node group to spans AZs. This can lead to trouble in mounting volumes, because EBS volumes are AZ-specific.

See other EKS-Specific Issues on our GitHub repo.

Configure the Chart's Values

You'll want to override some of the chart's default values. The easiest way is to copy this chart's default `values.yaml` file from our repo. save it locally, modify it, and install it in Helm:

1. Copy the **raw** contents of: https://github.com/criblio/helm-charts/blob/master/helm-chart-sources/logstream-leader/values.yaml
2. Save this as a local file, e.g.: `/bar/values.yaml`
3. Modify values as necessary (see Values to Override in the Helm Charts docs).
4. Install your updated values to Helm, using this command: `helm install -f /bar/values.yaml`

Match Versions

Cribl recommends that you use the same Cribl Stream version on Worker Nodes/Edge Nodes versus the Leader Node. So if, for any reason, you're not yet upgrading your Workers to the version in the Leader's default `values.yaml` > `criblImage.tag`, be sure to override that `criblImage.tag` value to match the version you're running on all Workers.

EKS-Specific Values

If you're deploying to EKS, many annotations are available for the load balancer. Set these as values for the `service.annotations` key. Internally, we typically use the annotations for logging to S3, like this:

```
    service.beta.kubernetes.io/aws-load-balancer-access-log-enabled: "true"
    service.beta.kubernetes.io/aws-load-balancer-access-log-emit-interval: "5"
    service.beta.kubernetes.io/aws-load-balancer-access-log-s3-bucket-name: "<bucket
name>"
    service.beta.kubernetes.io/aws-load-balancer-access-log-s3-bucket-prefix: "ELB"
```

For an exhaustive list of annotations you can use with AWS's Elastic Load Balancers, see the Kubernetes Service documentation.

Basic Chart Installation

With the above prerequisites and configuration completed, you're ready to install our chart to deploy a Cribl Stream Leader Node. Here are some example commands:

- To install the chart with the release name `logstream-leader`:
  `helm install logstream-leader cribl/logstream-leader`

- To install the chart using the storage class `ebs-sc`:
  `helm install logstream-leader cribl/logstream-leader --set config.scName='lebs-sc`

Post-Install/Post-Upgrade

Cribl Stream will not automatically deploy changes to the Worker Nodes/Edge Nodes. You'll need to commit and deploy changes to all of your Worker Groups/Fleets.

Change the Configuration

If you don't override its default values, this Helm chart effectively creates a single-instance deployment of Cribl Stream, using the standard container image. You can later configure distributed mode, licensing, user passwords, etc., all from the Cribl Stream UI. However, you also have the option to change these configuration details upfront, by installing with value overrides. Here are some common examples.

Apply a License

If you have a Standard or Enterprise license, you can use the `config.license` parameter to add it as an override to your install:

```
helm install logstream-leader cribl/logstream-leader --set config.license="<long encoded license string redacted>"
```

Run Distributed on a Free License

If you do not specify a license with `config.license`, and you want to run distributed, you'll need to go to Cribl Stream's **Settings** > **Global Settings** > **Licensing** UI page and accept the Free license. (The Free license allows one Worker Group/Fleet.)

If your Helm configuration includes the `config.groups` option, the Cribl Stream Leader Node will be configured as a distributed Leader. If you omit that option, it will be configured as a single instance. (You can later use Cribl Stream's **Settings** > **Global Settings** > **Distributed** page to select **Mode:** `Leader`.)

Set the Admin Password

Normally, when you first install Cribl Stream and log into the UI, it prompts you to change the default admin password. You can skip the password-change challenge by setting your admin password via the `config.adminPassword` parameter:

```
helm install logstream-leader cribl/logstream-leader --set config.adminPassword="<new password>"
```

Set Up Worker Groups/Mappings

As mentioned above, the chart's default is to install a vanilla deployment of Cribl Stream. If you are deploying as a Leader, you can use the `config.groups` parameter to define the Worker Groups/Fleets you want created and mapped. Each group in the list you provide will be created as a Worker Group/Fleet, with a Mapping Rule to seek a tag with that Worker Group's name in it:

```
helm install logstream-leader cribl/logstream-leader --set config.groups={group1,group2,group3}
```

The example above will create three Worker Groups/Fleets/Fleets – `group1`, `group2`, and `group3` – and a Mapping Rule for each.

Migrating from the logstream-master Chart

Here is how to migrate from the deprecated `logstream-master` chart to `logstream-leader`.

Exporting your Configuration

You'll need to "export" your data from the existing `logstream-master` pod. And first, you'll need to get the current pod's name, as well as its namespace. The easiest way to do this is to run `kubectl get pods -A` and then look pods that start with the release name you used when you ran `helm install`. For example, if you installed with the following command:

```
helm install ls-master cribl/logstream-master
```

...you'd look for a pod name that started with `ls-master`.

Once you've identified your pod and namespace, you can export your configuration using a combination of `kubectl` and `tar`:

```
kubectl exec <pod name> -n <namespace> -- bash -c "cd /opt/cribl/config-volume; tar cf - ." > cribl_backup.tar
```

This command executes the tar based back up of the config-volume, and outputs it to a local tar file (`cribl_backup.tar`).

"Re-Hydrating" the Backup on the logstream-leader Chart

Exploding the tarball onto the new persistent volume is a one-time event. Once the config volume is restored, you'll make changes to the config via the Cribl Stream UI or API. Either approach will change the config on disk, which you wouldn't want to overwrite the next time the pod restarts. You can manually re-hydrate the backup by installing the logstream-leader chart, and then running the following command:

```
cat cribl_backup.tar| kubectl -n <namespace> exec --stdin <pod name> -- bash -c "cd
/opt/cribl/config-volume/; tar xf -"
```

This will restore the data into the config volume (which is mounted as `/opt/cribl/config-volume`). If you want to double-check that, run:

```
kubectl -n <namespace> exec <pod name> -- bash -c "ls -alR /opt/cribl/config-volume"
```

After this, you want to **delete** the active pod, allowing the new one to come up with the restored configuration. To do this, you'd run the following `kubectl` command:

```
kubectl -n <namespace> delete <pod name>
```

This will cause the pod to exit, but the deployment will replace it with a new pod which will use the same config persistent volume.

Reconfiguring the Worker Groups/Fleets

Now that you've got a new working leader chart, you need to tell the workers to connect to the new leader instead of to the old `logstream-master` instance. This is a simple `helm upgrade` operation. You'll need to use the same command string that you used to install, changing the word `install` to `upgrade`. But change the value of `config.host` to the new service that was created for the logstream-leader install. (You can change `config.host` either via the `--set` option or in the `values.yml` file.) For example, if you ran the `logstream-leader` install with the release name `ls-lead`, like this:

```
helm install ls-lead -f <values file> cribl/logstream-leader
```

...you'd run `kubectl get service -n <namespace> | grep ls-lead` to get the two services that it created, and you'll want the name of the one that ends in `-internal`. In this case, that name would be `ls-lead-leader-internal`.

Assume that for your workergroup install, you used a release name of `ls-wg1`, and a values file named `my-values.yml` with the following contents:

```
config:
  host: logstream-master-internal
  group: kubernetes
  token: criblmaster
  rejectSelfSignedCerts: 0
```

...then you'd replace the `host` value in this file with `ls-lead-leader-internal`, and then run:

```
helm upgrade ls-wg1 -f my-values.yml -n <namespace>
```

The upgrade **should** replace all the existing workergroup pods with newly reconfigured ones. However, if you notice any workergroup pods with an AGE value indicating that it was started before the upgrade command, simply kill those pods, and they will re-spawn with the new configuration.

Preloading Configuration

The `extraConfigmapMounts` and `extraSecretMounts` options enable you to preload configuration files into the leader chart, via ConfigMaps and Secrets that you've created in your Kubernetes environment. However, because ConfigMaps and Secret mounts are read-only, you can't simply mount them into the configuration tree.

Therefore, you must mount them to a location outside of the `/opt/cribl` tree, and then copy the files into the tree at startup. This copying can be accomplished using environment variables, as we'll see below.

> Both ConfigMaps and Secret mounts can be made writable, but the K8s documentation recommends against this.

Configuration Locations

The chart creates a single configuration volume claim, `config-storage`, which gets mounted as `/opt/cribl/config-volume`. All Worker Group/Fleet configuration lives under the `groups/` subdirectory. If you have a Worker Group/Fleet named `datacenter_a`, its configuration will live in `/opt/cribl/config-volume/groups/datacenter_a`. See Configuration Files section for details on file locations.

Using Environment Variables to Copy Files

The cribl container's `entrypoint.sh` file looks for up to 30 environment variables assumed to be shell-script snippets to execute before Cribl Stream startup (`CRIBL_BEFORE_START_CMD_[1-30]`). It also looks for up to 30 environment variables to execute after Cribl Stream startup (`CRIBL_AFTER_START_CMD_[1-30]`).

The variables in each set need to be in order, and cannot skip a number. (The `entrypoint.sh` script breaks the loop the first time it doesn't find an env var, so if you have `CRIBL_BEFORE_START_CMD_1` skipping to `CRIBL_BEFORE_START_CMD_3`, then `CRIBL_BEFORE_START_CMD_3` will not be executed.)

The chart uses this capability to inject the license and to set up groups. We'll use this same capability to copy our config files into place. So if you've provided the `config.license` and `config.groups` variables (occupying the first two slots), you'll need to start with `CRIBL_BEFORE_START_CMD_3`. In the examples below, we'll start with `CRIBL_BEFORE_START_CMD_3`, assuming that a `config.license` and `config.groups` have been set.

Figuring Out Which Variable to Use

The easiest way to figure out which environment variable you need to use is to deploy the chart with all the options you plan to use (i.e., to use the `helm install` command with options that you plan to use for your deployment). Then check the pod definition for `CRIBL_*` environment variables. For example, if you used the following install command:

```
% helm install lsms -f ../leader-values.yaml -n logstream-ht cribl/logstream-leader
```

You can now get the pod's name:

```
% kubectl get pods -n logstream-ht
NAME                                          READY   STATUS    RESTARTS   AGE
lsms-leader-659bfccdd6-xsz67                  1/1     Running   0          52m
```

And then you can use `kubectl describe` to get the relevant environment variables:

```
% kubectl describe  pod/lsms-leader-659bfccdd6-xsz67 -n logstream-ht  | egrep
"CRIBL_.*START"
CRIBL_BEFORE_START_CMD_1:      if [ ! -e $CRIBL_VOLUME_DIR/local/cribl/licenses.yml
]; then mkdir -p $CRIBL_VOLUME_DIR/local/cribl ; cp
/var/tmp/config_bits/licenses.yml $CRIBL_VOLUME_DIR/local/cribl/licenses.yml; fi
CRIBL_BEFORE_START_CMD_2:      if [ ! -e $CRIBL_VOLUME_DIR/local/cribl/mappings.yml
]; then mkdir -p $CRIBL_VOLUME_DIR/local/cribl;  cp /var/tmp/config_bits/groups.yml
$CRIBL_VOLUME_DIR/local/cribl/groups.yml; cp /var/tmp/config_bits/mappings.yml
$CRIBL_VOLUME_DIR/local/cribl/mappings.yml; fi
CRIBL_AFTER_START_CMD_1:       [ ! -f $CRIBL_VOLUME_DIR/users_imported ] && sleep 20
&& cp /var/tmp/config_bits/users.json $CRIBL_VOLUME_DIR/local/cribl/auth/users.json
&& touch $CRIBL_VOLUME_DIR/users_imported
```

From that, you can tell that we already have a `CRIBL_BEFORE_START_CMD_1` and `CRIBL_BEFORE_START_CMD_2`, so our next logical variable should be `CRIBL_BEFORE_START_CMD_3`.

Preloading Scenario

Here's a preload scenario that includes a sample ConfigMap, `extraConfigmapMounts`, copy command, and copy-once flag.

The ConfigMap

Let's say we want to preconfigure a collector job in the `group1` Worker Group. The job will be called `InfrastructureLogs`, and it will read ELB logs from an S3 bucket. First, we'll need a `jobs.yml` file, like this:

```
InfrastructureLogs:
  type: collection
  ttl: 4h
  removeFields: []
  resumeOnBoot: false
  schedule: {}
  collector:
    conf:
      signatureVersion: v4
      enableAssumeRole: true
      recurse: true
      maxBatchSize: 10
      bucket: <my infrastructure logs bucket>
      path:
/ELB/AWSLogs/${aws_acct_id}/elasticloadbalancing/${aws_region}/${_time:%Y}/${_time:%m}/
      region: us-west-2
      assumeRoleArn: arn:aws:iam::<accountid>:role/LogReadAssume
    destructive: false
    type: s3
  input:
    type: collection
    staleChannelFlushMs: 10000
    sendToRoutes: false
    preprocess:
      disabled: true
    throttleRatePerSec: "0"
    breakerRulesets:
      - AWS Ruleset
    pipeline: devnull
    output: devnull
```

We'll need this loaded into a ConfigMap object, so we'd run kubectl to create a ConfigMap from the directory where our `jobs.yml` file resides:

```
kubectl create configmap job-config --from-file <containing directory> -n <deployment
namespace>
```

So if that file is in a directory called `./config-dir`, and we're deploying the leader chart into the `logstream` namespace, we'd create it like this:

```
kubectl create configmap job-config --from-file ./config-dir -n logstream
```

extraConfigmapMounts Config

In our `values.yaml` file, we need to specify the ConfigMap and where to mount it:

```
extraConfigmapMounts:
  - name: job-config
    configMap: job-config
    mountPath: /var/tmp/job-config
```

This example will mount the files in the ConfigMap into the pod's `/var/tmp/job-config` directory.

Copying the Config Files

You could simply define, in the `values.yaml` file (or via `--set`):

```
env:
  CRIBL_BEFORE_START_CMD_3: "cp /var/tmp/job-config /opt/cribl/config-
volume/groups/group1/local/cribl/jobs.yml"
```

However, there are two potential problems with that:

1. There is no guarantee that the destination directory tree will be there. (The first time a pod spins up, it won't be.)
2. If the pod has crashed and spun up anew, blindly copying will overwrite any changes previously made. This is rarely desirable behavior.

File Copying Pattern

Since we might want to copy multiple configuration files in one shot, it makes sense to use some sort of "flag file" to ensure that we copy the files only once. The script snippet to copy the `jobs.yaml` file looks like this, formatted for readability:

```
FLAG_FILE=/opt/cribl/config-volume/job-flag
if [ ! -e $FLAG_FILE ]; then
  mkdir -p /opt/cribl/config-volume/groups/group1/local/cribl # ensure the directory
tree exists
  cp /var/tmp/job-config/jobs.yml /opt/cribl/config-volume/groups/group1/local/cribl
# copy the file
  touch $FLAG_FILE
fi
```

This looks to see if the file `/opt/cribl/config-volume/job-flag` exists, and if it doesn't, creates the directory tree, copies the config file(s), and then creates the job flag file. However, we need to format it a little differently to easily encompass it in the `env` variable:

```
env:
  CRIBL_BEFORE_START_CMD_3: "FLAG_FILE=/opt/cribl/config-volume/job-flag; if [ ! -e
$FLAG_FILE ]; then mkdir -p /opt/cribl/config-volume/groups/group1/local/cribl; cp
/var/tmp/job-config/jobs.yml /opt/cribl/config-volume/groups/group1/local/cribl;
touch $FLAG_FILE; fi"
```

Once you run `helm install` with this in the `values.yaml` file, you can do `kubectl exec` on the pod to execute a shell:

```
kubectl exec -it <pod name> -- bash
```

...and then look at `/opt/cribl/config-volume/groups/group1/local/cribl/jobs.yml` to verify that it is in place.

Uninstall the Infrastructure

To spin down deployed pods, use the helm uninstall command – where `<release-name>` is the namespace you assigned when you installed the chart:

```
helm uninstall <release-name>
```

You can append the `--dry-run` flag to verify which releases will be uninstalled before actually uninstalling them:

```
helm uninstall <release-name> --dry-run
```

Known Issues

- Cribl's current architecture supports **only** TCP ports in Worker Groups'/Fleets' `service > ports` configuration. This restriction might be removed in future versions.

- The upgrade process from pre-2.4.0 versions creates an `initContainer`, which will run prior to any instance of the Cribl Stream pod. Because the coalescence operation will not overwrite existing data, this is not a functional problem. But depending on your persistent-volume setup, the `initContainer`'s precedence might cause pod restarts to take additional time while waiting for the volume claims to release. The only upgrade path that will have this issue is 2.3.* -> 2.4.0. In the next iteration, we'll remove the `initContainer` from the upgrade path.

- The upgrade process leaves the old `PersistentVolume`s and `PersistentVolumeClaim`s around. This is, unfortunately, necessary for this upgrade path. In follow-on versions, we will remove these volumes from the chart.

- See EKS-specific issues on our GitHub repo.

4.3.2. K8s Worker Deployment

Boot a fully provisioned Worker Group via Helm

This page outlines how to deploy a Cribl Stream Worker Group to AWS via Kubernetes, using a Cribl-provided Helm chart.

> This chart will deploy only a Cribl Stream Worker Group, whose functioning depends on the presence of a Cribl Stream Leader Node. To deploy the Leader, see Kubernetes Leader Deployment.

New Capabilities

- Supports Cribl Stream v.4.1.0 (default version).

Deployment

As built, Cribl's chart will deploy a simple Worker Group for Cribl Stream, consisting of a deployment, a service, a horizontal pod autoscaler configuration, and a secret used for configuration.

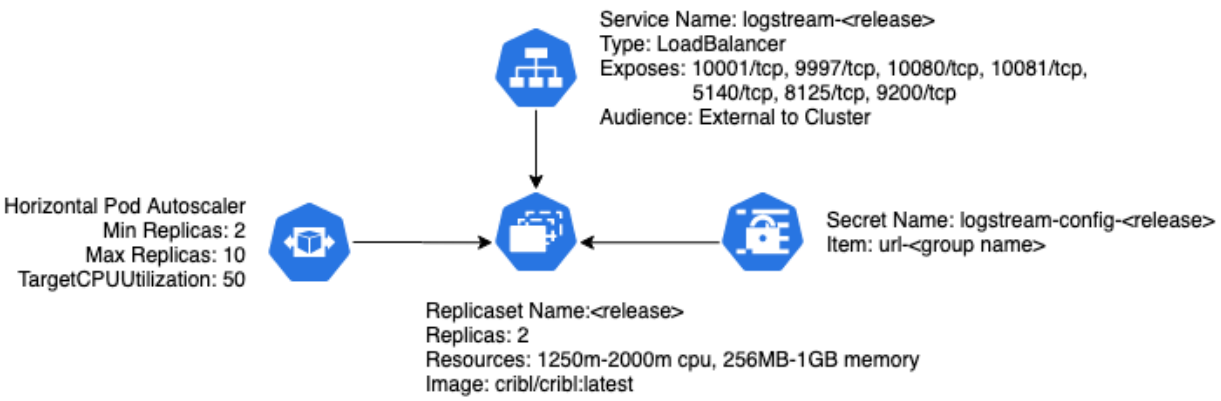

Deployment schematic

AWS and Kubernetes Prerequisites

This section covers both general and specific prerequisites, with a bias toward the EKS-oriented approach that Cribl uses for its own deployments.

Set Up AWS CLI

Install the AWS CLI, version 2, following AWS' instructions.

Next, create or modify your `~/.aws/config` file to include (at least) a `[profile]` section with the following SSO (single-sign-on) details:

```
[profile <your-profile-name>]
sso_start_url = https://<your-domain>/start#/
sso_region = <your-AWS-SSO-region>
sso_account_id = <your-AWS-SSO-account-ID>
sso_role_name = <your-AWS-role-name>
region = <your-AWS-deployment-region>
```

Set Up kubectl

You will, of course, need `kubectl` set up on your local machine or VM. Follow Kubernetes' installation instructions.

Add a Cluster to Your kubeconfig File

You must modify your `~/.kube/config` file to instruct kubectl what cluster (context) to work with.

1. Run a command of this form: `aws --profile <profile-name> eks update-kubeconfig --name <cluster-name>`
   This should return a response like this: `Added new context arn:aws:eks:us-west-2:424242424242:cluster/<cluster-name> to /Users/<username>/.kube/config`

2. In the resulting `~/.kube/config` file's `args` section, as the new first child, insert the profile argument that you provided to the aws command. For example:

```
args:
- --profile=<profile-name>
- --region
[...]
```

3. Also change the `command: aws` pair to include the full path to the `aws` executable. This is usually in `/usr/local/bin`, in which case you'd insert: `command: /usr/local/bin/aws`.

This section of `~/.kube/config` should now look something like this:

```
      args:
      - --profile=<profile-name>
      - --region
      - us-west-2
      - eks
      - get-token
      - --cluster-name
      - lab
      command: /usr/local/bin/aws
      env:
      - name: AWS_PROFILE
        value: <profile-name>
```

With these AWS and Kubernetes prerequisites completed, you're now set up to run `kubectl` commands against your cluster, as long as you have an active aws SSO login session.

Next, do the Helm setup.

Install Helm and Cribl Repo

1. You'll need Helm (preferably v.3.x) installed. Follow the instructions here.

2. Add Cribl's repo to Helm, using this command: `helm repo add cribl https://criblio.github.io/helm-charts/`

3. Display the default values available to configure Cribl's `logstream-workergroup` chart: `helm show values cribl/logstream-workergroup`

Configure the Chart's Values

You'll want to override some of the values you've just displayed. The easiest way is to copy this chart's default `values.yaml` file from our repo. save it locally, modify it, and install it in Helm:

1. Copy the **raw** contents of: https://github.com/criblio/helm-charts/blob/master/helm-chart-sources/logstream-workergroup/values.yaml

2. Save this as a local file, e.g.: `/foo/values.yaml`

3. Modify values as necessary (see Values to Override in the Cribl Helm Charts docs). To see the full scope of values available, run: `helm show values cribl/logstream-workergroup`.

4. Install your updated values to Helm, using this command: `helm install -f /foo/values.yaml`

Match Versions

Cribl recommends that you use the same Cribl Stream version on Leader Nodes versus Worker Group/Fleet Nodes. So, if you're not yet upgrading your Leader to the version in the current `values.yaml > criblImage.tag`, be sure to override that `criblImage.tag` value to match the version you're running on the Leader.

Set Worker Processes Statically

For all container-based Worker Groups, Cribl recommends that you directly specify the Worker **Process count** using a positive integer (like `+3`). This convention prevents the overprovisioning of Worker Processes that can occur with dynamic values (like the default `-2` setting).

To access **Process count** in Stream's UI, select **Group Settings** > **System** > **Worker Processes** (distributed deployments) or **Settings** > **System** > **Service Processes** (single-instance deployments).

Install the Chart

With the above prerequisites and configuration completed, you're ready to install our chart to deploy a Cribl Stream Worker Group/Fleet. Here are some example commands:

- To install the chart with the release name `logstream-wg`:
  ```
  helm install logstream-wg cribl/logstream-workergroup
  ```
- To install the chart using the Cribl Stream Leader `logstream.lab.cribl.io`:
  ```
  helm install logstream-wg cribl/logstream-workergroup --set
  config.host='logstream.lab.cribl.io
  ```
- To install the chart using the Cribl Stream Leadermast `logstream.lab.cribl.io` in the namespace `cribl-helm`:
  ```
  helm install logstream-wg cribl/logstream-workergroup --set
  config.host='logstream.lab.cribl.io' -n cribl-helm
  ```

Upgrading

You upgrade using the `helm upgrade` command. But it's important to ensure that your Helm repository cache is up to date, so first issue this command:

```
helm repo update
```

After this step, invoke:

```
helm upgrade <release> -n <namespace> cribl/logstream-workergroup
```

For the example above, where the release is `logstream-wg` and is installed in the `cribl-helm` namespace, the command would be:

```
helm upgrade logstream-wg -n cribl-helm cribl/logstream-workergroup
```

This Helm chart's upgrade is idempotent, so you can use the upgrade mechanism to upgrade the chart, but you can also use it to change its configuration (as outlined in Change the Configuration).

Optional: Kubernetes API Access

Versions 2.4.0+ include access mechanisms for Worker Groups to access the Kubernetes API.
The `values.yaml` file provides three relevant options:

- `rbac.create` – Enables the creation of a Service Account, Cluster Role, and Role Binding (which binds the first two together) for the release.
- `rbac.resources` – Specifies the Kubernetes API resources that will be available to the release.
- `rbac.verbs` – Specifies the API verbs that will be available to the release.
- `rbac.extraRules` – Additional rulesets for the cluster role.

For more information on the verbs and resources available, see Kubernetes' Using RBAC Authorization documentation.

Change the Configuration

Once you've installed a release, you can get its `values.yaml` file by using the `helm get values` command. For example, assuming a release name of `logstream-wg`, you could use this command:

```
helm get values logstream-wg -o yaml > values.yaml
```

This will retrieve a local `values.yaml` file containing the values in the running release, including any values that you overrode when you installed the release.

You can now make changes to this local `values.yaml` file, and then use the `helm upgrade` operation to "upgrade" the release with the new configuration.

For example, assume you wanted to add an additional TCP-based syslog port, listening on port 5141, to the existing `logstream-wg` release. In the `values.yaml` file's `service` > `ports` section, you'd add the three key-value pairs shown below:

```
service:
  [...]

  ports:
  [...]
  - name: syslog
    port: 5141
    protocol: TCP
```

Then you'd run:

```
helm upgrade logstream-wg cribl/logstream-workergroup -f values.yaml
```

Remember, if you installed in a namespace, you need to include the `-n <namespace>` option to any `helm` command. You'll still have to create the source in your Cribl Stream Leader, and commit and deploy it to your Worker Group/Fleet.

Using Persistent Storage for Persistent Queueing

The `extraVolumeMounts` option makes it feasible to use persistent volumes for Cribl Stream persistent queueing. However, Cribl does not recommend this combination – there is variability in persistent-storage implementations, and this variability can lead to problems in scaling Worker Groups/Fleets. However, if you choose to implement persistent volumes for queueing, please consider these suggestions:

1. Use a shared-storage-volume mechanism. We've worked with the EFS CSI driver for AWS, and it works fairly well (although it can be tedious to configure).

2. Understand your Kubernetes networking topology, and how that topology interacts with your persistent-storage driver. (For example, if you're on AWS, ensure that your volumes are available in all Availability Zones that your nodes might run in.)

3. Monitor the Worker Group/Fleet pods for volume issues. The faster you can see such issues and react, the more likely that you'll be able to resolve thema.

Uninstall the Infrastructure

To spin down deployed pods, use the helm uninstall command – where `<release-name>` is the namespace you assigned when you installed the chart:

```
helm uninstall <release-name>
```

You can append the `--dry-run` flag to verify which releases will be uninstalled before actually uninstalling them:

```
helm uninstall <release-name> --dry-run
```

Notes on This Example

- If you installed in a namespace, you'll need to include the `-n <namespace>` option in any `helm` command.
- In the above syslog example, you'd still need to configure a corresponding syslog Source in your Cribl Stream Leader, and then commit and deploy it to your Worker Group(s)/Fleet(s).

Known Issues

- The chart currently supports **only** TCP ports in `service > ports` for Worker Groups/Fleets. This limitation might be removed in future versions.
- See EKS-specific issues on our GitHub repo.

4.4. Docker Deployment

You can use the following `docker-compose.yml` to stand up a Cribl Stream distributed deployment of a Leader and one or more Workers:

```
version: '3.8'
services:
  master:
    image: cribl/cribl:latest
    environment:
      - CRIBL_DIST_MODE=master
      - CRIBL_DIST_MASTER_URL=tcp://criblmaster@0.0.0.0:4200
      - CRIBL_VOLUME_DIR=/opt/cribl/config-volume
    ports:
      - "19000:9000"
    volumes:
      - "~/cribl-config:/opt/cribl/config-volume"
  workers:
    image: cribl/cribl:latest
    depends_on:
      - master
    environment:
      - CRIBL_DIST_MODE=worker
      - CRIBL_DIST_MASTER_URL=tcp://criblmaster@master:4200
    ports:
      - 9000
```

This uses a local directory, `~/cribl-config`, as a persistent configuration store for Cribl Stream. **You must create this directory** on your host OS' filesystem before you run the `docker-compose` command.

With a Leader on Cribl.Cloud, encryption is enabled by default. Set the hybrid Worker's `CRIBL_DIST_MASTER_URL` environment variable to begin with the `tls://` protocol. For example:

```
CRIBL_DIST_MASTER_URL=tls://<token>@logstream-<tenant>.cribl.cloud:4200
```

If you prefer to use ephemeral storage, simply delete line 8 (the `CRIBL_VOLUME_DIR` definition) and lines 11–12 (the `volumes` configuration) before running the `docker-compose` command.

> Cribl recommends deploying the Leader on stable, highly available infrastructure, because of its role in coordinating all Worker instances.

Selecting the Number of Workers

To deploy a Leader Node, plus (e.g.) two Workers already configured and wired up to the Leader, use this command:

```
docker-compose up -d --scale workers=2
```

To deploy a different number of Workers, just change the `workers=2` value.

If you are deploying the Leader and Workers on the same machine or VM, and the Leader is crashing with two workers, make sure you are allocating enough memory to Docker.

Default Image, OS, and Port Assignments

By default, the above command pulls the freshest stable image (tagged `cribl/cribl:latest`) from Cribl's Docker Hub. As of Cribl Stream v.3.3, our Docker images are built on Ubuntu 20.04.

Launching Docker containers with the above `docker-compose.yml` file will default to the following URLs and ports:

- Leader URL: `http://localhost:19000`
- Worker URLs: `http://localhost:<automatically-assigned-host-ports>`

With virtual machines, the VMs' IP addresses would replace `localhost`. The automatic assignment of available host-OS ports to the Workers prevents port collisions. **Within** the Docker container, these ports will forward over TCP to port 9000. To see the ports assigned on the OS, enter:

```
docker ps
```

You should see results like these:

```
CONTAINER ID   IMAGE                 COMMAND                  CREATED          STATUS
PORTS                                          NAMES
a3de9ea8f46f   cribl/cribl:latest    "/sbin/entrypoint.sh…"   12 seconds ago   Up 10
seconds   0.0.0.0:63411->9000/tcp                       docker_workers_1
40aa687baefc   cribl/cribl:latest    "/sbin/entrypoint.sh…"   12 seconds ago   Up 10
seconds   0.0.0.0:63410->9000/tcp                       docker_workers_2
df362a65f7d1   cribl/cribl:latest    "/sbin/entrypoint.sh…"   13 seconds ago   Up 11
seconds   0.0.0.0:19000->9000/tcp, :::19000->9000/tcp   docker_master_1
```

The host-OS ports are shown on the left, forwarding to the container-internal ports on the right. You can use the `docker_workers_N` ports if you want to log directly into Workers. In the above example:

- Worker1 URL: `http://localhost:63411`

- Worker2 URL: `http://localhost:63410`

Adding Port, Forwarding, and Protocol Assignments

To specify additional ports in a distributed deployment, add them to the `docker-compose.yml` file's `workers > ports` section:

```
version: '3.8'
services:
  [...]
  workers:
    image: cribl/cribl:latest
    depends_on:
      - master
    environment:
      - CRIBL_DIST_MODE=worker
      - CRIBL_DIST_MASTER_URL=tcp://criblmaster@master:4200
    ports:
      - 9000
      - <Additional ports go here>
```

You can specify port forwarding, and TCP versus UDP protocol, in the same keys:

```
    ports:
      - 9000
      - "10060:10060/tcp"
      - "10070:10070/tcp"
```

Updating the Docker Image

Cribl recommends that you always use our latest stable container image wherever possible. This will provide bug fixes and security patches for any vulnerabilities that Cribl has discovered when scanning the base image OS, dependencies, and our own software.

Note that the sample `docker-compose.yml` provided above automatically specifies the latest stable image at:

```
image: cribl/cribl:latest
```

You can explicitly pull the latest stable image with this CLI command:

```
docker pull cribl/cribl:latest
```

Updating the Packaged OS

Cribl strongly recommends that you monitor and patch vulnerabilities in the packaged OS. The base OS might have been updated with fixes for new vulnerabilities discovered after Cribl published its container images. This is especially important if you choose to keep an earlier Cribl image in production.

You can update the base OS image by updating the package, as shown in the following `Dockerfile`. This example assumes you're updating Cribl's `latest` image:

Dockerfile

```
FROM cribl/cribl:latest
RUN apt-get update && \
    apt-get -y upgrade dpkg
```

5. Administering

5.1. Licensing

Every Cribl Stream download package comes with a Free license that allows for processing of up to 1 TB/day. This license requires sending anonymized Telemetry Data to Cribl.

Enterprise, Standard, and Sales Trial licenses are entitled to a defined, per-license daily ingestion volume. These licenses do not require sending telemetry metadata.

> This page does not apply to Cribl.Cloud plans. See Deploy Cloud for information about the Cribl.Cloud Enterprise plan.

Managing Licenses – Adding and Renewing

You can add and manage licenses at **Settings** > **Global Settings** > **Licensing**. Click **Add License** to paste in a license key provided to you by Cribl.

This applies to Cribl Stream Standard and Enterprise licenses, which must be renewed annually. Free licenses are already onboard the download package, need not be added or managed here, and do not expire.

Exemptions from License Quotas

Cribl does not require a separate license for sending data from Cribl Stream to Cribl Stream, such as sending from one Worker Group/Fleet managed by Leader Node A to a different Worker Group/Fleet managed by Leader Node B. In such situations, the same license used on Leader Node A can be used on Leader Node B.

Data generated by Cribl Internal Sources normally does not count against your ingestion quota.

If you are connecting Workers/Edge Nodes in a Cribl Stream Cloud hybrid deployment, you are granted additional exemptions to prevent double billing:

- Data transferred between Cribl Stream Workers via the Cribl HTTP and Cribl TCP Sources does not count against your ingestion quota.
- Data sent from Cribl Edge's Cribl HTTP and Cribl TCP Destinations to Cribl Stream is counted against quota only in Cribl Edge.

- Data generated by Datagens does not count against your ingestion quota.

License Types

Cribl offers four Cribl Stream license types, summarized below.

> License terms are subject to change. For a detailed comparison of what's currently included in each license type, please see Cribl Pricing.

Enterprise License

This is a license available for purchase.

- Up to unlimited data ingestion.
- Up to unlimited Worker Groups and Fleets.
- Up to unlimited Worker Processes and Edge Nodes.
- Role-based access control.
- External authentication (via LDAP, Splunk, and OpenID Connect identity providers).
- Git remote backup.
- All other Cribl Stream features included.

Contact Cribl Sales at sales@cribl.io for more information.

Standard License

This is a license available for purchase. Compared to an Enterprise license, it offers a cost discount, in exchange for some limitations (all data volumes below based on uncompressed data size):

- Daily ingestion up to 5 TB/day.
- Maximum 1 Worker Group and 1 Fleet.
- Maximum 50 Worker Processes, and 100 Edge Nodes.
- External authentication supported, with undifferentiated Roles: all users are imported as `admin`.
- Git remote backup.

Contact Cribl Sales at sales@cribl.io for more information.

Free License

Free licenses ship in the download package, and are permanent. They impose some limitations:

- Daily ingestion up to 1 TB/day.
- Maximum 10 Worker Processes, and 100 Edge Nodes.
- Maximum 1 Worker Group and 1 Fleet.

The Cribl Stream Free license requires sending of anonymized telemetry metadata to Cribl. This license will block inputs if sending fails, after a grace period of 24 hours.

> **"One" License**
>
> As of February 1, 2022, Cribl simplified Free licensing by retiring the former "LogStream One" license. This license type, which carried a slightly different mix of limitations and privileges, will no longer be issued to new licensees.
>
> However, if you have a current LogStream One license, you can continue to use it, and renew it, for as long as you like. Contact your Cribl sales rep, or sales@cribl.io, to arrange your annual renewal.

Sales Trial License

A license type used when preparing a POC (proof of concept), or a pilot, whose requirements go beyond those afforded by the Free license. Contact Cribl Sales at sales@cribl.io for more information.

Combining License Types

Multiple license types can coexist on an instance. However, only a **single type** of license can be effective at any one time. When multiple types coexist, the following method of resolution is used:

- If there are any unexpired Enterprise or Standard licenses – use only these licenses to compute the effective license.
- Else, if there are any Sales Trial licenses – use only Sales Trial licenses to compute the effective license.
- Else, if there exists a Free license – use only the Free license to compute the effective license.

When an Enterprise or Standard license expires, Cribl Stream will fall back to the Sales Trial or Free type. However, an expired Sales Trial license cannot fall back to a Free license.

> **When Licenses Expire**

> Upon expiration of a paid license, if there is no fallback license, Cribl Stream will backpressure and block all incoming data.

Licensing in Distributed Deployments

With licenses that limit the number of Worker/Edge Node Processes, Cribl Stream will attempt to balance (or rebalance) Worker/Edge Node (threads) as evenly as possible across all licensed Worker/Edge Nodes.

On Cribl Stream (LogStream) 2.3 or later, and Cribl Edge, you need to configure licensing only on the Leader Node. (See Managing Licenses – Adding and Renewing.) The Leader will push license information down to Worker Groups/Fleets as part of the heartbeat (Edge, Stream).

Telemetry Data

A **Free** license requires sharing of telemetry **metadata** with Cribl. Cribl uses this metadata to help us understand how to improve the product and prioritize new features.

Telemetry payloads are sent from all Cribl Stream nodes (Leader and Workers), to an endpoint located at `https://cdn.cribl.io/telemetry/`.

Testing the Telemetry Endpoint's Connectivity

To manually test connectivity to the telemetry endpoint, especially if you are needing to configure a proxy, you can use the following command:

```
$ curl https://cdn.cribl.io/telemetry/
```

Expected response:

```
cribl /// living the stream!
```

If you get a 302 response code, check whether you've omitted the URL's trailing `/`.

Disabling Telemetry and Live Help

With an Enterprise or Standard license, you have the option to disable telemetry sharing from on-prem Cribl Stream. With a Free license, disabling telemetry will cause Cribl Stream to block inbound traffic within 24 hours.

If you would like an exception to disable telemetry in order to deploy in your environment, please contact Cribl Sales at sales@cribl.io, and we will work with you to issue licenses on a case-by-case basis.

Once you have received a license that removes the telemetry requirement, you can disable telemetry in Cribl Stream's UI at **Settings** > **Global Settings** > **System > General > Upgrade & Share Settings > Sharing and Live Help**. Toggle the slider to **No**.

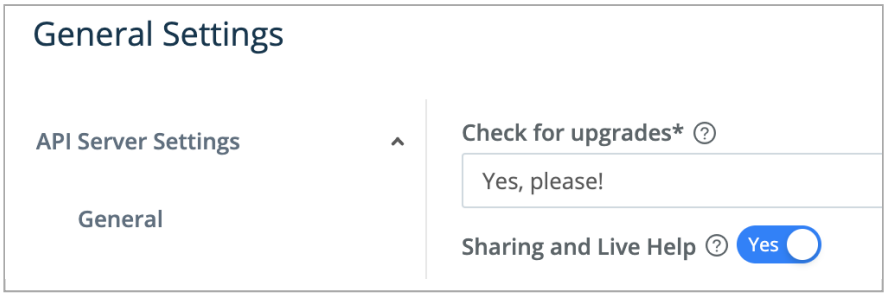

Sharing and Live Help toggle

Metadata Shared Through Telemetry

Your Cribl Stream instance shares the following metadata with Cribl per interval (roughly, every minute):

- Version
- Instance's GUID
- License ID
- Earliest, Latest Time
- Number of Events In and Out, overall and by Source type and Destination type
- Number of Bytes In and Out, overall and by Source type and Destination type
- Number of Open, Closed, Active Connections
- Number of Routes
- Number of Pipelines

How We Use Telemetry Data

With telemetry enabled, Cribl software sends usage data directly to Cribl. We securely store and encrypt this data on Cribl-managed servers, with restricted access.

Cribl fully anonymizes and aggregates this usage data in our systems of analysis. There, we use the aggregated metrics to improve Cribl products and services by analyzing circumstances around disruptions, opportunities for ingest efficiencies, and ways to optimize performance. Access is restricted to only those Cribl employees and contractors who require anonymized data to perform their jobs.

Cribl collects License IDs only to ensure that all data is being sent by a Cribl product. These IDs cannot be used to personally identify any user of Cribl software or Cribl cloud services.

For further details, see the Cribl Privacy Policy.

Licensing FAQ

How do I check my license type, restrictions, and/or expiration date?

Open Cribl Stream's **Settings** > **Global Settings** > **Licensing** page to see these details.

How can I track my actual data ingestion volume over the last 30 days?

Use the dashboard at **Monitoring** > **System** > **Licensing** to review your license consumption. For higher-fidelity metrics, you can enable the Cribl Internal Source's CriblMetrics option to forward metrics to your metrics Destination of choice, and run a report on `cribl.total.in_bytes`.

How does Cribl enforce license limits?

If your data throughput exceeds your license quota, Chuck Norris will track you down and make your life a living hell.

However, that will happen only in your nightmares. In the product itself:

- Free and Standard licenses enforce data ingestion quotas through limits on the number of Worker Groups/Fleets and Worker/Edge Node Processes.
- Enterprise license keys turn off all enforcement.
- When an Enterprise or Standard license expires, Cribl Stream will attempt to fall back to a trial or free license, or – only if that fails – will block incoming data. For details, see Combining License Types.

I'm using LogStream 2.3.0 or higher, with its "permanent, Free" license. Why is LogStream claiming an expired license, and blocking inputs?

This can happen if you've upgraded from a LogStream version below 2.3.0, in which you previously entered this earlier version's Free (time-limited) license key. To remedy this, go to **Settings** > **Global Settings** > **Licensing**, click to select and expand your expired Free license, and then click **Delete license**. Cribl Stream will fall back to the new, permanent Free license behavior, and will restore throughput.

If I pull data from compressed S3 buckets, is my license quota applied to the compressed or the uncompressed size of the file objects?

To measure license consumption, Cribl Stream uses the uncompressed size.

Troubleshooting Resources

Cribl University offers a Troubleshooting Criblet on Switching from Free to Enterprise. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Troubleshooting Criblets and Advanced Troubleshooting short courses.

5.2. Version Control

Tracking, backing up, and restoring configuration changes for single-instance and distributed deployments

Cribl Stream integrates with Git clients and remote repositories to provide version control of Cribl Stream's configuration. This integration offers backup and rollback for single-instance and distributed deployments.

These options are separate from the Git repo responsible for version control of Worker configurations, located on the Leader Node in distributed deployments. We cover all these options and requirements below.

> Cribl.Cloud deployments do not currently support integration with external Git clients or remote repos.

Git Installation (Local or Standalone/Single-Instance)

To verify that `git` is available, run:

```
git --version
```

The minimum version that Cribl Stream requires is: **1.8.3.1.** If you don't have `git` installed, see the installation links here.

Git Required for Some Features

Git is a hard requirement for certain Cribl Stream features.

Distributed Deployments

For distributed deployments, `git` **must** be installed and available locally on the host running the Leader Node.

All configuration changes must be committed before they are deployed. The Leader notifies Workers that a new configuration is available, and Workers pull the new configuration from the Leader Node.

Licensing Dashboard

Even on single-instance deployments, the Monitoring > Licensing dashboard will display configuration change markers only if you have `git` installed.

Committing Changes

Once Git is installed, you can commit configuration changes using the `git` CLI. You can also commit changes interactively, using Cribl Stream's UI.

Pending commits have a red dot indicator, as shown below. Click **Commit** to proceed.

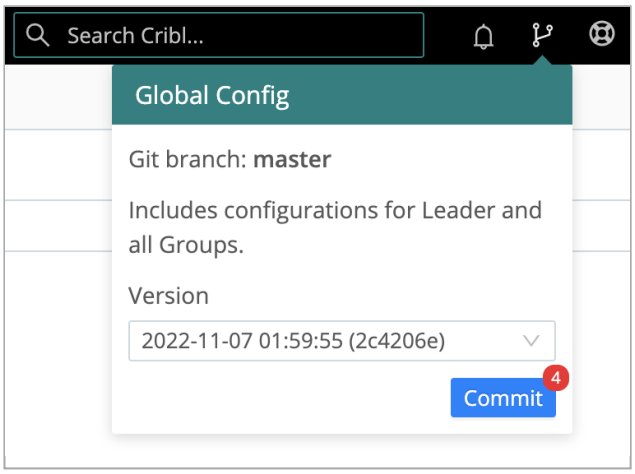

Changes pending commit

Next, in the resulting **Commit Changes** modal, you can verify the diff'ed configuration changes. Other options here include clearing individual files' check boxes to exclude them from the commit (as shown below), and clicking **Undo** to reverse the changes instead of committing them.

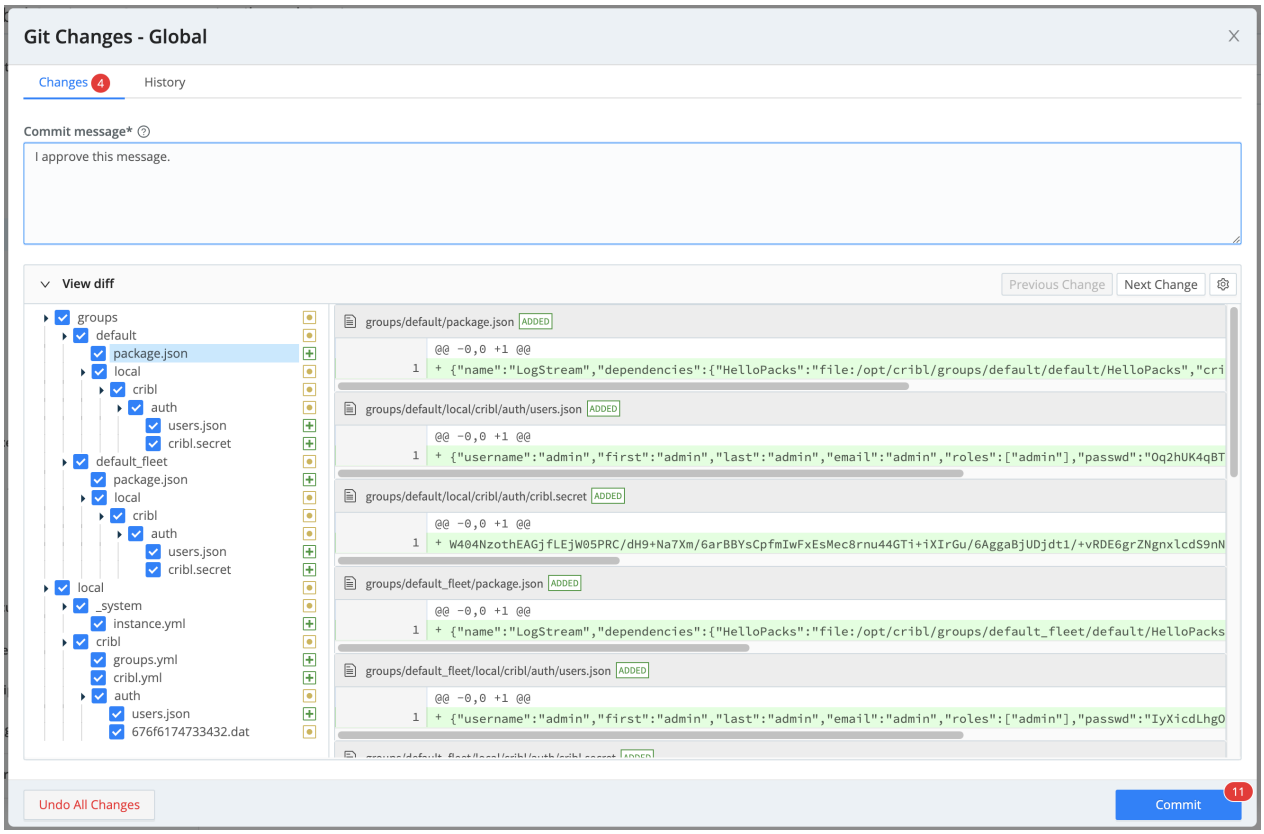

Reviewing a pending commit

When you're ready to commit to your commit, click **Commit**. Look for a **Commit successful** confirmation message at the lower right.

Reverting Commits

Once Git is installed, you can revert to a previous commit using the `git` CLI. You can also restore a Worker Group's previous commit using Cribl Stream's UI:

Select the commit from the **Config Version** drop-down, as shown below. (Note that you're selecting not a single commit to roll back, but the commit point to roll back **to**.)

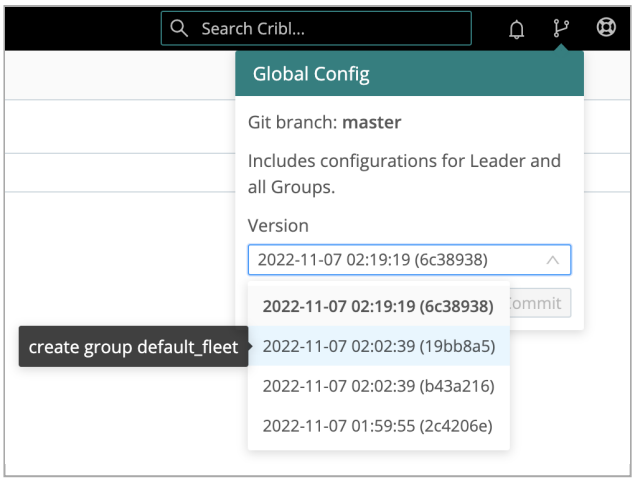

Then, in the resulting **Commit** modal, verify the diff'ed configuration changes and click **Revert**.

Undoing earlier commits

Finally, confirm permission for Cribl Stream to restart.

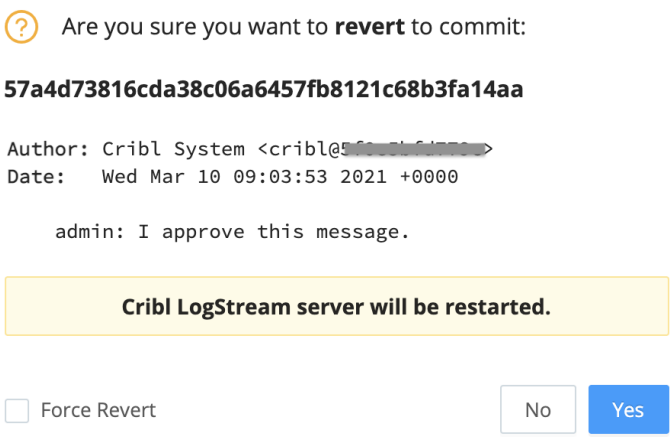

Support For Remote Repositories

Git **remote** repositories are supported – but not required – for version control of all configuration changes.

> This feature requires a Cribl Stream Enterprise or Standard license.

You can configure a Leader Node with Git remote push capabilities through the Cribl Stream CLI, or through the Cribl Stream UI (via **Settings** > **Global Settings** > **Distributed Settings > Git Settings**).

To create a repo, see these tutorials:

- Setting Up a Repository (CLI instructions, host-agnostic, from Atlassian).
- Creating a New Repository (specific to GitHub's Web UI).
- Create a Repo (longer GitHub-specific tutorial, also covers committing changes).

Remote Formats Supported

Remote URI schema patterns should match this regex:
`(?:git|ssh|ftps?|file|https?|git@[-\w.]+):(\/\/)?(.*?)(\.git\/?)?$`.

You can find a list of supported formats here.

For example:

- GitHub or other providers: `<protocol>://git@example.com/<username>/<reponame>.git`
- Local Git servers: `git://<host.xyz>:<port>/<user>/path/to/repo.git`

Securing Local Configuration and Remote Repos

> Make a local backup of your whole `$CRIBL_HOME` directory before you set a remote repo. This safeguards your Cribl Stream configuration against being overwritten by a misconfigured remote.
>
> Create each new remote as an **empty** repo, with no readme file and no commit history. (See the GitHub and GitLab examples below.)
>
> Some files that are used by Cribl Stream (both Leader and Worker Groups) contain sensitive keys; examples are `cribl.secret` and `...auth/ssh/git.key`. These will be pushed to the remote repo

as part of the entire directory structure under version control. Ensure that this repo is secured appropriately.

Connecting to a Remote with a Personal Access Token over HTTPS (Recommended)

Cribl recommends connecting to a remote repo over HTTPS. The example below shows a token-based HTTPS connection to GitHub.

Example: Connecting to GitHub over HTTPS

1. Create a new GitHub repository.
   For best results, create a new **empty** repo, with no readme file and no commit history. (This will prevent `git push` errors.) Note the username and email associated with your login on the repo provider.

2. Create a personal access token with **repo** scope.

3. Copy the token to your clipboard.

4. In Cribl Stream, go to **Settings** > **Global Settings** > **System** > **Git Settings**.

5. Fill in the **Remote URL** field with your repo name. Use the format below:
   `https://<username>:<token>@github.com/<owner>/<repository>.git`

For additional details, see GitHub's Creating a Personal Access Token tutorial.

For GitHub repos specifically, use only personal access tokens in the **Remote URL** field. GitHub announced its end of support for plaintext passwords as of August 13, 2021.

Connecting to a Remote with SSH

You can set up SSH keys from the CLI, or upload keys via the UI. If you have a passphrase set, this functionality is available only through the CLI – see Encryption: Configuring Keys with the CLI. The example below outlines the UI steps.

Example: Connecting to GitHub with SSH

1. Create a new GitHub repository.
   For best results, create a new **empty** repo, with no readme file and no commit history. (This will prevent

`git push` errors.) Note the user name and email associated with your login to the repo provider.

2. Add an SSH public key to your GitHub account.

3. In Cribl Stream, go to global **Settings** > **Global Settings** > **System** > **Git Settings** > **Remote**.

4. Fill in the **Remote [repo] URL**. In the generic example below, replace `<username>` with your user name on the repo provider:
   Remote URL: `<protocol>://git@github.com:<username>/<reponame>.git`

   For GitHub specifically, the URL/protocol format must be:
   Remote URL: `git@github.com:<user>/<reponame>.git`

   A specific (fictitious) GitHub example:
   Remote URL: `git@github.com:taylorswift/leadsheets.git`

5. Paste in the **SSH private key**.

> The key will paste in with an appended newline below it. Do not delete this newline before you save the Remote Settings, or else you will trigger an error of the form: `fatal: Could not read from remote repository.`

6. As the user running Cribl Stream, run this command to add the GitHub keys to `known_hosts`:

```
ssh-keyscan -H github.com >> ~/.ssh/known_hosts
```

For additional details, see GitHub's Connecting to GitHub with SSH tutorial.

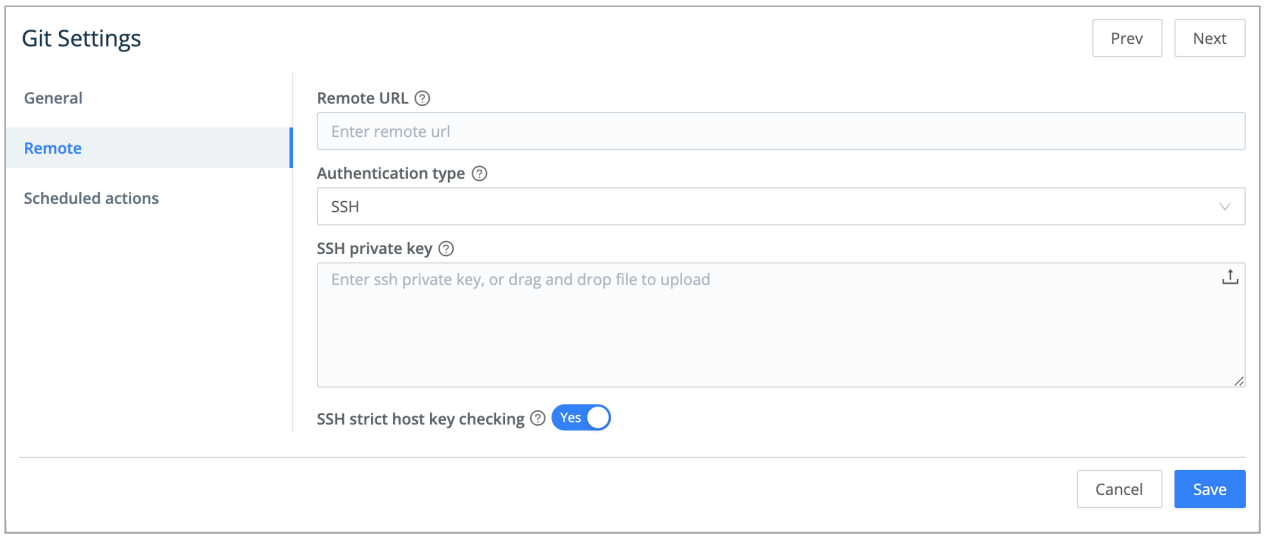

Cribl Stream's Git settings

GitLab Notes

For repos hosted on GitLab, Cribl's general recommendations are:

- Create a new empty (blank) project, with no readme file and no commit history. (Clear the **Initialize repository with a README** check box.)

  > This will prevent `git push` errors by creating a project with no branch, not even `main`. When you later push Cribl Stream's `master` branch, that will create a corresponding `master` branch on the GitLab remote with no conflicts.

- Create a GitLab project access token for authentication. See GitLab's documentation, which also covers **project bot** conventions.

- With project bots, the first token's username is set to `project_{project_id}_bot`. The password is the alphanumeric token.

- Create the token with `write_repository` scope.

- Specify a remote URL in HTTPS format – e.g.: `https://localgitlab.<yourdomain.ext>/<yourusername>/cribl.git`

- If you do see a `main` branch in Cribl Stream's UI, do not select it. Leave the branch at `master`, then use the Stream UI's **Commit** and **Push** commands. This will create the desired `master` branch on GitLab's remote.

GitLab's **Repository Settings > Push Rules** section includes these two settings of interest:

- As needed, enable **Check whether author is a GitLab user**.

- Understand the consequences of of enabling **Prevent committing secrets to Git**. This blocks commits of `.pem` and `.key` files. If you have certificates or SSH keys configured, this will break commits from Cribl Stream, throwing only a generic `API Error` in the UI. Check your `git` CLI client for more-specific diagnostics.

Additional Git Settings

On the **Git Settings** > **General** tab, you can modify the following configurations, all of which are optional.

- **Branch**, **GitOps workflow**: These drop-downs are available to configure GitOps.

See the GitOps documentation linked above for details and precautions.

- **Collapse actions**: Combine multiple Git buttons to one, to reduce repetitive clicks. See Collapse Actions below.
- **Default commit message**: Enter a placeholder message to apply to all commits from Cribl Stream. This also reduces clicks.
- **Git timeout**: Maximum time (in milliseconds) to wait for Git processes to complete before killing them. If a Leader instance hangs, try lowering this value from the default `60000` (60 seconds). However, avoid very low values (like `20` ms) – which will time out even when Git processes are working properly. Enter `0` to wait indefinitely.

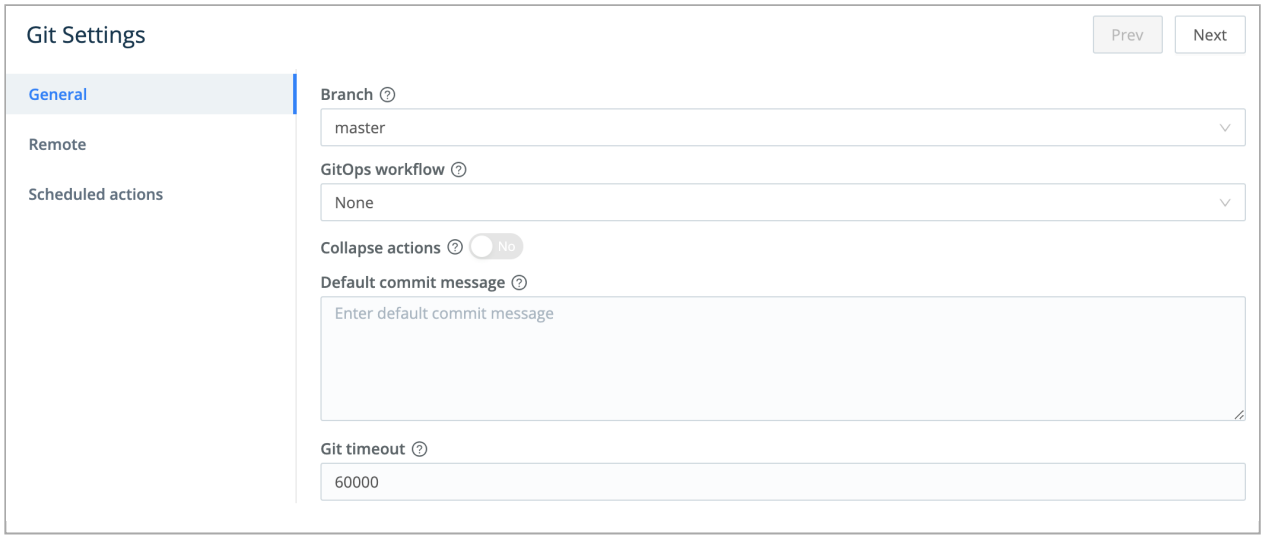

Git Authentication Type settings

On the **Git Settings** > **Remote** tab, you can change the **Authentication Type** from its **SSH** default to **Basic** authentication. This displays two additional fields:

- **User**: Username on the repo.
- **Password**: Authentication password (e.g., a GitHub personal access token).

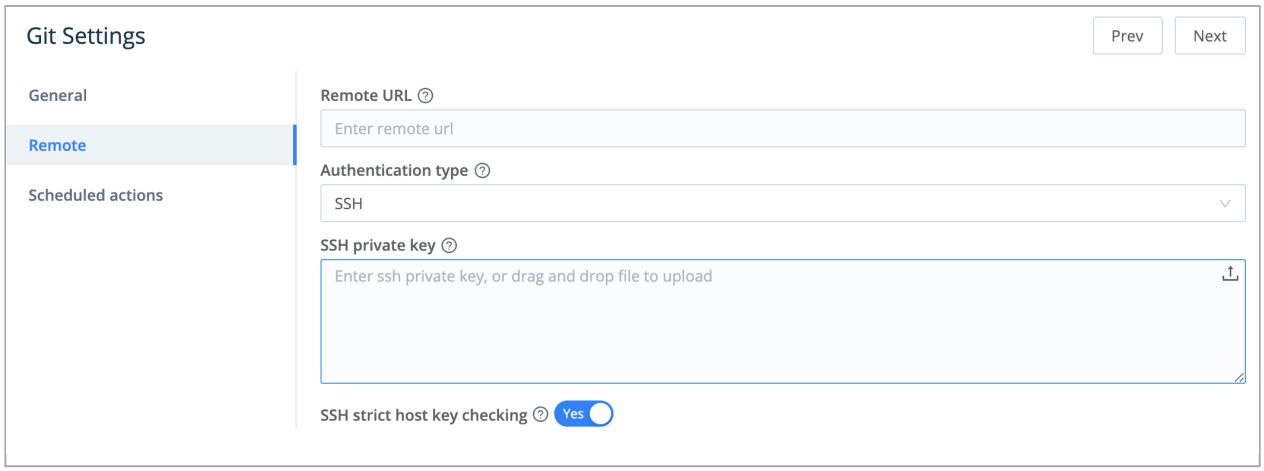

Git Authentication Type settings

> GitHub (specifically) does not support Basic authentication.

On the **Git Settings** > **Scheduled Actions** tab, you can schedule a **Commit**, **Push**, or **Commit & Push** action to occur on a predefined interval.

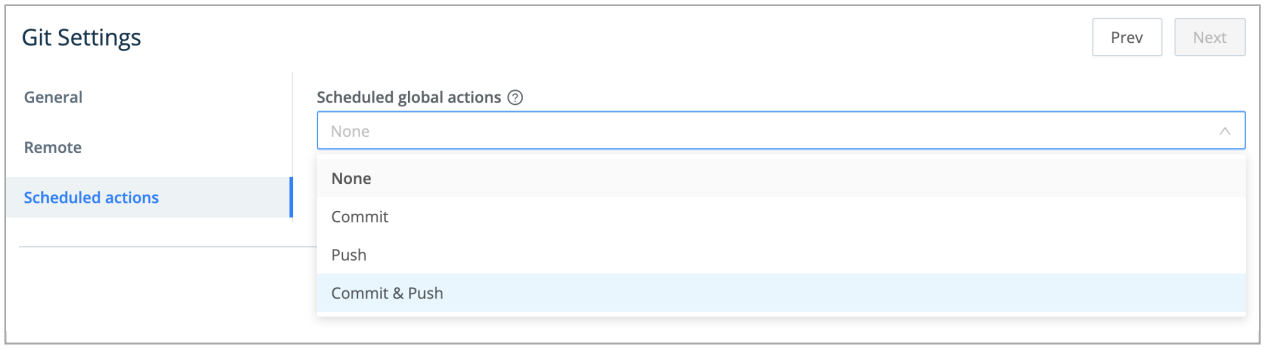

Git Scheduled Actions selection

For the selected action type, you can define a cron schedule, and a commit message distinct from the **General** tab's **Default Commit Message**. Then click **Save**.

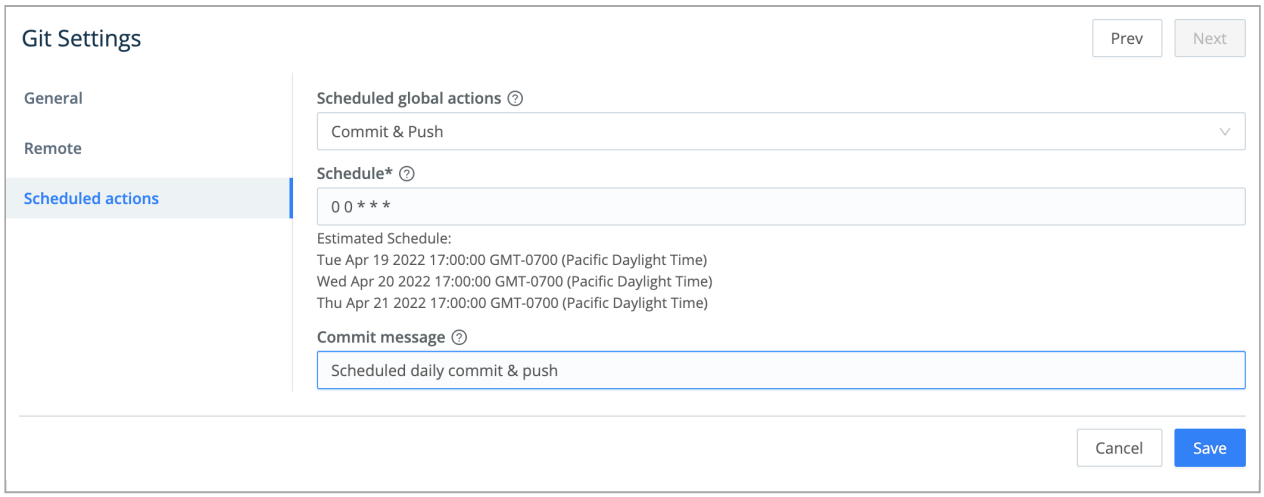

Saving a Git Scheduled Action

You can schedule only one type of action. To swap to a different type, select it from the **Scheduled global actions** drop-down, and resave. To turn off scheduled Git commands, select **None** from the drop-down, and resave.

Pushing Configs to a Remote Repo

Once you've configured a remote, a **Git Push** button appears in the **Global Config** dialog. You can use this to copy committed configuration changes to your remote.

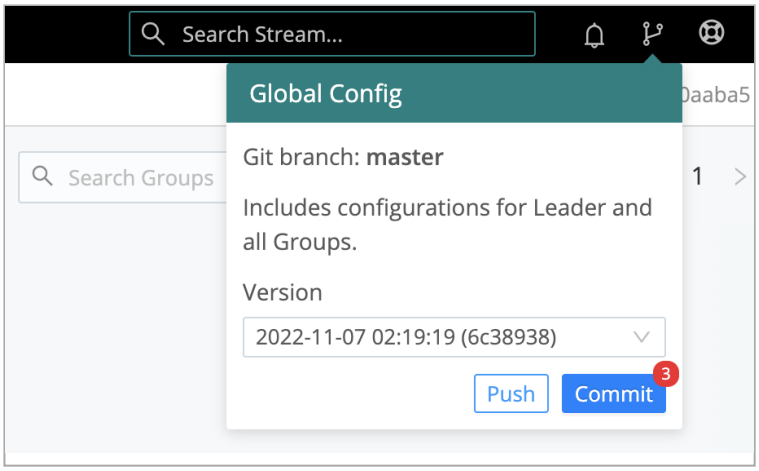

Git Push button

> The branch indicator will normally read `master`, as shown above, unless you have enabled GitOps with an appropriate license.

Collapse Actions

If you enabled the **Git Settings** > **Collapse Actions** option, you will be offered a combined **Commit & Push** button in the **Global Config** dialog.

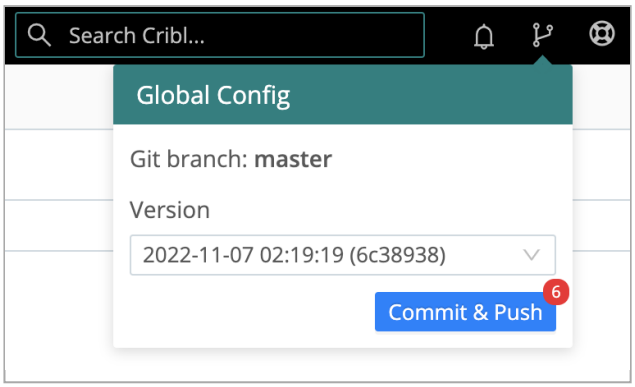

Git combined actions button

At the Group level, enabling **Collapse Actions** adds a combined **Commit & Deploy** option to the modal you see after clicking **Commit** for the Group's config.

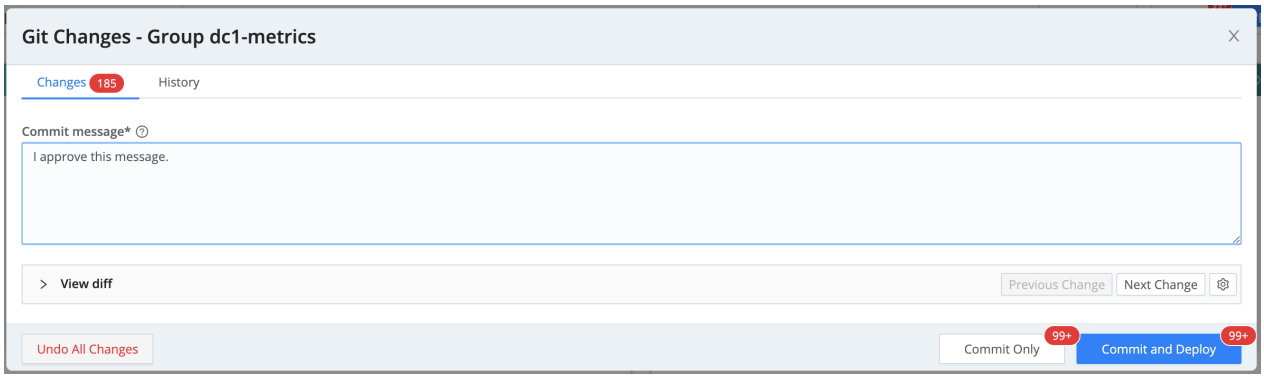

Git combined actions button for a Worker Group

> Enabling **Collapse Actions** with a remote repo simplifies the **Commit Changes** confirmation dialog. It substitutes just a commit **Message** text box, with **OK** and **Cancel** buttons – omitting the diff view. Don't enable this option if you prefer to inspect configuration changes before committing.

Backing Up Configs Out of Band

Once you've configured your remote repo, changes to all Cribl Stream config files under the `$CRIBL_HOME` directory will normally be backed up to your remote whenever you click the above **Git Push** or **Commit & Push** UI buttons. The exceptions are:

- Any configuration files you've chosen to store outside `$CRIBL_HOME`.
- Any configuration files residing in paths you've added to `.gitignore`.

To back up these files to your remote, you'll need to either:

- Change the above paths/settings, or
- Use an external `git` client to manually push them.

Troubleshooting Push Errors

To resolve errors commonly encountered when pushing to a remote repo, see:

- Git Push Errors
- Git Remote Repos & Trusted CAs

> **Troubleshooting Resources**
>
> Cribl University offers a Troubleshooting Criblet on Commit & Deploy best practices and error recovery. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Troubleshooting Criblets and Advanced Troubleshooting short courses.

Restoring Leader from a Remote Repo

If a remote repo is configured and has the latest known good Leader configuration, this section outlines the general steps to restore the config from that repo.

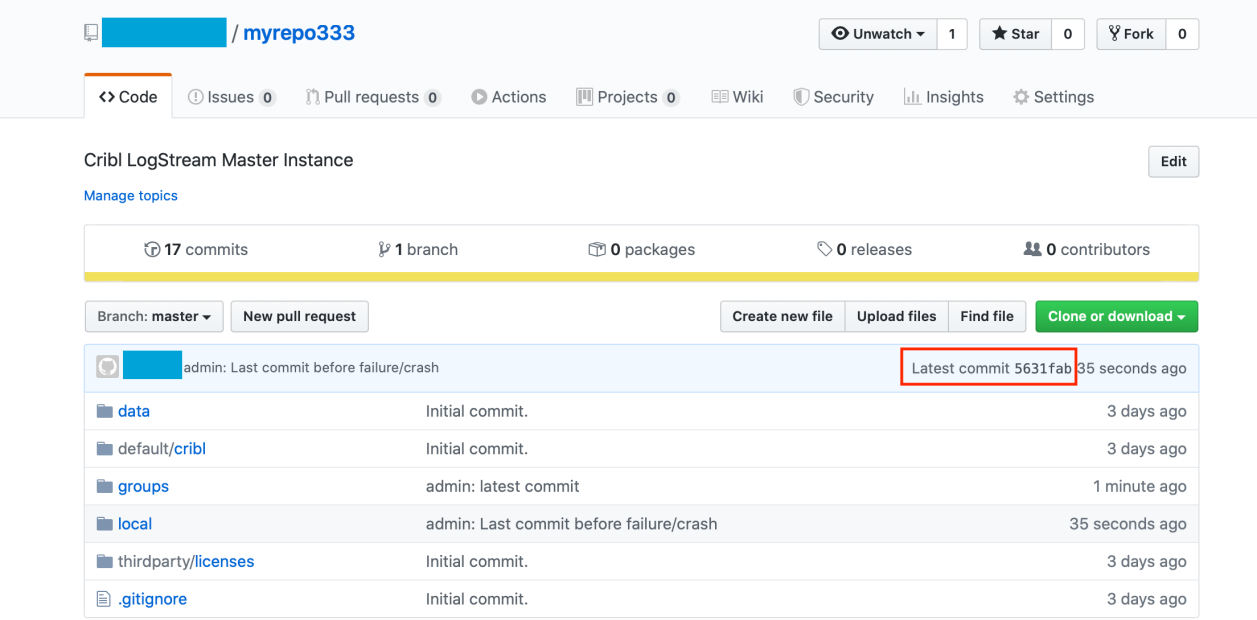

Restoring from remote repo

Let's assume that either the entire `$CRIBL_HOME` directory of the Leader is corrupted, or you're replicating the remote repo's config onto a fresh instance. Let's also assume that the remote repo has the form: `git@github.com:<username>/<reponame>.git`.

1. **Important**: In a directory of choice, untar the **same Cribl Stream version** that you're trying to restore, but do not start it.

   > Make sure you download the **matching** Cribl Stream version. Cribl's Download page foregrounds Cribl Stream's current version, but provides a link to this archive of prior releases.

2. Change directory into `$CRIBL_HOME` and initialize `git`:

   ```
   # git init
   ```

3. If you are using SSH key authentication, specify the key using the following command:

   ```
   GIT_SSH_COMMAND='ssh -i </path/to/github/repo>.key -o IdentitiesOnly=yes'
   ```

   > As an alternative to executing `GIT_SSH_COMMAND` on the fly, you can set your key in `$CRIBL_HOME/.git/config` with:
   > `git config core.sshCommand "ssh -i /path/to/key"`

> Or set it globally with:
> `git config --global core.sshCommand "ssh -i /path/to/key"`

4. Ensure that you have proper access to the remote repo:

```
# git ls-remote git@github.com:<username>/<reponame>.git
56331fabb4822eaec4ca0ffd008d6e9974c1e419f    HEAD
5631fabb4822eaec4ca0ffd008d6e9974c1e419f    refs/heads/master
```

5. Next, add/configure the remote:

```
# git remote add origin git@github.com:<username>/<reponame>.git
```

6. Now set up your local branch to exactly match the remote branch:

```
# git fetch origin
# git reset --hard origin/master
```

7. Finally, to confirm that the commits match, run this command while in `$CRIBL_HOME`:

```
# git show --abbrev-commit
```

   You should see output indicating that `HEAD` points to both `master` and `origin/master`, as in this example:

```
commit 5631fab (HEAD -> master, origin/master)
Author: First Last <email@example.com>
Date:   Fri Jan 31 10:16:07 2020 -0500

    admin: Last commit before failure/crash
......
```

Step 6 above pulls in all the latest configs from the remote repo. Step 7 confirms the local repo matches the remote. You should now be able to start the Leader as normal. Once up and running, Workers should start checking in after about 60 seconds.

> **Verify cribl.secret**
>
> The `cribl.secret` file – located at `$CRIBL_HOME/local/cribl/auth/cribl.secret` – contains the secret key that is used to encrypt sensitive settings on configuration files (e.g., AWS Secret Access

Key, etc.). Make sure this file is properly restored on the new Leader, because it is required to make encrypted conf file settings usable again.

.gitignore File

A `.gitignore` file specifies files that `git` should ignore when tracking changes. Each line specifies a pattern, which should match a file path to be ignored. Cribl Stream ships with a `.gitgnore` file containing a number of patterns/rules, under a section of the file labeled `CRIBL SECTION`.

```
# Do NOT REMOVE CRIBL and CUSTOM header lines!
# DO NOT REMOVE rules under the CRIBL section as they may be reintroduced on update.
# You can ONLY comment out rules in the CRIBL section.
# You can add new rules in the CUSTOM section.
### CRIBL SECTION -- DO NOT REMOVE ###
default/ui/**
default/data/ui/**
bin/**
log/**
pid/**
data/uploads/**
diag/**
**/state/**
#### CUSTOM SECTION -- DO NOT REMOVE ###

<User-defined patterns/rules go here>
```

CRIBL Section

Do Not Remove CRIBL SECTION or CUSTOM SECTION Headers

Under the `CRIBL SECTION` header, Cribl Stream specifies the files that Git will ignore by default. Further files for Git to ignore should be listed under the `CUSTOM SECTION` header.

Do **not** add any lines to the `CRIBL SECTION` block, because the next update will just overwrite them anyway. Do not remove any lines either. The only modifications that will survive updates are commented lines.

Do not remove any section header lines, or unexpected behavior might occur on update.

CUSTOM Section

User-defined, custom patterns/rules can be **safely defined** under the `CUSTOM SECTION`. Cribl Stream will **not** modify the contents of `CUSTOM SECTION`.

Good candidates to add here include large lookup files – especially large binary database files. For details, see Git Push Errors: Large Files Detected.

Files skipped with .gitignore

If you have files that you've set `.gitignore` to skip, you will need to back them up and restore them by means other than Git. For example, you can periodically copy/rsync them to a backup destination, and then restore them to their original locations after you complete the steps above.

Files specified in `.gitignore` are not only excluded from pushes to the remote repo, but are also excluded from Worker Group config bundles. When Workers load a new config that references a skipped (and missing) file, this can produce unexpected results, and usually errors.

For example, if you add `**/auth/**` to `.gitignore`, then any certificate/key files stored in the default `$CRIBL_HOME/local/cribl/auth/certs/` path will be omitted from config deployments, because of a match on the `.../auth/...` subdirectory.

Commit and Deploy via the API

You can automate commit and deploy commands by using Cribl Stream API requests. The following examples show how to do so for a Worker Group's configuration.

> **About the Examples**
>
> - The API calls below include Worker Group names as path parameters.
> - The `curl` commands assume that you have set the `$token` environment variable to match the value of a bearer token. See Authentication for alternative approaches; adapt the example commands to suit your chosen approach.

Commit Changes

To commit pending changes to your configured repo, adapt and run the following API call:

```
POST /api/v1/version/commit
{"message":"a descriptive commit message","group":"<worker_group_name>"}
```

You will receive a JSON response with some details about the commit:

```
{"items":[{"branch":"master","commit":"abcd1234","summary":
{"changes":"1","insertions":"4","deletions":0}}],"count":1}
```


From that response, you'll need to extract the commit ID (`abcd1234`) to use in the second deploy API call below.

Commit Example

Here, let's commit all pending changes to the default Worker Group:

```
curl -X POST -H "Authorization: Bearer $token" -H "Content-Type: application/json"
"https://stream:9000/api/v1/version/commit" -d '{"message":"automation@cribl:
commit","group":"default"}'
```

Deploy Changes

To deploy your committed config changes to Worker Groups, adapt and run the following API call. As the `version` value, you'll need the commit ID you received in the commit response above:

```
PATCH /api/v1/master/groups/<worker_group_name>/deploy

{"version":"abcd1234"}
```

A successful response payload looks like this:


```
{"items":[{"description":"Default Worker
Group","tags":"default","configVersion":"5b8f42a","id":"default"}],"count":1}
```


Deploy Example

Here, let's deploy the previously committed configuration to the `default` Worker Group:

```
curl -X PATCH -H "Authorization: Bearer $token" -H "content-type: application/json"
"https://stream:9000/api/v1/master/groups/default/deploy" -d
'{"version":"abcd1234"}'
```

Selectively Commit Changes

If you want to commit only a subset of configuration changes, adapt and use the following payload:

```
POST /api/v1/version/commit

{
  "message":"descriptive commit message",
  "group":"default",
  "files":["groups/default/data/samples/sample-
g0aT.json","groups/default/local/cribl/samples.yml"]
}
```

Selective Commit Example

Let's selectively commit a sample data file, and the updated YAML listing of all sample files, to the `default` Worker Group:

```
curl -X POST -H "Authorization: Bearer $token" -H "Content-Type: application/json"
"https://stream:9000/api/v1/version/commit" -d '{"message":"automation@cribl:
commit","group":"default","files":["groups/default/data/samples/sample-
g0aT.json","groups/default/local/cribl/samples.yml"]}'
```

5.3. GitOps

With the GitOps features available in Cribl Stream/LogStream 3.2 and higher, you can integrate Cribl Stream configuration management with standard version-control systems and CI/CD flow. Push updates to your remote Cribl Stream via webhook, manually or using automation. This separates development versus production configurations, enabling you to safely build and continuously deploy your Observability Pipelines.

> See also our GitOps/GitHub Tutorial and Managing Stream with GitOps Sandbox.

Prerequisites

To use GitOps, you must have a customer-managed (on-prem), distributed Cribl Stream deployment. (Cribl.Cloud does not currently support GitOps).

You'll need two Leader instances and a Cribl Enterprise license, which can be shared between the two instances. For questions about developer licenses in Dev environments, please contact your Cribl sales team.

You must have access to an external Git management system like GitHub, GitLab, or Bitbucket, or access to a self-hosted Git server.

Cribl recommends that you use private repositories for managing your GitOps environments, so as to prevent leaking of sensitive information.

> This page is agnostic about where you host your repos. It provides general concepts, procedures, and reference material. And it includes a setup scenario relying on Basic Auth, which might not be appropriate to your workflow.
>
> To jump straight into a tutorial written around GitHub, with authentication using SSH keys, see GitOps/GitHub Tutorial.

Setup: Best Practices

A Cribl Stream GitOps deployment can start with an existing repository, or you can set up an entirely new repo and start fresh from there.

If you're already using an existing remote repo for your Cribl Stream deployment, Cribl strongly recommends first cloning a backup of that repo. You'll be able to use this backup to restore your configuration if it gets overwritten by a misconfigured remote dev branch.

See also our general warning to create any new remote as a completely empty repo, with no README.

Create at least one branch for your production code. You will merge code into this branch and use it to update your production Cribl Stream environment.

Cribl recommends that you also create a separate dev branch for your code. This is where you will sync and work in your development environment. Once changes are validated and tested in dev, you can merge them into production.

A representative repo would have this basic structure:

Sample repo topography

Usage Examples

In the example below, we manually ping production Cribl Stream to update, based on a remote `master` branch, and to deploy the changes. You can set this up via Bearer token (used in the full example below) or via user Role.

Bearer Token

If you have your Bearer token ready, you can use it in a CLI command of this form:

```
curl -X POST "http://<leader URL or IP>:9000/api/v1/version/sync" -H "accept:
application/json" -H "Authorization: Bearer <bearer-token>" -d
"ref=master&deploy=true"`
```

Bearer tokens refresh every 60 minutes by default. To extend the lifetime of a token, go to global **Settings** > **Global Settings** > **System** > **General Settings** > **Advanced**, and update the **Auth-token TTL**.

Getting the Bearer Token via UI

If you need to retrieve your Bearer token before applying it, you can access it via Cribl Stream's UI, as follows:

1. From the top nav, select **Settings**.
2. From the resulting left nav, select **Global Settings** > **API Reference**.
3. Near the API Reference's top, expand the `GET /auth/groups` endpoint.
4. Click **Try it out**.
5. Click **Execute**.
6. From the displayed **Curl** field, copy the generated `curl` command.
7. Change the `GET` verb to `POST`, and execute the resulting command on your command, as shown above.

Getting the Bearer Token via CLI

If you need to retrieve your Bearer token before applying it, you can also access it in the CLI, via a series of commands of the following form. (**The final command below replaces the single `curl` command above.**)

> On your production environment's Leader, you'll need `jq`, which you can install using the command: `sudo yum install jq -y`.

Here, `<username>` and `<password>` stand for the credentials of the user getting the token:

```
mkdir -p ~/.auth

curl http://<Leader-URL-or-IP>:9000/api/v1/auth/login -H 'Content-Type:
application/json' -d "{\"username\":\"<username>\",\"password\":\"<password>\"}"
2>/dev/null | jq -r .token > ~/.auth/token

export JWT_AUTH_TOKEN=`cat ~/.auth/token`

export AUTH_HEAD="Authorization:Bearer `cat ~/.auth/token`"

curl -X POST "http://<Leader-URL-or-IP>:9000/api/v1/version/sync" -H "accept:
application/json" -H "${AUTH_HEAD}" -d "ref=master&deploy=true"
```

Here's an example with placeholders filled in. This assumes that the API is running on `localhost`, and the username and password are each the super-secret `admin`. **Here again, the final command below replaces the single `curl` command above:**

```
mkdir -p ~/.auth

curl http://localhost:9000/api/v1/auth/login -H 'Content-Type: application/json' -d
"{\"username\":\"admin\",\"password\":\"admin\"}" 2>/dev/null | jq -r .token >
~/.auth/token

export JWT_AUTH_TOKEN=`cat ~/.auth/token`

export AUTH_HEAD="Authorization:Bearer `cat ~/.auth/token`"

curl -X POST "http://localhost:9000/api/v1/version/sync" -H "accept:
application/json" -H "${AUTH_HEAD}" -d "ref=master&deploy=true"
```

User Role

Alternatively, before putting your environment into GitOps mode, create a new user and give them the `gitops` Role. This Role's only permission is to POST to the sync endpoint.

> Before you proceed to the next section: Switching to a branch whose remote has **not** been hydrated with your valid Cribl Stream configuration can delete your local Stream config. This risk exists whether you switch branches using Stream's UI, or using environment variables. This is why, above, we emphasize first creating backups.

Setup Steps

This example relies on the Bearer token technique presented above.

1. Start with a production Cribl Stream, synced to an external git repository.
2. Create a new branch in the repository, called `dev`.
3. Rehydrate your dev environment from the `dev` branch.

   On the dev box's command line, run:

   ```
   CRIBL_GIT_REMOTE=https:<your_remote_repo> CRIBL_GIT_BRANCH=dev
   CRIBL_GIT_AUTH=basic CRIBL_GIT_USER=<user> CRIBL_GIT_PASSWORD=<password>
   bin/cribl start
   ```

4. Set your production environment to GitOps mode, using environment variables, as shown here:

```
CRIBL_GIT_REMOTE=https:<your_remote_repo> CRIBL_GIT_BRANCH=<your prod branch,
usually master> CRIBL_GIT_OPS=push CRIBL_GIT_AUTH=basic CRIBL_GIT_USER=<user>
CRIBL_GIT_PASSWORD=<password> bin/cribl start
```

> Your production branch will now be in read-only mode. You can push changes to production via a webhook called from your versioning system. (See the example using Git actions and our request, above.)

5. When you make changes in your dev environment, those changes will be synced with your dev repo whenever they are committed and pushed. Your production environment will be updated only when a request is sent to the production API.

6. Update the dev repo, then use PR and merge capabilities in your version-control system to merge updates into your production branch. (This will follow the workflow outlined in your version-control system of choice.)

7. Send a request to your production environment to pick up the changes on your production branch:

```
curl -X POST "http://<leader URL or IP>:9000/api/v1/version/sync" -H "accept:
application/json" -H "Authorization: Bearer <bearer token>" -d "ref=<production
branch>&deploy=true"
```

8. Alternatively, you can set up a condition in your versioning tool to automatically update production with an action. In GitHub, that action would look like this:

```
name: Deploy to Production
on:
  push:
    tags:
      - 'v?[0-9]+.[0-9]+.[0-9]+'
      - 'v?[0-9]+.[0-9]+.[0-9]+-[RT]C[0-9]+'
jobs:
  deployment:
    runs-on: ubuntu-latest
    steps:
      - name: deploy
        uses: satak/webrequest-action@master
        with:
          url: http://54.190.53.106:9000/api/v1/version/sync
          method: POST
          payload: '{"ref":"master","deploy":"true"}'
          headers: '{"Authorization": "Bearer ${{ secrets.BEARER_TOKEN }}"}'
```

- This action will start whenever a new release is created in GitHub, using a tag with the naming convention `v0.0.0` or `v0.0.0-TC1` or `v0.0.0-RC1`.
- This helps control multiple updates to production as part of a single release or deployment. This is useful when you are merging multiple changes to production, and want to push them all at once.

9. If `deploy` is set to `true` in the request to the production Cribl Stream instance, all new configs will be applied, and Cribl Stream Workers will be restarted to pick up the changes.

Advanced Workflows

It's common for your repository code to get out of sync with your local version. This is especially true when first setting up a GitOps environment, where changes are being made to `.gitignore`, and to a `README` or other non-functional files in your repo. If you attempt to push from your development environment to your remote branch and you see this error:

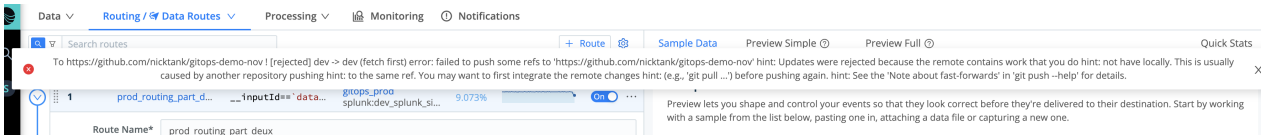

Remote repo has lost sync with local config

...this means that your remote repo is ahead of your local. You can re-sync them via the following commands:

```
<cribl_home>/git fetch origin
<cribl_home>/git reset --hard origin/dev
<cribl_home>/bin/cribl restart`
```

(Replace `<cribl_home>` with your Cribl Stream directory path, and `dev` with whichever branch your environment is tracking.)

This will resync your local branch with the remote. You will lose any local changes, so before running it, stash those changes or make notes of what you will need to re-create after this reset.

Environment Variables Reference

Cribl Stream provides the following environment variables to facilitate GitOps:

Bootstrap Variables

NAME	PURPOSE
CRIBL_GIT_REMOTE	Location of the remote repo to track. Can contain username and password for HTTPS auth.
GIT_SSH / GIT_SSH_COMMAND	See Git's documentation.
CRIBL_GIT_BRANCH	Git ref (branch, tag, commit) to track/check out.
CRIBL_GIT_AUTH	One of: `none`, `basic`, or `ssh`.
CRIBL_GIT_USER	Used for `basic` auth.
CRIBL_GIT_PASSWORD	Used for `basic` auth.
CRIBL_GIT_OPS	One of: `push` to enable the GitOps push workflow, or `none` to disable GitOps.

For other environment variables available in Cribl Stream, see Distributed Deployment.

To capture the name and version of the branch that GitOps is using when deploying Routes, Pipelines, or Packs, use two Eval Functions as follows:

```
cribl_git_branch_name = C.logStreamEnv
cribl_git_branch_version = C.confVersion
```

UI Options

Cribl recommends setting up GitOps using environment variables, as demonstrated above, because these are persistent. However, if you later want to undo your CLI settings, the following options are available in the UI's **Settings** > **Global Settings** > **System** > **Git Settings**:

Branch drop-down: Select a single branch to track in your remote repo.

GitOps workflow drop-down provides these options for the branch selected above:

- **None**: Do not automate Cribl Stream's configuration management. (This switches off GitOps.)
- **Push**: Sync with remote repo via POST requests to `/api/v1/version/sync endpoint`.

Security

You can maintain unique encryption keys, passwords, and tokens per environment, without sharing them across (e.g.) dev vs. prod environments. Do so by setting unique environment variables per environment.

Going Further

Because you have configured separate environments for development versus production, you can create Routes, Functions, or Pipelines that behave differently in these different environments.

For this purpose, you can use the `C.env.CRIBL_GIT_BRANCH` environment variable. Its value is the name of the Git branch you're on. For any Destination, `C.env.CRIBL_GIT_BRANCH` corresponds to the **Advanced Settings** > **Environment** setting.

You can also automate GitOps in various ways. E.g., you could automate your production environment's syncing with a GitHub repo's `prod` branch, using GitHub Actions.

Limitations

For current limitations on using this feature, please search our Known Issues topic for "GitOps".

5.3.1. GitOps/GitHub Tutorial

This tutorial shows one of many possible ways to set up Cribl Stream GitOps, relying on a GitHub repo with SSH authentication.

If you are using GitLab, Bitbucket, or a self-hosted Git server, you can adapt the GitHub examples here, or you can rely on our generic GitOps page.

> See also our Managing Stream with GitOps Sandbox.

Prerequisites

To use GitOps, you must have:

- A customer-managed (on-prem), distributed Cribl Stream deployment. (Cribl.Cloud does not currently support GitOps).
- Two Leader instances.
- A Cribl Enterprise license, which can be shared between the two Leaders.
- A GitHub account. (You can create one here.)

Setting Up Your Deployment for GitOps

In your distributed Cribl Stream deployment, set up two separate environments: one for Development and one for Production. This way, you can do your work in the Development environment, validate and test your changes there, and then merge the changes into Production. For safety, the Production environment will be read-only.

In **both** environments:

- On the Leader, install `git` using the command:
  `sudo yum install git -y`
- Cribl strongly recommends that you use systemd, as we do throughout this tutorial. (If not using systemd, use environment variables instead of `systemctl` commands.)
- Cribl strongly recommends that you use SSH authentication, as we do throughout this tutorial.

In the Production environment:

- On the Leader, install `jq` using the command:
  `sudo yum install jq -y`

Creating SSH Public and Private Keys

Starting on the command line:

1. Generate public and private SSH keys, specifying Ed25519 as the key type:

   ```
   ssh-keygen -t ed25519 -C "your_email@example.com"
   ```

2. Validate that the `/root/.ssh/` directory contains both of the newly generated keys:
   - The private key that Cribl Stream will use: `id_ed25519`.
   - The public key that GitHub will use: `id_ed25519.pub`.

3. Copy the public SSH key to your clipboard.

Next, sign in to your GitHub account, and on the SSH and GPG keys page, enter the public SSH key:

1. Click **New SSH key**.
2. Paste the key in the **Key** field.
3. Click **Add SSH key**.

> **Prevent Push and Pull Errors**
>
> Before you proceed to the next section: See our general warnings to first locally back up your `$CRIBL_HOME` directory, and to create any new remote as a completely empty repo with no README.

Creating a Private GitHub Repo

On your GitHub profile page:

1. Click **Go to your personal profile**.
2. On the resulting page, click the **Repositories** tab.
3. Click **New** to create a new repository.

Name the repo `cribl`, and change its default **Public** setting to **Private**. The repo's default branch will be named `main`, and we'll assume that name in this tutorial. (Older repos' default branch might instead be named `master`.)

A representative repo would have this basic structure:

Sample repo topography

Configuring Your Production Leader

> You can optionally create a new user with the `gitops` Role. This Role's only permission is to `POST` to the `sync` endpoint. If you choose to do this, the **Remote URL** that you enter below should include this username.

In Cribl Stream, in the Production Leader's, select **Settings** > **Global Settings** > **Git Settings**. Then apply the following settings.

General Tab

Leave **Branch** set to `main` (the only branch created thus far), and **GitOps Workflow** set to `None`.

Remote Tab

- In **Remote URL**, enter the URL for your private Git repo, e.g.: `git@github.com:<your_Git_username>/cribl.git`.
- From the **Authentication type** drop–down, select `SSH`.
- In **SSH private key**, copy and paste the private key (`/root/.ssh/id_ed25519`).
- Toggle **SSH strict host key checking** to `No`.

Click **Save**, then **Commit** and **Git Push**. You should now see your commit in the `main` branch of your private GitHub repo.

In a terminal on the Production Leader, run as root:

```
sudo su -
```

Add `systemctl` overrides to set environment variables that will make the Production Leader read-only on startup, and set the branch to `prod`:

1. Use `systemctl` to open the `cribl.service` file in an editor:

   ```
   systemctl edit cribl.service
   ```

2. When prompted, add the following overrides:

   ```
   [Service]
   Environment=CRIBL_GIT_OPS=push
   Environment=CRIBL_GIT_BRANCH=prod
   ```

3. Restart:

   ```
   systemctl daemon-reload && systemctl restart cribl
   ```

> Once the system has restarted, the `CRIBL_GIT_OPS=push` override will be in effect, meaning that your Production environment will be in read-only mode.

Setting Up the GitHub Branches

In your GitHub repo:

1. Click the branches tab (if there's only a `main` branch in your repo, the tab will be labeled **1 branch**).

The branches tab

2. On the `main` branch's row, click the pencil button at far right.
3. Rename `main` to `prod`.
4. From the branches drop-down (which should now say `prod`), create a new branch named `dev`.

> Before you proceed to the next section: Switching to a branch whose remote has **not** been hydrated with your valid Cribl Stream configuration can delete your local Stream config. This risk exists whether you switch branches using Stream's UI, or using environment variables. This is why, above, we emphasize first creating backups.

Pointing Your Development Leader to Its Branch

On Cribl Stream's Development Leader, select **Settings** > **Global Settings** > **Git Settings**. Then apply the following settings.

Remote Tab

- In **Remote URL**, enter the URL for your private Git repo, e.g.: `git@github.com:<your_Git_username>/cribl.git`.
- From the **Authentication type** drop–down, select `SSH`.
- In **SSH private key**, copy and paste the private key (`/root/.ssh/id_ed25519`).
- Toggle **SSH strict host key checking** to `No`.
- Click **Save**.

> In Cribl Stream 4.1 and later, Cribl encrypts TLS certificates in configuration files for enhanced security. If you upgrade to v.4.1.0 or later and add new private keys, you won't be able to downgrade to previous versions unless you back up your existing unencrypted keys.

General Tab

- Set **Branch** to `dev`.
- Set **GitOps Workflow** to `None`.

Click **Save**, then restart the Development Leader, which will now be able to write to GitHub.

Working in the Development Environment

Your goal is to make changes in the Development environment, and later propagate them to Production. To demonstrate this, try adding a Route, as a minimal unit of work.

1. On Cribl Stream's Development Leader, navigate to **Routing** > **Data Routes**.
2. Click **Add Route**.
3. Configure the new Route as follows:

NAME	FILTER	PIPELINE/OUTPUT
`test-gitops`	`true`	`devnull:devnull`

4. Click **Commit/Deploy**.
5. Click **Commit** and **Git Push**.

This will send the configurations to your `dev` branch on GitHub.

Merging Changes from `dev` to `prod`

On your GitHub `dev` branch, you should see the new `route.yml` appearing within a subdirectory of the `local` directory.

1. Click **Compare & pull request**. Be sure that the `compare` drop-down says `dev`, and the `base` drop-down says `prod`:

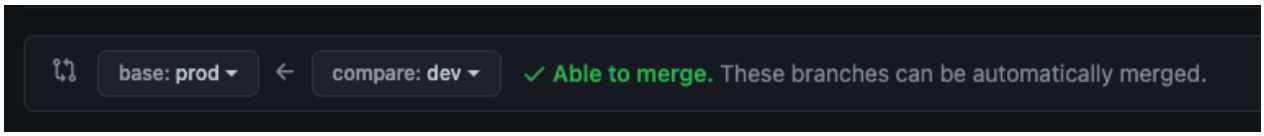

Comparing `dev` to `prod`

2. Add some comments.
3. Click **Create pull request**. The UI should propose to `merge 1 commit into prod from dev`.
4. Assuming that GitHub does not detect any conflicts, click **Merge pull request**, then **Confirm merge**.

If the merge is successful, GitHub will display a confirmation message. You should now see the new `route.yml` in both the `dev` and `prod` branches.

Syncing Your Production Leader to GitHub

Now, to make your Production environment pick up the changes from the `prod` branch, you'll send an HTTP request from the Production Leader to the Cribl API.

Adapt the following request, substituting your Production Leader's IP address and admin password for the placeholders.

```
    curl -X POST "http://<Production_Leader_IP>:9000/api/v1/version/sync" \
    -H "accept: application/json" \
    -H "Authorization: Bearer $(curl
http://<Production_Leader_IP>:9000/api/v1/auth/login \
    -H 'Content-Type: application/json' \
    -d "{\"username\":\"admin\",\"password\":\"<Production_Leader_password>\"}"
2>/dev/null | jq -r .token)" \
    -d "ref=prod&deploy=true"
```

> Nested within the request to `/version/sync` is another request to `/auth/login`. The nested request obtains the Bearer token required by the parent request. For more about Bearer tokens, see this section.

You should now see the changes you made in your Development environment (in this example, the new Route) in the Production environment, too.

There's much more you can do with GitOps. To learn about `C.env.CRIBL_GIT_BRANCH` and GitHub Actions, see Going Further.

5.4. About Load Balancing

Cribl Stream will attempt to load-balance outbound data as fairly as possibly across all endpoints. For example, if FQDNs/hostnames are used as the Destination addresses, and each resolves to 5 (unique) IPs, then each Worker Process will have its # of outbound connections = {# of IPs x # of FQDNs} for purposes of the Destination.

Data is sent by all Worker Processes to two randomly-selected endpoints simultaneously, and the amount sent to each connection depends on these parameters:

1. Respective destination **weight**: If a **Load Weight** is set to `0`, Cribl Stream will not try to connect to that IP (nor to any IPs resolved for that FQDN). When a connection is blocked, Cribl Stream will apply a 10% penalty to the load weight, and will select the connection with the lower adjusted load.
2. Respective destination **historical data**: By default, historical data is tracked for 300s. Cribl Stream uses this data to influence the traffic sent to each destination, to ensure that differences decay over time, and that total ratios converge towards configured weights.

> On Destinations that support load balancing, Cribl recommends enabling the feature, even if you only have one hostname – because this hostname can expand to multiple IPs. If you must disable load balancing, then to ensure robust connections, enable the alternative **Advanced Settings** > **Round-robin DNS** option. This will allow Cribl Stream to follow the DNS host's IP rotation, preventing connection pinning.

Example

Suppose we have two connections, A and B, each with weight of `1` (i.e., they are configured to receive equal amounts of data). Suppose further that the load-balance stats period is set at the default `300s` and – to make things easy – for each period, there are 200 events of equal size (Bytes) that need to be balanced.

INTERVAL	TIME RANGE	EVENTS TO BE DISPENSED
1	*time=0s ---> time=300s*	**200**

Both A and B start this interval with 0 historical stats each.

Let's assume that, due to various circumstances, 200 events are "balanced" as follows: `A = 120 events` and `B = 80 events` – a difference of **40 events** and a ratio of **1.5:1**.

INTERVAL	TIME RANGE	EVENTS TO BE DISPENSED
2	*time=300s ---> time=600s*	**200**

At the beginning of interval 2, the load-balancing algorithm will look back to the previous interval stats and carry **half** of the receiving stats forward. I.e., connection A will start the interval with **60** and connection B with **40**. To determine how many events A and B will receive during this next interval, Cribl Stream will use their weights and their stats as follows:

Total number of events: `events to be dispensed + stats carried forward = 200 + 60 + 40 = 300`. Number of events per each destination (weighed): `300/2 = 150` (they're equal, due to equal weight). Number of events to send to each destination `A: 150 - 60 = 90` and `B: 150 - 40 = 110`.

Totals at end of interval 2: `A=120+90=210`, `B=80+110=190`, a difference of **20 events** and a ratio of **1.1:1**.

Over the subsequent intervals, the difference becomes exponentially less pronounced, and eventually insignificant. Thus, the load gets balanced fairly.

> If a request fails, Cribl Stream will resend the data to a different endpoint. Cribl Stream will block only if **all** endpoints are experiencing problems.

5.5. Persistent Queues

Cribl Stream's persistent queuing (PQ) feature helps minimize data loss if a downstream receiver is unreachable. PQ provides durability by writing data to disk for the duration of the outage, and forwarding it upon recovery.

Persistent queues are implemented:

- On Push Sources.
- On Streaming Destinations. (Sources can also take advantage of a Destination's queue.)

Persistent Queues Supplement In-Memory Queues

Persistent queues trigger differently on the Destination versus Source side.

Destination Side

On each Cribl Stream Destination that supports PQ, an in-memory buffer helps the Destination absorb temporary imbalances between inbound and outbound data rates. E.g., if there is an inbound burst of data, the Destination will store events in the queue, and will then output them at the rate to which the receiver can sync (as opposed to blocking or dropping the events).

Only when this buffer is full will the Destination impose backpressure upstream. (This threshold varies per Destination type.) This is where persistent queues help safeguard your data.

Source Side

In Cribl Stream 3.4 and later, Push Sources' config modals also provide a PQ option. When enabled, you can choose between two trigger conditions: `Always On` mode will use PQ as a buffer for **all** events, whereas `Smart` mode will engage PQ only upon backpressure from Destinations.

Life Without PQ

On the Destination side, you can configure backpressure behavior to one of **Block**, **Drop Events**, or (on Destinations that support it) **Persistent Queue**. In **Block** mode, the output will refuse to accept new data until the receiver is ready.

The system will back propagate block "signals" all the way back to the sender (assuming that the sender supports backpressure, too). In general, TCP-based senders support backpressure, but this is not a guarantee: Each upstream application's developer is responsible for ensuring that the application stops sending data once Cribl Stream stops sending TCP acknowledgments back to it.

In **Drop** mode, the Destination will discard new events until the receiver is ready. In some environments, the in-memory queues and their block/drop behavior are acceptable.

PQ = Durability

Persistent queues serve environments where more durability is required (e.g., outages last longer than memory queues can sustain), or where upstream senders do not support backpressure (e.g., ephemeral/network senders).

Engaging persistent queues in these scenarios can help minimize data loss. Once the in-memory queue is full, the Cribl Stream Destination will write its data to disk. Then, when the receiver is ready, the output will start draining the queues.

By default, after data flow is re-established, Cribl Stream will forward events in FIFO (first in, first out) order: It will send out earlier queued events before newly arriving events. In Cribl Stream 4.1 and later, you can instead prioritize new events by disabling Destinations' **Strict ordering** control.

Source and/or Destination PQ?

If your Source(s) and Destination(s) both support persistent queues, which side should you enable? If you prioritize maximum data retention and delivery over performance, Cribl recommends that you enable both Source PQ and Destination PQ.

When PQ is engaged, throughput will be somewhat slower. But in exchange for this extra latency, you'll minimize your risk of data loss.

> Because of this latency penalty, it is redundant to enable PQ on a Source whose upstream sender is configured to safeguard events in its own disk buffer.

Persistent Queue Details and Constraints

Persistent queues are:

- Available on Push Sources.

- Available on the output side (i.e., after processing) of all streaming Destinations, with these exceptions: Syslog and Graphite (when you select UDP as the outbound protocol) and SNMP Trap.
- Implemented at the Worker Process level, with independent sizing configuration and dynamic engagement per Worker Process.
- With load-balanced Destinations (Splunk Load Balanced, Splunk HEC, Elasticsearch, TCP JSON, and Syslog with TCP), engaged only when **all of the Destination's receivers** are blocking data flow. (Here, a single live receiver will prevent PQ from engaging on the corresponding Destination.)
- On Destinations, engaged only when receivers are down, unreachable, blocking, or throwing a serious error (such as a connection reset). Destination-side PQ is not designed to engage when receivers' data consumption rate simply slows down.
- Drained when at least one receiver can accept data.
- Capable of orphaning events if there are files on disk when a Source or Destination is turned off or if the number of Worker Processes is reduced.
- Not infinite in size. I.e., if data cannot be delivered out, you might run out of disk space.
- Not able to fully protect in cases of application failure. E.g., in-memory data might get lost if a crash occurs.
- Not able to protect in cases of hardware failure. E.g., disk failure, corruption, or machine/host loss.
- TLS-encrypted only for data in flight, and only on Destinations where TLS is supported and enabled. To encrypt data at rest, including disk writes/reads, you must configure encryption on the underlying storage volume(s).

Configuring Persistent Queueing

The following sections outline configuring PQ for Cribl.Cloud Workers managed by Cribl, and then for on-prem and hybrid Cribl.Cloud Workers.

Configuring PQ for Cribl-Managed Cloud Workers

Persistent queuing is supported for Cribl-managed Workers in Cribl.Cloud deployments with an Enterprise plan. Configuration is considerably simpler with Cribl-managed Workers than with hybrid and on-prem Workers (both covered below). You configure PQ individually for each Source and Destination that supports it.

Sources

1. Click a Source to open its configuration modal.
2. Select **Persistent Queue Settings**.
3. Toggle the **Enable Persistent Queue** slider on.

When enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB of data per PQ-enabled Source, per Worker Process. The 1 GB limit is on uncompressed inbound data, and no compression is applied to the queue. This limit is not configurable.

> On Cribl-managed Workers, the **Persistent Queue Settings** tab exposes only the **Enable Persistent Queue** toggle. It omits the configuration options available with on-prem or hybrid Workers.

Destinations

1. Click a Destination to open its configuration modal.
2. Set **Backpressure behavior** to `Persistent Queueing`.

When enabled, PQ is automatically configured with a maximum queue size of 1 GB of uncompressed data per PQ-enabled Destination, per Worker Process. The 1 GB limit is on uncompressed outbound data, and no compression is applied to the queue. This limit is not configurable.

To disable persistent queuing, select **Persistent Queue Settings**, and then select **Clear Persistent Queue**.

> On Cribl-managed Workers, the **Persistent Queue Settings** tab exposes only the **Clear Persistent Queue** button. It omits the configuration options available with on-prem or hybrid Workers. If the queue fills up, Cribl Stream will block outbound data.

Logs

Cribl internal logs for Cloud-managed Workers might include entries labeled `Revived PQ Worker Process`. These indicate a Cribl-managed Worker newly assigned to drain a Persistent Queue that is left over from a shut-down Worker Node. They can be used to troubleshoot Cloud PQ issues.

Configuring PQ for On-Prem and Hybrid Workers

Persistent queuing is supported for Workers in on-prem deployments with a Standard license, and for hybrid Cribl.Cloud Workers with an Enterprise plan. You configure persistent queueing individually for each Source and Destination that supports it.

On Sources:

1. Click a Source to open its configuration modal.
2. Select **Persistent Queue Settings**.

3. Toggle the **Enable Persistent Queue** slider on.

On Destinations:

1. Click a Destination to open its configuration modal.
2. Set **Backpressure behavior** to `Persistent Queueing`.

These selections expose the additional controls outlined below.

> For an example of optimizing several PQ throttling options listed below, see our Configure Cribl Stream to Avoid Data Loss With Persistent Queuing blog post.

Source-Side PQ Only

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Always On versus Smart Mode

As of version 4.1, Source-side PQ's default mode changed from `Smart` to `Always on`, for greater reliability. This change does not affect existing Sources' configurations. However:

> If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.

If you find `Smart` mode causing Source-side PQ to frequently engage, and PQ is configured with a large **Max file size** (e.g., 1 GB), Cribl recommends either of two remedies:

- Switch the PQ configuration to `Always On`. This will avoid triggering backpressure and potential data loss on senders. (However, it might require provisioning more disk space for the queue.)

- Reduce the **Max file size** to a value no higher than the default `1 MB`. (Source-side PQ excessively triggers backpressure only when it reaches the last queued file **and** that file is large. Keeping this threshold low prevents that condition.)

Common PQ Settings (Source and Destination Sides)

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

> ### Max Queue Size with Compression
>
> If you enable **Compression** and also enter a **Max queue size** limit, be aware of how these options interact:
>
> - Cribl Stream currently applies the **Max queue size** limit against the **uncompressed** data volume entering the queue.
> - With this combination, Cribl recommends that you set the **Max queue size** limit **higher** than the volume's total available disk space – again disregarding compression. This will maximize queue saturation and minimize data loss. (For details, see Known Issues.)

Destination-Side PQ Only

Queue-full behavior: Determines whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to delete the files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

This section's remaining controls are available in Cribl Stream 4.1 and later.

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Minimum Free Disk Space

For queuing to operate properly, you must provide sufficient disk space. You configure the minimum disk space in **Settings** > **Global Settings** > **General Settings > Limits > Min Free Disk Space**. If available disk space falls below this threshold, Cribl Stream will stop maintaining persistent queues, and data loss will begin. The default minimum is 5GB. Be sure to set this on your Worker Nodes (rather than on the Leader Node) when in distributed mode.

Persistent Queue Support by Destination Type

Persistent Queues support, behavior, and triggers vary by Destination type, as summarized below.

HTTP-Based Destinations

HTTP-based Destinations handle backpressure based on HTTP response codes. The following conditions will trigger PQ:

1. Connection failure.
2. HTTP `500` responses.
3. Data overload – sending more data than the Destination will accept.

HTTP `400` response errors will not engage PQ, and Cribl Stream will simply drop corresponding events. Cribl Stream cannot retry these requests, because they have been flagged as "bad," and would just fail again. If you see `400` errors, these often indicate a need to correct your Destination's configuration.

HTTP-based Destinations include:

- WebHook
- New Relic Logs & Metrics
- New Relic Events
- Open Telemetry
- Sumo Logic
- DataDog
- Elastic
- Honeycomb
- Prometheus
- Splunk HEC
- Signal FX
- Wavefront
- Google Chronicle
- Loki

TCP Load-Balanced Destinations

TCP load-balanced Destinations can be configured with one or multiple receivers. If one or more receivers go down, Cribl Stream will continue sending data to any healthy receivers. The following conditions will trigger PQ:

1. Connection errors on **all** receivers.

> As long as even one of the Destination's receivers is healthy, Cribl Stream will redirect data to that receiver, and will **not** engage PQ.

2. Data overload – sending more data than the Destination will accept.

TCP load-balanced Destinations include:

- Splunk Load Balanced
- TCP JSON
- Syslog

Destinations Without PQ Support

Filesystem-based Destinations, and Destinations using the UDP protocol, do not support PQ. These include:

- Amazon S3
- Filesystem
- Azure Blob Storage
- Google Cloud Storage
- SNMP Trap
- StastsD (with UDP)
- Statsd Extended (with UDP)
- Syslog (with UDP)

Filesystem-based Destinations do not support PQ because they already persist events to disk, before sending them to their final destinations.

UDP-based Destinations do not support PQ because the protocol is not reliable. Cribl Stream gets no indication whether the receiver received an event.

Other Destinations

Other Destinations with a single receiver generally engage PQ based on these trigger conditions:

1. Connection errors.
2. Fail to send an event (for any reason).

Getting Notified about PQ Status

With an Enterprise or Standard license, you can configure Notifications to be sent when Persistent Queue files exceed a configurable percentage of allocated storage, or when they reach the queue-full state described above.

These Notifications always appear in Cribl Stream's UI and internal logs, and you can also send them to external systems. For setup details, see Destination-State Notifications.

5.6. Worker Group Settings

By selecting **Settings** > **Group Settings** from Cribl Stream's top nav, you can configure the following settings per Worker Group.

General Settings

You can configure the following options in **Worker Group Configuration**:

Description: Optionally, add or edit a description of the Worker Group's purpose.

Enable teleporting to Workers: Use this toggle to enable or disable authenticated access to Workers' UI from the Leader (Stream, Edge).

In Cribl Stream 4.1.2 and later, you can configure the following option in **Shutdown Settings**:

Drain timeout (sec): Determines how long a Cribl server will wait for writes to complete before the server shuts down on individual Worker Processes. If you notice that Workers are under-ingesting available data upon shutdown or restart, increase the `10`–second default. Acceptable range of values: minimum `1` second, maximum `600` seconds (10 minutes).

Worker Processes

For details about this left tab's **Process count**, **Minimum process count**, and **Memory (MB)** controls, see Sizing and Scaling.

> **Process count** and **Minimum process count** are not configurable on Cribl Edge, where each Edge Node is automatically allocated `1` Worker Process.

The following controls are also available on this tab to optimize Worker Processes' throughput on startup.

Max connections at startup: Maximum number of connections accepted at Worker Process startup. Defaults to `1`. Enter a negative integer for unlimited connections.

Startup throttling duration (ms): Maximum time (in milliseconds) to continue throttling connections after Worker Process startup. Defaults to `10000` ms (10 sec.) Enter `0` to disable throttling.

Load throttle %: Sets a threshold to prevent overwhelming Workers. If 90% of a Worker Process' CPU utilization readings over the preceding 1 minute exceed this threshold, Cribl Stream will reject new connections until the CPU load stabilizes. Defaults to `0` % (no throttling). Enter a percentage between `1` – `100` to enable throttling.

> You configure the CPU saturation threshold, but the 90% sampling trigger is not configurable. Also, `_raw stats > cpuPerc` values might diverge from your **Load throttle %** threshold. This is because `cpuPerc` is sampled and averaged once per minute, whereas the **Load throttle %** is evaluated every second, with a rolling 1-minute lookback sample. (These intervals are also not configurable.)

Single-threaded mode (V8): Limits the JavaScript V8 engine to a single thread. Consult Cribl Support before toggling this off.

Other Settings

This page's remaining options work essentially the same way as their **Global Settings** counterparts. Use the following links for details about: logging levels/redactions, access management security, scripts, and diagnostics.

5.7. Monitoring

To get an operational view of a Cribl Stream deployment, you can consult the following resources.

Monitoring Resources

- Monitoring Page
- Internal Logs and Metrics
- Licensing
- Flows (Beta)
- Health Endpoint

Monitoring Page

From Cribl Stream's top nav, select **Monitoring** to access multiple dashboards. The resulting **Monitoring** page displays information about traffic in and out of the system, as well as collection jobs and tasks. It tracks events, bytes, splits by data fields over time, and broader system metrics.

The initial view (below) shows aggregate data for all Worker Groups and all Workers. You can use the drop-downs at the upper right to isolate individual Groups, or individual Workers.

Also at the upper right, you can change the display's granularity from the default `15 min`, selecting from a variety of time ranges from `1 min` up to `1 day`. (The latter covers the preceding 24 hours, and this maximum window is not configurable.)

The displayed **Storage** tile (upper right) represents the amount of free storage remaining on the partition where Cribl Stream is installed. (This quantity might not represent the maximum storage available for the selected Worker or Group. Also, it does not calculate the system free space.)

Similarly, the **Free Memory** graph reflects only the operating system's `free` statistic, matching Linux's strict `free` definition by excluding `buff/cache` memory. So this graph indicates a lower value than the OS' `available` memory statistic – and it does not necessarily indicate that the OS is running out of memory to allocate.

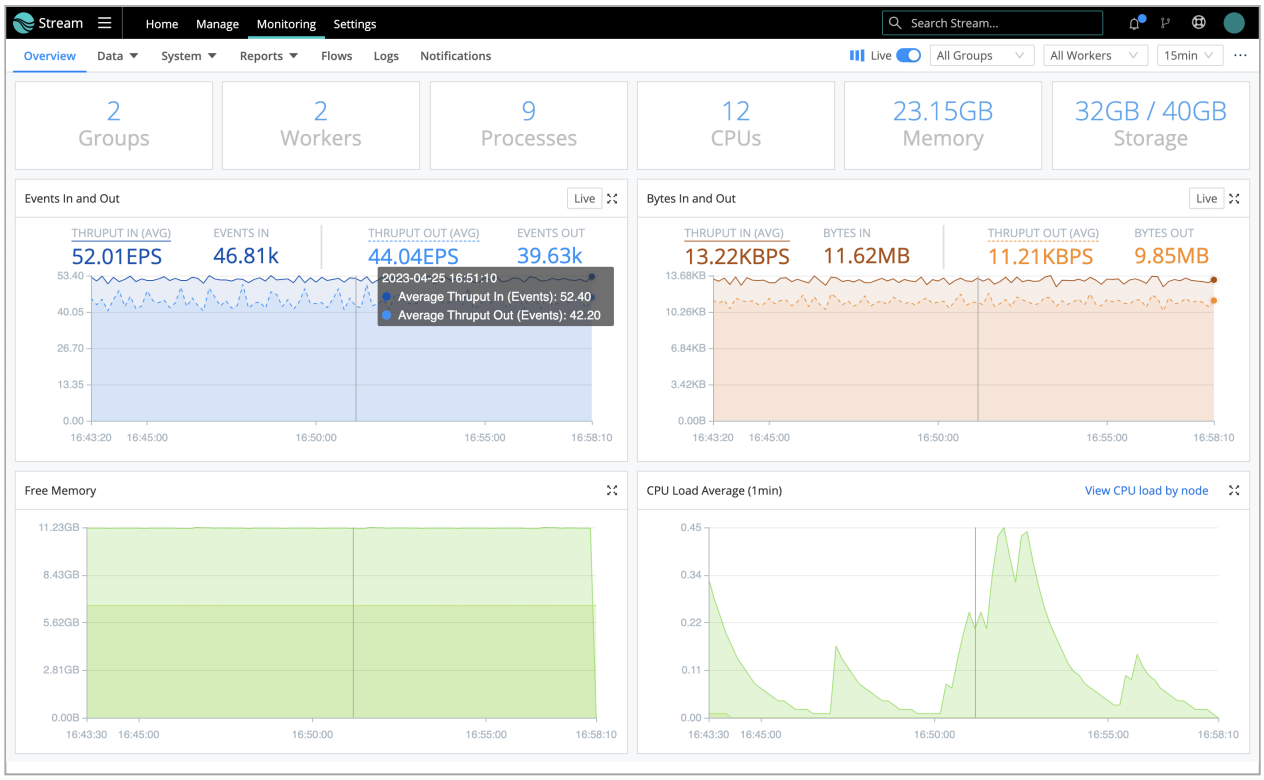

Monitoring page

> Metrics are displayed in the Cribl Stream UI in units of KB, MB, GB, and TB. At each level, these are multiples of `1024`.

Byte-related charts show the uncompressed amounts and rates of data processed over the selected time range:

- Events (total) in and out
- Events per second in and out
- Bytes (total) in and out
- Bytes per second in and out

We measure bytes in and out based on the size of `_raw`, if this field is present and is of type `string`. Otherwise, we use the size of read (uncompressed) data.

The displayed **CPU Load Average** is an average per Worker Process, updated at 1-minute granularity. (It is not an average for the Worker Node as a whole.)

Vertical lines across each chart display configuration changes. Click anywhere on the line to view summary information including time, data, and configuration versions.

Click **View CPU load by node** to open a modal showing CPU usage per Worker.

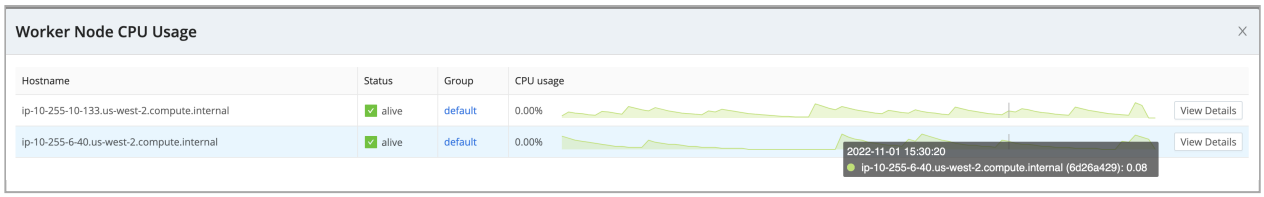

Monitoring page

Click a **View Details** button to access a Worker Node's **Worker Settings**, with details per Worker Process. (To enable this button, you must first enable the parent Group's Remote UI Access.)

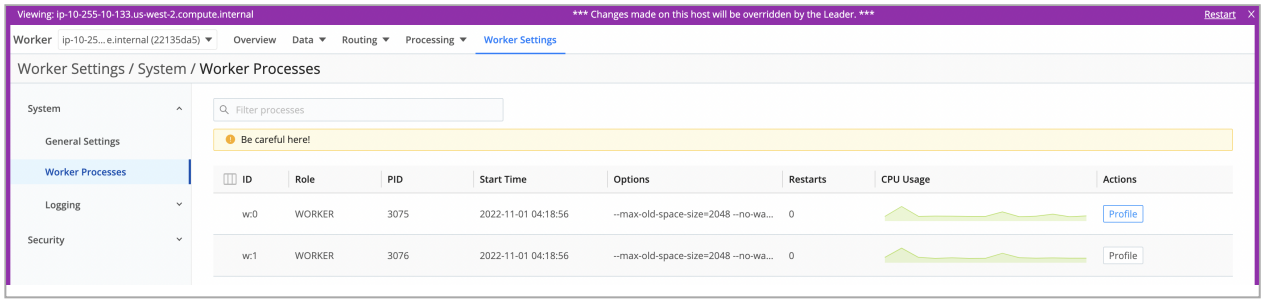

Monitoring page

> Except for these configuration change markers, Monitoring data does not persist across Cribl Stream restarts. Keep this in mind before you restart the server.

Data Monitoring

From the **Monitoring** page's top nav, open the **Data** submenu to isolate throughput for any of the following:

- Sources
- Routes
- Pipelines
- Packs
- Destinations
- Data Fields

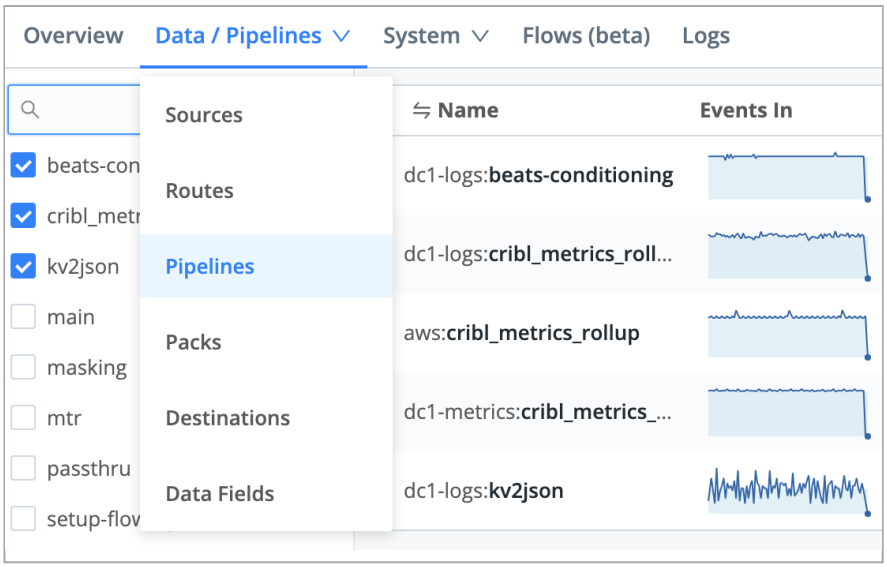

Monitoring > Data submenu (Pipelines selected)

Sparklines

Dense displays are condensed to sparklines for legibility. Hover over the right edge to display Maximize buttons that you can click to zoom these up to detailed graphs.

Sparklines and fly-out

Routes

This **Data** > **Routes** page condenses multiple details and options:

- Each row independently summarizes throughput for a separate Route.
- The left (blue) side summarizes events in/out. The right (amber) side summarizes bytes in/out.
- On each row, the top number summarizes average events/bytes into the Route, and the bottom number summarizes events/bytes out. Both are averaged over your selected time granularity.
- On each row, the upper Maximize button zooms up the left (events) graph, and the lower Maximize button zooms up the right (bytes) graph.

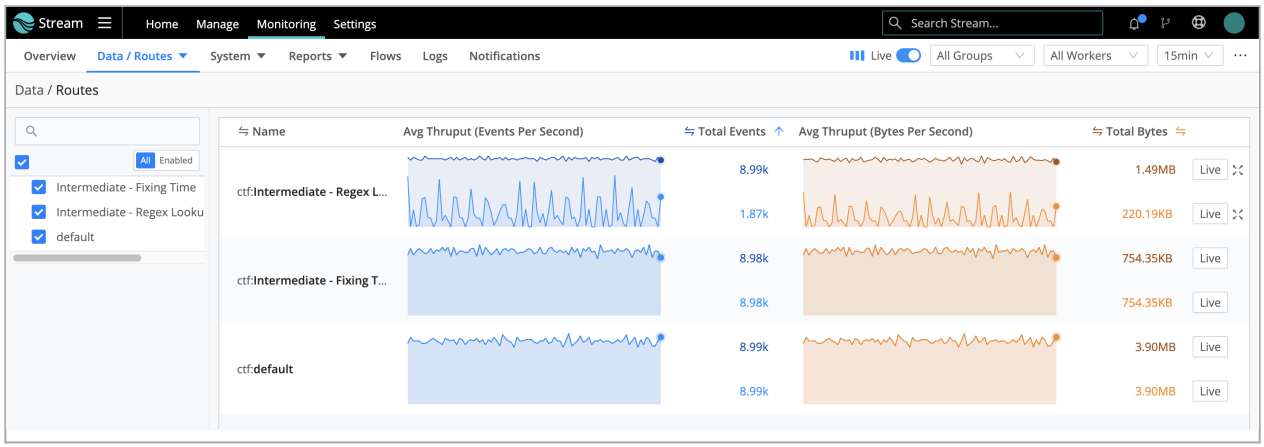

Routes page's multiple rows and controls

Fly-Out Details

You can hover over graphs to display a fly-out with details. On the **Free Memory** and **CPU Load Average** graphs, fly-outs are limited to a manageable 10 Worker Nodes, even if more Nodes are active. These fly-outs will occasionally show transient `0` metrics for some Workers, because Cribl Stream prioritizes reporting current throughput over memory/load metrics.

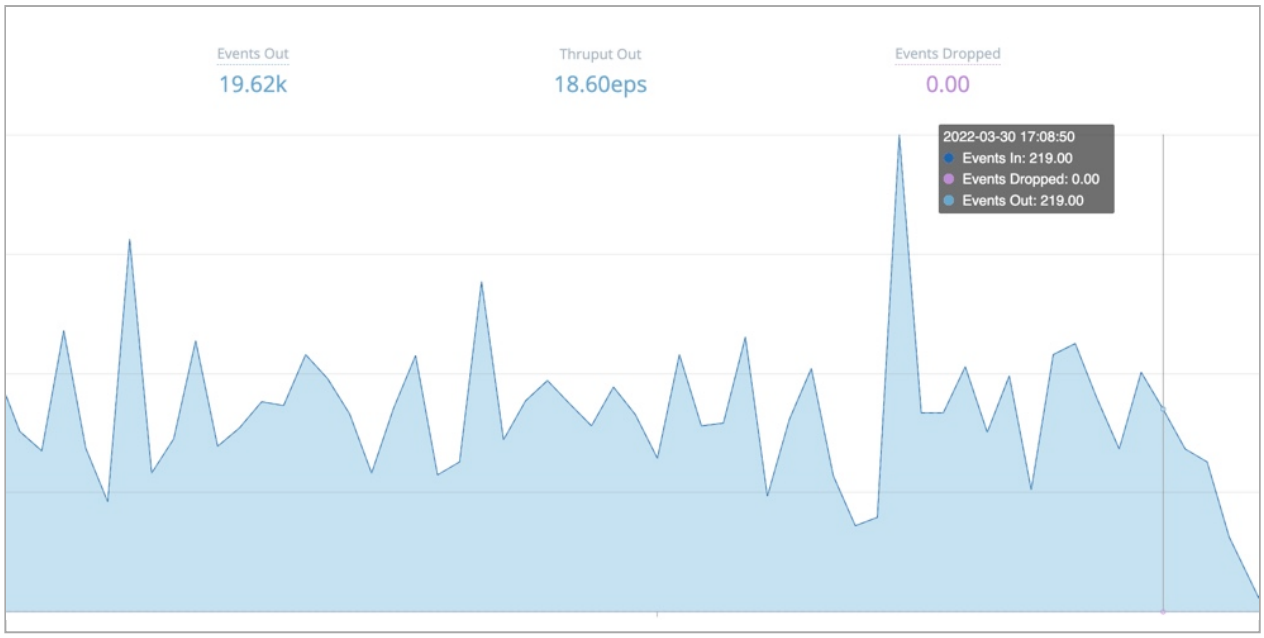

Throughput details

System Monitoring

From the **Monitoring** page's top nav, open the **System** submenu to isolate throughput for any of the following:

- Leaders (see Second Leader)
- Queues (see Persistent Queues)
- Licensing
- Jobs (and tasks in-flight, see Collector Sources)
- Job Inspector

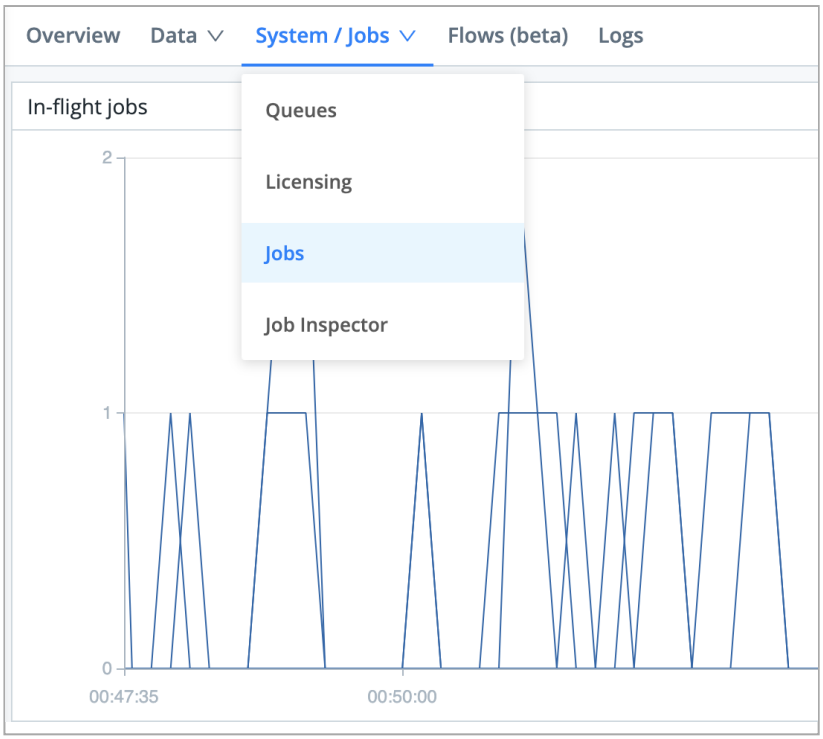

Monitoring > System submenu (Jobs in-flight selected)

Leaders

Select **Monitoring** > **System** > **Leaders** to view the status of your Leader Nodes. For more information on how to configure a second Leader Node for failover/durability, see Second Leader).

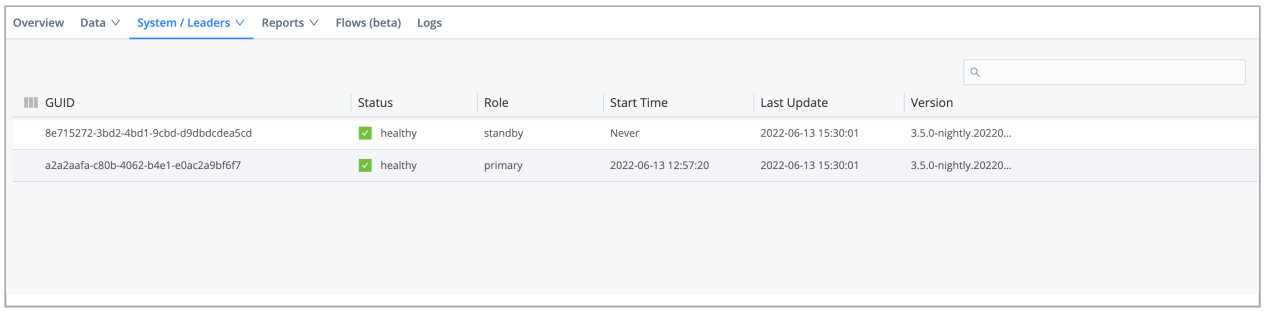

Monitoring Leader Nodes

Licensing

Select **System** > **Licensing** from the Monitoring page's top nav to check your licenses' expiration dates, and daily data throughput quotas. You can also compare your daily data throughput against your license quota – and against granular and average throughput over the last 30 to 365 days. Highlights include:

- A horizontal bar indicates license usage against your quota.

- Tooltips display details about data usage, data amount over/under license quota, and data percentage over/under license quota.
- Dots on the daily usage bar graph represent configuration changes in the system.

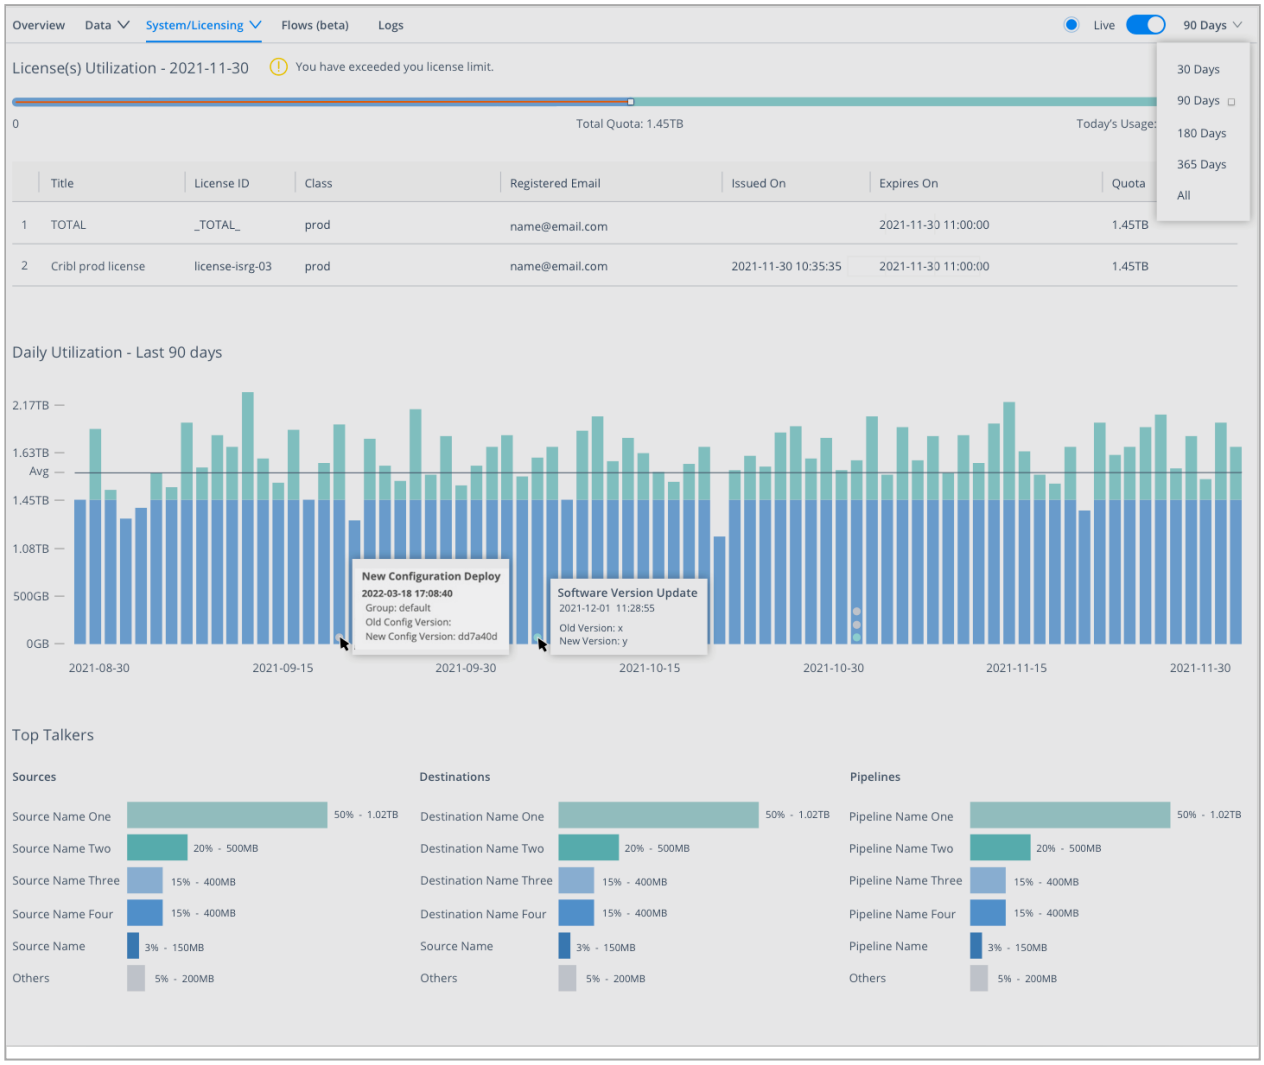

Monitoring > Licensing

Even on single-instance deployments, you must have `git` installed in order for the Monitoring > **Licensing** page to display configuration change markers.

For the most current and accurate throughput data, enable the Cribl Internal Source's CriblMetrics option. Forward metrics to your metrics Destination of choice, and run a report on `cribl.total.in_bytes`. CriblMetrics aggregates metrics at the Worker Process level, every 2 seconds.

Job Inspector

Select **System** > **Job Inspector** from the Monitoring page's top nav to view and manage pending, in-flight, and completed collection jobs and their tasks. For details about the resulting page, see Monitoring and Inspecting Collection Jobs.

Reports/Top Talkers

Select **Monitoring** > **Reports / Top Talkers** > **Top Talkers**, where you can examine your five highest-volume Sources, Destinations, Pipelines, Routes, and Packs. All components are ranked by events throughput. Sources and Destinations get separate rankings by bytes in and out, respectively.

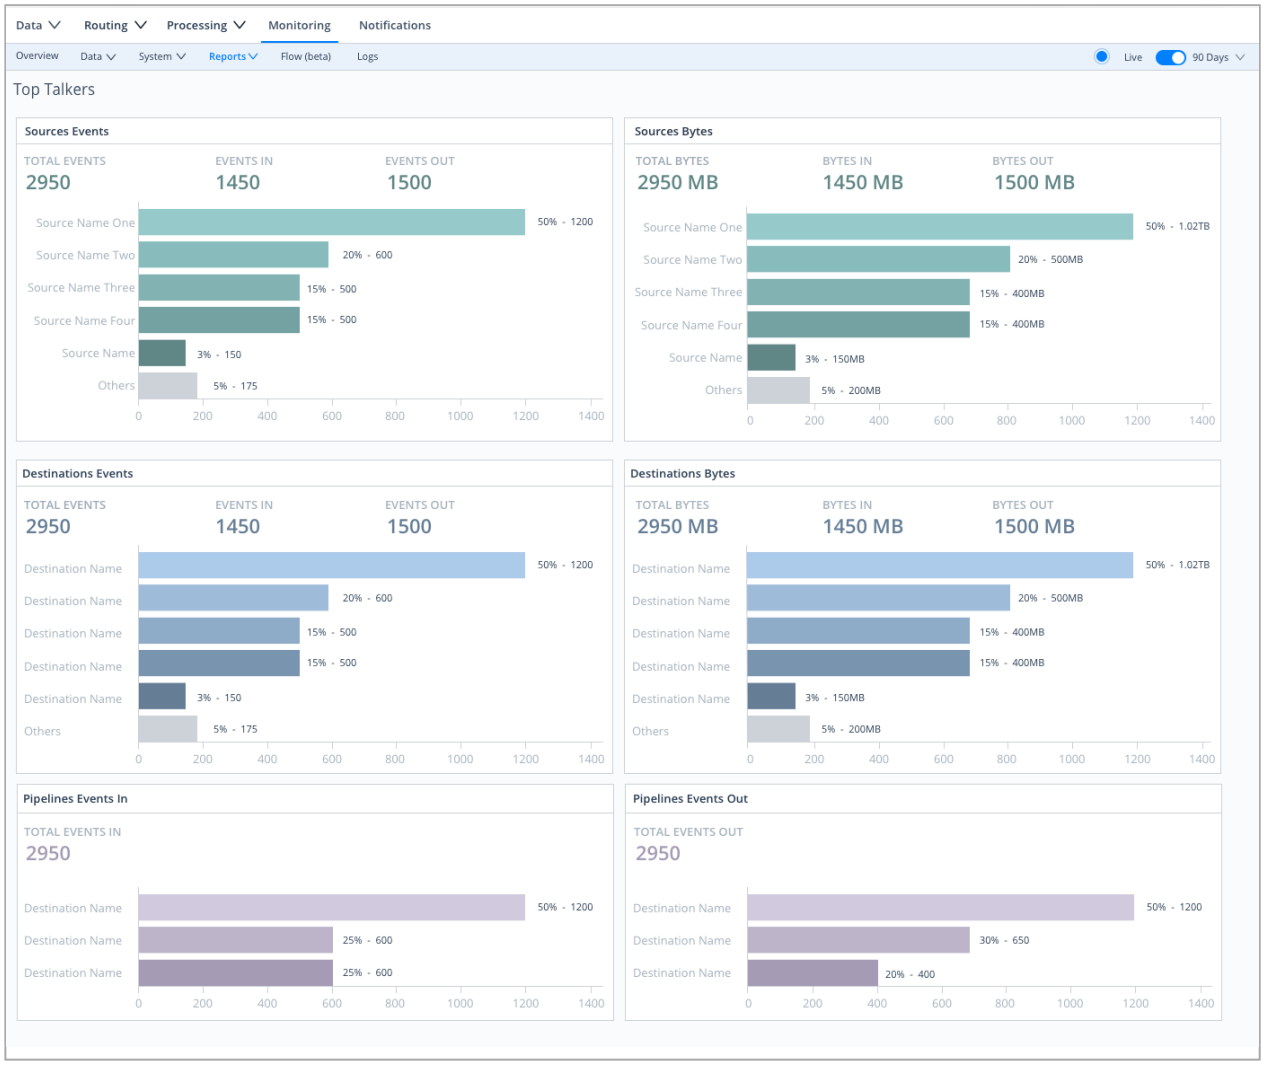

Monitoring > Reports/Top Talkers

Flows (Beta)

Select **Flows** from the Monitoring page's top nav or ••• overflow menu to see a graphical, left-to-right visualization of data flow through your Cribl Stream deployment.

Internal Logs and Metrics

Select **Logs** from the Monitoring page's top nav. Cribl Stream's internal logs and internal metrics provide comprehensive information about an instance's status/health, inputs, outputs, Pipelines, Routes, Functions, and traffic.

Health Endpoint

Query this endpoint on any instance to check the instance's health. (Details below.)

Types of Logs

Cribl Stream provides the following log types, by originating process:

- API Server Logs – These logs are emitted primarily by the `API/main` process. They correspond to the top-level `cribl.log` that shows up on the Diag page. These include telemetry/license-validation logs. Filesystem location: `$CRIBL_HOME/log/cribl.log`
- Worker Process(es) Logs – These logs are emitted by all the Worker Processes, and are very common on single-instance deployments and Workers. Filesystem location: `$CRIBL_HOME/log/worker/N/cribl.log`
- Worker Group/Fleet Logs – These logs are emitted by all processes that help a Leader Node configure Worker Groups/Fleets. Filesystem location: `$CRIBL_HOME/log/group/GROUPNAME/cribl.log`

> For details about generated log files, see Internal Logs. To work with logs in Cribl Stream's UI, see Search Internal Logs.

Cribl Stream rotates logs every 5 MB, keeping the most recent 5 logs. In a distributed deployment (Stream), all Workers forward their metrics to the Leader Node, which then consolidates them to provide a deployment-wide view.

Forward Logs and Metrics Externally

Cribl Stream supports forwarding internal logs and metrics to your preferred external monitoring solution. The Cribl Internal Source captures internal logs and metrics to send to Destinations.

In the following steps, we'll use the graphical QuickConnect UI to set up the **Cribl Internal** Source and how data is sent to your Destination. See Cribl Internal for details on how to instead configure the **Cribl Internal** Source via the **Data** > **Sources** (Stream) or **More** > **Sources** (Edge) submenus.

1. From the top nav, click **Manage**, then select a **Worker Group** to configure.

2. To open **QuickConnect**: Stream – select the **QuickConnect** tile on the **Overview** page. Edge – click the **Collect** submenu.

3. Click **Add Source**.

4. From the resulting drawer's tiles, select **System and Internal**, then hover over the **Cribl Internal** tile.

5. Click **Select Existing**.

6. On the **CriblLogs** and/or the **CriblMetrics** row, slide the **Enabled** slider to `Yes`. Confirm your choice in the resulting message box.

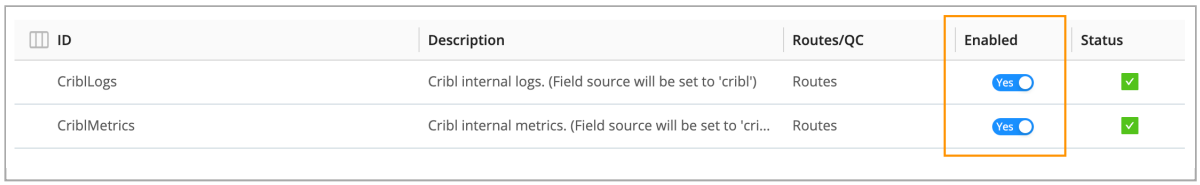

Cribl Internal Sources – click to configure

7. Notice how the **Routes/QC** column still says **Routes**. We want to use QuickConnect, so we'll change this by clicking on the **CriblLogs** and/or the **CriblMetrics** row again. Once clicked, you'll confirm **Yes** to the message box asking to switch the Source to send to QuickConnect instead of Routes.

8. Click and drag the **+** button on the right side of the Source to your desired Destination.
   A **Connection Configuration** modal will prompt you to select a **Passthru**, **Pipeline**, or **Pack connection**. See QuickConnect for details.

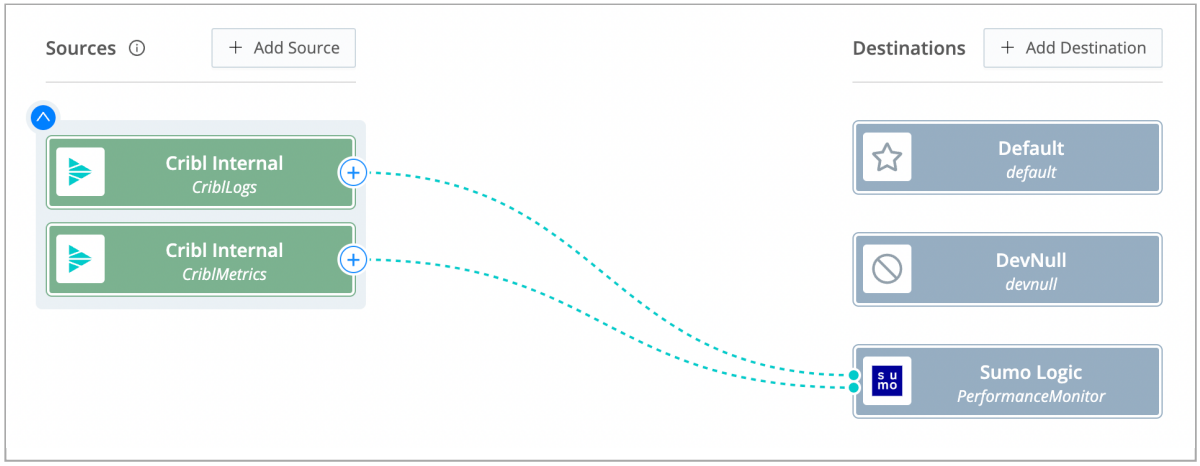

Cribl Internal forwarding to Sumo Logic

9. This will send internal logs and metrics to your Destination, just like another data Source. Both logs and metrics will have a field called `source`, set to the value `cribl`, which you can use in Routes' filters.

Note that the only logs supported here are Worker Process logs (see Types of Logs above). You can, however, use a Script Collector to listen for API Server or Worker Group events.

For recommendations about useful Cribl metrics to monitor, see Internal Metrics.

Controlling Metrics Volume

To reduce the volume of metrics sent through Cribl Stream, see options on the Cribl Internal Source.
The following complementary settings are available on the Leader.

Disable Field Metrics

To send fewer metrics to the Leader Node, you can specify these metric types in the blocklist at **Settings** > **Global Settings** > **System** > **General Settings** > **Limits** > **Metrics** > **Disable field metrics**.

However, when you enable the **Cribl Internal** Source, Cribl Stream ignores this **Disable field metrics** setting, and full-fidelity data will flow down the Routes.

Control Metrics Lag and Disk Usage

If one or more Worker Groups has a large number of enabled Sources, and clicking into these Sources does not promptly display their status, a workaround is to prevent Cribl Stream from writing metrics to disk.
On the Leader (versions 4.1.2 and later), navigate to **Settings** > **Global Settings** > **System** > **General Settings** > **Limits** > **Storage**, and disable the **Persist metrics** toggle. Then restart the Leader.

If you keep **Persist metrics** enabled, you can use the adjacent **Metrics max disk space** field to control the written metrics' footprint. This threshold defaults to `64 GB`.

Search Internal Logs

Cribl Stream exists because logs are great and wonderful things! Using Cribl Stream's **Monitoring > Logs** page, you can search all Cribl Stream's internal logs at once – from a single location, for both Leader and Worker. This enables you to query across all internal logs for strings of interest.

The labels on this screenshot highlight the key controls you can use (see the descriptions below):

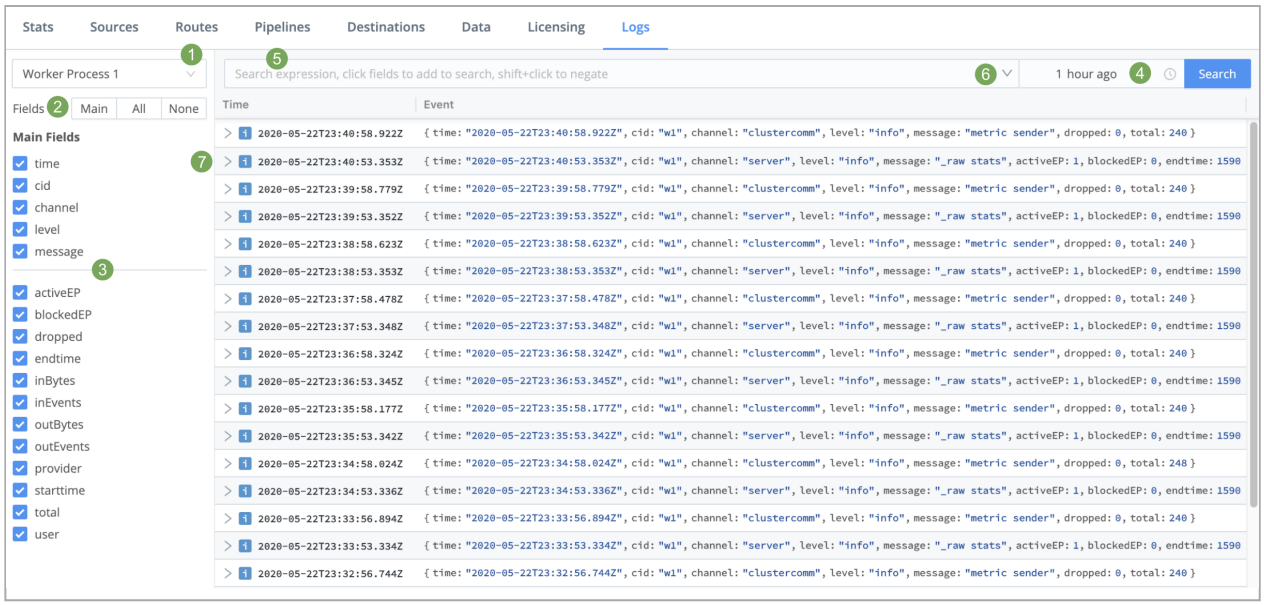

Logs page (controls highlighted)

1. **Log file selector**: Choose the Node to view. In a distributed deployment (Stream), this list will be hierarchical, with Workers displayed inside their Leader.

2. **Fields selector**: Click the **Main | All | None** toggles to quickly select or deselect multiple check boxes below. Beside these toggles, a Copy button enables you to copy field names to the clipboard in CSV format.

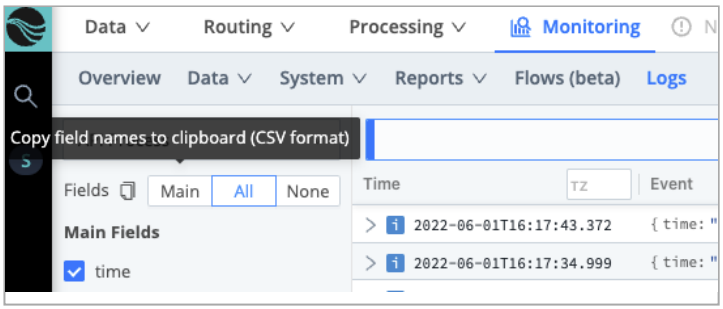

Monitoring - Copy Fields Icon

3. **Fields**: Select or deselect these check boxes to determine which columns are displayed in the Results pane at right. (The upper **Main Fields** group will contain data for *every* event; other fields might not display data for all events.)

4. **Time range selector**: Select a standard or custom range of log data to display. (The **Custom Time Range** pickers use your local time, even though the logs' timestamps are in UTC.)

5. **Search box**: To limit the displayed results, enter a JavaScript expression here. An expression must evaluate to `truthy` to return results. You can press **Shift+Enter** to insert a newline.

Typeahead assist is available for expression completion:

Expression autocompletion

Click a field in any event to add it to a query:

Click to add a field

Click other fields to append them to a query:

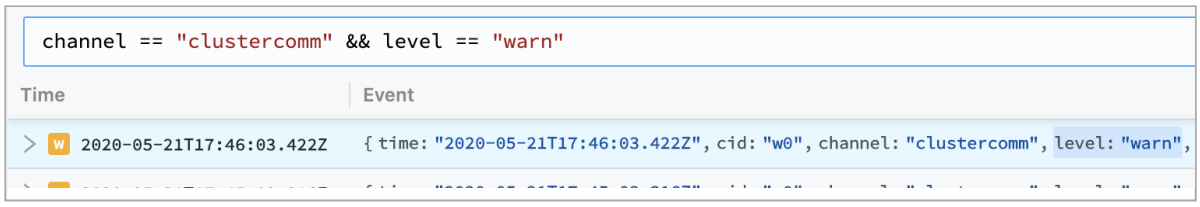

Click to append a field

Shift+click to *negate* a field:

Shift-click to negate a field

> To modify the depth of information that is originally input to the Logs page, see Logging Settings.

6. Click the Search box's history arrow (right side) to retrieve recent queries:

Retrieve recent searches

7. The Results pane displays most-recent events first. Each event's icon is color-coded to match the event's severity level.

   Click individual log events to unwrap an expanded view of their fields:

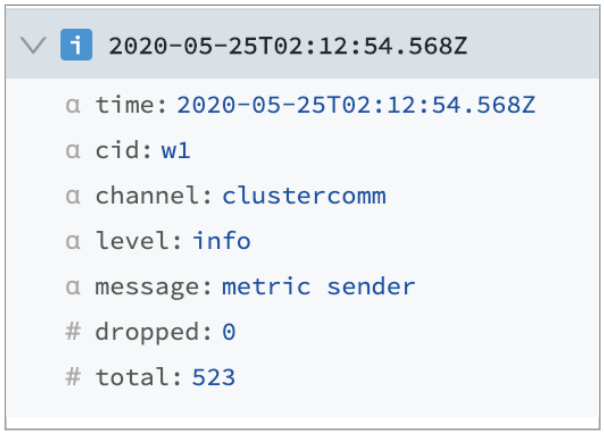

Log event details

Logging Settings

On Cribl Stream's Settings pages, you can adjust the level (verbosity) of internal logging data processed, per logging channel. You can also redact fields in customized ways. In a distributed deployment, you manage each of these settings per Worker Group.

Change Logging Levels

To adjust logging levels:

- In a single-instance deployment, select **Settings** > **System > Logging > Levels**.
- For the Leader Node's own logs, select **Settings** > **Global Settings** > **System > Logging > Levels**.
- In a distributed deployment, first select **Manage**, then click into the group you want to configure. Next, select **Group Settings** (or **Fleet Settings**) > **System > Logging > Levels**.

On the resulting **Manage Logging Levels** page, you can:

- Modify one channel by clicking its **Level** column. In the resulting drop-down, you can set a verbosity level ranging from **error** up to **debug**. (Top of composite screenshot below.)
- Modify multiple channels by selecting their check boxes, then clicking the **Change log level** drop-down at the bottom of the page. (Bottom of composite screenshot below.) You can select all channels at once by clicking the top check box. You can search for channels at top right.

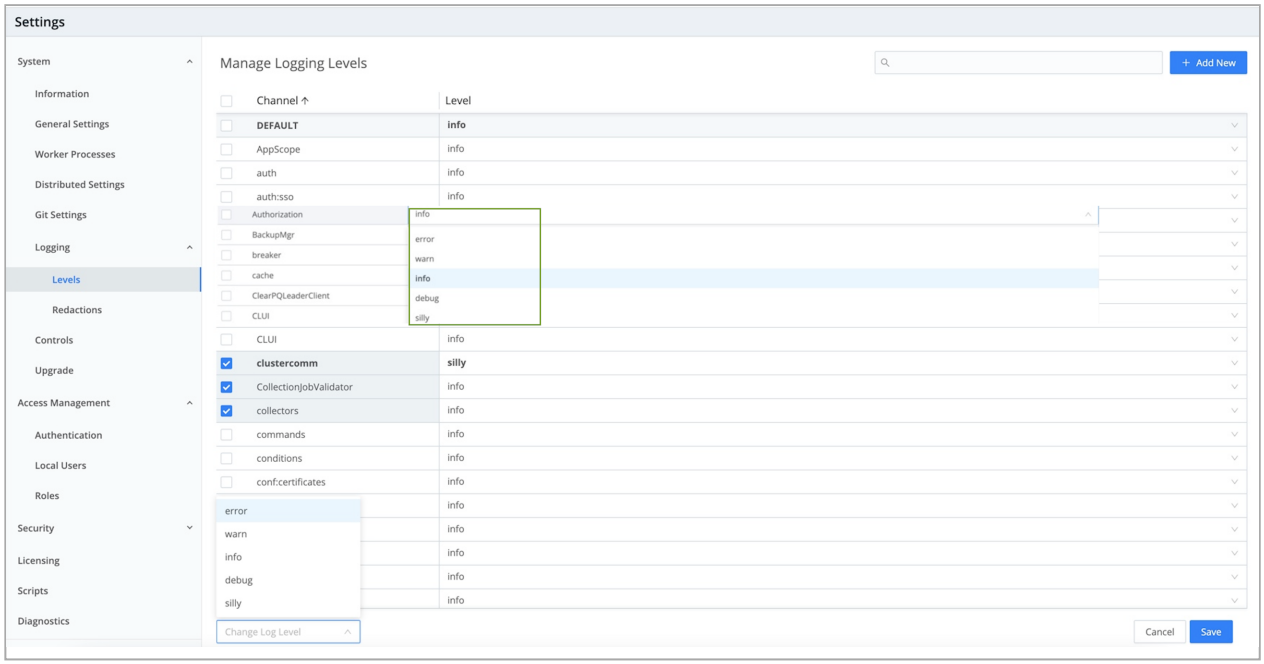

Manage Logging Levels page

> The `silly` (ultra-verbose) logging level is available for all channels. However, it provides additional metrics information only for inputs.

Change Logging Redactions

On the **Redact Internal Log Fields** page, you can customize the redaction of sensitive, verbose, or just ugly data within Cribl Stream's internal logs. To access these settings:

- In a single-instance deployment, select **Settings** > **System > Logging > Redactions**.
- In a single-instance deployment, or for the Leader Node's own logs, select **Settings** > **Global Settings** > **System > Logging > Redactions**.
- In a distributed deployment, first select **Manage**, then click into the group you want to configure. Next, select that group's **Group Settings** > **System > Logging > Redactions**.

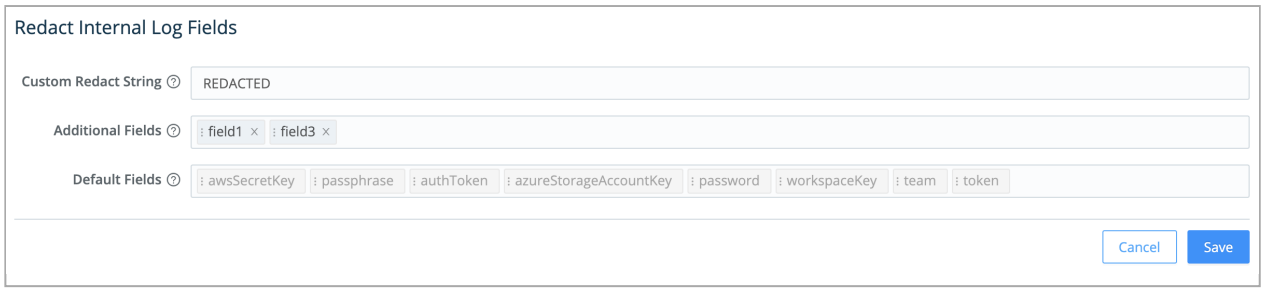

Redact Internal Log Fields page

It's easiest to understand the resulting **Redact Internal Log Fields** page's fields from bottom to top:

- **Default fields**: Cribl Stream always redacts these fields, and you can't modify this list to allow any of them through. However, you can use the two adjacent fields to define stricter redaction:
- **Additional fields**: Type or paste in the names of extra fields you want to redact. Use a tab or hard return to confirm each entry.
- **Custom redact string**: Unless this field is empty, it defines a literal string that will override Cribl Stream's default redaction pattern (explained below) on the affected fields.

Default Redact String

By default, Cribl Stream transforms this page's selected fields by applying the following redaction pattern:

- Echo the field value's first two characters.
- Replace all intermediate characters with a literal `...` ellipsis.
- Echo the value's last two characters.

Anything you enter in the **Custom redact string** field will override this default `??...??` pattern.

Health Endpoint

Each Cribl Stream instance exposes a `health` endpoint – typically used in conjunction with a Load Balancer – that you can use to make operational decisions.

HEALTH CHECK ENDPOINT	HEALTHY RESPONSE	CRIBL STREAM VERSION
`curl http(s)://<host>:<port>/api/v1/health`	`{"status":"healthy"}`	Through 2.4.3
`curl http(s)://<host>:<port>/api/v1/health`	`{"status":"healthy","startTime":1617814717110}` (see details below)	2.4.4 and later

Specifically, the `health` endpoint can return one of the following response codes:

- 200 – Healthy.
- 420 – Shutting down.
- 503 – HTTP engine reports server busy: too many concurrent connections (configurable).

In the above curl examples, `<port>` stands for the API port (by default, `9000`).

5.7.1. Internal Metrics

When sending Cribl Stream metrics to a metric system of analysis – such as InfluxDB, Splunk, or Elasticsearch – some metrics are particularly valuable. You can use these metrics to set up alerts when a Worker/Edge Node is having a problem, a Node is down, a Destination is down, a Source stops providing incoming data, etc.

Cribl Stream reports its internal metrics within the Cribl Stream UI, in the same way that it reports internal logs at **Monitoring** > **Logs** (Cribl Stream) and **Health** > **Logs** (Cribl Edge). To expose metrics for capture or routing, enable the **Cribl Internal** Source > **CriblMetrics** section.

By default, Cribl Stream generates internal metrics every 2 seconds. To consume metrics at longer intervals, you can use or adapt the `cribl-metrics_rollup` Pipeline that ships with Cribl Stream. Attach it to your **Cribl Internal** Source as a pre-processing Pipeline. The Pipeline's **Rollup Metrics** Function has a default **Time Window** of 30 seconds, which you can adjust to a different granularity as needed.

You can also use our public endpoints to automate monitoring using your own external tools.

Counter-type metrics in Cribl Stream do not monotonically increase or decrease. They are reset at the end of each reporting period. Cribl Stream does not report counters when their value is 0. For example, if there aren't any Destinations reporting dropped events then the `total.dropped_events` metric won't be reported because its value would be 0.

> **Breaking Changes**
>
> - The `ci` and `co` dimensions are deprecated as of Cribl Stream 4.1.2. See Dimensions for their replacements.
> - Disabled Sources no longer generate Cribl internal metrics as of Cribl Stream 4.2.

Total Throughput Metrics

Five important metrics below are prefixed with `total.` These power the top of Cribl Stream's **Monitoring** dashboard. The first two report on Sources, the remainder on Destinations.

- `total.in_bytes`
- `total.in_events`
- `total.out_events`

- `total.out_bytes`
- `total.dropped_events` – helpful for discovering situations such as: you've disabled a Destination without noticing.

Interpreting Total Metrics

These `total.` metrics' values could reflect Cribl Stream's health, but could also report low activity simply due to the Source system. E.g., logs from a store site will be low at low buying periods.

Also, despite the `total.` prefix, these metrics are each specific to the Worker/Edge Node Process that's generating them.

You can distinguish **unique** metrics by their `#input=<id>` dimension. For example, `total.in_events|#input=foo` would be one unique metric, while `total.in_events|#input=bar` would be another.

System Health Metrics

Five specific metrics are most valuable for monitoring system health. The first two are Cribl Stream composite metrics; the remaining three report on your hardware or VM infrastructure. Because the Cribl Internal Source does not export these metrics to Routes or Pipelines, you can obtain them only by using the REST endpoints listed on this page.

- `health.inputs`
- `health.outputs` – see the JSON Examples below for both `health.` metrics.
- `system.load_avg`
- `system.free_mem`
- `system.disk_used` – valuable if you know your disk size, especially for monitoring Persistent Queues. Here, a `0` value typically indicates that the disk-usage data provider has not yet provided the metric with data. (Getting the first value should take about one minute.)

All of the above metrics take these three values:

- `0` = green = healthy.
- `1` = yellow = warning.
- `2` = red = trouble.

Health Inputs/Outputs JSON Examples

The `health.inputs` metrics are reported per Source, and the `health.outputs` metrics per Destination. The `health.inputs` example below has two configured Sources, and two Cribl Stream-internal inputs. The `health.outputs` example includes the built-in `devnull` Destination, and six user-configured Destinations.

Given all the `0` values here, everything is in good shape!

```
"health.inputs": [
  { "model": { "input": "http:http" }}, "val": 0},
  { "model": { "input": "cribl:CriblLogs" }}, "val": 0},
  { "model": { "input": "cribl:CriblMetrics" }}, "val": 0},
  { "model": { "input": "datagen:DatagenWeblog" }}, "val": 0 }
  ],
"health.outputs": [
  { "model": { "output": "devnull:devnull" }}, "val": 0},
  { "model": { "output": "router:MyOut1" }}, "val": 0},
  { "model": { "output": "tcpjson:MyTcpOut1" }}, "val": 0},
  { "model": { "output": "router:MyOut2" }}, "val": 0},
  { "model": { "output": "tcpjson:MyTcpOut2" }}, "val": 0},
  { "model": { "output": "router:MyOut3" }}, "val": 0},
  { "model": { "output": "router:MyOut4" }}, "val": 0 }
  ],
```

Worker/Edge Node Resource Metrics

As of Cribl Stream (LogStream) 2.4.4, the Cribl Internal Source reports two useful metrics on individual Worker/Edge Node Processes' resource usage:

- `system.cpu_perc` – CPU percentage usage.
- `system.mem_rss` – RAM usage.

Persistent Queue Metrics

These metrics are valuable for monitoring Persistent Queues' behavior:

- `pq.queue_size` – Total bytes in the queue.
- `pq.in_bytes` – Total bytes in the queue for the given **Time Window**.
- `pq.in_events` – Number of events in the queue for the given **Time Window**.
- `pq.out_bytes` – Total bytes flushed from the queue for the given **Time Window**.
- `pq.out_events` – Number of events flushed from the queue for the given **Time Window**.

These are aggregate metrics. But you can distinguish unique metrics per queue Destination, using the `#output=<id>` dimension. For example, `pq.out_events|#output=kafka` would be one unique metric;

`pq.out_events|#output=camus` would be another.

Other Internal Metrics

The Cribl Internal Source emits other metrics that, when displayed in downstream dashboards, can be useful for understanding Cribl Stream's behavior and health. These include:

- `cribl.logstream.total.activeCxn` – Total active inbound TCP connections.
- `cribl.logstream.pipe.in_events` – Inbound events per Pipeline.
- `cribl.logstream.pipe.out_events` – Outbound events per Pipeline.
- `cribl.logstream.pipe.dropped_events` – Dropped events per Pipeline.
- `cribl.logstream.metrics_pool.num_metrics` – The total number of unique metrics that have been allocated into memory.
- `cribl.logstream.collector_cache.size` – Each Collector function (`default/cribl/collectors/<collector>/index.js`) is loaded/initialized only once per job, and then cached. This metric represents the current size of this cache.
- `cribl.logstream.cluster.metrics.sender.inflight` – Number of metric packets currently being sent from a Worker/Edge Node Process to the API Process, via IPC (interprocess communication).
- `cribl.logstream.backpressure.outputs` – Destinations experiencing backpressure, causing events to be either blocked or dropped.
- `cribl.logstream.blocked.outputs` – Blocked Destinations. (This metric is more restrictive than the one listed just above.)
- `cribl.logstream.pq.queue_size` – Current queue size in bytes, per Destination, per Worker/Edge NodeProcess.
- `cribl.logstream.host.in_bytes` – Inbound bytes from a given host (host is a characteristic of the data).
- `cribl.logstream.host.in_events` – Inbound events from a given host (host is a characteristic of the data).
- `cribl.logstream.host.out_bytes` – Outbound bytes from a given host (host is a characteristic of the data).
- `cribl.logstream.host.out_events` – Outbound events from a given host (host is a characteristic of the data).
- `cribl.logstream.route.in_bytes` – Inbound bytes per Route.
- `cribl.logstream.route.in_events` – Inbound events per Route.
- `cribl.logstream.route.out_bytes` – Outbound bytes per Route.
- `cribl.logstream.route.out_events` – Outbound events per Route.
- `cribl.logstream.sourcetype.in_bytes` – Inbound bytes per sourcetype.

- `cribl.logstream.sourcetype.in_events` – Inbound events per sourcetype.
- `cribl.logstream.sourcetype.out_bytes` – Outbound bytes per sourcetype.
- `cribl.logstream.sourcetype.out_events` – Outbound events per sourcetype.

Dimensions

Cribl Stream internal metrics have extra dimensions. These include:

- `cribl_wp` – Identifies the Worker/Edge Node Process that processed the event.
- `event_host` – Machine's hostname from which the event was made.
- `event_source` – Set as `cribl`.
- `group` – Name of Cribl Worker Group from which the event was made.
- `input` – Entire **Input ID**, including the prefix, from which the event was made.
- `output` – Entire **Output ID**, including the prefix, from which the event was made.
- `ci` – Deprecated; use `input` instead. Cribl plans to drop support for this dimension after version 4.x.
- `co` – Deprecated; use `output` instead. Cribl plans to drop support for this dimension after version 4.x.

> The `ci` and `co` (duplicate) dimensions are deprecated as of Cribl Stream 4.1.2, and will be removed in a future version. Where any of your code relies on these dimensions, Cribl recommends that you promptly substitute their respective replacements, `input` and `output`. This applies to relevant Cribl Functions and Pipelines, dashboards in downstream services, etc.

Controlling Metrics

You can control the volume of internal metrics that Cribl Stream emits by adjusting Metrics Limits, which you access as follows:

- Distributed deployments: [Select a Worker Group] > **Group/Fleet Settings** > **System** > **General Settings** > **Limits** > **Metrics**.
- Single-instance deployments: **Settings** > **Global Settings** > **System** > **General Settings** > **Limits** > **Metrics**.

Here, you can adjust metrics' cardinality, metrics to always include (**Metrics never-drop list**), metrics to never include (**Disable field metrics**), and other options.

Here's how these controls look in Cribl Stream:

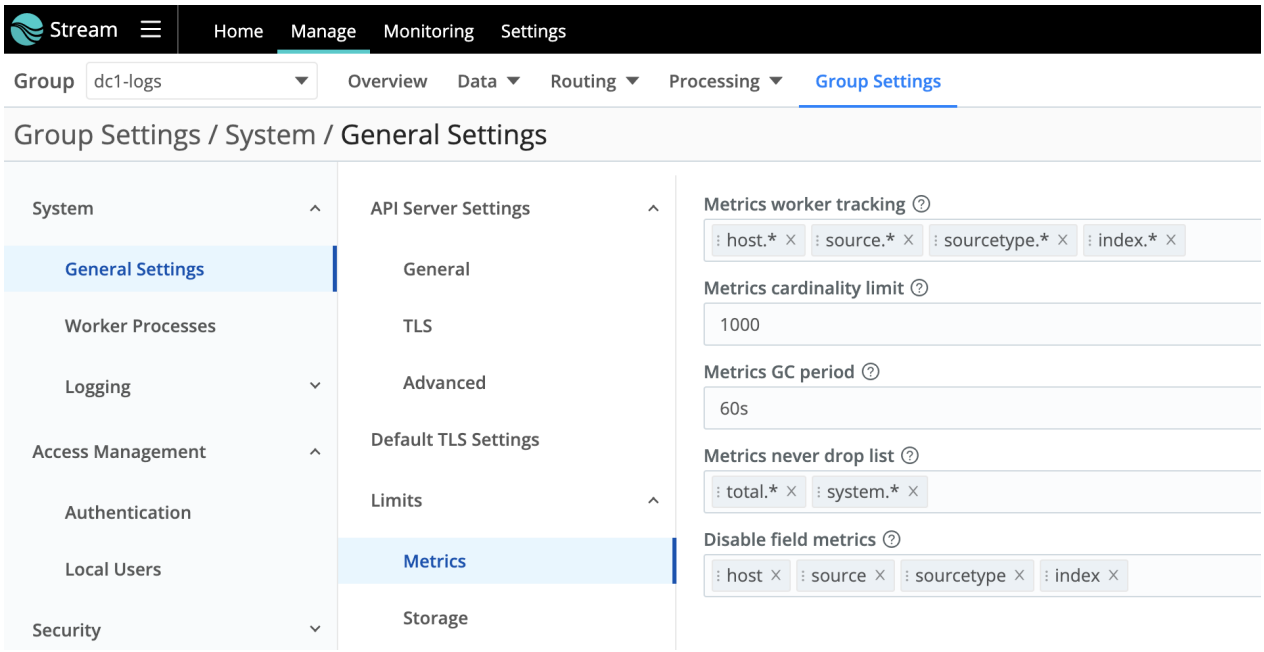

Metrics settings for Cribl Stream Worker Groups

They're somewhat different in Cribl Edge – the next section for an explanation:

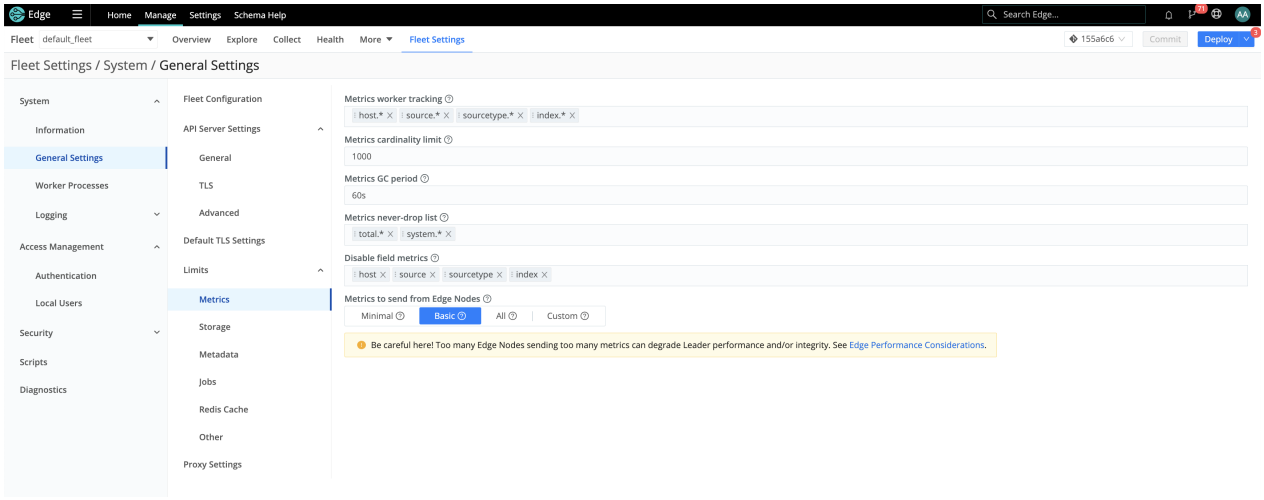

Metrics settings for Cribl Edge Fleets

Controlling Metrics in Cribl Edge

Cribl Edge lets you choose what metrics each Fleet sends to its Leader Node. Your goal should be to collect the metrics most important to you, within the limits of the Leader's capacity to process them. This is a matter of balancing Fleet cardinality and Leader performance, as explained in the Deployment Planning topic.

Use the **Metrics to send from Edge Nodes** buttons to select one of the metrics sets listed in the table below.

SET	PURPOSE	LIST OF METRICS SENT
Minimal	Send metrics for events and bytes in and out. Recommended for high-cardinality deployments.	Sent as aggregate totals per Fleet: `total.in_events`, `total.out_events`, `total.in_bytes`, `total.out_bytes` excluding metrics that are coming from Sources or Destinations directly.

Basic (default)	Send metrics required to display all monitoring data available in the Edge UI. Contains all the metrics in the Minimal set, and more.	Sent as aggregate totals per Source/Destination:
		
		`total.in_events`, `total.out_events`, `total.in_bytes`, `total.out_bytes`.
		
		Also, Sent as aggregate totals per Source:
		
		`health.inputs`
		
		Sent as aggregate totals per Destination:
		
		`health.outputs`
		
		Sent as aggregate totals per Route:
		
		`route.in_events`, `route.in_bytes`, `route.out_events`, `route.out_bytes`, `route.dropped_events`
		
		Sent as aggregate totals per Pipeline:
		
		`pipe.in_events`, `pipe.out_events`, `pipe.dropped_events`
		
		Sent as aggregate totals per Pack:
		
		`pack.in_events`, `pack.out_events`, `pack.err_events`, `pack.dropped_events`

All	Send all metrics with no filtering.	All metrics without filtering, including **Basic**, plus Worker/Edge Node Resource Metrics, Persistent Queue Metrics, and Other Internal Metrics.
Custom	Send a customized set of metrics.	All metrics that match a JavaScript expression that you define, plus the metrics in the **Minimal** set.

Every Edge Fleet always sends the **Minimal** metrics; selecting one of the other options only adds more metrics.

Choosing the **Minimal** metrics set has the following effects in the Edge UI:

- Only one UI page, **Manage** > **Overview** > **Monitor**, will be fully populated. For the metrics that the **Minimal** set excludes, other pages will show zero values. This applies to the **Manage** > **Health** pages for **Sources**, **Destinations**, **Routes**, **Pipelines**, and **Packs**.
- In the **Manage** > **More** pages for **Sources** and **Destinations**, the health indicators in the tile and list views do not function when you select the **Minimal** set. Rather than red, green, or gray, they'll always show white, because the relevant metrics, `health.inputs` and `health.outputs`, will not be sent to the Leader.

The simplest form of a **Custom** set just specifies additional desired metrics by name, using an expression of the form: `name === metric.name`. Among the most useful metrics to consider adding are `system.load_avg`, `system.free_mem`, `system.disk_used`, `system.cpu_perc`, and `system.mem_rss`.

Other Metrics Endpoints

Below is basic information on using the `/system/metrics` endpoint, the `/system/info` endpoint, and the `cribl_wp` dimension.

`/system/metrics` Endpoint

`/system/metrics` is Cribl Stream's primary public metrics endpoint, which returns most internal metrics. Note that many of these retrieved metrics report configuration only, not runtime behavior. For details, see our API Docs.

`/system/info` Endpoint

`/system/info` generates the JSON displayed in the Cribl Stream UI at **Settings** > **Global Settings** > **Diagnostics > System Info**. Its two most useful properties are `loadavg` and `memory`.

`loadavg` Example

```
"loadavg": [1.39599609375, 1.22265625, 1.31494140625],
```

This property is an array containing the 1-, 5-, and 15-minute load averages at the UNIX OS level. (On Windows, the return value is always `[0, 0, 0]`.) For details, see the Node.js os.loadavg() documentation.

`memory` Example

```
"memory": { "free": 936206336, "total": 16672968704 },
```

Divide `total` / `free` to monitor memory pressure. If the result exceeds 90%, this indicates a risky situation: you're running out of memory.

`cpus` Alternative

The `cpus` metric returns an array of CPU/memory key-value pairs. This provides an alternative way to understand CPU utilization, but it requires you to query all your CPUs individually.

5.7.2. Internal Logs

Distributed deployments emit a larger set of logs than single-instance deployments. We'll describe the full set first.

Leader Node Logs (Distributed)

The `API/main` process emits the following logs into the Leader Node's `$CRIBL_HOME/log/` directory.

LOGFILE NAME	DESCRIPTION	EQUIVALENT ON LOGS PAGE
`cribl.log`	Principal log in Cribl Stream. Includes telemetry/license-validation logs. Corresponds to top-level `cribl.log` on Diag page.	**Leader** > **API Process**
`access.log`	API calls, e.g., `GET /api/v1/version/info`.	**Leader** > **Access**
`audit.log`	Actions pertaining to files, e.g., `create`, `update`, `commit`, `deploy`, `delete`.	**Leader** > **Audit**
`notifications.log`	Messages that appear in the notification list in the UI.	**Leader** > **Notifications**
`ui-access.log`	Interactions with different UI components described as URLs, e.g., `/settings/apidocs`, `/dashboard/logs`.	**Leader** > **UI Access**

The `API/main` process emits the following service logs into the Leader Node's `$CRIBL_HOME/log/service/` directory. Each service includes a `cribl.log` file that logs the service's internal telemetry and an `access.log` file that logs which API calls the service has handled.

SERVICE NAME	DESCRIPTION	EQUIVALENT ON LOGS PAGE
Connections Service	Handles all worker connections and communication, including heartbeats, bundle deploys, teleporting, restarting, etc. Workers are assigned to connection processes using a round-robin algorithm.	**Leader** > **Connections Service**
Lease Renewal Service	Handles lease renewal for the primary Leader Node.	**Leader** > **Lease Renewal Service**
Metrics Service	Handles in-memory metrics, merging of incoming packets, metrics persistence and rehydration, and UI queries for metrics.	**Leader** > **Metrics Service**

SERVICE NAME	DESCRIPTION	EQUIVALENT ON LOGS PAGE
Notifications Service	Triggers notifications based on its configuration.	**Leader** > **Notifications Service**

The Config Helper process for each Worker Group/Fleet emits the following log in `$CRIBL_HOME/log/group/GROUPNAME`.

LOGFILE NAME	DESCRIPTION	EQUIVALENT ON LOGS PAGE
`cribl.log`	Messages about config maintenance, previews, etc.	**GROUPNAME** > **Config helper**

Worker/Edge Node Logs (Distributed)

The API Process emits the following log in `$CRIBL_HOME/log/`.

LOGFILE NAME	DESCRIPTION	EQUIVALENT ON LOGS PAGE
`cribl.log`	Messages about the Worker/Edge Node communicating with the Leader Node (i.e., with its API Process) and other API requests, e.g., sending metrics, reaping job artifacts.	**GROUPNAME** > **Worker:HOSTNAME** > **API Process**

Each Worker Process emits the following log in `$CRIBL_HOME/log/worker/N/`, where `N` is the Worker/Edge Node Process ID.

LOGFILE NAME	DESCRIPTION	EQUIVALENT ON LOGS PAGE
`cribl.log`	Messages about the Worker/Edge Node processing data.	**GROUPNAME** > **Worker:HOSTNAME** > **Worker Process N**

For convenience, the UI aggregates the Worker/Edge Node Process logs as follows.

LOGFILE NAME	DESCRIPTION	EQUIVALENT ON LOGS PAGE
N/A	Aggregation of all the `Worker Process N` logs and the API Process log.	**GROUPNAME** > **WORKER_NAME**

Single-Instance Logs

The `API/main` process emits the same logs that it does for a distributed deployment, in `$CRIBL_HOME/log/`:

- `cribl.log`
- `access.log`
- `audit.log`
- `notifications.log`
- `ui-access.log`

Each Worker/Edge Node Process emits the following log in `$CRIBL_HOME/log/worker/N/`, where `N` is the Worker/Edge Node Process ID.

LOGFILE NAME	DESCRIPTION	EQUIVALENT ON LOGS PAGE
`cribl.log`	Messages about the Worker/Edge Node processing data.	**GROUPNAME** > **Worker:HOSTNAME** > **Worker Process N**

`_raw stats` Event Fields

Each Worker/Edge Node Process logs this information at a 1-minute frequency. So each event's scope covers only that Worker/Edge Node Process, over a 1-minute time span defined by the `startTime` and `endTime` fields.

Sample Event


```
{"time":"2022-11-
17T16:54:05.349Z","cid":"w0","channel":"server","level":"info","message":"_raw
stats","inEvents":307965,"outEvents":495848,"inBytes":52756162,"outBytes":83028013,"star
ttime":1668703980,"endtime":1668704040,"activeCxn":0,"openCxn":0,"closeCxn":0,"rejectCxn
":0,"abortCxn":0,"pqInEvents":62000,"pqOutEvents":114591,"pqInBytes":12163896,"pqOutByte
s":22481509,"pqTotalBytes":480467058,"droppedEvents":0,"tasksStarted":6,"tasksCompleted"
:6,"activeEP":9,"blockedEP":0,"cpuPerc":101.09,"eluPerc":97.81,"mem":
{"heap":277,"ext":46,"rss":453}}
```


Field Descriptions

FIELD	DESCRIPTION
`inEvents`	Number of events received from all inputs after Event Breakers are applied. This can be larger than `outEvents` if events are dropped via Drop, Aggregation, Suppression, Sampling, or similar Functions.
`outEvents`	Number of events sent out to all Destinations. This can be larger than `inEvents` due to creating event clones or entirely new unique events. (E.g., when using the Aggregation Function.)
`inBytes`	Number of bytes received from all Sources (based only off `_raw`).
`outBytes`	Number of bytes sent to all Destinations (based only off `_raw`).
`startTime`	The beginning of the timespan represented by these metrics.
`endTime`	The end of the timespan represented by these metrics. (Will always be 60 seconds after `startTime`.)
`activeCxn`	Number of TCP connections newly opened at the time the `_raw` stats are logged. (This is a gauge when exported in internal metrics, and can otherwise be ignored as an instantaneous measurement. Only some application protocols count toward this; e.g., any HTTP-based Source does not count.)
`openCxn`	Same as `activeCxn`, but tracked as a counter rather than a gauge. So `openCxn` will show all connections newly opened each minute, and is more accurate than using `activeCxn`.
`closeCxn`	Number of TCP connections that were closed.
`pqInEvents`	Number of events that were written to Persistent Queues, across all Destinations.
`pqOutEvents`	Number of events that were flushed from Persistent Queues, across all Destinations.
`pqInBytes`	Number of bytes that were written to Persistent Queues, across all Destinations.
`pqOutBytes`	Number of bytes that were flushed from Persistent Queues, across all Destinations.
`pqTotalBytes`	Amount of data currently stored in Persistent Queues, across all Destinations.
`droppedEvents`	This is equivalent to the `total.dropped_events` metric. Drops can occur from Pipeline Functions, from Destination Backpressure, or from other errors. Any event not sent to a Destination is considered dropped.
`activeEP`	Number of currently active event processors (EPs). EPs are used to process events through Breakers and Pipelines as the events are received from Sources and sent to destinations. EPs are typically created per TCP connection (such as for HTTP).
`blockedEP`	Number of currently blocked event processors (caused by blocking Destinations).
`cpuPerc`	CPU utilization from the combined user and system activity over the last 60 seconds.

FIELD	DESCRIPTION
`eluPerc`	Event loop utilization. Represents the percentage of time over the last 60 seconds that the NodeJS runtime spent processing events within its event loop.
`mem.heap`	Heap section of process memory, in MB.
`mem.ext`	External section of process memory, in MB.
`mem.rss`	Resident set size section of process memory, in MB.
`tasksStarted`	The number of tasks the process started for all collection jobs for which it was executing tasks.
`tasksCompleted`	The number of tasks the process has started and completed for all collection jobs for which it was executing tasks.

5.8. Notifications

In Cribl Stream (LogStream) 3.1 or later, and all Cribl Edge versions, you can configure Notifications about:

- Sources and Collectors that report abnormally high or low data flow rates.
- Sources and Collectors that report no data flow.
- Destinations that report errors.
- Destinations experiencing backpressure.
- Pending expiration of a Cribl Stream license.

Notifications are not designed to take the place of alerts on your overall infrastructure's health – but they warn you about conditions that could impede expected data flow into and out of Cribl Stream.

> Notifications require an Enterprise or Standard license, without which the configuration options described below will be hidden or disabled in Cribl Stream's UI.

Notifications and Targets

Every Notification is sent to one or more **targets**. By default, any Notification that you configure will have a target of `System Messages`. This means that when a Notification is triggered, it will add an indicator on the top nav's **Messages** button. Click this button to view details in the **Messages** drawer.

All Notifications will also be sent as events to Cribl Stream's internal logs – both application-wide, and with a filtered view available on affected Sources and Destinations. The application-wide logs are recorded as `notifications.log` on the Leader Node. The Leader Node is also responsible for sending all Notifications.

You can also send any Notification to additional targets, using Cribl Stream's native PagerDuty integration and/or by specifying custom webhooks. For details, see Configuring Targets.

Notifications and RBAC

Notifications work with Cribl Stream's role-based access control. For users with non-administrative permissions, their assigned Roles and Policies determine the Worker Groups on which they can view Notification messages, and can create and manage Notifications and targets

Configuring Notifications

Destination-state, Source-/Collector-state, and license-expiration Notifications are configured separately.

Destination-State Notifications

On individual Destinations, you can configure Notifications that will trigger under these conditions:

- Destination Backpressure Activated
- Persistent Queue Usage
- Unhealthy Destination

Read on for details about the above conditions, and about how to specify them in a Destination's **Condition** drop-down.

Destination Backpressure Activated

This will generate a Notification reading `Backpressure (<blocking|dropping>) is engaged for Destination <name>` when one of the following events occur:

- The Destination's **Backpressure behavior** is set to `Block` or `Drop`, and backpressure causes outgoing events to block or drop.
- The Destination's **Backpressure behavior** is set to Persistent Queue, but its **Queue-full behavior** is set to either `Block` or `Drop new data`; and a filled queue causes outgoing events to block or drop.

The threshold for the Notification to trigger is: Cribl Stream detected a blocked or dropped state during ≥ 5% of the trailing **Time window** that you configure in the Notification Settings below.

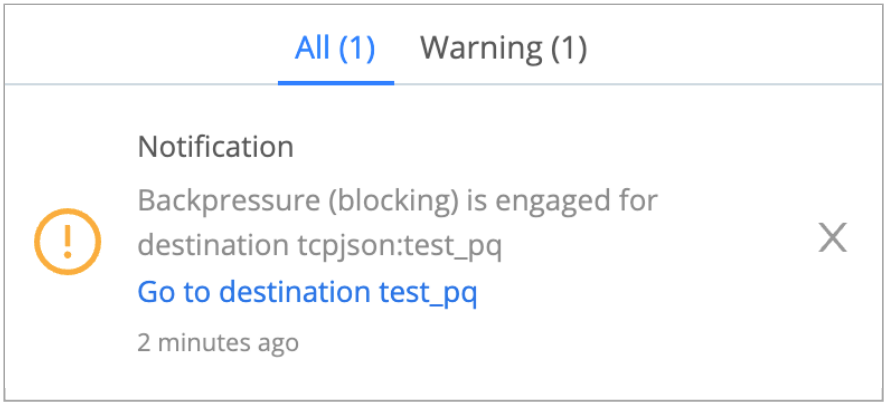

Backpressure notification

Persistent Queue Usage

This will generate a `Persistent Queue usage has surpassed <threshold>%` Notification when PQ files accumulate past the `<threshold>` percentage of capacity that you set in the **Usage threshold** field.

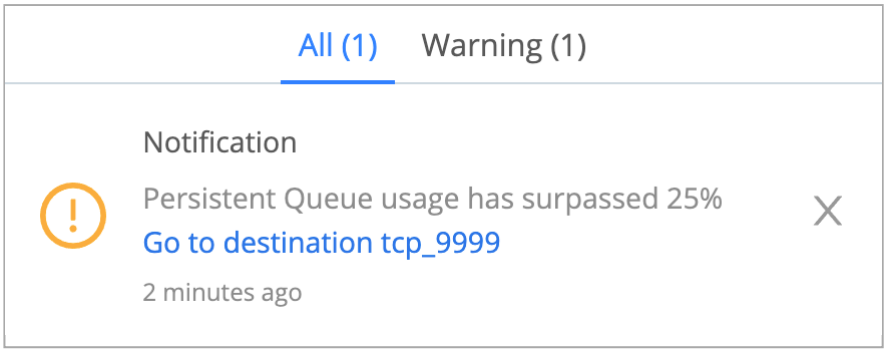

Persistent Queue notification

Unhealthy Destination

This will generate a `Destination <name> is unhealthy` Notification when the Destination's health has been in "red" status (as indicated on the UI's Monitoring page) over the trailing **Time window** that you configure in the Notification Settings below.

The algorithm has slight variations among Destination types, but red status generally means that ≥ 5% of health checks, aggregated over the **Time window**, reported either:

- An error inhibiting the Destination's normal operation, such as a connection error; or
- For multiple-output Destinations like Splunk Load Balanced or Output Router, > 50% of the Destination senders in an error state.

Configuring Destination Notifications

To start configuring a Destination-state Notification:

1. Configure and save the Destination.
2. Access this Destination's **Notifications** tab. Either:
    - Click the **Notifications** button on the **Manage...Destinations** page's appropriate row, or
    - Reopen the Destination's config modal, and click its **Notifications** tab.
3. Click **Add Notification** to access the **New Notification** modal shown below.

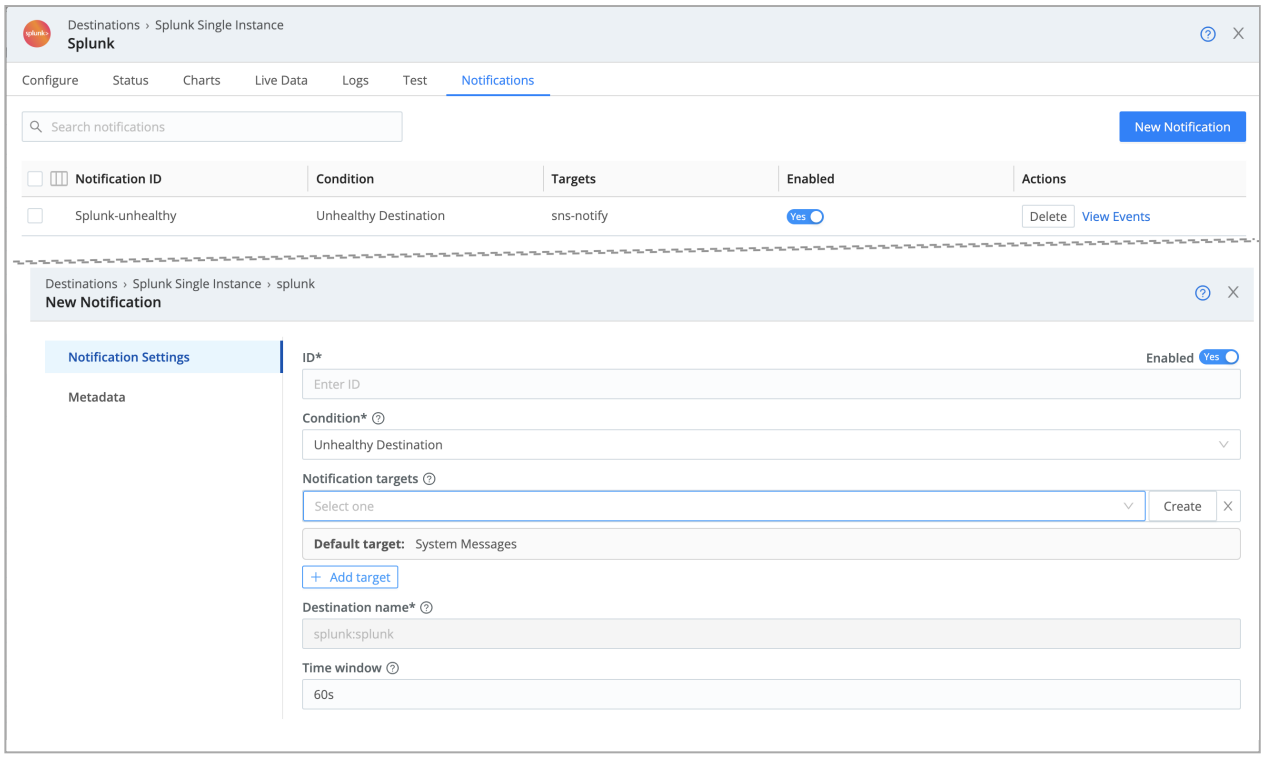

Configuring a Destination Notification (composite screenshot)

The **New Notification** modal provides Notification Settings and Metadata tabs, whose controls are listed in the respective sections below.

Notification Settings

ID: Enter a unique ID for this Notification. (Cribl recommends using a string that will make the Notification's purpose clear.)

Condition: Select either `Unhealthy Destination` or `Destination Backpressure Activated`. (You can set triggers for both conditions on the same Destination, but you must configure them as separate Notifications.)

Notification targets: The **Default target** is always locked to `System Messages`. Click **Add target** to send this Notification to additional targets. You can add multiple targets.

- Use the resulting **Notification targets** drop-down to select any target you've already configured.
- Click **Create** to configure a new target. (See Configuring Targets for details.)

Destination name: This is locked to the Destination on which you're setting this Notification.

Time window: Sets the threshold period before the Notification will trigger. E.g., the default `60s` will generate a Notification when the Destination has reported the trigger condition over the past 60 seconds.

(For % trigger conditions, see Destination Backpressure Activated and Unhealthy Destination.) To enter alternative numeric values, append units of `s` for seconds, `m` for minutes, `h` for hours, etc.

Usage threshold: This percentage setting is displayed only when you've set the **Condition** to Persistent Queue Usage.

Metadata

Click **Add field** here to add custom metadata fields to your Notifications, as key-value pairs:

Name: Enter a name for this custom field.

Value: Enter a JavaScript expression that defines this field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

> Once you've saved your Notification, you can see Notification events specific to this Destination on the Destination config modal's **Events** tab. (When you set Source-state Notifcations, a corresponding **Events** tab is available on Sources' and Collectors' config modals.) For a comprehensive view of all Notification events, see the systemwide Events Tab.

Recurrence/Expiration

If a Destination-State Notification's trigger condition persists beyond your configured Time window, expect a new notification to be sent once per **Time window** interval.

Notifications will cease when the triggering condition clears. There is no explicit "problem cleared" Notification.

Source-State Notifications

In Cribl Stream 3.5 and above, you can configure Notifications on Sources and Collectors to trigger under these conditions:

- High Data Volume
- Low Data Volume
- No Data

You configure these similarly to Destination Notifications: Select the Notification type from the **Condition** drop-down. Each type exposes additional fields, as outlined below.

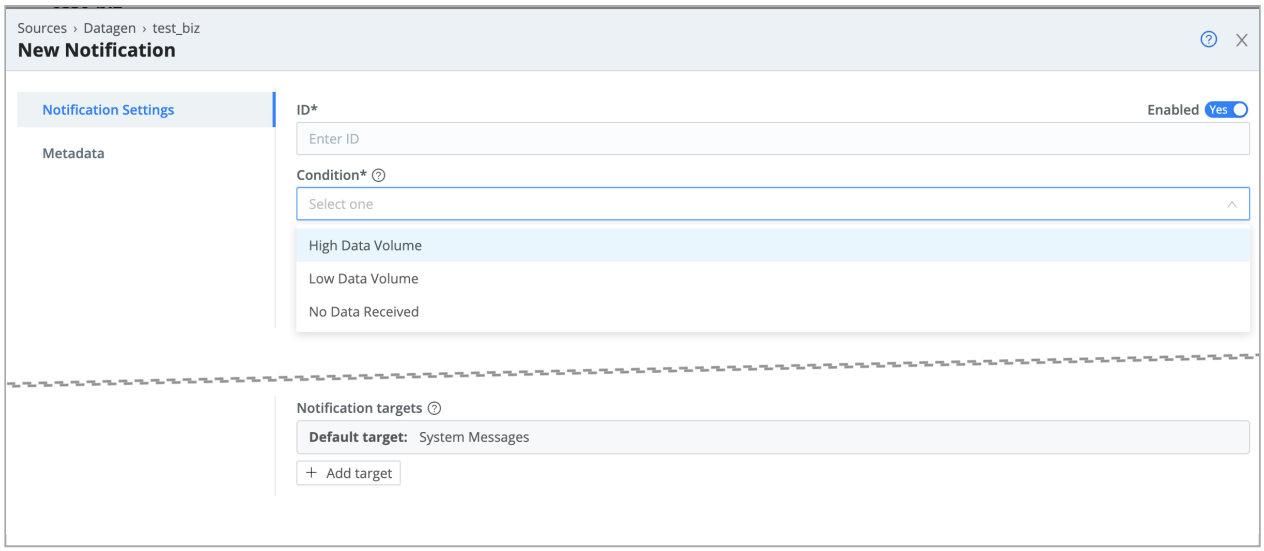

Configuring a High Data Volume Notification (composite screenshot)

High Data Volume

Select the `High Data Volume` Condition to trigger Notifications when incoming data over your configured **Time window** exceeds your configured **Data volume** threshold. This selection exposes the following fields:

Notification targets: As with Destination-State Notifications, the **Default target** is always locked to `System Messages`. Click **Add target** to send this Notification to additional targets. You can add multiple targets.

- Use the resulting **Notification targets** drop-down to select any target you've already configured.
- Click **Create** to configure a new target. (See Configuring Targets for details.)

Source name: This is locked to the Source on which you're setting this Notification.

Time window: As with the corresponding field on Destination-State Notifications, this field's value sets the threshold period before the Notification will trigger. The default `60s` will generate a Notification when the Source has reported the trigger condition over the past 60 seconds. To enter alternative numeric values, append units of `s` for seconds, `m` for minutes, `h` for hours, etc.

Data volume: Enter the threshold above which a Notification will trigger. Accepts numerals with units like KB, MB, etc. (e.g.: 4GB).

Low Data Volume

Select the `Low Data Volume` Condition to trigger Notifications when incoming data over your configured **Time window** is lower than your configured **Data volume** threshold.

This selection exposes the same additional fields as High Data Volume, except that here, the **Data volume** value defines a **floor** below which the Notification will trigger.

No Data

Select the `No Data Received` Condition to trigger Notifications when the Source or Collector ingests zero data over your configured **Time window**.

This selection exposes the same additional fields as High Data Volume, except (for obvious reasons) it omits the **Data volume** field – there is no threshold, because this is a binary condition.

License-Expiration Notifications

To prevent interruptions in data throughput, you can configure a Notification that will be triggered two weeks before your Cribl Stream paid license expires, and then again upon expiration. (If the two-week Notification is cleared from the **Messages** tab between those dates, but the license has not been extended, it will trigger again.)

Configuring License-Expiration Notifications

1. From the top nav, select **Manage** > **Settings** > **Licensing**.
2. Click **Add expiration notification** to access the **New Notification** modal shown below.

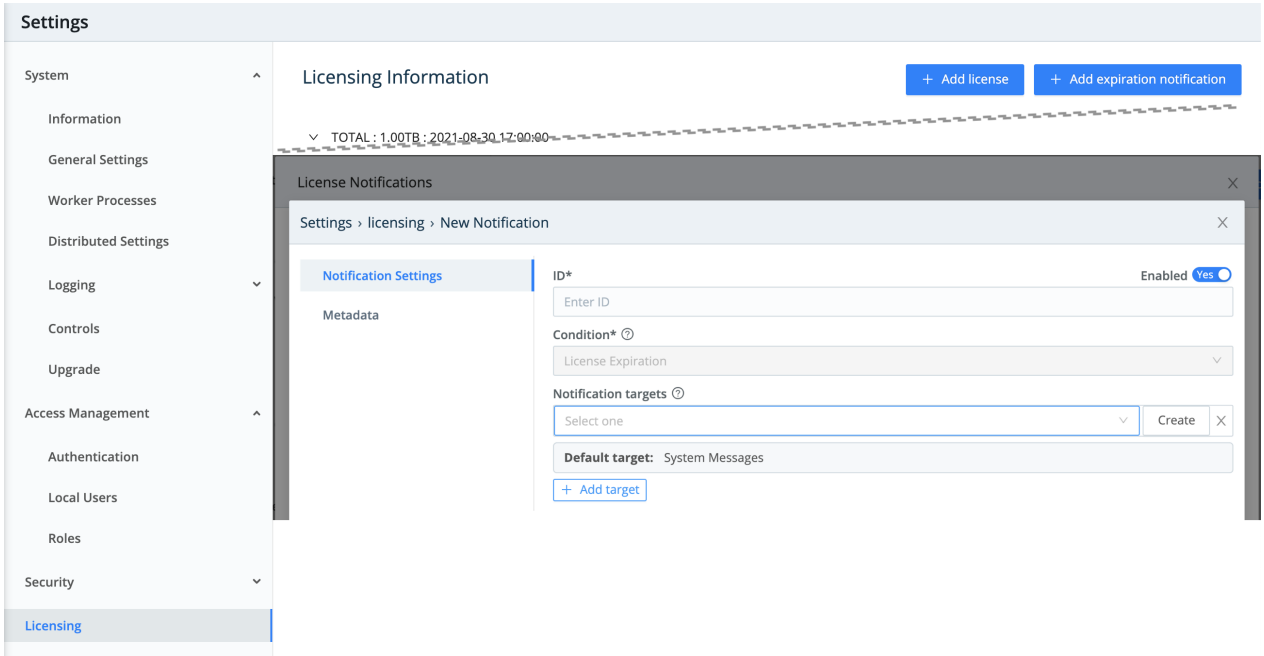

Configuring an expiration Notification (composite screenshot)

This **New Notification** modal provides Notification Settings and Metadata tabs, with a subset of the controls available in the Destination-unhealthy modal:

Notification Settings

ID: Enter a unique ID for this Notification.

Condition: This modal's triggering condition is locked to `License Expiration`.

Notification targets: The **Default target** is always locked to `System Messages`. Click **Add target** for each additional target that you want to send this Notification to.

- Use the resulting **Notification targets** drop-down to select any target you've already configured.
- Click **Create** to configure a new target. See Configuring Targets for details.

Metadata

The options here are identical to those on the Destination-unhealthy modal's **Metadata** tab.

Managing Notifications

The **Notifications** page provides global display and controls for all your configured Notifications, targets, and triggered Events – across all Sources, Collectors, Destinations, and all Worker Groups. To access this page: From the top nav, select **Manage** > **Notifications**.

Notifications Tab

This tab lists all your configured Source-state and Destination-unhealthy Notifications, across all integrations, along with any configured license-expiration Notifications. You can't create new Notifications here, but you can disable or delete existing Notifications; you can also click on any Notification's row to open and modify its configuration.

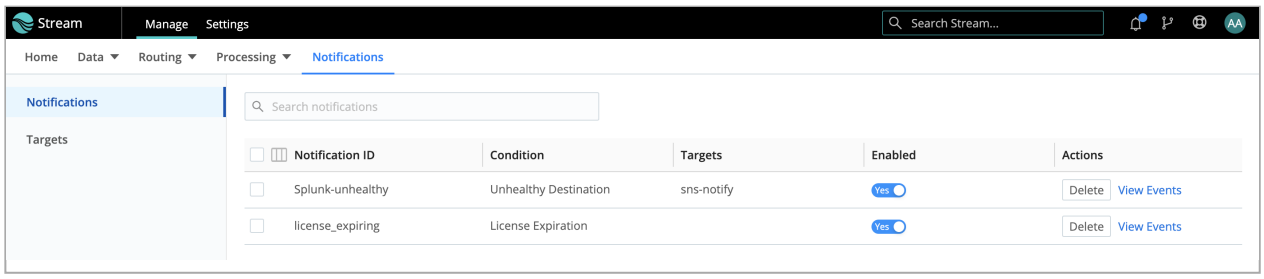

Notifications tab

Targets Tab

This tab is where you centrally configure and manage targets that are available across Cribl Stream – to all Source-, Destination-, and license-based Notifications. See Configuring Targets for details.

Events Tab

This tab displays logged events that have been fired by all your configured Notifications. You can filter by search string, and by lookback time.

What's Next

In future Cribl Stream releases, Cribl plans to expand the Notifications feature with options to configure additional triggering conditions and time resolutions.

5.8.1. Configuring Targets

To add a new Notification target from the Manage Notifications page's **Targets** tab:

1. Click **Add Target** to open the **New Target** modal shown below.
2. Give this target a unique **Target ID**.
3. Set the **Target type** to either PagerDuty or Webhook. Then configure the target according to the corresponding section below.

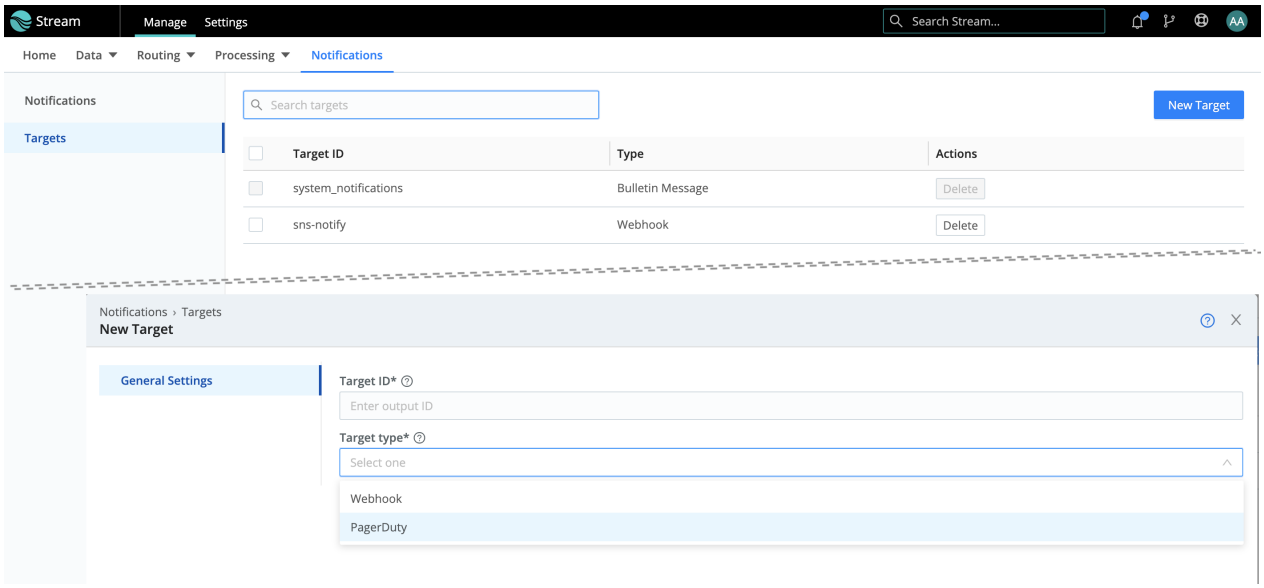

Adding a new target (composite screenshot)

> Notifications require an Enterprise or Standard license, without which all the target configuration options described on this page will be hidden or disabled in Cribl Stream's UI.

PagerDuty Targets

This option sends Cribl Stream Notifications to PagerDuty, a real-time incident response platform, using Cribl Stream's native integration with the PagerDuty API. Select **Target type**: `PagerDuty` to expose the following additional options on the modal's (single) **General Settings** left tab:

Routing key: Enter your 32-character Integration key on a PagerDuty service or global ruleset.

Group: Optionally, specify a PagerDuty default group to assign to Cribl Stream Notifications.

Class: Optionally, specify a PagerDuty default class to assign to Cribl Stream Notifications.

Component: Optionally, a PagerDuty default component value to assign to Cribl Stream Notification. (This field is prefilled with `logstream`.)

Severity: Set the default message severity for events sent to PagerDuty. Defaults to `info`; you can instead select `error`, `warning`, or `critical`. (Will be overridden by the `__severity` value, if set.)

Webhook Targets

With this option, you can send Cribl Stream Notifications to an arbitrary webhook. Select **Target type**: `Webhook` to expose multiple left tabs, with the following configuration options:

General Settings

The added options that appear on this first left tab are:

URL: The endpoint that should receive Cribl Stream Notification events.

> To proxy outbound HTTP/S requests, see System Proxy Configuration.

Method: Select the appropriate HTTP verb for requests: `POST` (the default), `PUT`, or `PATCH`.

Format: Specifies how to format Notification events before sending them to the endpoint. Select one of the following:

- `NDJSON` (newline-delimited JSON, the default).
- `JSON Array`.
- `Custom`, which exposes these additional fields:
  - **Source expression**: JavaScript expression whose evaluation shapes the event that Cribl Stream sends to the endpoint. E.g.: `notification=${_raw}`. For other fields you can use, see Expression Fields. If empty, Cribl Stream will send the full notification event as stringified JSON.
  - **Drop when null**: Toggle to `Yes` if you want to drop events where the above **Source expression** evaluates to `null`.
  - **Content type**: Defaults to `application/x-ndjson`. You can substitute a different content type for requests sent to the endpoint. This entry will be overridden by any content types set in this modal's **Advanced Settings** tab > **Extra HTTP Headers** section.

Authentication

Select one of the following options for authentication:

- **None**: Don't use authentication.
- **Auth token**: Use HTTP token authentication. In the resulting **Token** field, enter the bearer token that must be included in the HTTP authorization header.
- **Basic**: In the resulting **Username** and **Password** fields, enter HTTP Basic authentication credentials.

Processing Settings

The options on this left tab are identical to those on the Webhook Destination's **Processing Settings** tab, with two exceptions:

- The default **System fields** entry here is `cribl_host`.
- You cannot specify a post-processing Pipeline here.

Advanced Settings

The options on this left tab are identical to those on the Webhook Destination's **Advanced Settings** tab.

Expression Fields

When building the Source expression, you can use the following fields:

Fields Common to All Notification Types

- `starttime`: Beginning of the time bucket where this condition was reported. All Notifications have this.
- `endtime`: End of the time bucket where this condition was reported. All Notifications have this.
- `_time`: Timestamp when this Notification was created. All Notifications have this.
- `cribl_host`: Hostname of the (physical or virtual) machine on which this Notification was created. All Destination and Source Notifications have this.
- `cribl_notification`: Configured name/ID of this Notification. All Destination and Source Notifications have this.
- `origin_metadata`: Object containing metadata about the Notification's origin, with the following fields for all Destination Notifications:
  - `type`: "output".
  - `id`: ID of the affected Destination.

    - `subType`: Destination's type (where applicable).
- `origin_metadata`: Object containing metadata about the Notification's origin, with the following fields for all Source Notifications:
    - `type`: "input".
    - `id`: ID of the affected Source.
    - `subType`: Source's type (where applicable).

Unhealthy Destination

- `health`: Numeric value where `0`=green, `1`=yellow, `2`=red.
- `output`: Output ID of the affected Destination.
- `_raw`: "Destination `${output}` [in group `${__worker_group}`] is unhealthy".
- `_metric`: "health.outputs".

Destination Backpresssure Activated

- `backpressure_type`: `1` for Block, `2` for Drop.
- `output`: Output ID of the affected Destination.
- `_raw`: "Backpressure ([dropping|blocking]) is engaged for destination `${output}` [in group `${__worker_group}`]".
- `_metric`: "backpressure.outputs".

Source High Data Volume

- `health`: Numeric value where `0`=green, `1`=yellow, `2`=red.
- `bytes`: Number of bytes received in the time bucket.
- `input`: Input ID of the affected Source.
- `_raw`: "Source `${input}` [in group `${__worker_group}`] traffic volume greater than `${dataVolume}` in `${timeWindow}`".
- `_metric`: "total.in_bytes".

Source Low Data Volume

- `health`: Numeric value where `0`=green, `1`=yellow, `2`=red.
- `bytes`: Number of bytes received in the time bucket.
- `input`: Input ID of the affected Source.
- `_raw`: "Source `${input}` [in group `${__worker_group}`] traffic volume less than `${dataVolume}` in `${timeWindow}`".

- `_metric`: "total.in_bytes".

Source No Data Received

- `health`: Numeric value where `0`=green, `1`=yellow, `2`=red.
- `_time`: Timestamp when this Notification was created.
- `input`: Input ID of the affected Source.
- `_raw`: "Source ${input} [in group ${__worker_group}] had no data for ${timeWindow}".
- `_metric`: "total.in_bytes"

License Expiration

- `severity`: One of "warn" or "fatal".
- `title`: One of: "License expiring soon, data will stop flowing." Or: "License has expired. Data flow has been stopped.".
- `text`: One of: "License will expire on `${expirationDate}`, no external inputs will be read after that time. Please contact sales@cribl.io to renew your license." Or: "License has expired."

5.9. Scripts

Admins can run scripts (e.g., shell scripts) from within Cribl Stream by configuring and executing them at **Settings** > **Global Settings** > **Scripts**. Scripts are typically used to call custom automation jobs or, more generally, to trigger tasks on demand. For example, you can use Scripts to run an Ansible job, or to place a call to another automation system, when Cribl Stream configs are updated.

With Great Power Comes Great Responsibility!

Scripts will allow you to execute almost anything on the system where Cribl Stream is running. Make sure you understand the impact of what you're executing before you do so!

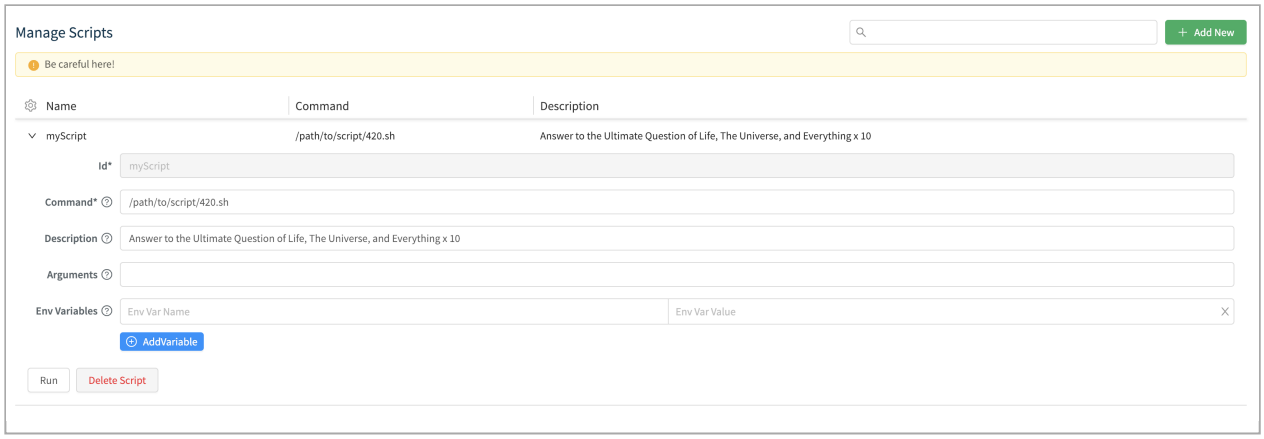

Settings > Manage Scripts page

The Manage Scripts page provides the following tields:

- **ID**: Unique ID for this script.
- **Command**: Command to execute for this script.
- **Description**: Brief description about this script. Optional.
- **Arguments**: Arguments to pass when executing this script.
- **Env variables**: Extra environment variables to set when executing script.

Scripts in Distributed Deployments

- Scripts can be deployed from Leader Node, but can be **run** only locally from each Worker Node.
- If the Script command is referencing a file (e.g., `420.sh`), that file must exist on the Cribl Stream instance. In other words, the Script management interface cannot be used to upload or manage

script files.

5.10. Upgrading

This page outlines how you can upgrade a Cribl Stream single-instance or distributed deployment along one of these supported upgrade paths, which apply to UI-based upgrades:

CURRENT VERSION	UPGRADE PATH
4.x	4.x
3.x	3.x through 4.x
2.x	2.x through 4.x
1.7.x or 2.0.x	2.x.x, then 3.x or 4.x
1.6.x or below	1.7.x, then 2.x.x, then 3.x or 4.x

> If you're upgrading Worker Nodes directly from the command-line interface, you don't have to worry about a version upgrade path - there are no restrictions on the versions you can upgrade to or from.

Considerations

- Cribl Stream does **not** support direct upgrades from any pre-GA version (such as a Cribl-provided test candidate) to a GA version. To get the GA version running, you must perform a new install.
- If you're planning to upgrade to v.3.5.4, note that any Worker Nodes must be at the same version as the Leader for v.3.5.4. Leaders running v.3.5.4 and later test whether Worker Nodes are running a compatible version before deploying configs that could break Workers' data flow. The Leader will prompt you to upgrade these Nodes as needed. For details, see the Stream 3.5.4 release notes.
- Before upgrading your Leader to v.4.0 and later, see Persisting Socket Connections to prepare the host to keep communications open from Workers.
- Cribl Stream 4.1 and later encrypt TLS certificate private key files when you add or modify them. See instructions just below for backing up your keys from earlier versions.

Safeguarding Unencrypted Private Key Files for Rollback

Before upgrading from a pre-4.1 version, make a backup copy of all unencrypted TLS certificate private key files. Having access to the unencrypted files is essential if you later find that you need to roll back to your previous version.

To safeguard your unencrypted private keys, make a full backup of all Cribl config files. Files in the `auth/certs` directory are particularly important, such as those in:

- `groups/default/local/cribl/auth/certs/`
- `groups/<groupname>/local/cribl/auth/certs/`
- `cribl/local/cribl/auth/certs/`
- Etc.

Take appropriate precautions to prevent unauthorized access to these unencrypted private key files. If you need to roll back to a pre-4.1 version, see Restoring Unencrypted Private Keys.

Standalone/Single-Instance

This path requires upgrading only the single/standalone node:

1. Stop Cribl Stream.
2. Uncompress the new version on top of the old one.

   On some Linux systems, `tar` might complain with: `cribl/bin/cribl: Cannot open: File exists`. In this case, please remove the `cribl/bin/cribl` directory if it's empty, and untar again. If you have **custom functions** in `cribl/bin/cribl`, please move them under `$CRIBL_HOME/local/cribl/functions/` before untarring again.
3. Restart Cribl Stream.

Distributed Deployment

For a distributed deployment, this is the general upgrade order:

First, upgrade the Leader Node. Then, upgrade the Worker Nodes. Lastly, commit and deploy the changes on the Leader.

For distributed environments with a standby Leader configured, this is the upgrade order:

First, upgrade the Primary Leader Node. Then, upgrade the Secondary Leader Node. Lastly, upgrade the Worker Nodes.

Upgrade the Leader Node

1. Commit and deploy your desired previous version. (This will be your most recent checkpoint.)

   Optionally `git push` to your configured remote repo.

2. Stop Cribl Stream.

   - Optional but recommended: Back up the entire `$CRIBL_HOME` directory.
   - Optional: Check that the Worker Nodes are still functioning as expected. In the absence of the Leader Node, they should continue to work with their last deployed configurations.

3. Uncompress the new Cribl Stream version on top of the old one.
4. Change ownership of the `cribl` directory as needed: `[sudo] chown -R cribl:cribl $CRIBL_HOME`
5. Restart Cribl Stream and log back in.
6. Wait for all the Worker Nodes to report to the Leader, and ensure that they are correctly reporting the last committed configuration version.
7. Commit and deploy these configuration changes.

Upgrade the Worker Nodes

These are the same basic steps as when upgrading a Single Instance, above:

1. Stop Cribl Stream on each Worker Node.
2. Uncompress the new version on top of the old one.
3. Change ownership of the `cribl` directory as needed: `[sudo] chown -R cribl:cribl $CRIBL_HOME`
4. Restart Cribl Stream.

Commit and Deploy All Changes from the Leader Node

1. Ensure that newly upgraded Worker Nodes report to the Leader with their **new** software version.
2. If prompted, commit and deploy the newly updated Leader configuration after all Workers have upgraded.

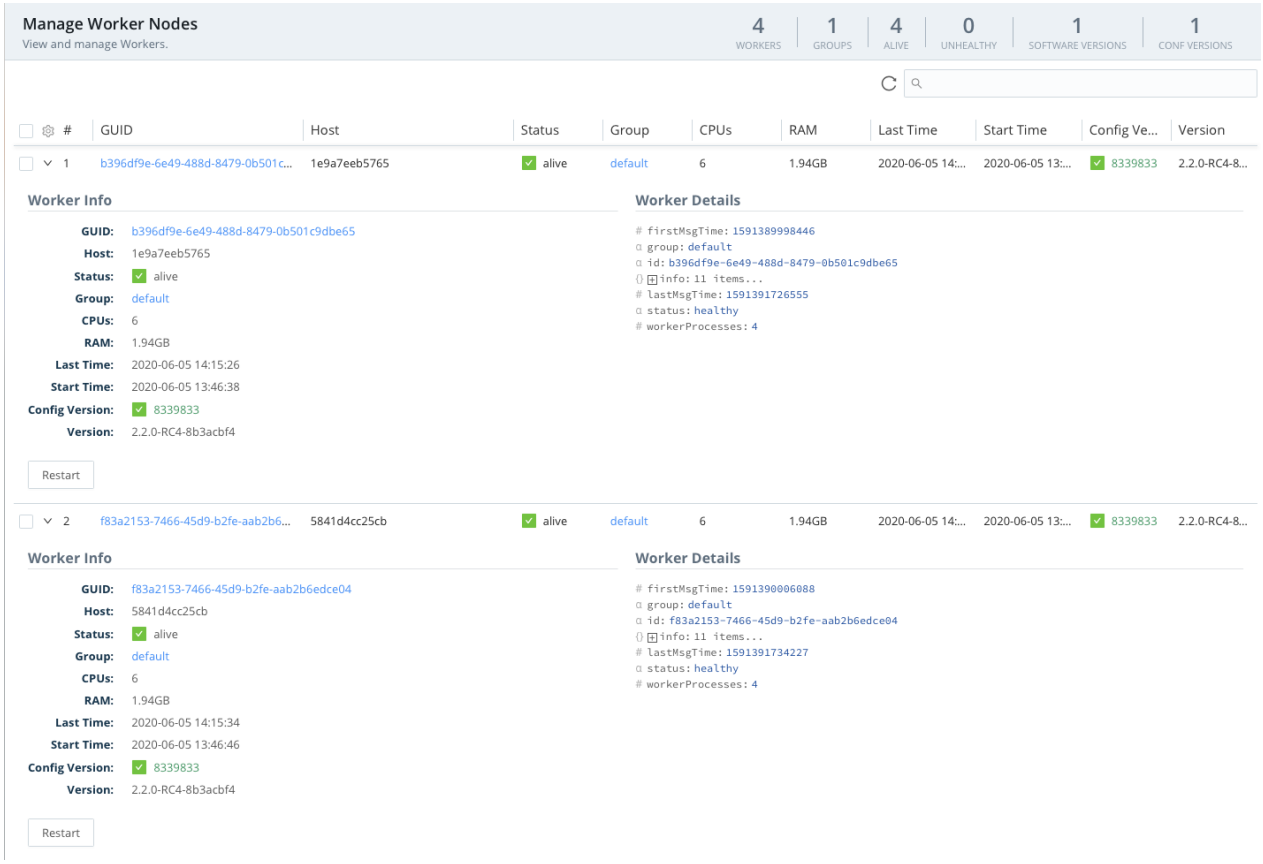

Successful upgrade confirmation

Breaking Change at v.3.2 Because of a breaking change at v.3.2, Leaders running v.3.2.x cannot upgrade (via the UI) Workers running versions prior to 3.2.0. The upgrade will fail with errors of the form: `Error checking upgrade path` and `Cannot read property 'greaterThan' of undefined.`

The workaround is to upgrade these Workers via the filesystem to v.3.2.0 or higher. The error does not affect upgrades of Workers running v.3.2.0+. :::

Upgrade and Rollback via the UI

Cribl Stream/LogStream v.2.4.4 and higher provides streamlined upgrading options directly through the UI:

- To upgrade a single-instance deployment, select **Settings** > **System > Upgrade**.
- To upgrade the Leader Node, select **Settings** > **Global Settings** > **System > Upgrade**.
- To upgrade Worker Groups, select **Settings** > **Stream Settings** > **Group Upgrade**.

These streamlined controls perform the whole above sequence of stopping the Cribl server, updating the installed package, and restarting Cribl.

Cribl Stream/LogStream 3.0 (and later) also enables you to manage automatic backup and rollback in case an upgrade fails.

These options will work only if all Stream/LogStream instances (including Worker Processes) start at v.2.4.4 or higher. For other version-specific limitations, please see Known Issues.

Be aware that the **Checking for upgrade** status message, and its accompanying spinner, can take up to several minutes to resolve. Also, after you initiate an upgrade, it can take up to several minutes before the **View** button (described below) is displayed. :::

The following controls are available here:

Package Source

To the right of **Package source**, the default **CDN** button downloads a package directly from Cribl's content delivery network.

If you select the alternative **Path** button, next click **Add Path** (below **Custom path**) to define as many paths as you need. In the resulting table, each row provides these additional fields:

- **Platform-specific package location**: Enter either a URL (HTTP) or a local path to the upgrade package. HTTP example: `https://cdn.cribl.io/dl/4.1.0/cribl-4.1.0-6979aea9-linux-x64.tgz`
- **Package hash location**: Enter either a URL (HTTP), or a local path to the hash that validates the package. Supports SHA-256 and MD5 formats. You can simply append `.sha256` to the contents of the **Platform-specific package location** field.
  HTTP example: `https://cdn.cribl.io/dl/4.1.0/cribl-4.1.0-6979aea9-linux-x64.tgz.sha256`
- **X** (close box): Click to delete a row – immediately. (There is no confirmation prompt.)
- **Save**/**Cancel** buttons: Click **Save** to store the specified locations. Clicking **Cancel** restores the **CDN** package-source selection.

You can add multiple rows to this table to specify packages for different platforms/architectures. To obtain the latest packages from https://cribl.io/download, use the drop-down list to specify each platform (e.g., x64 versus ARM). When you stage these packages on your own servers, preserve the original file names.

Automatic Upgrades

Enable automatic upgrades has a different default state depending on the deployment type:

- In on-prem/customer-managed deployments, **Enable automatic upgrades** defaults to `No`, to prevent the Leader from automatically upgrading out-of-date Worker Nodes. Before you toggle this to `Yes`, upgrade the Leader itself to Cribl Stream's most recent version.
- In Cribl.Cloud deployments, **Enable automatic upgrades** defaults to `Yes`. This enables Cribl to automatically upgrade Worker Nodes to Cribl Stream's newest stable version. (Cribl-managed and hybrid Workers will auto-upgrade as soon as they see a new Leader version.) If you toggle this to `No`, you will need to explicitly upgrade each Worker.

When enabled, the automatic upgrade process works like this:

1. The Leader pulls packages, and checks their hashes.
    - The Leader must be able to connect to the path.
    - The Leader must also have privileges to download the files.
    - If the path is an HTTP URL, the Leader copies the file to a known location in its filesystem.
    - If the package is already hosted on the Leader Node, specify its filesystem path.
2. Workers pull packages and check their hashes.
    - Workers pull from the Leader through HTTP, not directly from the Leader's filesystem.
    - Each Worker pulls the package that is appropriate for that Worker's platform and architecture.
3. Workers install the packages.

Upgrade vs. Upgrade Leader

In a Single-instance deployment, the **Upgrade** button is the only other control provided. In a distributed deployment, the **Upgrade** button is displayed on an **Upgrade Leader** tab, and clicking it upgrades the Leader Node. (As with manual upgrades, always upgrade the Leader before upgrading the Workers.)

Upgrade Worker Groups

This second tab, displayed only in distributed deployments, shows each Worker Group's status.

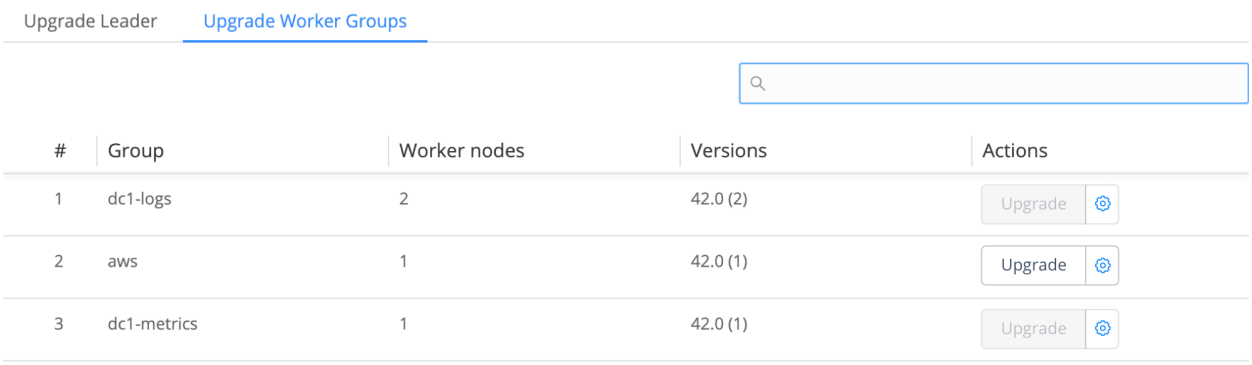

Upgrade Worker Groups tab

> Upgrading Workers from the Leader requires a Cribl Stream Standard or Enterprise license.

Click any row's **Upgrade** button to upgrade that group. The resulting **Upgrade Group** dialog offers two states: Basic Upgrade and Advanced Upgrade.

Basic Upgrade Configuration

In this default **Upgrade Group** dialog, you can simply upgrade the whole Group, by clicking the dialog's **Upgrade** button to confirm.

Cribl Stream will check to ensure that Workers are upgraded no higher than the Leader's version. Upgrades are performed as the user that was running Cribl Stream on each machine.

Advanced Upgrade Configuration

Click the dialog's gear (⚙) button to expose these additional options:

Quantity %: Specify what percentage of the Group's Workers to upgrade in this operation. If you enter a value less than the default `100` %, Cribl Stream will perform a partial upgrade, keeping the remaining Workers active to process data.

Rolling upgrade: This option upgrades Workers in batches, each sized according to the value in the **Quantity %** field. When enabled, this slider also enables the dialog's two remaining controls:

- **Retry delay (ms)**: How many milliseconds to wait between upgrade attempts. Defaults to `1000` ms (1 second).

- **Retry count**: How many times to retry a failed upgrade. Defaults to `5`.

After you click the **Upgrade** confirmation button, the **Upgrade Worker Groups** tab will display an additional button on this Group's row:

View: Click to display the upgrade task's status in the Job Inspector modal – select that modal's **System** tab to access details.

> When you initiate an upgrade via the UI, the new package is untarred to `$CRIBL_HOME/unpack.<random-hash>.tmp`. This location inherits the permissions you've already assigned to `$CRIBL_HOME`.

Backup and Rollback

When you initiate an upgrade through the UI, Cribl Stream first stores a backup of your current stable deployment. If the upgrade fails, then by default, Stream will automatically roll back to the stored backup package. You can adjust this behavior at **Settings** > **Global Settings** > **System** >**General Settings** > **Upgrade & Share Settings**, using the following controls.

> Cribl Stream can perform rollbacks only on Worker Nodes/instances that were running at least v.3.0.0 before the attempted upgrade.

Enable automatic rollback: Cribl Stream will automatically roll back an upgrade if the Cribl Stream server fails to start, or if the Worker Node fails to connect to the Leader. (Toggle to `No` to defeat this behavior.)

Rollback timeout (ms): Time to wait, after an upgrade, before checking each Node's health to determine whether to roll back. Defaults to `30000` milliseconds, i.e., 30 seconds.

Rollback condition retries: Number of times to retry the health check before performing a rollback. Defaults to `5` attempts.

Check interval (ms): Time to wait between health-check retries. Defaults to `1000` milliseconds, i.e., 1 second.

Backups directory: Specify where to store backups. Defaults to `$CRIBL_HOME/state/backups`.

Backup persistence: A relative time expression specifying how long to keep backups after each upgrade. Defaults to `24h`.

Manual Rollback

Using CLI commands, it's possible to explicitly roll back an on-prem Leader, and on-prem or hybrid Workers, to an earlier release. This works much like an upgrade.

Explicit rollback might be necessary if an automatic rollback fails. Otherwise, Cribl recommends first considering other options – an upgrade, or working with Cribl Support – before a manual rollback. Rollback can encounter these complications:

- Your current configuration might take advantage of dependencies not supported in an earlier release.
- Do not manually roll back any Cribl Stream instance running in a container. Instead, locate, download, and launch a container image hosting the earlier version you want.

Rollback Outline

We assume that you are rolling back to a previously deployed version that you know to be stable in your environment. The broad steps are:

1. Ideally, link your deployment to a Git remote repo. Commit and push your Leader's configuration to that remote. The repo will provide a stable location from which to recover your config, if necessary.

2. Stop the Leader instance. (From `$CRIBL_HOME/bin/`, execute `./cribl stop`.)

3. Also create a local backup of your Leader's whole `$CRIBL_HOME` directory.

4. Obtain the installation package for the earlier release and platform you need. (See the Rollback Example.)

5. Uncompress the earlier version to your original deployed directory. You can do this from the command line or programmatically (see the Rollback Example).

   If installing to your existing target directory fails, try the same mitigations we list above for upgrades.

6. In a distributed deployment, Workers must not run a higher version than the Leader. Repeat steps 2, 3, and 5 above on all Workers (substituting “Worker” for “Leader”).

Rollback Example

Although rollback can be partially scripted, you cannot discover earlier installation packages programmatically – the initial steps here require human intervention:

1. Stop and back up the Leader. (Follow steps 1–3 in the Rollback Outline.)
2. Open the **Cribl Past Releases** page: https://cribl.io/download/past-releases/.
3. Locate the earlier version that you want to restore.
4. Use the adjacent drop-down to select your target platform.
5. Right-click (or `Ctrl`-click) the corresponding **Download** button, and copy its URL to your clipboard. In this example, we've copied:
   `https://cdn.cribl.io/dl/4.1.0/cribl-4.1.0-6979aea9-linux-arm64.tgz`
6. Swap that URL into an untar command like the following. Run this command from the parent (typically `/opt/`) of your existing `$CRIBL_HOME` directory:
   `[sudo] curl -Lso - https://cdn.cribl.io/dl/4.1.0/cribl-4.1.0-6979aea9-linux-arm64.tgz | tar zxv`
7. Repeat the preceding steps to adjust all Workers to a compatible version.

Splunk App Package Upgrade Steps

> See Deprecation note for v.2.1.

Follow these steps to upgrade from v.1.7, or higher, of the Cribl App for Splunk:

1. Stop Splunk.
2. Untar/unzip the new app version on top of the old one.

   On some Linux systems, `tar` might complain with: `cribl/bin/cribl: Cannot open: File exists`. In this case, please remove the `cribl/bin/cribl` directory if it's empty, and untar again. If you have **custom functions** in `cribl/bin/cribl`, please move them under `$CRIBL_HOME/local/cribl/functions/` before untarring again.
3. Restart Splunk.

Upgrading from Splunk App v.1.6 (or Lower)

As of v.1.7, contrary to prior versions, Cribl's Splunk App package defaults to Search Head Mode. If you have v.1.6 or earlier deployed as a Heavy Forwarder app, upgrading requires an extra step to restore this setting:

1. Stop Splunk.

2. Untar/unzip the new app version on top of the old one.

3. Convert to HF mode by running: `$SPLUNK_HOME/etc/apps/cribl/bin/cribld mode-hwf`

4. Restart Splunk.

5.11. Uninstalling

Removing an Cribl Stream installation, whether for a clean reinstall or permanently

Uninstalling the Standalone Version

- (Optional) To prevent systemd from trying to start Cribl Stream at boot time, run the following command:
  `sudo $CRIBL_HOME/bin/cribl boot-start disable`

  If you're running both Cribl Stream and Cribl Edge on the same host, be sure to execute this command in the same mode (Stream or Edge) and the same directory in which you originally ran `cribl boot-start enable.`
- Stop Cribl Stream (stopping the main process).
- Back up necessary configurations/data.
- Delete the `cribl` user: `userdel cribl`
- Delete the user group: `groupdel cribl`
- Remove the directory where Cribl Stream is installed.
- Directly delete any local files that Cribl Stream added while running – e.g., the `.dat` file and other local configs.

In a distributed deployment, repeat the above steps for the Leader instance and all Worker instances.

Uninstalling the Splunk App Version

- Stop Splunk.
- Back up necessary configurations/data.
- Remove the Cribl App in `$SPLUNK_HOME/etc/apps`.
- Remove the Cribl module in `$SPLUNK_HOME/etc/modules/cribl` (some versions).

6. Access Management

Cribl Stream provides a range of access-management features for users with different security requirements. For details, see the following topics:

- Authentication: Authenticating users in Cribl Stream.
- Members and Permissions: Fine-grained access control, available in Cribl Stream 4.2 and later.
- Local Users: Creating and managing users in Cribl Stream's original Role-based model.
- Roles: Managing Roles and Policies to assign to users, in Cribl Stream's original RBAC model.

> Permission- and Role-based access control can be enabled only on distributed deployments (Stream, Edge with an Enterprise license. With other license types and/or single-instance deployments (Stream, Edge), all users will have full administrative privileges.

6.1. Authentication

User authentication in Cribl Stream

Cribl Stream supports **local**, **Splunk**, **LDAP**, **SSO/OpenID Connect**, and **SSO/SAML** authentication methods, depending on license type.

Local Authentication

To set up local authentication, navigate to **Settings** > [**Global Settings** >] **Access Management > Authentication** and select **Local**.

You can then manage users through the **Settings** > [**Global Settings** >] **Access Management > Local Users** UI. All changes made to users are persisted in a file located at `$CRIBL_HOME/local/cribl/auth/users.json`.

> For Windows Worker Nodes, the changes are persisted in a file located at `C:\ProgramData\Cribl\local\cribl\auth\users.json`.

This is the line format, and note that both usernames and passwords are case-sensitive:

```
{"username":"user","first":"Goat","last":"McGoat","disabled":"false",
"passwd":"Yrt0MOD1w8OzyMYB8WMcEleOtYESMwZw2qIZyTvueOE"}
```

The file is monitored for modifications every 60s, and will be reloaded if changes are detected.

Adding users through direct modification of the file is also supported, but not recommended.

> If you edit `users.json`, maintain each JSON element as a single line. Otherwise, the file will not reload properly.

Manual Password Replacement

> Manual Password Replacement is for on-prem deployments only. For Cribl Stream in Cribl.Cloud, Cribl recommends setting up Fallback Access; if you do need to reset your password, you must contact Cribl.

To manually add, change, or restore a password, replace the affected user's `passwd` key-value pair with a `password` key, in this format: `"password":"<newPlaintext>"`. Cribl Stream will hash all plaintext password(s), identified by the `password` key, during the next file reload, and will rename the plaintext `password` key.

Starting with the same `users.json` line above:

```
{"username":"user","first":"Goat","last":"McGoat","disabled":"false",
"passwd":"Yrt0MOD1w8OzyMYB8WMcEleOtYESMwZw2qIZyTvueOE"}
```

...you'd modify the final key-value pair to something like:

```
{"username":"user","first":"Goat","last":"McGoat","disabled":"false",
"password":"V3ry53CuR&pW9"}
```

Within at most one minute after you save the file, Cribl Stream will rename the `password` key back to `passwd`, and will hash its value, re-creating something resembling the original example.

Set Worker/Edge Node Passwords

In a distributed deployment (Edge, Stream), once a Worker/Edge Node has been set to point to the Leader Node, Cribl Stream will set each Worker/Edge Node's admin password with a randomized password that is different from the admin user's password on the Leader Node. This is by design, as a security precaution. But it might lead to situations where administrators cannot log into a Worker/Edge Node directly, and must rely on accessing them via the Leader.

To explicitly apply a known/new password to your Worker Node, you set and push a new password to the Worker Group. Here's how, in the Leader Node's UI:

1. From the top nav, select **Manage**.
2. Select the desired Worker Group.
3. From the Worker Group's submenu, select **Group Settings**.
4. Select **Local Users**, then expand the desired user.
5. Update the **Password** and **Confirm Password** fields and select **Save**.

Every 10 seconds, the Worker/Edge Node will request an update of configuration from the Leader, and any new password settings will be included.

> On Cribl.Cloud, Group Settings for hybrid Workers include the above **Local Users** options, but Groups for Cribl-managed Workers do not. For alternatives, see the Cribl.Cloud Launch Guide and Cribl.Cloud SSO Setup docs.

Authentication Controls

You can customize authentication behavior at **Settings** > [**Global Settings** >] **General Settings > API Server Settings > Advanced.** The options here include:

- **Logout on Roles change**: If role-based access control is enabled, determines whether users are automatically logged out of Cribl Stream when their assigned Roles change. Defaults to `Yes`.
- **Auth-token TTL**: Sets authentication tokens' valid lifetime, in seconds. Defaults to `3600` (60 minutes = 1 hour); must be at least `1` sec.
- **Idle session TTL**: Sets how long (in seconds) Cribl Stream will observe no user interaction before invalidating user's session tokens. Defaults to `3600` (60 minutes = 1 hour); must be at least `60` sec.
- **Login rate limit**: Sets the number of login attempts allowed over a (selectable) unit of time. Defaults to `2/second`.
- **HTTP header**: Enables you to specify one or more custom HTTP headers to be sent with every response.

Token Renewal and Session Timeout

Here is how Cribl Stream sets tokens' valid lifetime by applying the **Auth-token TTL** field's value:

- When a user logs in, Cribl Stream returns a token whose expiration time is set to {login time + **Auth-token TTL** value}.
- If the user is idle (no UI activity) for the configured token lifetime, they are logged out.
- As long as the user is interacting with Cribl Stream's UI in their browser, Cribl Stream continually renews the token, resetting the idle-session time limit back by the **Auth-token TTL** value.

The cribl.secret File

When Cribl Stream first starts, it creates a `$CRIBL_HOME/local/cribl/auth/cribl.secret` file. This file contains a key that is used to generate auth tokens for users, encrypt their passwords, and encrypt encryption keys.

Default local credentials are: `admin/admin`

> Back up and secure access to this file by applying strict permissions – e.g., `600`.

External Authentication

> While configuring any external auth method, make sure you don't get locked out of Cribl Stream! Enable the **Fallback on fatal error** or **Allow local auth** toggle until you're certain that external auth is working as intended. If you do get locked out, refer back to Manual Password Replacement for the remedy.
>
> All external auth methods require either an Enterprise or a Standard license. They're not supported with a Free license.
>
> Cribl Stream Roles and role mapping are supported **only** with an Enterprise license. With a Standard license, all your external users will be imported to Cribl Stream in the `admin` Role.

This topic covers the following external authentication providers:

- Splunk Authentication
- LDAP Authentication

Authentication for Single Sign-On

Each authentication method that Cribl Stream supports for on-prem SSO has its own separate topic:

- SSO/OpenID Connect Authentication
- SSO/SAML Authentication

For deployments in Cribl.Cloud, see Cribl.Cloud SSO Setup.

Splunk Authentication

Splunk authentication is very helpful when deploying Cribl Stream in the same environment as Splunk. This option requires the user to have Splunk `admin` role permissions. To set up Splunk authentication:

Navigate to **Settings** > [**Global Settings** >] **Access Management > Authentication > Type** and select **Splunk**. This exposes the following controls.

- **Host**: Splunk hostname (typically a search head).
- **Port**: Splunk management port (defaults to `8089`).
- **SSL**: Whether SSL is enabled on Splunk instance that provides authentication. Defaults to `Yes`.
- **Fallback on fatal error**: Attempt local authentication if Splunk authentication is unsuccessful. Defaults to `No`. If toggled to `Yes`, Cribl Stream will attempt local auth only **after** a failed Splunk auth. Selecting `Yes` also exposes this additional option:
    - **Fallback on bad login**: Attempt local authentication if the supplied user/password fails to log in on Splunk. This similarly defaults to `No`.

> The Splunk search head does not need to be locally installed on the Cribl Stream instance.

For distributed deployments with an Enterprise License, the next (and final) step is to configure Role Mapping settings.

LDAP Authentication

You can set up LDAP authentication as follows:

Navigate to **Settings** > [**Global Settings** >] **Access Management > Authentication > Type**, and select **LDAP**. This exposes the following controls.

- **Secure**: Enable to use a secure LDAP connections (`ldaps://`). Disable for an insecure (`ldap://`) connection.
- **LDAP servers**: List of LDAP servers. Each entry should contain `host:port` (e.g., `localhost:389`).
- **Bind DN**: Distinguished Name of entity to authenticate with LDAP server. E.g., `'cn=admin,dc=example,dc=org'`.
- **Password**: Distinguished Name password used to authenticate with LDAP server.
- **User search base**: Starting point to search LDAP for users, e.g., `'dc=example,dc=org'`.

- **Username field**: LDAP user search field, e.g., `cn` or `(cn (or uid)`. For Microsoft Active Directory, use `sAMAccountName` here.

- **User search filter**: LDAP search filter to apply when authenticating users. Optional, but recommended: If empty, all users in your domain will be able to log in with the default Cribl Role. This example would enable only users in the `StreamAdmins` group to log in – they would then be mapped to any Roles specified in Role Mapping Settings:
  `(&(objectClass=user)(memberof=CN=StreamAdmins,OU=Groups,DC=cribl,DC=io))`
  This simpler filter example would enable anyone in a group called ☒admin," who does **not** have a department attribute that starts with "123," to log in:
  `(&(group=admin)(!(department=123*)))`

- **Group search base**,
  Group member field,
  Group membership attribute,
  Group search filter,
  Group name field: These settings are used only for LDAP authentication with role-based access control. See Role-Based LDAP Authentication, below.

- **Connection timeout (ms)**: Defaults to `5000`.

- **Reject unauthorized**: Valid for secure LDAP connections. Set to `Yes` to reject unauthorized server certificates.

- **Fallback on fatal error**: Attempt local authentication if LDAP authentication is down or misconfigured. Defaults to `No`. If toggled to `Yes`, local auth will be attempted only **after** a failed LDAP auth. Selecting `Yes` also exposes this additional option:

  - **Fallback on bad login**: Attempt local authentication if the supplied user/password fails to log in on the LDAP provider. Defaults to `No`.

For distributed deployments with an Enterprise License, the next (and final) step is to configure Role Mapping settings.

Role-Based LDAP Authentication

When configuring LDAP authentication with role-based access control (RBAC), you **must** use the following settings to import user groups. (The UI does not enforce filling these fields. When using LDAP without roles, ignore them.)

- **Group search base**: Starting point to search LDAP for groups, e.g., `dc=example,dc=org`.

- **Group member field**: LDAP group search field, e.g., `member`.
- **Group membership attribute**: Attribute name of LDAP user object. Determines group member attribute's value, which defines group's allowed users. This field accepts `dn`, `cn`, `uid`, or `uidNumber`. If none of these are specified, falls back to `dn`.
- **Group search filter**: LDAP search filter to apply when retrieving groups for authorization and mapping to Roles., e.g., `(&(cn=cribl*)(objectclass=group))`.
- **Group name field**: Attribute used in objects' DNs that represents the group name, e.g., `cn`. Cribl Stream does not directly read this attribute from group objects; rather, it must be present in your groups' DN values. Match the attribute name's original case (upper, lower, or mixed) when you specify it in this field. In particular, Microsoft Active Directory requires all-uppercase group names (e.g., `CN`).

For distributed deployments with an Enterprise License, the next (and final) step is to configure Role Mapping settings.

Role Mapping Settings

This section is displayed only on **distributed** deployments (Edge, Stream) with an Enterprise License. For details on mapping your external identity provider's configured groups to corresponding Cribl Stream user access Roles, see External Groups and Roles. The controls here are:

- **Default Role**: Default Cribl Stream Role to assign to all groups not explicitly mapped to a Role.
- **Mapping**: On each mapping row, enter an external group name (case-sensitive) on the left, and select the corresponding Cribl Stream Role in the right drop-down list. Click **Add Mapping** to add more rows.

6.2. Members and Permissions

Define and manage fine-grained access control across Cribl products and resources

In Cribl Stream 4.2, Members and Permissions are available as the successors to Cribl's original role-based access control (RBAC) model of Local Users and Roles/Policies. The earlier model is still supported across most of the Cribl product suite. However, Cribl.Cloud invitations and Stream Projects have fully transitioned to the new model.

> Permission-based access control is available only on distributed deployments (Stream, Edge) with an Enterprise license or Cribl.Cloud plan. With other license/plan types and/or single-instance deployments, all users will have full administrative privileges.
>
> In initial 4.2.x releases, existing Local Users display incorrectly on **Settings** > **Members** pages with `No Access` Permissions. This is a display-only bug: These users' original Roles still function as configured. For details and fix timeline, please see Known Issues.

When you first deploy Cribl Stream with the above prerequisites, you will be granted the Organization-level **Admin** Permission. Using this Permission, you can then assign additional Permissions to yourself and other Members, as outlined below in .

Why Move My Cheese?

Members and Permissions enable the finer-grained access control and authorization that many of our users have requested. You can now assign different Cribl users access and capabilities independently at multiple levels:

- Organization.
- Product: Stream, Edge, or Search.
- Group/Fleet.
- Resource: Stream Project, Search Dataset or Dataset Provider, etc.

The benefits?:

- Greater security in protecting access to resources and configuration.
- Greater flexibility in authorizing users on different parts of your Cribl suite (i.e., Organization).

- Ability to segment access and authorization to relevant teams.
- Ability to support a greater diversity of users, given these options.

Cribl plans to eventually retire its earlier RBAC model. But for now, both models are supported, to enable users to experiment and switch over at their own pace. As outlined below, several components of the new versus old model are currently interchangeable.

Organizations

Cribl.Cloud has, from the start, provided the concept of an Organization as a container for the deployment of a whole suite of Cribl products (Stream, Edge, and Cloud-only Search). The Members and Permissions model brings this concept to customer-managed (on-prem) deployments. Here, to access the Organization-level Members UI as an Admin:

1. From Cribl Stream's top nav, select **Settings** > **Global Settings**.
2. From the left nav, select **Members**.
3. Here, you can click an existing Member's row to change their access Permissions or other details, or click **Add Member** to grant a new user access to your Cribl Organization.

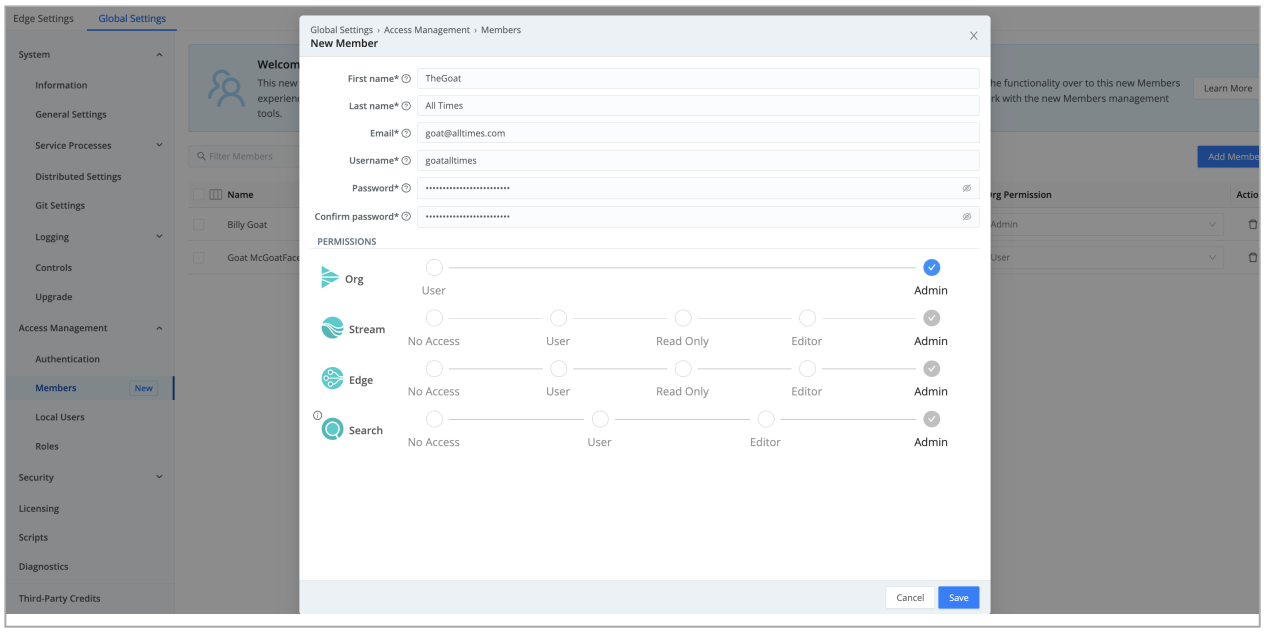

Organization > Members/Permissions UI

> For Cribl.Cloud's updated counterpart to this on-prem UI for managing Organization-level Permissions, see Inviting and Managing Other Users.

Members and Local Users

The top half of the **Members** configuration modal is almost identical to Cribl's original Local Users modal. In the current release, Members and Local Users are interchangeable: Members whom you add here can be reconfigured in the traditional **Local Users** UI (using legacy Roles instead of Permissions), and anyone you add in Local Users will also show up here in **Members**.

So let's focus on the the modal's bottom half, which is more interesting – the new graphical **Permissions** management.

Organization- and Product-Level Permissions

Each newly created Member starts out with **User** Permission at the Organization level, and with the self-explanatory **No Access** Permission on each product. You can click along the sliders to assign the following Permission levels.

> For Cribl.Cloud Organization-level Permissions, see our Cloud docs' Member Permissions section.

Organization-Level Permissions

PERMISSION	DESCRIPTION
User	The most basic Permission. At the Organization level, gets the Member into the system, without conferring any access to peer Members, products, or lower-level resources. (Admins can freely assign these Members varying Permissions at lower levels.)
Admin	This is a superuser Permission. At the Organization level, allows creating, viewing, updating, and deleting all Members. (Automatically inherits Product-level `Admin` Permissions and resource-level `Maintainer` Permissions, which confer comparably broad capabilities.)

> For Stream and Edge, the Product-level Permissions below apply to both Cribl.Cloud and on-prem deployments. For Cribl Search's more-specific Product-level Permissions, see Search Member Permissions.

Product-Level Permissions (Stream and Edge)

PERMISSION	DESCRIPTION
User	The most basic Permission. At the Product level, makes the Member assignable to Worker Groups and resources, with no initial access to any.
Read Only	At the Product level, this Permission is designed specifically to enable support personnel to help other users by viewing (but not modifying) their configurations. Allows viewing all Members, Worker Groups, Settings, Leader commits, and legacy Local Users and Roles, with no configuration capabilities. (A `Read Only` Permission at the Product level automatically inherits `Read Only` Permissions on all Worker Groups and lower-level resources.)
Editor	Allows viewing all Groups and Monitoring pages. (Configuring these options requires **Admin**-level permission on the product and/or Worker Group.) Automatically inherits the `Editor` Permission on Worker Groups, and the `Maintainer` Permission on lower-level resources.
Admin	This is a superuser Permission at the Product level. It allows creating, viewing, updating, and deleting all Worker Groups and resources; managing Worker Group Mappings; adding, updating, and restarting Worker Nodes; and managing Notifications and Notification targets. (Automatically inherited from the Organization-level `Admin` Permission in on-prem deployments, and from the Org-level `Owner` Permission in Cribl.Cloud deployments. Automatically inherits `Admin` Permissions on all Worker Groups and `Maintainer` Permissions on lower-level resources.)

> Once Members are in your Organization, you can assign or reassign the above Organization- and Product-level Permissions. Return to **Settings** > **Global Settings** > **Members** and click the Member's row to reopen the same configuration modal.

Group- and Fleet-Level Permissions

Cribl Stream Permissions at the Worker Group level generally mirror those at the Product level:

PERMISSION	DESCRIPTION
User	The most basic Permission. Gets the Member into the Worker Group, where Admins can then assign them access on individual resources. (Unless Members have a higher Permission at the Product level, they have no initial access to Worker Groups or resources.)
Read Only	Designed for support personnel. Allows viewing all Worker Group-level Settings, encryption keys, certificates, secrets, scripts, Sources, Destinations, Pipelines, Packs, Routes, QuickConnect connections, Knowledge objects, Notifications and Notification targets, Edge Subfleets and their Settings, and Stream Projects and Subscriptions, with no configuration capabilities. (Automatically inherited from a Product-level `Read Only` Permission. Automatically inherits `Read Only` Permissions on lower-level resources.)
Editor	Allows creating, viewing, updating, and deleting all Worker Group-level encryption keys, certificates, secrets, scripts, Sources, Destinations, Pipelines, Packs, Routes, QuickConnect connections, Knowledge objects, and Notifications and Notification targets. Allows committing configuration changes, but not

PERMISSION	DESCRIPTION
	deploying them. (An `Editor` Permission at the Product level automatically inherits `Editor` Permissions on all Worker Groups.)
Admin	Superuser Permission. Allows creating, viewing, updating, and deleting all Worker Group-level access management (Members' Permissions), Settings, encryption keys, key management system (KMS) settings, certificates, secrets, scripts, Sources, Destinations, Pipelines, Packs, Routes, QuickConnect connections, Knowledge objects, Notifications and Notification targets, and Stream Projects/Subscriptions. Allows adding, updating, and restarting Worker Nodes. Allows committing and deploying configuration changes. On Edge, provides CRUD capabilities on Subfleets' Settings and access management identical to those on the parent Fleet. (Automatically inherited from the Product-level `Admin` Permission. Automatically inherits `Maintainer` Permissions on lower-level resources.)

Assigning Group-/Fleet-Level Permissions

To assign Permissions on a Worker Group:

1. Select **Settings** > **Global Settings** > **Members**.
2. Make sure this Member has an **Org Permission** level sufficient to support the Permission you want to assign on the Worker Group.
3. From the top-left product switcher, select **Cribl Stream**. Then select (depending on the product) **Settings** > **Stream Settings** > **Members** or **Settings** > **Edge Settings** > **Members**.

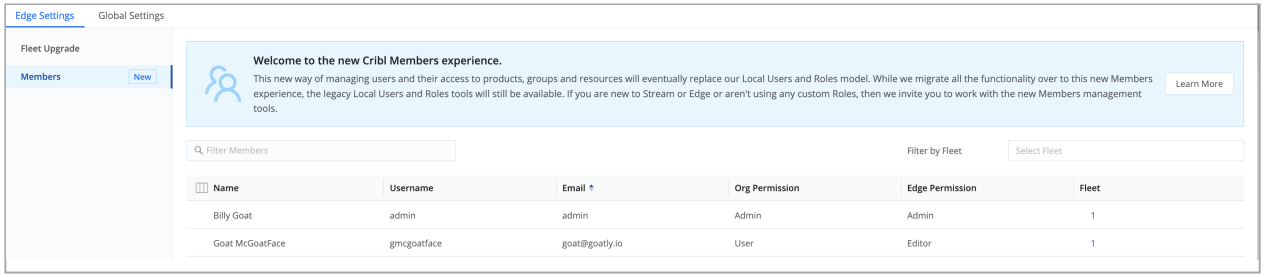

Edge Settings > Members

4. Click each applicable Member's row to open their **User Details** drawer.

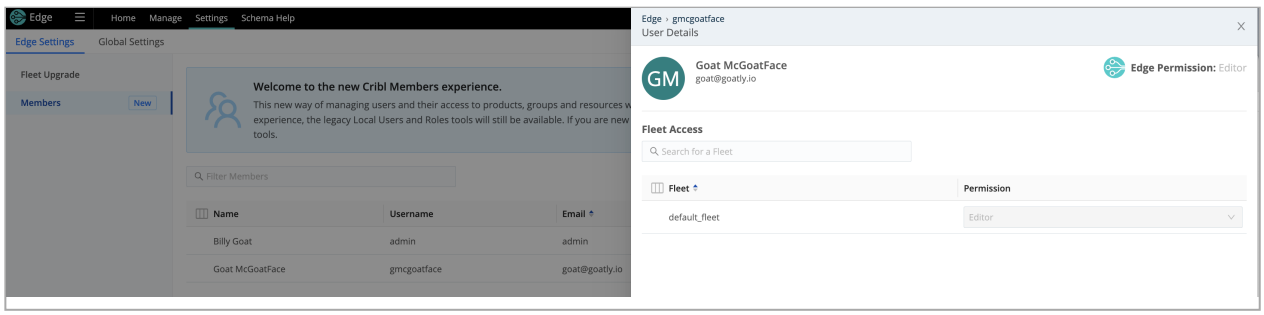

5. Grant the Member the Permission level you want on this Worker Group.

> To change Members' existing Permissions, repeat the same steps above.

Resource-Level Permissions

Certain Cribl products provide Permission-based access to particular resources.

Stream Projects

In v.4.2 and later, Stream Projects and Subscriptions rely entirely on the Members/Permissions access control available in the same versions. These enable you to assign different users different levels of access on individual projects. The 4.1.x `project_user` Role and `ProjectSourceSubscribe` Policy, which provided access to all Projects, are now retired.

> **This is a breaking change.** If you are upgrading with Projects configured in v.4.1.x, those Projects' users will be visible in Stream as Members, and you'll need to assign them new Permissions.
> For details, see Adding Users to Projects.

Search Resources

For Permissions on Search resources, see the Search docs' Sharing topic.

Inheritance

In the current release, Members' Permissions at certain levels determine the Permissions that Admins can assign them at lower levels. Here is the current inheritance scheme:

- Members with the `Admin` Permission at the Organization level will be locked to the `Admin` Permission on Products, to the `Editor` Permission on Worker Groups, and to the `Maintainer` Permission on lower-level resources.
- Members with the Product-level `Editor` Permission will be locked to the `Editor` Permission on Worker Groups, and to the `Maintainer` Permission on lower-level resources.

- Members with the `User` Permission at each level can be assigned varying Permissions at the next level down. **`User` is the most malleable Permission.**
- On Stream Projects, the `Maintainer` Permission is available **only** to Members with higher-level `Admin` or `Editor` Permissions. (They're automatically assigned this Permission via inheritance.)
- Search resources are more flexible: Here, the `Maintainer` Permission can be shared with Members who have the `User` Permission at the Product level.
- Members with the Product-level `Read Only` Permission will be locked to the `Read Only` Permission on Worker Groups and on lower-level resources.

UX Customization

Cribl Stream's UI will be presented differently to users who are assigned Permissions that impose access restrictions. Some controls will be visible but disabled, and some internal-search and log results will be limited, depending on each user's Permissions.

Access to the same objects via Cribl Stream's API and CLI will be similarly filtered, with appropriate error reporting. E.g., if a user tries to commit and deploy changes on a Worker Group/Fleet where they are not authorized, they might receive a CLI error message like this: `git commit-deploy command failed with err: Forbidden`

Legacy Roles and Policies

To facilitate a smooth transition to Cribl's new access-control model – and to provide backward compatibility for customers still using our earlier Roles/Policies model – our pre-4.2 Roles have been supplemented with new counterparts to most of the new Permissions listed above.

6.3. Local Users

This page covers how to create and manage Cribl Stream users, including their credentials and (where enabled) their access roles. These options apply if you're using the **Local** Authentication type, which is detailed here.

Creating and Managing Local Users

On the Leader Node, you manage users by selecting **Settings** > **Global Settings** > **Access Management** > **Local Users**. In single-instance deployments (Stream, Edge), you select **Settings** > **Access Management** > **Local Users**.

The resulting **Local Users** page will initially show only the default `admin` user. You are operating as this user.

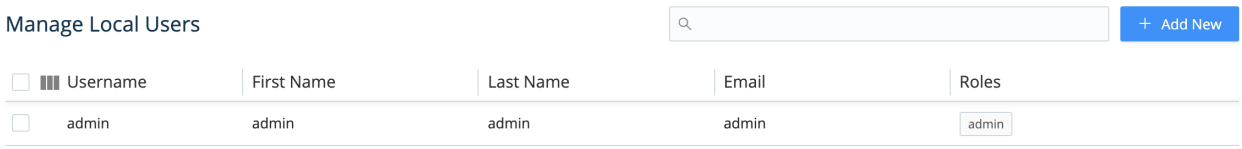

Managing users

To create a new Cribl Stream user, click **New User**. To edit an existing user, click anywhere on its row. With either selection, you will see the modal shown below.

The first few fields are self-explanatory: they establish the user's credentials. Usernames and passwords are case-sensitive.

If you choose to establish or maintain a user's credentials on Cribl Stream, but prevent them from currently logging in, you can toggle the **Enabled** slider to `No`.

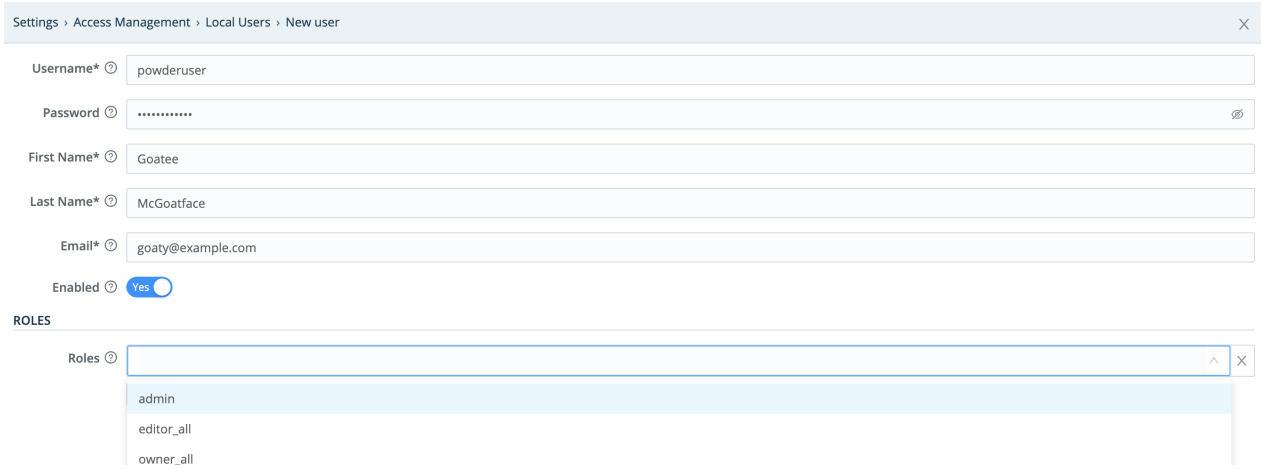

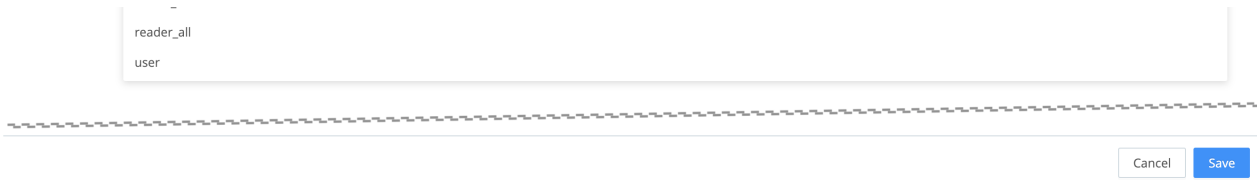

Entering and saving a user's credentials

Logged-in users can change their own Cribl Stream password from the **Local Users** page, by clicking on their own row to open a **Local Users** modal that manages their identity.

Adding Roles

If you've enabled role-based access control you can use the modal's bottom **Roles** section to assign access Roles to this new or existing user.

> For details, see Roles. Role-based access control can be enabled only on distributed deployments (Edge, Stream) with an Enterprise license. With other license types and/or single-instance deployments (Edge, Stream), all users will have full administrative privileges.

Click **Add Role** to assign each desired role to this user. The options on the **Roles** drop-down reflect the Roles you've configured at **Settings** > **Global Settings** > **Access Management** > **Roles**.

Note that when you assign multiple Roles to a user, the Roles' permissions are additive: This user is granted a superset of the highest permissions contained in all the assigned Roles.

When you've configured (or reconfigured) this user as desired, click **Save**.

By default, Cribl Stream will log out a user upon a change in their assigned Roles. You can defeat this behavior at **Settings** > **Global Settings** > **General Settings > API Server Settings > Advanced > Logout on roles change.**

6.4. Roles

Define and manage access-control Roles and Policies

Cribl Stream offers role-based access control (RBAC) to serve these common enterprise goals:

- **Security**: Limit the blast radius of inadvertent or intentional errors, by restricting each user's actions to their needed scope within the application.
- **Accountability**: Ensure compliance, by restricting read and write access to sensitive data.
- **Operational efficiency**: Match enterprise workflows, by delegating access over subsets of objects/resources to appropriate users and teams.

> Role-based access control is available only on distributed deployments (Stream, Edge) with an Enterprise license or Cribl.Cloud plan. With other license/plan types and/or single-instance deployments, all users will have full administrative privileges.

Roles, Meet Permissions

In Cribl Stream 4.2 and later, the Roles/Policies model described on this page exists in parallel with a new, more flexible Members/Permissions model, which will eventually replace it. To provide cross-compatibility, we have added several new Default Roles and Default Policies that are counterparts to new Permissions.

As noted below, these cross-compatible Roles/Policies support customers who still choose to configure Local Users with Roles and Policies. Your configured Local Users appear interchangeably in the new Members UI, and vice versa.

> **Known Issue**
>
> In initial 4.2.x releases, existing Local Users display incorrectly with `No Access` Permissions on **Settings** > **Members** pages. This is a display-only bug: These users' Roles still function as originally configured. For details and fix timeline, please see Known Issues.

RBAC Concepts

Cribl Stream's RBAC mechanism is designed around the following concepts, which you manage in the UI:

- **Roles**: Logical entities that are associated with one or multiple **Policies** (groups of permissions). You use each Role to consistently apply these permissions to multiple Cribl Stream **users**.
- **Policies**: A set of **permissions**. A Role that is granted a given Policy can access, or perform an action on, a specified Cribl Stream object or objects.
- **Permissions**: Access rights to navigate to, view, change, or delete specified **objects** in Cribl Stream.
- **Users**: You map Roles to Cribl Stream users in the same way that you map **user groups** to users in LDAP and other common access-control frameworks.

> Users are independent Cribl Stream objects that you can configure even without RBAC enabled. For details, see Local Users.

How Cribl Stream RBAC Works

Cribl Stream RBAC is designed to grant arbitrary permissions over objects, attributes, and actions at arbitrary levels.

> In Cribl Stream v.2.4.x through 4.1.x, Roles are customizable only down to the Worker Group/Fleet level. E.g., you can grant Edit permission on Worker Group/Fleet `WG1` to User A and User B, but cannot grant them finer-grained permissions on child objects such as Pipelines, Routes, etc.

Cribl Stream's UI will be presented differently to users who are assigned Roles that impose access restrictions. Controls will be visible but disabled, and search and log results will be limited, depending on each user's permissions.

Access to the same objects via Cribl Stream's API and CLI will be similarly filtered, with appropriate error reporting. E.g., if a user tries to commit and deploy changes on a Worker Group/Fleet where they are not authorized, they might receive a CLI error message like this: `git commit-deploy command failed with err: Forbidden`

Cribl Stream Roles can be integrated with external authorization/IAM mechanisms, such as LDAP and OIDC and mapped to their respective groups, tags, etc.

Using Roles

Cribl Stream ships with a set of default Roles, which you can supplement.

Default Roles

These Roles ship with Cribl Stream by default.

> Where we list an equivalent Permission (Cribl Stream 4.2 and later), see Members and Permissions for details.

NAME	DESCRIPTION
admin	Superusers – authorized to do anything and everything in the system.
owner_all	Read/write access to (and Deploy permission on) all Worker Groups/Fleets.
editor_all	Read/write access to all Worker Groups/Fleets.
reader_all	Read-only access to all Worker Groups/Fleets.
collect_all	Ability to create, configure, and run Collection jobs on all Worker Groups/Fleets.
gitops	Ability to sync the Cribl Stream deployment to a remote Git repository.
notification_admin	Read/write access to all Notifications.
user	Default Role that gets only a home/landing page to authenticate. This is a fallback for users who have not yet been assigned a higher Role by an admin.
project_user	Read/write access to the simplified Stream Projects UI and related data Subscriptions. **Deprecated as of v.4.2:** Assign the new Project-level **Editor** Permission instead.
stream_user	Provides compatibility with 4.2+ Stream **User** Permission.
stream_reader	Provides compatibility with 4.2+ Stream **Read Only** Permission.
stream_editor	Provides compatibility with 4.2+ Stream **Editor** Permission.
stream_admin	Provides compatibility with 4.2+ Stream **Admin** Permission.
edge_user	Provides compatibility with 4.2+ Edge **User** Permission.
edge_reader	Provides compatibility with 4.2+ Edge **Read Only** Permission.
edge_editor	Provides compatibility with 4.2+ Edge **Editor** Permission.

NAME	DESCRIPTION
edge_admin	Provides compatibility with 4.2+ Edge **Admin** Permission.
search_user	Provides compatibility with 4.2+ Search **User** Permission.
search_editor	Provides compatibility with 4.2+ Search **Editor** Permission.
search_admin	Provides compatibility with 4.2+ Search **Admin** Permission.

Cribl **strongly recommends** that you do not edit or delete these default Roles. However, you can readily clone them (see the **Clone Role** button below), and modify the duplicates to meet your needs.

Initial Installation or Upgrade

When you first install Cribl Stream with the prerequisites to enable RBAC (Enterprise license and distributed deployment), you will be granted the **admin** Role. Using this Role, you can then define and apply additional Roles for other users.

You will similarly be granted the **admin** Role upon upgrading an existing Cribl Stream installation from pre-2.4 versions to v. 2.4 or higher. This maintains backwards-compatible access to everything your organization has configured under the previous Cribl Stream version's single Role.

Adding and Modifying Roles

In a distributed environment, you manage Roles at the Leader level, for the entire deployment. On the Leader Node, select **Settings** > **Global Settings** > **Access Management** > **Roles**.

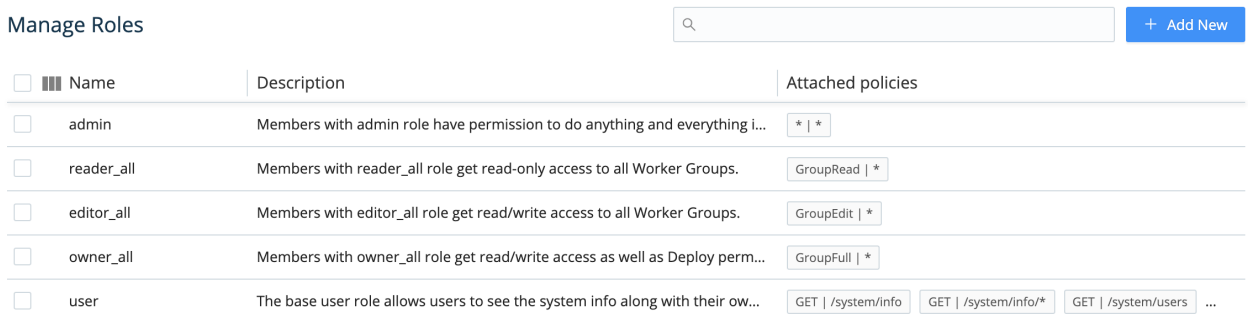

Manage Roles page

To add a new Role, click **New Role** at the upper right. To edit an existing Role, click anywhere on its row. Here again, either way, the resulting modal offers basically the same options.

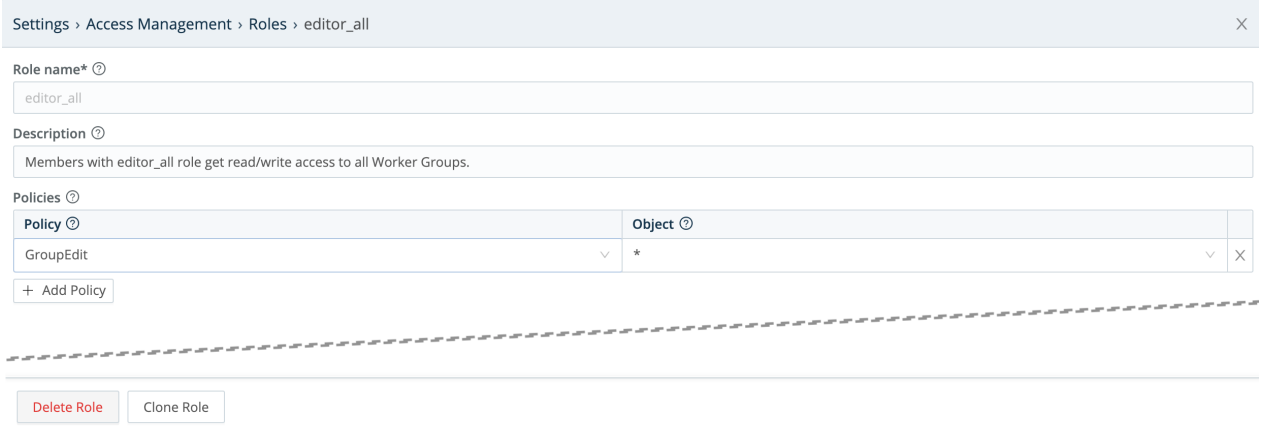

Add/edit Role modal

The options at the modal's top and bottom are nearly self-explanatory:

Role name: Unique name for this Role.

Description: Optional free-text description.

Delete Role: And...it's gone. (But first, there's a confirmation prompt. Also, you cannot delete a Role assigned to an active user.)

Clone Role: Opens a **New role** version of the modal, duplicating the **Description** and **Policies** of the Role you started with.

The modal's central **Policies** section (described below) is its real working area.

Adding and Removing Policies

The **Policies** section is an expandable table. In each row, you select a Policy using the left drop-down, and apply that Policy to objects (i.e., assign permissions on those objects) using the right drop-down.

Let's highlight an example from the above screen capture of Cribl Streams built-in Roles: The `editor_all` Role has the `GroupEdit` Policy, with permission to exercise it on any and all Worker Groups/Fleets (as indicated by the `*` wildcard).



Policies on the left, objects on the right

To add a new Policy to a Role:

1. Click **Add Policy** to add a new row to the **Policies** table.
2. Select a Policy from the left column drop-down.
3. Accept the default object on the right; or select one from the drop-down.

To modify an already-assigned Policy, just edit its row's drop-downs in the **Policies** table.

To remove a Policy from the Role, click its close box at right.

In all cases, click **Save** to confirm your changes and close the modal.

Default Policies

In the **Policies** table's left column, the drop-down offers the following default Policies:

NAME	DESCRIPTION
`GroupRead`	The most basic Worker Group/Fleet-level permission. Enables users to view a Worker Group/Fleet and its configuration, but not modify or delete the config. Counterpart to 4.2+ Worker Group-level **Read Only** Permission.
`GroupEdit`	Building on `GroupRead`, grants the ability to also change and commit a Worker Group/Fleet's configuration. Counterpart to 4.2+ Worker Group-level **Editor** Permission.
`GroupFull`	Building on `GroupEdit`, grants the ability to also deploy a Worker Group/Fleet. Counterpart to 4.2+ Worker Group-level **Admin** Permission.
`GroupCollect`	Grants the ability to create, configure, and run Collectors on a Worker Group.
`GroupUser`	Provides compatibility with 4.2+ Worker Group-level **User** Permission.
`ProjectMaintain`	Provides compatibility with 4.2+ Project-level **Maintainer** Permission.
`ProjectRead`	Provides compatibility with 4.2+ Project-level **Read Only** Permission.
`ProjectEdit`	Provides compatibility with 4.2+ Project-level **Editor** Permission.
`Product`	[Internal building block for Product-specific Policies. Do not add directly to Roles.]
`BaseProductUser`	[Internal building block for Product-specific User Policies. Do not add directly to Roles.]
`ProductUser`	Provides compatibility with 4.2+ Product-level **User** Permission.

NAME	DESCRIPTION
`LimitedProductUser`	Similar to `ProductUser`, but omits the ability to read or act on all the endpoints within a Worker Group.
`ProductAdmin`	Provides compatibility with 4.2+ Product-level **Admin** Permission.
`DatasetMaintain`	Provides compatibility with 4.2+ Search datasets **Maintainer** Permission.
`DatasetRead`	Provides compatibility with 4.2+ Search datasets **Read Only** Permission.
`DatasetProviderMaintain`	Provides compatibility with 4.2+ Search dataset providers **Maintainer** Permission.
`DatasetProviderRead`	Provides compatibility with 4.2+ Search dataset providers **Read Only** Permission.
`SearchBase`	Similar to `SearchUser`: Can view Search resources shared with the Member. [Internal building block for Search Policies. Do not add directly to Roles.]
`SearchUser`	Provides compatibility with 4.2+ Search Product-level **User** Permission.
`SearchMaintainer`	Provides compatibility with 4.2+ Search Product-level **Editor** Permission.
`MaintainBase`	[Internal building block for `Maintain` Policies. Do not add directly to Roles.]
`*` (wildcard)	Grants **all** permissions on associated objects.

> **Use Policies As-Is**
>
> By design, the default Policies that ship with Cribl Stream cannot be modified via the UI or API. Do not attempt to modify them by other means. Breaking the built-in model could undermine your intended access-control protections, opening your deployment and data to security vulnerabilities.

Objects and Permissions

In the **Policies** table's right column, use the drop-down to select the Cribl Stream objects on which the left column's Policy will apply. (Remember that in v. 2.4, the objects available for selection are specific Worker Groups/Fleets, or a wildcard representing all Worker Groups/Fleets.) For example:

- `Worker Group <id>`
- `NewGroup2`
- `default` (Worker Group)
- `*` (all Worker Groups)

Extending Default Roles

Here's a basic example that ties together the above concepts and facilities. It demonstrates how to add a Role whose permissions are restricted to a particular Worker Group/Fleet.

Here, we've cloned the `editor_all` Role that we unpacked above. We've named the clone `editor_default`.

We've kept the `GroupEdit` Policy from `editor_all`. But in the right column, we're restricting its object permissions to the `default` Worker Group/Fleet that ships with Cribl Stream.

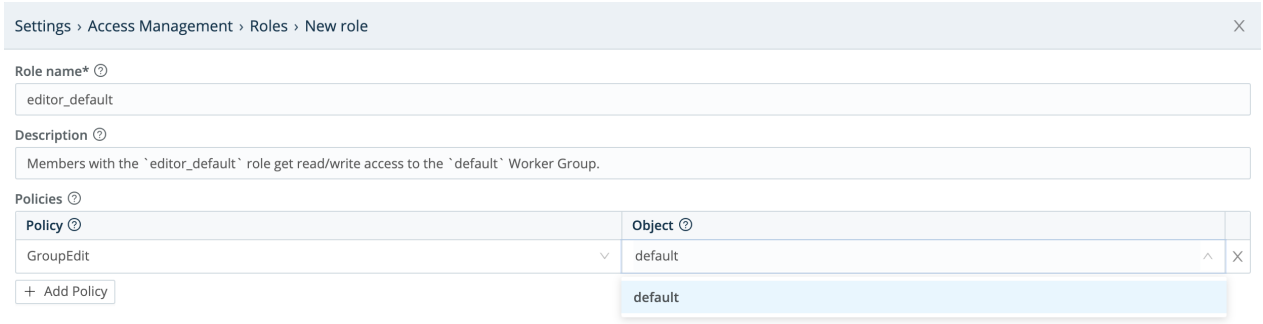

Cloning a default Role

You can readily adapt this example to create a Role that has permissions on an arbitrarily named Worker Group/Fleet of your own.

Roles and Users

Once you've defined a Role, you can associate it with Cribl Stream users. On the Leader Node, select **Settings** > **Global Settings** > **Access Management** > **Local Users**. For details, see Local Users.

Note that when you assign multiple Roles to a given user, the Roles' permissions are additive: This user is granted a superset of all the permissions contained in all the assigned Roles.

By default, Cribl Stream will log out a user upon a change in their assigned Roles. You can defeat this behavior at **Settings** > **Global Settings** > **General Settings > API Server Settings > Advanced > Logout on roles change.**

External Groups and Cribl Stream Roles

You can map user groups from external identity providers (LDAP, Splunk, or OIDC) to Cribl Stream Roles, as follows:

1. Select **Settings** > **Global Settings** > **Access Management** > **Authentication**.
2. From the **Type** drop-down, select **LDAP**, **Splunk**, or **OpenID Connect**, according to your needs.
3. On the resulting **Authentication Settings** page, configure your identity provider's connection and other basics. (For configuration details, see the appropriate Authentication section.)
4. Under **Role Mapping**, first select a Cribl Stream **Default role** to apply to external user groups that have no explicit Cribl Stream mapping defined below.
5. Next, map external groups as you've configured them in your external identity provider (left field below) to Cribl Stream Roles (right drop-down list below).
6. To map more user groups, click **Add Mapping**.
7. When your configuration is complete, click **Save**.

Here's a composite showing the built-in Roles available on both the **Default role** and the **Mapping** drop-downs:

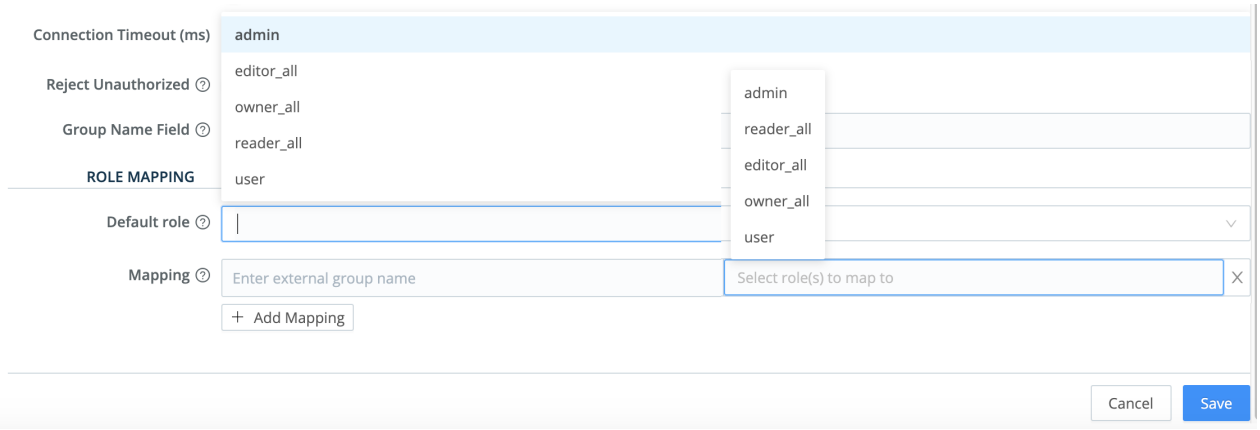

Mapping external user groups to Cribl Stream Roles

And here, we've set a conservative **Default Role** and one explicit **Mapping**:

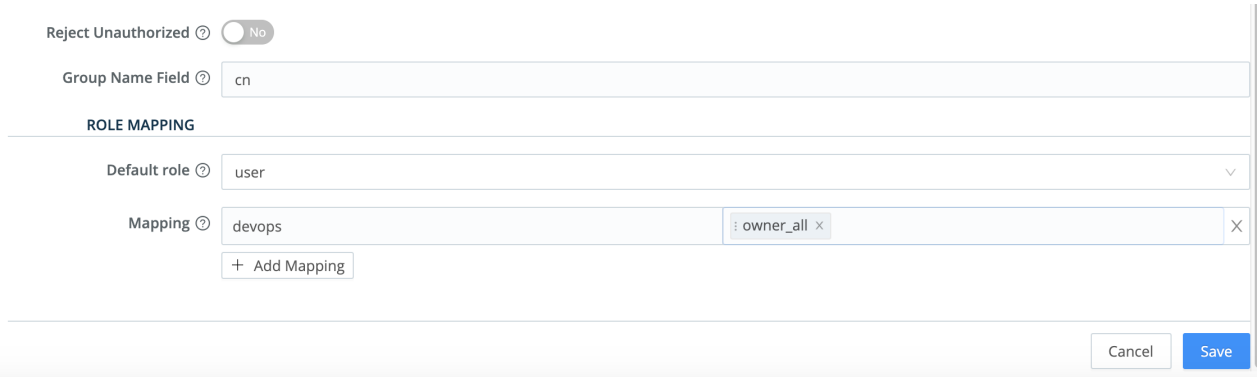

External user groups mapped to Cribl Stream Roles

6.5. SSO with Okta and OIDC

Cribl Stream supports SSO/OIDC user authentication (login/password) and authorization (user's group membership, which you can map to Cribl Roles). Using OIDC will change the default `Log in` button on the login page to a button labeled `Log in with OIDC` which redirects to the configured Identity Provider (IDP).

If you are a Cribl Stream admin and want to offer single sign-on (SSO) to your users, you can choose OpenID Connect (OIDC) as the authentication type, then configure an IDP to use OIDC within its single sign-on flow. Once configuration is complete (several steps later), the Cribl Stream login page will send users to the IDP's login UI. Besides the IDP, some settings will refer to the Service Provider (SP), which in this context is your Cribl Stream instance.

The IDP can be Okta or Google, among others. Configuring SSO requires going back and forth between Cribl Stream and the IDP's UI. In this page, we walk through the process for configuring SSO with OIDC, using Okta as the IDP.

The last part of the walkthrough is a complete description of Cribl Stream's **Authentication** settings (with OIDC selected as the authentication method), they're here. Skip directly to this section if you just need a UI reference, or if your IDP is not Okta. For non-Okta deployments, please join us on Cribl's Community Slack at https://cribl-community.slack.com/ and share your questions.

> Make sure you don't get locked out of Cribl Stream! Enable the **Allow local auth** toggle until you're certain that external auth is working as intended. If you do get locked out, refer to Manual Password Replacement for the remedy.
>
> Like other external auth methods, OpenID Connect requires either an Enterprise or a Standard license. It is not supported with a Free license.

Plan Your Mapping of Okta Groups to Cribl Stream Roles

In Okta, admins organize their users in groups. In Cribl Stream, there are no user groups, but there are Roles. Your task includes **mapping** Okta groups to Cribl Stream Roles.

- Mapping groups to Roles is possible only for Cribl Stream deployments that are in Distributed mode, with an Enterprise license applied.
- If you are running Cribl Stream in Single-instance mode, you cannot map Okta groups to Cribl Stream Roles, although you can still set up SSO with Okta.

As you think through how best to map your Okta groups to Cribl Stream Roles, keep these principles in mind:

- An Okta group can map to more than one Cribl Stream Role.
- A Cribl Stream Role can map to more than one Okta group.
- If a user has multiple Roles, Cribl Stream applies the union of the most permissive levels of access.
- Cribl Stream automatically assigns the `default` Role to any user who has no mapped Roles.

The example below illustrates how multiple mappings work: The groups in Mapping **b** and **c** each map to multiple Roles, while both the `reader_all` and `editor_cloud` Roles map to multiple groups.

MAPPING	OKTA GROUP	CRIBL STREAM ROLE(S)
a.	Cribl Admins	`admin`
b.	Cloud Admins	`reader_all`, `editor_cloud`
c.	Security Team	`reader_all`, `editor_cloud`, `editor_firewall`

Cribl Stream Roles and role mapping are supported **only** with an Enterprise license. With a Standard license, all your external users will be imported to Cribl Stream in the `admin` role.

Integrate Okta with Cribl Stream

1. Log in to your Okta tenant admin console.
2. In the left nav, select **Applications** > **Applications**.
3. Click **Create App Integration**.
    - For **Sign-in method**, select `OIDC - OpenID Connect`.
    - For **Application type**, select `Web Application`.
4. Click **Next** to open the **New Web App Integration** page.
    - In the **App name** field, enter Cribl Stream.
    - (Optional) In the **Logo** field, upload the Cribl logo. You can use a logo from the Cribl Media Kit.
    - (Optional) If you wish to keep your OIDC app hidden, check the **App visibility** check box.

5. In the **Sign-in redirect URIs** field, replace the default with your Leader base URL, and with `/api/v1/auth/authorization-code/callback` as the path. This is the Cribl Stream callback API endpoint.

6. (Optional) In the **Sign-out redirect URIs** field, append `/login` to the pre-filled path.

7. In the **Assignments** > **Controlled access** area:

    - If all your Okta users need access to Cribl Stream, select **Allow everyone in your organization to access**.
    - To permit specific Okta groups to access Cribl Stream, select **Limit access to selected groups**. Then, in the field below, add the groups you want to include. After you finish creating the app, if you need to add or remove groups, do that in the **Applications** > **Assignments** tab.

8. Click **Save**.

Okta should show an `Application Created Successfully` message.

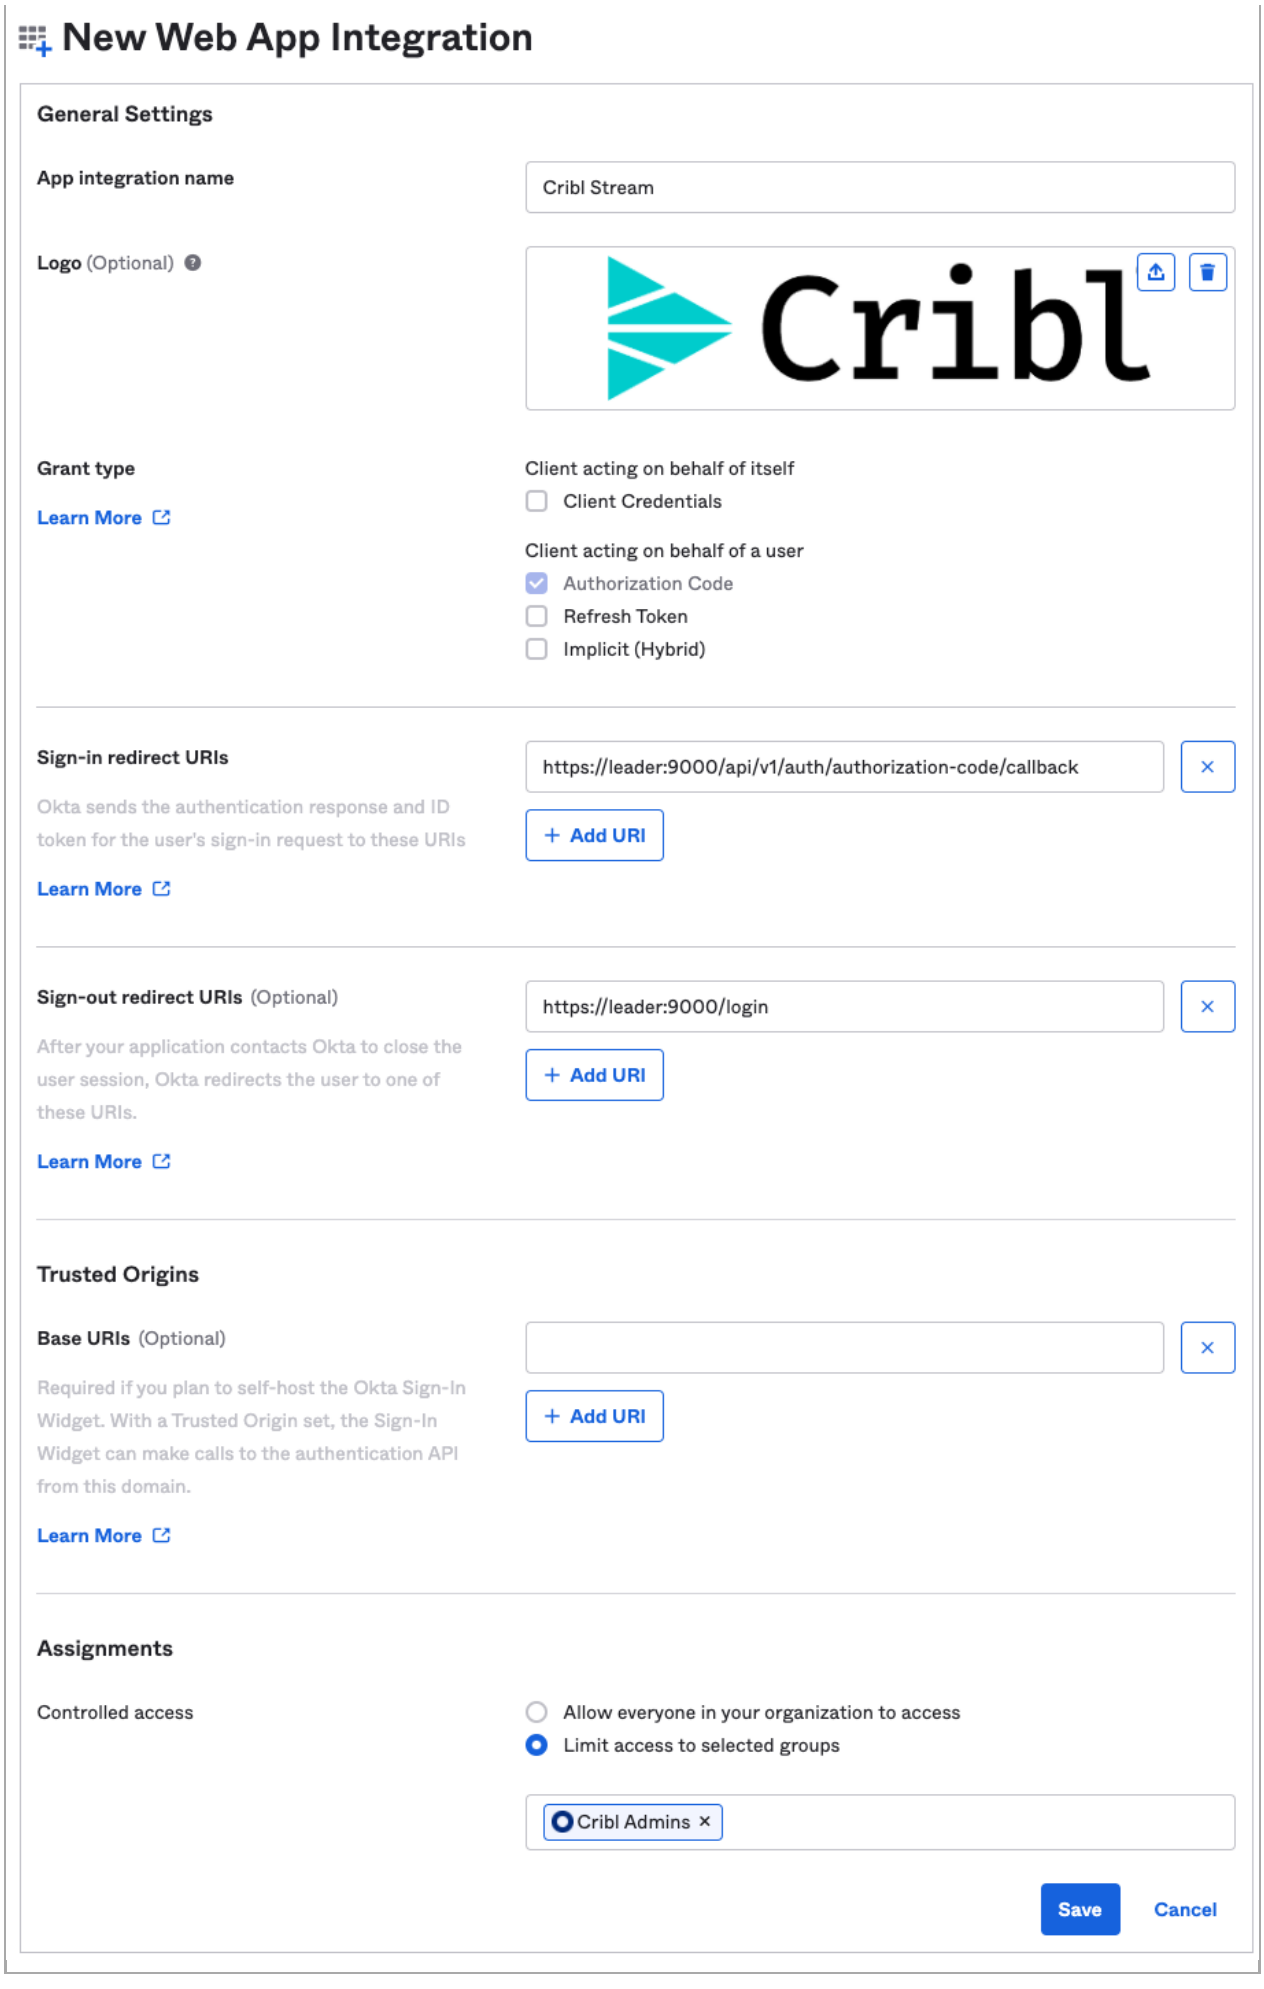
New Web App Integration
General Settings
App integration name
Cribl Stream
Logo (Optional)
Cribl
Grant type
Learn More
Client acting on behalf of itself
Client Credentials
Client acting on behalf of a user
Authorization Code
Refresh Token
Implicit (Hybrid)
Sign-in redirect URIs
Okta sends the authentication response and ID token for the user's sign-in request to these URIs
Learn More
https://leader:9000/api/v1/auth/authorization-code/callback
+ Add URI
Sign-out redirect URIs (Optional)
After your application contacts Okta to close the user session, Okta redirects the user to one of these URIs.
Learn More
https://leader:9000/login
+ Add URI
Trusted Origins
Base URIs (Optional)
Required if you plan to self-host the Okta Sign-In Widget. With a Trusted Origin set, the Sign-In Widget can make calls to the authentication API from this domain.
Learn More
+ Add URI
Assignments
Controlled access
Allow everyone in your organization to access
Limit access to selected groups
Cribl Admins ×
Save
Cancel

Copy Your Okta App's Client ID and Client Secret

In the **Client Credentials** panel, copy both the **Client ID** and **Client Secret**, and temporarily store them locally. You will need them in the next step, when you configure Cribl Stream.

Begin Configuring OIDC Auth in Cribl Stream

> The only OAuth 2.0 flow that Cribl Stream supports is the Authorization Code Grant flow.
>
> In version 3.0 and higher, Cribl Stream's former "master" application components are renamed "leader." Above, while some legacy terminology remains within URLs, this document will reflect that.

In Cribl Stream, select **Settings** > **Access Management** > **Authentication**.

1. Choose `OpenID Connect` from the **Type** dropdown.
2. Choose `Okta` from the **Provider** dropdown.
3. In the **Audience** field, enter your Cribl Stream UI base URL. Do **not** append a trailing slash.
4. In the **Client ID** and **Client secret** fields, enter the respective values that you copied from the Okta UI in the previous step.
5. If your Cribl Stream is in Enterprise Distributed mode:

   In the **Scope** field, add the scope `groups` to the default space-separated list of scopes, which is: `openid profile email`.
6. Obtain the authentication, token, user info, and logout URLs for your Okta app, by sending a request to the OpenID Connect Discovery endpoint.

   - This endpoint has the URL:
     `https://<tenant>.okta.com/.well-known/openid-configuration`

     ...where `<tenant>` is your Okta tenant name. For example:
     `https://dev-12345678.okta.com/.well-known/openid-configuration`

- You can view the discovery document in your web browser, or use jq to extract the needed values, as in the following example:

  ```
  curl -s https://<tenant>.okta.com/.well-known/openid-configuration | jq '. | {"auth": (.authorization_endpoint), "token":(.token_endpoint), "userinfo": (.userinfo_endpoint), "logout": (.end_session_endpoint)}'
  ```

- Sample response:

  ```
  { "auth": "https://dev-416897.oktapreview.com/oauth2/v1/authorize", "token": "https://dev-416897.oktapreview.com/oauth2/v1/token", "userinfo": "https://dev-416897.oktapreview.com/oauth2/v1/userinfo", "logout": "https://dev-416897.oktapreview.com/oauth2/v1/logout" }
  ```

7. Populate the **Authentication URL Token URL** fields with the respective `auth` and `token` URLs.

8. If you configured Okta to use groups, populate the **User info URL** field with the `userinfo` URL.

   This is necessary because Okta does not send group information in the `id_token` passed to Cribl Stream.

9. If you want **Account** > **Log out** in Cribl Stream to log the user out **globally**, populate the **Logout URL** field with the `logout` URL. This means that when a user clicks the **Accounts** > **Log out** link in Cribl Stream, they are logged out of **both** Cribl Stream and Okta.

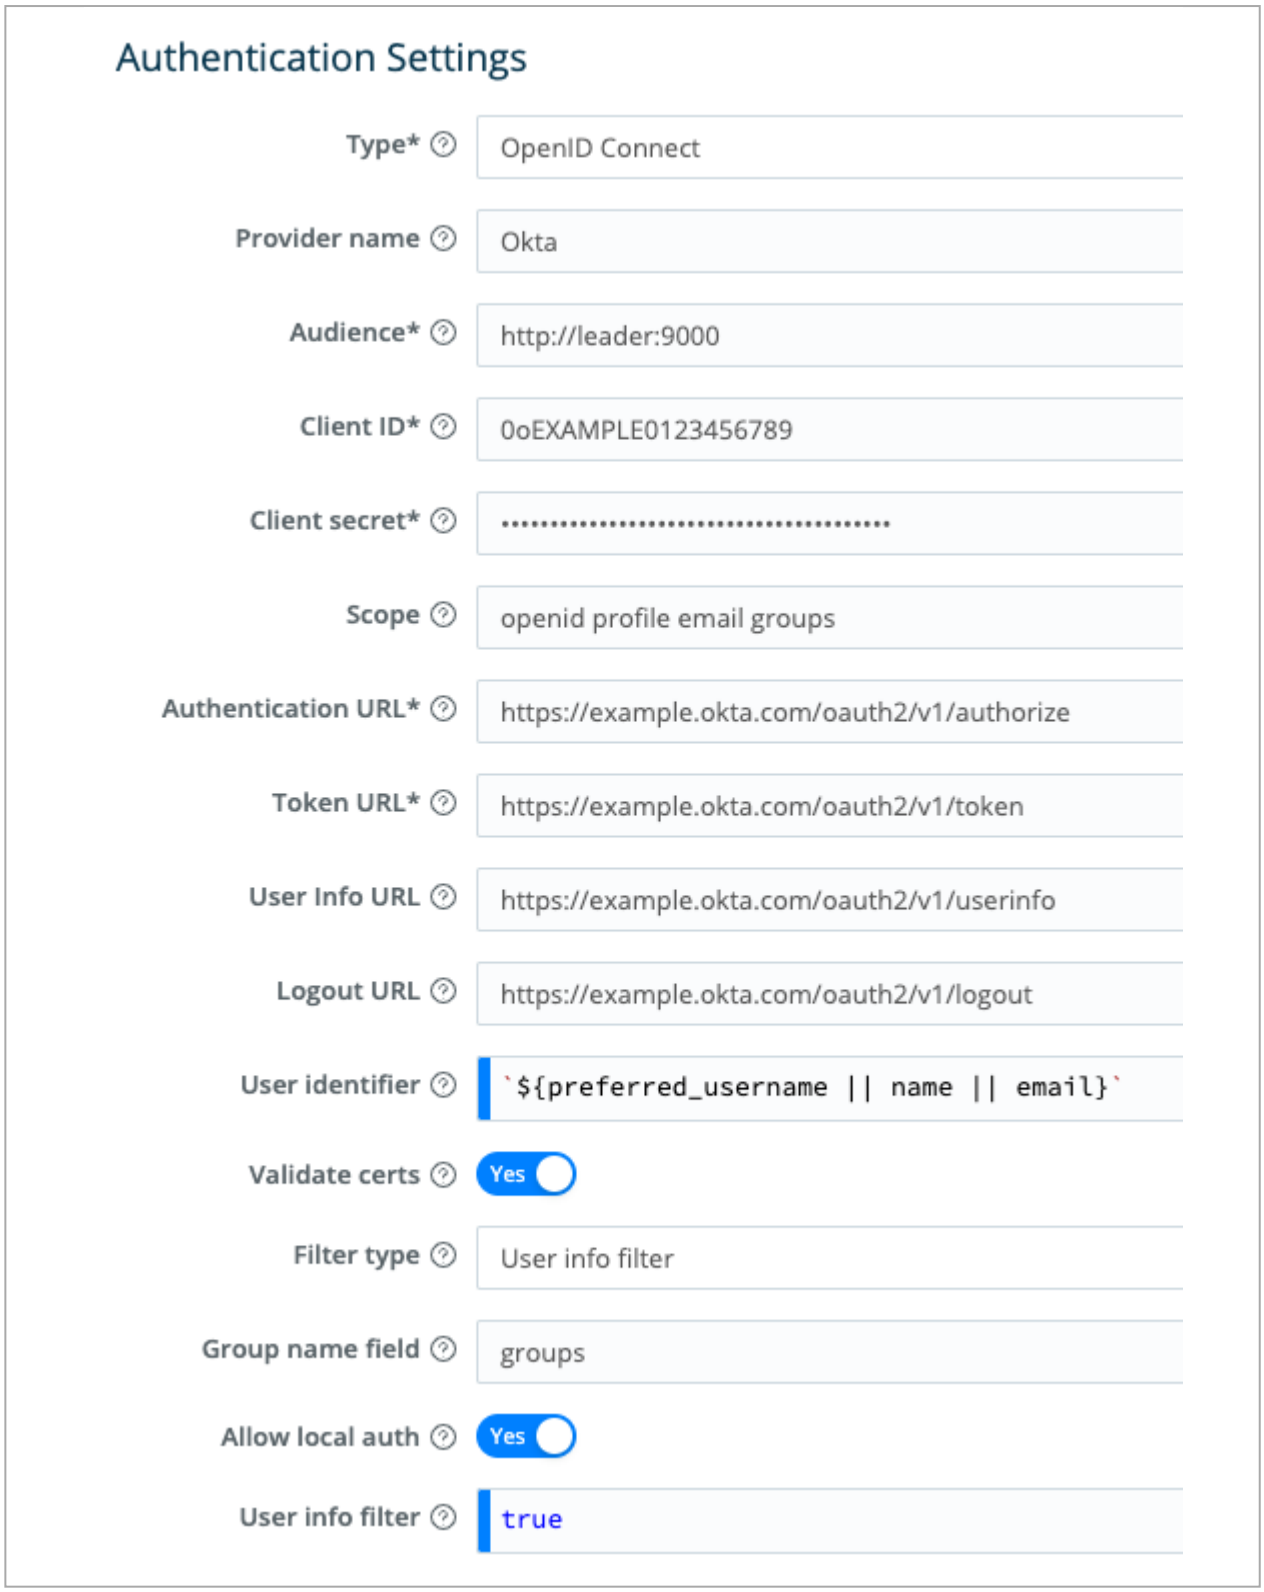

Authentication settings in Cribl Stream

Configure Response to Okta `/userinfo` Endpoint

An Okta tenant's user groups can be mastered either inside Okta, outside Okta, or both.

When the `/userinfo` endpoint is queried, Okta returns the appropriate groups membership of the user back to Cribl Stream:

- For groups mastered inside Okta only, the app should pass a `Filter` type groups claim to Cribl Stream.
- For groups mastered outside Okta (e.g., Active Directory), or both inside and outside, the app should pass an `Expression` type groups claim back to Cribl Stream.

See the Okta documentation on dynamic allow lists and using Okta together with Active Directory.

In Okta, you should still be in the panel for the app you created. If not, you can get there by opening **Applications** > **Applications** and selecting the app.

- For groups mastered **inside** Okta only, complete this procedure.
- For groups mastered **outside** Okta, or both inside and outside, complete this procedure.

Configure Groups Inside of Okta

Open the **Sign On** tab. Then, in the **OpenID Connect ID Token** panel:

1. Click **Edit** to change the value of **Groups claim filter** to `groups` and show filter options.
2. Leave **Groups claim type** set to `Filter`.
3. Choose **Matches regex** from the dropdown, and enter `.*` as the regex.
4. Click **Save**.

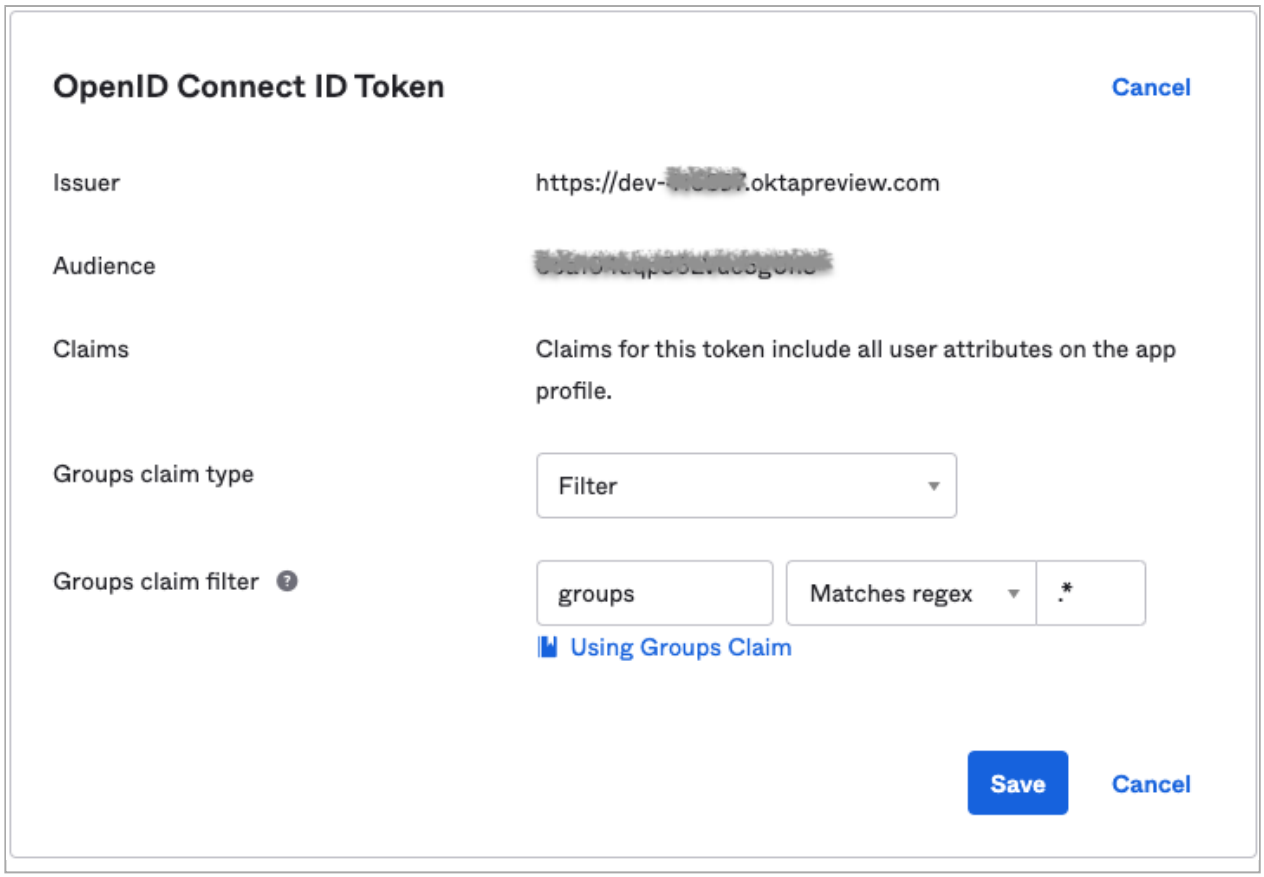

Role mapping, beginning

Configure Groups Outside of Okta

Open the **Sign On** tab, if necessary. Then, in the **OpenID Connect ID Token** panel:

1. Click **Edit** to change the value of **Groups claim filter** to `groups` and show filter options.
2. Set **Groups claim type** set to `Expression`.
3. In the **Groups claim expression**, enter an expression field that matches the groups you want passed to Cribl Stream. See the Okta documentation for more details.

   For example, to match on Active Directory groups that contain the string `okta`, use the following expression:

   ```
   Groups.contains("active_directory", "cribl", 10)
   ```

4. Click **Save**.

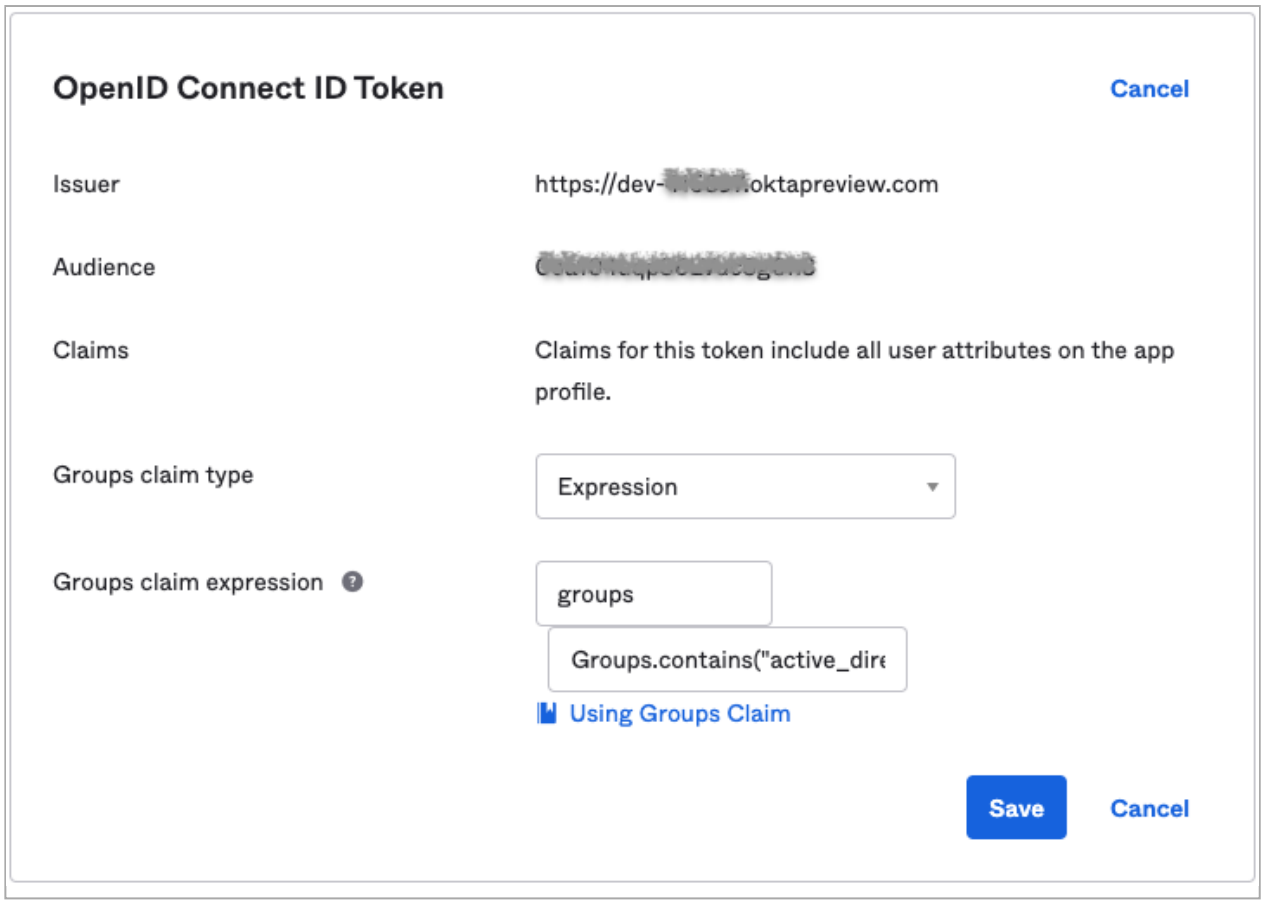

Role mapping, continued

Configure ID Token to Include Groups Claim

> Okta can recognize your groups **only** if your ID token includes your groups claim, as you'll configure here.

1. In Okta, open the **Security** > **API** page.
2. In the **Authorization Servers** tab, click the edit (pencil) button for the desired Authorization Server.
3. In the resulting page, click the **Claims** tab.
4. If your groups claim already exists, click the edit (pencil) button. Otherwise, click **Add Claim**.
5. In the **Include in token type** drop-downs, choose `ID Token` and `Always`, respectively.

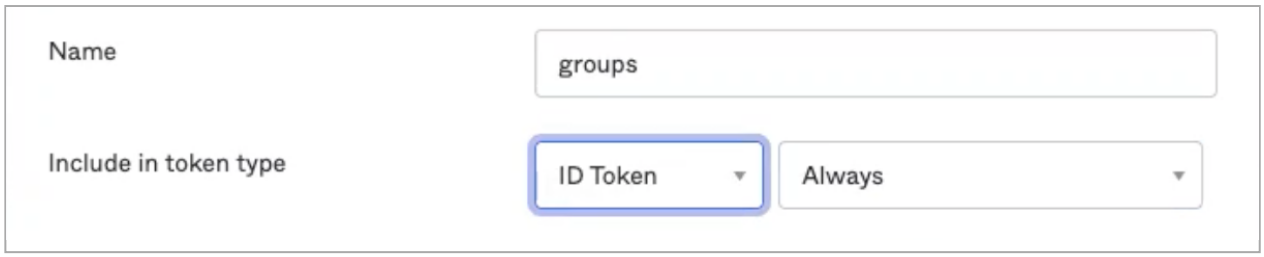

Including the groups claim in the token ID

6. Configure the remaining settings in the way that suits your groups claim.

7. Click **Save** (or **Create** if you're adding the claim for the first time).

Finish Configuring OIDC Auth in Cribl Stream

> This section documents the entire Cribl Stream Authentication UI. If you have been working through the procedures from earlier in this page, you will have completed some of the following steps already.

Navigate to **Settings** > [**Global Settings** >] **Access Management > Authentication > Type** and select **OpenID Connect**. This exposes the following controls.

- **Provider name**: The name of the identity provider service. You can select **Google** or **Okta**, both supported natively. Manual entries are also allowed.
- **Audience (SP entity ID)**: The base URL, e.g.: `https://leader.yourDomain.com:9000` for a distributed environment. For the IDP, this serves as a unique identifier for the SP (i.e., your Cribl Stream instance).

  > For distributed environments with a second Leader configured, modify the **Audience** field to point to the load balancer instead of the Leader Node.

- **Client ID**: The `client_id` from provider configuration.
- **Client secret**: The `client_secret` from provider configuration.
- **Scope**: Space-separated list of authentication scopes. The default list is: `openid profile email`. If you populate the **User info URL** field, you must add `groups` to this list.
- **Authentication URL**: The full path to the provider's authentication endpoint. Be sure to configure the callback URL at the provider as `<masterServerFQDN>:9000/api/v1/auth/authorization-`

`code/callback`, e.g.: `https://leader.yourDomain.com:9000/api/v1/auth/authorization-code/callback`.

- **Token URL**: The full path to the provider's access token URL.
- **User info URL**: The full path to the provider's user info URL. Optional; if not provided, Cribl Stream will attempt to gather user info from the ID token returned from the **Token URL**.
- **Logout URL**: The full path to the provider's logout URL. Leave blank if the provider does not support logout or token revocation.
- **User identifier**: JavaScript expression used to derive `userId` from the `id_token` returned by the OpenID provider.
- **Validate certs**: Whether to validate certificates. Defaults to `Yes`. Toggle to `No` to allow insecure self-signed certificates.
- **Filter type**: Select either **Email allowlist** or **User info filter**. This selection displays one of the following fields:
  - **Email allowlist**: Wildcard list of emails/email patterns that are allowed access.
  - **User info filter**: JavaScript expression to filter against user profile attributes. E.g.: `name.startsWith("someUser") && email.endsWith("domain.com")`
- **Group name field**: Field in the **User info URL** response (if configured); otherwise, `id_token` that contains the user groups. Defaults to `groups`.
- **Allow local auth**: Toggle to `Yes` to also users to log in using Cribl Stream's local authentication. This enables an extra button called `Log in with local user` on the Cribl Stream login page. (This option ensures fallback access for local users if SSO/OpenID authentication fails.)

> To prevent lockout, Cribl strongly recommends enabling **Allow local auth** until you're certain that external auth is working as intended. If you do get locked out, see Manual Password Replacement.

- **Email allowlist**: Wildcard list of emails/email patterns that are allowed access.

Note the following details when filling in the form – for example, when using Okta:

- `<Issuer URI>` is the account at the identity provider.
- `Audience` is the URL of the host that will be connecting to the Issuer (e.g., `https://leader.yourDomain.com:9000` for a distributed environment). The issuer (Okta, in this

example) will redirect back to this site upon authentication success or failure.

- `User info URL` is required, because Okta doesn't encode groups in `id_token`. Azure AD and Google also rely on this field.

Role Mapping Settings

This section is displayed only on **distributed** deployments (Edge, Stream) with an Enterprise License. For details on mapping your external identity provider's configured groups to corresponding Cribl Stream user access Roles, see External Groups and Roles. The controls here are:

- **Default role**: Default Cribl Stream Role to assign to all groups not explicitly mapped to a Role.
- **Mapping**: Add a mapping for each external user group that you want to map to one or more Cribl roles. Then enter the group and select the role(s).

See also the explanation of role mapping above.

Role Mapping Example

Role mapping UIs will differ from one IDP to another. For this example, we'll look at Okta's.

You can assign a Cribl Stream Role to each Okta group name, and you can specify a `default` Role for users who are not in any groups.

1. In Cribl Stream, select **Settings** > **Access Management** > **Authentication**.
2. Scroll down to the **ROLE MAPPING** section.

   Cribl recommends that you set the `default` Role to `user`, meaning that this Role will be assigned to users who are not in any groups.
3. Add mappings as needed.

   The Okta group names in the left column are case-sensitive, and must match the values returned by Okta (those you saw earlier when configuring Okta and OIDC).

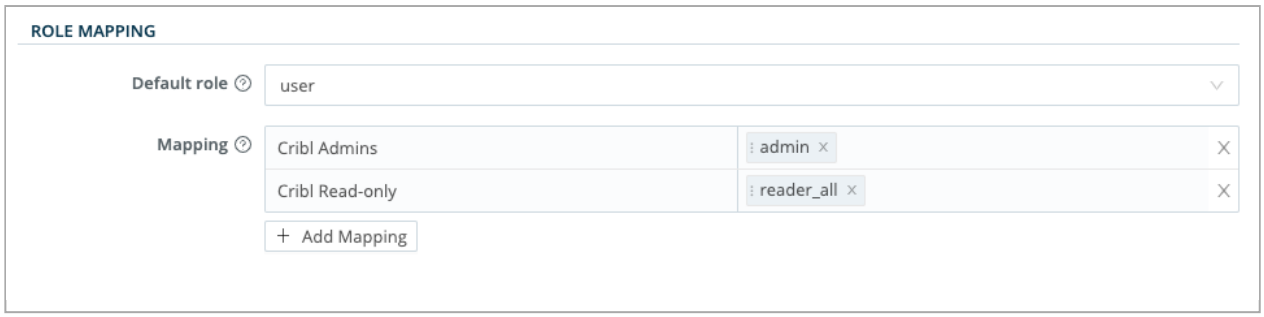

Role mapping, concluded

Verify that SSO with Okta Is Working

1. Log out of Cribl Stream, and verify that Okta is now an option on the login page.
2. Click **Log in with Okta**.
3. You should be redirected to Okta to authenticate yourself.
4. The OpenID connect flow should complete the authentication process.

Getting Temporary Access Credentials for AWS S3 Buckets

You can use your SSO/OIDC IDP to issue temporary access credentials so your on-prem Worker Node can access AWS S3 buckets.

Set the `AWS_WEB_IDENTITY_TOKEN_FILE` environment variable. This variable defines a path to a file that contains the OAuth/OIDC provided by the SSO IDP. You'll also need to define `AWS_ROLE_ARN` and `AWS_ROLE_SESSION_NAME`.

You can use curl/Postman to make the required API calls.

Troubleshooting Resources

Cribl University's Troubleshooting Criblet on SSO Integration for Stream On-Prem - Okta walks you through this whole configuration flow. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.)

Once logged in, check out other useful Troubleshooting Criblets and Advanced Troubleshooting short courses.

6.6. SSO with Okta and SAML

Cribl Stream supports SSO/SAML user authentication (login/password) and authorization (user's group membership, which you can map to Cribl Roles). Using SAML will change the default `Log in` button on the login page to a button labeled `Log in with SAML 2.0` which redirects to the configured Identity Provider (IDP).

If you are a Cribl Stream admin and want to offer single sign-on (SSO) to your users, you can choose SAML 2.0 as the authentication type, then configure an IDP to use SAML within its single sign-on flow. Once configuration is complete (several steps later), the Cribl Stream login page will send users to the IDP's login UI. Besides the IDP, some settings will refer to the Service Provider (SP), which in this context is your Cribl Stream instance.

The IDP can be Okta or Google, among others. Configuring SSO requires going back and forth between Cribl Stream and the IDP's UI. In this page, we walk through the process for configuring SSO with SAML, using Okta as the IDP.

The last part of the walkthrough is a complete description of Cribl Stream's **Authentication** settings (with SAML 2.0 selected as the authentication method) is here. Skip directly to this section if you just need a UI reference, or if your IDP is not Okta. For non-Okta deployments, please join us on Cribl's Community Slack at https://cribl-community.slack.com/ and share your questions.

> Make sure you don't get locked out of Cribl Stream! Enable the **Allow login as Local User** toggle until you're certain that external auth is working as intended. If you do get locked out, refer to Manual Password Replacement for the remedy.
>
> SSO with SAML is supported only in Cribl Stream versions 4.1.0 and later.
>
> Like other external auth methods, SAML requires either an Enterprise or a Standard license. It is not supported with a Free license.

Plan Your Mapping of Okta Groups to Cribl Stream Roles

In Okta, admins organize their users in groups. In Cribl Stream, there are no user groups, but there are Roles. Your task includes **mapping** Okta groups to Cribl Stream Roles.

- Mapping groups to Roles is possible only for Cribl Stream deployments that are in Distributed mode, with an Enterprise license applied.

- If you are running Cribl Stream in Single-instance mode, you cannot map Okta groups to Cribl Stream Roles, although you can still set up SSO with Okta.

As you think through how best to map your Okta groups to Cribl Stream Roles, keep these principles in mind:

- An Okta group can map to more than one Cribl Stream Role.
- A Cribl Stream Role can map to more than one Okta group.
- If a user has multiple Roles, Cribl Stream applies the union of the most permissive levels of access.
- Cribl Stream automatically assigns the `default` Role to any user who has no mapped Roles.

The example below illustrates how multiple mappings work: The groups in Mapping **b** and **c** each map to multiple Roles, while both the `reader_all` and `editor_cloud` Roles map to multiple groups.

MAPPING	OKTA GROUP	CRIBL STREAM ROLE(S)
a	Cribl Admins	`admin`
b	Cloud Admins	`reader_all`, `editor_cloud`
c	Security Team	`reader_all`, `editor_cloud`, `editor_firewall`

Cribl Stream Roles and role mapping are supported **only** with an Enterprise license. With a Standard license, all your external users will be imported to Cribl Stream in the `admin` role.

Begin Configuring SAML Auth in Cribl Stream

Navigate to **Settings** > [**Global Settings** >] **Access Management > Authentication > Type** and select **SAML 2.0**.

In the **Audience (SP entity ID)** field, enter the base URL of your Cribl Stream instance, e.g., `https://yourDomain.com:9000`. Do **not** append a trailing slash.

> For distributed environments with a second Leader configured, modify the **Audience** field to point to the load balancer instead of the Leader Node.

This will populate three more fields:

- **Sign-on callback URL**

- **Logout callback URL**
- **Metadata URL**

Note the values of all four fields for use in the next section.

If you want the requests that Cribl Stream sends to the IDP to be signed, select or create a **Request certificate**.

- Note the public key for the certificate that you select or create, for use in the next section.

Integrate Okta with Cribl Stream

In this section, we'll create an Okta app that uses SAML and integrates with Cribl Stream.

Configure General Settings (Part 1)

1. Log in to your Okta tenant admin console.
2. In the left nav, select **Applications** > **Applications** to open the Part **1**, **General Settings** page.
3. Click **Create App Integration**.
    - For **Sign-in method**, select `SAML 2.0`.
4. Click **Next** to open the **Create SAML Integration** page.
    - In the **App name** field, enter Cribl Stream.
    - (Optional) In the **Logo** field, upload the Cribl logo. You can use a logo from the Cribl Media Kit.
    - (Optional) If you wish to keep your SAML app hidden, check the **App visibility** check box.

Configure SAML (Part 2)

1. Click **Next** to open the **Configure SAML** > part **A**, **SAML Settings** page. Configure these settings as follows:
    - **Single sign-on URL**: Enter the Cribl Stream **Sign-on callback URL**.
    - **Audience URI (SP Entity ID)**: Enter the Cribl Stream **Audience (SP entity ID)**.
    - **Default RelayState**: Leave blank.

- **Name ID format**: Leave as `Unspecified` (the default).
- **Application username**: Specify a username; can be a plain username, an email, or a custom username. In the SAML assertion's `subject` statement, this is the value for `NameID`. By default, Cribl Stream will use this value as the username in Stream. Alternatively, you can set a custom attribute statement in Okta (as described in Step 2 below), then set the **Username field** in Cribl Stream to use that instead.
- **Update application username on**: Leave as is (`Create and update`).
- (Optional) Click **Show Advanced Settings** if you want to configure Single Logout, SAML response encryption, etc., as described below.

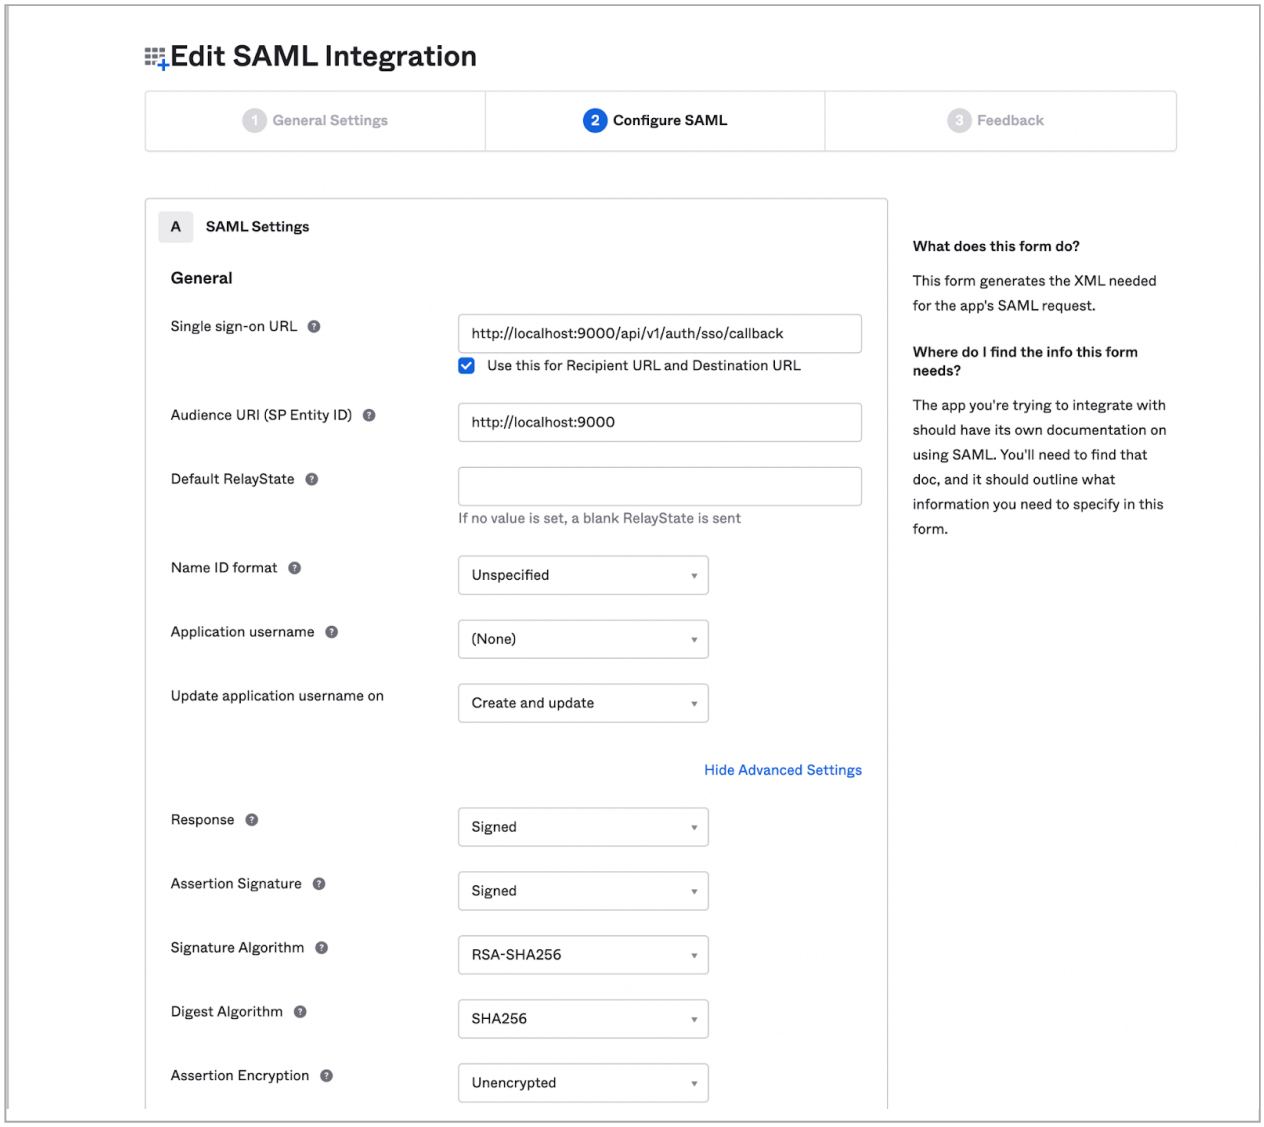

Configuring SAML (Part 2)

2. (Optional) Define custom **Attribute Statements** that Okta will insert in the SAML Assertions shared with Cribl Stream. The only use case that Cribl Stream supports for this setting is creating a custom

Application username, as described in the previous step.

3. (Optional) Configure **Group Attribute Statements**. Similar to the previous step, except that here, Cribl Stream supports creating a custom attribute whose value is one or more Okta groups that will populate Cribl Stream's **Group name field**.

4. In Part **B**, if you want to see your SAML assertion in XML form, click **Preview the SAML assertion generated from the information above**.

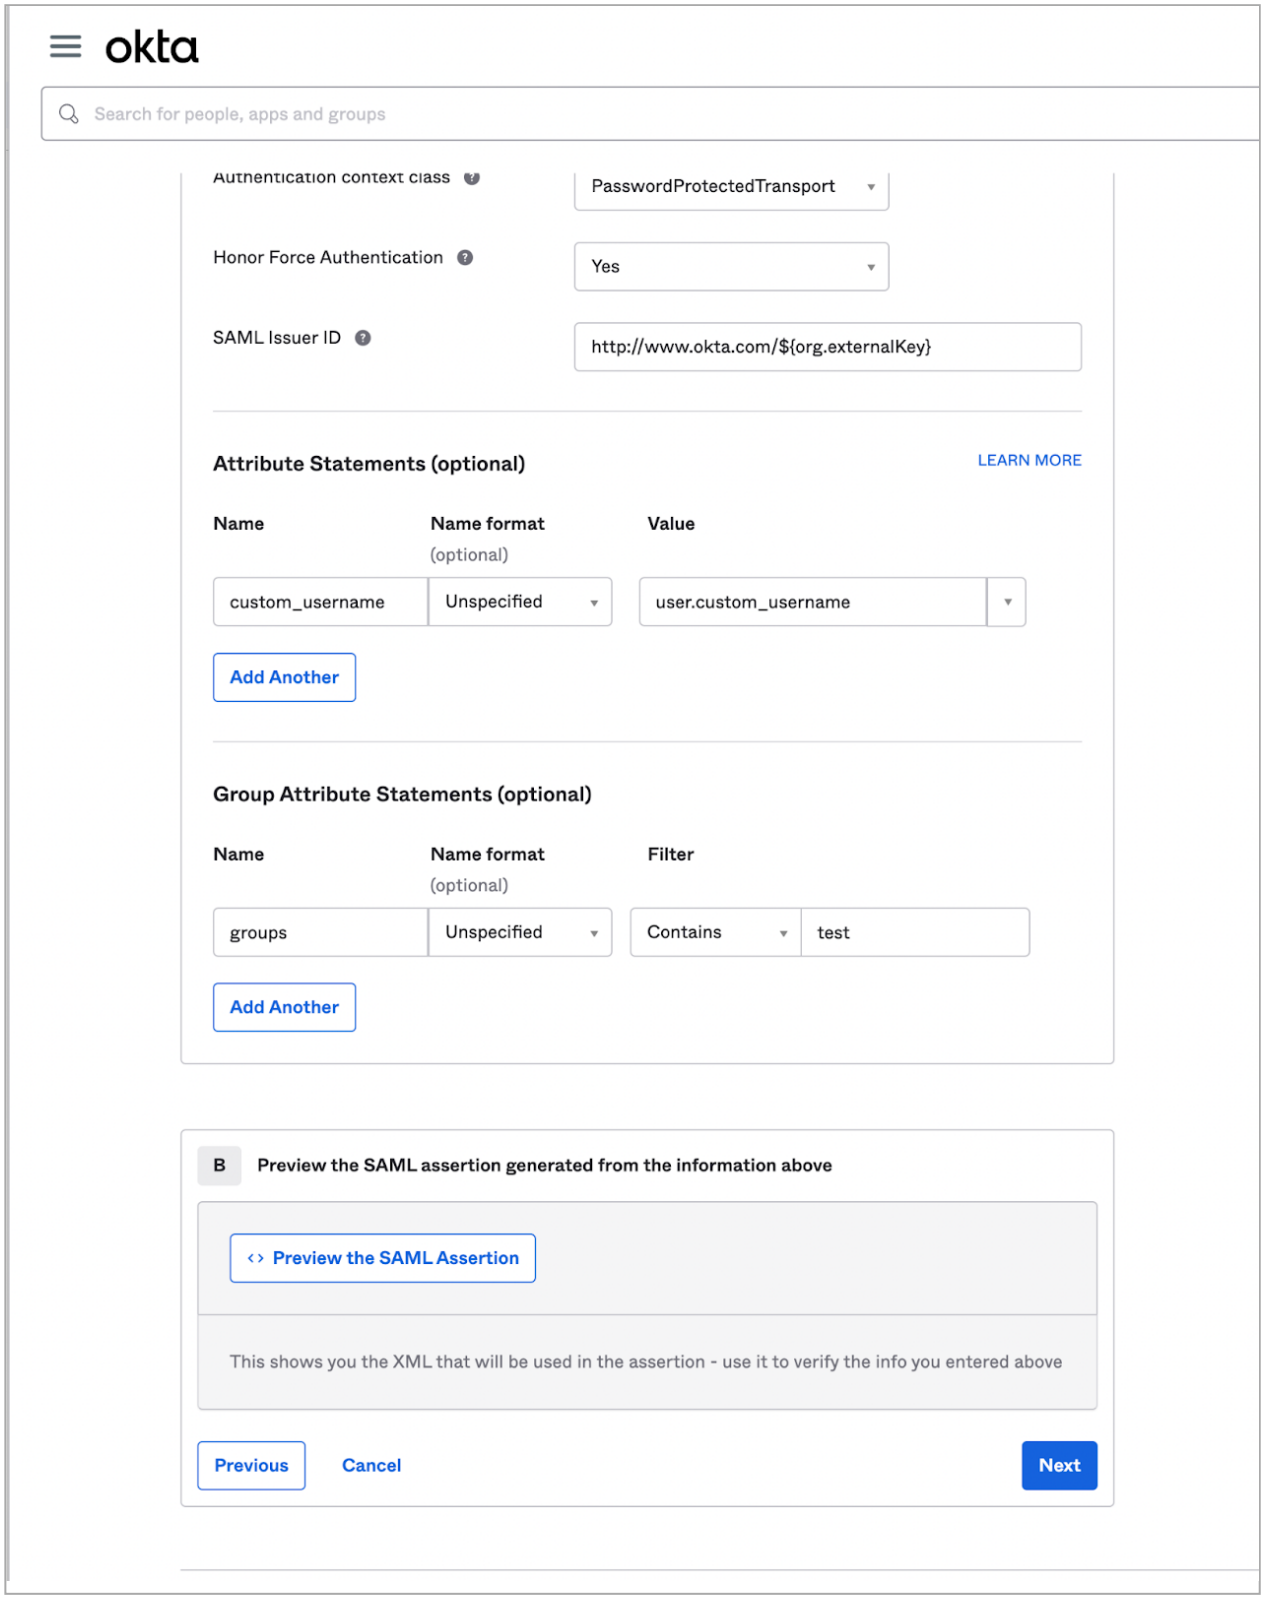

Copy Your App's Metadata to Cribl Stream (Part 3)

1. Click **Next** to open the **Feedback** page, whose fields are self-explanatory, and click **Finish**. Okta takes you to the **Sign On** tab for your newly-created application.

2. Under **SAML Setup** in the right margin, click **View SAML setup instructions** to open the **How to Configure SAML 2.0 ...** page.

3. Copy each value below to its corresponding field in Cribl Stream. Values that you did not configure above will not appear on the page.

SAML APP VALUE	CRIBL STREAM FIELD
Identity Provider Single Sign-On URL	**Single sign-on (SSO) URL**
Identity Provider Single Logout URL	**Single logout (SLO) URL**
Identity Provider Issuer	**Issuer (IDP entity ID)**
X.509 Certificate	**Response validation certificate**

Ignore the **Provide the following IDP metadata to your SP provider** text box. Cribl Stream does not support ingesting metadata in this form.

Advanced Settings

The **Configure SAML** > part **A**, **SAML Settings** page offers these **Advanced Settings**:

Response: This is the SAML response object; it contains an `Assertion` sub-field. Leave this setting as `Signed` (the default), because this is the only alternative that Cribl Stream supports.

Assertion Signature: This applies to the `Assertion` sub-field within the SAML response object. Defaults to `Signed`, but that has no practical effect because Cribl Stream assumes that the whole SAML response object is signed anyway.

Signature Algorithm Select your preferred algorithm for signing the response that the IDP sends to Cribl Stream.

Digest Algorithm: Select your preferred hashing algorithm for the response that the IDP sends to Cribl Stream.

Assertion Encryption: Choose `Encrypted` if you want the IDP to encrypt the response that it sends to Cribl Stream. Setting this to `Encrypted` displays the following three additional options:

- **Encryption Algorithm**: Select your preferred algorithm for encrypting the SAML response.
- **Key Transport Algorithm**: Select your preferred algorithm for encrypting the encryption key itself.
- **Encryption Certificate**: Upload the public key of the Cribl Stream **Response decryption certificate** you selected or created in Cribl Stream.

Signature Certificate: Upload the public key of the Cribl Stream **Request certificate** you selected or created in Cribl Stream.

Enable Single Logout: Check the checkbox if you want Cribl Stream to send a logout request to Okta upon logout of the Cribl Stream user. Doing this displays the following two additional options that use values from earlier in these instructions:

- **Single Logout URL**: Enter the value that Cribl Stream provided for **Logout callback URL**.
- **SP Issuer**: Enter the URL that you entered for the **Audience** setting in the Cribl Stream UI.

Signed Requests: Check the checkbox if you want Okta to validate the signatures of SAML requests that come from Cribl Stream.

Other Requestable SSO URLs, **Assertion Inline Hook**, **Authentication context class**, and **Honor Force Authentication**: Ignore these settings (which are not supported by Cribl Stream).

SAML Issuer ID: Enables you to override Okta's default value for **Identity Provider Issuer**.

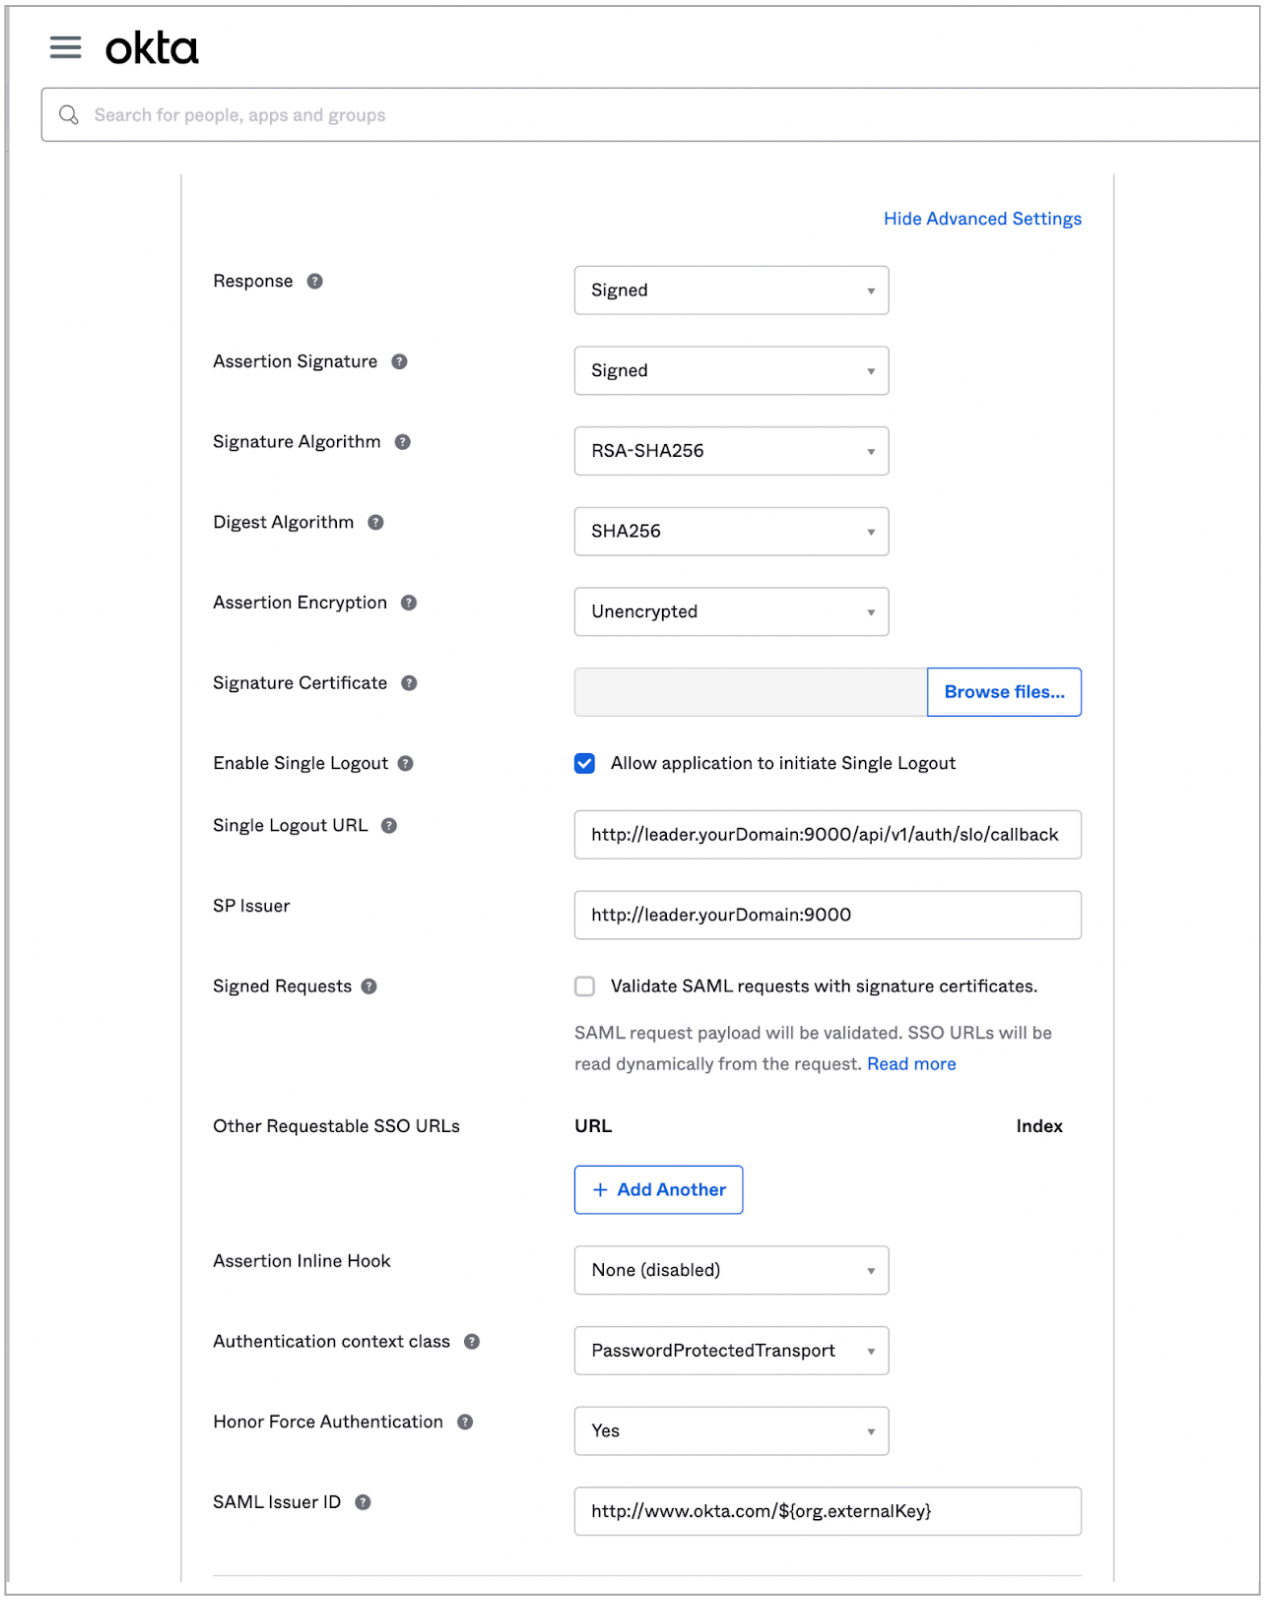

Okta Advanced Settings

Finish Configuring SAML Auth in Cribl Stream

> This section documents the entire Cribl Stream Authentication UI. If you have been working through the procedures from earlier in this page, you will have completed some of the following steps already.

Navigate to **Settings** > [**Global Settings** >] **Access Management** > **Authentication**. This exposes the following controls.

Audience (SP entity ID): The base URL, e.g.: `https://leader.yourDomain.com:9000` for a distributed environment. For the IDP, this serves as a unique identifier for the SP (i.e., your Cribl Stream instance).

> For distributed environments with a second Leader configured, modify the **Audience** field to point to the load balancer instead of the Leader Node.

Once you enter a URL here, Cribl Stream will automatically populate the following three read-only fields. Copy the values for use in your IDP's UI.

- **Sign-on callback URL**: URL where the SP (Cribl Stream) will consume assertions (i.e., will receive SAML authentication responses from the IDP).
- **Logout callback URL**: URL where the SP (Cribl Stream) will receive SAML logout responses from the IDP.
- **Metadata URL**: URL that exposes a description of the SP (Cribl Stream), including endpoints, certificates, and metadata. Typically, you paste this URL into an **import metadata from URL** or similar field during setup of IDPs that support such an option.

Request certificate: Certificate the SP (Cribl Stream) should use to sign requests. Create a new certificate, or choose one that you imported as described here. Typically pasted into a **Signature Certificate**, **Verification Certificate**, or similar field during IDP setup. Required by some but not all IDPs; for example, when SLO is enabled, Okta requires signed requests.

Issuer (IDP entity ID): Unique ID of the IDP. In the IDP's UI, typically called **Identity Provider Issuer**, **IDP Identifier**, or similar.

Single sign-on (SSO) URL: Endpoint to which authentication requests will be sent (i.e., the IDP's single sign-on service). In the IDP's UI, typically called **Login URL**, **Single Sign-On URL**, or similar.

Single logout (SLO) URL: Endpoint to which logout requests will be sent (i.e., IDP's single logout service). Setting this will enable single logout initiated from the SP (Cribl Stream).

Request binding: Type of binding for SAML requests sent to the identity provider's SSO/SLO services.

Response validation certificate: The certificate that the SP (Cribl Stream) should use to validate signed responses. Provided by the IDP; contains a public key.

> If, in Okta, you have set **Assertion Encryption** to `Encrypted`, then, in Cribl Stream you must both specify a certificate in **Response decryption certificate** below, and, set **Order of encrypting and signing** to `encrypt-then-sign`.

Response decryption certificate: Certificate the SP (Cribl Stream) should use to decrypt encrypted responses. Obtain this from the IDP, where it is typically labeled **Token Encryption**, **Encryption Certificate**, or similar. Create a new certificate, or choose one that you imported as described here.

Order of encrypting and signing: Specify the order in which the IDP signs and encrypts responses, if you've configured it to do that. Requires a **Response decryption certificate** to be set.

Username field: In the SAML response, the element from which Cribl Stream should extract the user identifier.

- Defaults to `NameID`, which is an element in the `Subject` block, for example:

```
<saml:Subject>
    <saml:NameID Format="urn:oasis:names:tc:SAML:1.1:nameid-format:unspecified">idp
user</saml:NameID>
    <saml:SubjectConfirmation Method="urn:oasis:names:tc:SAML:2.0:cm:bearer">
        <saml:SubjectConfirmationData NotOnOrAfter="2014-02-22T01:20:27.956Z"

Recipient="http://localhost/ExampleServiceProvider/SAML/AssertionConsumerService.as
    </saml:SubjectConfirmation>
</saml:Subject>
```

- Alternatively, if you want to set the username via a custom Attribute when configuring the IDP, you can use the `AttributeStatement` block, for example:

```
<AttributeStatement>
    <Attribute Name="urn:oid:2.5.4.42" FriendlyName="givenName"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:uri">
        <AttributeValue>Dave</AttributeValue>
    </Attribute>
</AttributeStatement>
```

- When you are using a custom Attribute as in the previous bullet point, the value for **Username field** must be what's in the `Name` field of the Attribute – typically an OID-style name (like the example above, where it's `urn:oid:2.5.4.42`). Do **not** use the `FriendlyName`.

Group name field: In the SAML response, the Attribute that specifies the user groups. Defaults to "groups". In the IDP's UI, typically labeled **Group Attribute Statements** or similar.

- When configuring the **Group Attribute Statements** or equivalent in your IDP, view the full Attribute. You should see something like this:

```
<saml2:AttributeStatement xmlns:saml2="urn:oasis:names:tc:SAML:2.0:assertion">
    <saml2:Attribute Name="groups"
NameFormat="urn:oasis:names:tc:SAML:2.0:attrname-format:unspecified">
        <saml2:AttributeValue xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="xs:string">
            test-admin
        </saml2:AttributeValue>
        <saml2:AttributeValue xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="xs:string">
            test-group
        </saml2:AttributeValue>
    </saml2:Attribute>
</saml2:AttributeStatement>
```

- Note the value for the `Attribute Name`. In the example above, it's `groups`.
- Enter that exact value as the **Group name field** in Cribl Stream.

Allow login as Local User: Toggle to Yes to allow users to log in without SAML (as an alternative, or as a fallback if SAML login fails).

Role Mapping Settings

This section is displayed only on **distributed** deployments (Edge, Stream) with an Enterprise License. For details on mapping your external identity provider's configured groups to corresponding Cribl Stream user access Roles, see External Groups and Roles. See also the explanation of role mapping above. The controls here are:

Default role: Default Cribl Stream Role to assign to all groups not explicitly mapped to a Role.

Mapping: Add a mapping for each external user group that you want to map to one or more Cribl roles. Then enter the group and select the role(s).

See also the explanation of role mapping above.

Role Mapping Example

Role mapping UIs will differ from one IDP to another. For this example, we'll look at Okta's.

You can assign a Cribl Stream Role to each Okta group name, and you can specify a `default` Role for users who are not in any groups.

1. In Cribl Stream, select **Settings** > **Access Management** > **Authentication**.
2. Scroll down to the **ROLE MAPPING** section.

   Cribl recommends that you set the `default` Role to `user`, meaning that this Role will be assigned to users who are not in any groups.
3. Add mappings as needed.

   The Okta group names in the left column are case-sensitive, and must match the values returned by Okta (those you saw earlier when configuring Okta and SAML).

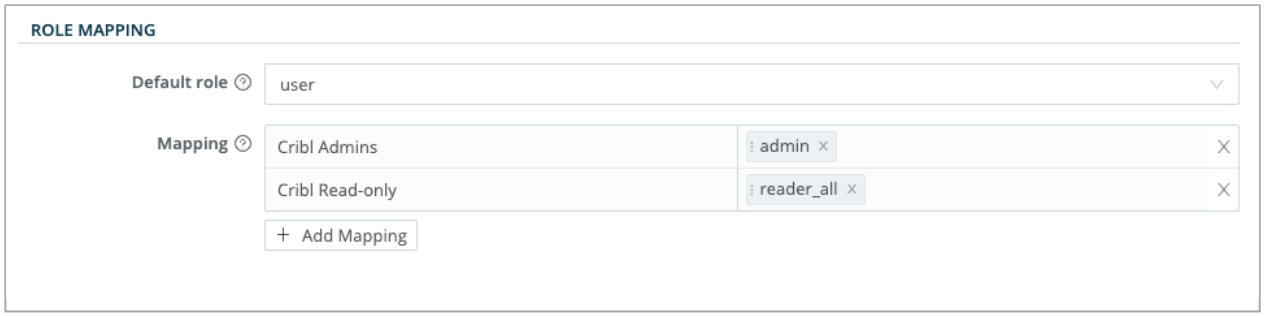

Role mapping, concluded

Verify that SSO with SAML Is Working

1. Log out of Cribl Stream, and verify that SAML is now an option on the login page.

Logging in with SAML

2. Click **Log in with SAML 2.0**.

3. You should be redirected to your IDP to authenticate yourself.

4. The SSO connect flow should complete the authentication process.

Getting Temporary Access Credentials for AWS S3 Buckets

You can use your SSO/SAML IDP to issue temporary access credentials so your on-prem Worker Node can access AWS S3 buckets.

Call the `AssumeRoleWithSAML` API endpoint. It will return the STS access, secret, and session tokens. These can be written into the `~/.aws/` credentials file, which Cribl Stream will pick up because it uses the native

AWS SDK.

You can set up multiple S3 Sources with different credentials. Cribl Stream relies on the AWS SDK for authentication support, and the SDK evaluates credentials in the following order:

1. Loaded from AWS Identity and Access Management (IAM) roles for Amazon EC2.
2. Loaded from the shared credentials file (~/.aws/credentials).
3. Loaded from environment variables.
4. Loaded from a JSON file on disk.
5. Other credential-provider classes provided by the JavaScript SDK.

To enable the use of multiple Sources, set the S3 Source **Authentication method** to **Auto**.

See the AWS SDK documentation and AWS CLI documentation for further information on setting credentials.

7. Securing

7.1. Securing the Leader's Auth Token

Cribl **strongly recommends** that when you first install Cribl Stream, you change the Leader's auth token value from the default `criblmaster` to a unique secure value.

This applies whether you configure your Leader via the UI, or via a Docker Compose file.

Changing the Default Auth Token Value

Create a unique, strongly secure token value. Cribl recommends creating a string that contains at least 14 characters and includes uppercase letters, lowercase letters, and numbers.

One option is to generate a token value with a shell command. For example, on Linux or Mac OS, the following command generates a 32-character value:

```
head /dev/urandom | LC_ALL=C tr -dc A-Za-z0-9 | head -c32 | cut -c 1-
```

Once you have created a secure auth token value, paste it into the **Auth token** field in the UI, or in the appropriate place in your Docker Compose file (if applicable).

In the UI, you'll find the **Auth token** setting under **Global Settings** > **System** > **Distributed Settings** > **Leader Settings**, as shown in the screenshot below.

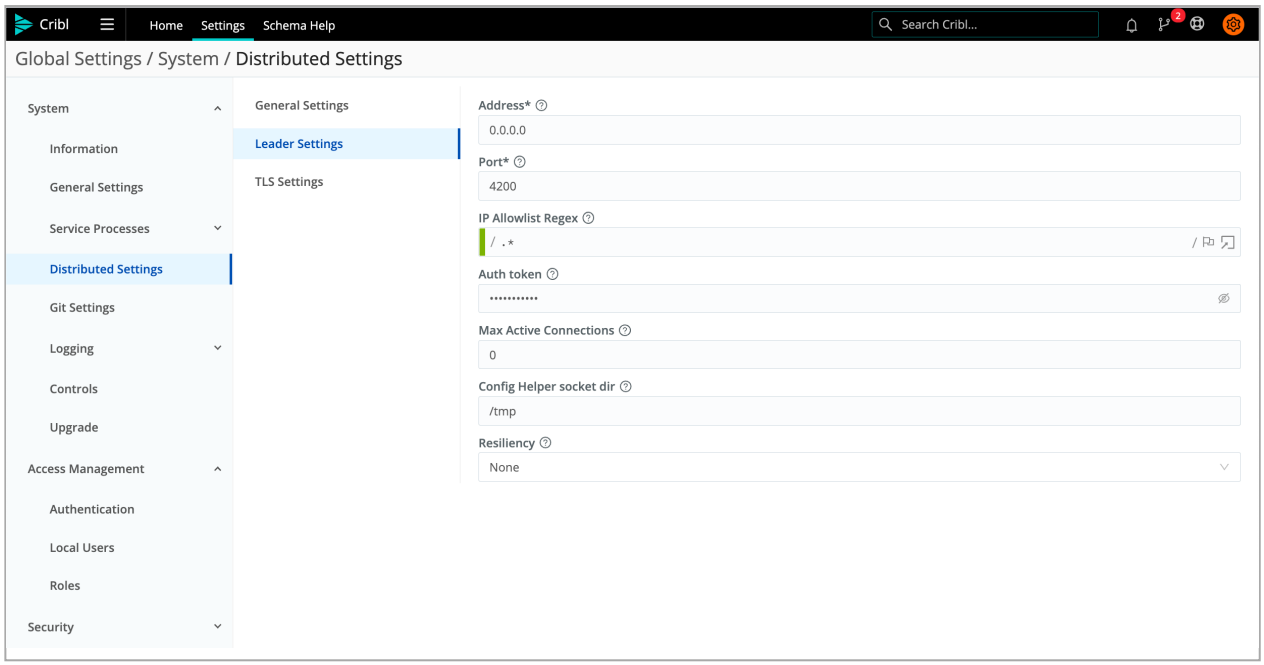

Distributed > Leader Settings

7.2. Securing Cribl Stream (TLS/SSL, Certs, Keys)

You can secure Cribl Stream access and traffic using various combinations of SSL (Secure Sockets Layer), TLS (Transport Layer Security), custom HTTP headers, and internal or external KMS (Key Management Service) options.

> In a single-instance deployment (Stream, Edge), wherever this page refers to a Worker Group, just follow the Cribl Stream top nav's **Manage** link.

Secure Access to Worker Nodes' UI

A best practice in enterprise distributed deployments, this prevents direct browser access to Worker Nodes' UI.

> Cribl recommends that you first enable the Leader's UI access to Worker Nodes (Stream, Edge). This way, admins will still be able to tunnel through from the Leader to any Worker Node's UI. This is also a prerequisite for Connecting Workers to the Leader Securely.

1. Select a Worker Group.
2. Open **Group Settings** (top right).
3. Under **General Settings** > **API Server Settings**, click **Advanced**.
4. Toggle the **Local UI Access** slider to `No`.
5. Click **Save**.

SSL Certificate Configuration

You can secure Cribl Stream's API and UI access by configuring SSL. Do this on the Leader, to secure Worker Nodes' inbound communications.

You can use your own certs and private keys, or you can generate a pair with OpenSSL, as shown here:

```
openssl req -nodes -new -x509 -newkey rsa:2048 -keyout myKey.pem -out myCert.pem -days 420
```

This example command will generate both a self-signed cert `myCert.pem` (certified for 420 days), and an unencrypted, 2048-bit RSA private key `myKey.pem`. (Change the filename arguments to modify these placeholder names.)

> As indicated by these examples, Cribl Stream expects certificates and keys to be formatted in privacy-enhanced mail (`.pem`) format.

In the Cribl Stream UI, you can configure the cert via **Settings** > **Global Settings** > **Security > Certificates**. You can configure the **key** via:

- **Settings** > **Global Settings** > **Security > Encryption Keys** single-instance deployments (Edge, Stream), or
- **Manage** > **Groups** > `<group-name>` > **Group Settings** > **Security** > **Encryption Keys** distributed deployments (Edge,Stream).

Alternatively, you can edit the `local/cribl.yml` file's `api` section to directly set the `privKeyPath` and `certPath` attributes. For example:

cribl.yml

```
api:
  host: 0.0.0.0
  port: 9000
  disabled : false
  ssl:
    disabled: false
    privKeyPath: /path/to/myKey.pem
    certPath: /path/to/myCert.pem
...
```

> See Securing Communications for details about using this certificate and key to secure communications on, and among, your Cribl Stream Leader and Worker Nodes.

Custom HTTP Headers

You can encode custom, security-related HTTP headers, as needed. As shown in the examples below, you specify these at **Settings** > **Global Settings** > **General Settings** > **API Server Settings** > **Advanced** > **HTTP Headers**. Click **Add Header** to display extra rows for new key-value pairs.

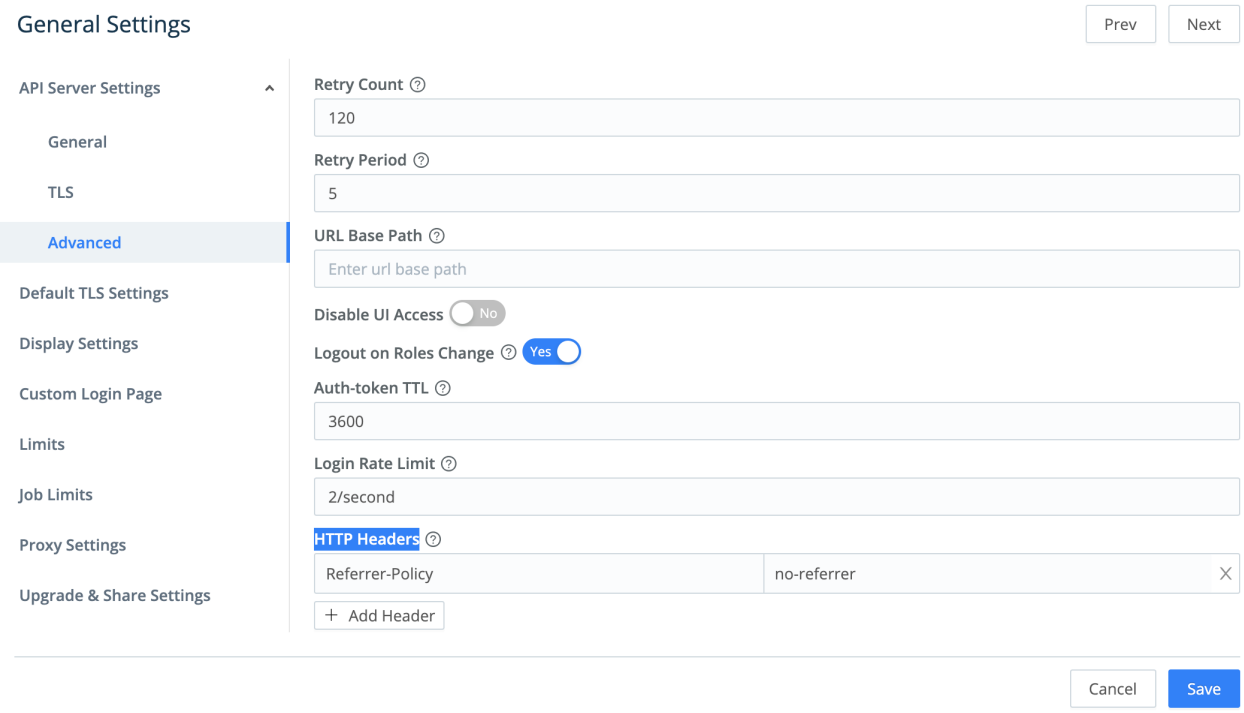

Custom HTTP headers

TLS Settings and Traffic Types

This table shows TLS client/server pairs, and encryption defaults, per traffic type.

TRAFFIC TYPE	TLS CLIENT	TLS SERVER	ENCRYPTION	CERT AUTH	CN* CHECK
UI	Browser	Cribl Stream	Default disabled	Default disabled	Default disabled
API	Worker/Edge Node	Leader	Default disabled	Default disabled	Default disabled
Worker-to-Leader	Worker/Edge Node	Leader	Default disabled	Default disabled	Default disabled
Data	Any data sender	Cribl Stream (Source)	Default disabled	Default disabled	Default disabled
Data	Cribl Stream (Destination)	Any data receiver	Default disabled	Default disabled	Default disabled
Authentication	————	————	————	————	————
Local*	Browser	Cribl Stream	Default Disabled	N/A	N/A

TRAFFIC TYPE	TLS CLIENT	TLS SERVER	ENCRYPTION	CERT AUTH	CN* CHECK
LDAP*	Cribl Stream	LDAP Provider	Custom	N/A	Default Disabled
Splunk*	Cribl Stream	Splunk Search Head	Default Enabled	N/A	Default Disabled
OIDC†/Okta*	Browser and Cribl Stream	Okta	Default Enabled	N/A	Enabled (Browser)
OIDC†/Google*	Browser and Cribl Stream	Google	Default Enabled	N/A	Enabled (Browser)

** Common name*
† OpenID Connect

Default TLS Settings (Cyphers, Etc.)

You can configure advanced, system-wide TLS settings – minimum and maximum TLS versions, default cypher lists, and ECDH curve names. Select **Settings** > **Global Settings** > **System > General Settings > Default TLS Settings**.

Here, in Cribl Stream's **Default cypher list** field, you can specify between one and all of the following supported cyphers:

- `TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384`
- `TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256`
- `TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384`
- `TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256`

Encryption Keys

You can create and manage keys that Cribl Stream will use for real-time encryption of fields and patterns within events. For details on applying the keys that you define here, see Encryption.

> In Cribl Stream 4.1 and later, for enhanced security, Cribl encrypts TLS certificate private keys in configuration files when you add or modify them. Before upgrading to v.4.1.0 (or later), back up your existing unencrypted key files – see Safeguarding Unencrypted Private Keys for Rollback. If you need to roll back to a pre-4.1 version, see Restoring Unencrypted Private Keys below.

Accessing Keys

- In a single-instance deployment, select **Settings** > **Security > Encryption Keys**.
- In a distributed deployment with one Worker Group, select **Settings > Security > Encryption Keys**.
- In a distributed deployment with multiple Worker Groups, keys are managed per Worker Group. Select **Manage** > **Groups** > `<group-name>` **Group Settings > Security > Encryption Keys**.

On the resulting **Manage Encryption Keys** page, you can configure existing keys, and/or use the following options to add new keys.

Get Key Bundle

To import existing keys, click **Get Key Bundle**. You'll be prompted to supply a login and password to proceed.

Add New Key

To define a new key, click **New Key**. The resulting **New Key** modal provides the following controls:

Key ID: Cribl Stream will automatically generate this unique identifier.

Description: Optionally, enter a description summarizing this key's purpose.

Encryption algorithm: Currently, Cribl Stream supports the `aes-256-cbc` (default) and `aes-256-gcm` algorithms.

KMS for this key: Currently, the only option supported here is `local` (Cribl Stream's internal Key Management Service).

Key Class: Classes are arbitrary collections of keys that you can map to different levels of access control. For details, see Encryption. This value defaults to `0`; you can assign more classes, as needed.

Expiration time: Optionally, assign the key an expiration date. Directly enter the date or select it from the date picker.

Restoring Unencrypted Private Keys

If you need to roll back from Cribl Stream 4.1 or later to an earlier version, follow this procedure to restore the unencrypted private key files that you earlier backed up.

1. Stop Cribl Stream 4.1 (or later) on hosts – the Leader and all Worker Nodes.
2. Untar the older Cribl Stream version (e.g., 4.0.4) onto the Leader and all Worker Nodes.

3. Manually edit each Cribl Stream config file that contains an encrypted private key. Replace each key with its prior unencrypted version.
4. Start up Cribl Stream, commit and deploy, and resume normal operations.

Secrets

With Cribl Stream's secrets store, you can centrally manage secrets that Cribl Stream instances use to authenticate on integrated services. Use this UI section to create and update authorization tokens, username/password combinations, and API-key/secret-key combinations for reuse across the application.

Accessing Secrets

- In a single-instance deployment, select **Settings** > **Security > Secrets**.
- In a distributed deployment with one Worker Group, select **Configure > Settings > Security > Secrets**.
- In a distributed deployment with multiple Worker Groups, secrets are managed on each Worker Group. Select **Groups >** `<group-name>` **Settings > Security > Secrets**.

On the resulting **Manage Secrets** page, you can configure existing secrets, and/or click **New Secret** to define new secrets.

Add New Secret

The **New Secret** modal provides the following controls:

Secret name: Enter an arbitrary, unique name for this secret.

Secret type: See below for this second field's options, some of which expose additional controls.

Description: Optionally, enter a description summarizing this secret's purpose.

Tags: Optionally, enter one or multiple tags related to this secret.

Secret Type

This drop-down offers the following types:

Text: This default type exposes a **Value** field where you directly enter the secret.

API key and secret key: Exposes **API key** and **Secret key** fields, used to retrieve the secret from a secure endpoint. This is the only secret type supported on Cribl Stream's AWS-based Sources, Collectors, and

Destinations, and on our Google Cloud Storage Destination.

Username with password: Exposes **Username** and **Password** fields, which you fill to retrieve the secret using Basic Authentication.

CA Certificates and Environment Variables

Where Cribl Stream Sources and Destinations support TLS, each Source's or Destination's configuration provides a **CA Certificate Path** field where you can point to corresponding Certificate Authority (CA) `.pem` file(s). However, you can also use environment variables to manage CAs globally. Here are some common scenarios:

1. **How do I add a set of trusted root CAs to the list of trusted CAs that Cribl Stream trusts?**
   Set this environment variable in each Worker Node's environment (e.g., in its systemd unit file): `NODE_EXTRA_CA_CERTS=/path/to/file_with_certs.pem`. For details, see the nodejs docs.

2. **How do I make Cribl Stream trust all TLS certificates presented by any server it connects to?**
   Set this environment variable: `NODE_TLS_REJECT_UNAUTHORIZED=0` – for details, see the nodejs docs.

7.2.1. KMS Configuration

Cribl Stream's Key Management Service (KMS) maintains the keys that Cribl Stream uses to encrypt secrets on Worker Groups and Worker Nodes. The internal KMS is always available, but integrating an external KMS provider requires an Enterprise or Standard license.

> To configure KMS for Cribl Stream in Cribl.Cloud, see the Launch Guide.

In an on-prem single-instance deployment, you configure the KMS at **Settings** > **Global Settings** > **Security > KMS**. In a distributed deployment, you configure the Leader's KMS at the same global location, while additional KMS configs for each Worker Group are available at the Worker Group's **Group Settings** > **Security > KMS** page.

The resulting **KMS Provider** drop-down currently provides these options:

- Stream Internal: The **only** option available without an Enterprise license/plan. With this option, the secrets themselves are configured and maintained in Cribl Stream Settings' parallel Secrets section.
- HashiCorp Vault.
- AWS KMS.

> **External KMS Providers and Worker Groups**
>
> To integrate an external KMS provider into an on-prem distributed deployment, Cribl Stream's Leader Node must have internet access.
>
> When you initially install a license in distributed mode, a known bug prevents immediate use of KMS features within Worker Groups. Here is the workaround:
>
> 1. Open **Settings** > **Global Settings** > **Worker Processes**.
> 2. In the list of processes, locate any process with a Role of `CONFIG_HELPER`.
> 3. Click that process' **Restart** button.
>
> Upon restarting, KMS will be available for use in the corresponding Worker Group.

Internal KMS

The **KMS provider** field defaults to `Stream Internal`. With this option, no further configuration here is required (or possible). See Secrets to configure individual secrets.

HashiCorp Vault

Setting the **KMS provider** drop-down to `HashiCorp Vault` exposes the following configuration options:

KMS Settings

Vault URL: Enter the Vault server's URL (e.g., `http://localhost:8200`).

Namespace: If you are using HashiCorp Vault Enterprise namespaces, enter the desired namespace.

Authentication

Auth provider: The method for authenticating requests to HashiCorp Vault server. Select one of `Token`, `AWS IAM`, or `AWS EC2`. Your selection determines the remaining **Authentication** options displayed.

Token-based Authentication

Token: Enter the authentication token. This token will be used only to generate child tokens for further authentication actions.

AWS IAM Authentication

> In HashiCorp Vault, the term "method" can refer to `userpass`, `token`, or `aws`, among others, but the `aws` method supports two authentication types: `iam` and `ec2`. Meanwhile, in Cribl Stream, you'll see "method" used differently, e.g. in the **Authentication method** setting described below.

Use the **Authentication method** buttons to select one of the following:

- **Auto**: Uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Worker Nodes access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.
- **Manual**: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials directly or by reference. This is useful for Worker Nodes not in an AWS VPC, e.g., those running in a private cloud. It prompts you to provide an **Access key** and a **Secret key**.

Vault AWS IAM Server ID: Value to use for the `Vault-AWS-IAM-Server-ID` header value. This should match the value configured with IAM authentication on Vault.

Vault Role: Authentication role to use in Vault.

Custom auth path: If you enabled authentication in HashiCorp Vault with a custom path, enter that path again here.

For example:

- If you enabled authentication with the HashiCorp Vault command `vault auth enable -path /my-auth aws` instead of `vault auth enable aws` you would set a custom path of `my-auth`. Subsequently, when you perform actions using the `vault write` command, you'd specify an auth type with the `auth_type=ec2` or `auth_type=iam` options.

Assume Role

This section is displayed for all AWS IAM authentication methods.

Enable for Vault Auth: Toggle to `Yes` if you want to use your Assume Role credentials to access Vault authentication.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming the role.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

AWS EC2 Authentication

Vault Role: Enter the authentication role to use in Vault.

Custom auth path: If you enabled authentication in HashiCorp Vault with a custom path, enter that path again here. For example:

- You could have used the HashiCorp Vault command `vault auth enable -path /my-auth aws` to enable authentication with a custom path of `my-auth`. Subsequently, when you perform actions using the `vault write` command, you'd specify an auth type with the `auth_type=ec2` or `auth_type=iam` options.

Secret Engine

Mount: Mount point of the Vault secrets engine to use. (Currently, only the KVv2 engine is supported.) Defaults to `secret`.

Secret path: Enter the path on which the Cribl Stream secret should be stored, e.g.: `<somePath>/cribl-secret`.

> In a distributed deployment, the Leader, and each Worker Group, require a distinct secret. This location cannot be shared between them.

Advanced

Enable health check: Whether to perform a health check before migrating secrets data. Defaults to `Yes`.

Health check endpoint: Configurable endpoint to use for validating system health. Defaults to `/v1/sys/health`.

AWS KMS

Setting the **KMS provider** drop-down to `AWS KMS` exposes the following configuration options:

Authentication

Authentication method: Select an AWS authentication method.

- **Auto**: This default option uses the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`, or the attached IAM role. Works only when running on AWS.
- **Manual**: You must select this option when not running on AWS.

The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to `env.AWS_ACCESS_KEY_ID`, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to `env.AWS_SECRET_ACCESS_KEY`, or to the metadata endpoint for IAM credentials.

Assume Role

Enable for KMS: Toggle to `Yes` if you want to use Assume Role credentials to access the AWS KMS.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role. This is required only when assuming a role that requires this ID in order to delegate third-party access. For details, see AWS' documentation.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Service Configuration

KMS Key ARN: Enter the Amazon Resource Name (ARN) of the AWS KMS Key to use for encryption. This entry is required.

7.3. Securing Communications

This page outlines how to protect Cribl Stream Leader to Worker Nodes communications, using an existing TLS/SSL certificate and key.

Cribl Stream expects certificates and keys to be formatted in privacy-enhanced mail (`.pem`) format.
To generate a self-signed certificate and corresponding key, see Securing Cribl Stream.

Importing Certificate and Key

To use your certificate and key to prepare secure communications between Workers/Edge Nodes and the Leader:

1. Navigate to the Leader's **Settings** > **Global Settings** > **Security** > **Certificates** > **New Certificates** modal.
2. Open your TLS/SSL certificate file. (The self-signed certificate example used the placeholder name `myCert.pem`.)
3. Copy the file's contents to your clipboard.
4. Paste the file's contents into the modal's **Certificate** field.

> You can skip the preceding three steps: Just drag/drop your `.pem` file from your filesystem into the **Certificate** field, or upload it using the button at the field's upper right.

5. Open your private key file. (The self-signed certificate example used the placeholder name `myKey.pem`.)
6. Copy the file's contents to your clipboard.
7. Paste the clipboard contents into the same Leader modal's **Private key** field.

> Here again, you can skip the preceding three steps by dragging/dropping or uploading the `.pem` file from your filesystem.

8. Fill in the **Name** and **Description** fields.
9. If you've uploaded a self-signed certificate, just **Save** it now.

10. If your private key is encrypted, fill in the modal's **Passphrase** with the corresponding key. (You can paste the key's contents, or you can drag/drop or upload the key file.)

11. If you're uploading a certificate signed by an external certificate authority – e.g., a downloaded Splunk Cloud certificate – import the chain into the **CA certificate** field before saving the cert. For details, see Obtain the Certificate Chain (TLS/SSL).

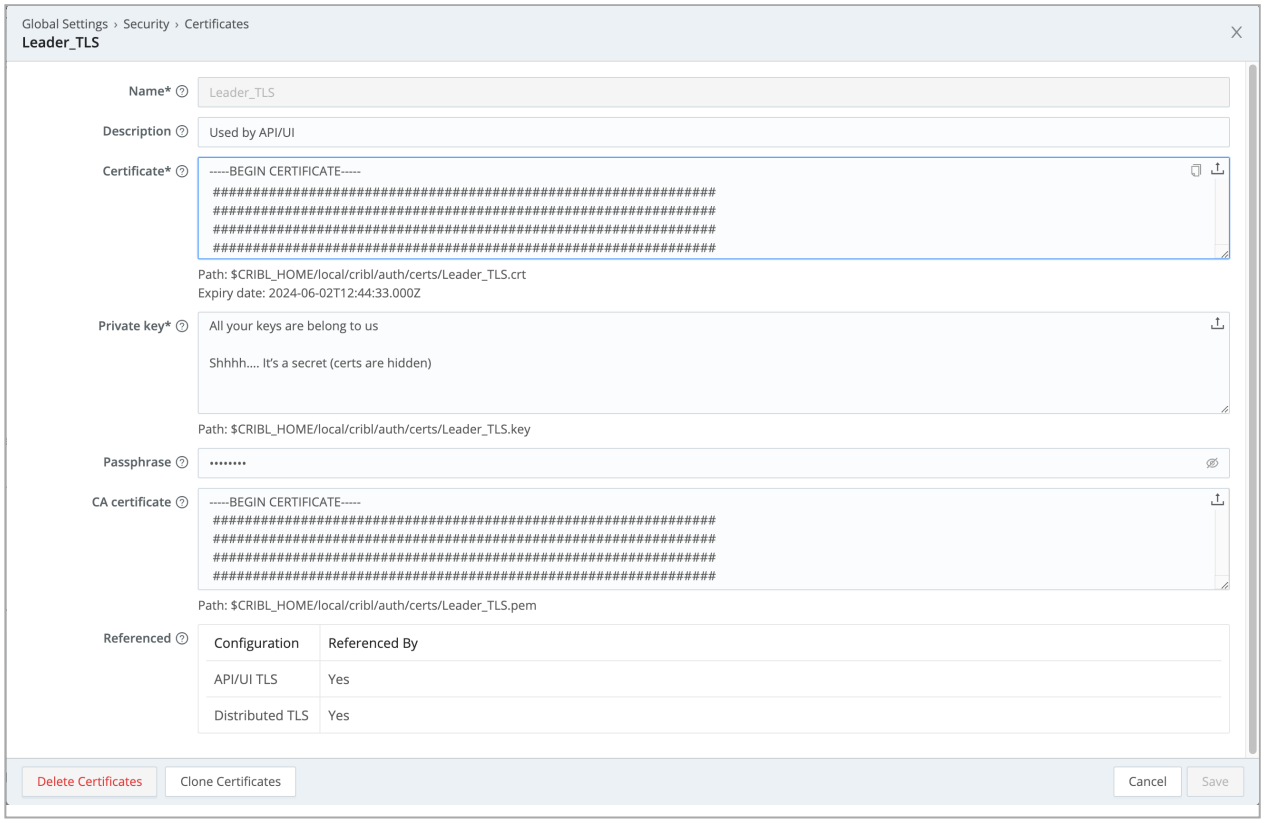

Leader's certificate modal, populated

Connecting to the Leader Securely

You can configure secure communication between your Leader and Worker Nodes using the UI, the `instance.yml` config file, or environment variables.

Using the UI

To set up secure communication via the UI, you configure first the Worker Group, then the Worker Node, then the Leader.

Worker Group Setup

For each Worker Group whose Worker Nodes you want to secure:

1. Open your TLS/SSL certificate file, and copy its contents to your clipboard. (This can be the same certificate you uploaded to the Leader, or a different cert.)
2. Select **Manage**, then select the Worker Group you want to configure.
3. Select **Group Settings** or **Fleet Settings** (upper right).
4. From the left nav, select **Security** > **Certificates** > **TLS**.
5. Click **Add Certificate**.
6. In the resulting **New Certificates** modal, add the cert's contents to the **Certificate** field. (You can paste the cert file's contents, or you can drag/drop or upload the `.pem` file.)
7. As you did on the Leader, also insert your **Private key**, and (as needed) your **Passphrase** and **CA certificate**.
8. Click **Save**.
9. Commit and Deploy the Worker Group's new configuration, including the new cert.
10. Repeat the preceding steps on each Worker Group.

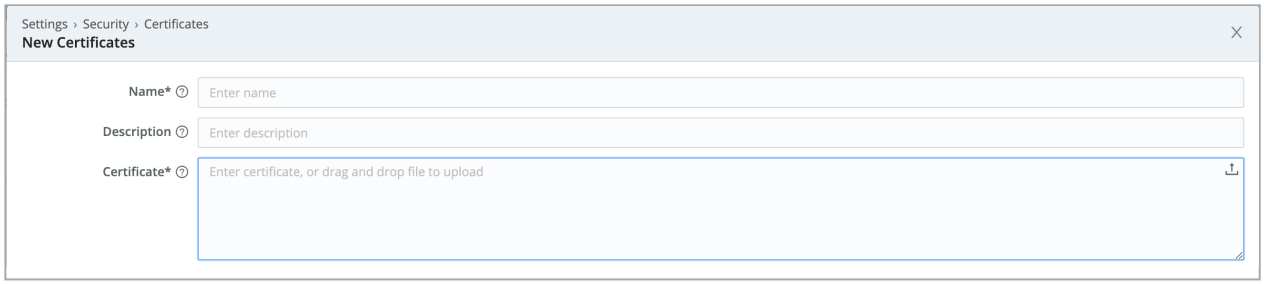

Group-level certificates are configured like the Leader's cert

Worker Node Setup

For each Worker Node that you want to secure:

1. Enable the Leader's UI access to each desired Worker Node (Stream, Edge).
2. Tunnel through from the Leader to a Worker Node's UI.
3. Navigate to this Worker Node's **Worker Settings** (upper right) > **System** > **Distributed Settings** > **TLS Settings**.
4. Toggle **Enable Server TLS** to `Yes`.
   This will expose the remaining TLS settings.
5. From the **Certificate name** drop-down, select the certificate you uploaded to the parent Worker Group. This will prefill all the required fields. (See all deployed certificates at the left nav's **Security** > **Certificates** link.)
6. Click **Save**.
   The Worker will be unavailable during a short lag, while it restarts with the new configuration.
7. Repeat the preceding steps on each Worker Node.

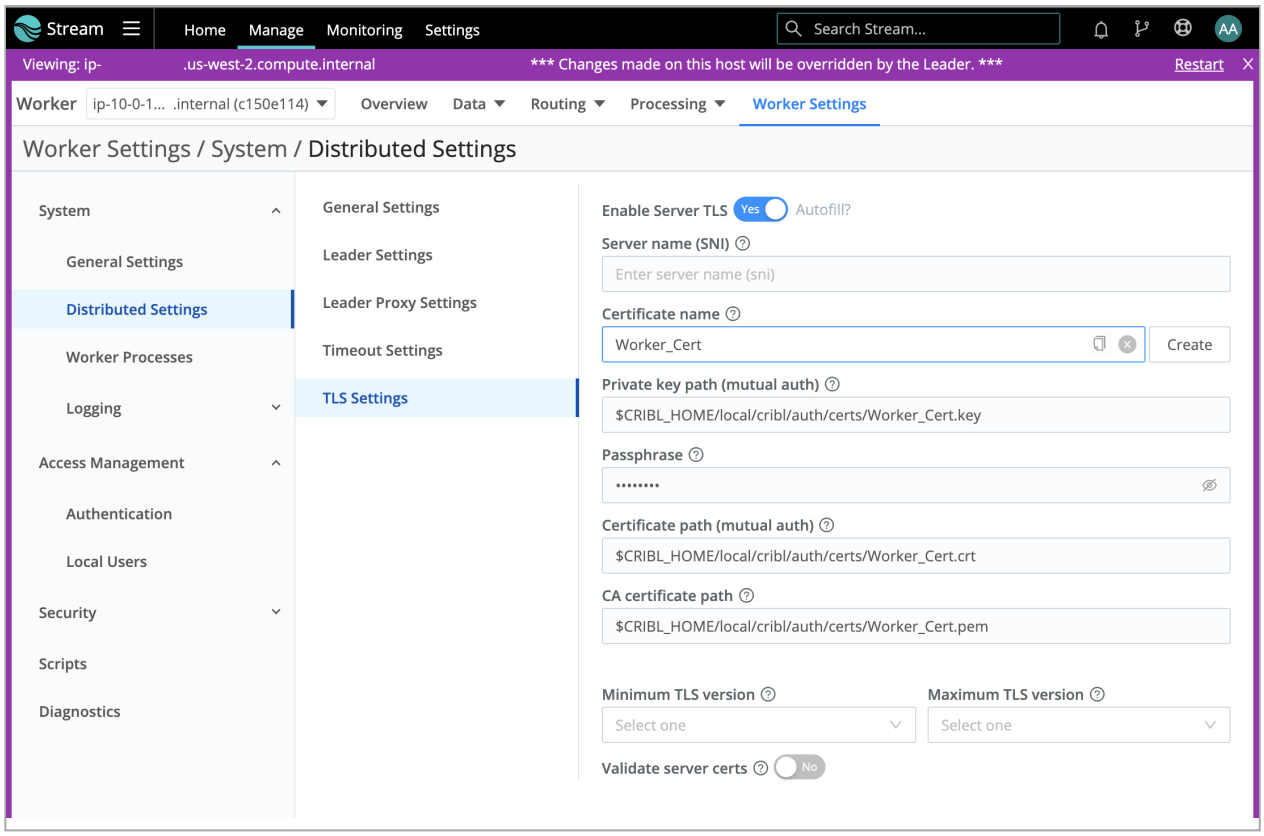

Configuring TLS on Worker's/Edge Node's UI, from the Leader

Leader Setup

Next, return to the Leader's UI:

1. Select **Settings** > **Global Settings**> **System** > **Distributed Settings** > **TLS Settings**.
2. Toggle **Enable server TLS** to `Yes`.
3. In the **Certificate name** drop-down, select an existing Certificate. This will auto-populate the corresponding cert fields.
4. Click **Save**.

> After you've enabled TLS on the Leader, generating bootstrap scripts to add or update Worker Nodes will automatically prepend `https://` to the Leader's URL.

Using YAML Config File

You can also configure the Leader's `$CRIBL_HOME/local/_system/instance.yml` file to ensure that TLS is enabled. Here's the relevant section:

```
distributed:
  mode: managed-edge
  master:
    host: <hostname>
    port: 4200
    authToken: criblmaster
      disabled: false
      rejectUnauthorized: false
      requestCert: false
    resiliency: none
  group: default_fleet
```

> After you've enabled TLS on the Leader, generating bootstrap scripts to add or update Worker Nodes will automatically prepend `https://` to the Leader's URL.

Using Environment Variables

Another way to set up secure communications between Worker Nodes and the Leader is via environment variables (Stream, Edge).

If you deploy your Worker Nodes in a container, you can enable encrypted TLS communications with the Leader by configuring the `CRIBL_DIST_MASTER_URL` with the `tls:` protocol. This will override the default setting in `instance.yml`. Here's the format:

```
CRIBL_DIST_LEADER_URL=tls://<authToken>@leader:4200
```

Configuring TLS Mutual Authentication

Once you have configured the Leader for encrypted TLS communication, you can implement client certificate exchange to enable mutual authentication. This allows Cribl Stream to permit only explicitly authorized clients, which hold valid certificates, to connect to the Leader.

When a client certificate is presented to a Leader, two things happen:

1. The Leader validates the client certificate presented to Cribl Stream. The `Validate Client Certs` setting is optional, but highly recommended. When enabled, the Leader checks the certificate against the trust store, to see if it has been signed by a valid certificate authority (CA).

   The Leader checks the list of certificates in the `CA Certificates Path` box first (if populated), then against the list of built-in system certificates.

2. The Leader checks whether the `Common Name` (CN) matches the regular expression in the configuration. Cribl Stream's default is to accept any value in the `Common Name` field. You can customize this as needed.

   Within the `Common Name`, we validate against the value after the `CN=string`. If your `Common Name` is `CN=logstream.worker`, you would enter `logstream\.worker` in the `Common Name` field – including the backslash, because the value entered is a regular expression.

Limitations on TLS Mutual Auth

When configuring TLS mutual authentication on Worker Nodes, make sure you place your certificates into a separate directory outside of `$CRIBL_HOME`. If you place the certificates inside `$CRIBL_HOME`, they'll be removed when the next config bundle is deployed from the Leader.

Similarly, you can't bootstrap Worker Nodes with mutual authentication already populated. To bootstrap Worker Nodes, you supply only the shared authentication token. Certificates should be viewed as two-factor authentication; so placing the certificates in the config bundle defeats the purpose of two-factor authentication.

Using the UI

Below is a sample configuration on the Leader:

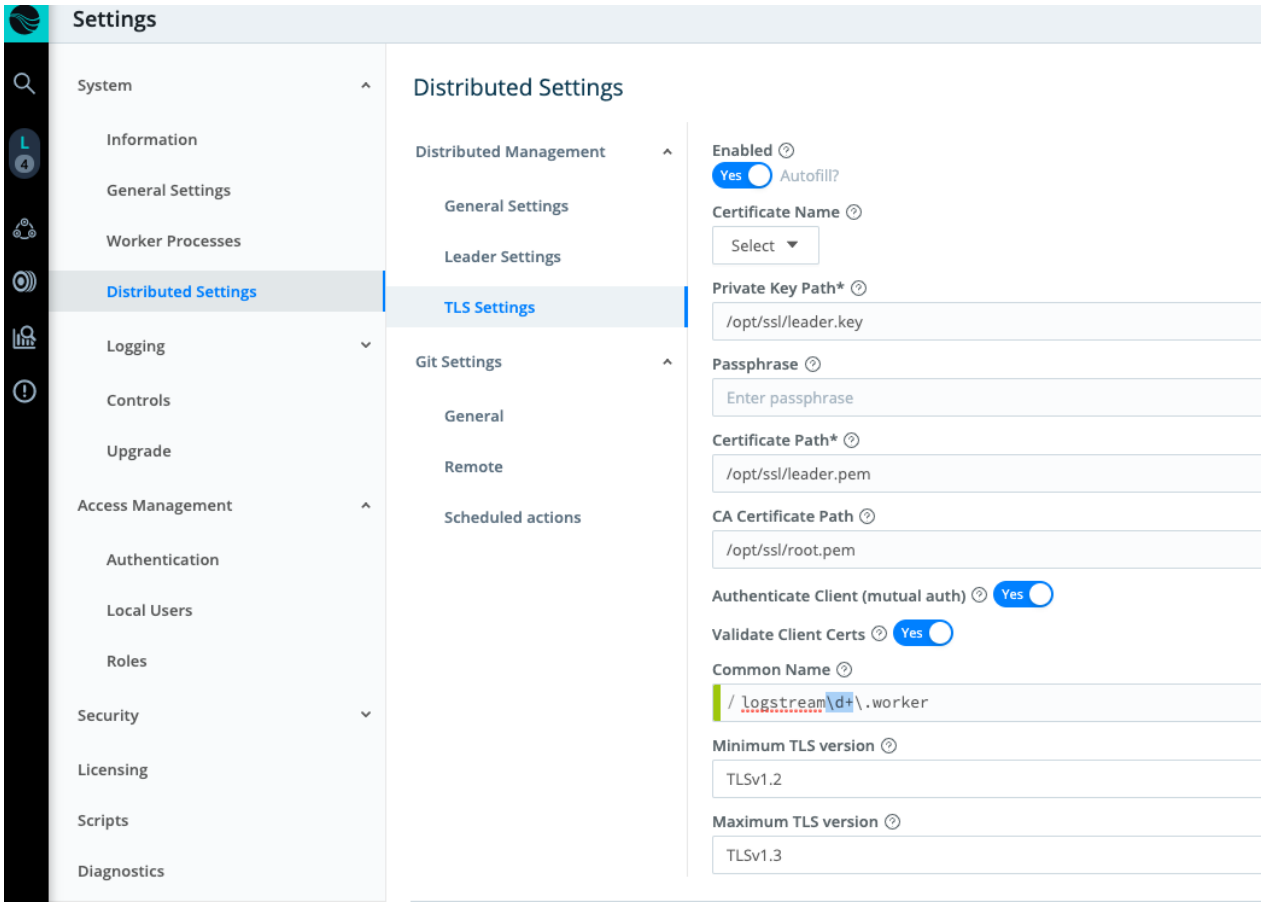

Configuring Mutual Authentication

In the above configuration, note:

- You can set both the **Minimum TLS version** and **Maximum TLS version**.
- The `Common Name` regex contains an additional check for `\d+`. This allows checking for the format: `logstream1.worker`, `logstream2.worker`, `logstream3.worker`, etc.

Using YAML Config File

To set up TLS **mutual** authentication via the Worker Node's `instance.yml` config file, you need to change some values and also add a few keys, as shown in this example:

```
distributed:
  mode: managed-edge
  master:
    host: <hostname>
    port: 4200
    authToken: criblmaster
    tls:
      disabled: false
      rejectUnauthorized: true # false if ignoring untrusted certs
      requestCert: true
      privKeyPath: /path/to/certs/worker.key
      certPath: /path/to/certs/worker.pem
      caPath: /path/to/certs/root.pem
    resiliency: none
  group: default_fleet
```

Using Environment Variables

You can set up TLS mutual authentication by configuring this environment variable, using the format shown in this example:

```
CRIBL_DIST_Master_URL="tls://<authToken>@leader.cribl:4200?
tls.privKeyPath=/path/to/certs/worker.key&tls.certPath=/path/to/certs/workers.pem&tls.c
```

Once you've set this variable, restart the Worker Node. You should see the Worker Node successfully reconnect to the Leader.

If the Worker Node doesn't connect, check `cribl.log` on both the Worker Node and Leader for more context about the problem. You should see errors related to `dist leader communications`.

> To build your own Certificate Authority (a self-signed CA), see our blog post on How to Secure Cribl Stream Worker-to-Leader Communications.

Setting Authentication on Sources/Destinations

You can use certificates to authenticate Cribl Stream to external data senders and receivers. You configure this at the Group level, as follows:

1. Select a Group.

> As an alternative to the preconfiguration in steps 2–6, you can import a certificate on the fly, using the Source's or Destination's **Create** button. See this section's final steps below.

2. Open **Group Settings** (top right) > **Security** > **Certificates**.
3. Select **New Certificates**.
4. Paste or upload `.pem` files, as in Setting Up the Encrypted Channel.
5. Supply a **Passphrase** and/or **CA certificate**, if required by your integration partner's certificate.
6. Click **Save**.
7. Open your relevant Source's or Destination's config modal.
8. Select **TLS Settings (Client Side)** or **TLS Settings (Server Side)**, depending on the integration.
9. Slide **Enabled** on.
10. In the **Certificate name** drop-down, select a cert that you've preconfigured for this integration. This will auto-populate the corresponding fields here.
11. If you're creating a certificate on the fly, click the **Create** button beside **Certificate name**.
12. Click **Save**.

> Cribl Stream will create new certificates at the same Group level that you're configuring. You can verify this at the **Create new certificate** modal's bottom, by making that the **Referenced** table includes rows for poulated for the appropriate **Sources** and **Destinations**.

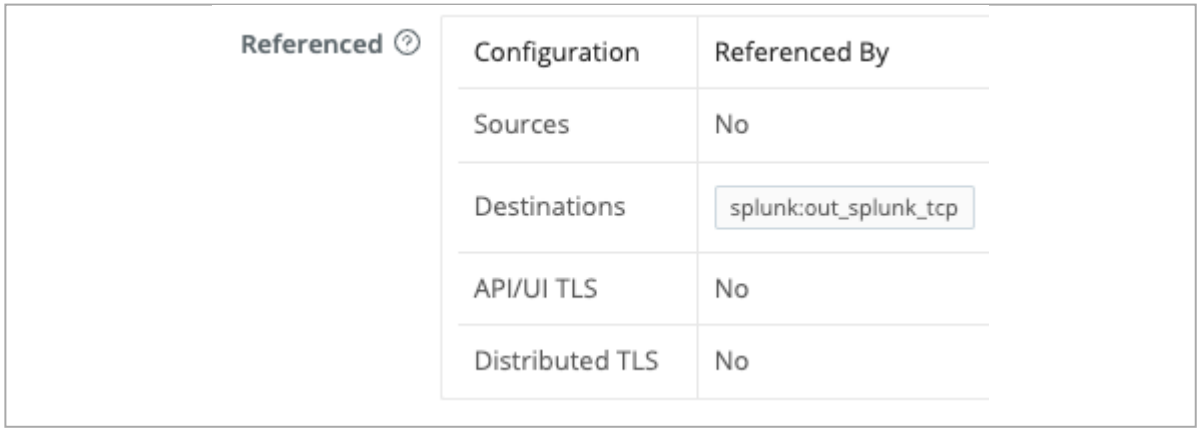

Group-level certificate modal

Securing the Leader Node

This is a best practice that enables the Leader to validate itself to clients. We can secure it using the self-signed cert we created in Securing Cribl Stream:

1. Navigate to **Settings** > **Global Settings** > **General Settings** > **API Server Settings** > **TLS**.
2. Slide the toggle to **Enabled**.
3. From the **Certificate Name** drop-down, select a cert you've previously imported. This will populate the corresponding fields here.
4. Click **Save**.

> After this save, you must prepend `https://` to all Cribl Stream URLs on the Leader Node. E.g., to get back to the Settings page you just configured, you'll now need to use `https://<hostname>:<port>/settings/system)`.

7.4. System Proxy Configuration

You can direct all outbound HTTP/S requests to go through proxy servers. You do so by setting a few environment variables before starting Cribl Stream, as follows:

Configure the `HTTP_PROXY` and `HTTPS_PROXY` environment variables, either with your proxy's IP address, or with a DNS name that resolves to that IP address. Optionally, follow either convention with a colon and the port number to which you want to send queries. Some `HTTP_PROXY` examples:

```
$ export HTTP_PROXY=http://10.15.20.25:1234
$ export HTTP_PROXY=http://proxy.example.com:1234
```

`HTTPS_PROXY` examples:

```
$ export HTTPS_PROXY=http://10.15.20.25:5678
$ export HTTPS_PROXY=http://proxy.example.com:5678
```

In the above examples, note that an `HTTPS_PROXY` environment variable's referenced URL should generally be in `http://` format.

Preventing Proxy, Config, and Case Conflicts

Before you deploy Cribl Stream and configure proxies, Cribl recommends running the `printenv` shell command to check for any existing proxies in your environment. If you find existing proxies, be sure to include their environment variables in the systemd override file.

If Cribl Stream is already running on any Nodes you are proxying, restart the Cribl server after you initially configure – or make any changes to – the variables outlined on this page.

The environment variables' names can be either uppercase or lowercase. However, if you set duplicate versions of the same name, the lowercase version takes precedence. E.g., if you've set both `HTTPS_PROXY` and `https_proxy`, the IP address specified in `https_proxy` will take effect.

HTTP and/or HTTPS?

Several Cribl Stream endpoints rely on the HTTPS protocol. These include the Cribl telemetry endpoint (which must be accessed under some license types and all Cribl.Cloud plans), and the CDN used to propagate

application updates and certain documentation features (API Reference and docs PDFs).

You might configure certain other Cribl Stream features (such as REST API Collectors) that require access to HTTP endpoints. For maximum flexibility, consider setting environment variables to handle both the HTTPS and HTTP protocols.

Proxy Configuration with systemd

If you are proxying outbound traffic and starting Cribl Stream using systemd, add your proxy environment variables to the systemd override file (see Persisting Overrides). Add statements of this form:

```
[Service]
Environment=http_proxy=<yourproxy>
Environment=https_proxy=<yourproxy>
Environment=no_proxy=<no_proxy_list>
```

This will prevent Cribl Stream from throwing "failed to send anonymized telemetry metadata" errors.

Authenticating on Proxies

You can use HTTP Basic authentication on HTTP or HTTPS proxies. Specify the username and password in the proxy URL. For example:

```
$ export HTTP_PROXY=http://username:password@proxy.example.com:1234
$ export HTTPS_PROXY=http://username:password@proxy.example.com:5678
```

> If your `username` or `password` contains special characters, Cribl Stream will try to use these fields as the proxy address. As a workaround, URL-encode these fields.

Bypassing Proxies with `NO_PROXY`

If you've set the above environment variables, you can negate them for specified (or all) hosts. Set the `NO_PROXY` environment variable to identify URLs that should bypass the proxy server, to instead be sent as direct requests. Use the following format:

```
$ export NO_PROXY="<list of hosts/domains>"
```

`NO_PROXY` Usage

- Cribl recommends including the Leader Node's host name in the `NO_PROXY` list.
- Within the list, separate the host/domain names with commas or spaces.
- Optionally, each host/domain entry can be followed by a port. If specified, the port must match. If not specified, the protocol's default port is assumed.
- If specified, subdomain names must match. E.g., `NO_PROXY=foo.example.com` will send requests directly to https://foo.example.com, but https://bar.example.com requests will go through the proxy.
- You can use leading wildcards like `NO_PROXY="*.us, .org"`.
- `NO_PROXY="*"` disables all proxies.
- `NO_PROXY` with an empty list disables no proxies.

Cloud `NO_PROXY` Usage

You must include any cloud metadata endpoints (such as the AWS Instance Metadata Service) in the `NO_PROXY` list:

- AWS EC2 and Azure VM instances must include `169.254.169.254` in the list. If using IPv6 on AWS EC2, add `fd00:ec2::254` to the list.
- AWS ECS Fargate tasks must include `169.254.170.2`.
- GCP (Google Cloud Platform) VM instances must include `metadata.google.internal` and `169.254.169.254`.

Where Proxies Apply

Proxy configuration is relevant to the following Cribl Stream components that make outbound HTTP/S requests:

Destinations

- Amazon CloudWatch Logs
- Amazon Kinesis Streams
- Amazon S3 Compatible Stores

- Amazon SQS
- Azure Blob Storage
- Azure Monitor Logs
- Cribl HTTP
- CrowdStrike Falcon LogScale
- Datadog
- Data Lake > S3
- DataSet
- Elasticsearch
- Google Chronicle
- Google Pub/Sub
- Grafana Cloud
- Honeycomb
- Loki
- New Relic Ingest: Logs & Metrics
- New Relic Ingest: Events
- OpenTelemetry
- Prometheus
- SignalFX
- Splunk HEC
- Sumo Logic
- Wavefront
- Webhook

Sources

- Amazon SQS
- Amazon S3
- Azure Blob Storage
- CrowdStrike FDR
- Office 365 Services
- Office 365 Activity
- Office 365 Message Trace
- Prometheus Scraper
- Prometheus Edge Scraper

Collectors

- Amazon S3 Collector
- Azure Blob Storage Collector
- Google Cloud Storage Collector
- Health Check Collector
- REST/API Collector

Notification Targets

- PagerDuty
- Webhook

Testing Proxies

To initially test your proxy configuration, consider setting up a simple, free proxy server like mitmproxy (https://mitmproxy.org/), and then monitoring traffic through that server. Verify that you can trace proxied requests from your Cribl Stream instance, and can validate that outgoing requests (to Destinations) are working properly.

Proxying Multiple Cribl Stream Instances in One Browser

Cribl Stream stores authentication tokens based on each http header's URI scheme, host, and port information. Within a given browser, Cribl Stream enforces a same-origin policy to isolate instances.

This means that if you want to run multiple proxied Cribl Stream instances in one browser session, you must assign them different URI schemes, hosts, and/or ports. Otherwise, logging into an extra Cribl Stream instance will expire the prior instance's session and log it out.

For example, assume that you've set up this pair of Apache proxy forward rules:

- https://web/cribla forwards to `cribl_hosta:8001/cribla`.
- https://web/criblb forwards to `cribl_hostb:8001/criblb`.

These two proxied addresses cannot be run simultaneously in the same browser session. However, this pair – which lead with separate URI schemes – could:

- https://web/cribla forwards to `cribl_hosta:8001/cribla`.
- https://web2/criblb forwards to `cribl_hostb:8001/criblb`.

Where separate instances **must** share URI formats, a workaround is to open the second instance in an incognito/private browsing window, or in a completely different browser.

7.5. Securing Data

Cribl Stream can be used to encrypt sensitive data in real time, and to route the encrypted data to an end system. Decrypted retrieval can be implemented on a per-system basis. Currently, decryption is supported only when Splunk is the end system.

- Data Encryption
- Data Decryption

7.6. Encryption

Encryption of Data in Motion

Cribl Stream enables you to encrypt fields or patterns within events in real time, by using a `C.Crypto.encrypt()` expression in a Mask Function. The Mask Function accepts multiple replacement rules, and multiple fields to apply them to.

In that Function's configuration, a **Match Regex** defines the pattern of content to be replaced. The **Replace Expression** is a JavaScript expression or literal to replace matched content. You can use the `C.Crypto.encrypt()` method here to generate an encrypted string from a passed value.

Encryption Keys

You can configure symmetric keys through the CLI or UI. Users are free to define as many keys as required. Each key is characterized by the following:

- `keyId`: ID of the key.
- `algorithm`: Algorithm used with the key
- `keyclass`: Cribl Key Class (below) that the key belongs to.
- `kms`: Key management system for the key. Defaults to `local`.
- `created`: Time (epoch) when key was generated.
- `expires`: Time (epoch) after which the key is invalid. Useful for key rotation.
- `useIV`: Flag that indicates whether or not an initialization vector was used.

Key Classes

Key Classes in Cribl Stream are collections of keys that can be used to implement multiple levels of access control. Users (or groups of users) with access to data with encrypted patterns can be associated with key classes, for even more granular, pattern-level compartmentalized access.

Example

Users `U0, U1` have been given access to keyclass `0` which contains key IDs `0` and `1`. These keys are used to encrypt certain patterns in `datasetA`. Even though users `U0, U1, U2` have access to read this dataset, only `U0` and `U1` can decrypt its encrypted patterns.

KEY CLASS	DATASET
keyclass: 0 Keys: keyId: 0, keyId: 1 Users: U0, U1	datasetA Users: U0, U1, U2

User `U1` has been given access to an **additional** keyclass, `1`, which contains key IDs `11` and `22`. These keys are used to encrypt certain **other** patterns in `datasetA`. Even though users `U0, U1, U2` have access to read this dataset – same as above – only `U1` can decrypt the additional encrypted patterns.

KEY CLASS	DATASET
keyclass: 1 Keys: keyId: 11, keyId: 22 Users: U1	datasetA Users: U0, U1, U2

Configuring Keys with the CLI

When using the `local` key management system, encryption keys in Cribl Stream are encrypted with `$CRIBL_HOME/local/cribl/auth/cribl.secret` and stored in `$CRIBL_HOME/local/cribl/auth/keys.json`. Cribl monitors the `keys.json` file for changes every 60 seconds.

> When installed as a Splunk app, `$CRIBL_HOME` is `$SPLUNK_HOME/etc/apps/cribl`.

Listing Keys

Keys are added and listed using the `keys` command:

```
$CRIBL_HOME/bin/cribl keys list -g <workerGroupID>
```

```
keyId  description  algorithm    keyclass  kms    created         expires     useIV
-------------------------------------------------------------------------------
1      cbc          aes-256-cbc  0         local  1544906269.316  0           false
2      gcm          aes-256-gcm  1         local  1544906272.452  0           false
3      cbc          aes-256-cbc  2         local  1544906275.948  1545906275  true
4      gcm          aes-256-gcm  3         local  1544906278.026  0           true
```

Adding Keys

Displaying `--help`:

```
$CRIBL_HOME/bin/cribl keys add --help
```

```
Add encryption keys
Usage: [options] [args]

Options:
[-a <algorithm>] - Encryption algorithm. Supported values: aes-256-cbc (default),
aes-256-gcm.
[-c <keyclass>]  - Key class to set for the key.
[-k <kms>]       - KMS to use. Must be configured; see cribl.yml.
[-e <expires>]   - Expiration time, in epoch time.
[-i]             - Use an initialization vector.
 -g <group>      - Worker Group's ID.
```

Adding a key to keyclass `1`, with no expiration date, on the `default` Worker Group:

```
$CRIBL_HOME/bin/cribl keys add -c 1 -i -g default
```

```
Adding key: success. Key count=1
```

(You would use the same syntax to reference a non-`default` Worker Group by its name.) ? Listing keys to verify key generation:

```
$CRIBL_HOME/bin/cribl keys list -g default
```

```
keyId  algorithm    keyclass  kms    created         expires     useIV
-------------------------------------------------------------------------
1      aes-256-cbc  1         local  1545243364.342  0           true
```

Configuring Keys with the UI

In a single-instance deployment, you can access the key management interface through **Settings** > **Security > Encryption Keys**. In a distributed deployment, for each Group, select **Manage** > `<group-name>` > **Group Settings** > **Security** > **Encryption Keys**.

The resulting **Encryption Keys** page lists existing keys, with sortable columns.

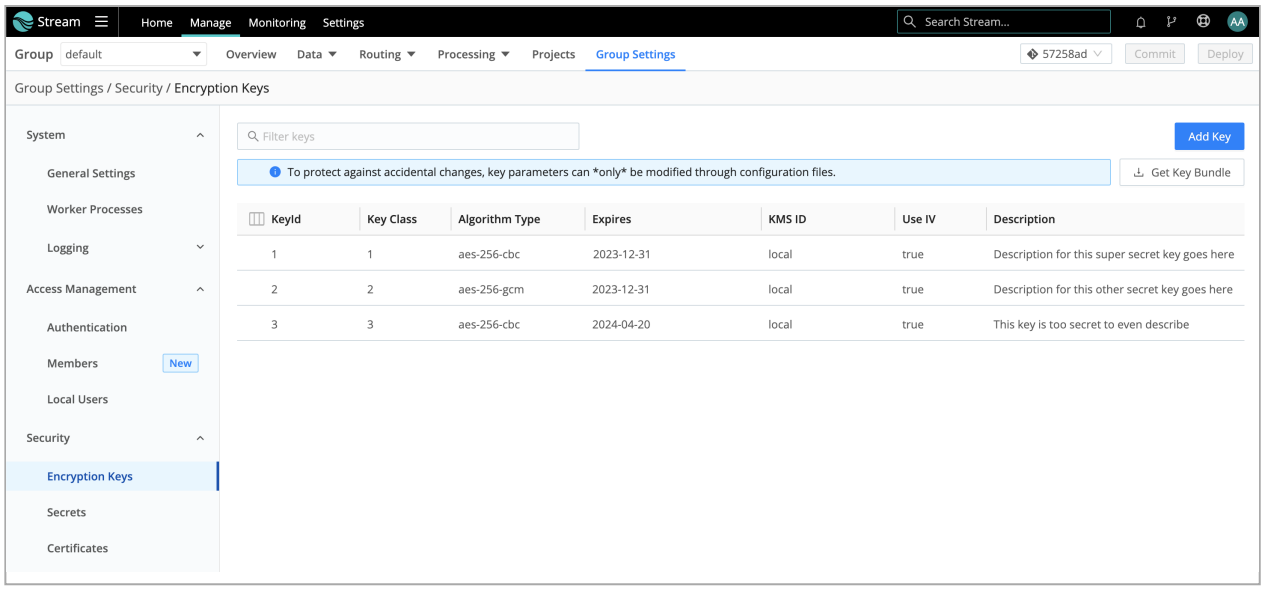

List or add keys through Cribl Stream's UI

Click **Add Key** to display the creation modal shown below.

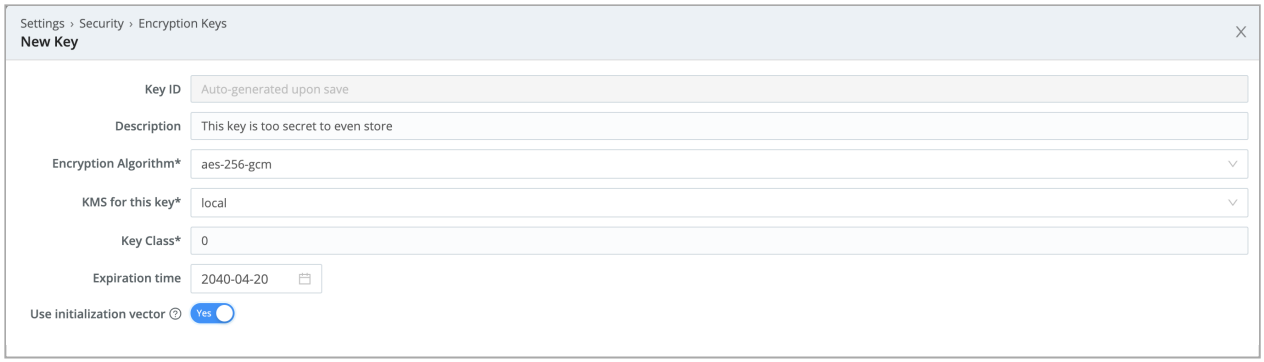

New Key configuration modal

Modifying Keys

To protect against accidental changes, a key's parameters – once saved – can be edited only through configuration files.

When you update keys by editing the `keys.json` file, you must add them back to the directories above (respectively, on a single instance or on a distributed deployment's Leader Node).

Sync `auth/(cribl.secret|keys.json)`

To successfully decrypt data, the `decrypt` command will need access to the same keys that were used to encrypt, **in the Cribl instance where encryption happened**.

- In a single-instance deployment, the `cribl.secret` and `keys.json` files reside in: `$CRIBL_HOME/local/cribl/auth/.`
- In a distributed deployment, the `cribl.secret` and `keys.json` files reside on the Leader Node in: `$CRIBL_HOME/groups/<group-name>/local/cribl/auth/.`
- When using the UI, you can download these files by clicking the **Get Key Bundle** button.

Sync/copy these files over to their counterparts on the Search Head/decrypting side, residing in: `$SPLUNK_HOME/etc/apps/cribl/local/cribl/auth/.`

7.7. Decryption

Decryption of Data

Currently, Cribl Stream supports decryption only when Splunk is the end system. In Splunk, decryption is available to users of any role with permissions to run the `cribldecrypt` command that ships with Cribl App for Splunk. Further restrictions can be applied with Splunk **capabilities**. This page provides details.

> As of v.3.5.3, Cribl has added `cribldecrypt` as an alias to the original `decrypt` command. Use this alias to avoid conflicts with Splunk's internal commands. (We show it in the examples below.) Both are, in fact, aliases to the actual command: `/path/2/cribl --spunk-decrypt`. You can use both aliases.

Usage

The `cribldecrypt` command is used to display Cribl-encrypted fields in cleartext. It is an alias to the `decrypt` command. This command decrypts fields only for the encryption keys that the user can access.

The example below retrieves data from a Splunk index with Cribl-encrypted data, and pipes it to the `cribldecrypt` command:

```
index=index_with_encrypted_fields | cribldecrypt
```

Decrypting in Splunk

Decryption in Splunk is implemented via a custom command called `cribldecrypt`. To use the command, users must belong to a Splunk role that has permissions to execute it. Capabilities, which are aligned to Cribl Key Classes, can be associated with a particular role to further control the scope of `cribldecrypt`.

> **Decrypt Command Is Search Head ONLY**
>
> To ensure that keys don't get distributed to all search peers – including peers that your search head can search, but you don't have full control over – `cribldecrypt` is scoped to run locally on the installed search head.

Restricting Access with Splunk Capabilities

In Splunk, capability names should follow the format `cribl_keyclass_N`, where `N` is the Cribl Key Class. For example, a role with capability `cribl_keyclass_1` has access to all key IDs associated with key class `1`.

CAPABILITY NAME	CORRESPONDING CRIBL KEY CLASS
`cribl_keyclass_1`	`1`
`cribl_keyclass_2`	`2`
...	...
`cribl_keyclass_N`	`N`

Configuring Splunk Search Head to Decrypt Data

You set up decryption in Splunk according to this schematic:

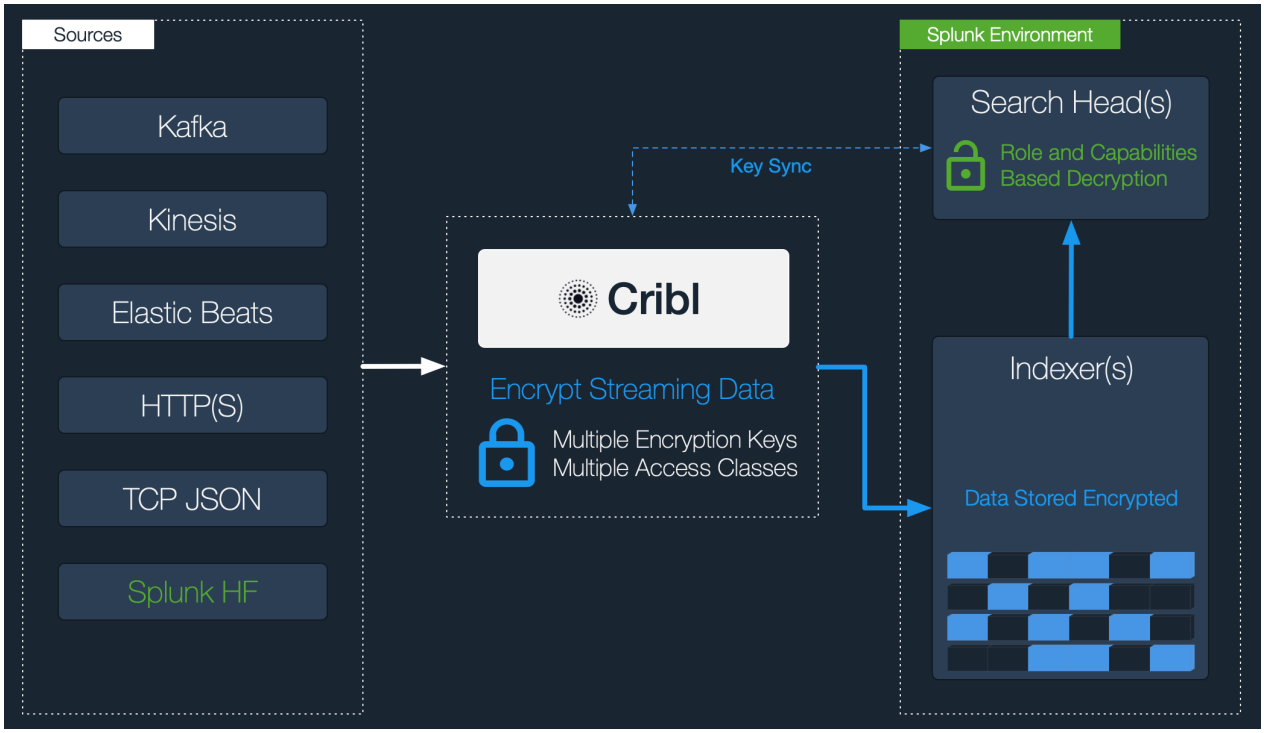

1. Download the Cribl Stream App for Splunk from Cribl's Download Cribl Stream page: In the **On Prem** section, select the Splunk app from the drop-down list, as shown. Clicking the orange button downloads a file named: `cribl-splunk-app-<version-#>-<hash-#>-linux-x64.tgz`.

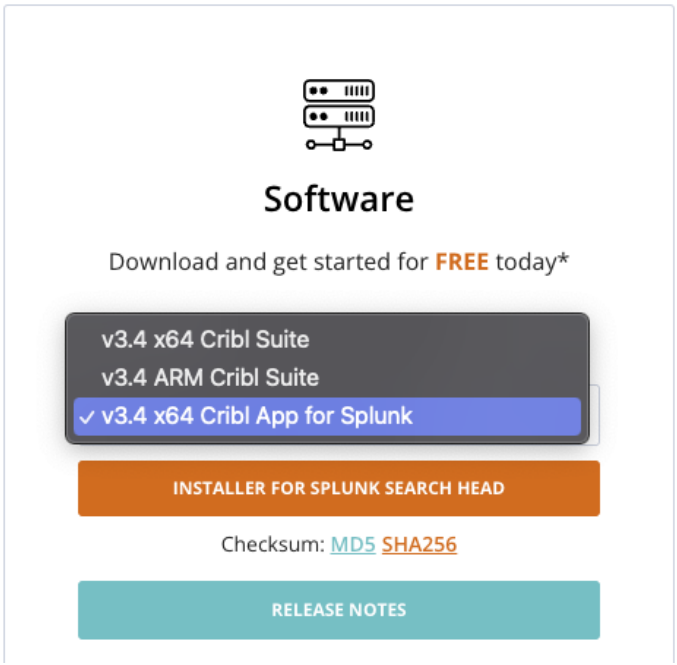

Downloading Cribl's Splunk app

2. To install the Cribl/LogStream App for Splunk on your search head, untar the package into your `$SPLUNK_HOME/etc/apps` directory.
   As of LogStream v1.7, the app will run in search head mode by default. If the app has previously been installed and later modified, you can convert it to search head mode with the command: `$CRIBL_HOME/bin/cribld mode-searchhead`. (When installed as a Splunk app, `$CRIBL_HOME` is `$SPLUNK_HOME/etc/apps/cribl`.)

3. Assign permissions to the `cribldecrypt` command, per your requirements.

4. Assign capabilities to your roles, per your requirements. If you'd like to create more capabilities, ensure that they follow the naming convention defined above.

5. In the `$SPLUNK_HOME/etc/apps/cribl/local/cribl/auth/` directory, sync `cribl.secret` | `keys.json`. (To successfully decrypt data, the `cribldecrypt` command will need access to the same keys that were used to encrypt, **in the Cribl instance where encryption happened**.)

- In a single-instance deployment, the `cribl.secret` and `keys.json` files reside in: `$CRIBL_HOME/local/cribl/auth/`.

- In a distributed deployment, these files reside on the Leader Node in: `$CRIBL_HOME/groups/<group-name>/local/cribl/auth/`.

- When using Cribl Stream's UI, you can download these files by clicking the **Get Key Bundle** button.

Sync/copy these files over to their counterparts on the search head (decryption side). In a non-Splunk integration, you would copy these assets to wherever decryption will take place.

Modifying Keys

When you update keys by editing the `keys.json` file, you must add them back to the directories above (respectively, on a single instance or on a distributed deployment's Leader Node).

8. Working With Data

8.1. Event Model

All data processing in Cribl Stream is based on discrete data entities commonly known as **events**. An event is defined as a collection of key-value pairs (fields). Some Sources deliver events directly, while others might deliver bytestreams that need to be broken up by Event Breakers. Events travel from a Source through Pipelines' Functions, and on to Destinations.

The internal representation of a Cribl Stream event is as follows:

Event Model

```
{
  "_raw": "<body of non-JSON parse-able event>",
  "_time": "<timestamp in UNIX epoch format>",
  "__inputId": "<Id/Name of Source that delivered the event>",
  "__other1": "<Internal field1>",
  "__other2": "<Internal field2>",
  "__otherN": "<Internal fieldN>",
  "key1": "<value1>",
  "key2": "<value2>",
  "keyN": "<valueN>",
  "...": "..."
}
```

Some notes about these representative fields:

- Fields that start with a double-underscore are known as **internal fields**, and each Source can add one or many to each event. For example, Syslog adds both a `__inputId` and a `__srcIpPort` field. Internal fields are used only within Cribl Stream, and are not passed down to Destinations.
- Upon arrival from a Source, if an event cannot be JSON-parsed, all of its content will be assigned to `_raw`.
- If a timestamp is not configured to be extracted, the current time (in UNIX epoch format) will be assigned to `_time`. (When Cribl Stream emits events based on incoming Kafka messages, it handles the `_time` field a bit differently.)
- Cribl reserves the right to change all internal fields that are not documented under Sources or Destinations.

Using Capture

One way to see what an event looks like as it travels through the system is to use the **Capture** feature. While in Preview (right pane):

1. Click **Start a Capture**.
2. In the resulting modal, enter a **Filter expression** to narrow down the events of interest.
3. Click **Capture...** and (optionally) change the default Time and/or Event limits.
4. Select the desired **Where to capture** option. There are four options:

- **1. Before the pre-processing Pipeline** – Capture events right after they're delivered by the respective Input.
- **2. Before the Routes** – Capture events right after the pre-processing Pipeline. before they go down any Routes. (QuickConnect bypasses Routes, and can bypass processing Pipelines.)
- **3. Before the post-processing Pipeline** – Capture events right after any Processing Pipeline that handled them, before any post-processing Pipeline.
- **4. Before the Destination** – Capture events right after any post-processing Pipeline, before they go out to the configured Destination.

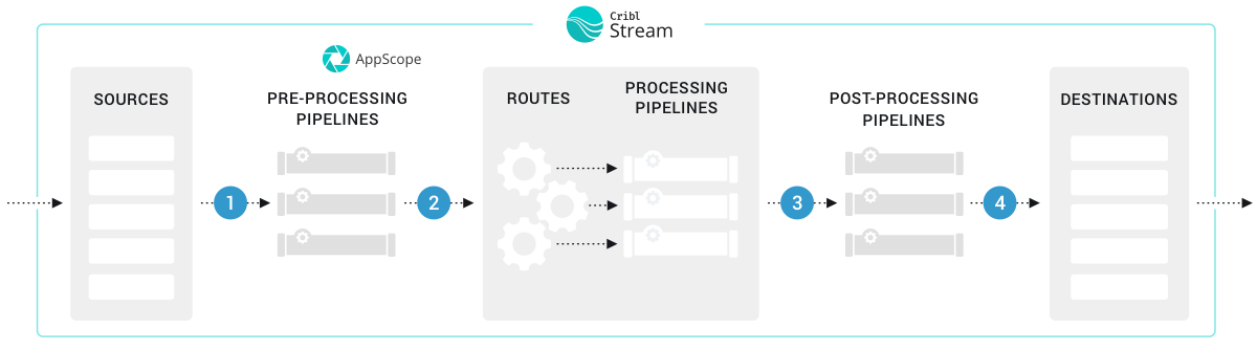

8.2. Event Processing Order

The expanded schematic below shows how all events in the Cribl Stream ecosystem are processed linearly, from left to right.

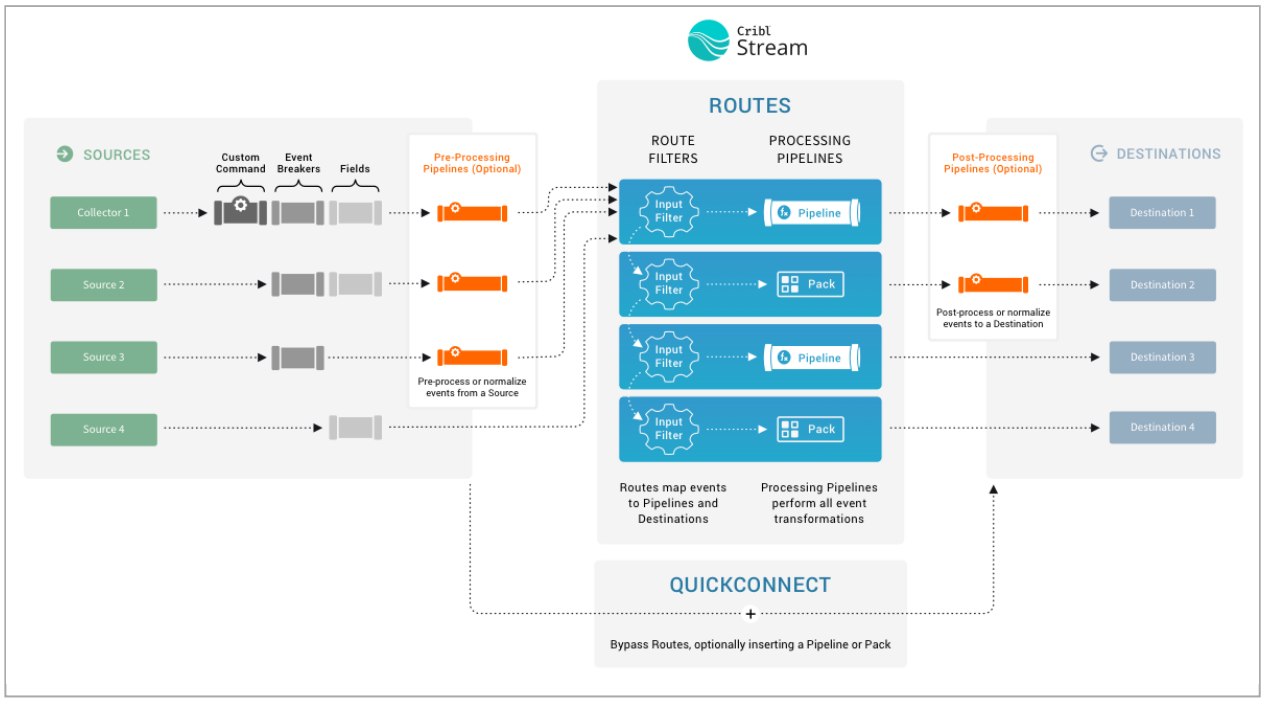

Cribl Stream in great detail

Here are the stages of event processing:

1. Sources: Data arrives from your choice of external providers. (Cribl Stream supports Splunk, HTTP/S, Elastic Beats, Amazon Kinesis/S3/SQS, Kafka, TCP raw or JSON, and many others.)

2. Custom command: Optionally, you can pass this input's data to an external command before the data continues downstream. This external command will consume the data via `stdin`, will process it and send its output via `stdout`.

3. Event Breakers can, optionally, break up incoming bytestreams into discrete events. (Note that because Event Breakers precede tokens, Breakers cannot see or act on tokens.)

4. Auth tokens are applied at this point on Splunk HEC Sources. (Details here.)

5. Fields/Metadata: Optionally, you can add these enrichments to each incoming event. You add fields by specifying key-value pairs, per Source, in a format similar to Cribl Stream's Eval Function. Each key

defines a field name, and each value is a JavaScript expression (or constant) used to compute the field's value.

6. Auth tokens are applied at this point on HTTP-based Sources other than Splunk HEC (e.g., Elasticsearch API Sources).

7. Pre-processing Pipeline: Optionally, you can use a single Pipeline to condition (normalize) data from this input before the data proceeds further.

8. Routes map incoming events to Processing Pipelines and Destinations. A Route can accept data from multiple Sources, but each Route can be associated with only one Pipeline and one Destination. (QuickConnect bypasses Routes.)

9. Processing Pipelines perform most event transformations. Within a Pipeline, you define these transformations as a linear series of Functions. A Function is an atomic piece of JavaScript code invoked on each event. (QuickConnect optionally bypasses processing Pipelines.)

10. Post-processing Pipeline: Optionally, you can append a Pipeline to condition (normalize) data on its way into its Destination.

11. Destinations: Each Route/Pipeline combination forwards processed data to your choice of streaming or storage Destination. (Cribl Stream supports Splunk, Syslog, Elastic, Kafka/Confluent, Amazon S3, Filesystem/NFS, and many other options.)

> **Pipelines Everywhere**
>
> All Pipelines have the same basic internal structure – they're a series of Functions. The three Pipeline types identified above differ only in their position in the system.

8.3. Routes

Before incoming events are transformed by a processing Pipeline, Cribl Stream uses a set of filters to first select a **subset** of events to deliver to the correct Pipeline. This selection is normally made via Routes.

> **Don't Need Routes?**
>
> Routes are designed to filter, clone, and cascade incoming data across a related set of Pipelines and Destinations. If all you need are independent connections that link parallel Source/Destination pairs, you can use Cribl Stream's QuickConnect rapid visual configuration tool as an alternative to Routes.

Accessing Routes

Select **Routing** > **Data Routes** from Cribl Stream's global top nav (single-instance deployments) or from a Worker Group's/Fleet's top nav (distributed deployments). To configure a new Route, click **Add Route**.

How Do Routes Work

Routes apply filter expressions on incoming events to send matching results to the appropriate Pipeline. Filters are JavaScript-syntax–compatible expressions that are configured with each Route. Examples are:

- `true`
- `source=='foo.log' && fieldA=='bar'`

> There can be multiple Routes in a Cribl Stream deployment, but each Route can be associated with only **one processing** Pipeline. (Sources and Destinations can also have their own attached pre-/post-processing Pipelines.)
>
> Each Route must have a unique name. The **Route Name** field is case-sensitive, so entering the same characters with different capitalization will create a Route with a separate name.

Routes are evaluated in their display order, top->down. The stats shown in the **Bytes**/**Events** (toggle) column are for the most-recent 15 minutes.

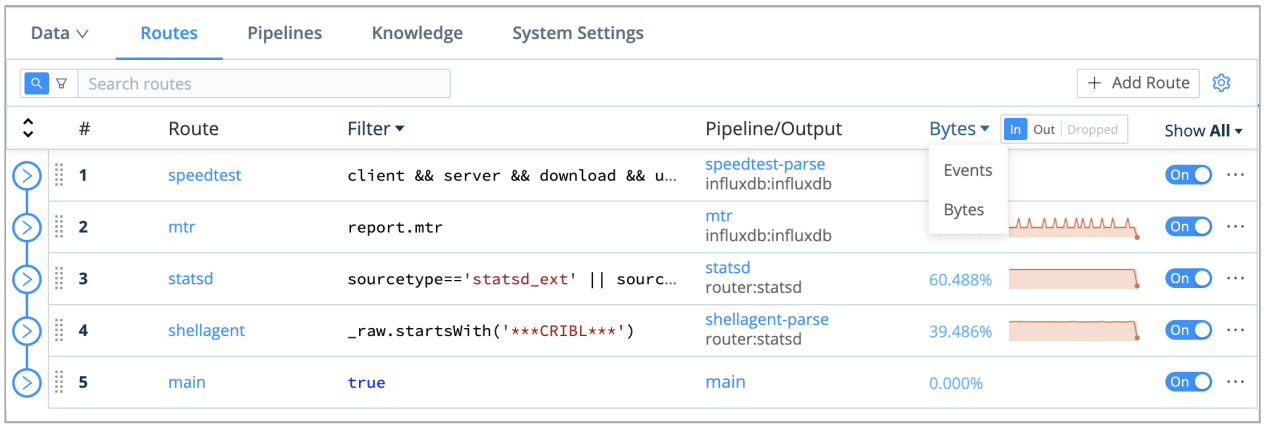

Routes and bytes

In the example above, incoming events will be evaluated first against the Route named **speedtest**, then against **mtr**, then against **statsd**, and so on. At the end, the **main** Route serves as a catch-all for any event that does not match any of the other Routes.

Above, note the selectors to toggle between displaying Events versus Bytes, and to display In, Out, or Dropped.

Displayed percentages of Events and Bytes In and Out are by comparison to throughput or filtering across all Routes. For example, if you have four Routes that share an identical filter, each Route's Events In might show approximately `25%` of the total inbound traffic across all Routes.

When you condense the Routes page to a narrower viewport, Cribl Stream consolidates the **In**/**Out**/**Dropped** selectors onto an expanded **Bytes**/**Events** drop-down menu, as shown below.

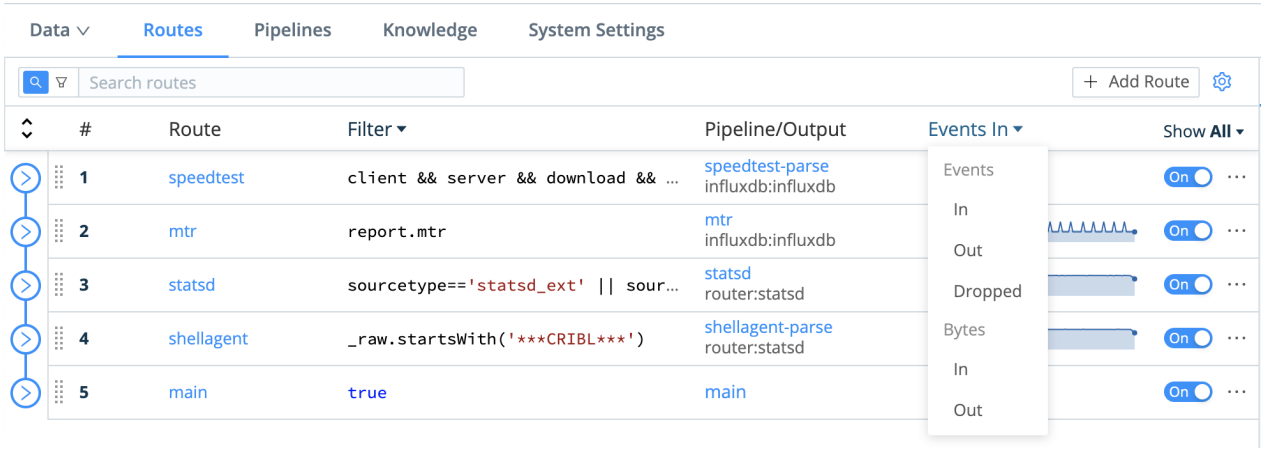

Routes and events (combined menu)

Managing the Routes Page

To apply a Route before another, simply drag it vertically. Use the sliders to turn Routes **On**/**Off** inline, as necessary, to facilitate development and debugging.

You can press the] (right-bracket) shortcut key to toggle between the Preview pane and the expanded Routes display shown above. (This works when no field has focus.)

Click a Route's Options (•••) menu to display multiple options:

- Insert, group, move, copy, or delete Routes.
- Insert comments above or below Routes.
- Capture sample data through a selected Route.

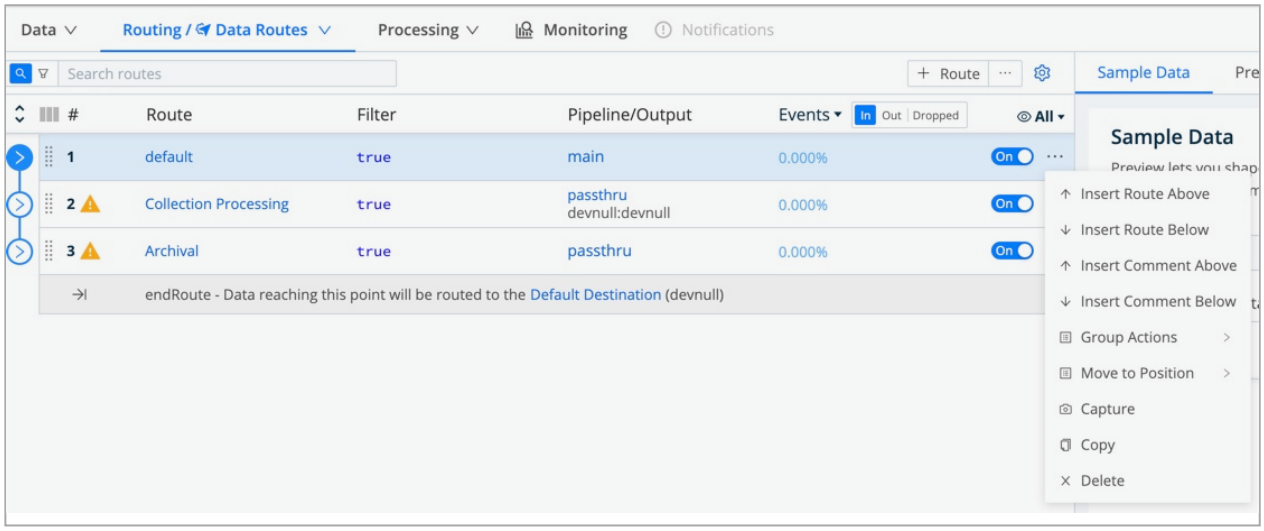

Route > Options menu

Copying a Route displays the confirmation message and the (highlighted) Paste button shown below.

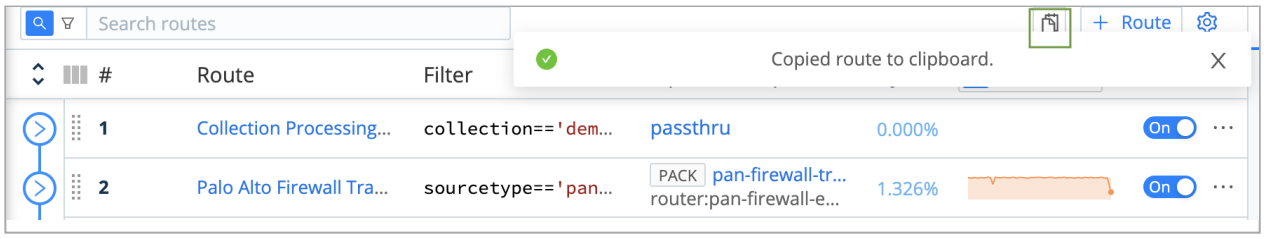

Paste button for copied Route

Pasting creates an exact duplicate of the Route, with a warning indicator to change its duplicate name.

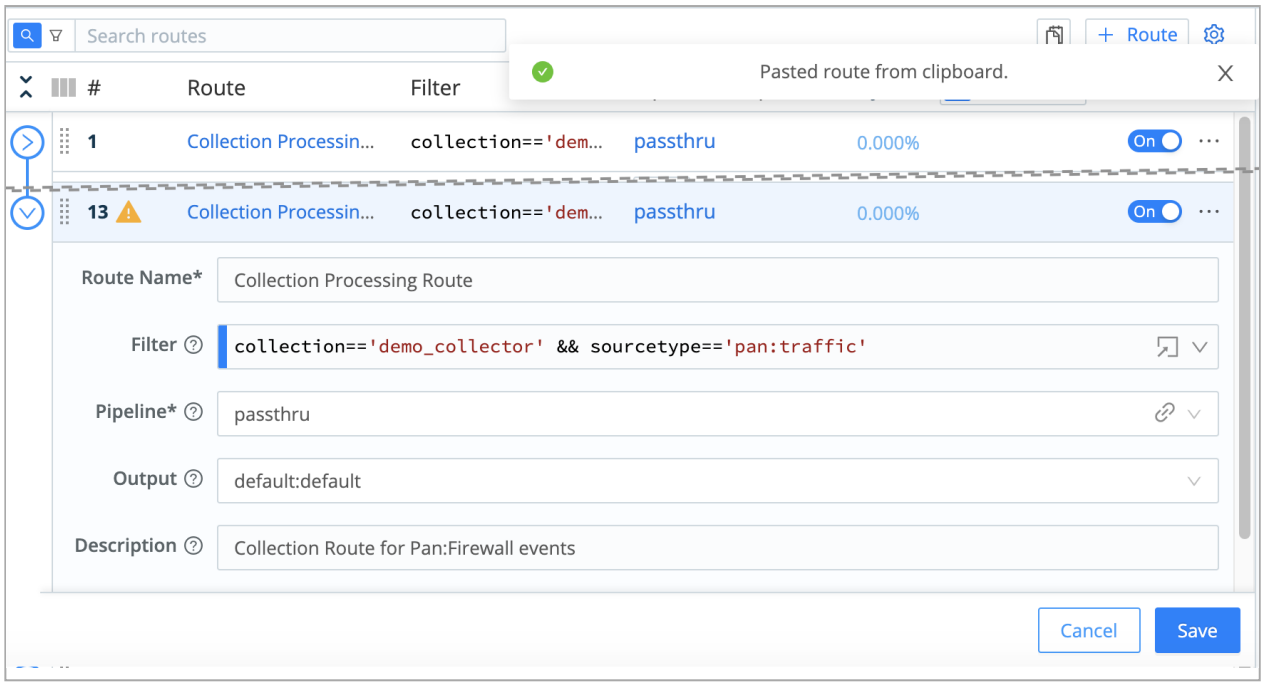

Pasted duplicate Route

Comments work like a Pipeline's Comment Functions: You can use them to describe Routes' purposes and/or interactions.

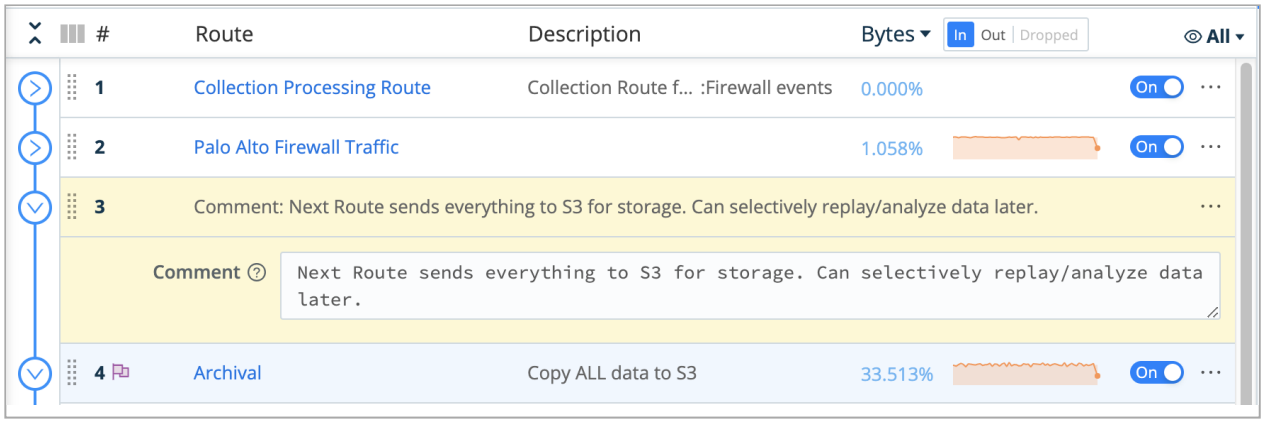

Comments make the Routing table self-documenting

Output Destination

You can configure each Route with an **Output** that defines a Destination to send events to, after they're processed by the Pipeline.

If you toggle the **Enable expression** slider to `Yes`, the **Output** field changes to an **Output expression** field. Here, you can enter a JavaScript expression that Cribl Stream will evaluate as the name of the Destination.

Sample expression format: `myType:myDest_${C.logStreamEnv}`. (This evaluation happens at Route construction time, not per event.)

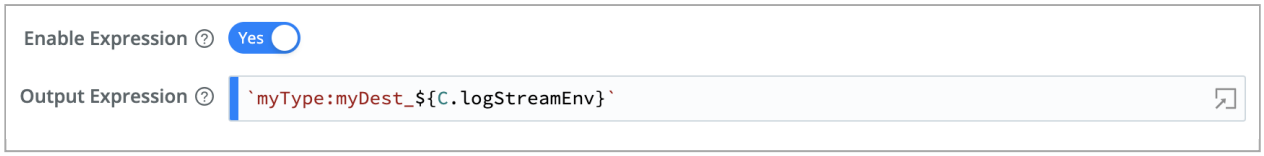

Output expression enabled

> Expressions that match no Destination name will silently fail.
>
> On Routes within Packs, neither **Output** control is available, because Packs cannot specify Destinations.

The `Final` Toggle

When an event that enters the system and matches a Route-Pipeline pair, it will usually be either:

- Dropped by a function, or
- Transformed (optionally) and exit the system.

This behavior is ensured by the `Final` toggle in Route settings. It defaults to `Yes`, meaning that matched events will be **consumed** by that Route, and will not be evaluated against any other Routes that sit below it.

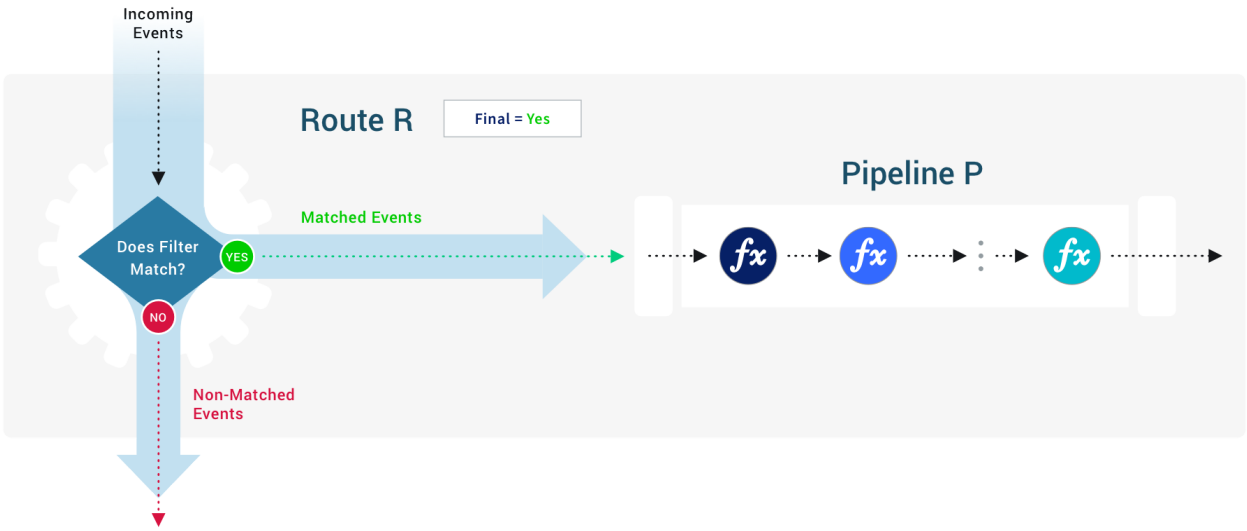

If the `Final` toggle is set to `No`, clone(s) of the matching events will be processed by the configured Pipeline, and the original events will be allowed to continue their trip to be evaluated and/or processed by other

Route-Pipeline pairs. In the diagram below, events will continue down to be evaluated by other Pipelines.

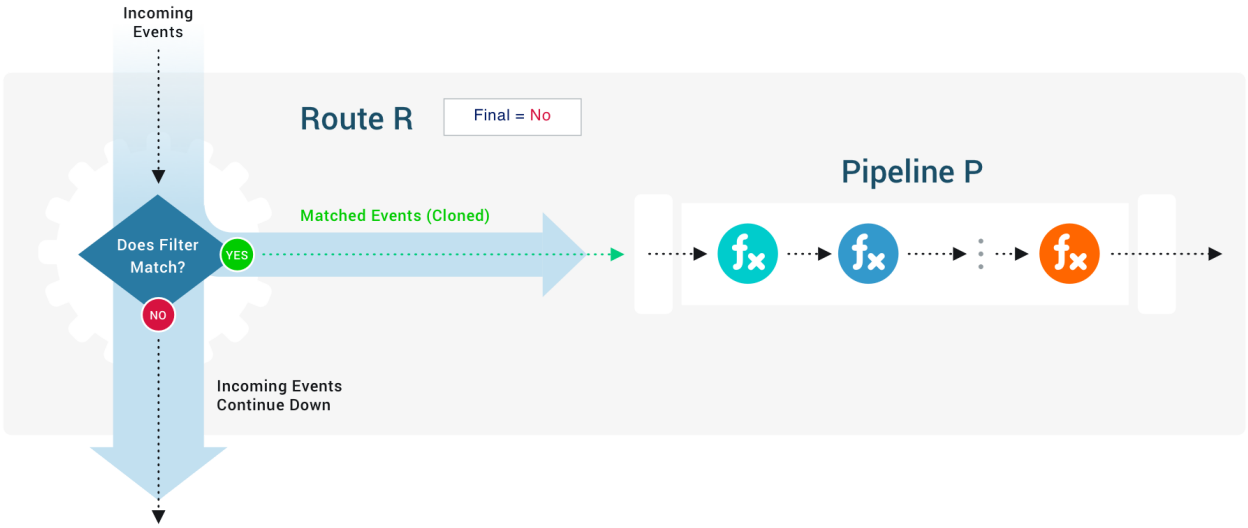

When you set the `Final` toggle to `No`, the **Add Clone** button appears. Click it to open the table shown below. Here, you can add a field – name and value – to the cloned events sent to this Route's Pipeline. Click **Add Field** to define more added fields/values.

Non-final Route: add clone fields

Final Flag and Cloning Considerations

Depending on your cloning needs, you might want to follow a **most-specific first** or a **most-general first** processing strategy. The general goal is to minimize the number of filters/Routes an event gets evaluated against. For example:

- If cloning is not needed at all (i.e., all `Final` toggles stay at default), then it makes sense to start with the broadest expression at the top, so as to consume as many events as early as possible.
- If cloning is needed on a narrow set of events, then it might make sense to do that upfront, and follow it with a Route that consumes those clones immediately after.

The `endRoute` Bumper

The `endRoute` bumper appears at the bottom of the Routing table. This is a reminder that, if **no** Route in the table has the `Final` flag enabled, events will continue to Cribl Stream's configured Default Destination.

endRoute warning and link

This is a backstop to ensure data flow. However, if that configured default is also configured as the **Output** of a Route higher in the table, duplicate events will reach that Destination.

You can correct this either by setting a Route to `Final`, or by changing the Default Destination. The bumper provides a link to the Default Destination's config, and identifies the currently configured default in parentheses.

Route Groups

A Route group is a collection of consecutive Routes that can be moved up and down the Route stack together. Groups help with managing long lists of Routes. They are a UI visualization only: While Routes are in a group, those Routes maintain their global position order.

> Route groups work much like Function groups, offering similar UI controls and drag-and-drop options.

Unreachable Routes

Routes display an "unreachable" warning indicator (orange triangle) when data can't reach them.

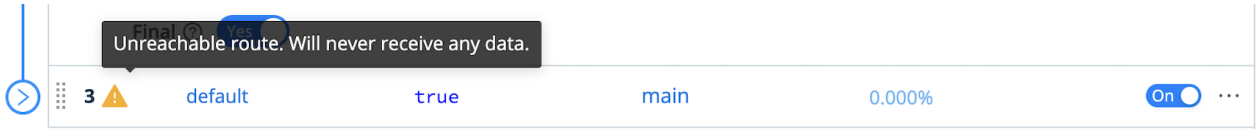

Unreachable Route warning, on hover

This condition will occur when, with your current configuration, any Route higher in the stack matches **all** three of these conditions:

- Previous Route is enabled (slider is set to `On`).
- Previous Route is final (**Final** slider is set to `Yes`).
- Previous Route's **Filter** expression evaluates to true, (e.g., `true`, `1 === 1`, etc.).

Note that the third condition above can be triggered intermittently by a randomizing method like `Math.random()`. This might be included in a previous Route's own Filter expression, or in a Pipeline Function (such as one configured for random data sampling).

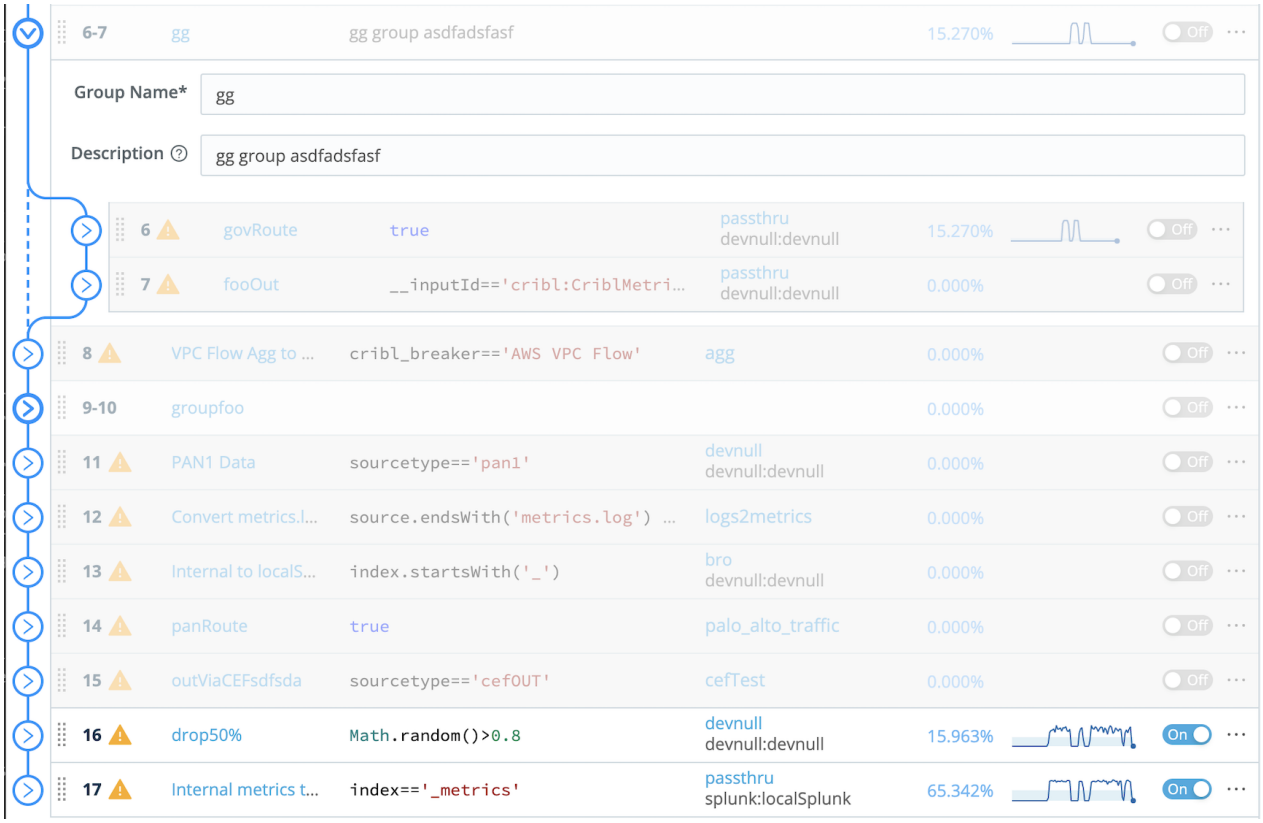

Unreachable Route warnings, many

Routing with Output Router

Output Router Destinations offer another way to route data. These function as meta-Destinations, in that they allow you to send data to multiple peer Destinations based on rules. Rules are evaluated in order, top->down, with the first match being the winner.

8.4. Pipelines

Data matched by a given Route is delivered to a Pipeline. Pipelines are the heart of Cribl Stream processing. Each Pipeline is a list of Functions that work on the data.

> As with Routes, the order in which the Functions are listed matters. A Pipeline's Functions are evaluated in order, top->down.

Accessing Pipelines

Select **Processing** > **Pipelines** from Cribl Stream's global top nav (single-instance deployments) or from a Worker Group's/Fleet's top nav (distributed deployments). Next, click any displayed Pipeline to see or reconfigure its contained Functions.

> After you've clicked into a Pipeline, the right Preview pane adds a Pipeline Status tab, which you can click to see the Pipeline's events throughput.

Adding Pipelines

To create a new Pipeline, or to import an existing Pipeline to a different Cribl Stream instance, click **Add Pipeline** at the upper right. The resulting menu offers three options:

- **Create Pipeline**: Configure a new Pipeline from scratch, by adding Functions in Cribl Stream's graphical UI.
- **Import from File**: Import an existing Pipeline from a `.json` file on your local filesystem.
- **Import from URL**: Import an existing Pipeline from `.json` file at a remote URL. (This must be a public URL ending in `.json` – the import option doesn't pass credentials to private URLs – and the target file must be formatted as a valid Pipeline configuration.)

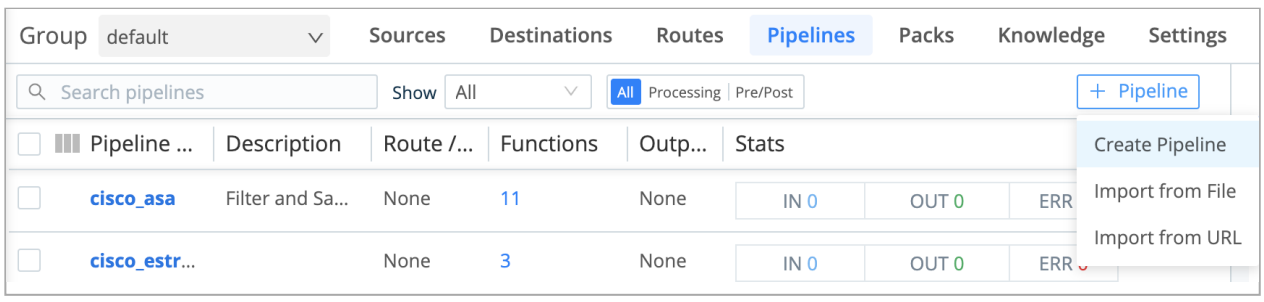

To export a Pipeline, see Advanced Mode (JSON Editor).

To import or export a Pipeline along with broader infrastructure (like Knowledge Objects and/or sample data files), see Packs.

How Do Pipelines Work

Events are always delivered to the beginning of a Pipeline via a Route. The data in the **Stats** column shown below are for the last 15 minutes.

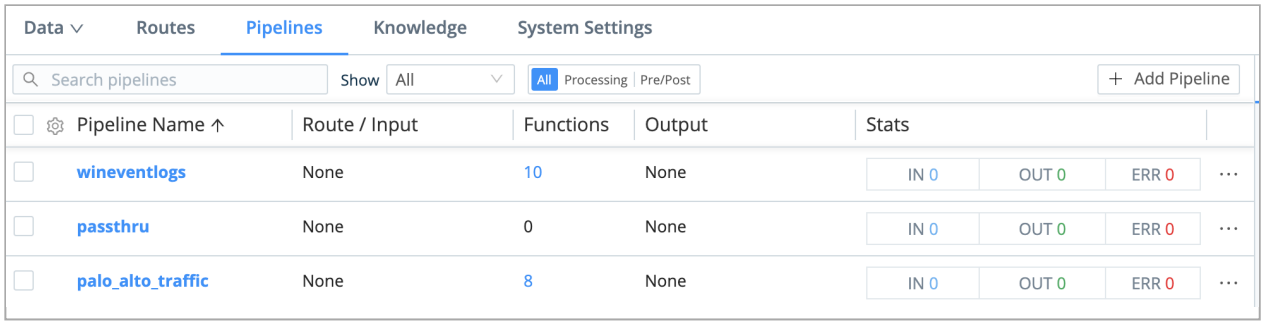

Pipelines and Route inputs

You can press the] (right-bracket) shortcut key to toggle between the Preview pane and an expanded Pipelines display. (This shortcut works when no field has focus.)

In the condensed Pipelines display above, you can also hover over any Pipeline's **Functions** column to see a horizontal preview of the stack of Functions contained in the Pipeline:

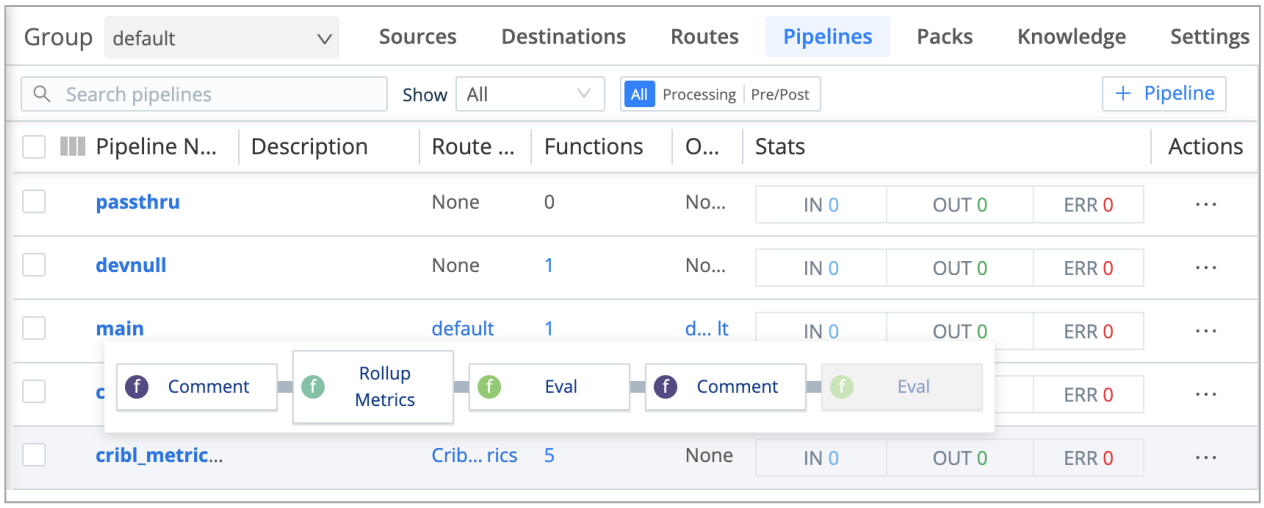

Preview on hovering over the bottom Pipeline (highlighted in gray)

Within the Pipeline, events are processed by each Function, in order. A Pipeline will always move events in the direction that points outside of the system. This is on purpose, to keep the design simple and avoid potential loops.

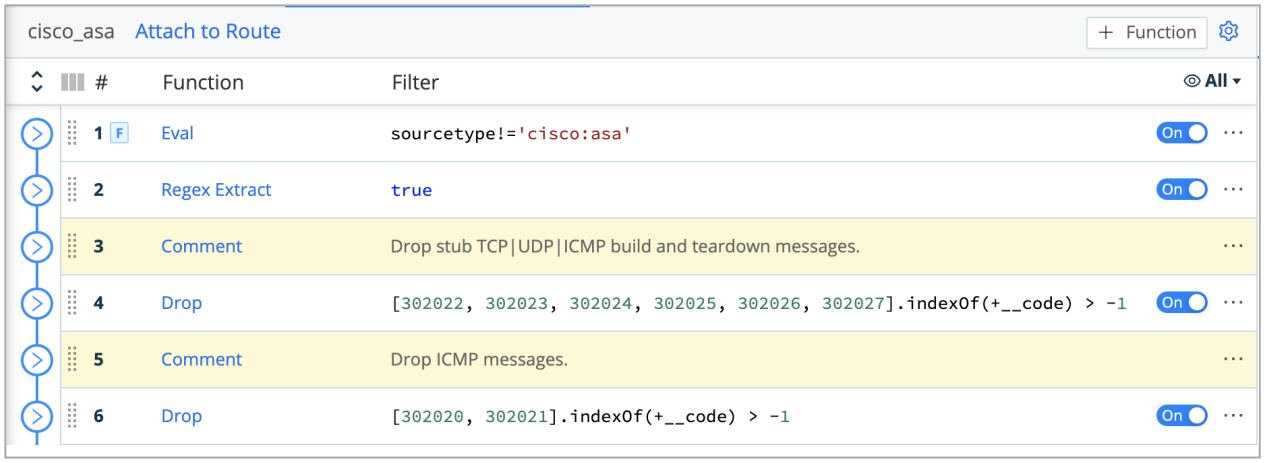

Pipeline Functions

> Use the **Attach to Route** link at upper left to associate a new Pipeline with a Route.
>
> You can streamline a complex Pipeline's display by organizing related Functions into Function groups.

Pipeline Settings

Click the gear button at the top right to open the Pipeline's Settings. Here, you can:

- Use the **Async function timeout (ms)** to set the maximum amount of processing time, in milliseconds, that a Function is allowed to take before it is terminated. This prevents a Function from causing

undesirable delays in your Pipeline (for example, a Lookup Function taking too long to process a large lookup file).

- Use the **Tags** field to attach arbitrary labels to the Pipeline. Once attached, you can use these tags to filter/search and group Pipelines.

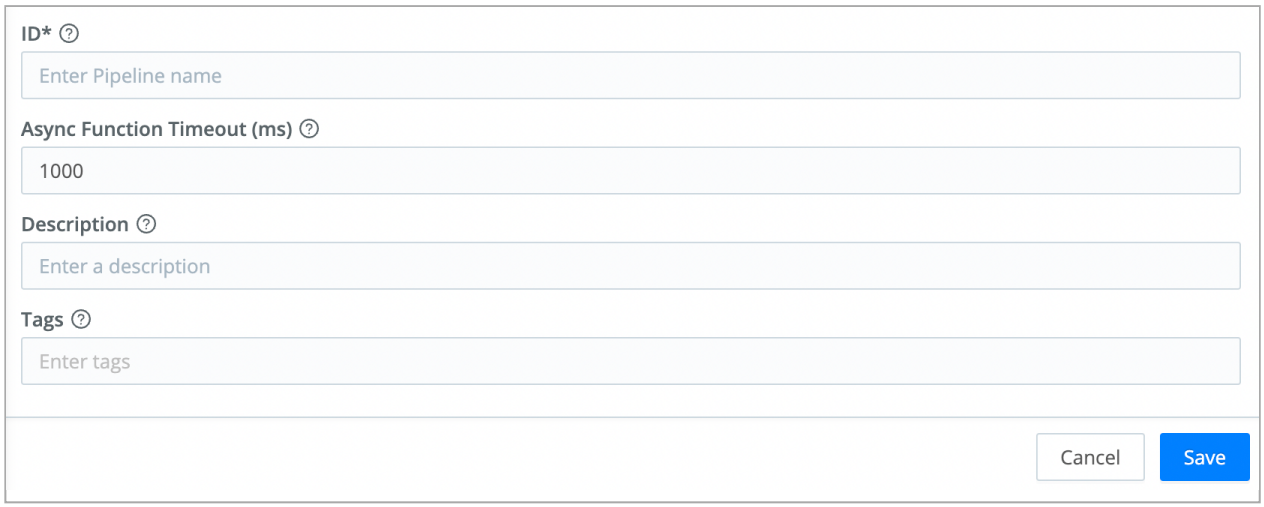

Pipeline Settings

Advanced Mode (JSON Editor)

Once you've clicked the gear button to enter Pipeline Settings, you can click **Manage as JSON** at the upper right to edit the Pipeline's definition in a JSON text editor. In this mode's editor, you can directly edit multiple values. You can also use the **Import** and **Export** buttons here to copy and modify existing Pipeline configurations, as `.json` files.

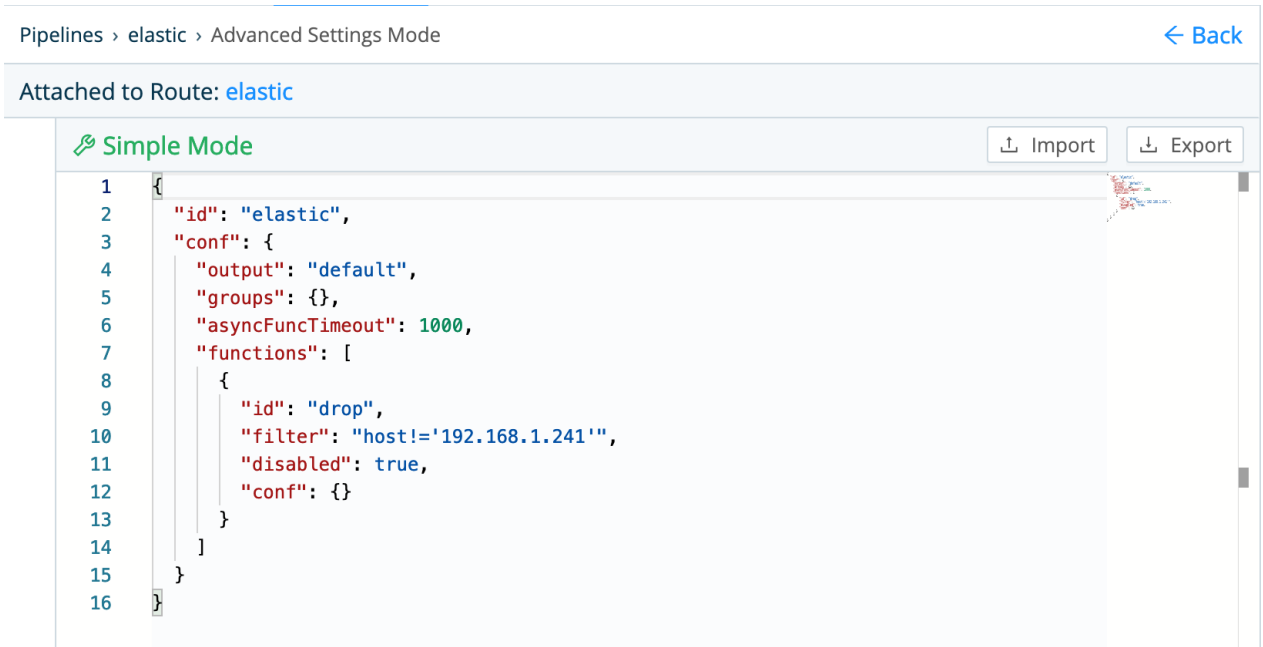

Click **Edit in GUI** at upper right to return to the graphical Pipeline Settings page; then click **Back to <pipeline-name>** to restore the graphical Pipeline editor.

Pipeline Actions

Click a Pipeline's Actions (**...**) menu to display options for copying or deleting the Pipeline.

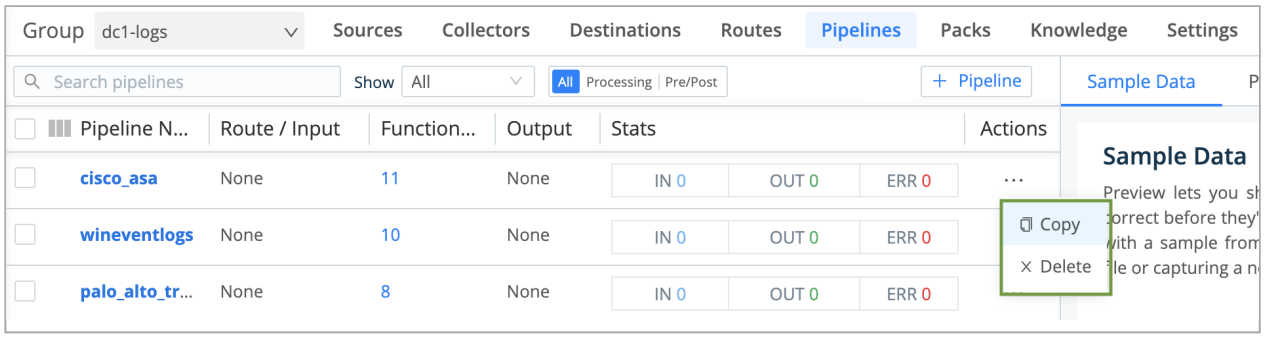

Pipeline > Actions menu

Copying a Pipeline displays the confirmation message and the (highlighted) Paste button shown below.

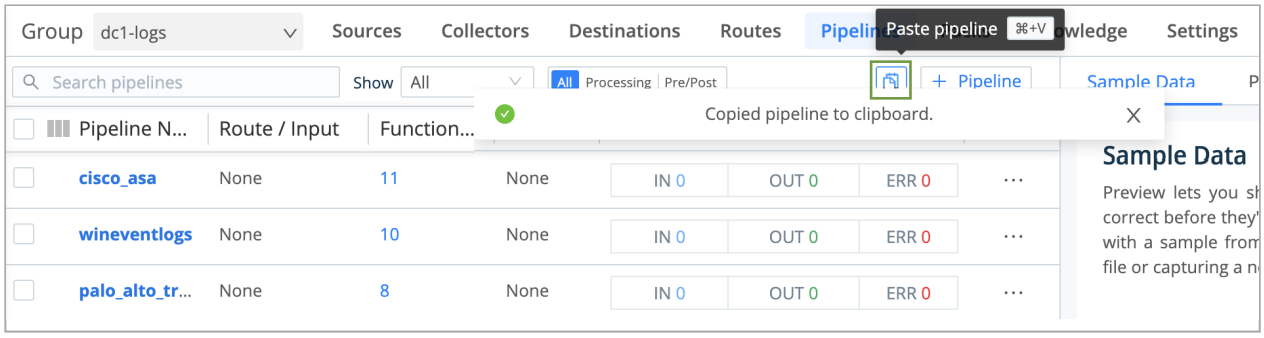

Paste button for copied Pipeline

Pasting prompts you to confirm, or change, a modified name for the new Pipeline. The result will be an exact duplicate of the original Pipeline in all but name.

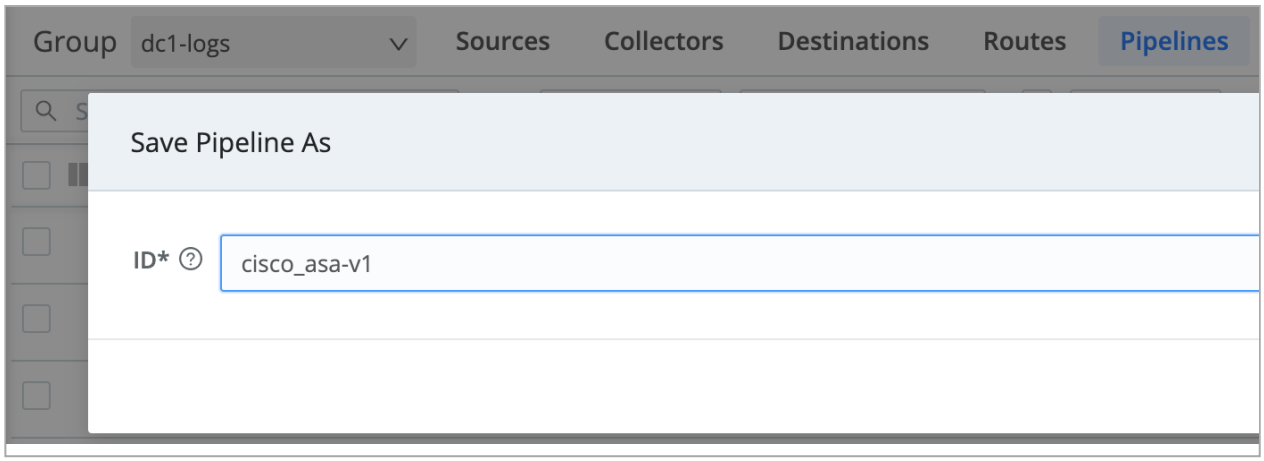

Saving/renaming a pasted Pipeline

Chaining Pipelines

In Cribl Stream (LogStream) 3.2.x and above, you can use the Chain Function to send the output of a Pipeline to another Pipeline or Pack. There are scope restrictions within Packs, and general guardrails against circular references.

Types of Pipelines

You can apply various Pipeline types at different stages of data flow. All Pipelines have the same basic internal structure (a series of Functions) – the types below differ only in their position in the system.

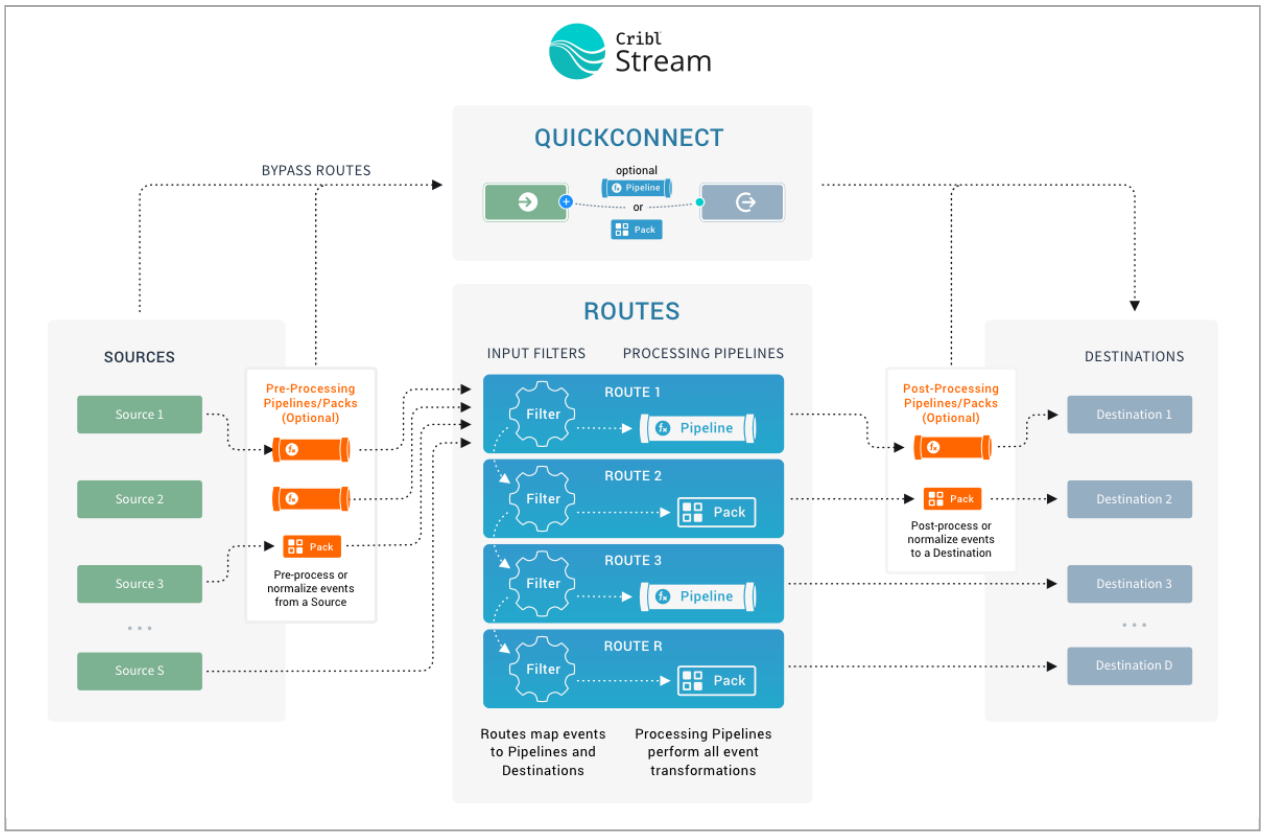

Pre-processing, processing, and post-processing Pipelines

Pre-Processing Pipelines

These are Pipelines that are attached to a Source to condition (normalize) the events **before** they're delivered to a processing Pipeline. They're optional.

Typical use cases are event formatting, or applying Functions to **all** events of an input. (E.g., to extract a `message` field before pushing events to various processing Pipelines.)

You configure these Pipelines just like any other Pipeline, by selecting **Pipelines** from the top menu. You then attach your configured Pipeline to individual Sources, using the Source's **Pre-Processing > Pipeline** drop-down.

Fields extracted using pre-processing Pipelines are made available to Routes.

Processing Pipelines

These are "normal" event processing Pipelines, attached directly to Routes.

Post-Processing Pipelines

These Pipelines are attached to a Destination to normalize the events before they're sent out. A post-processing Pipeline's Functions apply to **all** events exiting to the attached Destination.

Typical use cases are applying Functions that transform or shape events per receiver requirements. (E.g., to ensure that a `_time` field exists for all events bound to a Splunk receiver.)

You configure these Pipelines as normal, by selecting **Pipelines** from the top menu. You then attach your configured Pipeline to individual Destinations, using the Destination's **Post-Processing > Pipeline** drop-down.

You can also use a Destination's **Post-Processing** options to add **System Fields** like `cribl_input`, identifying the Cribl Stream Source that processed the events.

Best Practices for Pipelines

Functions in a Pipeline are equipped with their own filters. Even though filters are not required, we recommend using them as often as possible.

As with Routes, the general goal is to minimize extra work that a Function will do. The fewer events a Function has to operate on, the better the overall performance.

For example, if a Pipeline has two Functions, **f1** and **f2**, and if **f1** operates on `source 'foo'` and **f2** operates on `source 'bar'`, it might make sense to apply `source=='foo'` versus `source=='bar'` filters on these two Functions, respectively.

8.5. Packs

Packs enable Cribl Stream administrators and developers to pack up and share complex configurations and workflows across multiple Worker Groups, or across organizations.

Packs = Portability

With a Cribl Stream deployment of any size, using Packs can simplify and accelerate your work. Packs can also accelerate internal troubleshooting, and accelerate working with Cribl Support, because they facilitate quickly replicating your Cribl Stream environment.

For example, where a Pipeline's configuration references Lookup file(s), Cribl Stream will import the Pipeline only if the Lookups are available in their configured locations. A Pack can consolidate this dependency, making the Pipeline portable across Cribl Stream instances. You can develop and test a configuration, and then port it from development to production instances, or readily deploy it to multiple Worker Groups/Fleets.

We don't claim to have brokered world peace here, but we do modestly hope to promote a stable, prosperous Pax Criblatica for the Cribl Stream ecosystem.

What Is a Pack?

Packs are implemented as a user interface (described on this page) and as a `.crbl` file format.

What's in a Pack?

Currently, a Pack can pack up everything between a Source and a Destination:

- Routes (Pack-level)
- Pipelines (Pack-level)
- Functions (built-in and custom)
- Sample data files
- Knowledge objects (Lookups, Parsers, Global Variables, Grok Patterns, and Schemas)

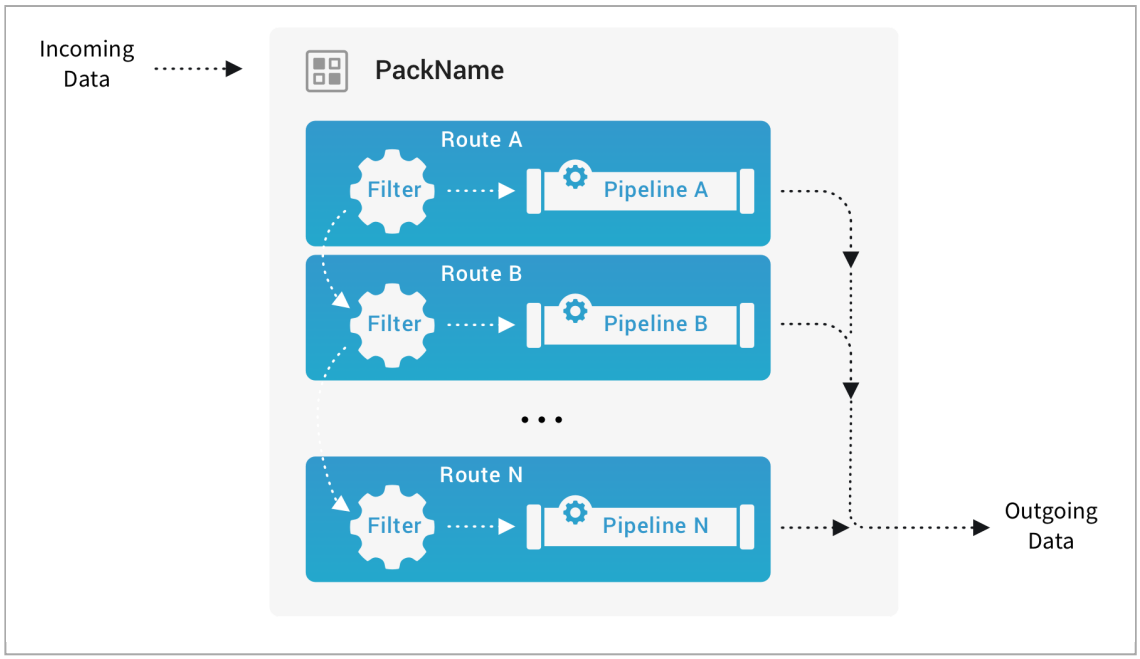

A Pack with internal Routes & Pipelines; no Knowledge or samples

As the above list suggests, a Pack can encapsulate a whole set of infrastructure for a given use case.

> Packs don't have access to Global Variables defined outside the Pack. Global Variables defined **within** a Pack are not available to Cribl Stream resources outside the Pack. In either scenario, you must explicitly duplicate the Variables in the opposite scope.

What's Not in a Pack?

Sources, Collectors, and Destinations are external to Packs, so you can't specify them within a Pack. This excludes a few other things:

- Routes configured within a Pack can't specify a Destination.
- Packs can't include Event Breakers, which are associated with Sources. (However, you can instead use the Event Breaker Function in Packs' contained Pipelines.)

You connect a Pack with a Source and Destination by attaching it to a Route (see below), just as you'd attach a Pipeline.

Where Can I Get Some Packs?

Easy now. See The Cribl Packs Dispensary™ below.

Using Packs

These instructions cover using predefined Packs, as well as creating and modifying Pack configurations.

> **Version Compatibility**
>
> Packs created or modified in Cribl Stream 4.0.x cannot be used in any pre-4.0 version of Cribl Stream. (If you try, you'll see a `should NOT have additional properties` error.) To avoid this problem, Cribl recommends that you upgrade to Cribl Stream 4.0.x or later.
>
> For compatibility questions about any individual Packs, please contact us in Cribl Community Slack's `#packs` channel.

Where Can I Use Packs?

Wherever you can reference a Pipeline, you can specify a Pack:

- In Sources, where you attach pre-processing Pipelines.
- In Destinations, where you attach post-processing Pipelines.
- In Routes, in the Routing table's **Pipeline/Output** column.

This expanded view shows how a Pack can replace a Pipeline in a Route:

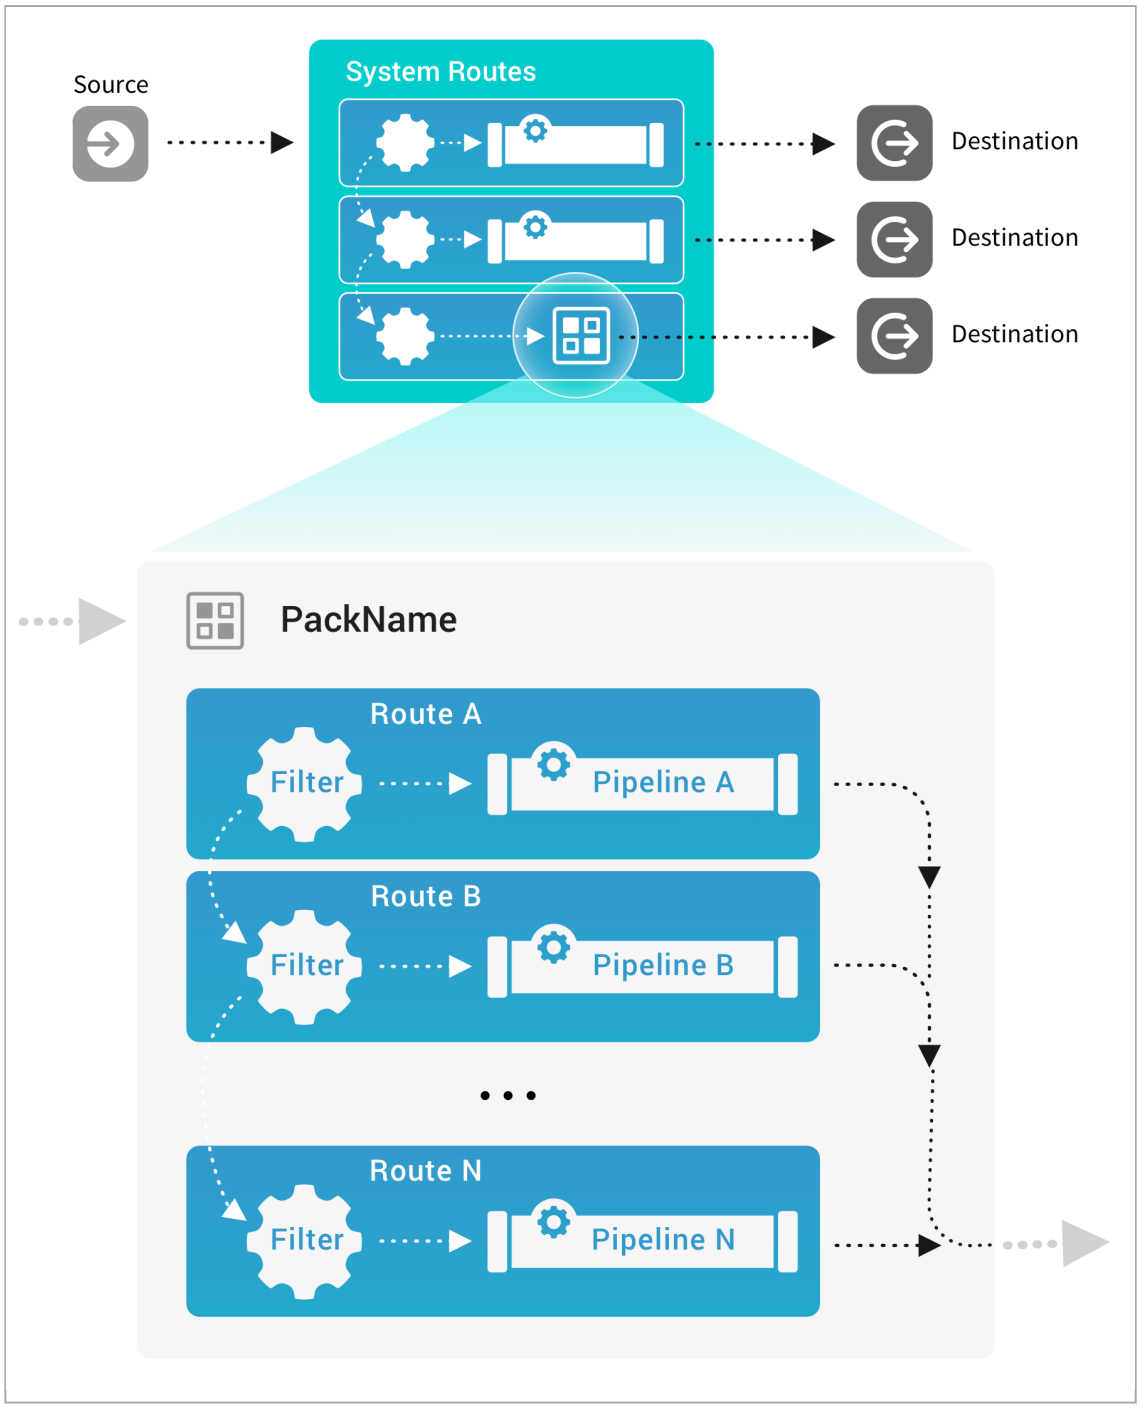

A Pack snaps into Cribl Stream like an enhanced Pipeline

Packs are distinguished in the display with a **PACK** badge, as you can see here in the Routing table:

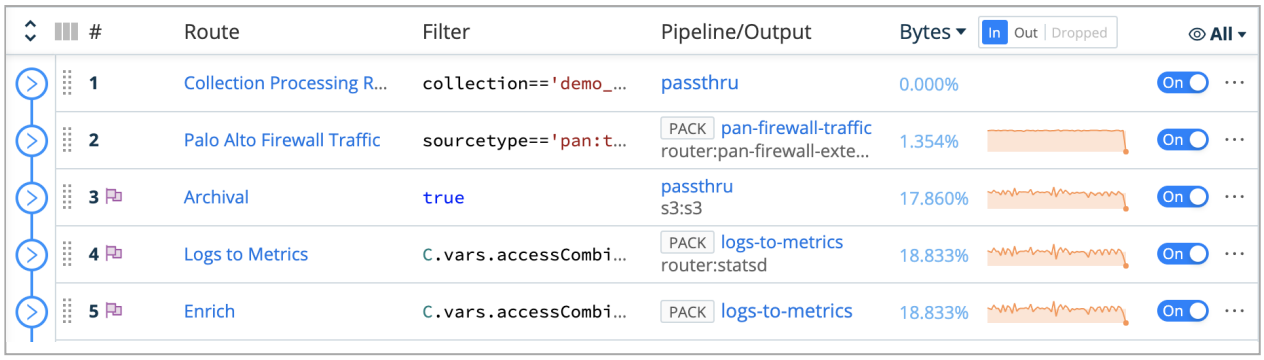

PACKs badged in Routing table's Pipeline column

The **PACK** badge is also displayed when you click into a resource – shown here on one of the Routes from the above table:

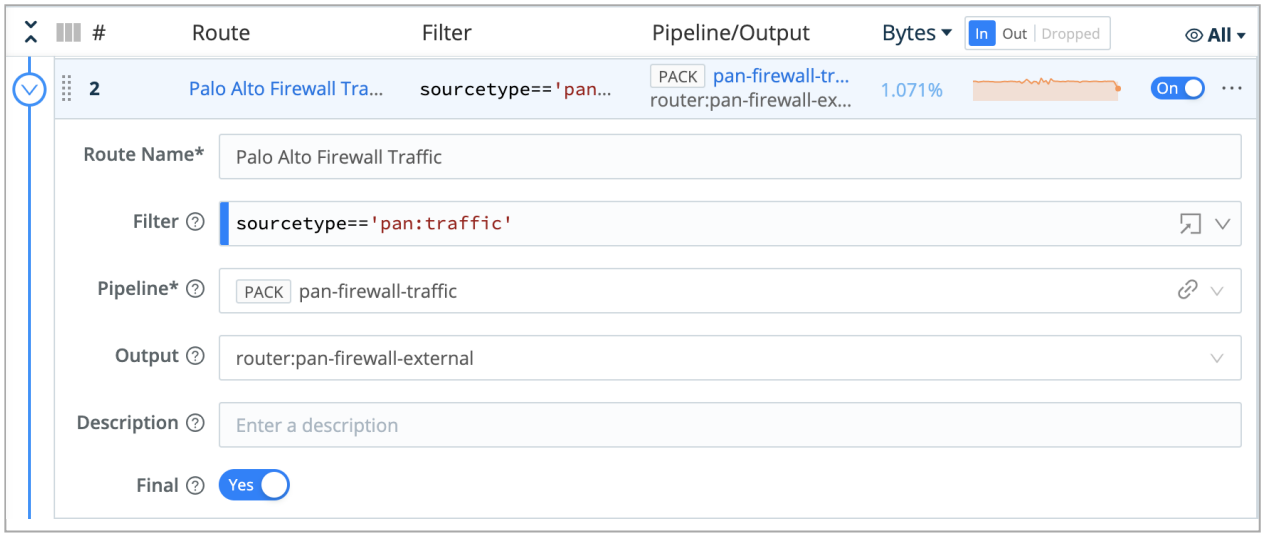

PACK badge on a Pack connected to a Route

Cribl Stream's **Monitoring** page includes a **Packs** link where you can monitor Packs' throughput.

Accessing Packs

You access Packs differently, depending on your deployment type.

Single-Instance

In a single-instance deployment, Packs are global. From Cribl Stream's top-level navigation, just select **Processing** > **Packs**.

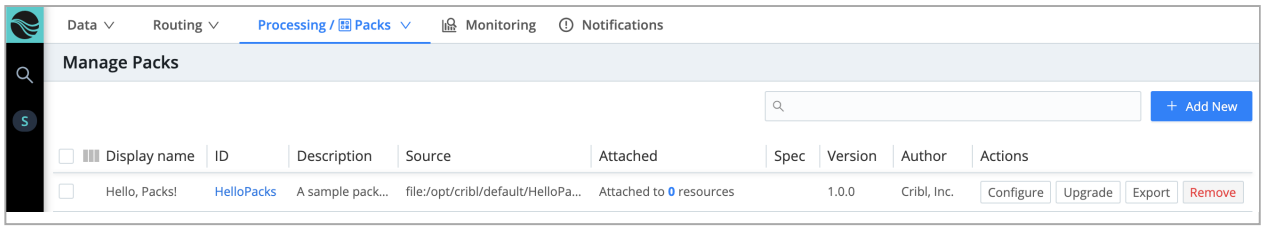

Packs, single-instance navigation

Distributed/Default Worker Group

In a distributed deployment with the default single Worker Group (Leader mode), select **Manage**, click into the `default` group, and then select **Processing** > **Packs**.

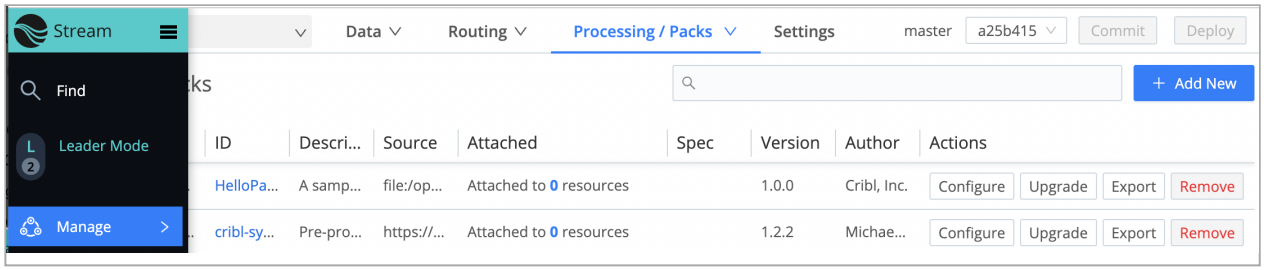

Packs, Leader mode

Distributed/Multiple Worker Groups/Fleets

In a distributed deployment with multiple Worker Groups/Fleets (Leader mode), Packs are associated with (and installed within) Worker Groups. Navigate to the parent Worker Group, then select **Processing** > **Packs** from that Group's top nav.

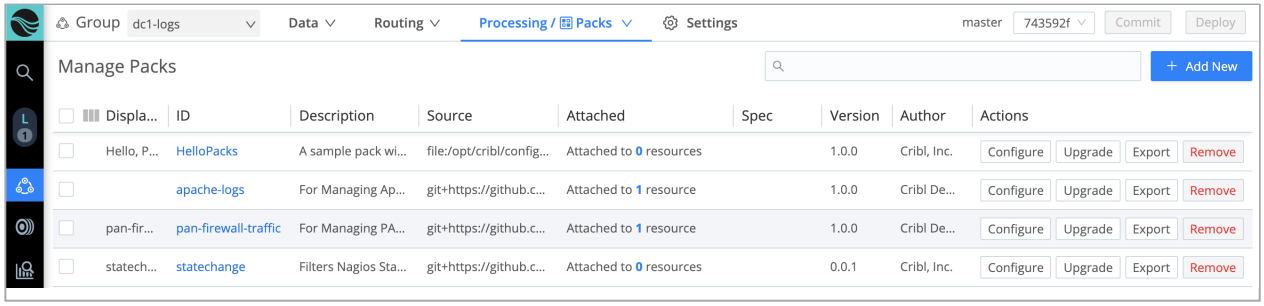

Worker Group > Manage Packs page

As the top nav adds more controls on narrower browsers, **Packs** and other right-side links can move onto the ••• overflow menu, as shown above.

> By design, you can readily share Packs **across** Worker Groups/Fleets by exporting/importing them (both covered below).

Getting Started with Packs

To unpack Packs, use the above instructions (per deployment type) to navigate to the **HelloPacks** example Pack shipped with Cribl Stream. On the **Manage Packs** page, click this Pack's row to see its configuration.

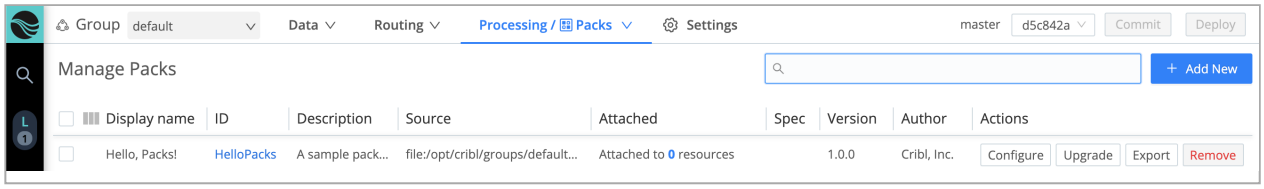

Manage Packs page with example Pack

Click **Pipelines** on the Pack's submenu, and you'll see that the Pack includes `devnull`, `main`, and `passthru` Pipelines, corresponding to the default Pipelines provided at Cribl Stream's global level. This Pack also includes an Apache-specific sample Pipeline – click it to unpack that, too.

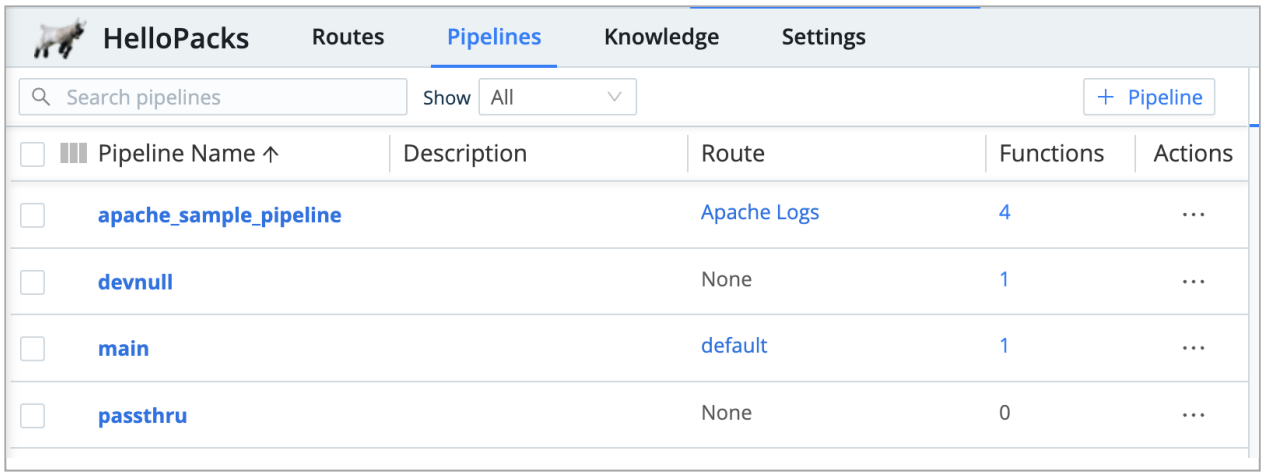

Pipelines within example Pack

Click **Routes** on the Pack's submenu, and you'll see that this Pack also provides both a `default` and an Apache-specific Route.

Configuring a Pack

Once loaded, each Pack displays a submenu with familiar links: **Routes**, **Pipelines**, **Knowledge**, and **Settings** on the left pane, along with **Sample Data**, and **Preview Simple** on the right. The Pack's submenu is a subset of Cribl Stream's top nav.

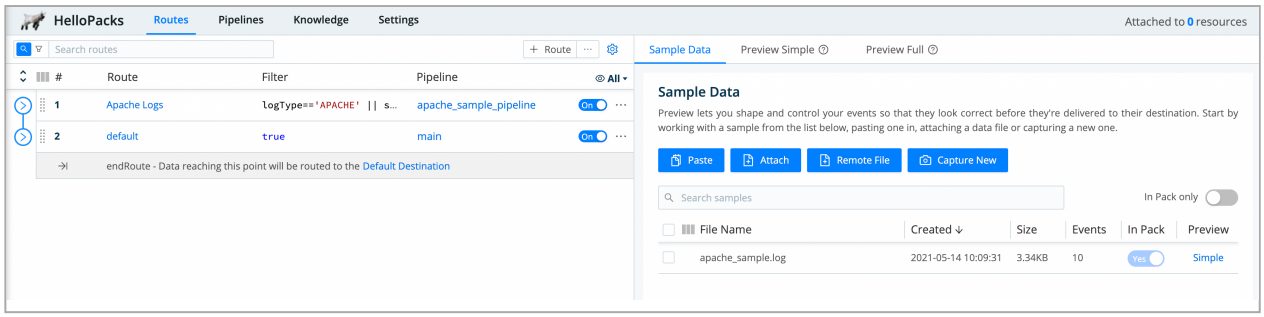

Configuring a Pack

The left pane's submenu links give you access to configuration objects specific to this Pack.

Sample Data

The right pane defaults to displaying all sample data files available on your Cribl Stream instance. If you prefer to filter only sample files internal to the Pack, toggle the **In Pack only** slider to the right.

If you add sample data files via this Pack UI, they will be internal to that Pack. Each sample file here displays its own **In Pack** toggle on its row, which works as follows:

A light-blue toggle is locked, meaning that this sample file is internal to the Pack. It will export with the Pack. If you want to make this sample available across Cribl Stream, you'll need to also add it via the global right preview pane (accessed from **Routing** > **Data Routes** or **Processing** > **Pipelines**).

A grayed-out or dark-blue toggle means that this sample file is global to Cribl Stream. It is available to this Pack. Toggle this to `Yes` (dark blue) if you want the sample file to export along with the Pack.

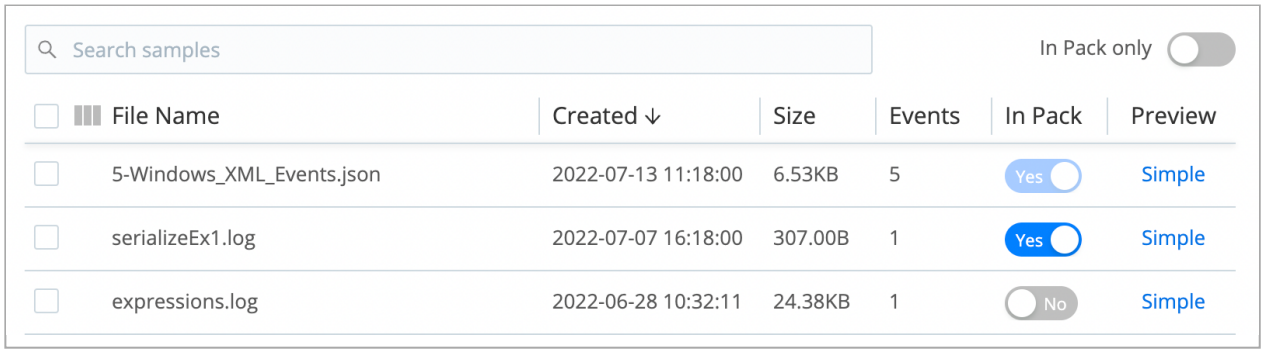

Sample file in Pack

Basically, you can manipulate all the options here as you'd work with their big sister or brother in Cribl Stream's global navigation.

Importing or Upgrading a Pack

To import a new Pack, or an updated version of an existing Pack, from your filesystem:

1. Navigate to the **Manage Packs** page.
2. Click **Add Pack** at the upper right.
3. Select your desired **Add**/**Import** source: Dispensary, File, URL, or Git repo.
4. Follow the above links to details on each of these options.

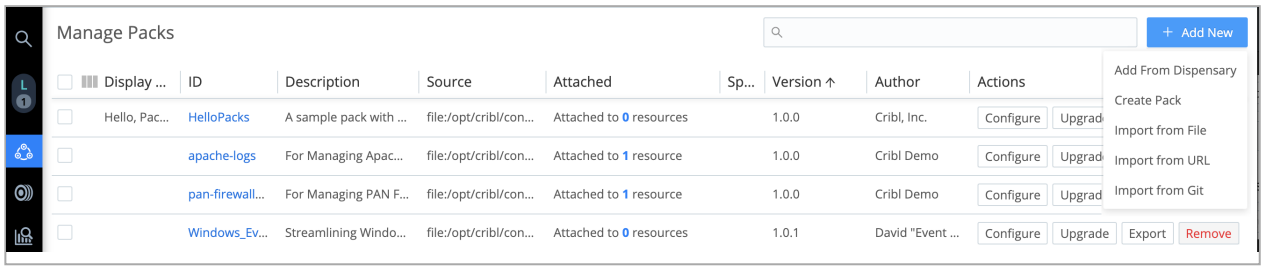

Importing a Pack

Custom Functions

Packs can include Pipelines containing custom functions, which can (in turn) run arbitrary JavaScript. Before you install a Pack, make sure it comes from a provider you trust, such as the Cribl Packs Dispensary or your own organization.

As an additional protection layer, all Pack import modals provide an **Allow custom functions** slider. In the slider's default `No` position, if Cribl Stream detects custom functions in the specified Pack, it will block the import with an error message. If you trust the Pack's provider, toggle the slider to `Yes`, and the import will proceed normally.

The Cribl Packs Dispensary™

You might be wondering, "Where can I find a reliable source of Packs that add useful features to Cribl Stream, vetted for safety?"

Well, Cribl is proud to point you to the Cribl Packs Dispensary™. Here, Cribl's own solutions engineers have seeded several strains of high-productivity Cribl Stream configurations. Because the Packs Dispensary™ is a place to share good stuff, we expect many new hybrids to sprout from the community. Cribl will test and curate submissions to ensure the quality of the repo's contents.

You can install Dispensary Packs directly through Cribl Stream's UI, as outlined in Add from Packs Dispensary below.

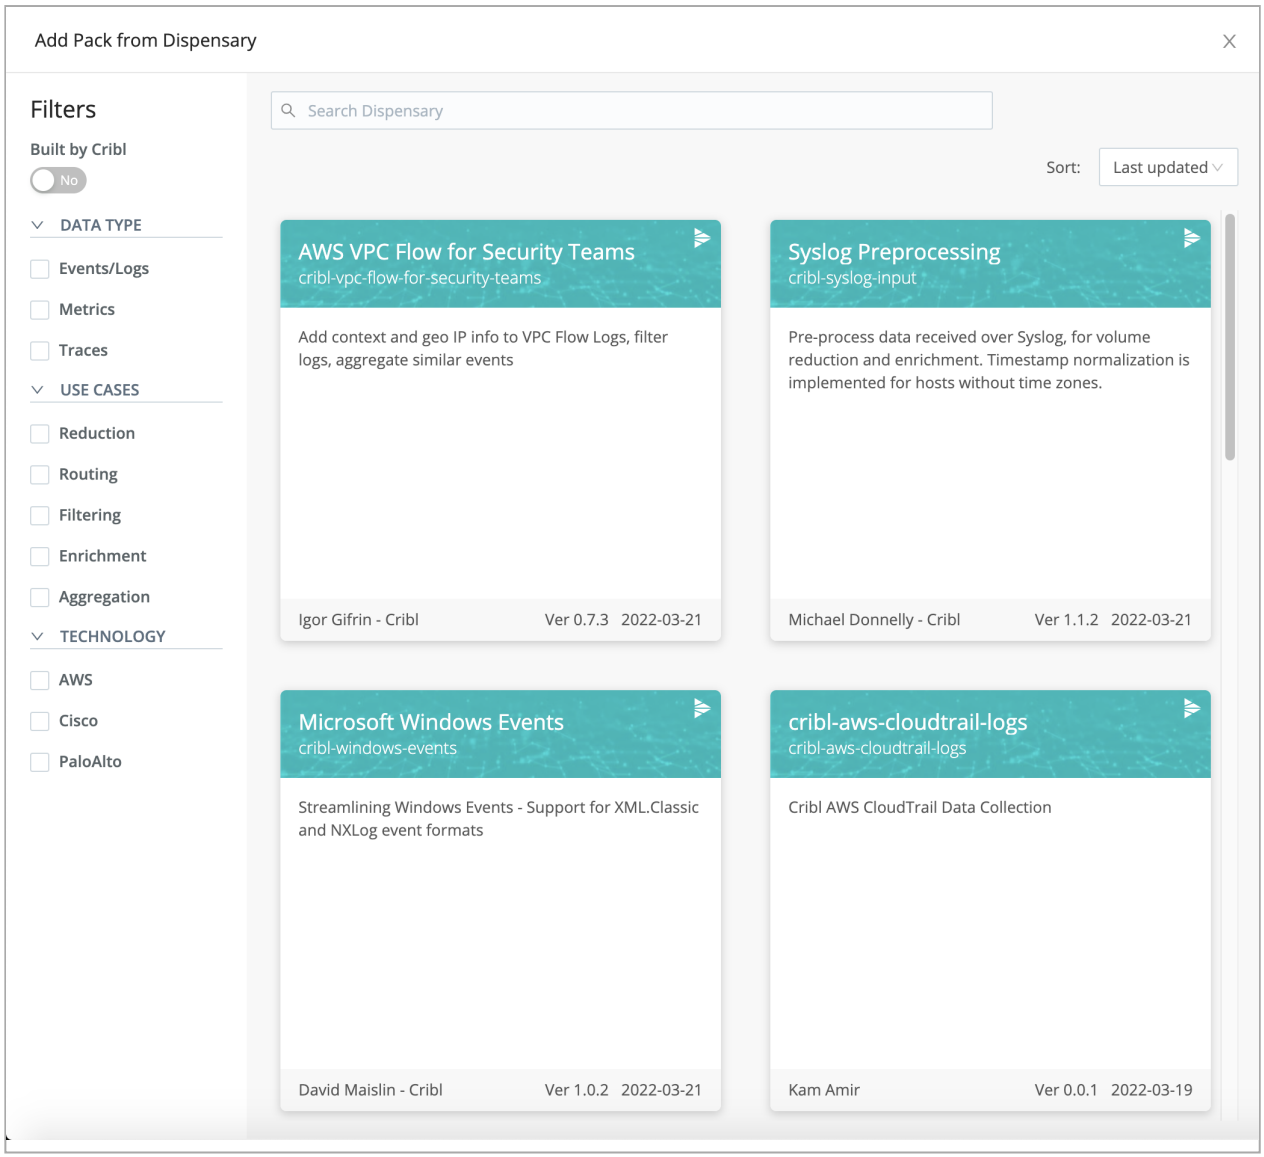

Cribl Packs Dispensary™ (as displayed in Cribl Stream's **Add** drawer)

Interested in publishing your own Packs on the Cribl Packs Dispensary™? See Publishing a Pack.

Add from Packs Dispensary

To add a Pack from the Cribl Packs Dispensary™ sharing site:

1. From the **Manage Packs** page's **New Pack** submenu, select **Add from Dispensary**.
2. The Packs Dispensary will open in a drawer, as shown in the screenshot above.
3. Using the drawer's controls, browse or search for the Pack(s) you want. (You can use the check boxes at the left to filter by data type, use case, and technology.)
4. Click any Pack's tile to display its details page with its README. This will typically outline the Pack's purpose, compatibility, requirements, and installation.

5. To proceed, click **Add Pack** on this page.
6. That's it! You'll see a banner confirming that the Pack is now installed.

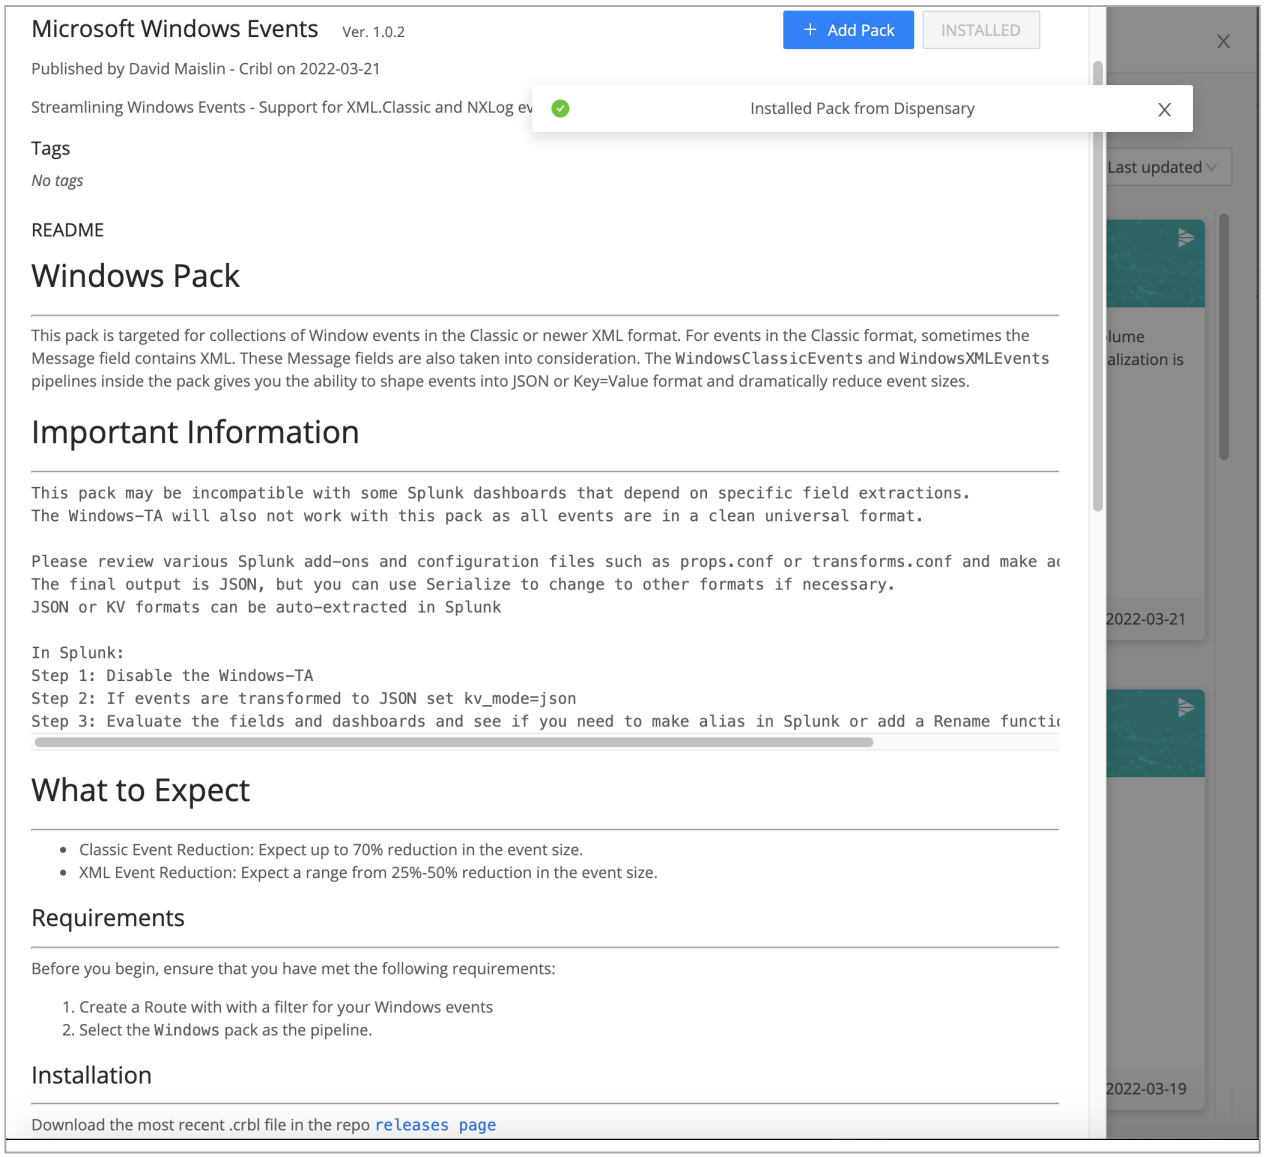

Pack details page: Composite with **Add Pack** button, confirmation banner, Dispensary drawer in background

Import from File

To import a Pack (`.crbl` file) from your local filesystem:

1. From the **New Pack** submenu, select **Import from File**.
2. From the resulting File Open dialog, select the file to import.
3. Optionally, give the pack an explicit, unique **New Pack ID**. (For details about this option, see Upgrading an Existing Pack below.)
4. Where appropriate (see just above), enable **Allow custom functions**.

5. Click **OK** to confirm the import.

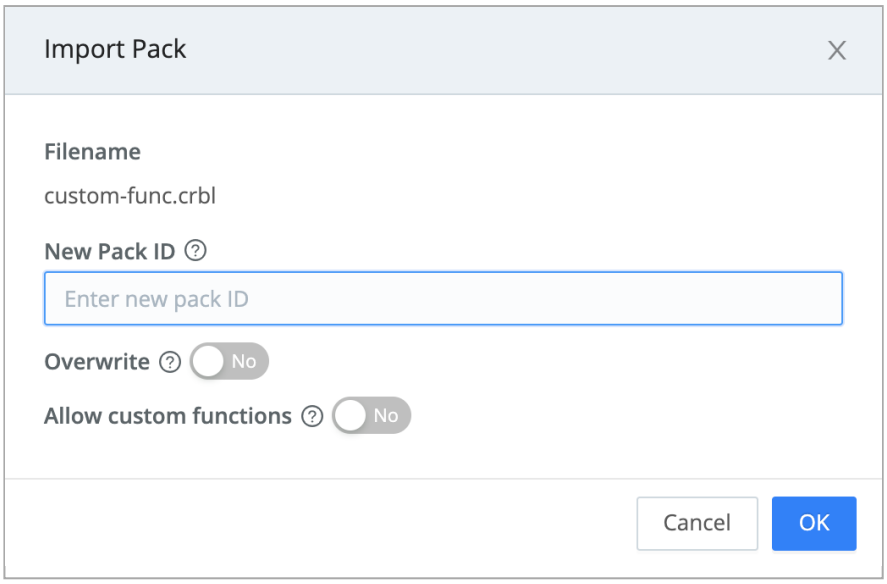

Importing from a file

Import from URL

To import a Pack from a known, public or internal, URL:

1. From the **New Pack** submenu, select **Import from URL**.
2. Enter a valid URL for the Pack's source. (This field's input is validated for URL format, but not for accuracy, before you submit the modal.)
3. Optionally, give the pack an explicit, unique **New Pack ID**. (See Upgrading an Existing Pack.)
4. Where appropriate, enable **Allow custom functions**. (See Custom Functions.)
5. Click **OK** to confirm the import.

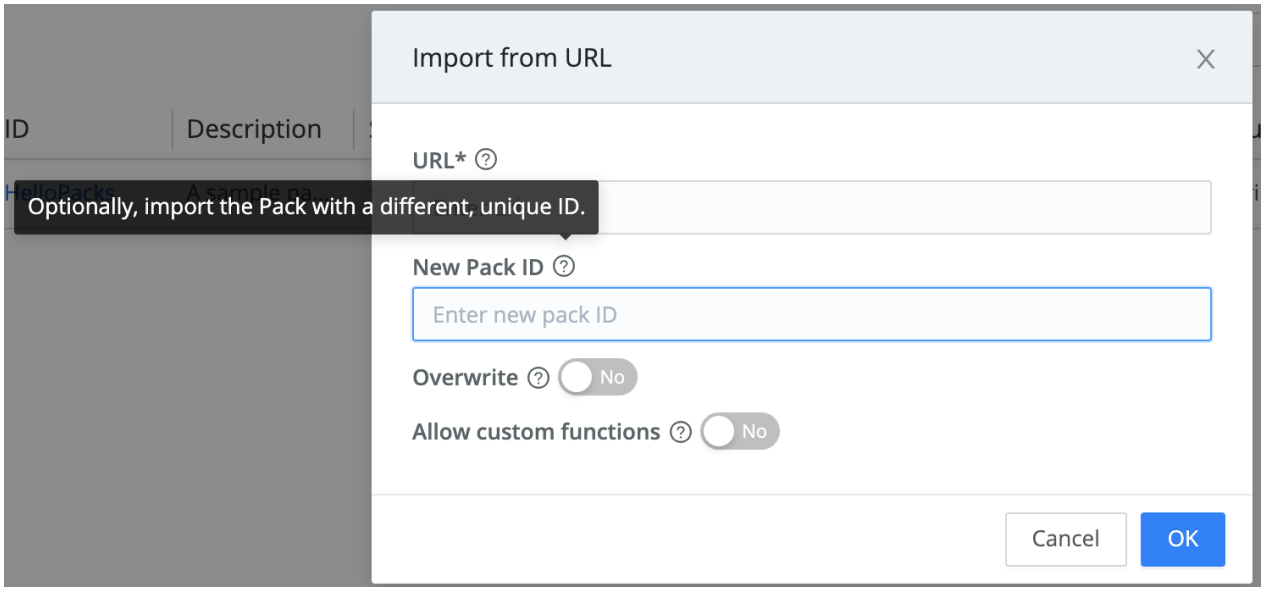

> To import a Pack from a public URL, Cribl Stream's Leader Node (or single instance) requires Internet access. A distributed deployment's Leader can then deploy the Pack to Workers even if the Workers lack Internet access.

Import from Git Repos

To import a Pack from a known public or private Git repo:

1. From the **New Pack** submenu, select **Import from Git**.
2. Enter the source repo's valid URL.
   This field's input is validated for URL format, but not for completeness or accuracy, before you submit the modal. When targeting a private repo, use the format: `https://<username>:<token/password>:<repo-address>`. Public repos need only `https://<repo-address>`, as shown in the example below.
3. Optionally, give the pack an explicit, unique **New Pack ID**. (See Upgrading an Existing Pack.)
4. Optionally, enter a **Branch or tag** to filter the import source using the repo's metadata. You can specify a branch (such as `master`) or a tag (such as a release number: `0.5.1`, etc.).
5. Where appropriate (see Custom Functions), enable **Allow custom functions**.
6. Click **OK** to confirm the import.

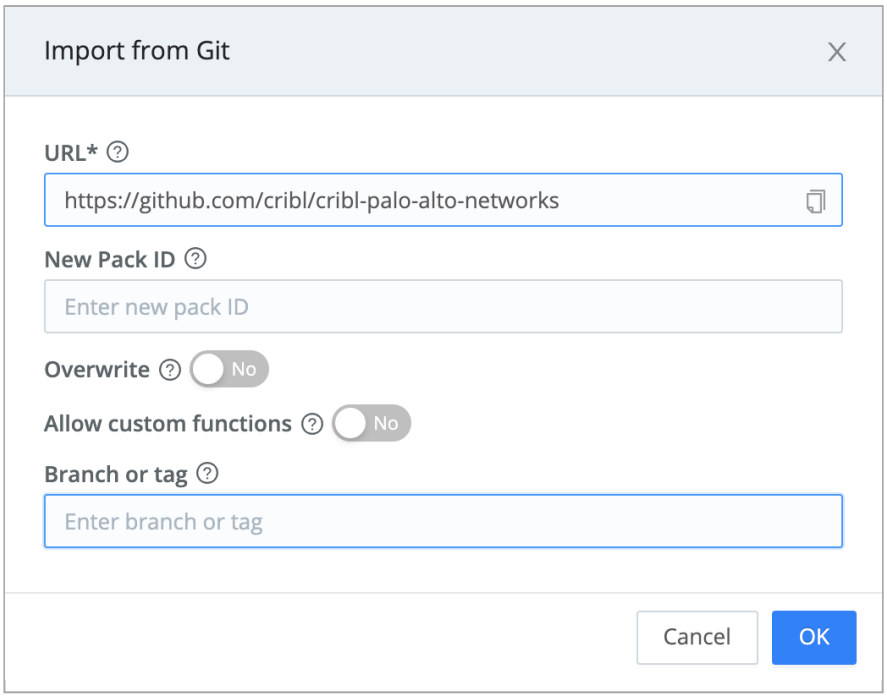

Importing from a Git repo

> To import a Pack from a public repo, Cribl Stream's Leader Node (or single instance) requires Internet access. A distributed deployment's Leader can then deploy the Pack to Workers even if the Workers lack Internet access.

Dispensary GitHub Repo

One authoritative public repo is the Cribl Pack Dispensary on GitHub. (This is the precursor to the Cribl-hosted Cribl Packs Dispensary™ site.)

You can install Dispensary Packs directly through Cribl Stream's UI, as outlined in Import from Git Repos above. However, if you prefer, you can click through to any Dispensary repo's release page, download the corresponding `.crbl` file, and then upload the file into Cribl Stream.

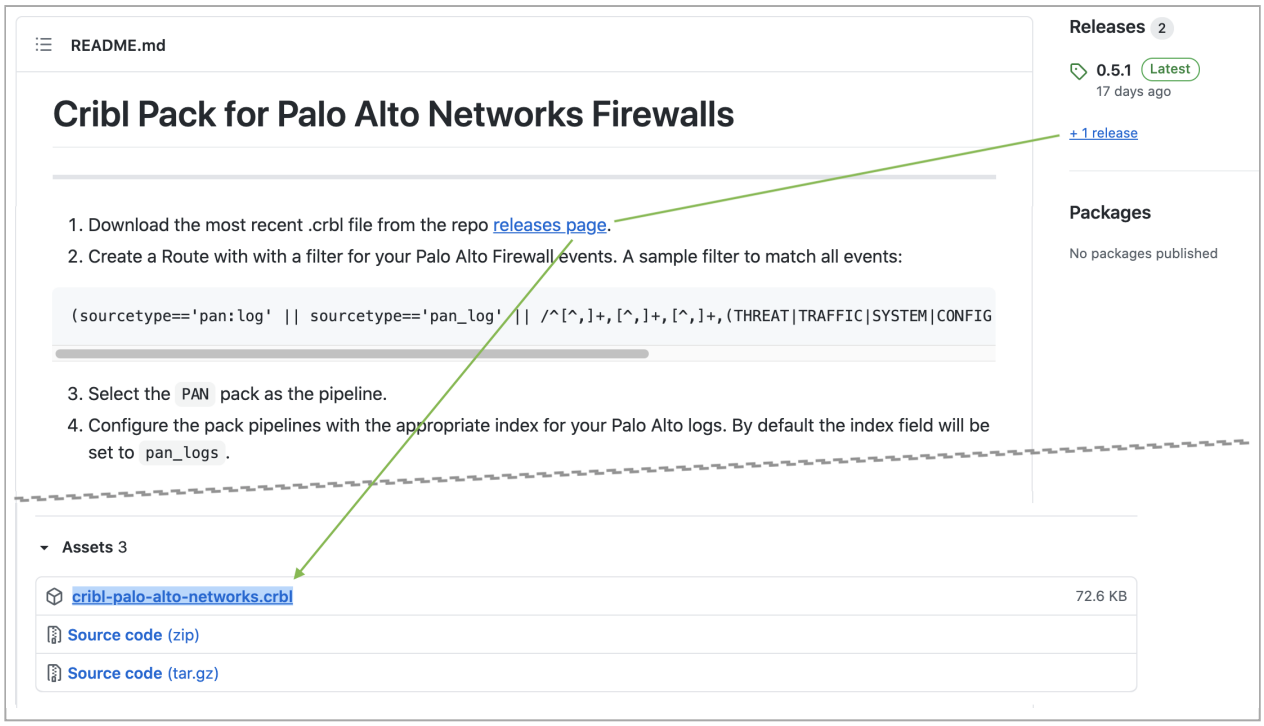

Downloading a `.crbl` file from the Cribl Pack Dispensary's Web UI

If you've posted completed Packs to our GitHub repo, we encourage you to now submit them to our new Cribl Packs Dispensary™ site. See Publishing a Pack.

Upgrading an Existing Pack

Each Pack that is installed within a given Worker Group (or single-instance deployment) must have a unique ID. The ID is based on the Pack's internal configuration – not its container's file name, nor on its Display name.

If you import a Pack whose internal ID matches an installed Pack – whether an update, or just a duplicate – you'll be prompted to assign a unique **New Pack ID** to import it as a separate Pack.

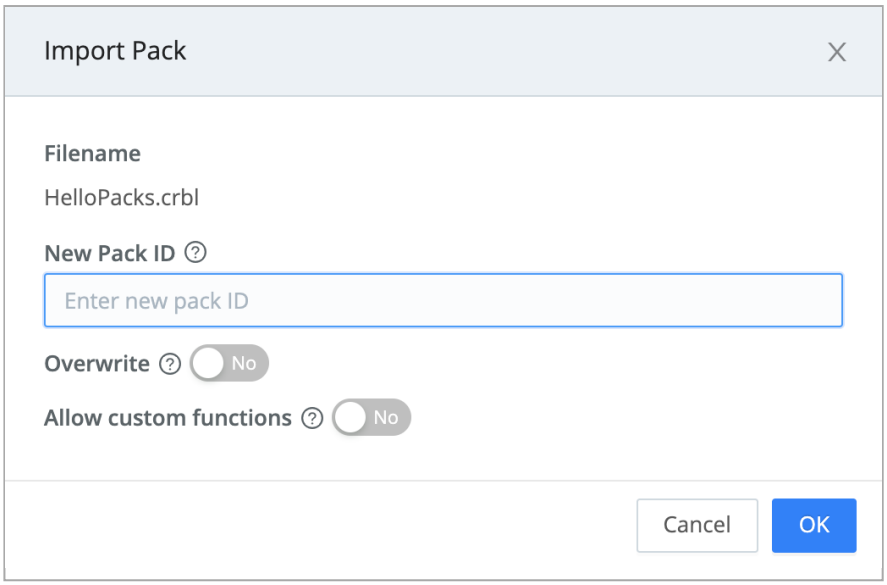

Renaming a Pack on import

You'll also have the option to **Overwrite** the installed Pack, reusing the same ID.

> If you toggle this option to `Yes`, the imported Pack will completely overwrite your existing Pack's configuration.
>
> Each Pack within a Cribl Stream instance must have a unique **Pack ID**, so you cannot share an ID between two (or more) installed Packs.

To explicitly upgrade an existing Pack, you can instead click the **Upgrade** button on its row.

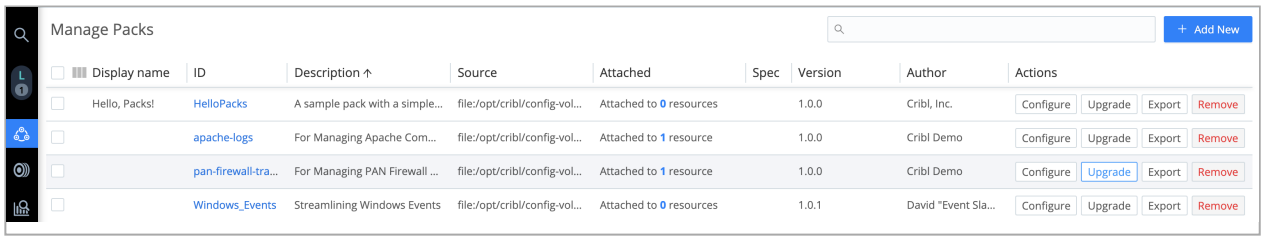

Upgrading an existing Pack

> If you've modified an installed Pack, Cribl Stream will block the overwrite of the Pack, to prevent deletion of your locally created resources.

When upgrading a Pack, Cribl recommends:

- Import the updated Pack under a new name that includes the version number (e.g., `cribl-syslog-input-120`). This allows you to review and adjust new functionality against currently–

deployed configurations.

- Do a side–by–side comparison of the previous and new versions of the Pack – remember to review all comments in the new Pack. Doing this side-by-side comparison allows you to copy Function expressions and other settings from the current version into the same fields in the new version.
- Enable or disable any Functions in the new Pack as necessary.
- Update any Routes, Pipelines, Sources, or Destinations that use the previous Pack version to reference the new Pack.
- If the Pack includes any user–modified Knowledge objects (e.g., Lookup files), be sure to copy the modified files locally for safe keeping before upgrading the Pack. After installing the upgrade, copy those files over the Pack upgrade's default versions.
- Test, test, and test!
- Commit and Deploy.

Creating a Pack

You can create a new Pack from scratch, to consolidate and export multiple Cribl Stream configuration objects:

1. Navigate to the **Manage Packs** page.
2. Click **Add Pack**.
3. From the submenu, select **Create Pack**.
4. In the resulting **New Pack** modal, fill in a unique **Pack ID** and other details.

   - Each Pack within a Cribl Stream instance must have a separate **Pack ID**, but you can assign arbitrary **Display name**s.
   - **Version** is a required field identifying the Pack's own versioning.
   - **Minimum Stream version** is an optional field specifying the lowest compatible version of Cribl Stream software.
   - **Description** and **Author** are optional identifiers.
   - **Data type**, **Use cases**, and **Technologies** are optional combo boxes. You can insert one or multiple keywords to help users filter Packs that you post publicly on the Cribl Packs Dispensary™.
   - **Tags** are optional, arbitrary labels that you can use to filter/search and organize Packs.

5. Click **Save**.

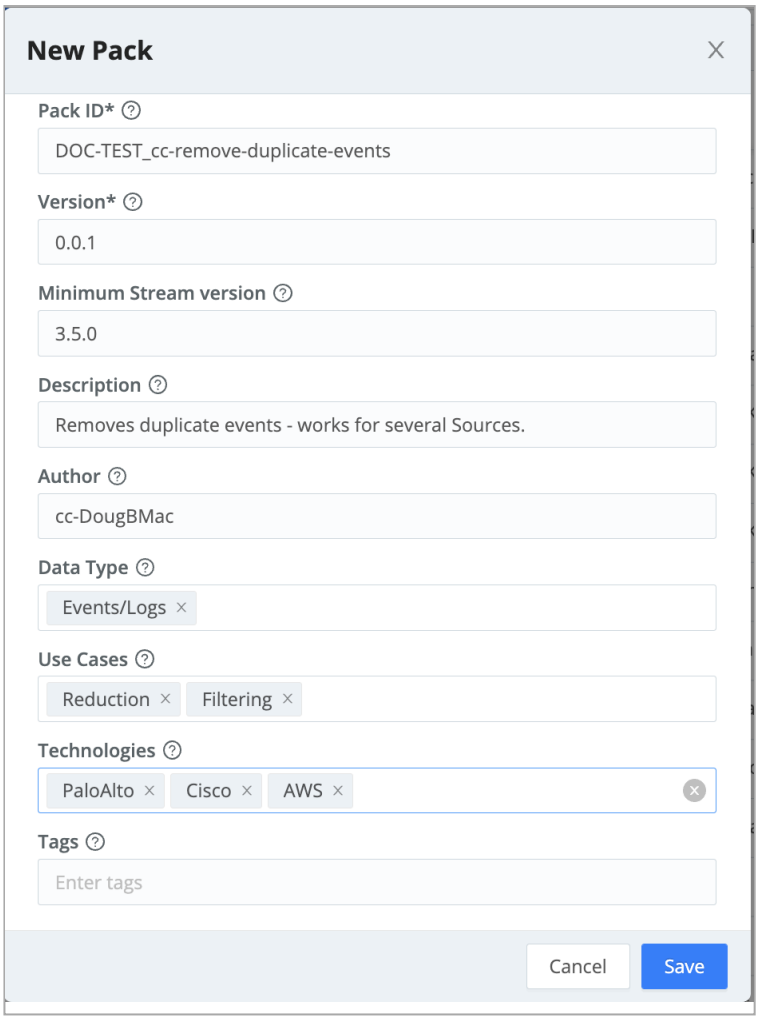

Creating a Pack

6. On the **Manage Packs** page, click the new Pack's row to open the Pack.

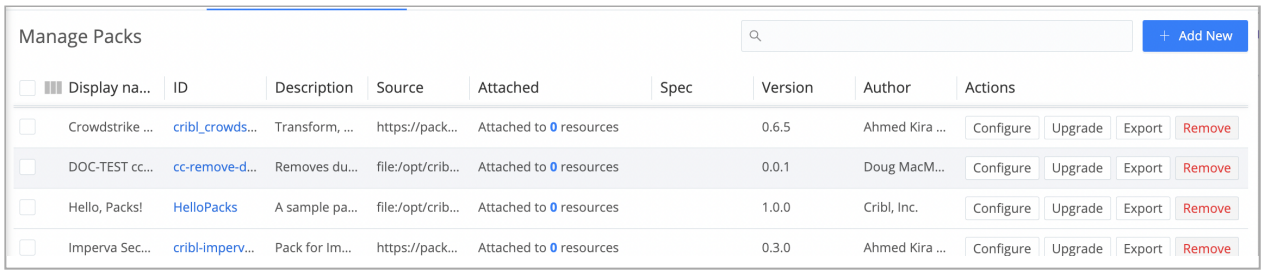

Manage Packs page

7. Use the standard Cribl Stream controls (see above) to configure and save the infrastructure you want to pack up. As you save changes in the UI, they're saved to the Pack.

> If you'd like to share your Pack with the community of Cribl users, you can publish it on the Cribl Packs Dispensary™.

> The Cribl Packs Dispensary™ site is designed for sharing completed Packs. If you want to collaborate with others on iteratively developing a Pack, Cribl recommends relying on our Dispensary GitHub Repo for the development phase.
>
> If you have a Cribl.Cloud account, you can also collaborate there by inviting team members to your Crlbl.Cloud Organization. See Inviting and Managing Other Users.
>
> Once your Pack is ready to share, we encourage you to submit it to the Cribl Packs Dispensary™ site. If you already have completed Packs on our GitHub repo, bring them over here!

Modifying Pack Settings

You can update a Pack's metadata (Version, Description, Author, etc.) and display settings. If you're developing a new Pack to share, you'll want to use this interface to populate the Pack's README and display logo.

1. From the Pack's submenu, select **Settings**. The left **README** tab will gain focus.

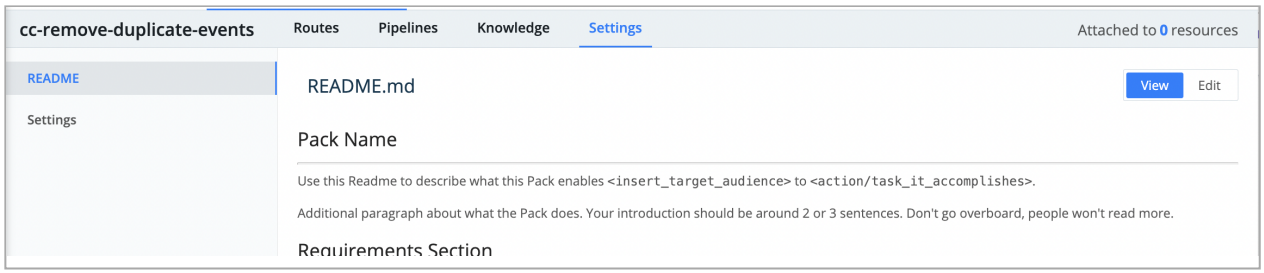

Pack Settings

2. To populate the Pack's README file, toggle **View** to **Edit**, replace the placeholder markdown content, and **Save**.

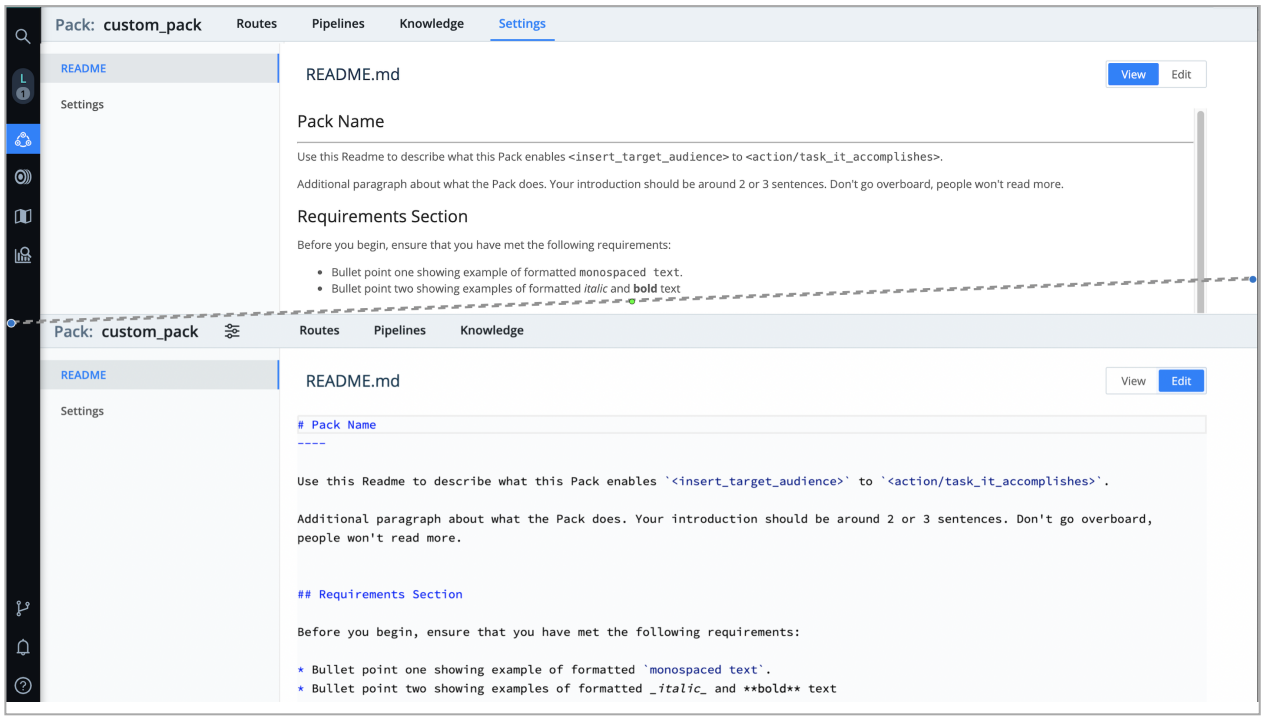

Editing Pack's README

3. To update other metadata, click the left **Settings** tab.

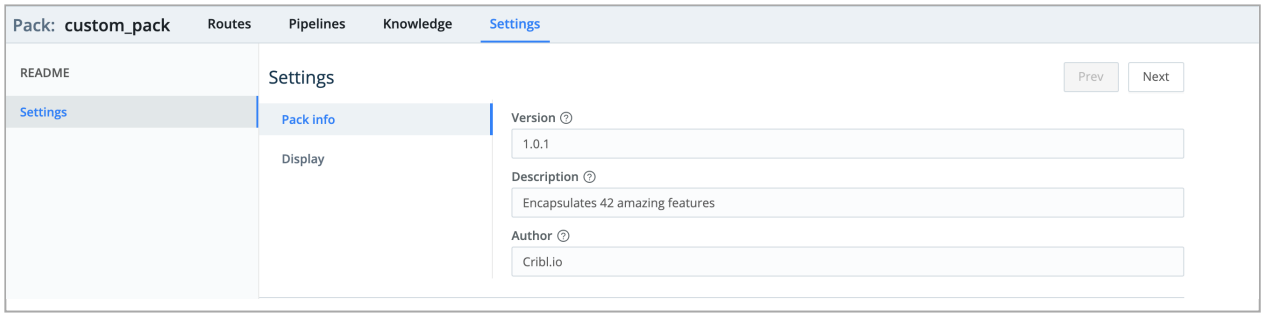

Editing Pack's metadata

4. To add a Pack logo, click the Pack's **Settings** > **Display** left tab.

   Cribl recommends adding a logo to each custom Pack, to visually distinguish the Pack's UI from the surrounding Cribl Stream UI (as well as from other Packs). You can upload a `.png` or `.jpg`/`.jpeg` file, up to a maximum size of 2MB and 350x350px. Cribl recommends a transparent image, sized approximately 280x50px.

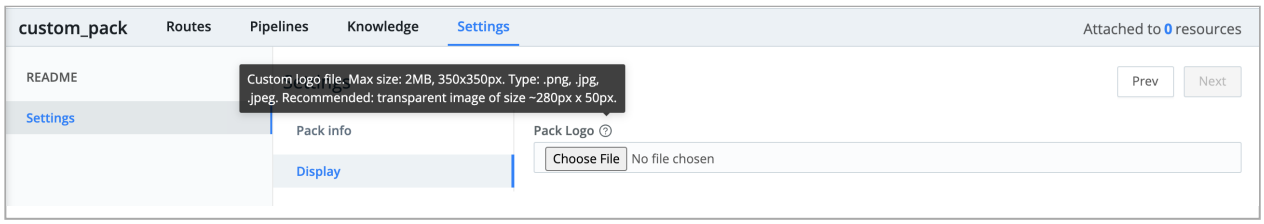

Editing Pack's display (logo) settings

Exporting a Pack

To export a newly created or modified Pack, click its **Export** button on the Packs page.

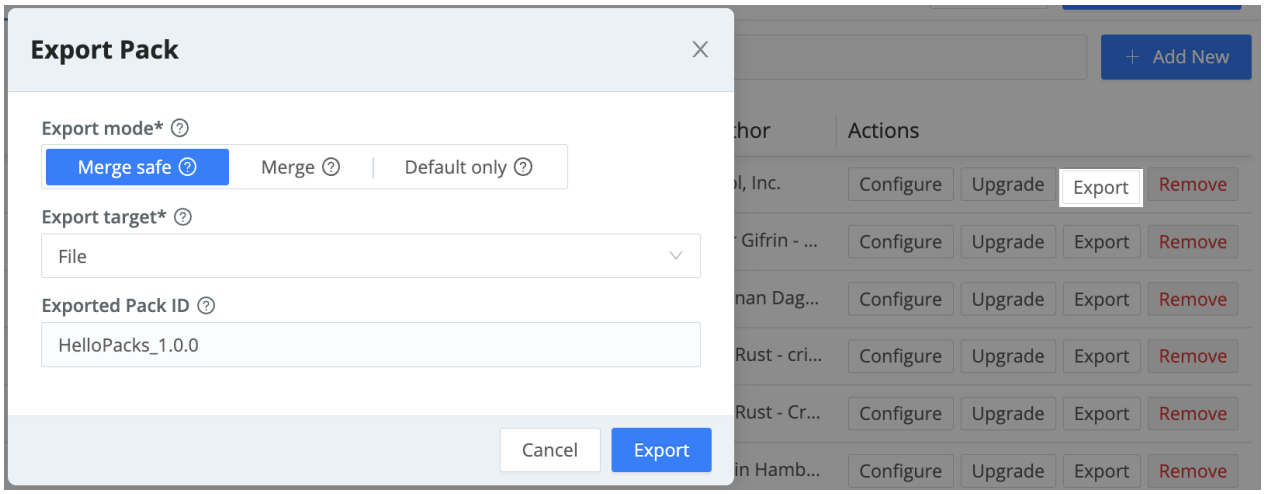

Exporting a Pack

The resulting Export Pack modal provides the following options.

Export Mode

Select one of these three buttons:

- **Merge safe**: Attempt to safely merge local modifications into the Pack's default layer (original configuration), then export.
- **Merge**: Force-merge local modifications into the Pack's original configuration, then export.

  > **Merge** is the only export mode available when you've selected `Groups` as your Export target.

- **Default only**: Export only the Pack's original configuration, without local modifications.

The **Merge safe** option is conservative, and will block the export where Cribl Stream can't readily merge conflicting, modified contents with the Pack's original contents:

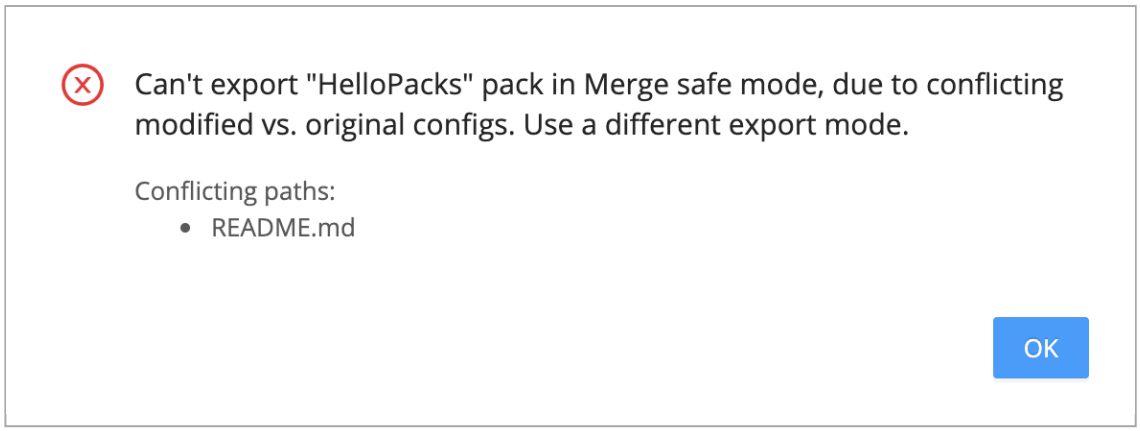

Merge safe error

If you encounter an error like the example shown above, use the **Merge** or **Default only** export mode instead.

Export Target

The options here are:

- **File** (the default): You'll be prompted to confirm a file name and destination after you click **OK**. (In Cribl Stream 3.5 and higher, the default file name automatically includes the Pack's version number.)
- **Groups**: Selecting this displays a **Groups** control, prompting you to select one or multiple existing Worker Groups/Fleets to export the Pack to. (The current Worker Group is automatically omitted from the options.)

Exporting Multiple Packs

You can export multiple Packs in one operation, by selecting their check boxes and then clicking **Export multiple Packs**. This option comes with a few constraints:

- You can export multiple Packs only to Groups (not to Files).
- Therefore, this option is available only in distributed deployments.
- The only export mode available is **Merge**.
- The **Exported Pack ID** field is disabled, and hidden.

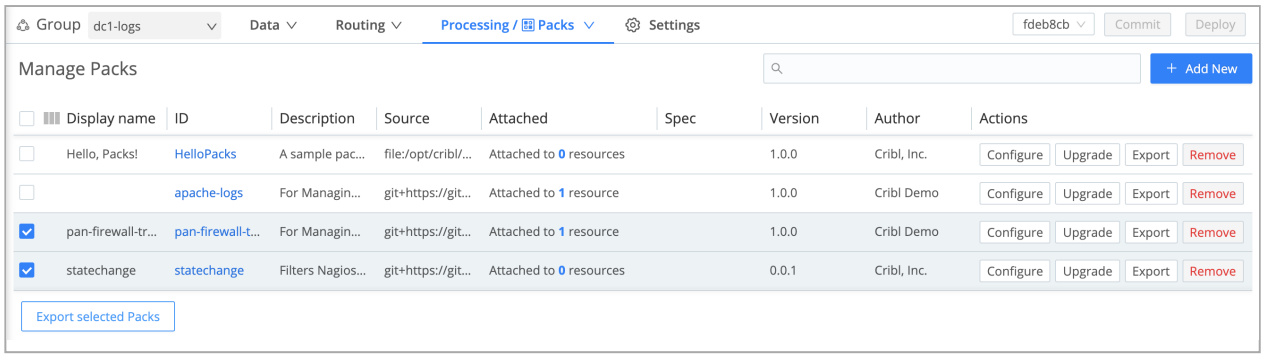

Exporting multiple packs at once

A status modal will list any Packs that failed to export.

Exported Pack ID

Defaults to the Pack's current ID, with the version number appended. This is an opportunity to change the Pack's ID if you're exporting it as you develop a new version.

Managing Packs via API

You can perform Pack operations by running Cribl Stream API calls on the command line. This is required if you plan to automate Pack operations, e.g., in a CI/CD pipeline.

In this section, we'll walk through one scenario where running API calls on the command line works well: exporting a Pack from one Worker Group and installing it into another. The two Worker Groups/Fleets do **not** need to have the same Leader Node.

> **About the Following Examples**
>
> - The API calls here include Worker Group names as path parameters.
> - The `curl` commands assume that you have set the `$token` environment variable to match the value of a bearer token. Of course, this is just one option for authentication. See the Authentication topic for others; adapt the example commands to suit your chosen approach.

Export via API

Adapt and run this **Export pack** API call, using the export mode of your choice:

```
GET /api/v1/m/<worker_group_name>/packs/<pack_name>/export?mode=merge
```

Export Example

Let's export a Pack named `goat-herd` from the `default` Worker Group, and use the `>` redirect to write the exported Pack to a file named `goat-herd.crbl`:

```
curl -X GET -H "Authorization: Bearer $token"
'https://stream:9000/api/v1/m/default/packs/goat-herd/export?mode=merge' > goat-
herd.crbl
```

This request returns an octet-stream attachment which is downloaded as a `.crbl` file. And voilà, you have exported your Pack.

Install via API

Installing the exported Pack in a different Worker Group is a two-step process: First upload, then actually install.

Install via API – Step 1

Adapt and run this **Upload pack** API call, referencing the exported Pack file:

```
PUT /api/v1/m/<new_worker_group>/packs?filename=<pack_name>.crbl
```

Install Example – Step 1

We'll use our target Worker Group name (in this example, it's `group420`). Then we need to specify the exported Pack contents as a file payload, using the `--data-binary` option to upload the binary data without modification. The `@` prefix tells `curl` that `goat-herd.crbl` is the path to the file, not the data itself.

```
curl -X PUT -H "Authorization: Bearer $token"
'https://stream:9000/api/v1/m/group420/packs?filename=goat-herd.crbl' --data-binary
"@goat-herd.crbl"
```

This request returns a JSON object of the following form:

```
{"source":"pack_name.random_id.crbl"}
```

Install via API – Step 2

Adapt and run this **Install pack** API call:

```
POST /api/v1/m/<new_worker_group>/packs
```

Meanwhile, remember that this API call will need a payload – the JSON object returned by the previous API call.

Install Example – Step 2

We'll use the `curl -d` option to specify the JSON object payload. We'll add a new element to the object, whose key is `id`, and whose value is the Pack's new name in the new Worker Group.

Here, the `goat-herd` Pack is renamed as `billys_pack`. (If you do not wish to rename the Pack, just omit the `id` element – but keep the `source` element.)

```
curl -X POST -H "Authorization: Bearer $token" -H "Content-Type: application/json"
'https://stream:9000/api/v1/m/group420/packs' -d '{"source":"goat-
herd.987654321.crbl", "id":"billys_pack"}'
```

Copy via API

To bulk-copy Packs between Worker Groups/Fleets, adapt and run this **Clone pack** API call, referencing a source Worker Group, destination Worker Group(s)/Worker Group(s), and Pack(s).

```
POST /api/v1/packs/__clone__

{
  "srcGroup": "copy_from_this_worker_group_id",
  "dstGroups": [
    "destination_group_1",
    "destination_group_2",
    ...
  ],
  "packs": [
    "pack_id_1",
    "pack_id_2",
    ...
  ]
}
```

Copy Example

For example, to copy the Palo Alto Networks and Cisco ASA Packs from the default to `dc1-logs` and `dc2-logs` Worker Groups:

```
curl -X POST -H "Authorization: Bearer $token" -H "Content-Type: application/json"
'https://stream:9000/api/v1/packs/__clone__' -d '{"srcGroup":"default","dstGroups":
["dc1-logs","dc2-logs"],"packs":["PAN","cribl_cisco_asa_cleanup"]}'
```

Last updated by: Dritan Bitincka

8.5.1. Packs Publication Standards

This page outlines the process for Cribl Community members to publish Cribl Stream Packs to the Cribl Packs Dispensary™. It also lists standards that apply to all publicly available Community Packs.

Publication Overview

Publishing your Pack is a three-step process:

1. Prepare and Produce.

   In this initial phase, feel free to share with other Community members, who can help refine the Pack. For this development phase, consider working collaboratively within Cribl's Community Slack `#packs` channel, or on a publicly available Git repo that you own and maintain - for an example of how to use Git to create and manage Packs, see Cribl's Dispensary GitHub project.

2. Publish the Pack to the Cribl Packs Dispensary™.

   The submission process, outlined below, validates that all required fields are included: Pack name, version, author, and license, if the version is newer than the last one published.

3. Celebrate!

> If you've already posted completed Packs to Cribl's GitHub repo, we encourage you to submit them to the Packs Dispensary™. See Publishing a Pack.

Community Pack Guidelines

A Cribl Community Pack must be useful, reusable, and subject to the Cribl Pack Developer Agreement (PDA).

Making Your Pack Useful

Above all, what makes a Cribl Community Pack useful is the value that it provides for your fellow Community members. A Pack will be most useful if it includes Pipelines, along with supporting sample files and Knowledge objects (especially Lookups) as needed.

Making Your Pack Reusable

Reusability means that the Pack brings value to multiple Cribl Stream users. To make this possible, you should be sure your README provides:

1. Instructions for using the Pack, including details on how to configure any relevant Sources and Destinations.

2. Details about the impact on downstream systems, so that users can prepare for changes that the Pack will make to data flowing through.

Acknowledging the Pack Developer Agreement

The Pack Developer Agreement (PDA) appears when you first access the Cribl Packs Dispensary™. As a Pack author, you must electronically acknowledge that you have read the Agreement, and that you intend to adhere to its requirements.

Before you Begin

Before you start creating your Pack, check the Cribl Packs Dispensary™ to see if something similar has already been published. If your idea for a Pack is new:

- Post to Cribl Community Slack's the `#packs` channel, asking whether any of your fellow Community members are working on a Pack that's similar to yours.

- If someone is already working along the same lines, then you have a good opportunity to collaborate on the Pack you want to create.

- Read the docs that explain how to create your Pack from within the Cribl Stream UI.

Creating the Pack

Here's how you should formulate the information you'll need to create the Pack.

Pack names **should not**:

- Start with `Cribl` or `Cribl-`, which are reserved for Cribl-created packs.
- Use the word `Pack`, at all.

Pack names **should**:

- Start with `cc` (this indicates that the Pack was contributed by a Cribl Community member).
- Use all lowercase.
- Use dashes to separate words, e.g., `cc-tanium-events`.

Pack Version numbers should:

- Use `0.1.0` for the initial development version of the Pack.
- Designate (number) subsequent versions as described in Publishing a Pack.

Pack Descriptions should:

- Be brief - no more than 1 or 2 sentences, e.g., `This Pack for Syslog inputs will reduce volume, and address timestamp normalization for Syslog senders that omit timezones.`

Pack Author names should be in the following format:

- Your Community name, a dash (`-`) and `cc`, e.g., `art chavez - cc`.

Pack License Notes should:

- Appear at the end of the Pack `README` and appropriately linked, e.g., `This Pack uses the following license: [Apache 2.0](https://github.com/criblio/appscope/blob/master/LICENSE).`

Creating Documentation for the Pack

To properly scope the documentation you write for your Pack, follow these principles:

- The optimal user experience is to have a single Pack that supports all datasets for the relevant device or sender.
- The Pack documentation should list all of the datasets that the Pack supports.
- If there are known datasets that are relevant but not yet supported, the documentation should list those, too.

For example, consider a device sending data to Cribl Stream, such as a Palo Alto Networks firewall. This device supports multiple datasets, in that Palo Alto Firewall data is really one co-mingled set of data that includes individual datasets like `PAN-Traffic`, `PAN-System`, `PAN-Accept`, and so on.

Think about what datasets would be involved for other devices, and how you would document them. For example, consider an F5 load balancer, various types of routers, or various types of servers. This exercise will help you anticipate what your users will need to see documented for your own Pack.

What a Pack Must Contain

Every Pack must contain some combination of Pipelines, samples, Routes, Knowledge objects (including Lookups), configuration descriptions, support contact information, and release notes. The exact ingredients will vary by Pack.

Pipelines

1. Except for rare cases, each Pack should have at least one Pipeline. Packs without Pipelines are of limited use.

2. Cribl recommends that you provide one Pipeline (and one Route) for each dataset that your Pack supports.

3. Each Pipeline should have an internal **Comment** describing the overall functionality **and benefits** that the Pipeline provides. The procedure for adding a **Comment** is the same as for adding any other Function. **Comment** is under the **Add Function** > **Standard** drop-down.

4. Within each Pipeline, follow these best practices for Functions:

    - Use grouping to bundle any Functions that a user should enable or disable together.
    - Add a **Description** to each Function, to make it clear what is happening at each step, along with the Function's purpose and mechanics.

5. Overall, design for supportability and efficiency.

Samples

1. Include at least one data sample for each Pipeline. Data samples can be reused across Pipelines, but it is preferable to include multiple data samples, each specific to a Route/filter available in the Pipeline.

2. Remember to remove all sensitive data (e.g., internal host names or IP addresses) from samples.

Routes

1. A Pack includes Routes with appropriate filters.

2. Each Pipeline should have a corresponding Route on the Pack’s Routes page. (The only exception to this is when the Pack serves as a delivery mechanism for pre-processing and post-processing Pipelines.)

3. The filter in that Route should be as generic as possible. For example, if the data is coming from `PAN`, don't assume you'll have `sourcetype`. Instead, filter by `_raw.match()`.

4. Each Route must have a meaningful description.

5. The final Route (where **Filter** is set to `true`) should route to the `devnull` Pipeline.

Knowledge Objects

1. Include within the Pack all Knowledge objects that the Pack requires – Lookups, Parsers, Global Variables, Grok Patterns, and Schemas.

2. Remember to remove all sensitive data from Knowledge objects – e.g., internal host names and IP addresses.

3. Lookups are especially important. If it's not practical to include the required Lookup, include instructions for building it.

Configuration Descriptions

Where applicable, the Pack documentation should include clear descriptions for each pre-shipped configuration.

Support Contact Information

The Pack documentation should list your preferred method of contact for support, e.g., your Cribl Community name for Slack DMs, or your email address.

Release Notes

If the Pack is an update from a previous release, the documentation should include Release Notes.

What a Pack Should Contain

A logo and a `README` file are recommended, but optional.

The Logo

You can include a logo associated with the technology addressed by the Pack, e.g., a Windows logo for Windows events, an AWS Cloudwatch logo for AWS Cloudwatch data, and so on.

The README

Including a `README` improves the user experience for your Pack. Create a `README.md` file from the Pack's **Settings** submenu, with detailed answers to the following questions:

1. What does the Pack do, and why was it created? Here, you can state what value the Pack provides.
2. What technologies, data sources, and data destinations does the Pack interact with?
3. What other dependencies does the Pack have? As examples:
    - Does the Pack use an external tool, like Redis?
    - What is the minimum supported version of Cribl Stream? This must be newer than Cribl LogStream v.3.0.4 or Cribl Edge 3.3.0.
    - What deployment restrictions apply? What combination of single instance, distributed, or Cloud deployments of Cribl Stream does the Pack support?
4. What is required to configure a data source or destination?
    - Include specific examples of configurations when possible.
    - Link to specific sources and destinations to configure, e.g., link to AWS Firehose Source for a Pack that requires Firehose to collect data.
5. What else does your user need to know to use the Pack?
    - Include specific instructions.
6. How should your users contact you for support?
    - The `README` should contain the Pack author's contact info for providing feedback/requesting support, e.g., your Community name or email address.

Versioning Packs

Packs start at version `0.1.0`, and continue through as many "pre-release" versions as needed, until the authors feel that the Pack is ready for production use. During this initial **Prepare** phase, you'll share your idea with other Cribl Community members, to collaboratively refine the Pack.

Next, you'll enter the **Publish** phase, where it's appropriate to release version `1.0.0`. Here, you'll:

- Satisfy all the requirements for publishing a Pack, as documented above.
- Export the Pack by creating a `.crbl` file.
- Upload the Pack to the Cribl Packs Dispensary™, as outlined below. The Dispensary will validate the Pack name, version, author, and license, including by checking that the new version number is greater than the last one.

Versioning an Existing Pack

The easiest way to do this is to make the Pack changes in Cribl Stream, then export the new Pack and upload it to the Cribl Packs Dispensary™.

1. Update your Pack.
2. Increment the version number. See semantic versioning for guidelines.
3. In the `README`, update the **Release Notes** section to specify the new version and release date, and to describe what has changed. For a good model of how this is done, see the `README` on the Dispensary's **Microsoft Windows Events** Pack.
4. Export your Pack and save the `.crbl` file locally.
5. Upload your Pack's `.crbl` file to the Cribl Packs Dispensary™, as outlined just below. Remember to version the file.

Publishing a Pack

To submit your Pack:

1. Sign into, or create an account on, the Cribl Packs Dispensary™ site. You can create an account using the same email address as used on your Cribl.Cloud account.

   If you don't have a Cribl.Cloud account, Cribl automatically creates a new one for you when you create your account on the Cribl Packs Dispensary™.

2. Once signed in, you'll see the **Publish Pack** and the **View only my Packs** controls shown below.

Packs Dispensary™: Signed-in view

3. Click **Publish Pack**, and then click **Upload Pack**.

4. Select the `.crbl` Pack file you want to publish, and click **Submit**.

5. The Packs Dispensary™ will quickly verify whether the Pack has valid configurations and whether it meets all of the requirements outlined in this document.

6. If validation is successful, the Dispensary submits the Pack for review, and graduates it to a `Validating` state.

7. Once your Pack is reviewed, you'll receive an email from `packs@cribl.io` informing you whether it was accepted or rejected.

   Rejected Packs display on the Packs Dispensary™ as `Failed`, with a note about the rationale for rejection. After you've fixed your Pack, you can resubmit it.

Who Supports Packs

- Community-authored Packs are primarily supported by the Pack author, who also handles feature requests and suggestions.
- Cribl-authored Packs are supported by Cribl.
- For both kinds of Packs, the greater Cribl Slack Community also provides a wealth of knowledge - see the `#packs` channel.

8.6. Using Datagens

Data generators for testing and troubleshooting

Cribl Stream's datagens feature enables you to generate sample data for the purposes of troubleshooting Routes, Pipelines, Functions, and general connectivity.

Several datagen template files ship with the product, out of the box. You can create others from sample files or live captures.

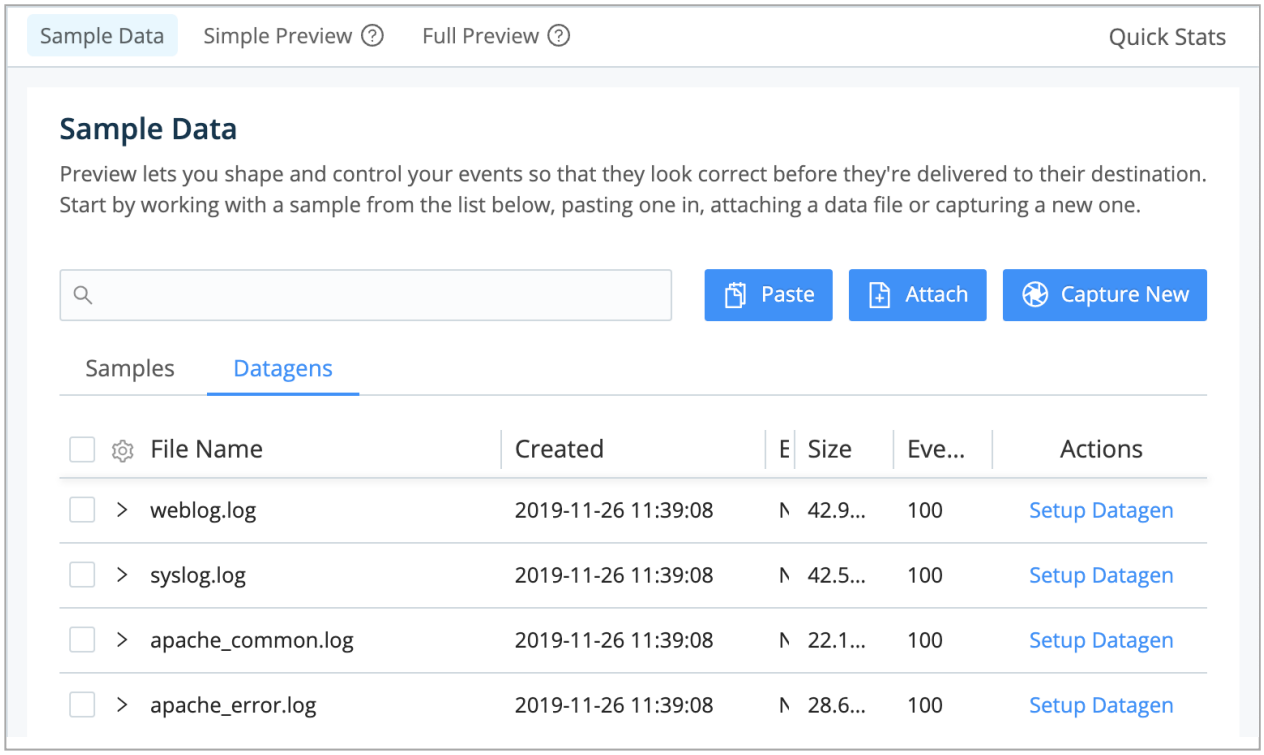

Preview pane – add samples via paste, attach/upload file, or live capture

As outlined in the following tutorial: Once you've created a template, you can configure a Datagen Source to use the template to generate real-time data at a given EPS (events per second) rate.

Enabling a Datagen

To see how datagens work, start by enabling a pair of Cribl Stream's out-of-the-box generators:

Navigate to **Sources** > **Datagens** and click **New Destination**.

Select a Data Generator File (e.g., `apache_common.log`) and set it at 4 EPS/worker process. Select another Data Generator File (e.g., `syslog.log`) and set it at 8 EPS/worker process. Hit **Save**.

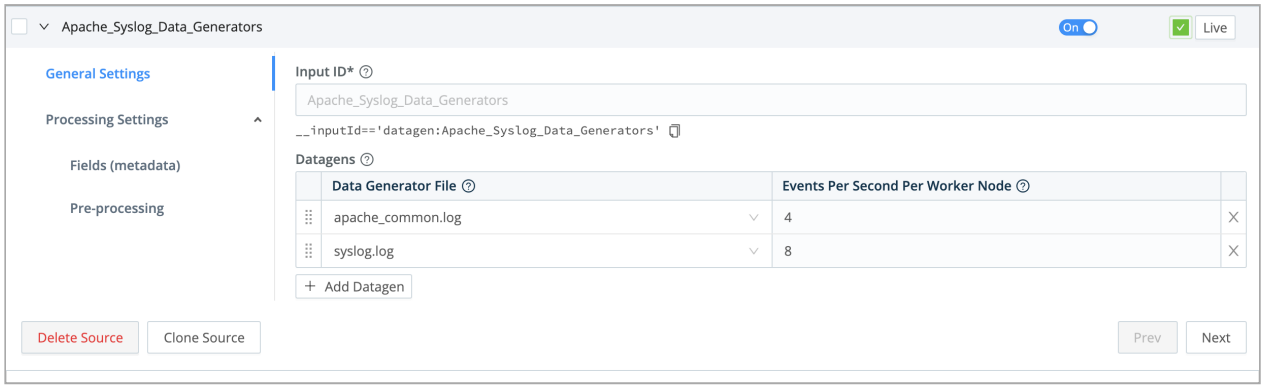

Selecting datagens files and event rates

On the **Monitoring** page, under **Sources**, search for `datagen` and confirm that the Source is generating data.

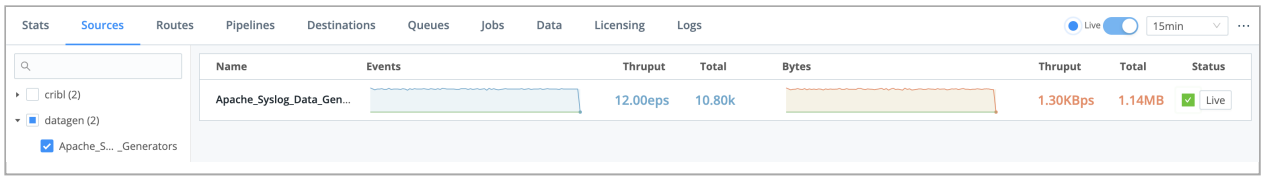

Creating a Datagen Template from a Sample File

To convert a sample into a template:

Go to **Preview** > **Paste a Sample**, and add a sample like the AWS VPC Flow logs below:

```
2 123456789010 eni-abc123de 172.31.16.139 172.31.16.21 20641 22 6 20 4249 1418530010
1418530070 ACCEPT OK
2 123456789010 eni-abc123de 172.31.9.69 172.31.9.12 49761 3389 6 20 4249 1418530010
1418530070 REJECT OK
2 123456789010 eni-1a2b3c4d - - - - - - - 1431280876 1431280934 - NODATA
2 123456789010 eni-4b118871 - - - - - - - 1431280876 1431280934 - SKIPDATA
2 123456789010 eni-1235b8ca 203.0.113.12 172.31.16.139 0 0 1 4 336 1432917027
1432917142 ACCEPT OK
2 123456789010 eni-1235b8ca 172.31.16.139 203.0.113.12 0 0 1 4 336 1432917094
1432917142 REJECT OK
2 123456789010 eni-f41c42bf 2001:db8:1234:a100:8d6e:3477:df66:f105
2001:db8:1234:a102:3304:8879:34cf:4071 34892 22 6 54 8855 1477913708 1477913820
ACCEPT OK
```

From the **Event Breaker** drop-down, select **AWS VPC Flow** to ensure that:

- The pasted text gets broken properly into individual events (notice the Event Breaker on newlines).
- Timestamps are extracted correctly (text highlighted purple below).

Once you've verified these results, click **Create a Datagen File**.

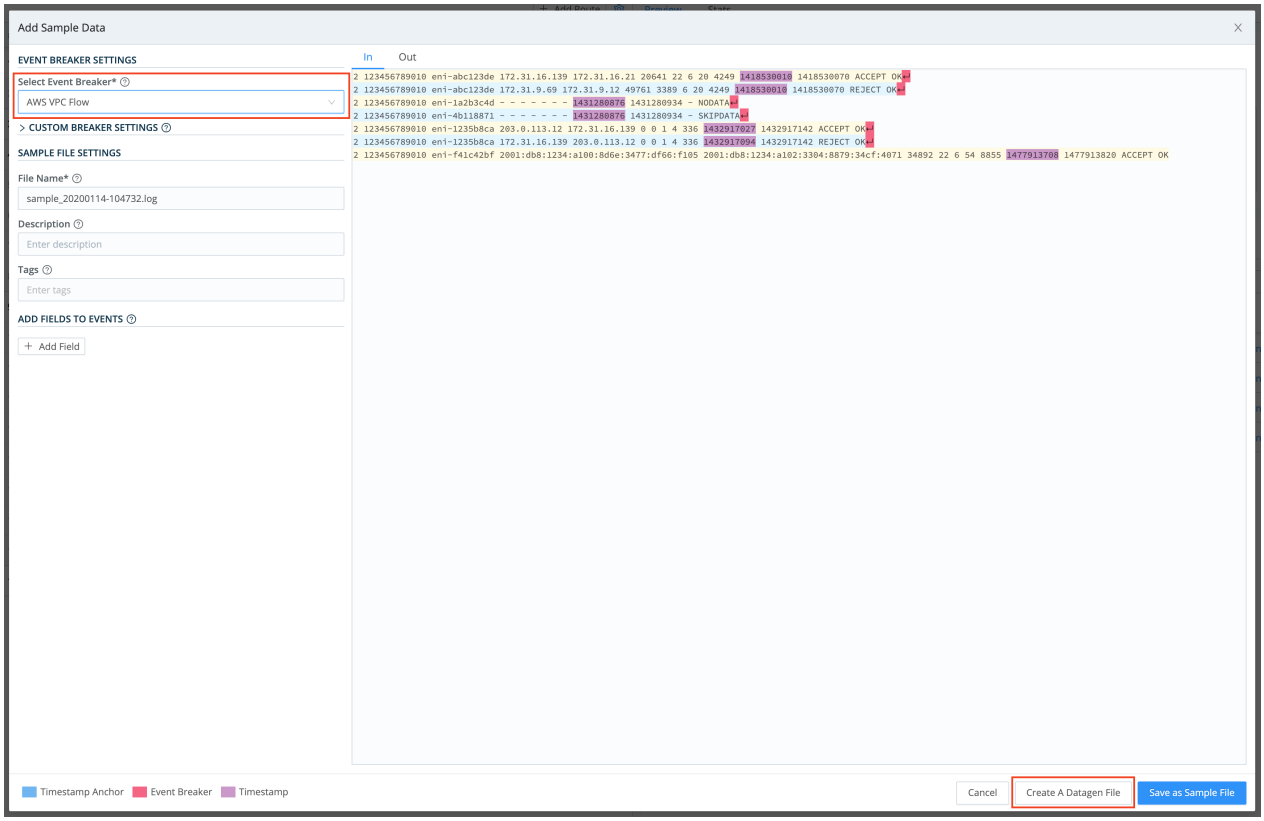

Creating a datagen template

On the resulting **Create Datagen File** screen:

- Enter a file name, e.g.: `vpc-flow-datagen.log`
- Ensure that the timestamp template format is correct: `${timestamp: %s}`
  `${timestamp: <format>}` is a template that the datagen engine uses to insert the current time – in each newly generated event – using the given format. In this case, `%s` is the desired `strftime` format for the timestamp (i.e., the epoch).

Once you've verified these results, click **Save as Datagen File**.

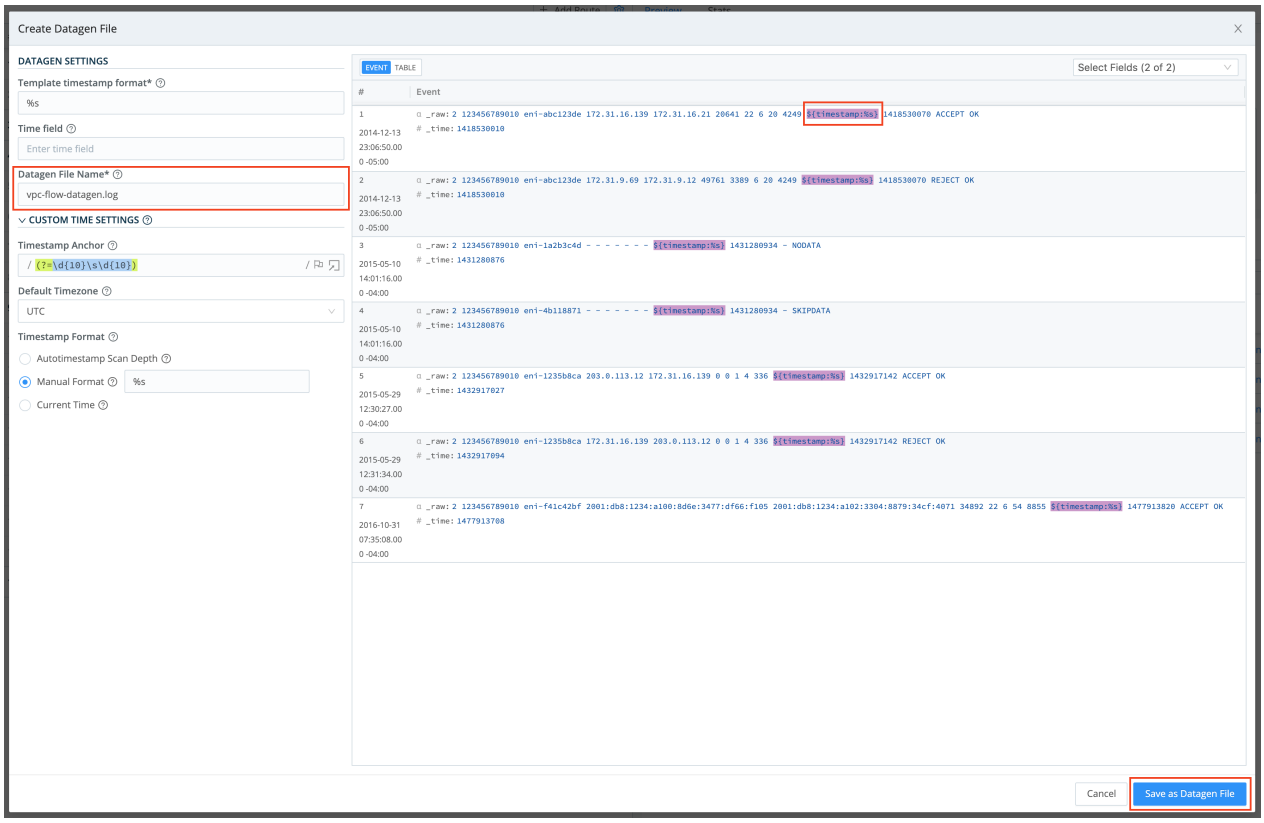

Saving a named datagen template

To confirm that the datagen file has been created, check **Preview** > **Datagens**.

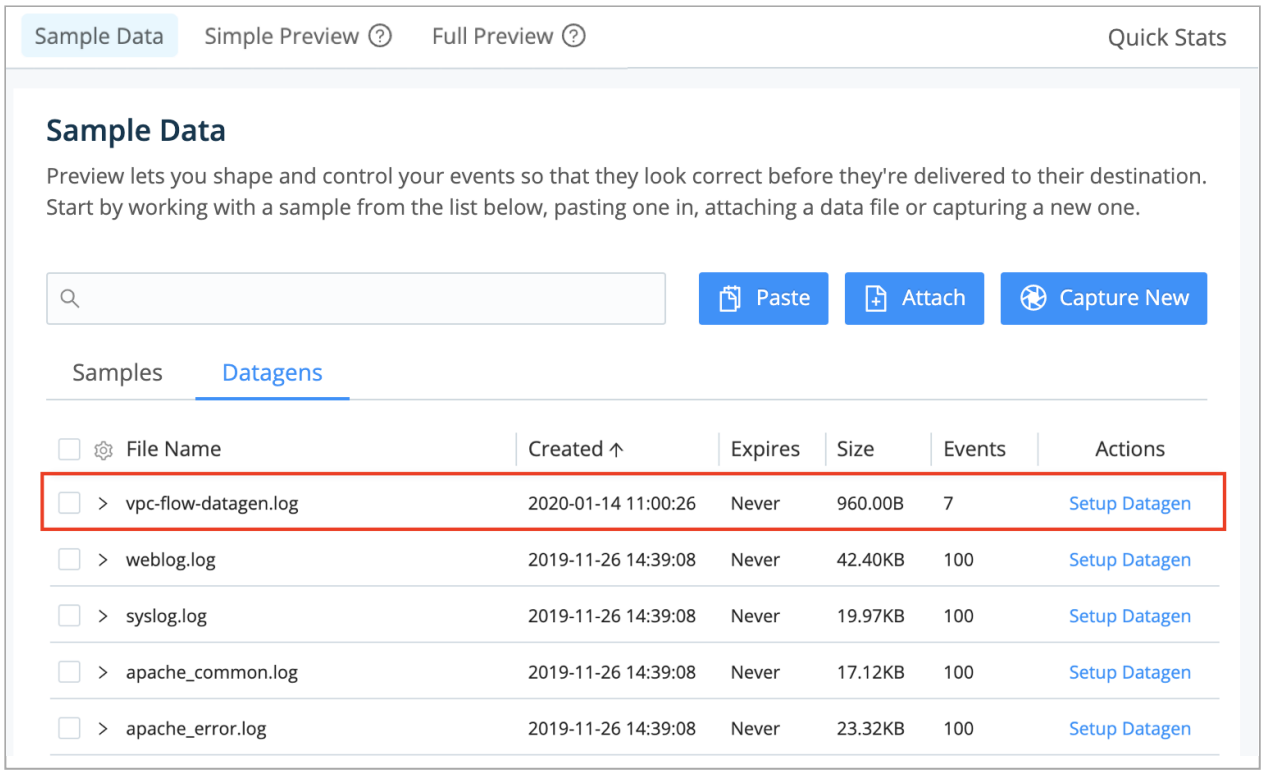

Verifying datagen file creation

Now, to start using your newly created datagen file, go back to **Sources** > **Datagens**. Add it using the drop-down shown below.

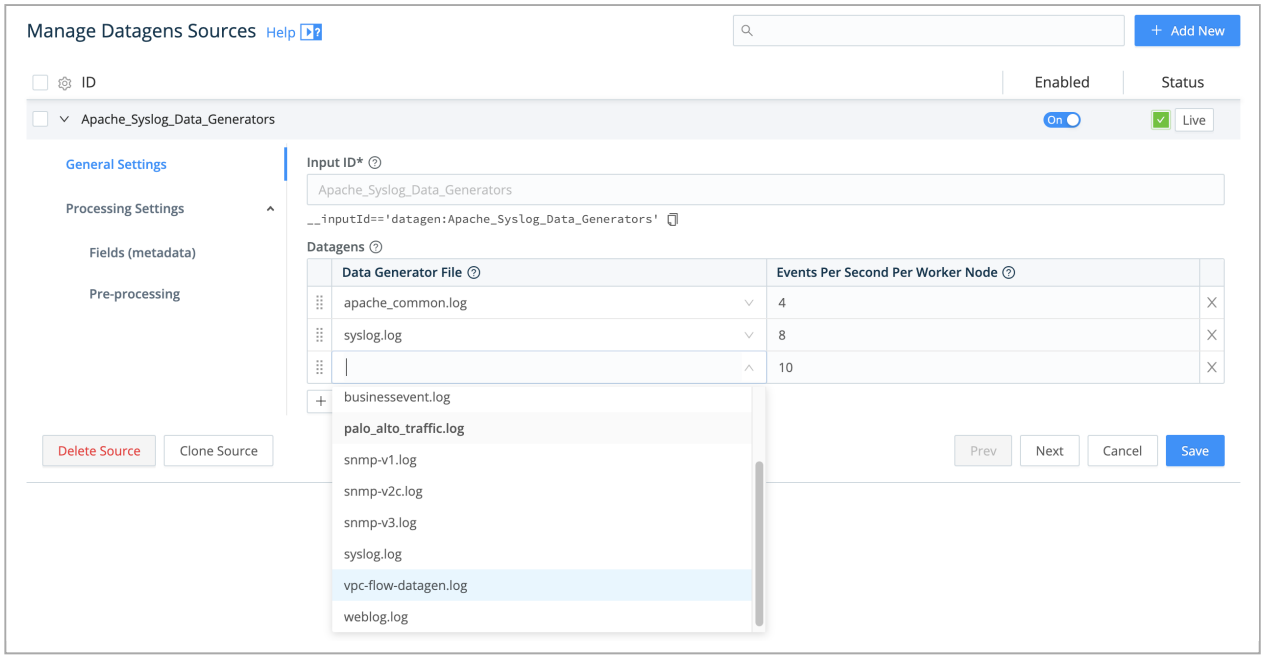

Adding new template file to datagens Source

Modifying a Datagen

1. In the right Preview pane, select the **Datagens** tab.
2. Hover over the file name you want to modify. This displays an edit (pencil) button to its left.
3. Click that button to open the modal shown below. It provides options to edit the datagen, clone it, delete it, or modify its metadata (**File name**, **Description**, **Expiration time**, and **Tags**).

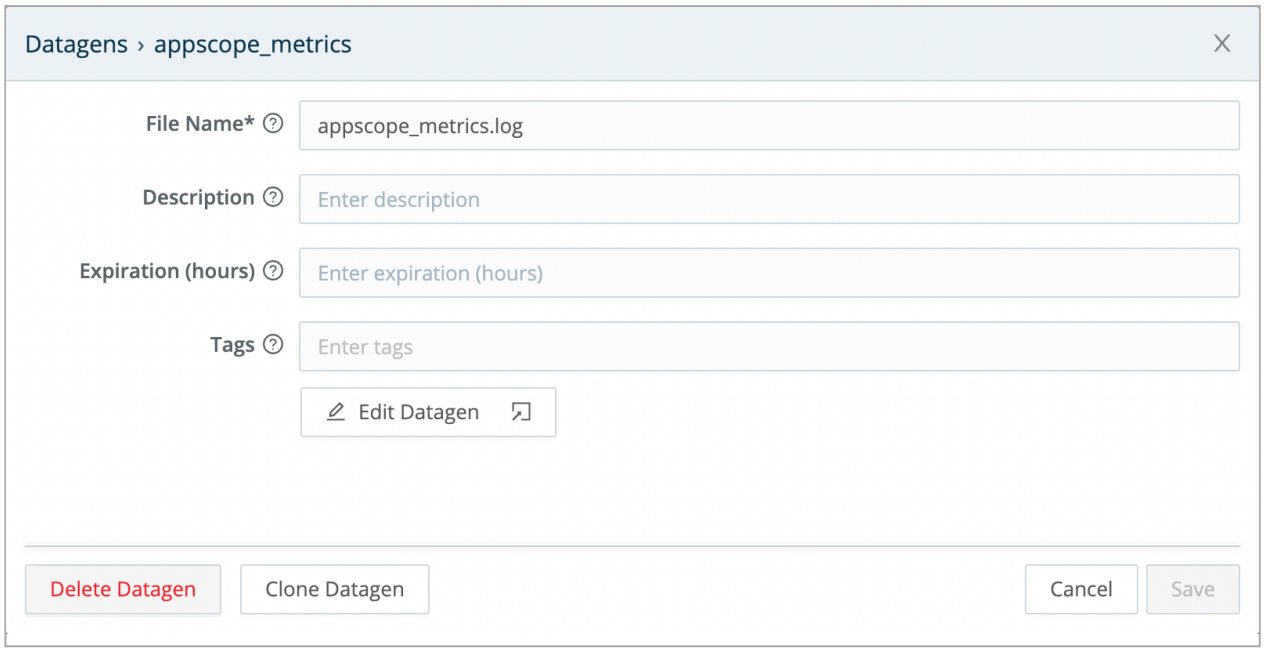

Options for modifying a datagen

4. To make changes to the datagen, click the modal's **Edit Datagen** button. This opens the **Edit Datagen** modal shown below, exposing the raw data that this datagen uses to generate events.
5. Edit the raw data as desired.
6. Click **Update Datagen** to resave the modified datagen, or click **Save as New Datagen** to give the modified version a new name.

Editing a datagen

8.7. Data Preview

Cribl Stream's Sample Data Preview features enable you to visually inspect events as they flow into and out of a Pipeline. Preview helps you shape and control events before they're delivered to a Destination, and helps you troubleshoot Pipeline Functions.

Preview works by taking a set of sample events and passing them through the Pipeline, while displaying the inbound and outbound results in a separate pane. Any time a Function is modified, added, or removed, the Pipeline changes, and so does its displayed output.

The Preview pane is shown below, to the right of the Pipelines pane.

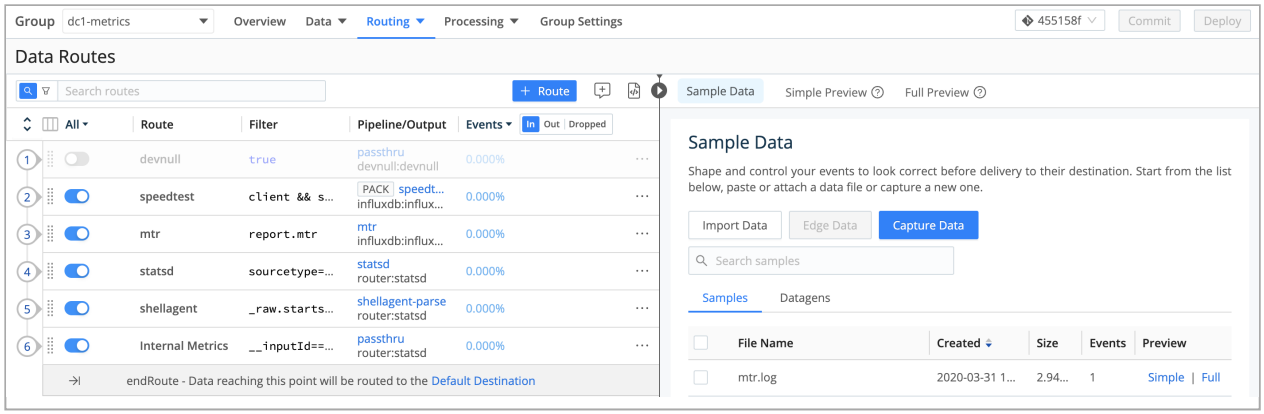

Preview options

> You can press the] (right-bracket) shortcut key to toggle the visibility of the Preview pane. (This shortcut works when no field has focus.)

Checking Pipeline Status

From the Pipelines page, click any Pipeline at left to display a **Status** tab in the right Preview pane. Click this tab to reveal graphs of the Pipeline's **Events In**, **Events Out**, and **Events Dropped** over time, along with summary throughput statistics (in events per second).

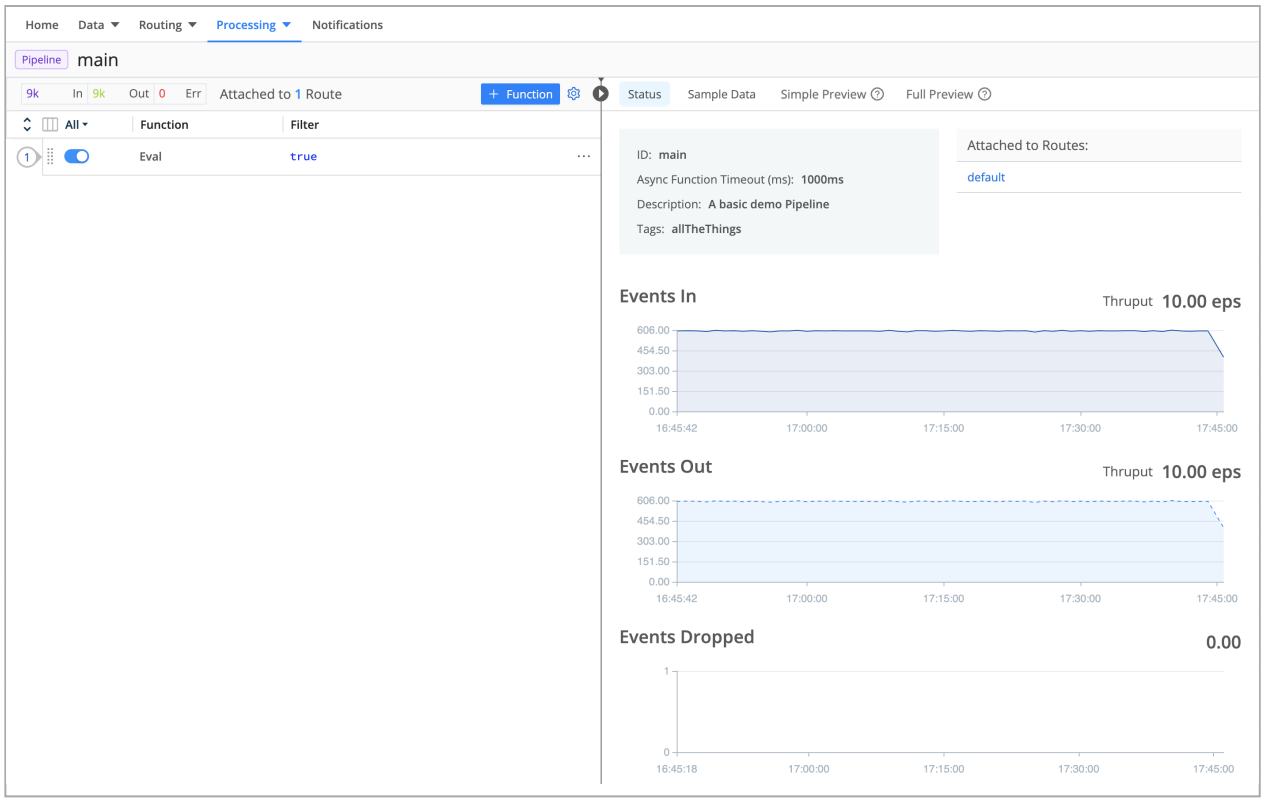

Pipeline status tab

Adding Sample Data

When you're on the Pipelines or Routes page, you can add samples through any of the Preview pane's supported options: **Import Data** (which opens a modal where you can paste data from your clipboard or use the **Upload File** button); **Edge Data** (where you can import data from any Edge Nodes deployed on your account); and **Capture New**. The **Import Data** options work with content that needs to be broken into events, while the **Capture New** option works with events only.

> The **Edge Nodes** option requires at least one working Edge Node, and is not available when you've teleported to the Node.

Paste Area

Once you've clicked the **Import Data** button, or imported Edge data, you'll see an **Import Sample Data** modal, where you can paste data or upload a file.

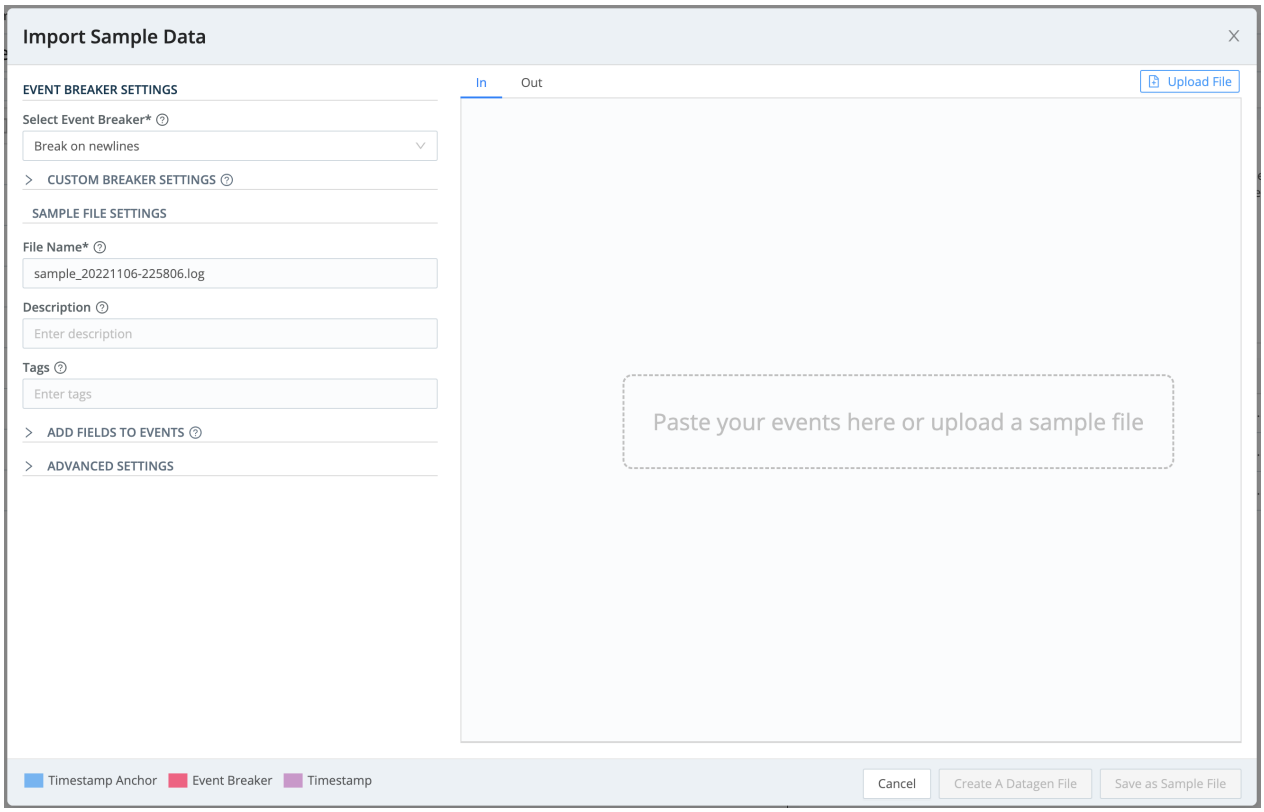

Import Sample Data modal

Once your data is onboard, you have options to modify it using Event Breakers, to add and drop fields, and to save it to a file.

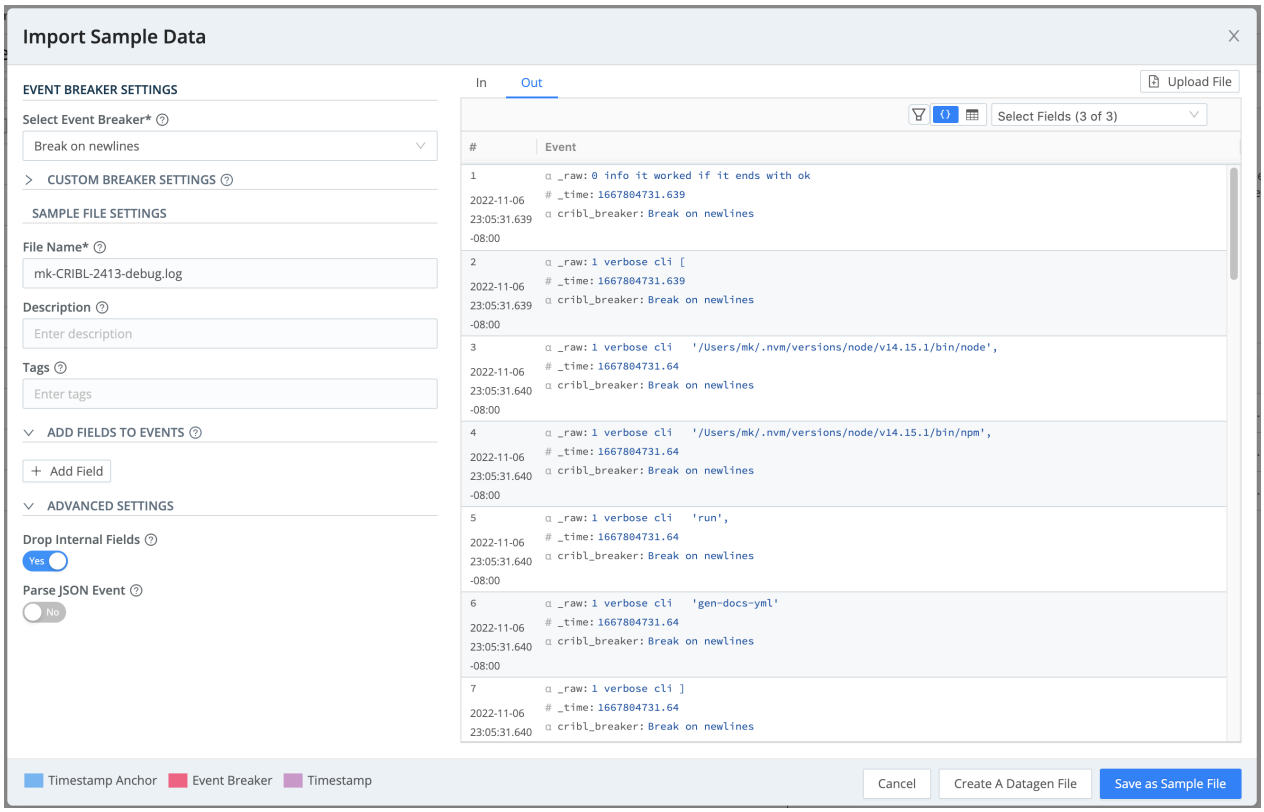

Edge Data

To upload data from a file on an Edge node:

1. Click the **Edge Data** button, and navigate to the Edge node where the file is stored.

   Clicking the Edge Node opens the **Select a file** modal, shown below.

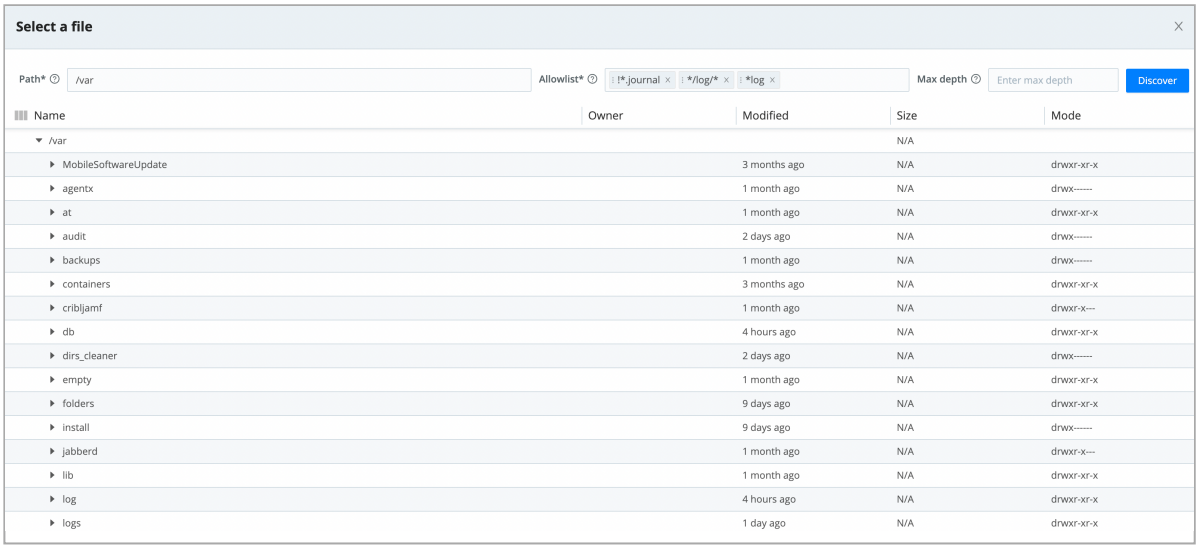

Select a file modal

2. Use the available filters to narrow the results:

   - **Path**: Sets the location from which to discover files.
   - **Allowlist**: This filter supports wildcard syntax (as shown in the screenshot above), and supports the exclamation mark (`!`) for negation.
   - **Max depth**: Sets which layers of files to return highlighted in bold typeface. By default, this field is empty, which implicitly specifies `0`. This default will boldface only the top-level files within the **Path**.

3. Once you find the file you want, click its name to add its contents to the **Add Sample Data** modal, where you'll finish configuring the data sample.

Event Breaker Settings

Cribl Event Breakers are regular expressions that tell Cribl Stream how to break the file or pasted content into events. Breaking will occur at the **start** of the match. Cribl Stream ships with several common breaker patterns out of the box, but you can also configure custom breakers. The UI here is interactive, and you can iterate until you find the exact pattern.

Troubleshooting Event Breakers

If you notice fragmented events, check whether Cribl Stream has added a `__timeoutFlush` internal field to them. This diagnostic field's presence indicates that the events were flushed because the Event Breaker buffer timed out while processing them. These timeouts can be due to large incoming events, backpressure, or other causes.

Capturing Sample Data

The **Capture Data** button opens a slightly different modal – it does not require event breaking. In the composite screenshot below, we've already captured some events using the **Capture** drop-down.

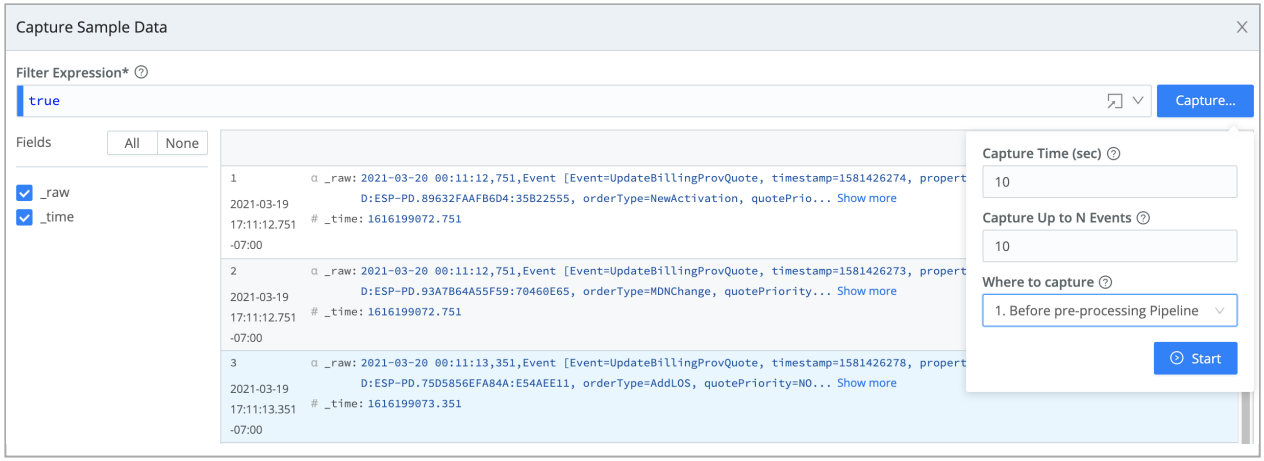

Capture Data > Capture Sample Data modal

Capturing from a Single Source or Destination

To capture data from a single enabled Source or Destination, it's fastest to use the Sources or Destinations UI instead of the Preview pane. You can initiate an immediate capture by clicking the **Live** button on the Source's or Destination's configuration row.

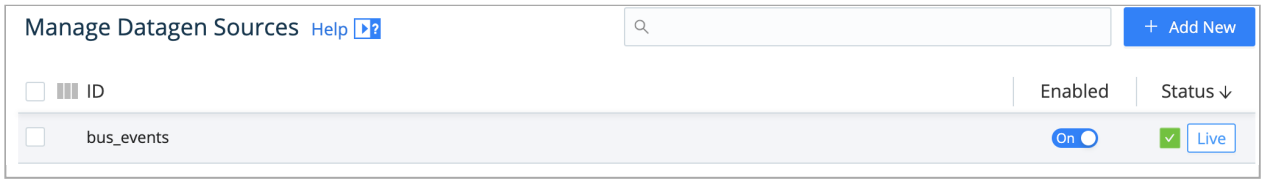

Source > Live button

You can similarly start an immediate capture from within an enabled Source's or Destination's configuration modal, by clicking the modal's **Live Data** tab.

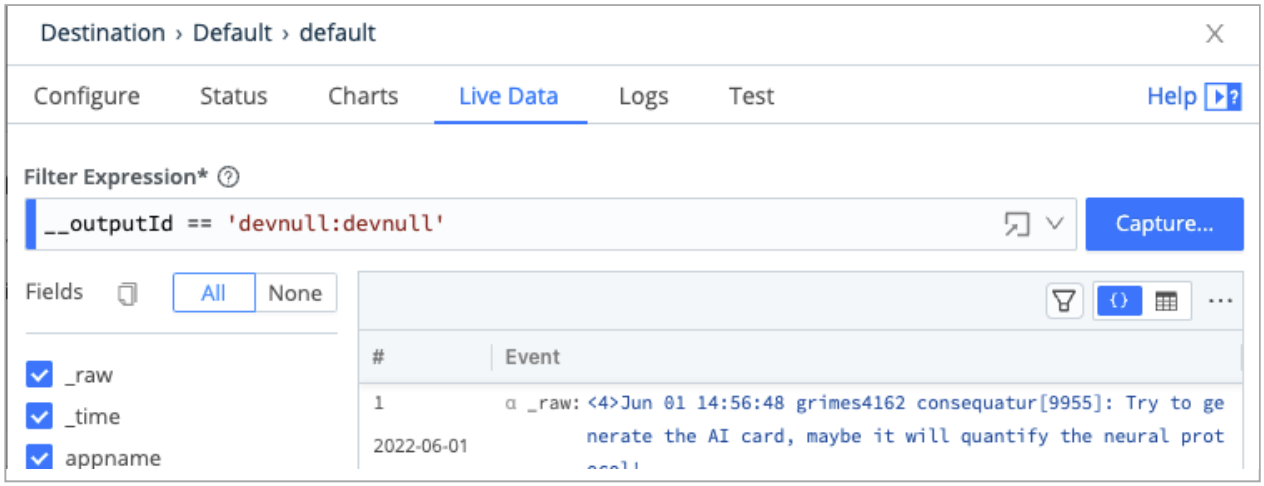

Destination modal > Live Data tab

Beside the **Live Data** tab's **Fields** selectors is a Copy button, which enables you to copy the field names to the clipboard in CSV format. The **Logs** tab also provides this copy button.

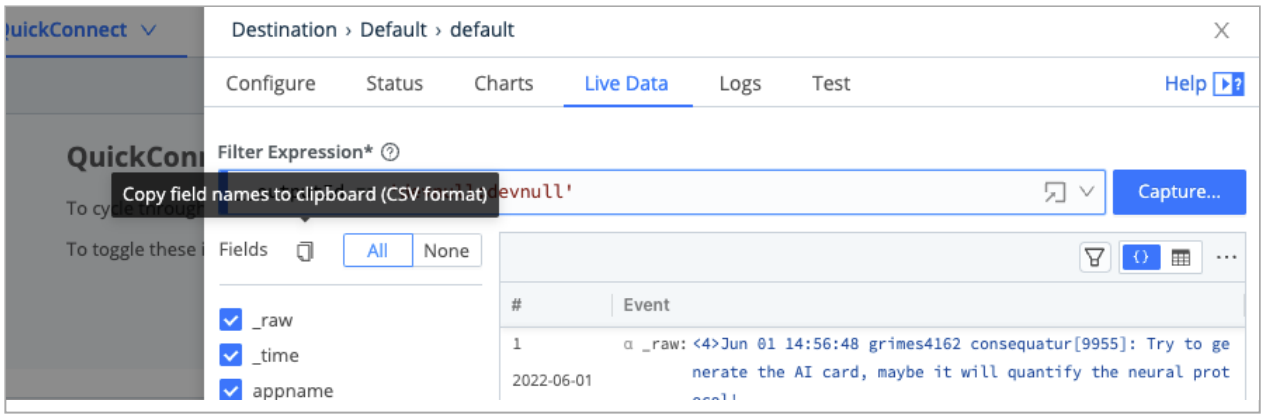

Destination modal > Live Data - Copy Fields Icon

Controlling Sample Size

To prevent in-memory samples from getting unreasonably large, samples that you input by any means (Import Data, Edge Data, or Capture Data) are constrained by a limit set as follows:

- On the Leader at **Settings** > **Global Settings** > **General Settings** > **Limits** > **Max sample size**.
- On a single instance at **Settings** > **General Settings > Limits** > **Max sample size**.

- On distributed Worker Groups at `<group-name>` > **Worker Group Settings** > **General Settings** > **Limits** > **Max sample size**.

In each location, the default limit is `256 KB`, and you can adjust this upward or downward.

Very Large Integer Values

Cribl Stream's JavaScript implementation can safely represent integers only up to the Number.MAX_SAFE_INTEGER constant of about 9 quadrillion (precisely, {2^53}-1). Data Preview will round down any integer larger than this, and trailing 0's might indicate such rounding.

Fields

In the **Capture Data** and **Live Data** modals, use the **Fields** sidebar (at left) to streamline how events are displayed. You can toggle among **All** fields, **None** (to reset the display), and check boxes that enable/disable individual fields by name.

Field Type Symbols

Within the right Preview pane, each field's type is indicated by one of these leading symbols:

SYMBOL	MEANING
α	string
#	numeric
b	boolean
m	metric
{}	JSON object
[]	array

On JSON objects and arrays, you'll also see:

SYMBOL	MEANING
+	expandable

SYMBOL	MEANING
-	collapsible

Saving Sample Data

The Preview pane's **Import Data** or **Capture Data** modal, once you've successfully populated it with data, provides options to save the data as a sample and/or datagen file. Click the appropriate button, accept or modify the default/generated file name and other options, and confirm the save.

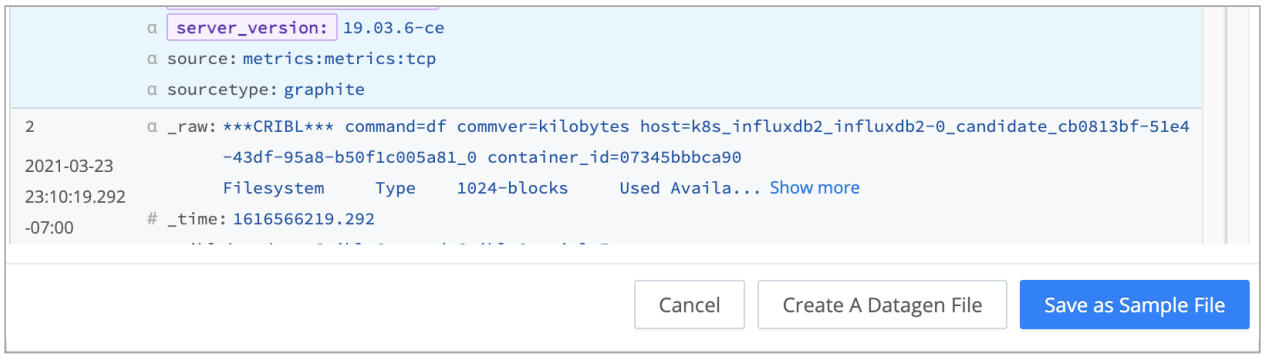

Saving sample data

Accessing and Managing Data Files

As you add more samples to your system, you can easily access them via the **Sample data file** drop-down. You can also manage and modify sample files via the **Samples** tab highlighted below.

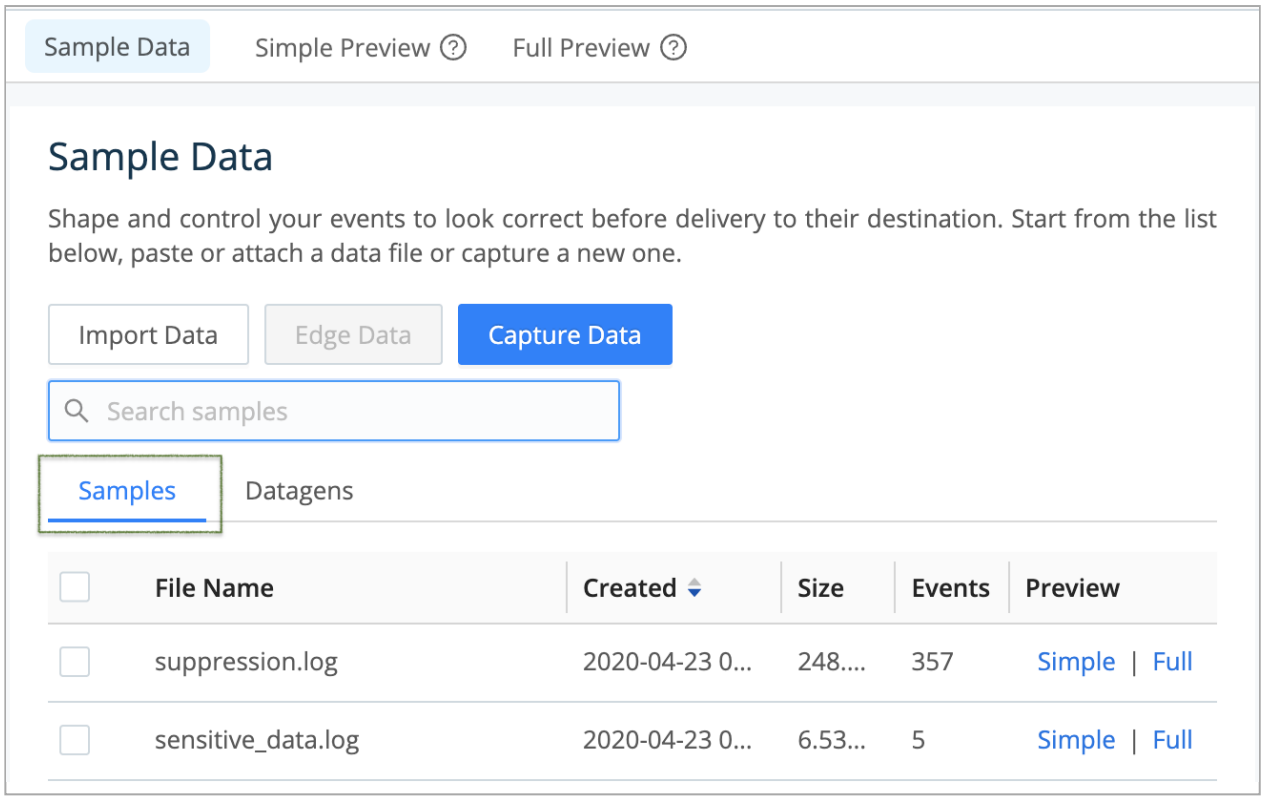

Managing sample files

Simple Versus Full Preview

Click **Simple** or **Full** beside a file name to display its events in the Preview pane. The **Simple Preview** option enables you to view events on either the **IN** or the **OUT** (processed) side of a single Pipeline.

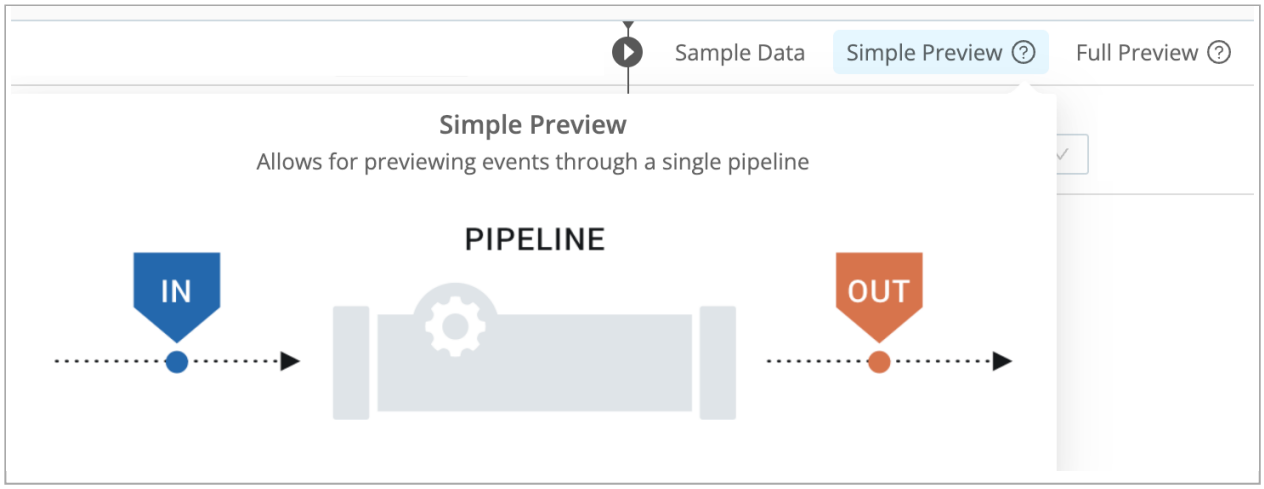

Simple Preview schematic

The **Full Preview** option gives you a choice of viewing events on the **OUT** side of either the processing or post-processing Pipeline. Selecting this option expands the Preview pane's upper controls to include an **Exit Point** drop-down, where you make this choice.

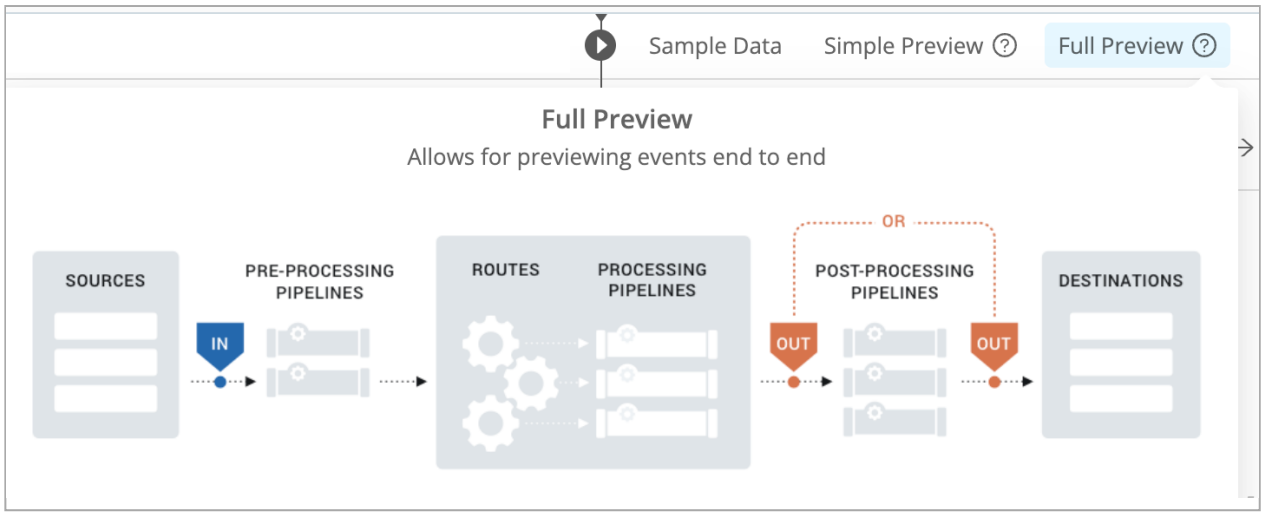

Full Preview schematic

Modifying Sample Files

1. In the right Preview pane, select the **Samples** tab.
2. Hover over the file name you want to modify. This displays an edit (pencil) button to its left.
3. Click that button to open the modal shown below. It provides options to edit, clone, or delete the sample, save it as a datagen Source, or modify its metadata (**File name**, **Description**, **Expiration time**, and **Tags**).

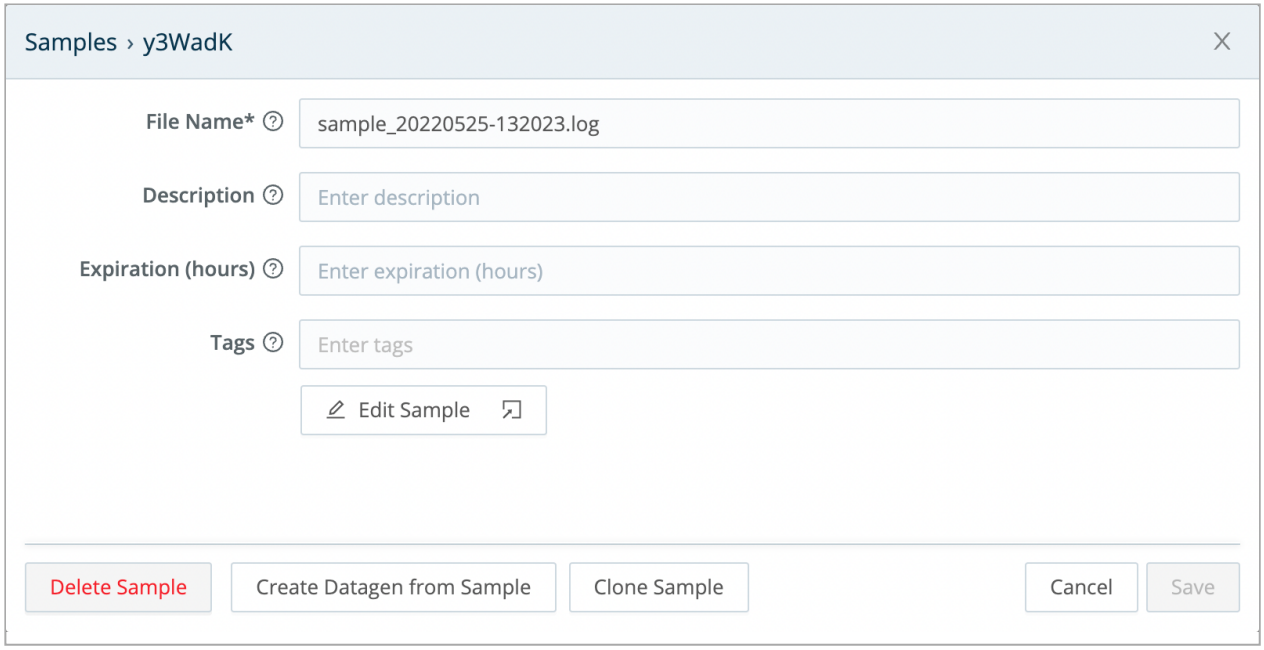

Options for modifying a sample

4. To make changes to the sample, click the modal's **Edit Sample** button. This opens the **Edit Sample** modal shown below, exposing the sample's raw data.

5. Edit the raw data as desired.
6. Click **Update Sample** to resave the modified sample, or click **Save as New Sample** to give the modified version a new name.

Editing a sample file

IN Tab: Displaying Samples on the Way IN to the Pipeline

The Preview pane offers two display options for events: Event and Table. Each format can be useful, depending on the type of data you are previewing. This screenshot shows Event view:

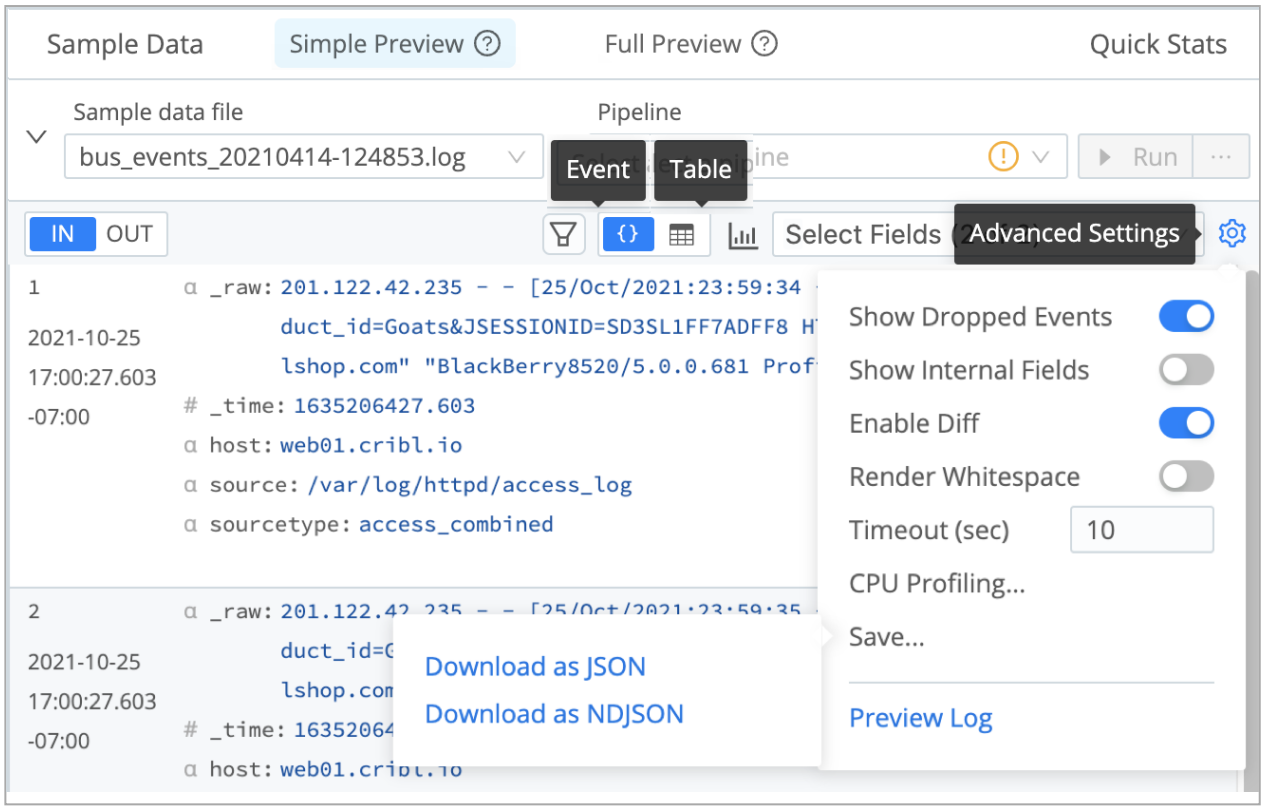

Event, Table, and Advanced options (composite screenshot)

On the **Advanced Settings** menu at the upper right, the first few toggles are self-explanatory, and are used primarily to filter the OUT tab's display of processed data. The following subsections cover the less-obvious controls at the menu's bottom.

Render Whitespace

This toggles between displaying carriage returns, newlines, tabs, and spaces as white space, versus as(respectively) the symbols , , →, and ·.

Timeout (Sec)

If large sample files time out before they fully load, increase this field's default value of `10` seconds. A blank field is interpreted as the minimum allowed timeout value of `1` second.

Pipeline Profiling

At the Preview pane's top, you can select a sample data file and Pipeline, then click the Pipeline diagnostics (bar-graph) button to access statistics on the selected Pipeline's performance. (The same button is available on Pipelines within a Pack.)

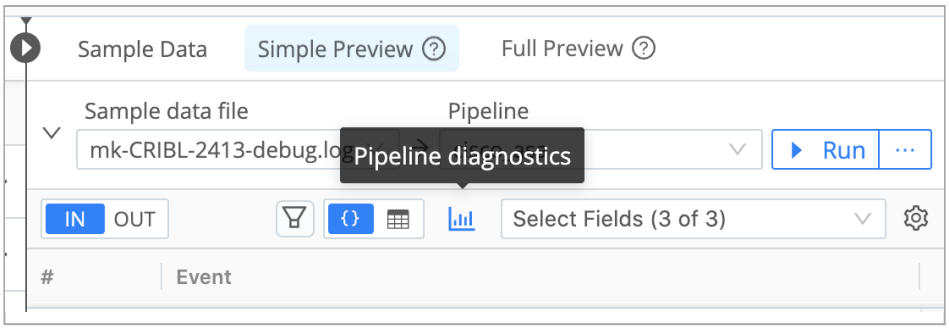

Pipeline diagnostics

The resulting modal's **Statistics** tab displays basic stats about the Pipeline's processing impact on field and event length and counts.

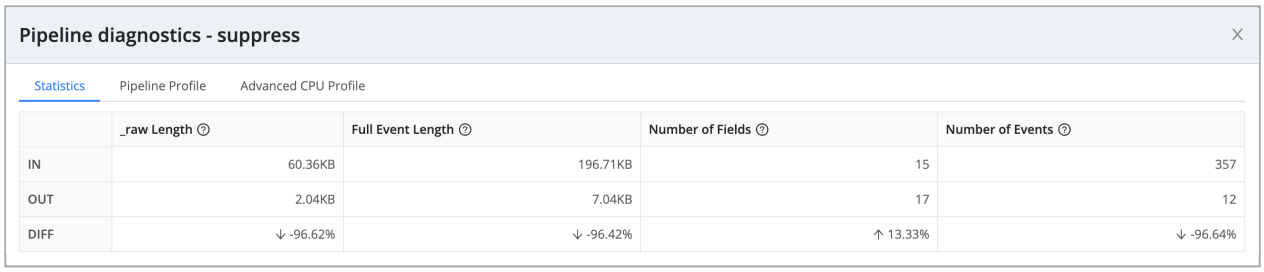

Pipeline diagnostics - suppress

Statistics | Pipeline Profile | Advanced CPU Profile

	_raw Length	Full Event Length	Number of Fields	Number of Events
IN	60.36KB	196.71KB	15	357
OUT	2.04KB	7.04KB	17	12
DIFF	↓ -96.62%	↓ -96.42%	↑ 13.33%	↓ -96.64%

Pipeline diagnostics > Statistics tab

The **Pipeline Profile** tab, available from the **Simple Preview** tab, helps you debug your Pipeline by showing individual Functions' contributions to data volume, events count, and the Pipeline's processing time.

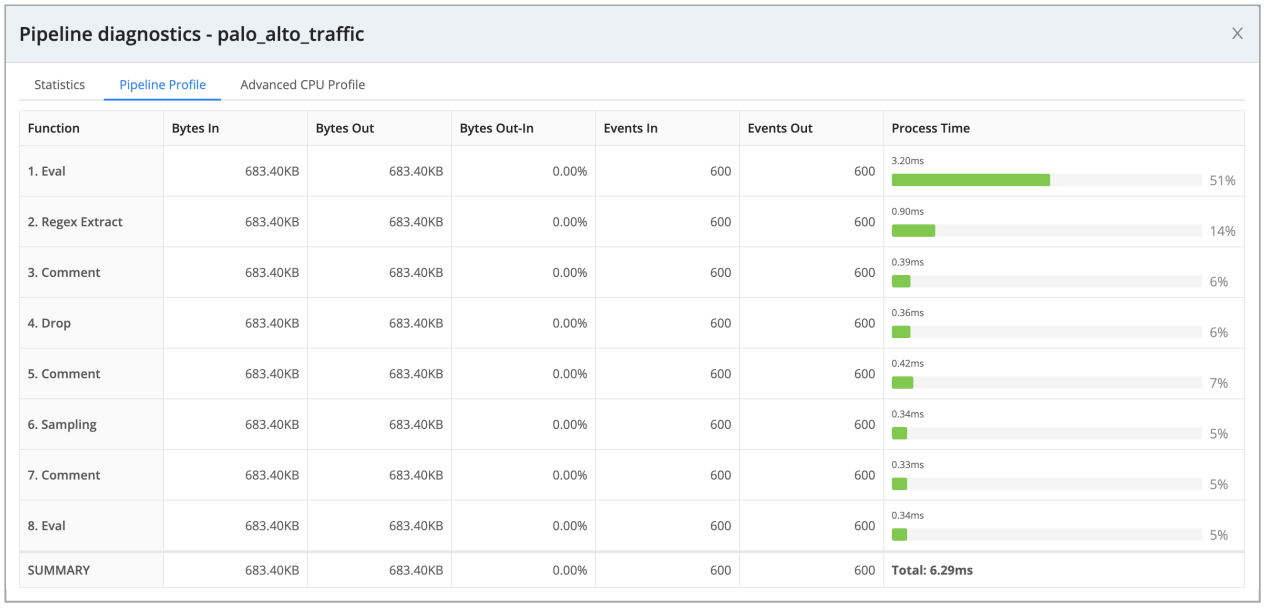

Pipeline diagnostics - palo_alto_traffic

Statistics | Pipeline Profile | Advanced CPU Profile

Function	Bytes In	Bytes Out	Bytes Out-In	Events In	Events Out	Process Time
1. Eval	683.40KB	683.40KB	0.00%	600	600	3.20ms 51%
2. Regex Extract	683.40KB	683.40KB	0.00%	600	600	0.90ms 14%
3. Comment	683.40KB	683.40KB	0.00%	600	600	0.39ms 6%
4. Drop	683.40KB	683.40KB	0.00%	600	600	0.36ms 6%
5. Comment	683.40KB	683.40KB	0.00%	600	600	0.42ms 7%
6. Sampling	683.40KB	683.40KB	0.00%	600	600	0.34ms 5%
7. Comment	683.40KB	683.40KB	0.00%	600	600	0.33ms 5%
8. Eval	683.40KB	683.40KB	0.00%	600	600	0.34ms 5%
SUMMARY	683.40KB	683.40KB	0.00%	600	600	Total: 6.29ms

Pipeline diagnostics > Pipeline Profile tab

When you profile a Chain Function, this tab condenses all of the chained Pipeline's processing into a single **Chain** row. To see individual statistics on the aggregated Functions, profile the chained Pipeline separately.

The **Advanced CPU Profile** tab, available from the **Simple Preview** tab, displays richer details on individual Function stacks.

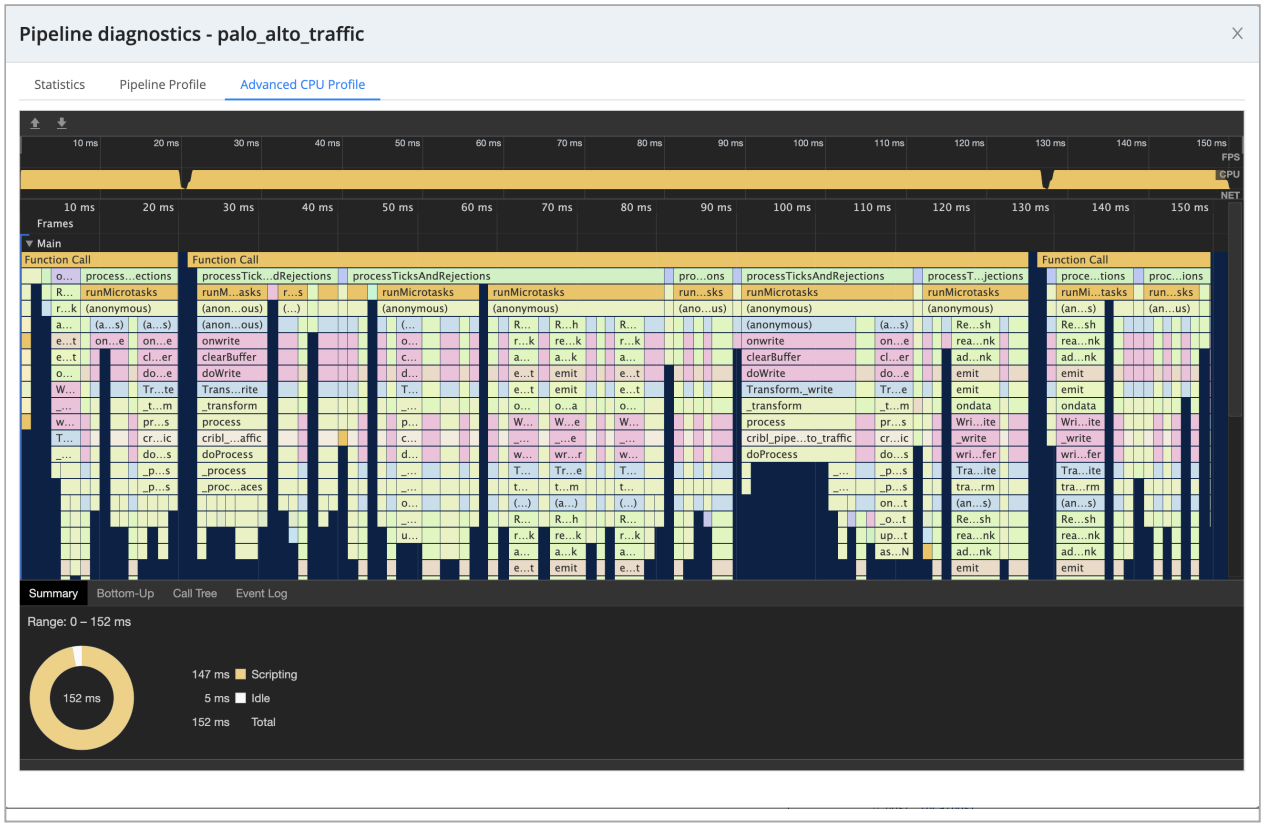

Pipeline diagnostics > Advanced CPU Profile tab

You can disable the profiling features – and regain their own (minimal) resources – by clicking the drop-down list beside the **Run** button and clearing the **Run with Profiler** check box.

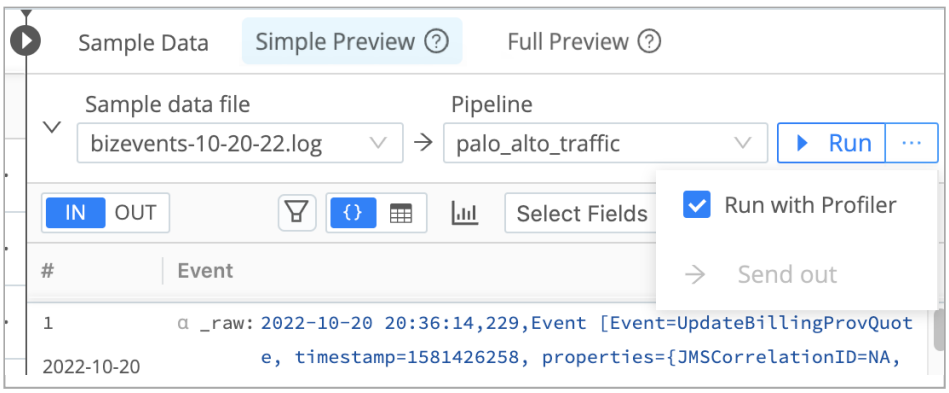

Disabling Pipeline profiling

Save

The **Save** submenu enables you to save your captured data to a file, using either the **Download as JSON** or the **Downoad as NDJSON** (Newline-Delimied JSON) option.

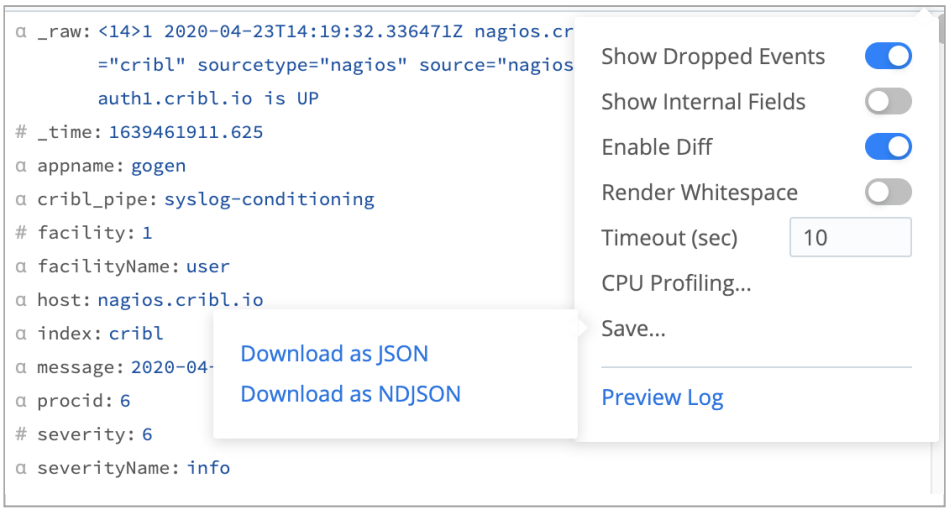

Saving sample data as JSON

Preview Log

The final option on the **Advanced Settings** menu opens a modal where you can preview Cribl Stream's internal logs summarizing how this data sample was processed and captured.

OUT Tab: Displaying Samples on the Way OUT of the Pipeline

As data traverses through a Pipeline's Functions, events can be modified, and some might be dropped altogether. The **OUT** tab indicates changes using this color coding:

- **Dropped events**: When events are dropped, the **OUT** tab displays them as grayed-out text, with strikethrough. You can control their display using the **Advanced Settings** menu's **Show Dropped Events** slider.
- **Added fields**: When Cribl Stream's processing adds new fields, these fields are highlighted green. You can control these fields' display using the **Select Fields** drop-down.
- **Redacted fields**: These fields are highlighted amber.
- **Deleted fields**: These fields are highlighted red.

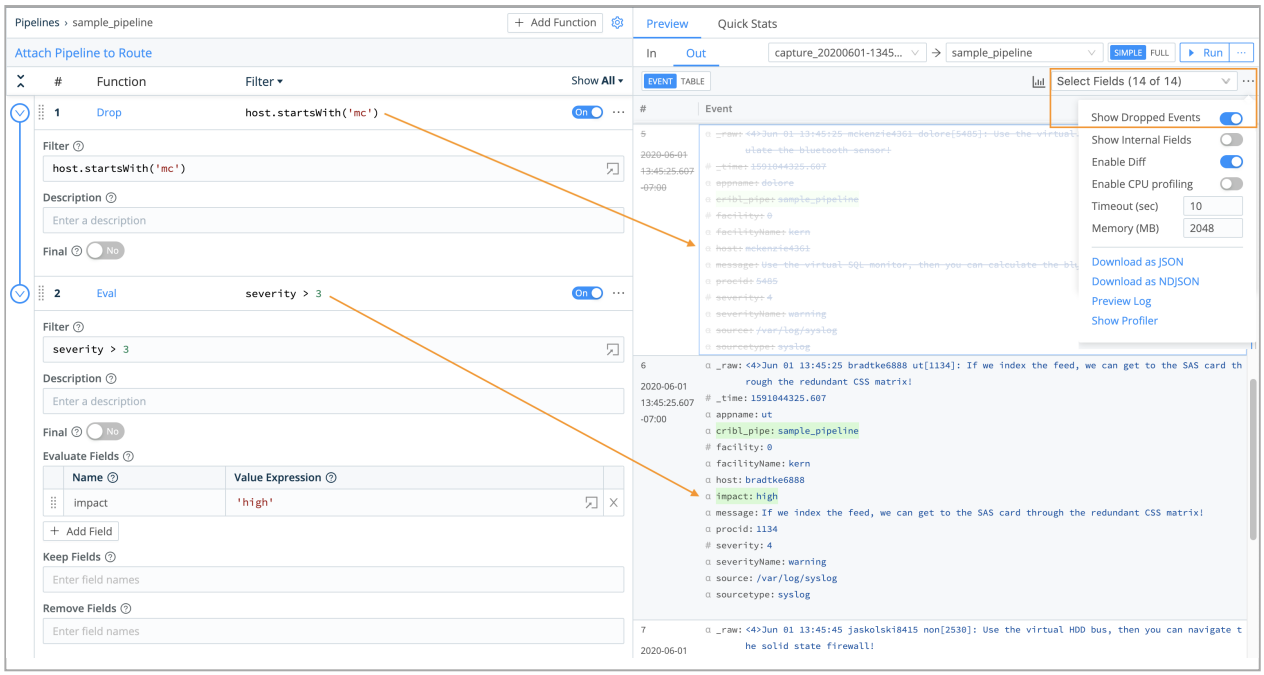

Dropped and added fields in a Pipeline's output

The **OUT** tab displays the same Event versus Table buttons as the IN tab. It also displays the same **Advanced Settings** menu options – and here, you can use the menu's **Show Dropped Events**, **Show Internal Fields**, and **Enable Diff** toggles to clarify how the data has been transformed by the Pipeline.

> Enable **Show Internal Fields** to discover fields that Cribl Stream adds to events, as well as Source-specific fields that Cribl Stream forwards from upstream senders.

Managing the Preview Pane

With the Routes or Pipelines page displayed in the left pane, hover over the pane divider (in the headers row) to display the Collapse/Expand toggle shown in the composite screenshot below.

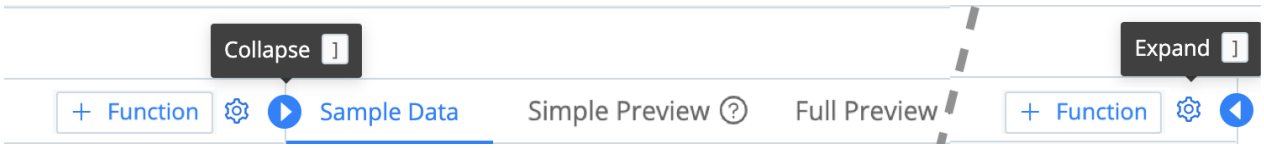

Collapse / Expand toggle (composite)

Click Collapse to hide the Preview pane. This allows the Route or Pipeline configuration to expand to your browser's full width. (The Preview pane collapses automatically on narrow viewports.)

Click Expand at your browser's right edge to restore the split view. The pane divider will snap back to wherever you last dragged it.

8.8. Data Onboarding

Onboarding data into Cribl Stream can vary in complexity, depending on your organization's needs, requirements, and constraints. Proper onboarding from all Sources is key to system performance, troubleshooting, and ultimately the quality of data and decisions both in Cribl Stream and in downstream Destinations.

General Onboarding Steps

Typically, a data onboarding process revolves around these steps, both before and after turning on the Source:

- Create configuration settings.
- Verify that settings do the right thing.
- Iterate.

Below, we break down individual steps.

Before Turning On the Source

Cribl recommends that you take the following steps to verify and tune incoming data, before it starts flowing.

Preview Sample Data

Use a sample of your real data in Data Preview. Sample data can come from a sample Source file that you upload or paste into Cribl Stream.

You can also obtain sample data in a live data capture from a Source. One way to do this **before** going to production is to configure your Source with a **devnull** Pipeline (which just drops all events) as a pre-processing Pipeline. Then, let data flow in for just long enough to capture a sufficient sample.

> **Very Large Integer Values**
>
> Cribl Stream's JavaScript implementation can safely represent integers only up to the Number.MAX_SAFE_INTEGER constant of about 9 quadrillion (precisely, {2^53}-1). Data Preview will round down any integer larger than this, and trailing 0's might indicate such rounding down.

Check the Processing Order

While events can be processed almost arbitrarily by Functions in Cribl Stream Pipelines, make sure you understand the event processing order. This is very important, as it tells you exactly where certain processing steps occur. For instance, as we'll see just below, quite a few steps can be accomplished at the Source level, before data even hits Cribl Stream Routes.

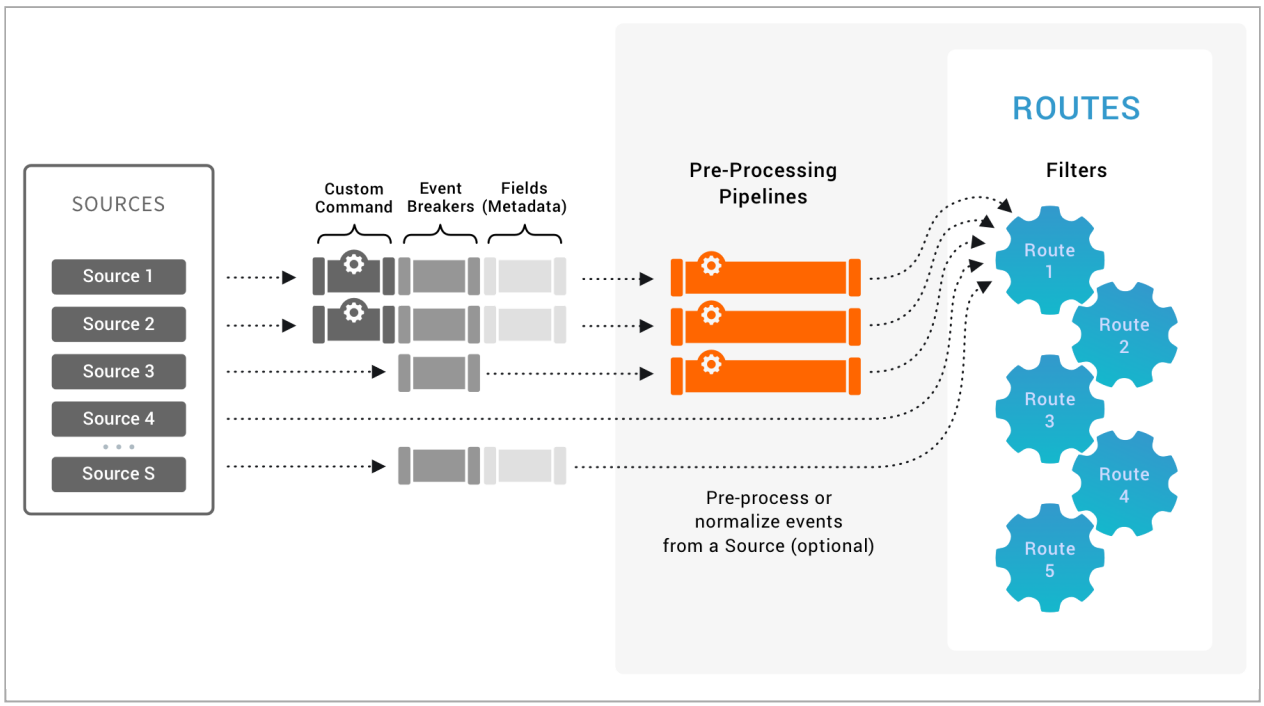

Source-level processing options

Custom Command

Where supported, data streams will be handled by **custom commands**. These are external system commands that can (optionally) be used to pre-process the data. You can specify any command, script, etc., that consumes via `stdin` and outputs via `stdout`.

Verify that such commands are doing what's expected, as they are the very **first** in a series of processing steps.

Event Breakers

Next, data streams are handled by Event Breakers, which:

- Convert data streams into discrete events.
- Extract and assign timestamps to each event.

If the resulting events do not look correct, feel free to use **non-default** breaking rules and timestamp recognition patterns. Downstream, you can use the Auto Timestamp Function to modify `_time` as needed, if timestamps were not recognized properly. Examples of such errors are:

- Timestamps too far out in the future or past
- Wrong timezone.
- Incorrect timestamp is selected from multiple timestamps present in the event.

Fields

Next, events can be enriched with Fields . This is where you'd add static or dynamic fields to all events delivered by a particular Source.

Pre-Processing Pipeline

Next, you can optionally configure a pre-processing Pipeline on a particular Source. This is extremely useful in these cases:

- Drop non-useful events as early as possible (so as to save on CPU processing).
- Normalize events from this Source to conform a certain shape or structure.
- Fix/touch up events accordingly. E.g., if event breakers assigned the wrong timestamp, this is the best place to use the Auto Timestamp Function to adjust `_time` .

We Can't Say This Enough

Verify, verify, verify, data integrity before turning on the Source.

After Turning On the Source

Use data Destinations to verify that certain metrics of interest are accurate. This will depend significantly on the capabilities of each Destination, but here's a basic checklist of things to ensure:

- Timestamps are correct.
- All necessary fields are assigned to events.
- All expected events show up correctly. (E.g., if a Drop or Suppress Function was configured, ensure that it's not dropping unintended events.)
- Throughput – both in bytes and in events per second (EPS) – is what's expected, or is within a certain tolerance.

Iterate

Iterate on the steps above as necessary. E.g., adjust fields values and timestamps as needed.

> Remember that there is almost always a workaround. Any arbitrary event transformation that you need is likely just a Function or two away.

9. Functions

When events enter a Pipeline, they're processed by a series of Functions. At its core, a Function is code that executes on an event, and it encapsulates the smallest amount of processing that can happen to that event.

The term "processing" means a variety of possible options: string replacement, obfuscation, encryption, event-to-metrics conversions, etc. For example, a Pipeline can be composed of several Functions – one that replaces the term `foo` with `bar`, another one that hashes `bar`, and a final one that adds a field (say, `dc=jfk-42`) to any event that matches `source=='us-nyc-application.log'`.

How Do They Work

Functions are atomic pieces of JavaScript code that are invoked on each event that passes through them. To help improve performance, Functions can be configured with filters to further scope their invocation to matching events only.

You can add as many Functions in a Pipeline as necessary, though the more you have, the longer it will take each event to pass through. Also, you can turn Functions **On**/**Off** within a Pipeline as necessary. This enables you to preserve structure as you optimize or debug.

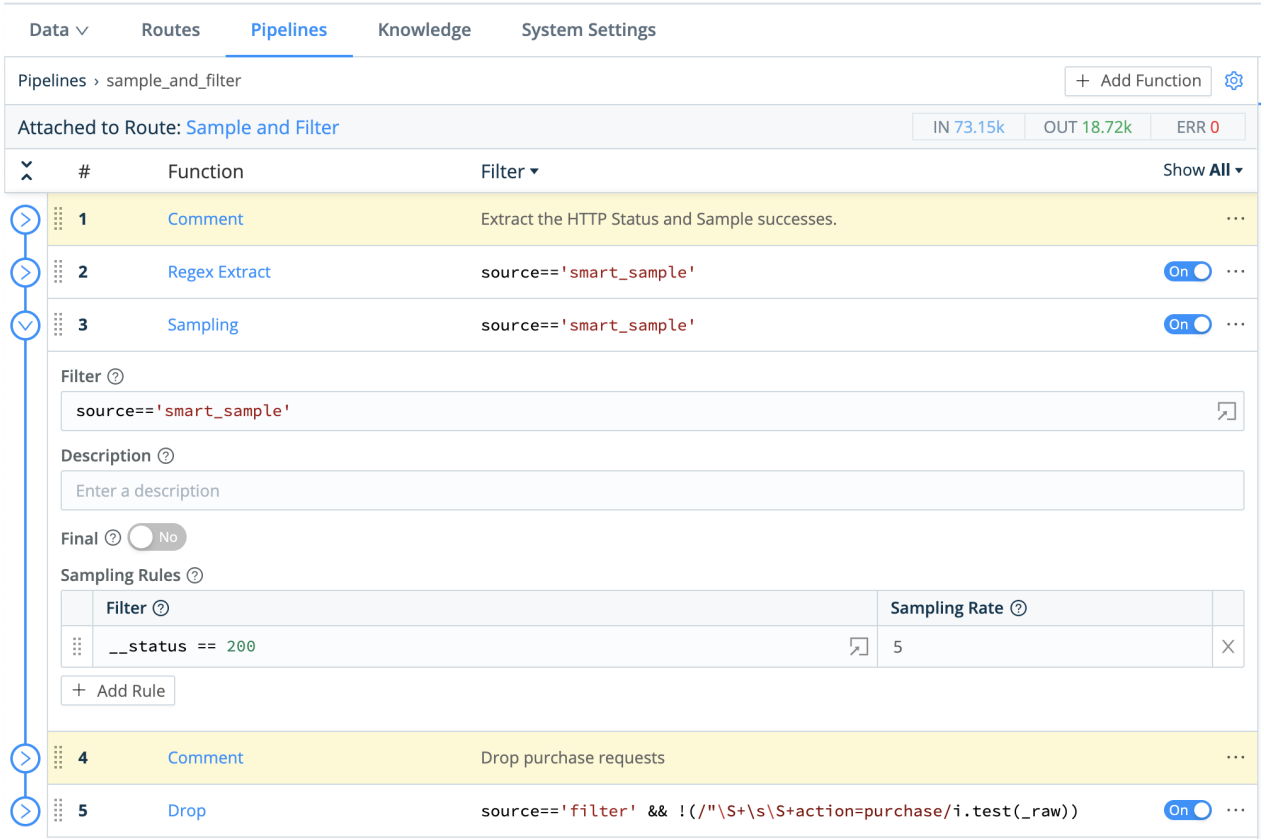

You can reposition Functions up or down the Pipeline stack to adjust their execution order. Use a Function's left grab handle to drag and drop it into place.

The `Final` Toggle

Similar to the `Final` toggle in Routes, the `Final` toggle here controls the flow of events at the Function level. Its states are:

- `No` (**default**): means that matching events processed by this Function will be passed down to the next Function.
- `Yes` : means that this Function is the last one that will be applied to matching events. All Functions further down the Pipeline will be skipped. A Function with `Final` set to `Yes` will display an **F** indicator in the Pipeline stack.

Functions and Shared-Nothing Architecture

Cribl Stream is built on a shared-nothing architecture, where each Node and its **Worker Processes operate separately, and process events independently of each other**. This means that all Functions operate strictly in a Worker Process context – state is not shared across processes.

For example, consider two events that meet a Pipeline's criteria to be aggregated. If these two events arrive on **separate** Workers or Worker Processes, Cribl Stream will **not** aggregate them together.

This is particularly important to understand for certain Functions that might imply state-sharing, such as Aggregations, Rollup Metrics, Dynamic Sampling, Sampling, Suppress, etc.

If you have a large number of Worker Processes, consider implementing a distributed caching tier, such as Redis, to aggregate events across Workers. (See our Redis Function topic.)

Out-of-the-Box Functions

Cribl Stream ships with several Functions out-of-the-box, and you can chain them together to meet your requirements. For more details, see individual **Functions**, and the **Use Cases** section, within this documentation.

Accessing Event Fields with `__e`

The special variable `__e` represents the `(context)` event inside a JavaScript expression. Using `__e` with square bracket notation, you can access any field within the event object, for example, `__e['hostname']`. Functions use `__e` extensively. You also **must** use this notation for fields that contain a special character, like `-`, `.`, or `@`.

Supported JavaScript Standard

Cribl Stream supports the ECMAScript® 2015 Language Specification.

Very Large Integer Values

Cribl Stream's JavaScript implementation can safely represent integers only up to the Number.MAX_SAFE_INTEGER constant of about 9 quadrillion (precisely, {2^53}-1). Cribl Stream Functions will round down any integer larger than this, in Data Preview and other contexts. Trailing 0's might indicate such rounding down of large integers.

What Functions to Use When

- Add, remove, update fields: Eval, Lookup, Regex Extract
- Find & Replace, including basic `sed`-like, obfuscate, redact, hash, etc.: Mask, Eval
- Add GeoIP information to events: GeoIP
- Extract fields: Regex Extract, Parser
- Extract timestamps: Auto Timestamp
- Drop events: Drop, Regex Filter, Sampling, Suppress, Dynamic Sampling
- Sample events (e.g, high-volume, low-value data): Sampling, Dynamic Sampling
- Suppress events (e.g, duplicates, etc.): Suppress
- Serialize events to CEF format (send to various SIEMs): CEF Serializer
- Serialize / change format (e.g., convert JSON to CSV): Serialize

- Convert JSON arrays into their own events: JSON Unroll, XML Unroll
- Flatten nested structures (e.g., nested JSON): Flatten
- Aggregate events in real-time (i.e., statistical aggregations): Aggregations
- Convert events to metrics format: Publish Metrics, Prometheus Publisher (beta)
- Resolve hostname from IP address: Reverse DNS (beta)
- Extract numeric values from event fields, converting them to type `number`: Numerify
- Send events out to a command or a local file, via `stdin`, from any point in a Pipeline: Tee
- Convert an XML event's elements into individual events: XML Unroll
- Duplicate events in the same Pipeline, with optional added fields: Clone
- Break events **within**, instead of before they reach, a Pipeline: Event Breaker
- Add a text comment within a Pipeline's UI, to label steps without changing event data: Comment

> For more usage examples, download Cribl's Stream Cheat Sheet (Quick Reference Card).

Function Groups

A Function group is a collection of consecutive Functions that can be moved up and down a Pipeline's Functions stack together. Groups help you manage long stacks of Functions by streamlining their display. They are a UI visualization only: While Functions are in a group, those Functions maintain their global position order in the Pipeline.

> Function groups work much like Route groups.

To build a group from any Function, click the Function's ••• (Options) menu, then select **Group Actions > Create Group**.

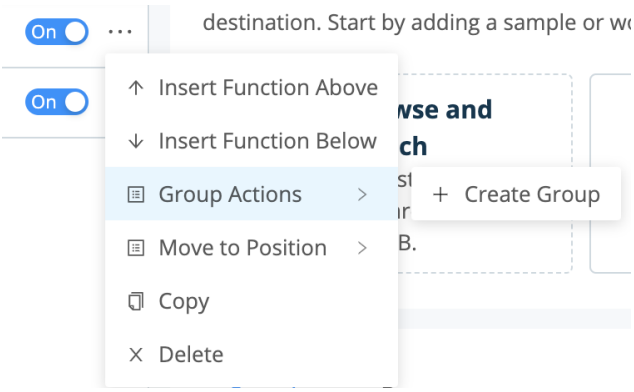

Creating a group

You'll need to enter a **Group Name** before you can save or resave the Pipeline. Optionally, enter a **Description**.

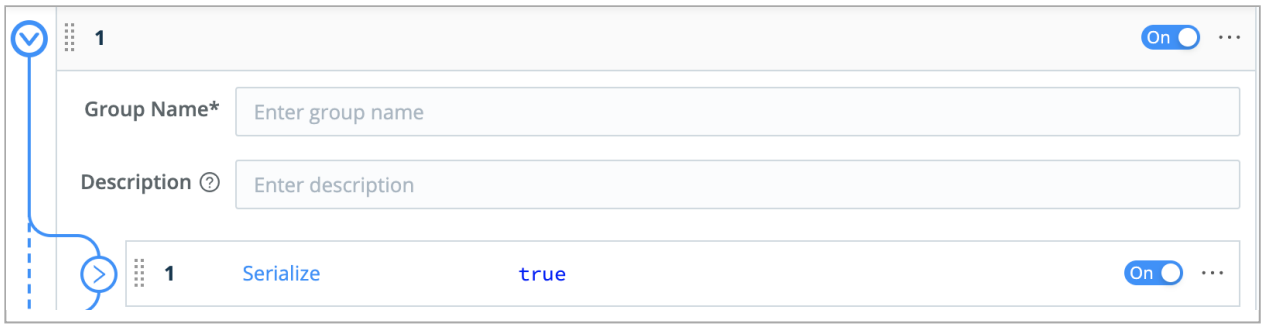

Naming a group

Once you've saved at least one group to a Pipeline, other Functions' ••• (Options) > **Group Actions** submenus will add options to **Move to Group** or **Ungroup/Ungroup All**.

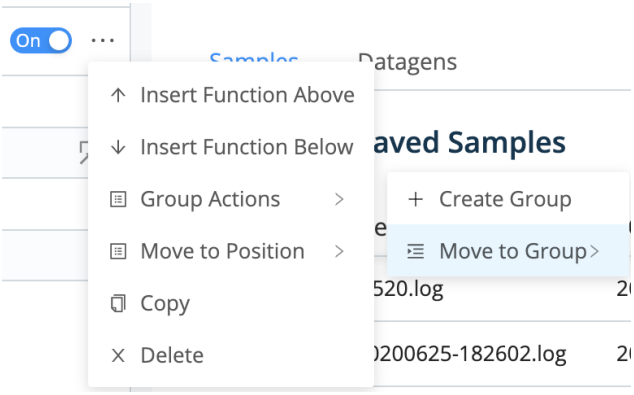

Expanded Group Actions submenu

You can also use a Function's left grab handle to drag and drop it into, or out of, a group. A saved group that's empty displays a dashed target into which you can drag and drop Functions.

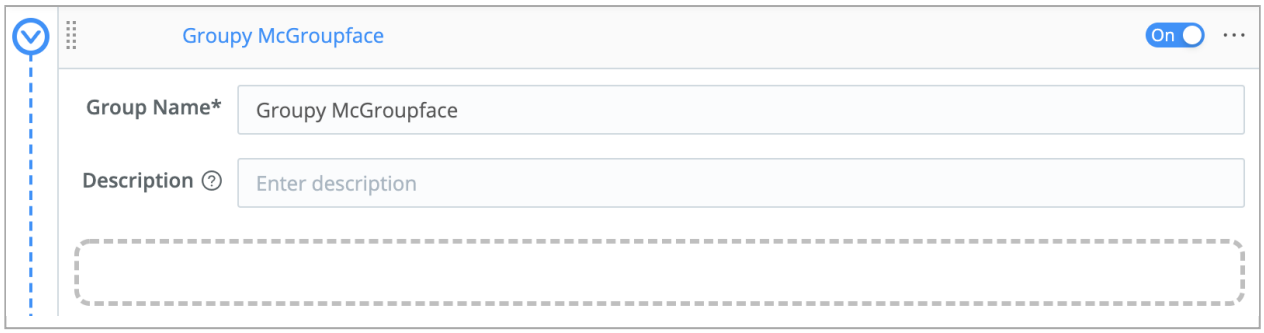

Drag-and-drop target

9.1. Auto Timestamp

The Auto Timestamp Function extracts time to a destination field, given a source field in the event.
By default, Auto Timestamp makes a first best effort and populates `_time`. When you add a sample (via paste or a local file), you should accomplish time and event breaking at the same time you add the data.

This Function allows fine-grained and powerful transformations to populate new time fields, or to edit existing time fields. You can use the Function's Additional timestamps section to create custom time fields using regex and custom JavaScript `strptime` functions.

> The Auto Timestamp Function uses the same basic algorithm as the Event Breaker Function and the C.Time.timestampFinder() native method.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. The default `true` setting passes all events through the Function.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Source field: Field to search for a timestamp. Defaults to `_raw`.

Destination field: Field to place extracted timestamp in. Defaults to `_time`. Supports nested addressing.

Default timezone: Select a timezone to assign to timestamps that lack timezone info. Defaults to `Local`. (This drop-down includes support for legacy names: `EST5EDT`, `CST6CDT`, `MST7MDT`, and `PST8PDT`.)

Additional timestamps: To extract additional timestamp formats, click **Add Timestamp** to define each format. Each row will provide these fields:

- **Regex**: Regex, with first capturing group matching the timestamp.
- **Strptime format**: Select or enter the `strptime` format for the captured timestamp.

Advanced Settings

Time expression: Expression with which to format extracted time. Current time, as a JavaScript Date object, is in global `time`. Defaults to `time.getTime() / 1000`. You can access other fields' values via `__e.<fieldName>`.

> For details about Cribl Stream's Library (native) time methods, see: C.Time – Time Functions.

Start scan offset: How far into the string to look for a time string.

Max timestamp scan depth: Maximum string length at which to look for a timestamp.

Default time: How to set the time field if no timestamp is found. Defaults to **Current time**.

Two fields enable you to constrain (clamp) the parsed timestamp, to prevent the Function from mistakenly extracting non-time values as unrealistic timestamps:

- **Earliest timestamp allowed**: Enter a string that specifies the latest allowable timestamp, relative to now. (Sample value: `-42years`. Default value: `-420weeks`.) Parsed values earlier than this date will be set to the **Default time**.
- **Future timestamp allowed**: Enter a string that specifies the latest allowable timestamp, relative to now. (Sample value: `+42days`. Default value: `+1week`.) Parsed values after this date will be set to the **Default time**.

Format Reference

This references https://github.com/d3/d3-time-format#locale_format. Directives annotated with a `(†)` symbol might be affected by the locale definition.

```
%a - abbreviated weekday name. (†)
%A - full weekday name. (†)
%b - abbreviated month name. (†)
%B - full month name. (†)
%c - the locale's date and time, such as %x, %X. (†)
%d - zero-padded day of the month as a decimal number [01,31].
%e - space-padded day of the month as a decimal number [ 1,31]; equivalent to %_d.
%f - microseconds as a decimal number [000000, 999999].
%H - hour (24-hour clock) as a decimal number [00,23].
%I - hour (12-hour clock) as a decimal number [01,12].
%j - day of the year as a decimal number [001,366].
%m - month as a decimal number [01,12].
%M - minute as a decimal number [00,59].
%L - milliseconds as a decimal number [000, 999].
%p - either AM or PM. (†)
%Q - milliseconds since UNIX epoch.
%s - seconds since UNIX epoch.
%S - second as a decimal number [00,61].
%u - Monday-based (ISO 8601) weekday as a decimal number [1,7].
%U - Sunday-based week of the year as a decimal number [00,53].
%V - ISO 8601 week of the year as a decimal number [01, 53].
%w - Sunday-based weekday as a decimal number [0,6].
%W - Monday-based week of the year as a decimal number [00,53].
%x - the locale's date, such as %-m/%-d/%Y. (†)
%X - the locale's time, such as %-I:%M:%S %p. (†)
%y - year without century as a decimal number [00,99].
%Y - year with century as a decimal number.
%Z - time zone offset, such as -0700, -07:00, -07, or Z.
%% - a literal percent sign (%).
```

Complying with the Format

In order to use auto timestamping upon ingestion, the formatting used must match the `%Z` parameters above. E.g., this Function will automatically parse all of these formats:

- `2020/06/10T17:17:35.004-0700`
- `2020/06/10T17:17:35.004-07:00`
- `2020/06/10T17:17:35.004-07`
- `2020/06/10T10:17:35.004Z`
- `2020/06/10T11:17:35.004 EST`

To parse other formats, you can use the Additional Timestamps section's internal **Regex** or **Strptime Format** operators.

Basic Example

Filter: `name.startsWith('kumquats') && value=='specific string here'`

This will allow the Auto Timestamp Function to act only on events matching the specified parameters.

Sample event:

```
Sep 20 12:03:55 PA-VM 1,2019/09/20 13:03:58,CRIBL,TRAFFIC,end,2049,2019/09/20 14:03:58,314.817.108.226,10.0.0.102,314.817.108.226,10.0.2.65,cribl,,,incomplete,vsys1,untrusted,trusted,ethernet1/3,ethernet1/2,log-forwarding-default,2018/09/20 13:03:58,574326,1,53722,8088,53722,8088,0x400064,tcp,allow,296,296,0,4,2018/09/20 13:03:45,7,any,0,730277,0x0,United States,10.0.0.0-10.255.255.255,0,4,0,aged-out,0,0,0,0,,PA-VM,from-policy,,,0,,0,,N/A,0,0,0,0
```

To add this sample (after creating an Auto Timestamp Function with the above **Filter** expression): Go to **Preview** > **Add a Sample** > **Paste a Sample**, and add the data snippet above. Do not make any changes to timestamping or line breaking, and select **Save as Sample File**.

By default, Cribl Stream will inspect the first 150 characters, and will extract the first valid timestamp it sees. You can modify this character limit under **Advanced Settings** > **Max Timestamp Scan Depth**.

Cribl Stream will grab the first part of the event, and will settle on the first matching value to display for `time`:

- `_time 1569006235`
- **GMT**: Friday, 20 September 2019, 7:03:55 PM GMT
- **Your Local Time**: Friday, 20 September 2019 PDT, 12:03:55 AM **GMT** -07:00

Because no explicit timezone has been set (under **Default Timezone**), `_time` will inherit the **Local** timezone, which in this example is `GMT -07:00`.

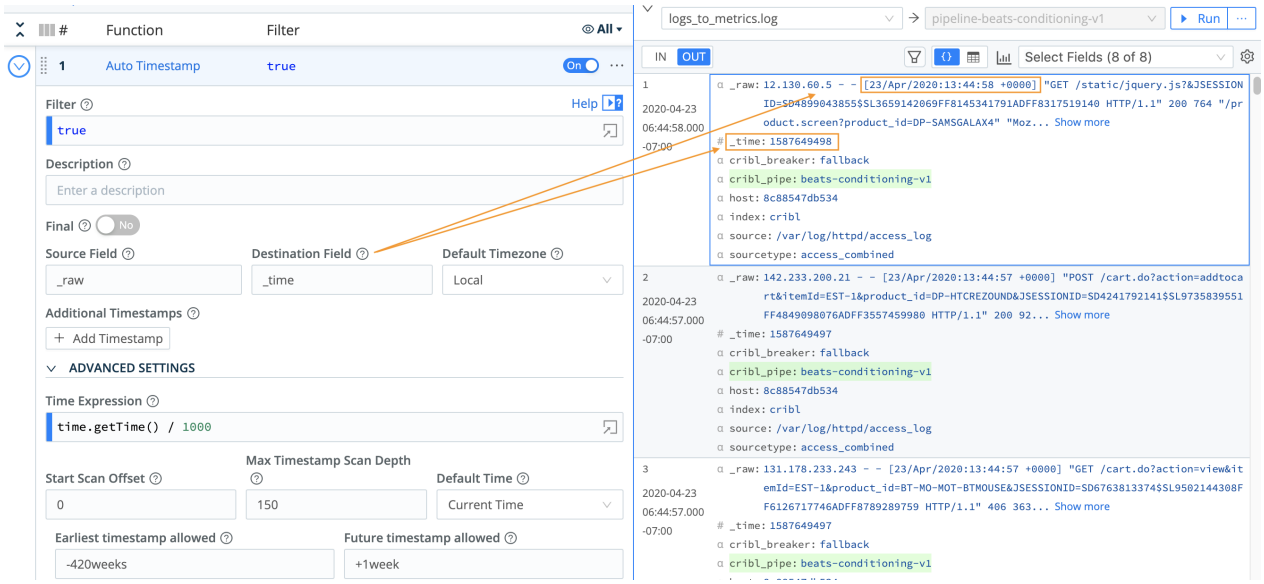

Timezone Dependencies and Details

Cribl Stream uses ICU for timezone information. It does not query external files or the operating system. The bundled ICU is updated periodically.

For additional timezone details, see: https://www.iana.org/time-zones.

Advanced Settings Example

The `datetime.strptime()` method creates a datetime object from the string passed in by the **Regex** field.

Here, we'll use `datetime.strptime()` to match a timestamp in AM/PM format at the end of a line.

Sample:

```
This is a sample event that will push the datetime values further on inside the event.
This is still a sample event and finally here is the datetime information!:
Server_UTC_Timestamp="04/27/2020 2:30:15 PM"
```

Max timestamp scan depth: `210`

Click to add **Additional timestamps**:

Regex: `(\d{1,2}\/\d{2}\/\d{4}\s\d{1,2}:\d{2}:\d{2}\s\w{2})`

Strptime format: `'%m/%d/%Y %H:%M:%S %p'`

Gnarly Details

- This Function supports the `%f` (microseconds) directive.
- Cribl Stream will truncate timestamps to three-digit (milliseconds) resolution, omitting trailing zeros.
- For further examples, see Extracting Timestamps from Messy Logs.

9.2. Aggregations

The Aggregations Function performs aggregate statistics on event data.

> Each Worker Process executes this Function independently on its share of events. For details, see Functions and Shared-Nothing Architecture.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Time window: The time span of the tumbling window for aggregating events. Must be a valid time string (e.g., `10s`). Must match pattern `\d+[sm]$`.

Aggregates: Aggregate function(s) to perform on events.
E.g., `sum(bytes).where(action=='REJECT').as(TotalBytes)`. Expression format: `aggFunction(<FieldExpression>).where(<FilterExpression>).as(<outputField>)`. See more examples below.

- Note: When used without `as()`, the aggregate's output will be placed in a field labeled `<aggFunction>_<fieldName>`. If there are conflicts, the last aggregate wins. For example, given two aggregates – `sum(bytes).where(action=='REJECT')` and `sum(bytes)` – the latter one (`sum_bytes`) is the winner.

Group by Fields: Fields to group aggregates by. Supports wildcard expressions.

Evaluate fields: Set of key-value pairs to evaluate and add/set. Fields are added in the context of an aggregated event, before they're sent out. Does not apply to passthrough events.

Time Window Settings

Cumulative aggregations: If enabled, aggregations will be retained for cumulative aggregations when flushing out an aggregation table event. When set to `No` (the default), aggregations will be reset to `0` on

flush.

Lag tolerance: The lag tolerance represents the tumbling window tolerance to late events. Must be a valid time string (e.g., `10s`). Must match pattern `\d+[sm]$`.

Idle bucket time limit: The amount of time to wait before flushing a bucket that has not received events. Must be a valid time string (e.g., `10s`). Must match pattern `\d+[sm]$`.

Output Settings

Passthrough mode: Determines whether to pass through the original events along with the aggregation events. Defaults to `No`.

Metrics mode: Determines whether to output aggregates as metrics. Defaults to `No`, causing aggregates to be output as events.

Sufficient stats mode: Determines whether to output *only* statistics sufficient for the supplied aggregations. Defaults to `No`, meaning output richer statistics.

Output prefix: A prefix that is prepended to all of the fields output by this Aggregations Function.

Advanced Settings

Aggregation event limit: The maximum number of events to include in any given aggregation event. Defaults to unlimited. Must be at least `1`.

Aggregation memory limit: The memory usage limit to impose upon aggregations. Defaults to unlimited (i.e., the amount of memory available in the system). Accepts numerals with multiple-byte units, like KB, MB, GB, etc. (such: as `4GB`.)

Flush on stream close: If set to `Yes` (the default), aggregations will flush when an input stream is closed. If set to `No`, the Time Window Settings will control flush behavior; this can be preferable in cases like the following:

- Your input data consists of many small files.
- You are sending data to Prometheus. Enabling **Flush on stream close** can send Prometheus multiple aggregations from the same Worker Process for the same time period. Prometheus cannot tell the multiple aggregations apart, and will ingest only the first one.

List of Aggregate Functions

- `avg(expr:FieldExpression)`: Returns the average of the values of the parameter.
- `count(expr:FieldExpression)`: Returns the number of occurrences of the values of the parameter.
- `dc(expr: FieldExpression, errorRate: number = 0.01)`: Returns the estimated number of distinct values of the `<expr>` parameter, within a relative error rate.
- `distinct_count(expr: FieldExpression, errorRate: number = 0.01)`: Returns the estimated number of distinct values of the `<expr>` parameter, within a relative error rate.
- `earliest(expr:FieldExpression)`: Returns the earliest (based on `_time`) observed value of the parameter.
- `first(expr:FieldExpression)`: Returns the first observed value of the parameter.
- `histogram(expr:FieldExpression, buckets: number[])`. Returns the average of the values of the parameter and generates a field with the same name as the aggregate output field, suffixed with `_data`.
    - `buckets` must contain at least one numeric value.

  The `_data` field in the output contains three pieces of information:

    - `_sum` – the sum of all values of the parameter.
    - `_count` – the number of values seen.
    - `_buckets` – an object whose keys are the buckets defined in the function, and whose values are the number of values that fall in that histogram bucket. In addition to the buckets defined by the user, the object will include a bucket labeled `Infinity`, into which all values will be placed.

  A value of `x` falls into a histogram bucket if it is less than or equal to the value of the bucket. A value of `45` would fall into a bucket with value `50`, but not one with value `40`. Counts are cumulative; all values counted in a bucket will also be counted in every bucket larger than it.

  For example:

  ```
  histogram (request_duration, [50, 100, 500])
  ```

- `last(expr:FieldExpression)`: Returns the last observed value of the parameter.
- `latest(expr:FieldExpression)`: Returns the latest (based on `_time`) observed value of the parameter.

- `list(expr:FieldExpression[, max:number, excludeNulls: boolean = true])`: Returns a list of values of the parameter.
    - Optional `max` parameter limits the number of values returned. If omitted, the default is `100`. If set to `0`, will return all values.
    - Optional `excludeNulls` boolean excludes null and undefined values from results. If included, defaults to `true`.
- `max(expr:FieldExpression)`: Returns the maximum value of the parameter.
- `median(expr:FieldExpression)`: Returns the middle value of the sorted parameter.
- `min(expr:FieldExpression)`: Returns the minimum value of the parameter.
- `mode(expr: FieldExpression[, excludeNulls: boolean = true])`: Returns the single most frequently encountered value of the `<expr>` parameter.
    - Optional `excludeNulls` boolean excludes null and undefined values from results. If included, defaults to `true`.
- `per_second(expr:FieldExpression)`: Returns the per second rate (based on `_time`) observed value of the parameter.
- `perc(level: number, expr: FieldExpression)`: Returns `<level>` percentile value of the numeric values of the `<expr>` parameter.
- `rate(expr:FieldExpression, timeString: string = '1s')`: Returns the rate (based on `_time`) observed value of the parameter.
- `stdev(expr:FieldExpression)`: Returns the sample standard deviation of the values of the parameter.
- `stdevp(expr:FieldExpression)`: Returns the population standard deviation of the values of the parameter.
- `sum(expr:FieldExpression)`: Returns the sum of the values of the parameter.
- `summary(expr:FieldExpression)[, quantiles: number[]])`. Returns the average of the values of the parameter and generates a field with the same name as the aggregate output field, suffixed with `_data`.
    - Optional: `quantiles` values must be between `0` and `1` inclusive.

The `_data` field in the output contains three pieces of information:

  - `_sum` – the sum of all values of the parameter.
  - `_count` – the number of values seen.
  - `_quantiles` – an object whose keys are the quantiles defined in the function, and whose values are the quantile value across the values of the parameter. For example, a quantile key `0.5` and value `500` would indicate that the 50th percentile (or median) of the values seen was 500.

  For example:

```
summary (request_duration, [0.1, 0.5, 0.95])
```

- `sumsq(expr:FieldExpression)`: Returns the sum of squares of the values of the parameter.
- `top(expr: FieldExpression, count: number[, excludeNulls: boolean = true])`: Returns the most frequently encountered values of the `<expr>` parameter, up to `<count>` number of results.
  - `count` parameter must be a positive integer.
  - Optional `excludeNulls` boolean excludes null and undefined values from results. If included, defaults to `true`.
- `values(expr:FieldExpression[, max:number, errorRate:number, excludeNulls: boolean = true])`: Returns a list of distinct values of the parameter.
  - Optional `max` parameter limits the number of values returned; if omitted, the default is `0`, meaning return all distinct values.
  - Optional `errorRate` parameter controls how accurately the function counts "distinct" values. Range is `0` – `1`; if omitted, the default value is `0.01`. Higher values allow higher error rates (fewer unique values recognized), with the offsetting benefit of less memory usage.
  - Optional `excludeNulls` boolean excludes null and undefined values from results. If included, defaults to `true`.
- `variance(expr:FieldExpression)`: Returns the sample variance of the values of the parameter.
- `variancep(expr:FieldExpression)`: Returns the population variance of the values of the parameter.

Safeguarding Data

Upon shutdown, Cribl Stream will attempt to flush the buffers that hold aggregated data, to avoid data loss. If you set a **Time window** greater than 1 hour, Cribl recommends adjusting the **Aggregation memory limit** and/or **Aggregation event limit** to prevent the system from running out of memory.

This is especially necessary for high-cardinality data. (Both settings default to unlimited, but we recommend setting defined limits based on testing.)

How Do Time Window Settings Work?

Lag Tolerance

As events are aggregated into windows, there is a good chance that most will arrive later than their event time. For instance, given a `10s` window (`10:42:00 - 10:42:10`), an event with timestamp `10:42:03` might come in 2 seconds later at `10:42:05`.

In several cases, there will also be late, or lagging, events that will arrive **after** the latest time window boundary. For example, an event with timestamp `10:42:04` might arrive at `10:42:12`. Lag Tolerance is the setting that governs how long to wait – after the latest window boundary – and still accept late events.

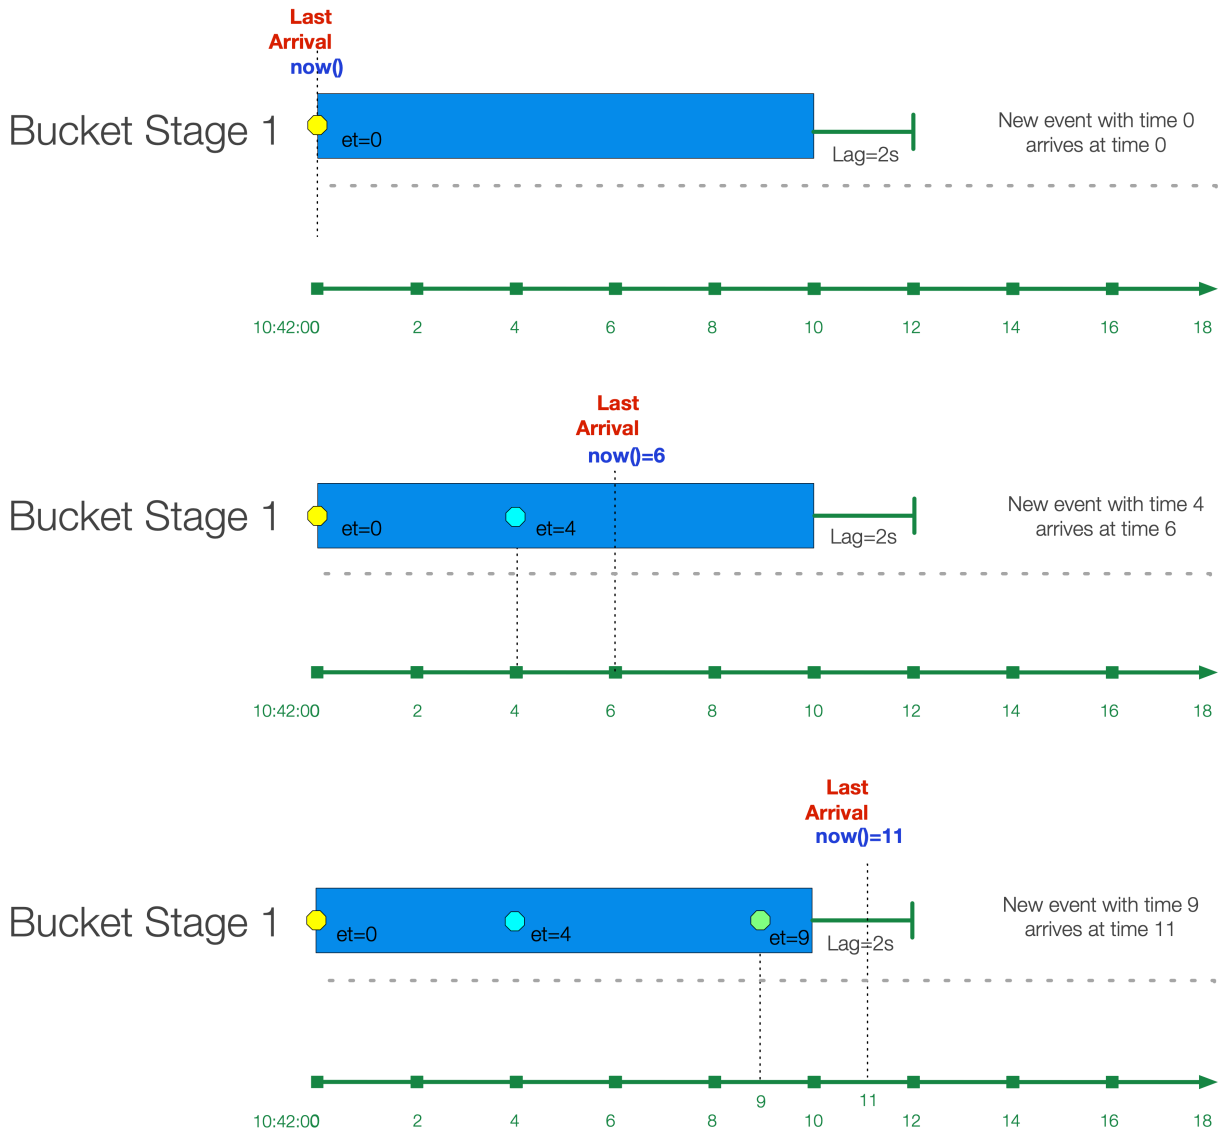

The "bucket" of events is said to be in Stage 1, where it's still accepting new events, but it's not yet finalized. Notice how in the third case, an event with event time `10:42:09` arrives 1 second past the window boundary at `10:42:11`, but it's still accepted because it happens before the lag time expires.

After the lag time expires, the bucket moves to Stage 2.

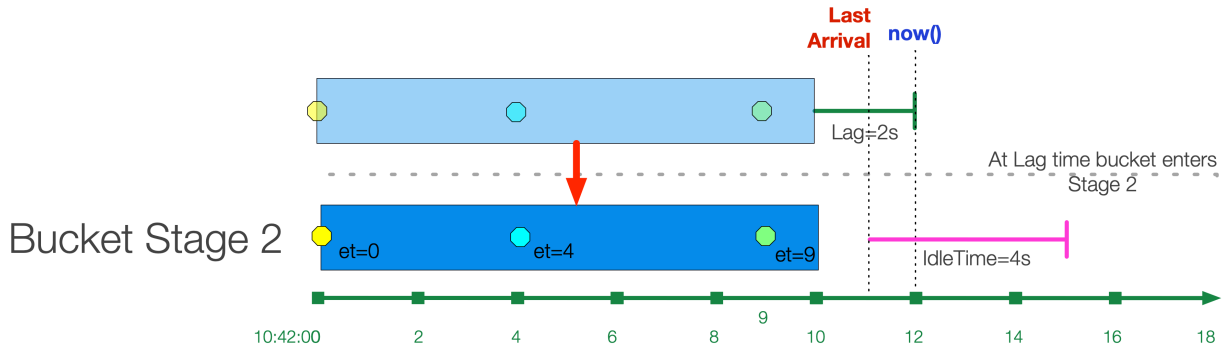

If the bucket is created from a historic stream, then the bucket is initiated in Stage 2. Lag time is not considered. A "historic" stream is one where the latest time of a bucket is before `now()`. E.g., if the window size is 10s, and `now()=10:42:42`, an event with `event_time=10` will be placed in a Stage 2 bucket with range `10:42:10 - 10:42:20`.

Idle Bucket Time Limit

While Lag Tolerance works with event time, Idle Bucket Time Limit works on arrival time (i.e., real time). It is defined as the amount of time to wait before flushing a bucket that has not received events.

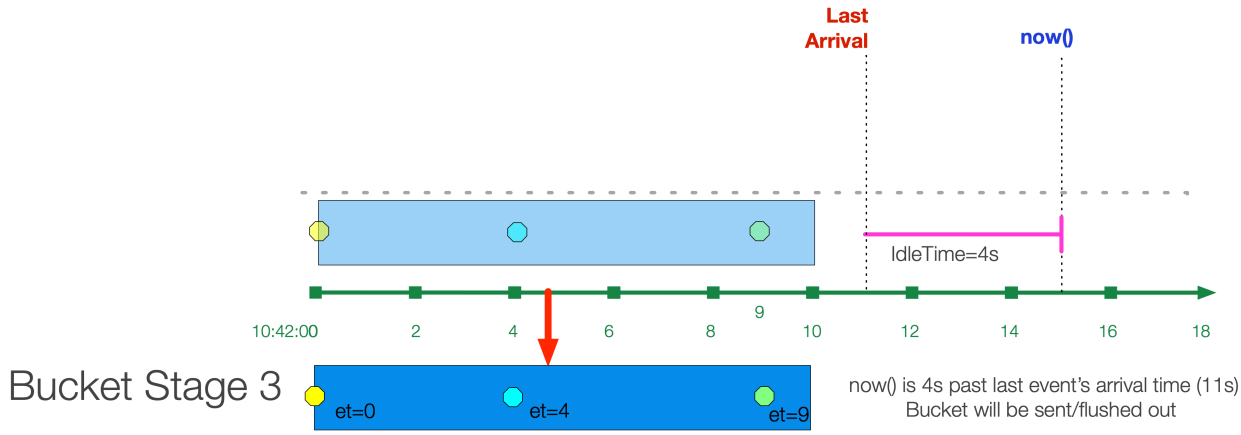

After the Idle Time limit is reached, the bucket is "flushed" and sent out of the system.

Examples

Assume we're working with VPC Flowlog events that have the following structure:

```
version account_id interface_id srcaddr dstaddr srcport dstport protocol packets bytes
start end action log_status
```

For example:

```
2 99999XXXXX eni-02f03c2880e4aaa3 10.0.1.70 10.0.1.11 9999 63030 6 6556 262256
1554562460 1554562475 ACCEPT OK 2 496698360409 eni-08e66c4525538d10b 37.23.15.38
10.0.2.232 4373 8108 6 1 52 1554562456 1554562466 REJECT OK
```

Scenario A:

Every 10s, compute sum of `bytes` and output it in a field called `TotalBytes`.

Time Window: `10s` Aggregations: `sum(bytes).as(TotalBytes)`

Scenario B:

Every 10s, compute sum of `bytes`, output it in a field called `TotalBytes`, group by `srcaddr`.

Time Window: `10s` Aggregations: `sum(bytes).as(TotalBytes)` Group by Fields: `srcaddr`

Scenario C:

Every 10s, compute sum of `bytes` but only where action is `REJECT`, output it in a field called `TotalBytes`, group by `srcaddr`.

Time Window: `10s` Aggregations: `sum(bytes).where(action=='REJECT').as(TotalBytes)` Group by Fields: `srcaddr`

Scenario D:

Every 10s, compute sum of `bytes` but only where action is `REJECT`, output it in a field called `TotalBytes`. Also, compute distinct count of `srcaddr`.

Time Window: `10s` Aggregations:
`sum(bytes).where(action=='REJECT').as(TotalBytes)`
`distinct_count(srcaddr).where(action=='REJECT')`

> For further examples, see Engineering Deep Dive: Streaming Aggregations Part 2 –

Memory Optimization.

9.3. CEF Serializer

The CEF Serializer takes a list of fields and/or values, and formats them in the Common Event Format (CEF) standard. CEF defines a syntax for log records. It is composed of a standard prefix, and a variable extension formatted as a series of key-value pairs.

Format

```
CEF:Version|Device Vendor|Device Product|Device Version|Device Event Class ID|Name|Severity|[Extension]
```

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Output field: The field to which the CEF formatted event will be output. Nested addressing supported. Defaults to `_raw`.

Header Fields

CEF Header field definitions. The field values below will be written pipe (|)–delimited in the Output Field. Names cannot be changed. Values can be computed with JS expression, or can be constants.

- **cef_version**: Defaults to `CEF:0`.
- **device_vendor**: Defaults to `Cribl`.
- **device_product**: Defaults to `Cribl`.
- **device_version**: Defaults to `C.version`.
- **device_event_class_id**: Defaults to `420`.
- **name**: Defaults to `Cribl Event`.
- **severity**: Defaults to `6`.

Extension Fields

CEF Extension field definitions. Field names and values will be written in `key=value` format. Select each field's Name from the drop-down list. Values can be computed with JS expressions, or can be constants.

Example

For each CEF field, allowed values include strings, plus any custom Cribl function. For example, if using a lookup:

Name: `Name` Value expression: `C.Lookup('lookup-exact.csv', 'foo').match('abc', 'bar')`

This can be used for any of the `CEF` **Header Fields**.

The resulting event has the following structure for an **Output Field** set to `_CEF_out`:

```
_CEF_out:CEF:0|Cribl|Cribl|42.0-61c12259|420|Business Group
6|6|c6a1Label=Colorado_Ext_Bldg7
```

9.4. Chain

The Chain Function does one thing: It chains data processing from a Pipeline or Pack to another Pipeline or Pack. This can be useful for sequential processing, or just to separate groups of related Functions into discrete Pipeline or Pack units that make intuitive sense.

> This Function includes guardrails against circular references. Still, Cribl recommends that you keep chained configurations simple and understandable by all your users. Inserting a Chain Function currently imposes a performance hit of about 10%, compared to including all processing in the original Pipeline or Pack.

Control Flow

The chained Pipeline or Pack will, upon completion, normally return control to the parent Pipeline/Pack containing the Chain Function. However, if the chained Pipeline/Pack contains any Function with the **Final** flag enabled, processing will stop there. In this case, back in the parent Pipeline/Pack, no Function below Chain will execute.

Pipeline Versus Pack Scope

You will see different scope restrictions when using Chain in a Pipeline versus in a Pack:

- In a Pipeline, the **Processor** drop-down displays both Pipelines and Packs as targets to chain to.
- In a Pack, the **Processor** drop-down offers only Pipelines contained within that Pack.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Optionally, add a simple description of this Function's purpose. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`. (Note that this will not prevent data from flowing to the Function's defined **Processor**.)

Processor: Use this drop-down to select a configured Pipeline or Pack through which to forward events.

Example

This shows a simple preview of a `pipeline-1` Pipeline, which chains to a `pipeinpipe` Pipeline. Notice that each event's added `cribl_pipe` field lists all Pipelines/Packs through which the event was chained.

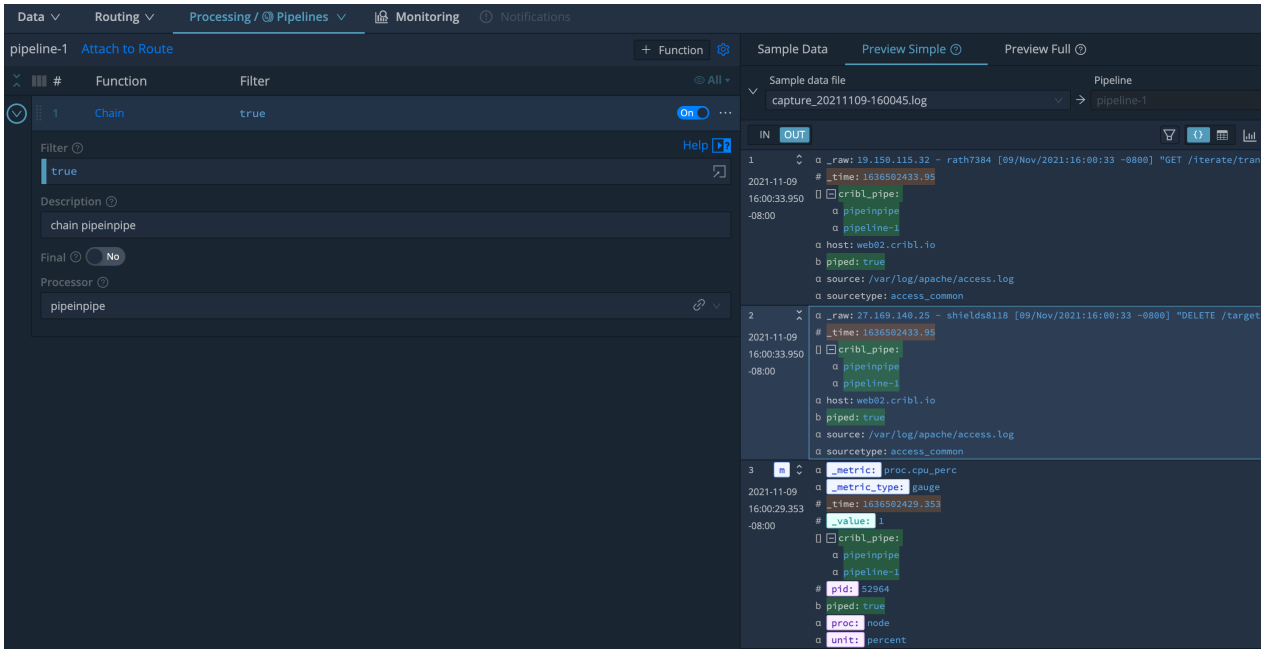

cribl_pipe field shows whole processing path

9.5. Clone

The Clone Function clones events, with optional added fields. Cloned events will be sent to the same Destination as the original event, because they are in the same Pipeline. If your Destination is an Output Router, you can use filters to send cloned events to different Destinations.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Clones: Create clones with the specified fields added and set.

Fields: Set of key-value pairs to add. Nested addressing is supported.

Examples

Staging Example

In this example, the Destination will receive a clone with an `env` field set to `staging`.

Field: `env` **Value**: `staging`

Index Example

In this scenario, we insert a Clone Function at the beginning of a Pipeline to create cloned events. We can later use these events as a baseline to compare against the original events, after various Functions have processed them.

You can assign any meaningful fields to the cloned events – anything that will help you identify them when comparing. This example simply assigns a key-value pair of `index: clones`.

Field: `index` **Value**: `clones`

To keep the cloned events from being processed by Functions later in the same Pipeline, you'll need to specify `index!='clones'` in their **Filter** expressions.

9.6. Code

If you need to operate on data in a way that can't be accomplished with Cribl Stream's out-of-the-box Functions, the Code Function enables you to encapsulate your own JavaScript code. This Function is available in Cribl Stream 3.1+, and imposes some restrictions for security reasons.

Restrictions

Generally speaking, anything forbidden in JavaScript strict mode is forbidden in the context of the Code Function. Specifically, the following are **not allowed**:

- `console`, `eval`, `uneval`, `Function (constructor)`, `Promises`, `setTimeout`, `setInterval`, `global`, `globalThis`, and `window`.

Code Functions **can** include `for` loops, `while` loops, and JavaScript methods such as `map`, `reduce`, `forEach`, `some`, and `every`. For further details, see Supported JavaScript Options.

Cribl Stream's predefined Functions, such as Eval, cover the vast majority of scenarios that users typically need to implement. You should use Code Functions only as a last resort, when you need to construct a complex block of code.

Also, only skilled JavaScript developers should define Code Functions. This is to avoid unintended results – such as creating infinite loops, or otherwise failing to return – that could needlessly add to your throughput burden.

Usage

When added to a Pipeline, the Code Function offers the following configuration options:

Filter: JavaScript filter expression that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Optionally, add a simple description of this Function.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Code: The mini-editor where you type your JavaScript code.

Advanced Settings

Maximum number of iterations: The maximum number of iterations per instance of this Code Function. Defaults to `5,000`; highest allowed value is `10000`.

Error log sample rate: Specifies the rate at which this Code Function logs errors. For example, a value of `1` logs every error; a value of `10` logs every tenth error. The highest allowed value is `5000`. Defaults to `1`.

Use unique log channel: When enabled, Cribl Stream sends logs from this function to a unique channel in the form `func:code:${pipelineName}:${functionIndex}`. Toggle off to use the generic `func:code` log channel instead.

Notes and Examples

Functions (including the Code Function) always use the special variable `__e` to access the `(context)` event inside JavaScript expressions.

Possibly the simplest Code Function creates a new field and then assigns it a value:

```
__e['foo'] = 'Hello, Goats!'
```

For more ambitious implementations, see Code Function Examples.

JavaScript Support

Cribl Stream supports the ECMAScript® 2015 Language Specification.

With some exceptions, the Code Function supports the options described in the following MDN JavaScript Guide topics:

- Expressions and Operators
- Global variables
- Control flow and error handling
- Loops and iteration
- Functions
- Numbers and dates
- Text formatting
- Regular Expressions

- Indexed collections
- Keyed collections
- Working with Objects

9.7. Comment

The Comment Function adds a text comment in a Pipeline. It makes no changes to event data. The added comment is visible only within the Pipeline UI, where it is useful for labeling Pipeline steps.

Usage

Comment: Add your comment as plain text in this field.

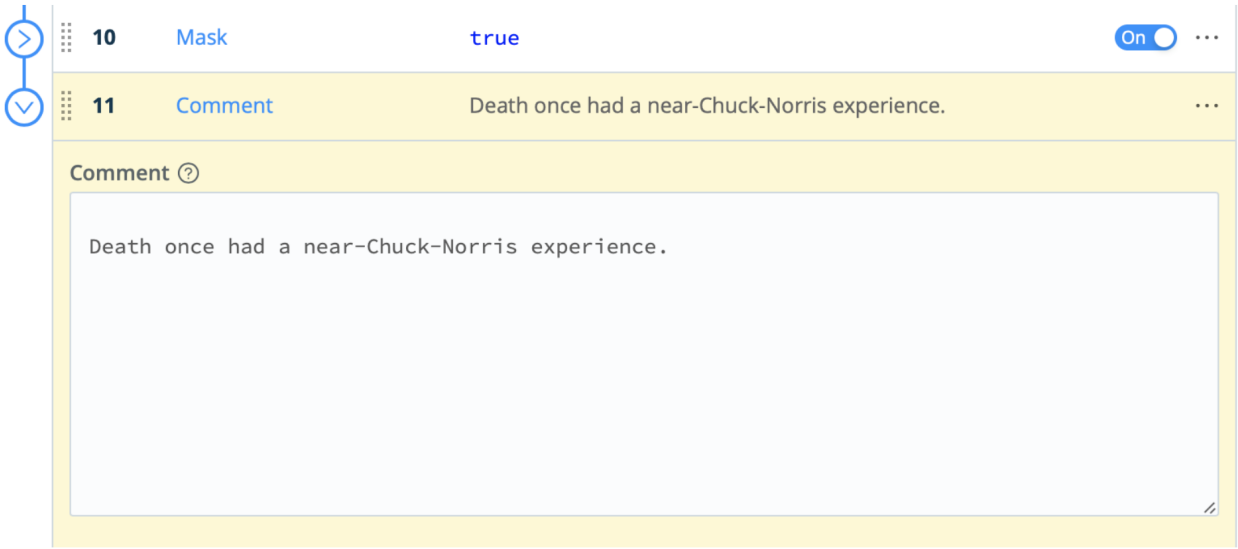

Examples

This comment labels the Pipeline's next function:

15
Eval
true
On
Filter
true
Description
Enter a description
Final
No
Evaluate Fields
Name
Value Expression
compromised
(C.Lookup('compromised-ips.csv').match(src_ip) || C.…
Add Field

9.8. DNS Lookup

The DNS Lookup Function offers two operations useful in enriching security and other data:

- DNS lookups based on host name as text, resolving to A record (IP address) or to other record types.
- Reverse DNS Lookup. (This duplicates the behavior of Cribl Stream's prior Reverse DNS Function, which was deprecated as of v.2.4, and has been removed as of v.4.0.)

To reduce DNS lookups and minimize latency, the DNS Lookup Function incorporates a configurable DNS cache (including resolved and unresolved lookups). If you need additional caching, consider enabling OS-level DNS caching on each Cribl Stream Worker that will execute this Function. (OS-level caching options include DNSMasq, nscd, systemd-resolved, etc.)

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

DNS Lookup Fields Section

Lookup field name: Name of the field containing the domain to look up.

Resource record type: DNS record type (RR) to return. Defaults to `A'` record.

Output field name: Lookup result(s) will be added to this field. Leave blank to overwrite the original field specified in **Lookup field name**.

Reverse DNS Lookup Field(s) Section

Lookup field name: Name of the field containing the IP address to look up.

> If the field value is not in IPv4 or IPv6 format, the lookup is skipped.

Output field name: Name of the field in which to add the resolved hostname. Leave blank to overwrite the original field specified in **Lookup field name**.

Fallback Resolving Methods

This section contains settings for resolving DNS short names.

Use /etc/resolv.conf: Toggle to `Yes` if you want Cribl Stream to resolve DNS short names using the search or domain directive from `/etc/resolv.conf`. Defaults to `No`. Not applicable for Windows hosts.

Use search or domain fallback(s): Add fallback value(s) for the DNS resolver to use when it cannot resolve a DNS short name.

Fall back to DNS.lookup(): Toggle to `Yes` if you want Cribl Stream to make a `DNS.lookup()` call to resolve a DNS short name it can't resolve by other methods.

If you enable all of these methods at once. Cribl Stream will attempt to resolve short names by trying each method in the following order:

1. **Use /etc/resolv.conf**.
2. **Use search or domain fallback(s)**.
3. **Fall back to DNS.lookup()**.

If Cribl Stream can't resolve the short name after trying all of these methods, it will drop the output field from the event.

> **Potential Performance Impact**
>
> Making a `DNS.lookup()` call might degrade performance in unrelated areas of Cribl Stream. Use this method only if you have not been able to resolve DNS short names using other settings.

Advanced Settings

DNS server(s) overrides: IP address(es), in RFC 5952 format, of the DNS server(s) to use for resolution. IPv4 examples: `1.1.1.1`, `4.2.2.2:53`. IPv6 examples: `[2001:4860:4860::8888]`, `[2001:4860:4860::8888]:1053`. If this field is not specified, Cribl Stream will use the system's DNS server.

Cache time to live (minutes): Determines the interval on which the DNS cache will expire, and its contents will be refetched. Defaults to `30` minutes. Use `0` to disable cache expiration/refresh behavior.

Maximum cache size: Maximum number of DNS resolutions to cache locally. Before changing the default `5000`, contact Cribl Support to understand the implications. Highest allowed value is `10000`.

Example

This example Pipeline chains two Functions. First, we have an **Eval** Function that defines key-value pairs for two alphabetical domain names and two numeric IP addresses.

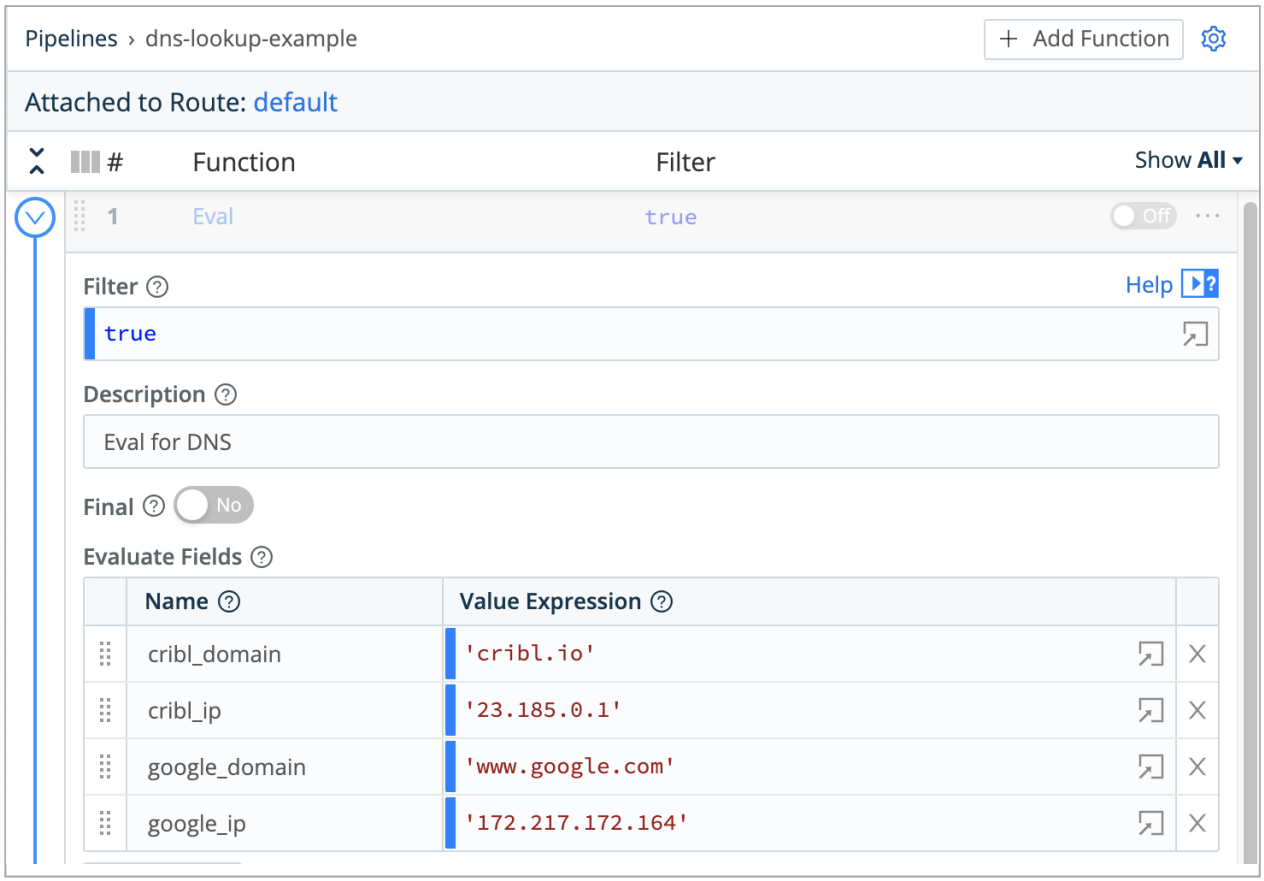

DNS Lookup: Eval Function

Next, the DNS Lookup Function looks up several record types for the two domain names, placing each retrieved record type in its own output field.

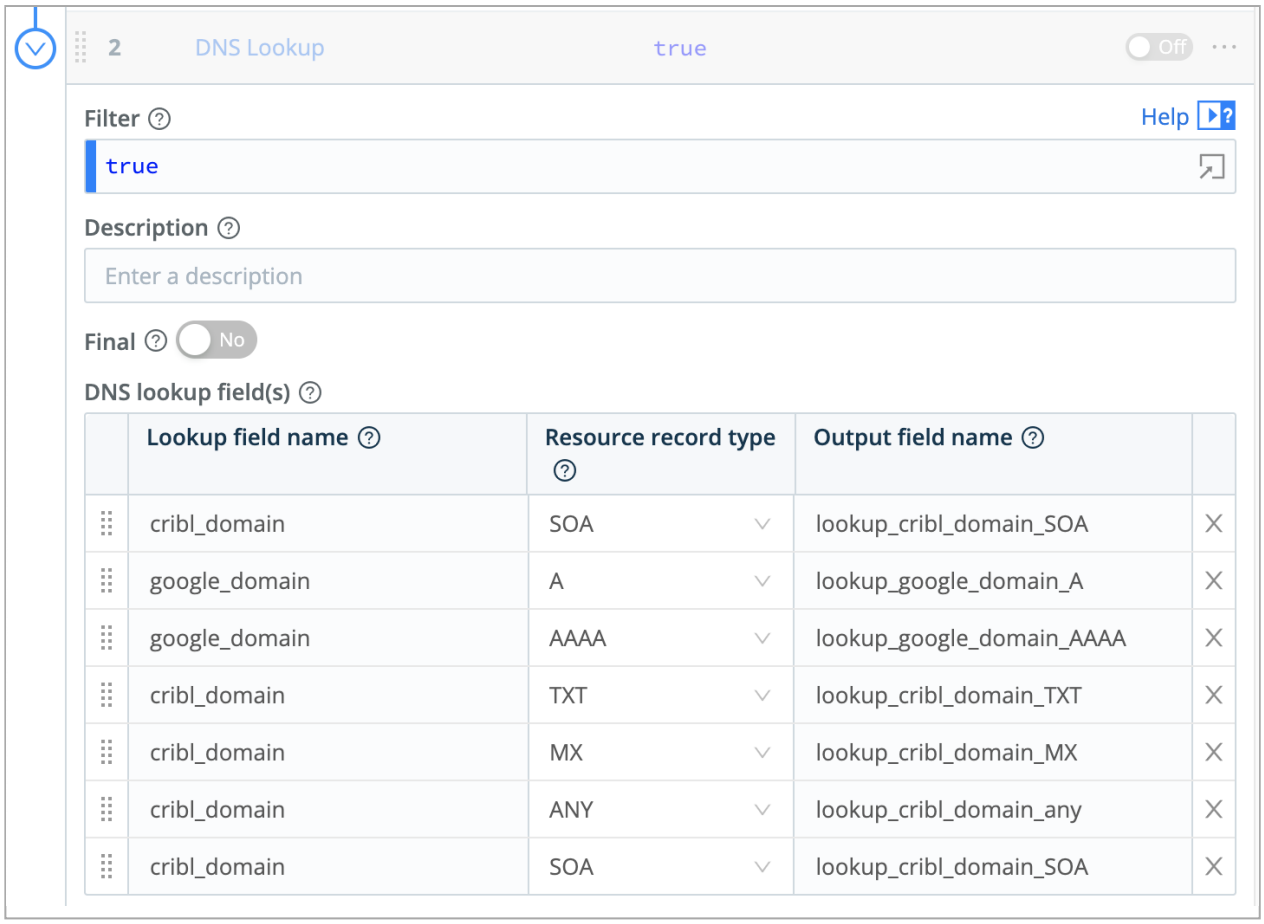

DNS Lookup: multiple record types

Finally, the same Function's **Reverse DNS lookup** section retrieves domain names for the two IP addresses.

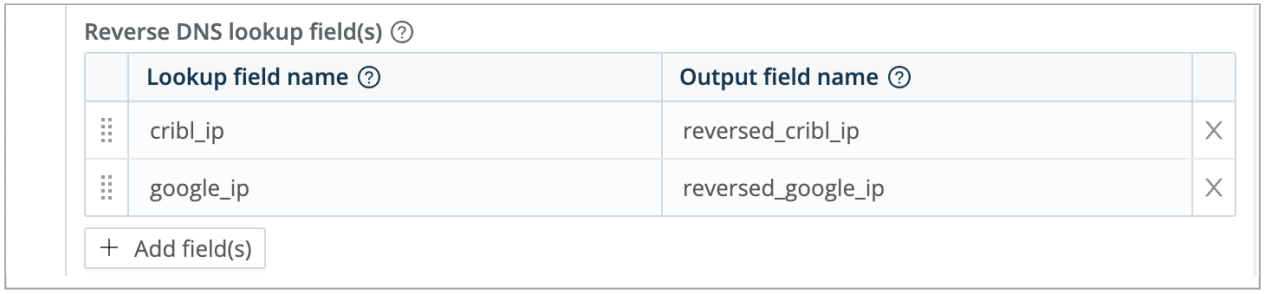

DNS Lookup: reverse lookups

Working with Multi-value Results

DNS records can contain single values mixed together with multi-value results. While this can be challenging to work with, the right code can adjust your results to the desired values.

In the screenshot below, the DNS lookup for `google.com` (event 1) returns a single record, while the `cribl.cloud` lookup (event 2) returns four addresses.

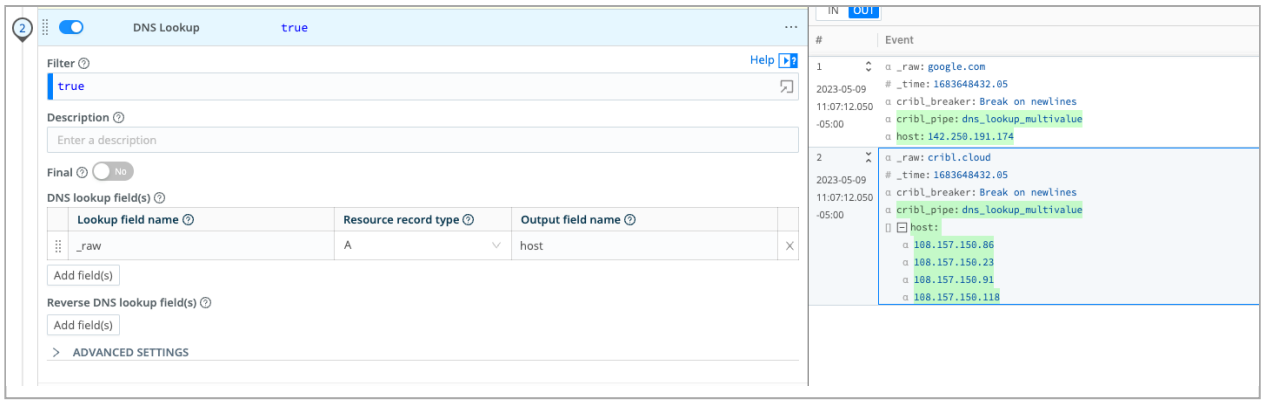

DNS lookup with multi-value result

Sometimes a receiver is unable to consume the data in an array format. One solution to this problem is to pick the first result and convert it into a string. Here's a JavaScript eval to do this:

```
Array.isArray(host) ? host[0] : host;
```

This function checks whether the value of the `host` field is an array.

- If true, the result is the left side of the ternary expression – in this case, `host[0]`, which is the first element in the array, converted into a string. See event 2 in the screenshot below.
- If false, the result is the single-value string in the `host` field. See event 1.

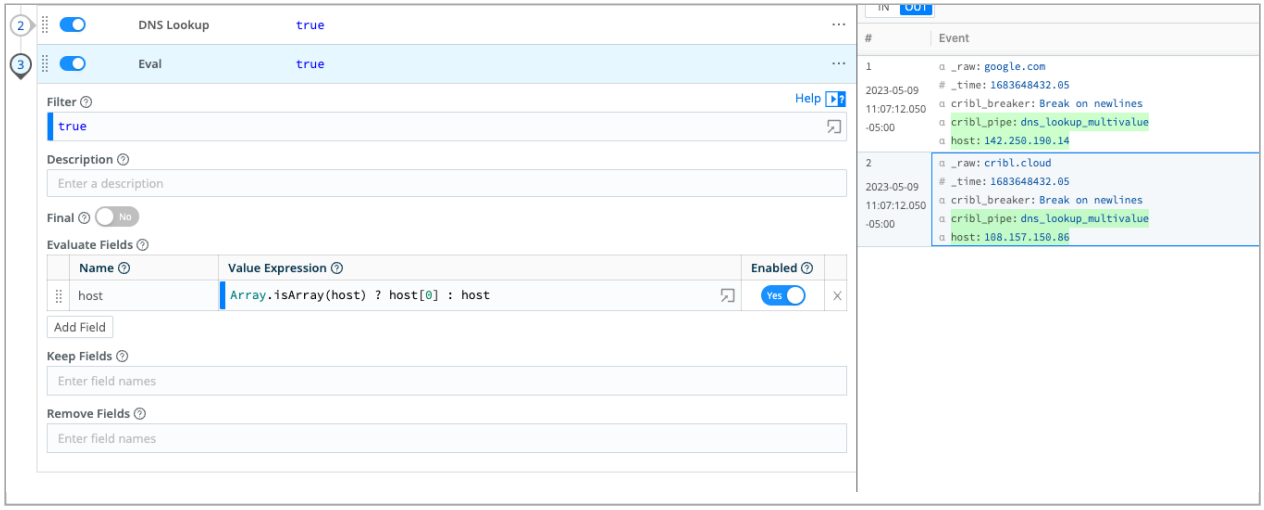

DNS lookup multi-value result converted into a single value

Another option is to **randomly** pick an address from the result. To do this, use a modified version of the JavaScript eval:

```
Array.isArray(host) ? host[Math.floor(Math.random() * host.length)] : host
```

Here, instead of picking the first element, the code uses `Math.floor(Math.random() * host.length)` to randomly pick an element from the array.

9.9. Drop

The Drop Function drops (deletes) any events that meet its Filter expression. This is useful when you want to prevent certain events from continuing to a Pipeline's downstream Functions.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Examples

Scenario A:

Assume that we care only about errors, so we want to filter out any events that contain the word “success,” regardless of case: “success,” “SUCCESS,” etc.

In our Drop Function, we’ll use the JavaScript `search()` method to search the `_raw` field’s contents for our target pattern. We know that `search()` returns a non-negative integer to indicate the starting position of the first match in the string, or `-1` if no match. So we can evaluate the Function as true when the return value is `>= 0`.

Filter: `_raw.search(/success/i)>=0`

Scenario B:

You can filter out specific JSON events based on their key-value pairs.

The following Filter expression uses a strict inequality operator to check, per event, whether `channel` has a different data type **or** value from `auth`. Matching events will drop, ensuring that only events with `"channel":"auth"` will pass to the next Function.

Filter: `channel !== 'auth'`

9.10. Dynamic Sampling

The Dynamic Sampling Function filters out events based on an expression, a sample mode, and the volume of events. Your sample mode's configuration determines what percentage of incoming events will be passed along to the next step.

> Each Worker Process executes this Function independently on its share of events. For details, see Functions and Shared-Nothing Architecture.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Sample mode: Defines how sample rate will be derived. For formulas and usage details, see Sample Modes below. Supported methods:

- Logarithmic (the default): `log(previousPeriodCount)`.
- Square root: `sqrt(previousPeriodCount)`.

Sample group key: Expression used to derive sample group key. For example: `${domain}:${httpCode}`. Each sample group will have its own derived sampling rate, based on the volume of events. Defaults to `` `${host}` ``.

All events without a host field passing through the Function will be associated with the same group and sampled the same.

Advanced Settings

- **Sample period Sec**: How often (in seconds) sample rates will be adjusted. Defaults to `30`.
- **Minimum events**: Minimum number of events that must be received, in previous sample period, for sampling mode to be applied to current period. If the number of events received for a sample group is

less than this minimum, a sample rate of 1:1 is used. Defaults to `30`.

- **Max sampling rate**. Maximum sampling rate. If the computed sampling rate is above this value, the rate will be limited to this value.

How Does Dynamic Sampling Work

Compared to static sampling, where users must first select a sample rate, Dynamic Sampling allows for **automatically adjusting** sampling rates, based on the volume of incoming events per sample group. This Function allows users to set only the aggressiveness/coarseness of this adjustment. Square Root is more aggressive than Logarithmic mode.

As an event passes through the Function, it's evaluated against the Sample Group Key expression to determine the sample group it will be associated with. For example, given an event with these fields: `...ip=1.2.3.42, port=1234...`, and a Sample Group Key of `` `${ip}:${port}` ``, the event will be associated with the `1.2.3.42:1234` sample group.

> If the Sample Group Key is left at its `` `${host}` `` default, all events without a host will be associated with the same group and sampled the same.

When a sample group is new, it will initially have a sample rate of `1:1` for `Sample Period` seconds (this value defaults to 30 seconds). Once `Sample Period` seconds have elapsed, a sample rate will be derived based on the configured `Sample Mode`, using the sample group's event volume during the **previous** sample period.

For example, assuming a Logarithmic Sample Mode:

Period 0 (first 30s): Number of events in sample group: `1000`, Sample Rate: `1:1`, Events allowed: `ALL`
Sample Rate calculation for **next** period: `Math.ceil(Math.log(1000)) = 7`

Period 1 (next 30s) -- Number of events in sample group: `4000`, Sample Rate: `7:1`: Events allowed: `572`
Sample Rate calculation for **next** period: `Math.ceil(Math.log(4000)) = 9`

Period 2 (next 30s) -- Number of events in sample group: `12000`, Sample Rate: `9:1`: Events allowed: `1334`
Sample Rate calculation for **next** period: `Math.ceil(Math.log(12000)) = 10`

Period 3 (next 30s) -- Number of events in sample group: `2000`, Sample Rate: `10:1`: Events allowed: `200`
Sample Rate calculation for **next** period: `Math.ceil(Math.log(2000)) = 8`
...

Sample Modes

1. Logarithmic – The sample rate is derived, for each sample group, using a natural log: `Math.ceil(Math.log(lastPeriodVolume))`. This mode is **less aggressive**, and drops fewer events.

2. Square Root – The sample rate is derived, for each sample group, using: `Math.ceil(Math.sqrt(lastPeriodVolume))`. This mode is **more aggressive**, and drops more events.

Example

Here's an example that illustrates the effectiveness of using the Square Root sample mode.

Settings:

Sample Mode: `Square Root` Sample Period (sec): `20` Minimum Events: `3` Max. Sampling Rate: `3`

Results:

Events In: 4.23K Events Out: 1.41K

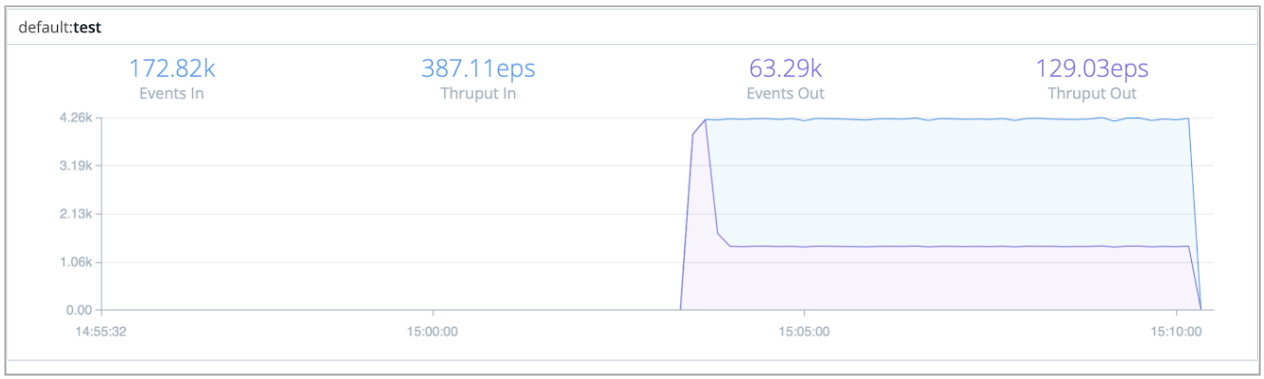

In this generic example, we reduced the incoming event volume from 4.23K to 1.41K. Your own results will vary depending on multiple parameters – the **Sample Group Key**, **Sample Period**, **Minimum Events**, **Max Sampling Rate**, and rate of incoming events.

> For further examples, see Getting Smart and Practical With Dynamic Sampling.

9.11. Eval

The Eval Function adds or removes fields from events. (In Splunk, these are index-time fields.)

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Evaluate fields: Table of event fields to evaluate and add/set. Click **Add Field** to add each field as a key-value pair, in a row with the following controls:

- **Name**: Enter the new (or modified) field's name.
- **Value Expression**: Enter a JavaScript expression to set the field's value – this can be a constant. Expressions can contain nested addressing. When you insert JavaScript template literals, strings intended to be used as values must be delimited with single quotes, double quotes, or backticks. (For details, see Cribl Expression Syntax.)
- **Enabled**: Toggle this off to disable evaluating individual expressions, while retaining their configuration in the table. Useful for iterative development and debugging.

Keep fields: List of fields to keep in the event after processing by this Function. Supports wildcards (*) and nested addressing. Takes precedence over **Remove fields** (below). To reference a parent object and all children, you must use the (*) wildcard. For example, if `_raw` is converted to an object then use `_raw*` to refer to itself and all children.

Remove fields: List of fields to remove from the event. Supports wildcards (*) and nested addressing. Cannot remove fields that match against the **Keep fields** list. Cribl Stream internal fields that start with `__` (double underscore) **cannot** be removed via wildcard. Instead, you must specify them individually. For example, `__myField` cannot be removed by specifying `__myF*`.

Using Keep and Remove

A field matching an entry in *both* **Keep** (wildcard or not) and **Remove** will *not* be removed. This is useful for implementing “remove all but” functionality. For example, to keep only `_time, _raw, source,`

`sourcetype, host`, we can specify them all in **Keep**, while specifying `*` in **Remove**.

Negated terms are supported in both **Keep fields** and **Remove fields**. The list is order-sensitive when negated terms are used. Examples:

- `!foobar, foo*` means "All fields that start with 'foo' except `foobar`."
- `!foo*, *` means "All fields except for those that start with 'foo'."

Examples

Note that Functions use the special variable `__e` to access the `(context)` event inside JavaScript expressions.

Scenario A: Create field `myField` with static value of `value1`:

- **Name:** `myField`
- **Value Expression:** `'value1'`

Scenario B: Set field `action` to `blocked` if `login==error`:

- **Name:** `action`
- **Value Expression:** `login=='fail' ? 'blocked' : action`

Scenario C: Create a multivalued field called `myTags`. (i.e., array):

- **Name:** `myTags`
- **Value Expression:** `['failed', 'blocked']`

Scenario D: Add value `error` to the multivalued field `myTags`:

- **Name:** `myTags`
- **Value Expression:** `login=='error' ? [...myTags, 'error'] : myTags`

(The above expression is literal, and uses JavaScript spread syntax.)

Scenario E: Rename an `identification` field to the shorter `ID` – copying over the original field's value, and removing the old field:

- **Name**: `ID`
- **Value Expression**: `identification`
- **Remove Field**: `identification`

> See Ingest-time Fields for more examples.

Usage Notes

Consider the following when working with Eval Functions.

Create Parent Objects First

Before you can use the Eval function on a new child object, you must create the parent object – then define the children using Eval Functions.

Example:

```
parent  =  (parent || { child1: child1Value })
parent.child2 = child2Value
parent.child3 = child3Value
<some other Evals, if you need them>
```

To Append:

```
parent =  Object.assign(parent, { child2: child2Value })
```

To Create a New Field:

```
parent2 =  Object.assign(parent, { child2: child2Value, child3: child3Value })
```

Execution Without Assignment

The Eval Function can execute expressions **without** assigning their value to the field of an event. You can do this by simply leaving the left-hand side input empty, and having the right-hand side do the assignment.

Example: Parse and Merge to Existing Field

`Object.assign(foo, JSON.parse(bar), JSON.parse(baz))` on the right-hand side (and left-hand side empty) will JSON-parse the strings in `bar` and `baz`, merge them, and assign their value to `foo`, an already existing field.

Example: Reference Event with `__e`

To parse JSON, enter `Object.assign(__e, JSON.parse(_raw))` on the right-hand side (and left-hand side empty). `__e` is a special variable that refers to the `(context)` event **within** a JS expression. In this case, content parsed from `_raw` is added at the top level of the event.

9.12. Event Breaker

This Function enables you to split large blobs or streams of events into discrete events within a Pipeline. This is useful for Sources like Azure Event Hubs, which do not natively support Event Breakers.

Even with Sources that do support Event Breakers (like Raw HTTP), it sometimes makes sense to use both a Source-configured Event Breaker on the incoming stream, and an Event Breaker Function within a Pipeline.

Limitations

> The Event Breaker Function operates only on data in `_raw`. For other events, move the array to `_raw` and stringify it before applying this Function.
>
> The largest event that this Function can break is about about 128 MB (`134217728` bytes). Events exceeding this maximum size will be split into separate events, but left unbroken. Cribl Stream will set these events' `__isBroken` internal field to `false`.
>
> Unlike regular Event Breakers, Event Breaker Functions do not have names, only descriptions.

Usage

Use the following options to define this Event Breaker Function.

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Existing or New?: Whether to use an existing ruleset or create a new one. Defaults to `Use Existing`.

- When **Existing or New?** is set to `Use Existing`, the **Existing Ruleset?** drop-down appears and you choose a ruleset from there.
- When **Existing or New?** is set to `Create New`, the ruleset creation UI appears and you configure its settings.

Advanced Settings

Add to cribl_breaker: Whether to add the `cribl_breaker` field to output events. Defaults to `Yes`.

How this field behaves depends on whether you are **also** using a regular Event Breaker with your Source. That matters because a regular Event Breaker **always** adds the `cribl_breaker` field to events, which it does **before** the data reaches your Event Breaker Function.

When you are **not** using a regular Event Breaker, there is no `cribl_breaker` field yet when the data reaches your Event Breaker Function. At this point, `cribl_breaker` is added, and:

- When **Existing or New?** is set to `Use Existing`, `cribl_breaker`'s value is set to the name of the existing ruleset you chose.
- When **Existing or New?** is set to `Create New`, the `cribl_breaker`'s value is set to `"event_breaker_func"`. Since Event Breaker Functions do not have names, the string `event_breaker_func` serves as a kind of generic name that represents whatever new Event Breaker Function you created.

When you **are** also using a regular Event Breaker, the `cribl_breaker` field already exists when the data reaches your Event Breaker Function. At this point, the value of `cribl_breaker` is changed from a string to an array, with the first item in the array being the value originally set by the regular Event Breaker, and the second item determined as follows:

- When **Existing or New?** is set to `Use Existing`, the second item's value is set to the name of the existing ruleset you chose.
- When **Existing or New?** is set to `Create New`, the second item's value is set to `"event_breaker_func"`. Since Event Breaker Functions do not have names, the string `event_breaker_func` serves as a kind of generic name that represents whatever new Event Breaker Function you create.

> Cribl Stream truncates timestamps to three-digit (milliseconds) resolution, omitting trailing zeros.
>
> In Cribl Stream 3.4.2 and above, where an Event Breaker Function has set an event's `_time` to the current time – rather than extracting the value from the event itself – it will mark this by adding the internal field `__timestampExtracted: false` to the event.

Examples

Handling syslog data and nested JSON data are two primary use cases for Event Breaker Functions.

Event Breaker Functions for syslog Data

Event Breaker Functions can help you deal with syslog data that does not break correctly. Examples include multi-line syslog data, and, the kinds of non-standard syslog data emitted by Blue Coat proxy appliances, Layer7 API Gateways, and other appliances. See the Cribl video Scaling syslog for an in-depth discussion.

(In this context, "non-standard" means syslog data that only partly conforms to the standard Syslog Protocol defined in RFC 5424, or its predecessor, the BSD syslog Protocol defined in RFC 3164.)

Event Breaker Functions for Nested JSON Data

Kafka-based data from Confluent, Azure Event Hubs, Google Pub Sub, or Kafka itself, is nicely structured as events according to the Kafka protocol. But when these events contain JSON objects which you want to break into their constituent objects, you can use an Event Breaker Function to do that.

Troubleshooting

If you notice fragmented events, check whether Cribl Stream has added a `__timeoutFlush` internal field to them. This diagnostic field's presence indicates that the events were flushed because the Event Breaker buffer timed out while processing them. These timeouts can be due to large incoming events, backpressure, or other causes.

9.13. Flatten

The Flatten Function flattens fields out of a nested structure. It pulls up nested key-value pairs (fields) to a higher level in the object. You can specify:

- Individual fields to flatten.
- The depth at which to flatten fields.
- The delimiter to use when concatenating keys.
- An optional prefix to add to transformed field names.

> The Flatten Function creates fully qualified names for promoted fields. If you simply need to promote fields without transforming their names, use the `eval` Function.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Fields: List of top-level fields to include for flattening. Defaults to an empty array, which means all fields. Limit to specific fields by typing in their names, separated by hard returns. Supports wildcards (`*`). Supports double-underscore (`__`) internal fields only if individually enumerated – not via wildcards.

Prefix: Prefix string for flattened field names. Defaults to empty.

Depth: Number representing the nested levels to consider for flattening. Minimum `1`. Defaults to `5`.

Delimiter: Delimiter to use for flattening. Defaults to `_` (underscore).

Example

Add the following test sample in **Preview** > **Paste a Sample**:

input

```
{
    "accounting": [{
        "firstName": "John",
        "lastName": "Doe",
        "age": 23
    }, {
        "firstName": "Mary",
        "lastName": "Smith",
        "age": 32
    }],
    "sales": [{
        "firstName": "Sally",
        "lastName": "Green",
        "age": 27
    }, {
        "firstName": "Jim",
        "lastName": "Galley",
        "age": 41
    }]
}
```

Under **Select Event Breaker**, choose **ndjson** (newline-delimited JSON), and click **Save as a Sample File**.

Here's sample output with all settings at default:

output

```
{
  "accounting_0_firstName": "John",
  "accounting_0_lastName": "Doe",
  "accounting_0_age": 23,
  "accounting_1_firstName": "Mary",
  "accounting_1_lastName": "Smith",
  "accounting_1_age": 32,
  "sales_0_firstName": "Sally",
  "sales_0_lastName": "Green",
  "sales_0_age": 27,
  "sales_1_firstName": "Jim",
  "sales_1_lastName": "Galley",
  "sales_1_age": 41,
}
```

Using the Flatten Function's default settings, we successfully create top-level fields from the nested JSON structure, as expected.

9.14. GeoIP

The GeoIP Function enriches events with geographic fields, given an IP address. It works with MaxMind's GeoIP binary database.

Prerequisite

You need to host the `.mmdb` database file from MaxMind. The following steps cover this process at a high level. They link to our Managing Large Lookups topic, where you can find additional details.

1. Download and extract the `.mmdb` database file.
2. Determine where to place the database file. We recommend the `$CRIBL_HOME/state/` subdirectory, which is already listed in the default `.gitignore` file that ships with Cribl Stream.

   You always have the option to upload the file to Cribl Stream's Lookups Library. In a Cribl Cloud deployment, this is currently the only option. For details, see Reducing Deploy Traffic.
3. Place the database file on your Worker Node(s). In a distributed deployment, we recommend having the file on the Leader and all Worker Nodes. Smaller deployments can get away with hosting the file only on the Leader Node.
4. Optionally, set up automatic updates of the database file.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

GeoIP file (.mmdb): Path to a MaxMind database, in binary format, with `.mmdb` extension.

> If the database file is located within the lookup directory (`$CRIBL_HOME/data/lookups/`), the **GeoIP file** does not need to be an absolute path.

> In distributed deployments, ensure that the MaxMind database file is in the same location on the Leader Node and all Worker Nodes. However, if you've uploaded `.mmdb` files via Cribl Stream's Lookups Library UI, just click this combo box to display and select them on a drop-down list. Your selection here will handle the path management automatically.

IP field: Field name in which to find an IP to look up. Can be nested. Defaults to `ip`.

Result field : Field name in which to store the GeoIP lookup results. Defaults to `geoip`.

Examples

Assume that you are receiving SMTP logs, and need to see geolocation information associated with IPs using the SMTP service.

Here's a sample of our data, from IPSwitch IMail Server logs:

```
03:19 03:22 SMTPD(00180250) [192.168.1.131] connect 74.136.132.88 port 2539 03:19 03:22
SMTPD(00180250) [74.136.132.88] EHLO msnbc.com 03:19 03:22 SMTPD(00180250)
[74.136.132.88] MAIL FROM:<info-jjgcdshx@test.us> 03:19 03:22 SMTPD(00180250)
[74.136.132.88] RCPT To:<user@domain.com>
```

In this example, we'll chain together three Functions. First, we'll use a Regex Extract Function to isolate the host's IP. Next, we'll use the GeoIP Function to look up the extracted IP against our geoIP database, placing the returned info into a new `__geoip` field. Finally we'll use an Eval Function to parse that field's city, state, country, ZIP, latitude, and longitude.

Function 1 – Regex Extract

Regex: `\[(?<ip>\S+)\]` Source field: `_raw` Result: `74.136.132.88`

Function 2 – GeoIP

Event's IP field: `ip` Result field: `__geoip`

Function 3 – Eval

NAME	VALUE EXPRESSION
City	`__geoip.city.names.en`

NAME	VALUE EXPRESSION
Country	`__geoip.country.names.en`
Zip	`__geoip.postal.code`
Lat	`__geoip.location.latitude`
Long	`__geoip.location.longitude`

In the Eval Function's **Remove fields** setting, you could specify the `__geoip` field for removal, if desired. However, its `__` prefix makes it an internal field anyway.

> For a hosted tutorial on applying the GeoIP Function, see Cribl's GeoIP and Threat Feed Enrichment Sandbox.

9.15. Grok

The Grok Function extracts structured fields from unstructured log data, using modular regex patterns.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Optional description of this Function's purpose in this Pipeline. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Pattern: Grok pattern to extract fields. Cick the Expand button at right to open a preview/valdiation modal. Syntax supported: `%{PATTERN_NAME:FIELD_NAME}`.

Click **Add pattern** to chain more patterns.

Source field: Field on which to perform Grok extractions. Defaults to `_raw`.

Management

You can add and edit Grok patterns via Cribl Stream's UI by selecting **Knowledge > Grok Patterns**.
Pattern files are located at: `$CRIBL_HOME/(default|local)/cribl/grok-patterns/`

Example

Example event:

```
{"_raw": "2020-09-16T04:20:42.45+01:00 DEBUG This is a sample debug log message"}`
```

Pattern: `%{TIMESTAMP_ISO8601:event_time} %{LOGLEVEL:log_level} %{GREEDYDATA:log_message}`
Source Field: `_raw`

Event after extraction:

```
{"_raw": "2020-09-16T04:20:42.45+01:00 DEBUG This is a sample debug log message",
  "_time": 1600226442.045,
  "event_time": "2020-09-16T04:20:42.45+01:00",
  "log_level": "DEBUG",
  "log_message": "This is a sample debug log message",
}
```

Note the new fields added to the event: `event_time`, `log_level`, and `log_message`.

References

- Syntax for a Grok pattern is `%{PATTERN_NAME:FIELD_NAME}`. E.g.: `%{IP:client} %{WORD:method}`.
- Useful links for creating and testing Grok patterns: http://grokdebug.herokuapp.com and http://grokconstructor.appspot.com/.
- Additional patterns are available here: https://github.com/logstash-plugins/logstash-patterns-core/tree/master/patterns.

9.16. JSON Unroll

The JSON Unroll Function accepts a JSON object string `_raw` field, unrolls/explodes an **array** of **objects** therein into individual events, while also inheriting top level fields. See example(s). Cribl highly recommends not using this JSON Unroll function for certain types of data. Instead, perform the unrolling using an event breaker for those inputs which support configuring an event breaker. Specifying the event breaker type **JSON Array** and toggling the **JSON Extract Fields** option to **Yes** will accomplish the same unrolling but much more efficiently. This is recommended, for example, for CloudTrail and Office635 events, which are collected as JSON arrays.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Path: Path to array to unroll, e.g., `foo.0.bar`.

New name: The name that the exploded array element will receive in each new event. Leave empty to expand the array element with its original name.

Example(s)

Assume you have an incoming event that has a `_raw` field as a JSON object string like this:

Sample _raw field

```
{"date":"9/25/18 9:10:13.000 PM",
   "name":"Amrit",
   "age":42,
   "allCars": [
       { "name":"Ford", "models":[ "Fiesta", "Focus", "Mustang" ] },
       { "name":"GM", "models":[ "Trans AM", "Oldsmobile", "Cadillac" ] },
       { "name":"Fiat", "models":[ "500", "Panda" ] },
       { "name":"Blackberry", "models":[ "KEY2", "Bold Touch 9900" ] }
   ]
}
```

Settings:

Path: `allCars` **New Name**: `cars`

Output Events:

Resulting Events


```
Event 1:
{"_raw":"{"date":"9/25/18 9:10:13.000 PM","name":"Amrit","age":42,"cars":
{"name":"Ford","models":["Fiesta","Focus","Mustang"]}}"}

Event 2:
{"_raw":"{"date":"9/25/18 9:10:13.000 PM","name":"Amrit","age":42,"cars":
{"name":"GM","models":["Trans AM","Oldsmobile","Cadillac"]}}"}

Event 3:
{"_raw":"{"date":"9/25/18 9:10:13.000 PM","name":"Amrit","age":42,"cars":
{"name":"Fiat","models":["500","Panda"]}}"}

Event 4:
{"_raw":"{"date":"9/25/18 9:10:13.000 PM","name":"Amrit","age":42,"cars":
{"name":"Blackberry","models":["KEY2","Bold Touch 9900"]}}"}
```


Each element under the original **allCars** array is now placed in a **cars** field in its own event, inheriting original top level fields; **date**, **name** and **age**

9.17. Lookup

The Lookup Function enriches events with external fields, using lookup table files in CSV, compressed `.csv.gz`, or binary `.mmdb` format.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Lookup file path (.csv, .csv.gz): Path to the lookup file. Select an existing file that you've uploaded via Cribl Stream's UI at Knowledge > Lookups Library, or specify the path. You can reference environment variables via `$`, e.g.: `$CRIBL_HOME/file.csv`.

> When you configure this field via a distributed deployment's Leader Node, Cribl Stream will swap `$CRIBL_HOME/groups/<groupname>/` for `$CRIBL_HOME` when validating whether the file exists. In this case, the default upload path changes from `$CRIBL_HOME/data/lookups` (single-instance deployments) to `$CRIBL_HOME/groups/<groupname>/data/lookups/` (distributed deployments).

Match mode: Defines the format of the lookup file, and indicates the matching logic that will be performed. Defaults to `Exact`.

Match type: For CIDR and Regex **Match mode**s, this attribute refines how to resolve multiple matches. `First match` will return the first matching entry. `Most specific` will scan all entries, finding the most specific match. `All` will return all matches in the output, as arrays. (Defaults to `First match`. Not displayed for Exact **Match mode**.)

Lookup fields (.csv): Field(s) that should be used to key into the lookup table.

- **Lookup field name in event**: Exact field name as it appears in events. Nested addressing supported.
- **Corresponding field name in lookup**: The field name as it appears in the lookup file. Defaults to the **Lookup field name in event** value. This input is optional.

> **Case-Sensitive / Multiple Matches**

> Lookups are case-sensitive by default. (See the **Ignore case** option below.)
>
> If the lookup file contains duplicate key names with different values, all **Match mode**s of this Function will use **only** the value in the key's **final** instance, ignoring all preceding instances.

Output field(s): Field(s) to add to events after matching the lookup table. Defaults to **all** if not specified.

- **Output field name from lookup**: Field name, as it appears in the lookup file.
- **Lookup field name in event**: Field name to add to event. Defaults to the lookup field name. This input is optional. Nested addressing is supported.

Advanced Settings

Reload period (sec): To periodically check the underlying file for mod-time changes, and reload the file if necessary, change the default `-1` value (disabled) to a positive integer representing the check interval in seconds.

> In distributed deployments, enabling a **Reload period** can generate conflicts with configuration updates, causing Pipelines to skip executing some Lookup Functions. Cribl recommends that you enable it only for lookup files not managed by Cribl Stream's UI, or lookup files that can be updated by an external process. (E.g., a threat list that you update via a cron job.)
>
> For lookup files that **are** managed by Cribl Stream's UI, a distributed Cribl Stream deployment will override this setting as necessary – skipping checks to prevent conflicts that could trigger skipped lookups. These restrictions do **not** apply to single-instance deployments.

Ignore case: Ignore case when performing **Match mode: Exact** lookups. Defaults to `No`.

Add to raw event: Whether to append the looked-up values to the `_raw` field, as key=value pairs. Defaults to `No`.

Examples

Example 1: Regex Lookups

Assign a `sourcetype` field to events if their `_raw` field matches a particular regex.

```
regex,sourcetype
"^[^,]+,[^,]+,[^,]+,THREAT",pan:threat
"^[^,]+,[^,]+,[^,]+,TRAFFIC",pan:traffic
"^[^,]+,[^,]+,[^,]+,SYSTEM",pan:system
```

Match mode: Regex

Match type: First match

> When using the Lookup Function with Regex and `First match`, ensure that your lookup file contains no empty lines - not even at the bottom. Any empty row will cause the function to always return `true`.

Lookup field name in event: `_raw`

Corresponding field name in lookup: `regex`

```
### BEFORE:

{"_raw": "Sep 20 13:03:55 PA-VM 1,2018/09/20 13:03:58,FOOBAR,TRAFFIC,end,2049,2018/09/2
13:03:58,34.217.108.226,10.0.0.102,34.217.108.226,10.0.2.65,splunk,,,incomplete,vsys1,u
forwarding-default,2018/09/20 13:03:58,574326,1,53722,8088,53722,8088,0x400064,tcp,allo
13:03:45,7,any,0,730277,0x0,United States,10.0.0.0-10.255.255.255,0,4,0,aged-out,0,0,0,
{"_raw": "Sep 20 13:03:55 PA-VM 1,2018/09/20 13:03:58,FOOBAR,THREAT,end,2049,2018/09/20
13:03:58,34.217.108.226,10.0.0.102,34.217.108.226,10.0.2.65,splunk,,,incomplete,vsys1,u
forwarding-default,2018/09/20 13:03:58,574326,1,53722,8088,53722,8088,0x400064,tcp,allo
13:03:45,7,any,0,730277,0x0,United States,10.0.0.0-10.255.255.255,0,4,0,aged-out,0,0,0,


### AFTER:

{"_raw": "Sep 20 13:03:55 PA-VM 1,2018/09/20 13:03:58,FOOBAR,TRAFFIC,end,2049,2018/09/2
13:03:58,34.217.108.226,10.0.0.102,34.217.108.226,10.0.2.65,splunk,,,incomplete,vsys1,u
forwarding-default,2018/09/20 13:03:58,574326,1,53722,8088,53722,8088,0x400064,tcp,allo
13:03:45,7,any,0,730277,0x0,United States,10.0.0.0-10.255.255.255,0,4,0,aged-out,0,0,0,
  "sourcetype": "pan:traffic"
  }
{"_raw": "Sep 20 13:03:55 PA-VM 1,2018/09/20 13:03:58,FOOBAR,THREAT,end,2049,2018/09/20
13:03:58,34.217.108.226,10.0.0.102,34.217.108.226,10.0.2.65,splunk,,,incomplete,vsys1,u
forwarding-default,2018/09/20 13:03:58,574326,1,53722,8088,53722,8088,0x400064,tcp,allo
13:03:45,7,any,0,730277,0x0,United States,10.0.0.0-10.255.255.255,0,4,0,aged-out,0,0,0,
  "sourcetype": "pan:threat"
  }
```

Example 2: CIDR Lookups

Assign a `location` field to events if their `destination_ip` field matches a particular CIDR range.

```
range,location
10.0.0.0/24,San Francisco
10.0.0.0/16,California
10.0.0.0/8,US
```

Match mode: CIDR

Match type: See options below

Lookup field name in event: `destination_ip`

Corresponding field name in lookup: `range`

> In **Match mode: CIDR** with **Match type: Most specific**, the lookup will implicitly search for matches from most specific to least specific. There is no need to pre-sort data.
>
> Note that **Match mode: CIDR** with **Match type: First Match** is likely the most performant with large lookups. This can be used as an alternative to **Most specific**, if the file is sorted with the most specific/relevant entries first. This mode still performs a table scan, top to bottom.

```
### BEFORE:

{"_raw": "Sep 20 13:03:55 PA-VM 1, 2018/09/20 13:03:58,FOOBAR,TRAFFIC,end,2049,2018/09/
13:03:58,34.217.108.226,10.0.0.102,34.217.108.226,10.0.2.65,splunk,,,incomplete,vsys1,u
forwarding-default,2018/09/20 13:03:58,574326,1,53722,8088,53722,8088,0x400064,tcp,allo
13:03:45,7,any,0,730277,0x0,United States,10.0.0.0-10.255.255.255,0,4,0,aged-out,0,0,0,
  "destination_ip": "10.0.0.102"
  }

### AFTER with Match Type: First Match

{"_raw": "Sep 20 13:03:55 PA-VM 1, 2018/09/20 13:03:58,FOOBAR,TRAFFIC,end,2049,2018/09/
13:03:58,34.217.108.226,10.0.0.102,34.217.108.226,10.0.2.65,splunk,,,incomplete,vsys1,u
forwarding-default,2018/09/20 13:03:58,574326,1,53722,8088,53722,8088,0x400064,tcp,allo
13:03:45,7,any,0,730277,0x0,United States,10.0.0.0-10.255.255.255,0,4,0,aged-out,0,0,0,
  "destination_ip": "10.0.0.102",
  "location": "San Francisco"
  }

### AFTER with Match Type: Most Specific

{"_raw": "Sep 20 13:03:55 PA-VM 1, 2018/09/20 13:03:58,FOOBAR,TRAFFIC,end,2049,2018/09/
13:03:58,34.217.108.226,10.0.0.102,34.217.108.226,10.0.2.65,splunk,,,incomplete,vsys1,u
forwarding-default,2018/09/20 13:03:58,574326,1,53722,8088,53722,8088,0x400064,tcp,allo
13:03:45,7,any,0,730277,0x0,United States,10.0.0.0-10.255.255.255,0,4,0,aged-out,0,0,0,
  "destination_ip": "10.0.0.102",
  "location": "San Francisco"
  }

### AFTER with Match Type: All

{"_raw": "Sep 20 13:03:55 PA-VM 1, 2018/09/20 13:03:58,FOOBAR,TRAFFIC,end,2049,2018/09/
13:03:58,34.217.108.226,10.0.0.102,34.217.108.226,10.0.2.65,splunk,,,incomplete,vsys1,u
forwarding-default,2018/09/20 13:03:58,574326,1,53722,8088,53722,8088,0x400064,tcp,allo
13:03:45,7,any,0,730277,0x0,United States,10.0.0.0-10.255.255.255,0,4,0,aged-out,0,0,0,
  "destination_ip": "10.0.0.102",
  "location": [
    "San Francisco",
    "California",
    "US",
  ]}
```

More Examples and Scenarios

More examples:

- Ingest-time Lookups.
- Lookups and Regex Magic.
- Lookups as Filters for Masks.

See also:

- Managing Large Lookups to optimize file locations for large lookup files.
- Redis Function for faster lookups using a Redis integration.

9.18. Mask

The Mask Function masks, or replaces, patterns in events. This is especially useful for redacting PII (personally identifiable information) and other sensitive data.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Optionally, enter a simple description of this Function.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Masking Rules: This table defines pairs of patterns to match and replace. Defaults to empty. Click **Add Rule** to add each rule. Each row of the resulting table provides the following options:

- **Match Regex**: Pattern to replace. Supports capture groups. Use `/g` to replace all matches, e.g.: `/foo(bar)/g`
- **Replace Expression**: A JavaScript expression or literal to replace all matching content. Capture groups can be referenced with `g` and the group number – e.g., `g2` to reference the second capture group.
- **Enabled**: Toggle this off to disable matching individual rules, while retaining their configuration in the table. Useful for iterative development and debugging.

Apply to Fields: Fields on which to apply the masking rules. Defaults to `_raw`. Add more fields by typing in their names, separated by hard returns. Supports wildcards (`*`) and nested addressing. Supports double-underscore (`__`) internal fields only if individually enumerated – not via wildcards.

> Negated terms are supported. When you negate field names, the fields list is order-sensitive. E.g., `!foobar` before `foo*` means "Apply to all fields that start with `foo`, except `foobar`." However, `!foo*` before `*` means "Apply to all fields, except for those that start with `foo`."

Advanced Settings

Evaluate fields: Optionally, specify fields to add to events in which one or more of the **Masking Rules** were matched. These fields can be useful in downstream processing and reporting. You specify the fields as key–value expression pairs, like those in the Eval Function.

- **Name**: Field name.
- **Value Expression**: JavaScript expression to compute the value (can be a constant).

Evaluating the Replace Expression

The **Replace expression** field accepts a full JS expression that evaluates to a value, so you're not necessarily limited to what's under `C.Mask`. For example, you can do conditional replacement: `g1%2==1 ? `fieldA="odd"` : `fieldA="even"``

The **Replace expression** can reference other event fields as `event.<fieldName>`. For example, `` `${g1}${event.source}` ``. Note that this is slightly different from other expression inputs, where event fields are referenced without `event.` Here, we require the `event.` prefix for the following reasons:

- We don't expect this to be a common case.
- Expanding the event in the replace context would have a high performance hit on the common path.
- There is a slight chance that there might be a `gN` field in the event.

> The output of the Mask Function is a string even when the **Replace expression** produces a number.
>
> For example, suppose a **Replace expression** that generates a random integer is applied to a field named `bytes` and produces the number `8403`. Cribl Stream will output an event where the value of the `bytes` field is the **string** `8403`.
>
> If you need to convert the string value back to a number, you could add a Numerify Function to your Pipeline.

Examples

Example 1: Transform a String

Here, we'll simply search for the string `dfhgdfgj`, and replace that value (if found) with `Trans AM`. This will help close America's muscle-car gap:

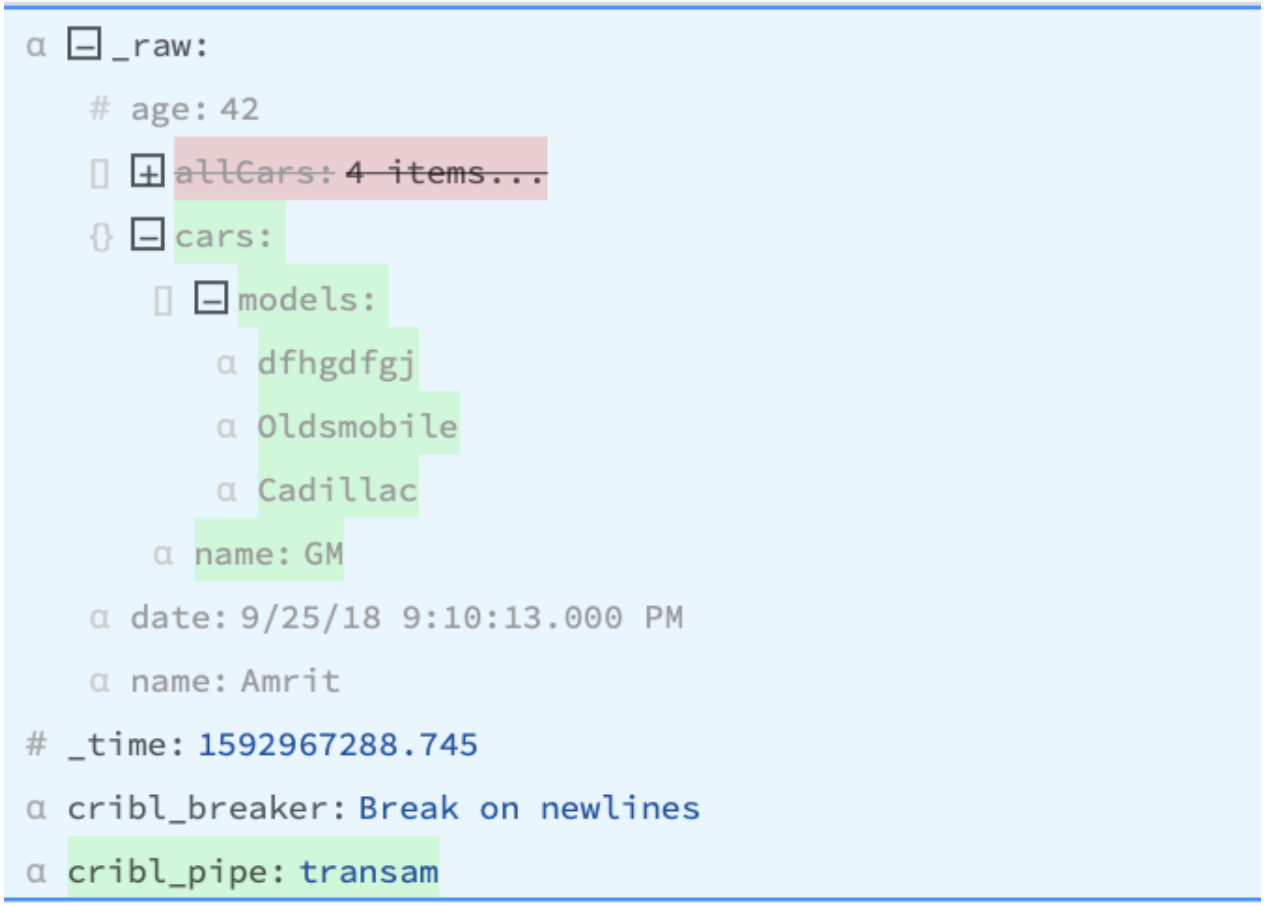

Event before masking

Configure the Mask Function > Masking Rules as follows:

Match Regex: `dfhgdfgj` Replace Expression: `Trans AM`

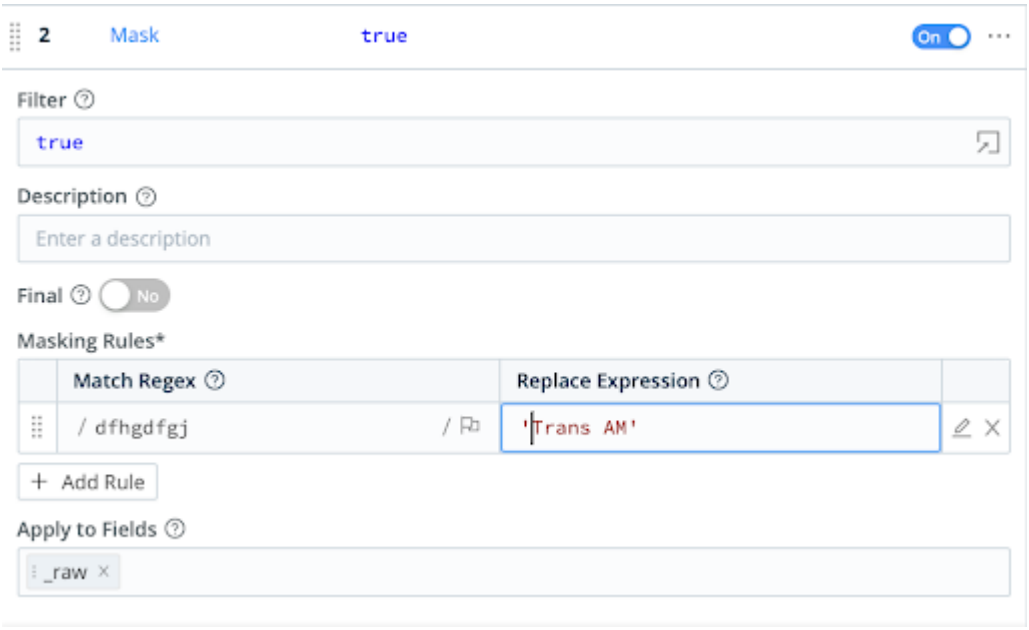

Mask Function configuration

Result: Vroom vroom!

Event after masking

Example 2: Mask Sensitive Data

Assume that you're ingesting data whose `_raw` fields contain unredacted Social Security numbers in the Key=Value pattern `social=#########`.

Event with unredacted SSNs

You can use a Mask Function to run an md5 hash of the `social` keys' numeric values, replacing the original values with the hashed values. Configure the Masking Rules as follows:

Match Regex: `(social=)(\d+)` Replace Expression: `` `${g1}${C.Mask.md5(g2)}` ``

In the first example everything in the Match regex field was replaced by the Replace Expression. However if that isn't desired then you can use capture groups in the Match Regex to define individual string components for manipulation or, alternatively, use string literals in the Replace expression for retaining any static text. Any content matching the Match Regex that is not inserted into the Replace expression will not be retained.

In this example, `social=` is assigned to capture group g1 for later reference. The value of `social=` will be hashed by referencing it as g2 in the md5 function. If we didn't make `social=` its own capture group (or specified `social=` as a literal in the Replace Expression) then we cannot reference it using g1 in the Replace expression, the value of `social=` would instead be assigned to g1, and the entire `social=#########` string would be replaced with a hash of the social security number, which probably isn't desired because no one would know the value being hashed without a field name preceding it.

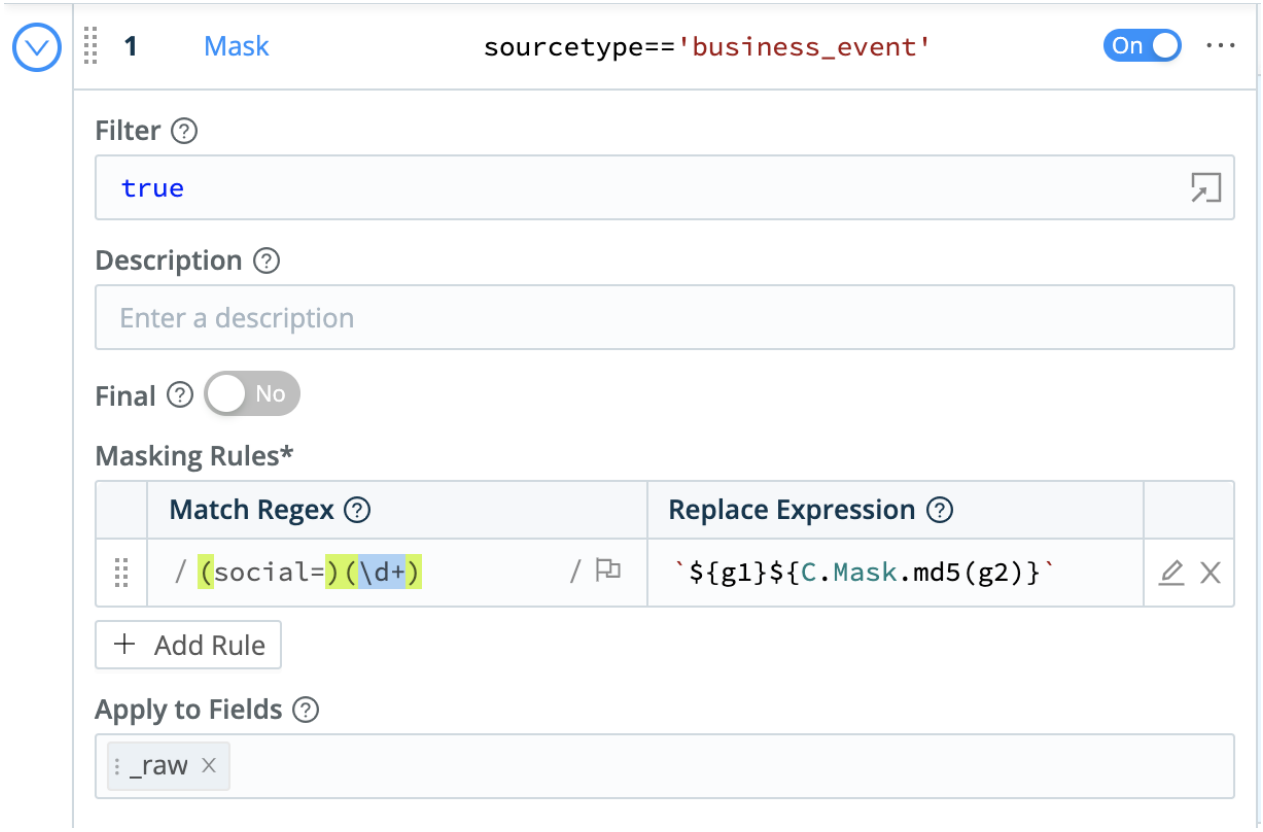

Mask Function configuration

Result: The sensitive values are replaced by their md5 hashes.

Event with hashed SSNs

In scenarios where you need to send unmodified values to certain Destinations (such as archival stores), you can narrow the Mask Function's scope by setting the associated Route's **Output** field.

> For further masking examples, see Masking and Obfuscation.

Example 3: Replace with an Event Field

In this example, we'll replace the IP address `127.0.0.1` in the `_raw` field with the IP address `192.168.123.25` from an existing field named `source_ip`. The following is a snippet of `_raw`:

```
ProcessId=0x0 IpAddress=127.0.0.1 IpPort=0
```

To match the IP address, we'll define three capture groups. Set **Match Regex** to:

```
/(IpAddress=)((?:\d{1,3}\.){3}\d{1,3})(\s)/
```

In the **Replace Expression**, we'll reference the `source_ip` field by prepending `event` to it, like this:

```
${g1}${event.source_ip}${g3}
```

Note that we've also referenced the first and third capture groups, using `g1` and `g3`. This changes `_raw` to:

```
ProcessId=0x0 IpAddress=192.168.123.25 IpPort=0
```

9.19. Numerify

The Numerify Function converts event fields that are numbers to type `number`.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Ignore fields: Specify fields to **not** numerify. Type in field names, separated by hard returns. Supports wildcards (`*`) and nested addressing. When empty (the default), Numerify applies to **all** fields. When populated, takes precedence over the **Include expression**.

> ### Double Negatives
>
> **Ignore fields** also supports negated terms. When you negate field names, the fields list is order-sensitive. E.g., `!foobar` before `foo*` means "Ignore all fields that start with `foo`, except `foobar`." However, `!foo*` before `*` means "Ignore all fields, except for those that start with `foo`."

Include expression: Optional JavaScript expression to specify fields to numerify. If empty (the default), the Function will attempt to numerify all fields – except those listed in **Ignore fields**, which takes precedence. Use the `name` and `value` global variables to access fields' names/values. (Example: `value != null`.) You can access other fields' values via `__e.<fieldName>`.

Format: Optionally, reformat or truncate the extracted numeric value. Select one of:

- **None**: Applies no reformatting (the default).
- **Floor**: Rounds the number down to the lower adjacent integer (truncates it).
- **Ceil**: Rounds the number up to the higher adjacent integer, removing decimal digits.
- **Round**: Rounds (truncates) the number to a specified number of digits. This option exposes an extra field:
  - **Digits**: Number of digits after the decimal point. Enter a value between `0` – `20`; defaults to `2`.

Examples

Scenario A:

Assume an event whose text contains a numeric value that must be extracted to perform some numeric analysis. The text looks like this:

```
version=11.5.0.0.1.1588476445
```

We can extract the numeric value by chaining together two Functions:

1. A Regex Extract Function. Set its **Regex** field to `/version=(?<ver>\d+)/`, to capture the first set of digits found in the event string.
2. Then use Numerify.

This captures the substring `11` and converts it to a numeric `11` value.

Scenario B:

Assume email transaction log events like the sample below. The final field is the message's size, in bytes. We want to extract this as a numeric value, for analysis in Cribl Stream or downstream services:

```
03:19 03:22 SMTPD (00180250) [209.221.59.70] C:\IMail\spool\D28de0018025017cd.SMD 3827
```

Again, we can accomplish this with two Functions:

1. A Regex Extract Function. To capture a substring of digits that follows six other substrings (all separated by white space), we set the **Regex** field to: `\S+\s+\S+\s+\S+\s+\S+\s+\S+\s+\S+\s+\S+\s+(?<bytes>\d+)`
2. Then use Numerify.

9.20. Parser

The Parser Function can be used to extract fields out of events, or to reserialize (rewrite) events with a subset of fields. Reserialization will maintain the format of the events.

For example: If an event contains comma-delimited fields, and `fieldA` and `fieldB` are filtered out, those fields' positions will be set to `null`, but not deleted completely.

Parser cannot remove fields that it did not create. A subsequent Eval Function can do so.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning evaluate all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Operation mode: **Extract** will create new fields. **Reserialize** will extract, filter fields, and then reserialize.

Type: Parser/Formatter type to use. Options:

- CSV – selecting this type requires you to escape certain characters.
- JSON
- K=V Pairs – selecting this type requires you to escape certain characters.
- Delimited Values – selecting this type expands the UI.
- Common Log Format (CLF)
- Extended Log File Format (ELFF)

The following two additional options appear in the drop-down, but can only be used when **Operation mode** is set to **Extract**; both expand the UI:

- Grok
- Regex Extract

Library: Select an option from the Parsers Library. Although specifying a Library will auto-generate an example list of fields, the list may still need to be modified to accommodate the desired fields from the events as well as the actual field order.

Source field: Field that contains text to be parsed. Not usually needed in Reserialize mode.

Destination field: Name of field in which to add extracted and serialized fields. If multiple new fields are created and this field is populated, then all new fields are created as elements of an array. The array's name will be set to this field's value. If you want all new fields to be independent, rather than in an array, then specify them using **List of fields**, below. (Extract and Reserialize modes only.)

Clean fields: This option appears for **Type: K=V Pairs**. Toggle to `Yes` to clean field names by replacing non-alphanumeric characters with `_`. This will also strip leading and trailing `"` symbols.

List of fields: Fields expected to be extracted, in order. If not specified, Parser will auto-generate fields.

Fields to keep: List of fields to keep. Supports wildcards (`*`). Takes precedence over **Fields to remove**. Supports nested addressing. See details below.

Fields to remove: List of fields to remove. Supports wildcards (`*`). Cannot remove fields matching **Fields to keep**. Supports nested addressing. See details below.

Fields filter expression: Expression to evaluate against each field's `{index, name, value}` context. Return truthy to keep fields, or falsy to remove fields. Index is zero-based. See details below.

Types That Expand the UI

Setting **Type** to **Delimited Values** displays the following extra options:

- **Delimiter**: Delimiter character to split value. Defaults to comma (`,`). You can also specify pipe (`|`) or tab characters.
- **Quote char**: Character used to quote literal values. Defaults to `"`.
- **Escape char**: Character used to escape delimiter or quote characters. Defaults to: `\`
- **Null value**: Field value representing the null value. These fields will be omitted. Defaults to: `-`

Setting **Type** to **Grok** displays the Grok Function UI; setting it to **Regex Extract** displays the Regex Extract UI. These Parser preserve all previewing and editing. Also, **Grok** enables you to bring Grok Patterns into Cribl Search.

Advanced Settings

Allowed key characters: Enter characters permitted in a key name, even though they are normally separator or control characters. Separate entries with a tab or hard return. This setting does not affect how the value is parsed.

Allowed value characters: Enter characters permitted in a value name, even though they are normally separator or control characters. Separate entries with a tab or hard return. This setting does not affect how the key is parsed.

Fields/Values Interaction

This Function's **Filter**, **Type**, **Fields to keep**, **Fields to remove**, and **Fields filter expression** settings interact as follows.

Order of Evaluation

The order is: **Fields to keep** > **Fields to remove** > **Fields filter expression**.

Precedence

If a field is in both **Fields to keep** and **Fields to remove**, **Fields to keep** takes precedence.

If a field is in both **Fields to remove** and **Fields filter expression**, **Fields to remove** takes precedence.

Negation

Both **Fields to remove** and **Fields to keep** support negated terms. When you use negated terms, your fields list is order-sensitive. E.g., `!foobar, foo*` means "All fields that start with `foo`, except `foobar`." However, `!foo*, *` means "All fields, except for those that start with `foo`."

Characters to Escape

Particular characters need special treatment when parsed when you select the Key=Value Pairs or CSV Parser/Formatter type.

Key-Value Pairs

When a Parser Function's **Type** is set to `Key=Value Pairs`: Within your data, field values that contain an `=` delimiter **must** be surrounded by quotes (`"..."`), or the Function will return unexpected results. As an example, here is a set of four fields and values, in which two values are quoted to parse predictably:

```
one=1,two="value=2",three=3,four="value=4"
```

These would resolve to the following parsed values:

FIELD NAME	VALUE
one	1
two	"value=2"
three	3
four	"value=4"

CSV

When a Parser Function's **Type** is set to `CSV`: Within your data, column values that contain quotes or commas **must** quote those characters, or the Function will return unexpected results. To illustrate this, here is a properly formatted example of four CSV values:

```
"value with ""escaped"" quotes is 1",2,3,"you know, this is 4"
```

The first value includes quotation marks, which are each escaped with surrounding quotes, and the whole value is delimited by outer quotes. The fourth value includes a comma, so that value is delimited by outer quotes. These four columns would cleanly evaluate to:

value with "escaped" quotes is 1
2
3
you know, this is 4

Examples

The following examples show creating and dropping fields, reserialization, and serializing to CSV versus JSON.

Example 1

Insert the following sample, using **Sample Data** > **Import Data**: `2019/06/24 05:10:55 PM Z a=000,b=001,c=002,d=003,e=004,f=005,g1=006,g2=007,g3=008`

Create the following test Parser Function (or import this Pipeline: https://raw.githubusercontent.com/weeb-cribl/cribl-samples/master/parser/functions/parser/parser_1.json).

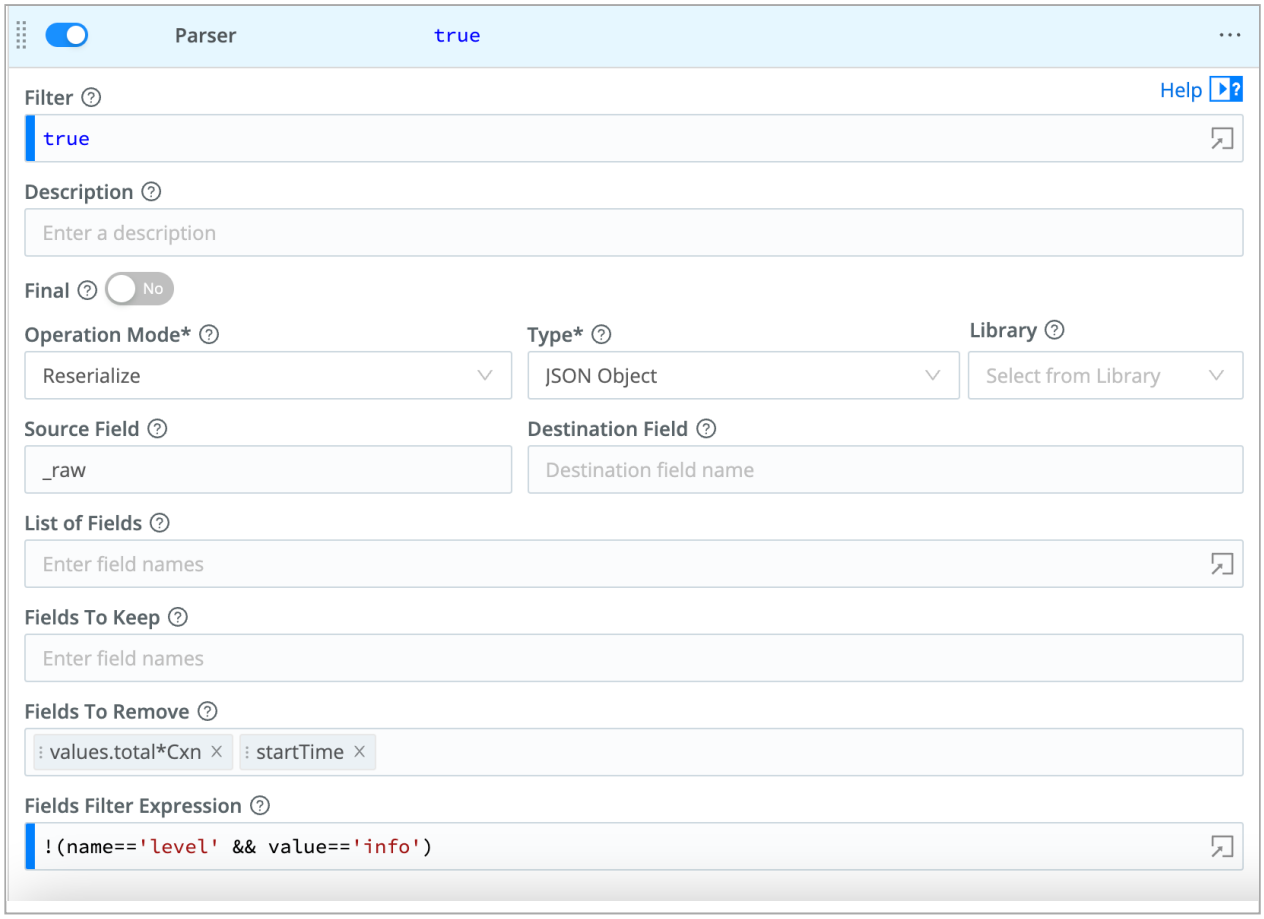

Parser Function initial configuration

First, set the **Type** to `Key=Value Pairs`.

Scenario A

Keep fields `a`, `b`, `c`. Drop the rest.

Expected result: `a`, `b`, `c`

- Fields to Keep: `a`, `b`, `c`
- Fields to Remove: `*`
- Fields Filter Expression: <empty>

Result: The event will gain four new fields and values, as follows.

- a: `000`
- b: `001`

- c: `002`
- cribl_pipe: `parser2`

Scenario A result

You can check your stats by clicking the **Preview** pane's **Basic Statistics** (chart) button. In the resulting pop-up, the **Number of Fields** should have incremented ty four.

Now that you have the hang of it, try out the other simple scenarios below.

Scenario B

Keep fields `a`, `b`, those that start with `g`. Drop the rest.

Expected result: `a`, `b`, `g1`, `g2`, `g3`

- Fields to keep: `a`, `b`
- Fields to remove: [empty]
- Fields filter expression: `name.startsWith('g')`

Scenario C

Keep fields `a`, `b`, those that start with `g` but only if value is `007`. Drop the rest.

Expected result: `a`, `b`, `g2`

- Fields to keep: `a`, `b`
- Fields to remove: [empty]
- Fields filter expression: `name.startsWith('g') && value=='007'`

Scenario D

Keep fields `a`, `b`, `c`, those that start with `g`, unless it's `g1`. Drop the rest.

Expected result: `a`, `b`, `c`, `g2`, `g3`

- Fields to keep: `a`, `b`, `c`
- Fields to remove: `g1`
- Fields filter expression: `name.startsWith('g')`

Scenario E

Keep fields `a`, `b`, `c`, those that start with `g` but only if index is greater than `6`. Drop the rest.

Expected result: `a`, `b`, `c`, `g2`, `g3`

- Fields to keep: `a`, `b`, `c`
- Fields to remove: [empty]
- Fields filter expression: `name.startsWith('g') && index>6`

> The `index` refers to the location of a field in the array of all fields extracted by **this** Parser. It is zero-based. In the case above, `g2` and `g3` have `index` values of `7` and `8`, respectively.

Example 2

Assume we have a JSON event that needs to be **reserialized**, given these requirements:

1. Remove the `level` field only if it's set to `info`.
2. Remove the `startTime` field, and all fields in the `values.total.` path that end in `Cxn`.

Parser Function configuration:

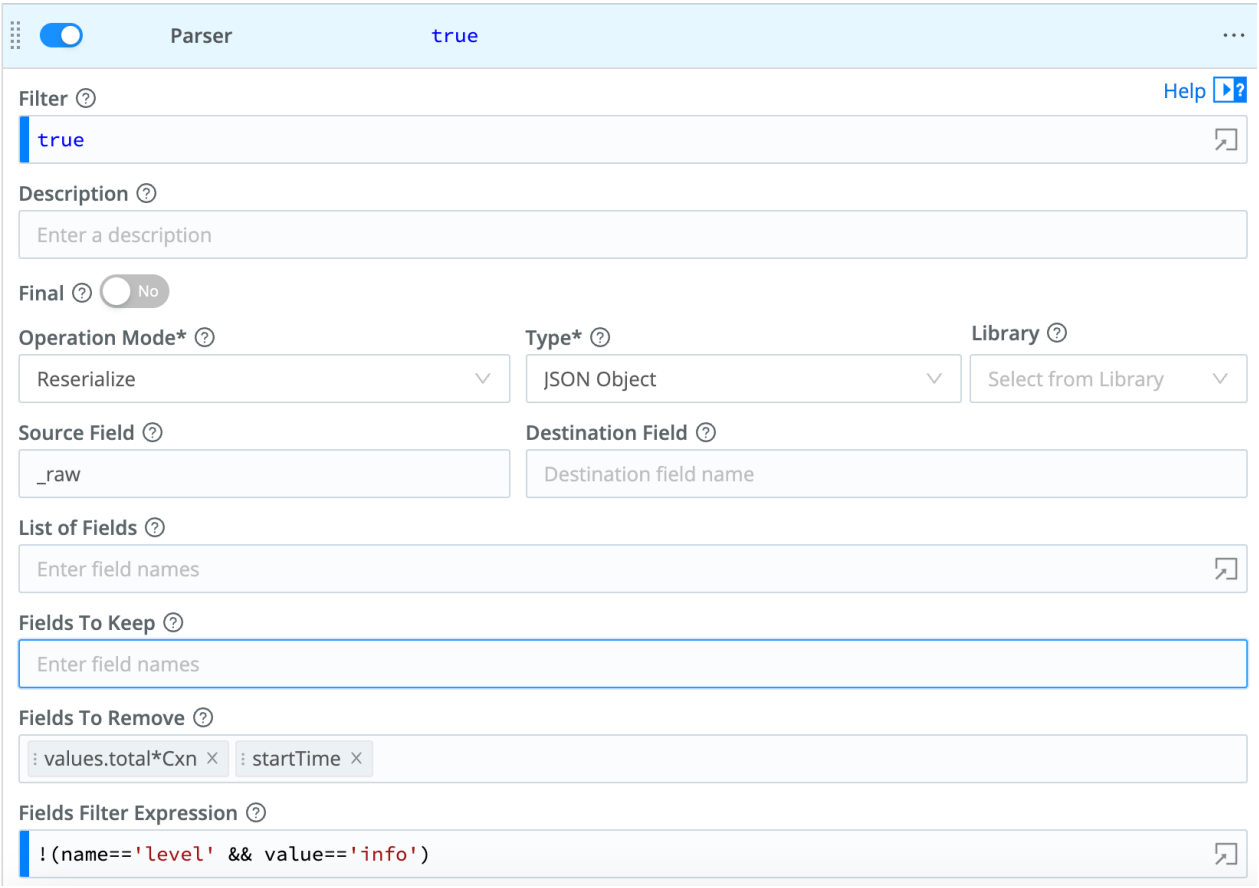

Parser Function configuration for Example 2

JSON event after being processed by the Function:

Example 2 event transformation

Example 3

Insert the following sample, using **Sample Data** > **Import Data**:

```
2019/06/24 15:25:36 PM Z a=000,b=001,c=002,d=003,e=004,f=005,g1=006,g2=007,g3=008,
```

For all scenarios below, first create a Parser Function to extract all fields, by setting the **Type** to `Key=Value Pairs`. Then add a second Parser Function with the configuration shown under **Parser 2**.

Scenario A

Serialize fields `a`, `b`, `c`, `d` in CSV format.

Expected result: `_raw` field will have this value `000,001,002,003`

Parser 2:

- Operation mode: `Serialize`

- Source field: [empty]
- Destination field: [empty]
- Type: `CSV`
- List of fields: `a, b, c, d` (needed for positional formats)

Scenario B

Serialize fields `a, b, c` in JSON format, under a field called `bar`.

Expected result: `bar` field will be set to: `{"a":"000","b":"001","c":"002","d":"003"}`

Parser 2:

- Operation mode: `Serialize`
- Source field: [empty]
- Destination field: `bar`
- Type: `JSON`
- List of fields: [empty]
- Fields to keep: `a, b, c, d`

Example 4

Assume we have a simple event that looks like this:

```
metric=123 dc=ab port=9090
```

If we want to extract only the `metric` field, we can configure a Parser of **Type** `Regular Expression`, where the **Regex** field is set to `metric=(?<metric>\\d+)`:

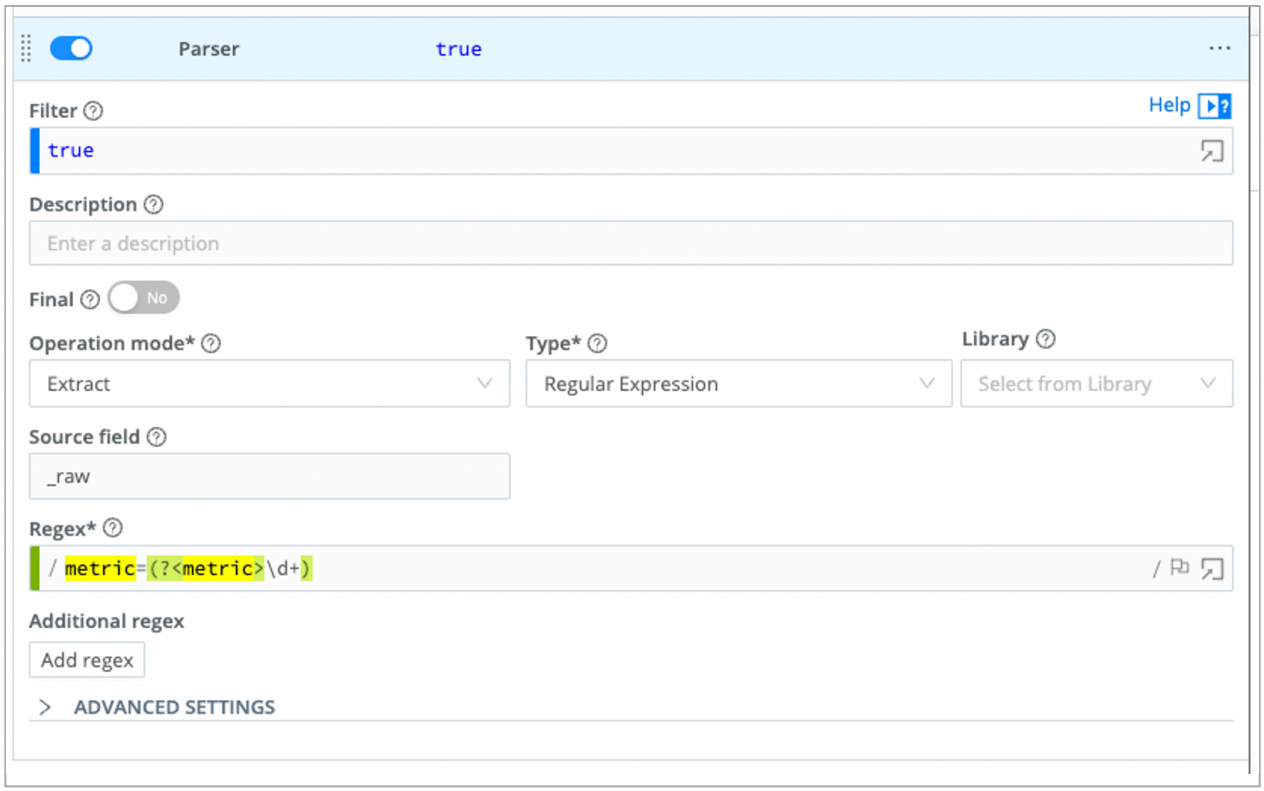

Parser Function configuration for Example 4

The output will look like this:

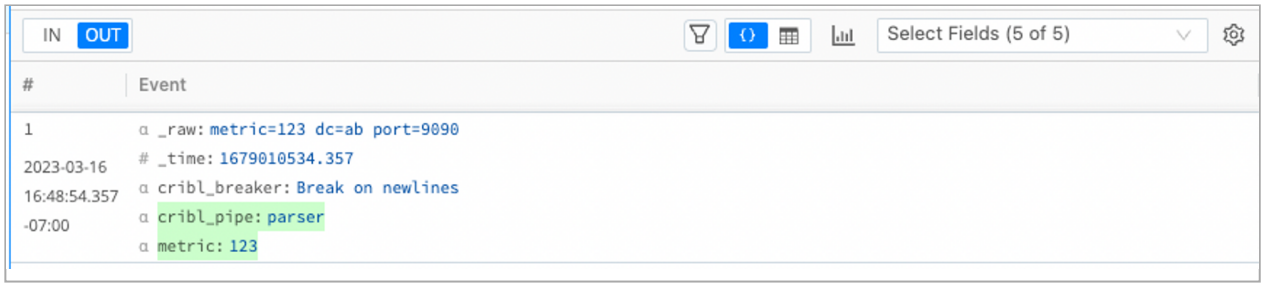

Parser Function regex output

Example 5

Assume we have an event that looks like this:

```
2020-09-16T04:20:42.45+01:00 DEBUG This is a sample debug log message
```

We can use a Grok pattern to parse the event so that the timestamp, log level, and the message are separated. A Parser of **Type** `Grok` with the following Pattern will work:

```
%{TIMESTAMP_ISO8601:event_time} %{LOGLEVEL:log_level} %{GREEDYDATA:log_message}
```

The Parser Function configuration looks like this:

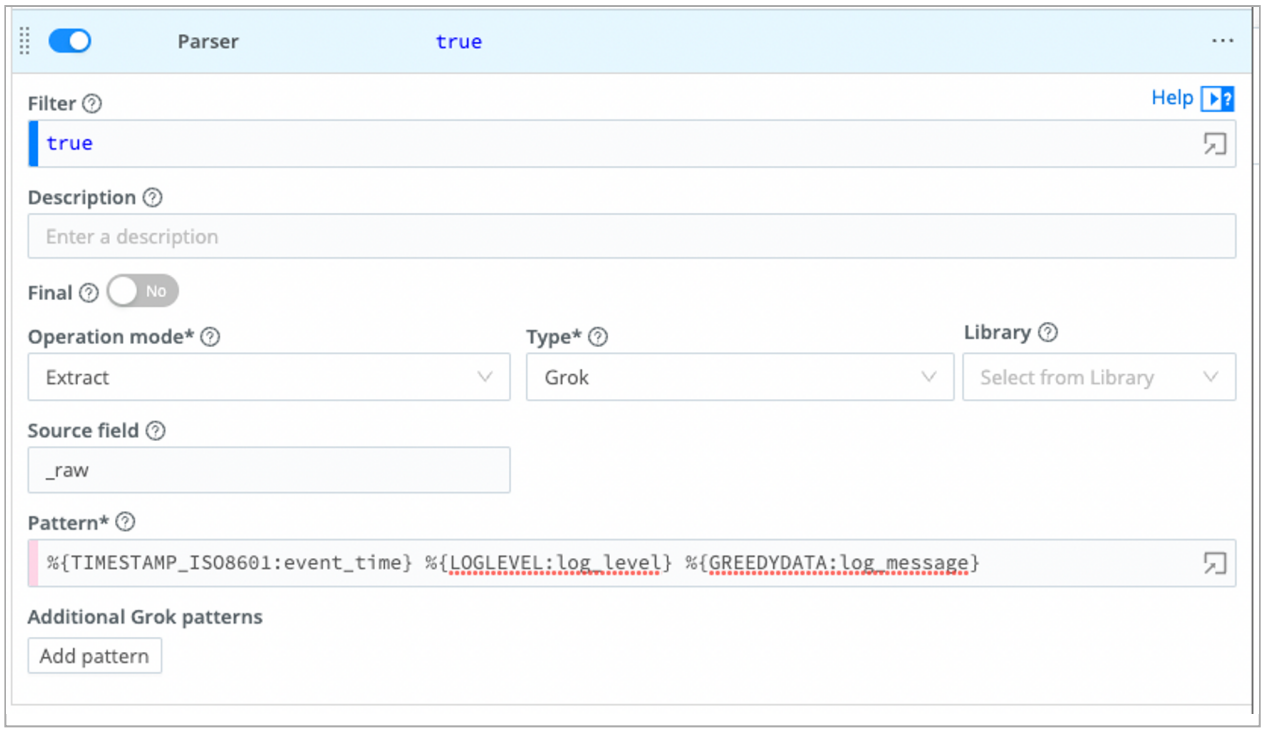

Parser Function configuration for Example 5

The output will look like this:

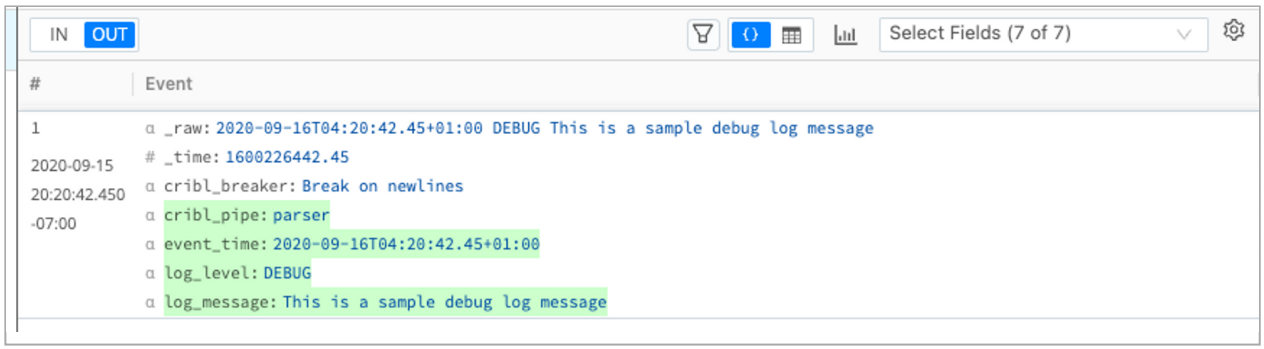

Parser Function grok output

9.21. Publish Metrics

The Publish Metrics Function extracts, formats, and outputs metrics from events.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Overwrite: If set to `Yes`, overwrite previous metric specs. Otherwise, append. Defaults to `No`.

Metrics

Add Metrics: List of metrics to extract from the event and format. Destinations can pass the formatted metrics to a metrics aggregation platform. Click **Add Metrics** to add new rows containing the following options:

- **Event field name**: The name of the field (in the event) that contains the metric value. Should contain only letters, numbers, underscores (_), and `.` characters (to separate names in nested structures).
- **Metric name expression**: JavaScript expression to evaluate the metric field name. Defaults to the **Event field name** value.

  > The JavaScript expression will evaluate the metric field name only after the metrics are processed for transport to the Destination. While in the processing Pipeline, the metric name expression appears as a literal.

- **Metric type**: Select `Gauge` (the default), `Counter`, `Timer`, `Distribution`, `Summary`, or `Histogram`. General definitions that can vary across senders:
  - `Gauge`: A numeric value that can increase or decrease over time – like a temperature or pressure gauge.
  - `Counter`: A cumulative numeric value – it can only increase over time.

- `Timer`: Generally measures how long a given event type takes (duration), and how often it occurs (frequency).
- `Distribution`: The statistical distribution of a set of values over a time interval. (This type generally provides raw data, not an aggregation.)
- `Summary`: Tracks the count, sum, and average of the values. Optionally, also tracks quantiles across the values.
- `Histogram`: Tracks the count, sum, and average of the values. Also groups the observations in their corresponding intervals, or buckets.

Remove Metrics: Optionally, enter a List of field names to look for when removing metrics. Where a metric's field name matches an element in this list, Cribl Stream will remove that metric from the event.

Dimensions

Add Dimensions: Optional list of dimensions to include in events. Supports wildcards. If you don't specify metrics, values will be appended to every metric found in the event. When you add a new metric, dimensions will be present only in those new metrics. Defaults to `!_* *`.

Remove Dimensions: Optional list of dimensions to associate with every extracted metric value. Leave blank if this function is used to process output from the Aggregation function as dimensions will be automatically discovered. If this Function is used to process output from the Aggregations Function, leave this field blank, because dimensions will be automatically discovered.

Overwrite: If set to `Yes`, overwrite previous metric specs. Otherwise, append. Defaults to `No`.

> The **Add Dimensions** and **Remove Dimensions** fields support wildcards and negated terms. When you use negated terms, the list is order-sensitive. E.g., `!foobar` before `foo*` means "All fields that start with `foo`, except `foobar`." However, `!foo*` before `*` means "All fields, except for those that start with `foo`."
>
> Cribl Stream can send out multi metrics, but this must be configured on compatible Destinations.

Fields Color Coding

On the right Preview pane's **OUT** tab, the Publish Metrics Function adds the following color codes to field labels:

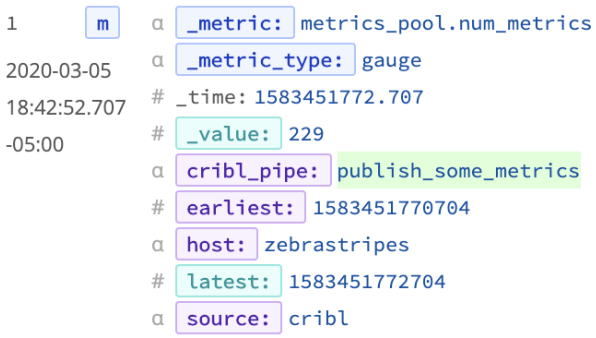

Dimension: purple | **Value**: cyan (light blue) | **Info**: dark blue

These are in addition to the color codes applied to field values, which are listed here.

Examples

Scenario A:

Assume we're working with AWS VPC Flowlog events that have the following structure:

```
version account_id interface_id srcaddr dstaddr srcport dstport protocol packets bytes start end action log_status
```

For example:

```
2 99999XXXXX eni-02f03c2880e4aaa3 10.0.1.70 10.0.1.11 9999 63030 6 6556 262256 1554562460 1554562475 ACCEPT OK
```

... and we want to use values of `packets` and `bytes` as metrics across these dimensions: `action`, `interface_id`, and `dstaddr`.

To reference the `packets` and `bytes` fields by name, as `'packets'` and `'bytes'`, our Pipeline will need a Parser Function before the Publish Metrics Function.

Parser Function

Filter: Set as needed Operation mode: Extract Type: Extended Log File Format (automatically set when specifying a library) Library: AWS VPC Flow Logs Source: `_raw` (No need to specify any other fields.)

Publish Metrics Function

Below, the `metric_name` prefix was arbitrarily chosen. Because there is no JavaScript expression to evaluate – i.e., this is literal text – the strings specified for the **Metric name expression** will be identical to those in the final metrics data sent to the Destination. See Raw Output below.

Metrics

EVENT FIELD NAME	METRIC NAME EXPRESSION	METRIC TYPE
`bytes`	`` `metric_name.bytes` ``	**Gauge**
`packets`	`` `metric_name.packets` ``	**Gauge**

Dimensions

```
action interface_id dstaddr
```

All specified dimension names must align with those from the original event. When you preview the Function's output, the metrics and dimensions will all have special highlighting to separate them from other fields. Additional highlighting is used to differentiate the metrics from the dimensions. (If one or more metrics/dimensions are not highlighted as expected, check the Function's configuration.)

Raw Output

```
metric_name.bytes:262256|g#action:REJECT,interface_id:eni-
02f03c2880e4aaa3,dstaddr:10.0.1.11

metric_name.packets:6556|g#action:REJECT,interface_id:eni-
02f03c2880e4aaa3,dstaddr:10.0.1.11
```

> ### Compatible Destinations
>
> All text after the `#` symbol represents the dimensions as key-value pairs. In order for dimension data to be included in metrics, the Destination type cannot be standard **StatsD**. However, **StatsD Extended**, **Splunk**, and **Graphite** do support dimensions.

Formatted Output

```
{
  "action": "REJECT",
  "interface_id": "eni-02f03c2880e4aaa3",
  "dstaddr": "10.0.1.11",
  "metric_name.bytes": 262256,
  "metric_name.packets": 6556,
}
```

Scenario B:

Assume that we want to extract some metrics from specific fields in PANOS logs, whose events have the following structure:

```
future_use_0,receive_time, serial_number, type, threat_content_type, future_use_1,
generated_time, source_ip, destination_ip, nat_source_ip, nat_destination_ip, rule_name,
source_user, destination_user, application, virtual_system, source_zone,
destination_zone, inbound_interface, outbound_interface, log_action, future_use_2,
session_id, repeat_count, source_port, destination_port, nat_source_port,
nat_destination_port, flags, protocol, action, bytes, bytes_sent, bytes_received,
packets, start_time, elapsed_time, category, future_use_3, sequence_number,
action_flags, source_location, destination_location, future_use_4, packets_sent,
packets_received, session_end_reason, device_group_hierarchy_level_1,
device_group_hierarchy_level_2, device_group_hierarchy_level_3,
device_group_hierarchy_level_4, virtual_system_name, device_name, action_source,
source_vm_uuid, destination_vm_uuid, tunnel_id_imsi, monitor_tag_imei,
parent_session_id, parent_start_time, tunnel_type, sctp_association_id, sctp_chunks,
sctp_chunks_sent, sctp_chunks_received
```

For example:

```
Jan 10 10:19:15 DMZ-internal.nsa.gov 1,2019/01/10
10:19:15,001234567890002,TRAFFIC,drop,2304,2019/01/10
10:19:15,209.118.103.150,160.177.222.249,0.0.0.0,0.0.0.0,InternalServer,,,not-
applicable,vsys1,inside,z1-FW-Transit,ethernet1/2,,All traffic,2019/01/10
10:19:15,0,1,63712,443,0,0,0x0,udp,deny,60,60,0,1,2019/01/10
10:19:15,0,any,0,0123456789,0x0,Netherlands,10.0.0.0-10.255.255.255,0,1,0,policy-
deny,0,0,0,0,,DMZ-internal,from-policy,,,0,,0,,N/A,0,0,0,0,1202585d-b4d5-5b4c-aaa2-
d80d77ba456e,0
```

Our goal is to use the four values of `bytes_sent`, `bytes_received`, `packets_sent`, and `packets_received` as metrics across these dimensions: `destination_ip`, `inbound_interface`, `outbound_interface`, and `destination_port`.

Here again, our Pipeline will need a Parser Function before the Publish Metrics Function.

Parser Function

Filter: Set as needed Operation mode: Extract Type: Extended Log File Format (automatically set when specifying a Library) Library: Palo Alto Traffic Source: `_raw` (No need to specify any other fields.)

Publish Metrics Function

Set up the Publish Metrics Function as follows.

Metrics

EVENT FIELD NAME	METRIC NAME EXPRESSION	METRIC TYPE
`bytes_sent`	`` `metric.${host}.bytes_sent` ``	Counter
`bytes_received`	`` `metric.${host}.bytes_rcvd` ``	Counter
`packets_sent`	`` `metric.${host}.pkts_sent` ``	Counter
`packets_received`	`` `metric.${host}.pkts_rcvd` ``	Counter

Added Dimensions

`destination_ip, inbound_interface, outbound_interface, destination_port`

Raw Output

```
metric.10.10.12.192.bytes_sent:60|c|#destination_ip:160.177.222.249,inbound_interface:ethernet1/2,destination_port:443
metric.10.10.12.192.bytes_rcvd:0|c|#destination_ip:160.177.222.249,inbound_interface:ethernet1/2,destination_port:443
metric.10.10.12.192.pkts_sent:1|c|#destination_ip:160.177.222.249,inbound_interface:ethernet1/2,destination_port:443
metric.10.10.12.192.pkts_rcvd:0|c|#destination_ip:160.177.222.249,inbound_interface:ethernet1/2,destination_port:443
```

Here again, all text after the `#` symbol represents the dimensions as key-value pairs. (See the Compatible Destinations note above.) Unlike the first example, this example uses JavaScript expressions, which you can see evaluated in the raw output where the `${host}` has been converted to `10.10.12.192`.

9.22. Redis

The Redis Function interacts with Redis stores, setting and getting key-hash and key-value combinations. Redis' in-memory caching of these key pairs enables large lookup tables that would be cumbersome with a CSV or binary lookup file.

You can use Cribl Stream Collectors (e.g., a REST Collector) to retrieve reference data from desired endpoints, and then use this Function to store the data on Redis and retrieve it to enrich your production data. By default, Cribl Stream does not cache the data returned from this Redis Function, but you can enable client-side caching.

Your Redis Function can interact with three kinds of Redis instances: Standalone (the default); Redis Cluster, which scales horizontally; or Redis Sentinel, a distributed system that provides high availability.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Result field: Name of the field in which to store the returned value. (Leave empty to discard the returned value.)

Command: Redis command to perform. Required. (A complete list of Redis commands is at: https://redis.io/commands.)

Key: A JavaScript expression to compute the value of the key to operate on. Can also be a constant, e.g.: `username`. This is a required field. Click the icon at right to open a validation modal.

Args: A JavaScript expression to compute arguments to the operation. Click the icon at right to open a validation modal. When the expression you enter is a plain value or an array, it resembles the options and arguments of a Redis command in the Redis CLI.

For example:

- Suppose you want to `SET` a key named `_mascot`. And, of the options that the `SET` command takes, you want to use two: `GET` and `EX`. The first, `GET`, takes no arguments; the second, `EX`, takes an integer in

seconds.

- You want to set `_mascot` to the value `goat`, and `EX` to 5 seconds. Here is the array you'd enter in the Args column:
  `['goat', 'GET','EX',5 ]`

Deployment Type

From the drop-down, select `Standalone`, `Cluster`, or `Sentinel`. Some of these options display additional controls below. Hostnames must be JavaScript expressions (which can evaluate to a constant value), enclosed in quotes or backticks. They can be evaluated only at init time.

Standalone

This is the default deployment type. Enter a **Redis URL** to connect to. The format is:
`[redis[s]:]//[[user][:password@]][host][:port][/db-number][?db=db-number[&password=bar[&option=value]]]`

Example:
`redis://user:secret@localhost:6379/0?foo=bar&qux=baz`

Example with no `user` specified:
`redis://secret@localhost:6379/0?foo=bar&qux=baz`

Standalone with TLS

To enable TLS, specify a Redis URL that starts with `rediss://` rather than `redis://`. This URL reveals the **TLS** section of the config UI.

Example:
`rediss://user:secret@localhost:6379/0?foo=bar&qux=baz`

Example with no `user` specified:
`rediss://secret@localhost:6379/0?foo=bar&qux=baz`

Cluster

Specify **Root Nodes** that the cluster will connect to. A single node is sufficient, but Cribl recommends listing two or more. Each of the **Root Nodes** consists of a **Hostname** and a **Port**.

> In multi-key commands, ensure that all keys in the command are in the same hash slot. Otherwise, the command will fail. As a workaround, you can split the multi-key command into separate

> commands, where each command operates only on keys from a single hash slot.

Sentinel

Specify a **Master Group Name**, plus every **Sentinel** in your Redis deployment. Each **Sentinel** consists of a **Hostname** and a **Port**.

Authentication Method

Use the **Authentication method** buttons to select one of the following options, some of which display additional controls below.

- **None**: Select this option where authentication either is not required, or is provided in the URL.
- **Basic**: This displays **Username** and **Password** fields for you to enter your Redis credentials.
- **User Secret**: This option exposes a drop-down in which you can select a stored text secret that references a Redis username and password, as described above. A **Create** link is available to store a new, reusable secret.
- **Admin Secret**: This option exposes a drop-down in which you can select a stored text secret that references a Redis admin password. A **Create** link is available to store a new, reusable secret.

TLS

Validate server certs: Reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting. The minimum TLS version for Redis is version 6.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

> **Minimum TLS Requirement**
>
> The minimum Redis version required for TLS support is version 6.

Advanced Settings

Max blocking time: Maximum amount of time (in seconds) before assuming that Redis is down and passing events through. Defaults to `60` seconds. Use `0` to disable timeouts.

Client-side cache: Toggle to `Yes` to enable. Then navigate to **Settings** > **General Settings** > **Limits** > **Redis Cache** to configure the cache, as described in the next section.

Overall Redis Cache Settings

Together, these settings determine how the Cribl Stream client-side cache behaves. We'll start with definitions:

Key TTL in seconds: The maximum time-to-live of a key in the cache, in seconds. `0` means no limit. Defaults to 10 minutes.

Max # of keys: The maximum number of keys the cache can contain. `0` (the default) means no limit.

Max cache size (bytes): The maximum number of bytes the cache can contain. `0` (the default) means no limit.

Service period (seconds): The interval at which the cache checks whether any keys need to be evicted. Defaults to 30 seconds.

Server assisted: This feature requires Redis version 6 or newer. Toggle to `Yes` to enable server-assisted caching and display the **Client tracking mechanism** drop-down. See the Tradeoffs section for an explanation of the available options.

Now here's the context:

For each Redis instance your Redis Functions interact with, Cribl Stream will operate one client-side cache. That cache will be shared between all the Redis Functions instances configured to interact with it. This is why the settings are in a central location, and why you cannot configure the cache at the individual function level.

Once per **Service period**, the cache checks whether any keys need to be evicted. The cache will evict:

- The least-recently-accessed key, if the cache has reached either (1) its **Max cache size (bytes)** or (2) its **Max # of keys**.
- Any key that exceeds its **Key TTL in seconds**.
- Any key that is stale according to a notification to Cribl Stream from your Redis instance. Redis sends these notifications (a.k.a. invalidations, or invalidation messages) only when you have enabled **Server assisted** caching.

The overall benefit that client-side caching provides is having fewer stale keys in your cache for less time. The greater the proportion of `GET`-type, as compared to `SET`-type (write) commands your Cribl Stream-Redis interactions have, the greater that benefit will be. When your Cribl Stream Pipelines either have no `SET`-type operations, or use filters to keep those operations to a minimum, you should consider client-side caching. In sum, you must decide whether more accurate data in your cache is worth the cost of memory and processing.

Tradeoffs Inherent in Server-Assisted Caching

Consider the common scenario where other applications besides Cribl Stream are writing to your Redis instance. Say one of those applications modifies a key's value. Now the value that Cribl Stream client-side cache has for that key is stale. Cribl Stream does not "know" about this, and retains the stale value until its TTL is up. This degrades the overall accuracy of data from the client-side cache.

Server-assisted caching is a remedy for this problem. With server-assisted caching enabled, your Redis instance will notify your client-side cache when Redis determines that a key's value has changed. Then the Cribl Stream client-side cache will immediately evict the stale key. Now the client-side cache is more accurate. Redis also has documentation about server-assisted client-side caching.

There are two mutually-exclusive ways you can have Redis notify Cribl Stream. These are the two modes (delivery mechanisms) available in the **Client tracking mechanism** drop-down:

1. In **Default** mode, the Redis server remembers which keys the Cribl Stream client has requested. Redis only notifies Cribl Stream when the value of one of **those** keys has changed. This is most efficient for Cribl Stream but needs more memory and some extra processing time from the Redis server.

2. In **Broadcast** mode, the Redis server need not remember which keys came from where, because it simply notifies Cribl Stream when the value of **any** key has changed. This is most efficient for Redis, but now the the Cribl Stream client needs to inspect every key that Redis says has changed. This consumes some extra processing time on the client, and generates extra network activity to accommodate notifications about keys that Cribl Stream never sees.

You should select whichever of these mechanisms best suits your environment. Does it make more sense to impose the heavier burden on the Redis server (as in **Default** mode) or on Cribl Stream (as in **Broadcast** mode)?

In both scenarios, for a given key, any write operation from any application (including Cribl Stream) that's interacting with Redis, causes Cribl to evict the key from the client-side cache when Redis notifies Cribl.

Examples

Scenario A: Set and Get

This Pipeline demonstrates the use of a pair of Redis Functions. The first Function sets two key-value pairs in Redis. The second Function gets their values, by key, into two corresponding new **Result field**s.

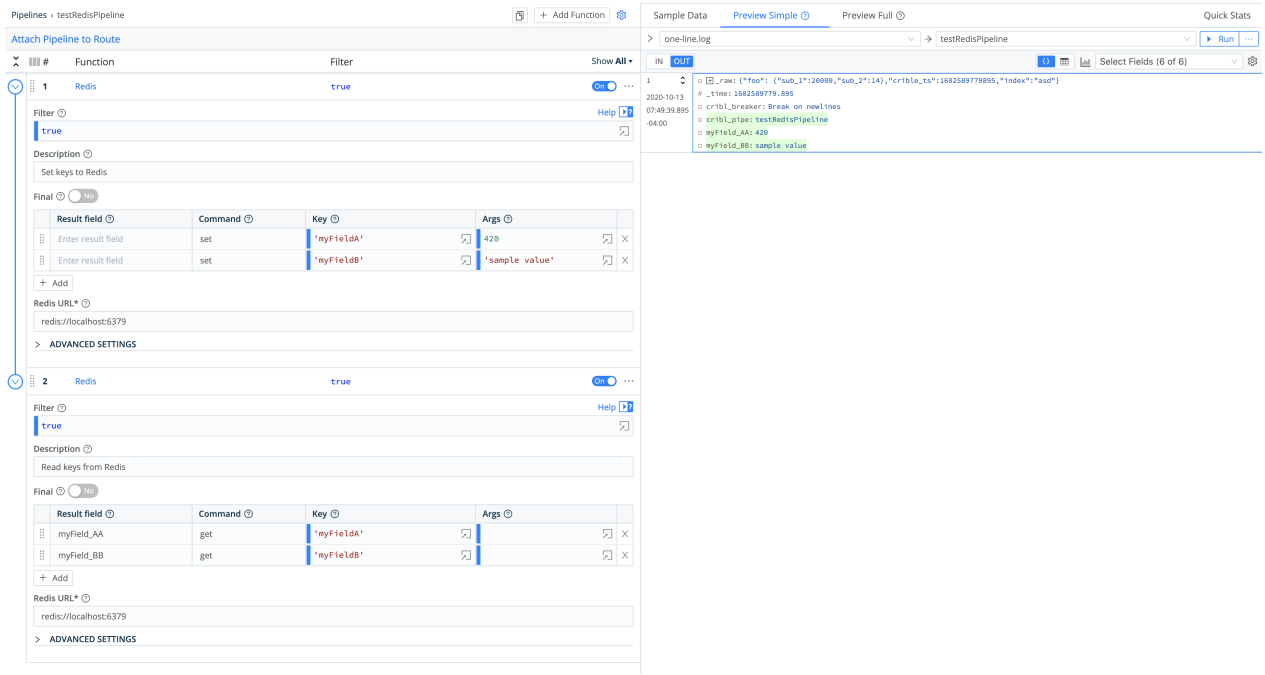

Redis set and get Functions

Redis Function #1

Description: `Set keys to Redis`

Command: `set` **Key**: `'myFieldA'` **Args**: `420`

Command: `set` **Key**: `'myFieldB'` **Args**: `'sample value'`

Redis Function #2

Description: `Read keys from Redis`

Result field: `myField_AA` **Command**: `get` **Key**: `'myFieldA'`

Result field: `myField_BB` **Command**: `get` **Key**: `'myFieldB'`

Scenario B: Multiple-Argument Arrays

This example demonstrates how to configure a Redis Function that supplies an array of multiple arguments to Redis commands (in this example, `lset` and `lrange`).

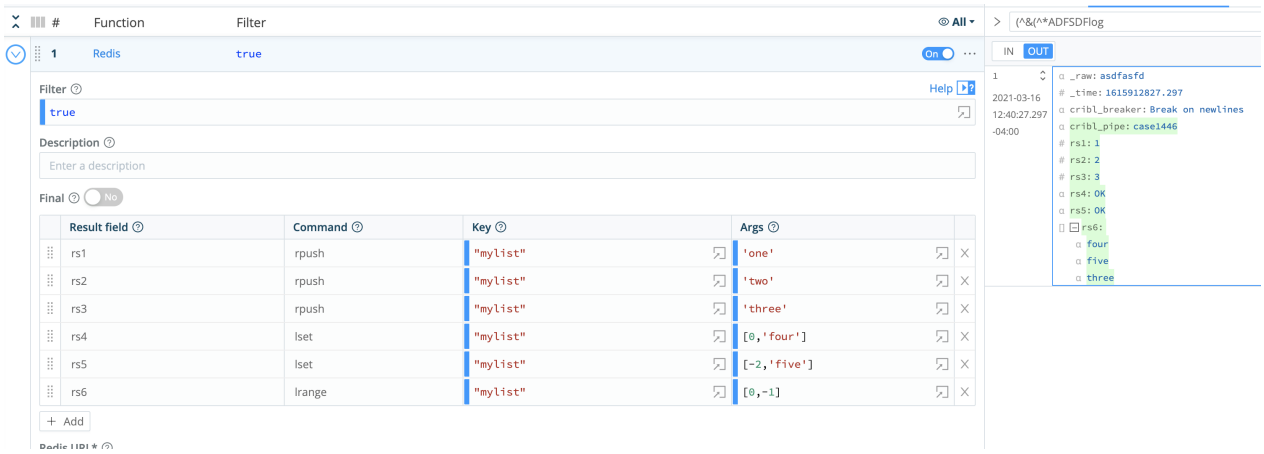

Redis Function, arrays of multiple arguments, and sample output

Redis Function

Description: `Push arrays of multiple arguments to Redis`

Result field: `rs1` **Command**: `rpush` **Key**: `"mylist"` **Args**: `'one'`

Result field: `rs2` **Command**: `rpush` **Key**: `"mylist"` **Args**: `'two'`

Result field: `rs3` **Command**: `rpush` **Key**: `"mylist"` **Args**: `'three`

Result field: `rs4` **Command**: `lset` **Key**: `"mylist"` **Args**: `[0,'four']`

Result field: `rs5` **Command**: `lset` **Key**: `"mylist"` **Args**: `[-2,'five']`

Result field: `rs6` **Command**: `lrange` **Key**: `"mylist"` **Args**: `[0,-1]`

Try This at Home

The Pipeline below contains only this example Function. You can import it into your own Cribl Stream environment, fill in the `url` with your own credentials, and further modify it to meet your needs.

redis-multiple-args.json

```
{
  "id": "redis-multiple-args",
  "conf": {
    "output": "default",
    "groups": {},
    "asyncFuncTimeout": 1000,
    "functions": [
      {
        "filter": "true",
        "conf": {
          "commands": [
            {
              "outField": "rs1",
              "command": "rpush",
              "keyExpr": "\"mylist\"",
              "argsExpr": "'one'"
            },
            {
              "outField": "rs2",
              "command": "rpush",
              "keyExpr": "\"mylist\"",
              "argsExpr": "'two'"
            },
            {
              "outField": "rs3",
              "command": "rpush",
              "keyExpr": "\"mylist\"",
              "argsExpr": "'three'"
            },
            {
              "command": "lset",
              "keyExpr": "\"mylist\"",
              "argsExpr": "[0,'four']",
              "outField": "rs4"
            },
            {
              "outField": "rs5",
              "command": "lset",
              "keyExpr": "\"mylist\"",
              "argsExpr": "[-2,'five']"
            },
            {
              "outField": "rs6",
              "command": "lrange",
              "keyExpr": "\"mylist\"",
              "argsExpr": "[0,-1]"
            }
          ],
          "maxBlockSecs": 60,
          "url": "redis://<your-credentials-here>"
        },
        "id": "redis",
        "disabled": false,
        "description": "Push arrays of multiple arguments to Redis"
      }
    ]
  }
}
```

9.23. Regex Extract

The Regex Extract Function extracts fields using regex named groups. (In Splunk, these will be index-time fields). Fields that start with `__` (double underscore) are special in Cribl Stream. They are ephemeral: they can be used by any Function downstream, but **will not** be added to events, and **will not** exit the Pipeline.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of the Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Regex: Regex literal. Must contain named capturing groups, e.g.: `(?<foo>bar)`. Can contain special `_NAME_N` and `_VALUE_N` capturing groups, which extract **both the name and value** of a field, e.g.: `(?<_NAME_0>[^\s=]+)=(?<_VALUE_0>[^\s]+)`. Defaults to empty. See Examples below.

Additional regex: Click **Add Regex** to chain extra regex conditions.

Source field: Field on which to perform regex field extraction. Nested addressing is supported. Defaults to `_raw`.

Advanced Settings

Max exec: The maximum number of times to apply the **Regex** to the source field when the global flag is set, or when using `_NAME_N` and `_VALUE_N` capturing groups. Named capturing groups will always use a value of `1`. Defaults to `100`.

Field name format expression: JavaScript expression to format field names when `_NAME_n` and `_VALUE_n` capturing groups are used. E.g., to append `XX` to all field names, use: `` `${name}_XX` `` (backticks are literal). If not specified, names will be sanitized using regex: `/^[_0-9]+|[^a-zA-Z0-9_]+/g`. The **original** field name is in the global `name`. You can access other fields' values via `__e.<fieldName>`.

Overwrite existing fields: Whether to overwrite existing event fields with extracted values. If set to `No` (the default), existing fields will be converted to an array. If toggled to `Yes`, Regex Extract will create array fields if applied multiple times, or if fields exist. (E.g., if `src_ip` is extracted in an input Pipeline where it is assigned a

value of `10.1.2.2`, and is also in a processing Pipeline with a value of `10.2.3.3`, then the resulting field is `["10.1.2.2", "10.2.3.3"]`.)

Examples

Example 1: Single Field from Simple Event

Assume a simple event that looks like this: `metric1=23 metric2=42 dc=23 abc=xyz`

Extract **only** the `metric1` field:

Regex: `metric1=(?<metric1>\d+)` **Result**: `metric1:"23"`

Example 2: Key-Value Pairs from Multiple Fields

Use this sample:

```
rec_type=71 rec_type_simple=RNA dest_port=443 snmp_out=0 netflow_src="00000000-0000-
0000-0000-000000000000" ssl_server_cert_status="Not Checked" dest_ip=172.20.115.42
sec_intel_event=No mac_address=00:00:00:00:00:00 dest_bytes=3746
dest_autonomous_system=0 security_context=00000000000000000000000000000000
src_port=41925 web_app=Unknown url=https://outlook.ssg.petsmart.com
url_reputation="Risk unknown" first_pkt_sec=1543598207 vlan_id=0 ssl_flow_error=0
ssl_actual_action=Unknown has_ipv6=1 monitor_rule_6=N/A monitor_rule_7=N/A
monitor_rule_4=N/A monitor_rule_5=N/A monitor_rule_2=N/A monitor_rule_3=N/A
ips_count=0 monitor_rule_1=N/A dest_tos=0 src_ip=192.168.228.5 referenced_host=""
iface_ingress=DMZ3.30 monitor_rule_8=0 event_subtype=1 fw_rule_reason=N/A
event_type=1003 ssl_version=Unknown dns_resp_id=0 sensor=ssg-inet-fpr-ftd-fw01
sec_zone_egress=Inside src_tos=0 client_app="SSL client" snmp_in=0 user=Unknown
ssl_flow_messages=0 iface_egress=inside http_referrer="" src_pkts=0 event_desc="Flow
Statistics" event_usec=0 client_version="" fw_rule_action=Allow
ssl_cert_fingerprint=0000000000000000000000000000000000000000 ssl_url_category=0
file_count=0 sec_zone_ingress=DMZ3 instance_id=6 src_bytes=1013
src_ip_country=unknown ssl_cipher_suite=TLS_NULL_WITH_NULL_NULL user_agent=""
http_response=0 src_mask=0 dest_mask=0 sec_intel_ip=N/A netbios_domain=""
tcp_flags=0 dns_rec_id=0 fw_policy="SSG INET Access Control Policy"
last_pkt_sec=1543598207 legacy_ip_address=0.0.0.0 ip_proto=TCP connection_id=21378
dest_pkts=0 app_proto=HTTPS ssl_flow_status=Unknown ssl_rule_id=0
ssl_session_id=0000000000000000000000000000000000000000000000000000000000000000
dns_query="" rec_type_desc="Connection Statistics" url_category=Unknown
fw_rule="Outbound Web" src_autonomous_system=0 ssl_flow_flags=0 ip_layer=0
event_sec=1543598205 ssl_ticket_id=0000000000000000000000000000000000000000
sinkhole_uuid=00000000-0000-0000-0000-000000000000 dest_ip_country=unknown
ssl_expected_action=Unknown num_ioc=0 dns_ttl=0
ssl_policy_id=00000000000000000000000000000000 ssl_server_name=""
```

Use a regex to extract **all** k=v pairs, then use **Field Name Format Expression** to append an `_XX` suffix to each extracted field:

Regex: `(?<_NAME_0>[\w-]+)="?(?<_VALUE_0>(?<=")[^"]*|\S*)` **Field Name Format Expression**: `${name}_XX`

Results:

Example 2 results

Example 3: Multi-Stage Extraction, Complex Events

This example builds on the syntax in Example 2, to tackle a more complex event structure.

In the right **Sample Data** pane, click **Paste** and insert the following sample:

```
<134>1 2020-12-22T17:06:08Z CORP_INT_NLB CheckPoint 18160 - [action:"Accept";
conn_direction:"Internal"; flags:"4606212"; ifdir:"inbound"; ifname:"bond2.1025";
logid:"0"; loguid:"{0x5fe25889,0x0,0x80ad57cd,0xeb91c0c3}"; origin:"192.168.20.54";
originsicname:"CN=TST32-VSX0-FW-DC-01_tst302-shd,O=CORP-SEC-SHRD-CMA..t7xpcz";
sequencenum:"3"; time:"1608656768"; version:"5"; __policy_id_tag:"product=VPN-1 &
FireWall-1[db_tag={15E4B45A-663B-5B49-BD59-
CD9B9F21AA16};mgmt=SHRDFW01CON;date=1608236862;policy_name=TEST-SHRD-POL\]";
dst:"192.168.79.20"; log_delay:"1608656768"; layer_name:”TEST-SHRD-POL Security";
layer_uuid:"e914c2f3-d7bd-4a77-8e7a-7a5e403447aa"; match_id:"1"; parent_rule:"0";
rule_action:"Accept"; rule_uid:"001ab86d-d201-4b61-9b64-0fede1a9f059"; product:"VPN-
1 & FireWall-1"; proto:"17"; s_port:"45519"; service:"123"; service_id:"ntp-udp";
src:"192.168.79.22"; ]
```

This event is from a CheckPoint Firewall CMA system. With this type of event structure, properly extracting each event field into a separate metadata field requires two-stage processing. So we'll use two Regex Extract Functions.

The first Regex Function splits the event to separate the actual data from the header information. We'll split after the `CheckPoint 18160` string, by capturing everything between the `[` and `]`:

Regex: `\[(?<__fields>.*)\]` **Source**: `_raw`

Next, add this second Regex Extract Function to extract all k=v pairs:

Regex: `(?<_NAME_0>[^ :]+):(?<_VALUE_0>[^;]+);` **Source**: `__fields`

Results:


```
α _raw: <134>1 2020-12-22T17:06:08Z CORP_INT_NLB CheckPoint 18160 - [action:"Accept"; conn_directi
        on:"Internal"; flags:"4606212"; ifdir:"inbound"; ifname:"bond2.1025"; logid:"0"; logui
        d:"{0x5fe25889,0x0,0x80ad57cd,0xeb91c0c3}"; origin:"192.168.20.54"; originsicname:"CN=TST3
        2-VSX0-FW-DC-01_tst302-shd,O=CORP-SEC-SHRD-CMA..t7xpcz"; sequencenum:"3"; time:"160865676
        8"; version:"5"; __policy_id_tag:"product=VPN-1 & FireWall-1[db_tag={15E4B45A-663B-5B49-BD
        59-CD9B9F21AA16};mgmt=SHRDFW01CON;date=1608236862;policy_name=TEST-SHRD-POL\]"; dst:"192.1
        68.79.20"; log_delay:"1608656768"; layer_name:"TEST-SHRD-POL Security"; layer_uuid:"e914c2
        f3-d7bd-4a77-8e7a-7a5e403447aa"; match_id:"1"; parent_rule:"0"; rule_action:"Accept"; rule
        _uid:"001ab86d-d201-4b61-9b64-0fede1a9f059"; product:"VPN-1 & FireWall-1"; proto:"17"; s_p
        ort:"45519"; service:"123"; service_id:"ntp-udp"; src:"192.168.79.22"; ] Show less
# _time: 1608656768
α action: "Accept"
α conn_direction: "Internal"
α cribl_breaker: Break on newlines
α cribl_pipe: asfasfdasfd
α dst: "192.168.79.20"
α flags: "4606212"
α ifdir: "inbound"
α ifname: "bond2.1025"
α layer_name: "TEST-SHRD-POL Security"
α layer_uuid: "e914c2f3-d7bd-4a77-8e7a-7a5e403447aa"
α log_delay: "1608656768"
α logid: "0"
α loguid: "{0x5fe25889,0x0,0x80ad57cd,0xeb91c0c3}"
α match_id: "1"
α origin: "192.168.20.54"
α originsicname: "CN=TST32-VSX0-FW-DC-01_tst302-shd,O=CORP-SEC-SHRD-CMA..t7xpcz"
α parent_rule: "0"
α policy_id_tag: "product=VPN-1 & FireWall-1[db_tag={15E4B45A-663B-5B49-BD59-CD9B9F21AA16}
α product: "VPN-1 & FireWall-1"
α proto: "17"
α rule_action: "Accept"
α rule_uid: "001ab86d-d201-4b61-9b64-0fede1a9f059"
```

Example 3 results

For further examples, see Using Cribl to Analyze DNS Logs in Real Time – Part 2.

9.24. Regex Filter

The Regex Filter Function filters out events based on regex matches.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Regex: Regex to test against. Defaults to empty.

Additional regex: Click **Add Regex** to chain extra regex conditions.

Field: Name of the field to test against the regex. Defaults to `_raw`. Supports nested addressing.

Examples

See Regex Filtering for examples.

9.25. Rename

The Rename Function is designed to change fields' names or reformat their names (e.g., by normalizing names to camelcase). You can use Rename to change specified fields (much like the Eval Function), or for bulk renaming based on a JavaScript expression (much like the Parser Function).

Compared to these alternatives, Rename offers a streamlined way to alter only field names, without other effects.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Optionally, enter a simple description of this step in the Pipeline. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Parent fields: Specify fields whose children will inherit the **Rename fields** and **Rename expression** operations. Supports wildcards. If empty, only top-level fields will be renamed.

> This Function cannot operate on internal fields whose names begin with double underscores (`__`).
>
> Note that you can still use `__e` to access fields within the `(context)` object, as long as those fields do not begin with double underscores. That's because `__e` is a special variable, not a field.

Rename fields: Each row here is a key-value pair that defines how to rename fields. The current name is the key, and the new name is the value. Click **Add Field** to add more rows.

- **Current name**: Original name of the field to rename. You must quote literal identifiers (non-alphanumeric characters such as spaces or hyphens).
- **New name**: New or reformatted name for the field. Here again, you must quote literals.

Rename expression: Optional JavaScript expression whose returned value will be used to rename fields. Use the `name` and `value` global variables to access fields' names/values. Example: `name.startsWith('data') ? name.toUpperCase() : name`. You can access other fields' values via `event.<fieldName>`.

> A single Function can include both **Rename fields** (to rename specified field names) and **Rename expression** (to globally rename fields). However, the **Rename fields** strategy will execute first.

Advanced Settings

Parent field wildcard depth: For wildcards specified in **Parent fields**, sets the maximum depth within events to match and rename fields. Enter `0` to match only top-level fields. Defaults to `5` levels down.

Example

Change the `level` field, and all fields that start with `out`, to all-uppercase.

Example event:

```
{"inEvents": 622,
  "level": "info",
  "outEvents": 311,
  "outBytes": 144030,
  "activeCxn": 0,
  "openCxn": 0,
  "closeCxn": 0,
  "activeEP": 105,
  "blockedEP": 0
}
```

Rename Fields:

Current name: `level`
New name: `LEVEL` **Rename expression**: `name.startsWith('out') ? name.toUpperCase() : name`

Event after Rename:

```
{"inEvents": 622,
  "LEVEL": "info",
  "OUTEVENTS": 311,
  "OUTBYTES": 144030,
  "activeCxn": 0,
  "openCxn": 0,
  "closeCxn": 0,
  "activeEP": 105,
  "blockedEP": 0
}
```

Applications

1. Remove filename prefix `<myPrefix>`:

   Rename expression: `name.replace(/<myPrefix>/, '')`

2. Add a wildcard to rename a set of fields named `json.record[0]`, `json.record[1]`, etc., preserving the variable numbers in the brackets:

   Rename expression: `name.replace(/(json)\.(\w+)/,'MYNEWNAME-$2-$1')`

9.26. Rollup Metrics

The Rollup Metrics Function merges/rolls up frequently generated incoming metrics into more manageable time windows.

> Each Worker Process executes this Function independently on its share of events. For details, see Functions and Shared-Nothing Architecture.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Optional description of this Function's purpose in this Pipeline. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Dimensions: List of data dimensions across which to perform rollups. Supports wildcards. Defaults to `*` wildcard, meaning all original dimensions.

Time window: The time span over which to roll up (aggregate) metrics. Must be a valid time string (e.g., `10s`). Must match pattern: `\d+[sm]$`.

> With high-cardinality data, beware of setting long time windows. Doing can cause high memory consumption and/or lost data, because memory is flushed upon restarts and redeployments.

Gauge update: The operation to use when rolling up gauge metrics. Defaults to **Last**; other options are **Maximum**, **Minimum**, or **Average**.

Examples

Scenario A:

Assume that you have metrics coming in at a rate that is too high. For example, Cribl Stream's internal metrics come in at a 2s interval.

To roll up these metrics to 1-minute granularity, you would set up the Rollup Metrics Function with a **Time Window** value of `60s`.

Scenario B:

Assume that you have metrics coming up with multiple dimensions – e.g. `host`, `source`, `data_center`, and `application`. You want to aggregate these metrics to eliminate some dimensions.

Here, you would configure Rollup Metrics Function with a **Time Window** value that matches the metrics' generation – e.g., `10s`. In the **Dimensions** field, you would remove the default `*` wildcard, and would specify only the dimensions you want to keep – e.g.: `host`, `data_center`.

9.27. Sampling

The Sampling Function filters out events, based on an expression and a sampling rate.

> Each Worker Process executes this Function independently on its share of events. For details, see Functions and Shared-Nothing Architecture.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Sampling rules: Events matching these rules will be sampled at the rates you specify:

- **Filter**: Filter expression matching events to be sampled. Use `true` to match all.
- **Sampling rate**: Enter an integer `N`. (Defaults to `1`.) Sampling will pick `1`/`N` events matching this rule.

How It Works

Setting this Function's **Sampling rate** to `30` would mean that only 1 of every 30 events would be kept.

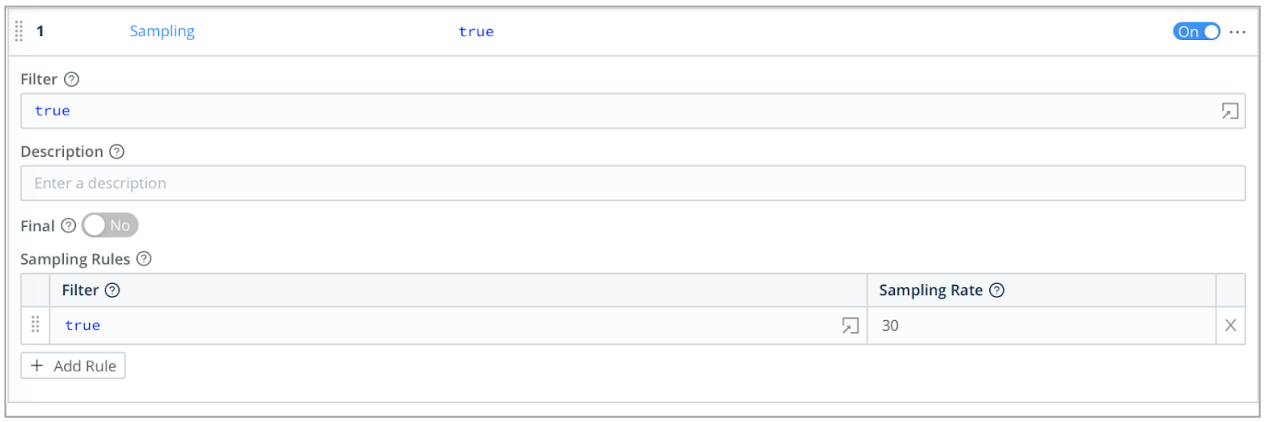

Let's assume that we save this setting, and then capture data from a datagen Source by selecting **Preview** > **Start a Capture** > **Capture**. In the **Capture Sample Data** modal, select: `100` seconds, `100` events, and **As they come in**. Then start the capture, and **Save as Sample File**.

Next, in the **Preview** pane, click **Simple** beside the new file's name. If you then click the **Basic Statistics** (chart) button, you should see that we've kept about 4 of the original 100 events, or close to 1 in 30.

	Full Event Length ⓘ	Number of Fields ⓘ	Number of Events ⓘ
IN	28.82KB	41	100
OUT	1.42KB	38	4
DIFF	↓ -95.08%	↓ -7.32%	↓ -96.00%

Examples

See Sampling for examples.

9.28. Serialize

Use the Serialize Function to serialize an event's content into a predefined format.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Type: Data output format. Defaults to `CSV`. Options:

- **CSV**
- **Extended Log File Format** – Extended Log File Format.
- **Common Log Format** – Common Log Format.
- **Key=Value Pairs** – selecting this type displays additional options:
  - **Clean Fields**: Toggle to `Yes` to clean field names by replacing non-alphanumeric characters with `_`. This will also strip leading and trailing `"` symbols.
  - **Pair delimiter**: Delimiter used to separate `key=value` pairs. Defaults to a single space character. Multiple characters are allowed. Cannot be an equal sign (`=`).
- **JSON Object**
- **Delimited values** – selecting this type displays additional options:
  - **Delimiter**: Delimiter character to split value. If left blank, defaults to comma (`,`). You can also specify pipe (`|`) or tab characters.
  - **Quote char**: Character used to quote literal values. If left blank, defaults to `"`.
  - **Escape char**: Character used to escape delimiter or quote characters. If left blank, defaults to **Quote char**.
  - **Null value**: Field value representing the null value. These fields will be omitted. Defaults to: `-`

Library: Browse Parser/Formatter library.

Fields to serialize: Required for `CSV`, `ELFF`, `CLF`, and `Delimited values` Types. (All other formats support wildcard field lists.)

Source field: Field containing the object to serialize. Leave blank to serialize top-level event fields.

Destination field: Field to serialize the data into. Defaults to `_raw`.

Examples

Scenario A: JSON to CSV

Assume a simple event that looks like this: `{"time":"2019-08-25T14:19:10.240Z","channel":"input","level":"info","message":"initializing input","type":"kafka"}`

We want to serialize these fields: `_time`, `channel`, `level`, and `type` into a single string, in CSV format, stored in a new destination field called `test`.

To properly extract the key-value pairs from this event structure, we'll use a built-in Event Breaker:

1. Copy the above sample event to your clipboard.
2. In the **Preview** pane, select **Paste a Sample**, and paste in the sample event.
3. Under **Select Event Breaker**, choose **ndjson** (newline-delimited JSON), and click **Save as a Sample File**.

Now you're ready to configure the Serialize Function, using the settings below:

Type: `CSV` Fields to Serialize: `_time channel level type` Destination Field: `test` Source Field: [leave empty] **Result**: `test: 1566742750.24,input,info,kafka`

In the new `test` field, you now see the `time`, `channel`, `level`, and `type` keys extracted as top-level fields.

Scenario B: CSV to JSON

Let's assume that a merchant wants to extract a subset of each customer order, to aggregate anonymized order statistics across their customer base. The transaction data is originally in CSV format, but the statistical data must be in JSON.

Here's a CSV header (which we don't want to process), followed by a row that represents one order:

```
orderID,custName,street,city,state,zip 20200622102822,john smith,100 Main St.,Anytown,AK,99911
```

To convert to JSON, we'll need to first parse each field from the CSV to a manipulable field in the Pipeline, which the Serialize Function will be able to reference. In this example, the new manipulable field is `message`.

Use the `Parser` Function:

Filter: `true` Operation mode: `Extract` Type: `CSV` Source field: `_raw` Destination field: `message` List of fields: `orderID custName street city state zip`

Now use the Serialize Function:

Filter: `true` Type: `JSON` Fields to serialize: `city state` Source field: `message` Destination field: `orderStats`

9.29. Suppress

The Suppress Function suppresses events over a time period, based on evaluating a key expression.

> Each Worker Process executes this Function independently on its share of events. For details, see Functions and Shared-Nothing Architecture.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Key expression: Suppression key expression used to uniquely identify events to suppress. For example, `` `${ip}:${port}` `` will use the fields `ip` and `port` from each event to generate the key.

Number to allow: The number of events to allow per time period. Defaults to `1`.

Suppression period (sec): The number of seconds to suppress events after 'Number to allow' events are received. Defaults to `300`.

Drop suppressed events: Specifies if suppressed events should be dropped, or just tagged with `suppress=1`. Defaults to `Yes`, meaning drop.

Advanced Settings

Maximum cache size : The maximum number of keys that can be cached before idle entries are removed. Before changing the default `50000`, contact Cribl Support to understand the implications.

Suppression period timeout: The number of suppression periods of inactivity before a cache entry is considered idle. This defines a multiple of the **Suppression period (sec)** value. Before changing the default `2`, contact Cribl Support to understand the implications.

Num events to trigger cache clean-up: Check cache for idle sessions every N events when cache size exceeds the **Maximum cache size**. Before changing the default `10000`, contact Cribl Support to understand

the implications.

Seeing the Results

If you've enabled **Drop suppressed events**, such events will be omitted from logs as they exit this Function. However, the next event allowed through will include a `suppressCount: N` field, whose `N` value indicates the number of events dropped in the preceding **Suppression period**.

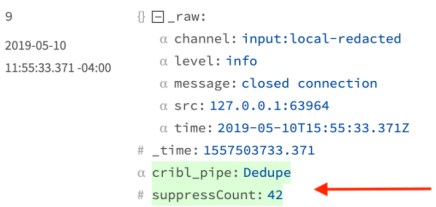

suppressCount shows number of events dropped

Examples

In the examples below, **Filter** is the Function-level Filter expression:

1. Suppress by the value of the `host` field: Filter: `true` Key expression: `host` Number to allow: `1` Suppression period (sec): `30`
   Using a datagen sample as a source, generate at least 100 events over 2 minutes.

   Result: One event per unique `host` value will be allowed in every 30s. Events without a `host` field will **not** be suppressed.

2. Suppress by the value of the `host` and `port` tuple : Filter: `true` Key expression: `` `${host}:${port}` `` Number to allow: `1` Suppression period (sec): `300`

   Result: One event per unique `host:port` tuple value will be allowed in every 300s.

> Suppression will **also** apply to events without a `host` or a `port` field. The reason is that if `field` is not present, `` `${field}` `` results in the literal `undefined`.

3. To **guarantee** that suppression applies **only** to events with `host` and `port`, check for their presence using a Filter: Filter: `host && port!=null` Key expression: `` `${host}:${port}` `` Number to allow: `1` Suppression period (sec): `300`

4. Decorate events that qualify for suppression: Filter: `true` Key expression: `` `${host}:${port}` `` Number to allow: `1` Suppression period (sec): `300` Drop suppressed events: `No`

   Result: No events will be suppressed. But all qualifying events will gain an added field `suppress=1`, which can be used downstream to further transform these events.

> For further use cases, see Cribl's Streaming Data Deduplication with Cribl blog post. For further details on filter usage, see Filters.

9.30. Tee

The Tee Function tees events out to a command of choice, via `stdin`. The output is one JSON-formatted event per line. You can send the events to (for example) a local file on the Cribl Stream worker. This can be useful in verifying the data being processed in a Pipeline.

The Filesystem/NFS Destination offers similar capability, but only after the data leaves the Pipeline. Tee, by comparison, can be inserted at any point in the Pipeline.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Command: Command to execute and receive events (via `stdin`) – one JSON-formatted event per line.

Args: Click **Add Arg** to supply arguments to the command.

Restart on exit: Restart the process if it exits and/or we fail to write to it. Defaults to `Yes`.

Environment variables: Environment variables to set or overwrite. Click **Add Variable** to add key-value pairs.

Communication Protocol

Data is passed to the command through its `stdin`, using the following protocol:

- First line: Metadata serialized in JSON, containing the following fields:
  - **format**: Serialization format for event. Defaults to `JSON`.
  - **conf**: Full Function configuration.
- Remaining: Payload.

Examples

Assume that we are parsing PANOS Traffic logs, and want to see how they look at a particular step in the processing Pipeline We'll assume that the `Parser` Function is already in place, so we'll insert the Tee Function at any (arbitrary) later point in the Pipeline.

Scenario A:

The Tee Function itself requires only that we define the **Command** field. In this particular example, that **Command** will be `tee` itself.

We've also clicked **Add Arg**, to specify a local output file in the resulting **Args** field. (A file path would normally be the first argument to a `tee` command executed from the command line. The Cribl Stream user must have write permission on the specified file path.)

Command: `tee`

Args: `/opt/cribl/foo.log`

In this first scenario, assume that we have the `Parser` configured to parse, but not keep any fields. After changes are deployed and PANOS logs are received, if we tail `foo.log`, we'd see the following:

```
Line 1: {"format":"json","conf":{"restartOnExit":true,"env":{},"command":"tee","args":
["/opt/cribl/foo.log"]}

Line 2: {"_raw":"Oct 09 10:19:15 DMZ-internal.nsa.gov 1,2019/10/09
10:19:15,001234567890002,TRAFFIC,drop,2304,2019/10/09
10:19:15,209.118.103.150,160.177.222.249,0.0.0.0,0.0.0.0,InternalServer,,,not-
applicable,vsys1,inside,z1-FW-Transit,ethernet1/2,,All traffic,2019/10/09
10:19:15,0,1,63712,443,0,0,0x0,udp,deny,60,60,0,1,2019/10/09
10:19:15,0,any,0,0123456789,0x0,Netherlands,10.0.0.0-10.255.255.255,0,1,0,policy-
deny,0,0,0,0,,DMZ-internal,from-policy,,,0,,0,,N/A,0,0,0,0,1202585d-b4d5-5b4c-aaa2-
d80d77ba456e,0","_time":1593185574.663,"host":"127.0.0.1"}
```

In Line 2 above, note that the `_raw` field makes up most of the contents, with only the `_time` and `host` fields added.

Scenario B:

Assume that we use the Tee Function, using the same **Command** and arguments, but we've modified the `Parser` Function to retain five fields: `receive_time`, `source_port`, `destination_port bytes_received`,

and `packets_received`.

This time, if we tail `foo.log`, we'll see something like the following. If you compare this output to the previous output example, you'll notice the five fields appended to this event:

```
Line 3: {"_raw":"Oct 09 10:19:15 DMZ-internal.nsa.gov 1,2019/10/09
10:19:15,001234567890002,TRAFFIC,drop,2304,2019/10/09
10:19:15,209.118.103.150,160.177.222.249,0.0.0.0,0.0.0.0,InternalServer,,,not-
applicable,vsys1,inside,z1-FW-Transit,ethernet1/2,,All traffic,2019/10/09
10:19:15,0,1,63712,443,0,0,0x0,udp,deny,60,60,0,1,2019/10/09
10:19:15,0,any,0,0123456789,0x0,Netherlands,10.0.0.0-10.255.255.255,0,1,0,policy-
deny,0,0,0,0,,DMZ-internal,from-policy,,,0,,0,,N/A,0,0,0,0,1202585d-b4d5-5b4c-aaa2-
d80d77ba456e,0","_time":1593185606.965,"host":"127.0.0.1","receive_time":"2019/10/09
10:19:15","source_port":"63712","destination_port":"443","bytes_received":"0","packets_r
eceived":"0"}
```

> In this Function's **Command** field, you can specify commands other than `tee` itself. For example: By using `nc` as the command, and specifying `localhost` and a port number (as two separate arguments), you'll see event data being received via `nc` on the specified port.

9.31. Trim Timestamp

The Trim Timestamp Function removes timestamp patterns from events, and (optionally) stores them in a specified field.

This Function looks for a timestamp pattern that exists between the characters indicated by numeric `timestartpos` and `timeendpos` fields. It removes `timestartpos` and `timeendpos` along with the timestamp pattern.

> The Trim Timestamp Function, in current Cribl Stream versions, removes timestamps only from events whose `timestartpos` value is set to `0`. If you need to strip timestamps from arbitrary postions within events, instead use an Eval Function.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description about this step in the Pipeline. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Field name: Name of field in which to save the timestamp. (If empty, timestamp will not be saved to a field.)

Example

Remove the timestamp pattern (indicated by `timestartpos` and `timeendpos`) from `_raw`, and stash it in a field called `time_field`.

Field name: `time_field`

Example event before:

```
{"_raw": "2020-05-22 16:32:11,359 Event [Event=UpdateBillingProvQuote,
timestamp=1581426279, properties={JMSCorrelationID=NA, JMSMessageID=ID:ESP-
PD.D2BB2D95F857B:FA323D61, orderType=RatePlanFeatureChange, quotePriority=NORMAL}",
"timestartpos":0,
"timeendpos":23
}
```

To create this example payload, we selected **Sample Data** > **Paste**, pasted the `_raw` field's original contents into the resulting modal, and then added the two required position fields:

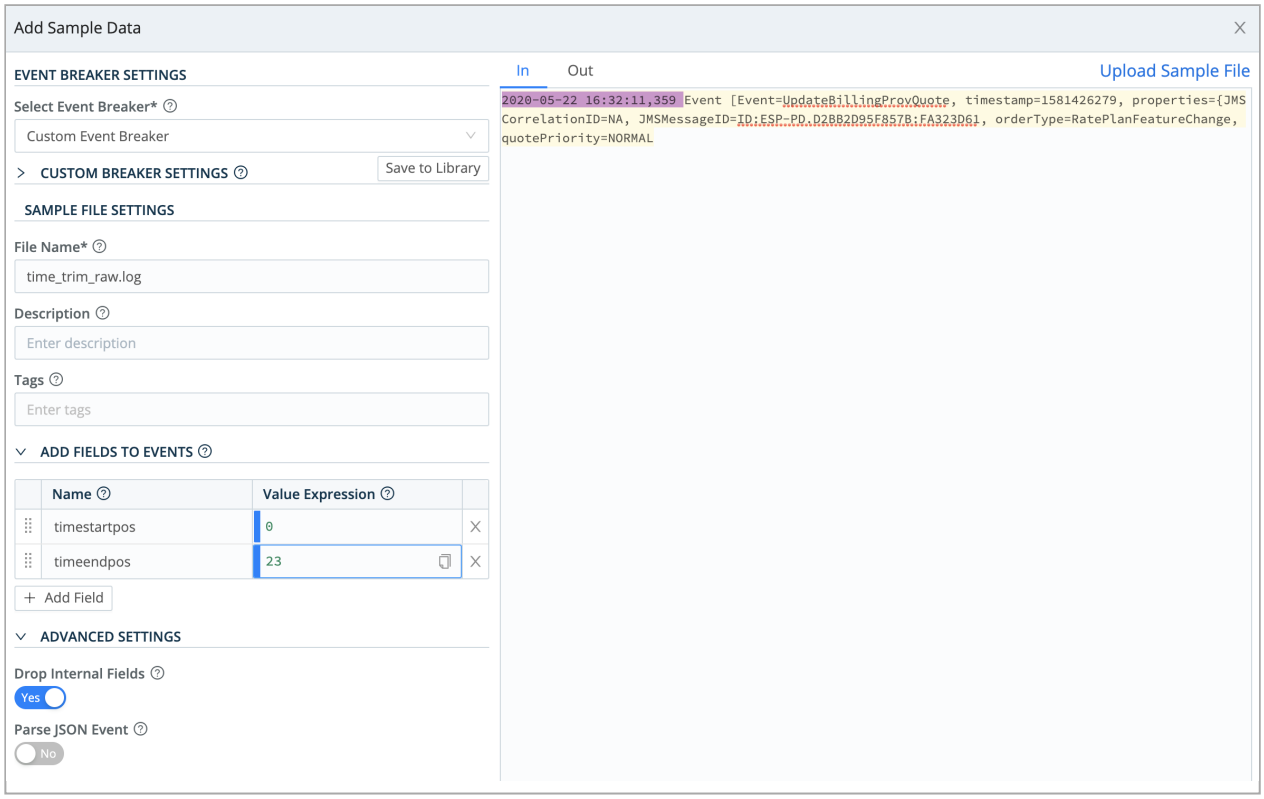

Example event setup

Example event after:

```
{"_raw": "Event [Event=UpdateBillingProvQuote, timestamp=1581426279, properties=
{JMSCorrelationID=NA, JMSMessageID=ID:ESP-PD.D2BB2D95F857B:FA323D61,
orderType=RatePlanFeatureChange, quotePriority=NORMAL}",
"time_field":"2020-05-22 16:32:11,359"
}
```

In the Preview pane's **OUT** view, the original timestamp has been removed from `_raw`, and lifted into the new `time_field` we specified in the Function. The `timestartpos` and `timeendpos` fields have been removed.

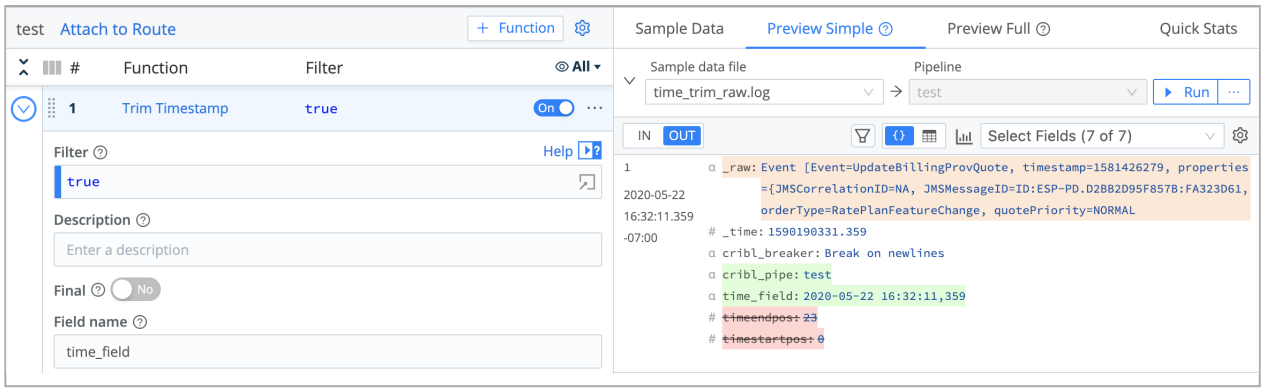

Example event, saved and transformed

9.32. Unroll

The Unroll Function accepts an array field – or an expression to evaluate an array field – and breaks/unrolls the array into individual events.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Source field expression: Field in which to find/calculate the array to unroll. E.g.: `_raw`, `_raw.split(/\n/)`. Defaults to `_raw`.

Destination field: Field (within the destination event) in which to place the unrolled value. Defaults to `_raw`.

Example

Assume we want to break/unroll each line of this event:

```
USER        PID %CPU %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND
root          1  0.0  0.5  38000  5356 ?        Ss    2018   2:02
/lib/systemd/systemd --system --deserialize 28
root          2  0.0  0.0      0     0 ?        S     2018   0:00 [kthreadd]
root          3  0.0  0.0      0     0 ?        S     2018   1:51 [ksoftirqd/0]
root          5  0.0  0.0      0     0 ?        S<    2018   0:00 [kworker/0:0H]
root          7  0.0  0.0      0     0 ?        S     2018   3:55 [rcu_sched]
root          8  0.0  0.0      0     0 ?        S     2018   0:00 [rcu_bh]
```

Settings

Source field expression: `_raw.split(/\n/)`

> The `split()` JavaScript method breaks `_raw` into an ordered set of substrings/values, puts these

values into an array, and returns the array.

Destination field: `_raw`

```
Event 1:
USER       PID %CPU %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND

Event 2:
root         1  0.0  0.5  38000  5356 ?        Ss    2018   2:02
/lib/systemd/systemd --system --deserialize 28

Event 3:
root         2  0.0  0.0      0     0 ?        S     2018   0:00 [kthreadd]

Event 4:
root         3  0.0  0.0      0     0 ?        S     2018   1:51 [ksoftirqd/0]

Event 5:
root         5  0.0  0.0      0     0 ?        S<    2018   0:00 [kworker/0:0H]

Event 6:
root         7  0.0  0.0      0     0 ?        S     2018   3:55 [rcu_sched]

Event 7:
root         8  0.0  0.0      0     0 ?        S     2018   0:00 [rcu_bh]
```

9.33. XML Unroll

The XML Unroll Function accepts a proper XML event with a set of elements, and converts the elements into individual events.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Unroll elements regex: Path to the array to unroll. E.g.: `^root\.child\.ElementToUnroll$`

Copy elements regex: Regex matching elements to copy into each unrolled event. E.g.: `^root\.(childA|childB|childC)$`

Unroll index field: Cribl Stream will add a field with this name, containing the 0-based index at which the element was located within the event. In Splunk, this will be an index-time field. Supports nested addressing. Name defaults to `unroll_idx`.

Pretty print: Whether to pretty print the output XML.

Examples

Assume that the following sample is ingested as a single event:

sample.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<Parent>
    <myID>123456</myID>
    <branchLocation>US</branchLocation>
    <Child>
        <state>NY</state>
        <city>New York</city>
    </Child>
    <Child>
        <state>NJ</state>
        <city>Edgewater</city>
    </Child>
    <Child>
        <state>CA</state>
        <city>Oakland</city>
    </Child>
    <Child>
        <state>CA</state>
        <city>San Francisco</city>
    </Child>
</Parent>
```

> If you insert this sample using **Preview** > **Add a Sample** > **Paste a Sample**, adjust Event Breaker settings to add the sample as a single event. One way to do this is to add a regex Event Breaker that (by design) will not match anything present in the sample. For example: `/[\n\r]+donotbreak(?!\s)/`. In current Cribl Stream versions, you can also use the built-in **Do Not Break** Ruleset.

Set up the XML Unroll Function using these settings:

Unroll elements regex: `^Parent\.Child$` **Copy elements regex**: `^Parent\.(myID|branchLocation)$`

Output 4 Events:

Resulting Events

```
# Event 1
<?xml version="1.0"?>
<Child>
  <myID>123456</myID>
  <branchLocation>US</branchLocation>
  <state>NY</state>
  <city>New York</city>
</Child>

# Event 2
<?xml version="1.0"?>
<Child>
  <myID>123456</myID>
  <branchLocation>US</branchLocation>
  <state>NJ</state>
  <city>Edgewater</city>
</Child>

# Event 3
<?xml version="1.0"?>
<Child>
  <myID>123456</myID>
  <branchLocation>US</branchLocation>
  <state>CA</state>
  <city>Oakland</city>
</Child>

# Event 4
<?xml version="1.0"?>
<Child>
  <myID>123456</myID>
  <branchLocation>US</branchLocation>
  <state>CA</state>
  <city>San Francisco</city>
</Child>
```

9.34. Prometheus Publisher (Deprecated)

> This Function was deprecated as of Cribl Stream 3.0, and has been removed from Cribl Stream as of v.4.0. Please instead use the Prometheus Destination to send metrics to Prometheus-compatible endpoints.

The Prometheus Publisher Function allows for metrics to be published to a Prometheus-compatible metrics endpoint. These can be upstream metrics received by Cribl Stream, or metrics derived from the output of Cribl Stream's `Publish Metrics` or `Aggregation` Functions. A Prometheus instance is responsible for collecting the metrics at that endpoint, and for performing its own processing of the metric data.

In the current Cribl Stream version, the endpoint is: `http://<worker_node_IP>:<api-port>/metrics`. Within Cribl Stream, that endpoint redirects from `http://<worker_node_IP>:9000/metrics` to `http://<worker_node_IP>:9000/api/v1/metrics`.

> If used, this Function **must** follow any Publish Metrics or Aggregations Functions within the same Pipeline. This is to ensure that any data **not** originating from a metrics input is transformed into metrics format.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Fields to publish: Wildcard list of fields to publish to the Prometheus endpoint.

Advanced Settings

Batch write interval: How often, in milliseconds, the contents should be published. Defaults to `5000`.

Passthrough mode: If set to **No** (the default), overrides the **Final** setting, and suppresses output to downstream Functions' Destinations. Toggle to **Yes** to allow events to flow to consumers beyond the

Prometheus endpoint. In effect, when previewing the pipeline output what you'll see is your event fields will have strikethrough font applied to them. This does not mean the Prometheus function is not matching your events but rather indicative of the Passthrough being disabled.

Update mode: On the default `No` setting, suppresses output to downstream Functions' Destinations. (This overrides the **Final** setting.) Toggle to `Yes` to allow events to flow to consumers beyond the Prometheus endpoint.

Example

This example uses the same PANOS sample data as the Publish Metrics Function, and is similarly preceded in a Pipeline by a Parser Function that extracts fields from the PANOS log.

Filter: Set as appropriate. **Fields to publish**: Set as appropriate. We'll use the default of `*` for this example. **Advanced settings**: Accept defaults.

After committing and deploying changes, you should be able to use a `curl` command (-L needed to follow the redirect mentioned above) to verify that metrics are being published, just a few seconds after data is ingested on an idle system.

curl output

```
$ curl -L http://<worker_node_IP>:9000/metrics
# TYPE perf_192_168_1_248_bytes_sent counter
metric_192_168_1_248_bytes_sent
{destination_ip="160.177.222.249",inbound_interface="ethernet1/2",destination_port="443
60

# TYPE perf_192_168_1_248_bytes_rcvd counter
metric_192_168_1_248_bytes_rcvd
{destination_ip="160.177.222.249",inbound_interface="ethernet1/2",destination_port="443
0

# TYPE perf_192_168_1_248_pkts_sent counter
metric_192_168_1_248_pkts_sent
{destination_ip="160.177.222.249",inbound_interface="ethernet1/2",destination_port="443
1

# TYPE perf_192_168_1_248_pkts_rcvd counter
metric_192_168_1_248_pkts_rcvd
{destination_ip="160.177.222.249",inbound_interface="ethernet1/2",destination_port="443
0
```

Now, we need to have Prometheus scrape the metrics. In this very basic example, you can add the target endpoint to the `prometheus.yml` file, under the `scrape_configs` -> `static_configs` section. Specify the endpoint in `IP:port` syntax, because Prometheus assumes (and requires) `/metrics` for all endpoints.

Restart Prometheus. Within just a few seconds, you should be able to use its query interface to retrieve metrics published by Cribl Stream.

9.35. Reverse DNS (deprecated)

The Reverse DNS Function resolves hostnames from a numeric IP address, using a reverse DNS lookup.

> This Function was deprecated as of v.2.4, and has been removed from Cribl Stream as of v.4.0. Please instead use the DNS Lookup Function's reverse lookup feature.

Usage

Filter: Filter expression (JS) that selects data to feed through the Function. Defaults to `true`, meaning it evaluates all events.

Description: Simple description of this Function. Defaults to empty.

Final: If toggled to `Yes`, stops feeding data to the downstream Functions. Defaults to `No`.

Lookup Fields

Lookup field name: Name of the field containing the IP address to look up.

> If the field value is not in IPv4 or IPv6 format, the lookup is skipped.

Output field name: Name of the field in which to add the resolved hostname. Leave blank to overwrite the lookup field.

Reload period (minutes): How often to refresh the DNS cache. Use `0` to disable refreshes. Defaults to `60` minutes.

Example

Lookup field name: `dest_ip` **Output field name**: `dest_host` **Result**: See the `dest_ip` field, and the newly created `dest_host` field, in the events.

1
2020-06-29 12:51:03.551 -07:00
α _raw: rec_type=71 rec_type_simple=RNA dest_port=443 snmp_out=0 netflow_src=00000000-0000-0000-0000-000000000000 ssl_server_cert_status="Not Checked" dest_ip=8.8.8.8 sec_intel_event=No mac_address=00:00:0... Show more
_time: 1593460263.551
α app_proto: HTTPS
α client_app: SSL client
α client_version:
α connection_id: 21378
α cribl_breaker: Break on newlines
α cribl_pipe: rev_dns
α dest_autonomous_system: 0
α dest_bytes: 3746
α dest_host: dns.google
α dest_ip: 8.8.8.8

10. Sources

Cribl Stream can receive continuous data input from various Sources, including Splunk, HTTP, Elastic Beats, Kinesis, Kafka, TCP JSON, and many others. Sources can receive data from either IPv4 or IPv6 addresses.

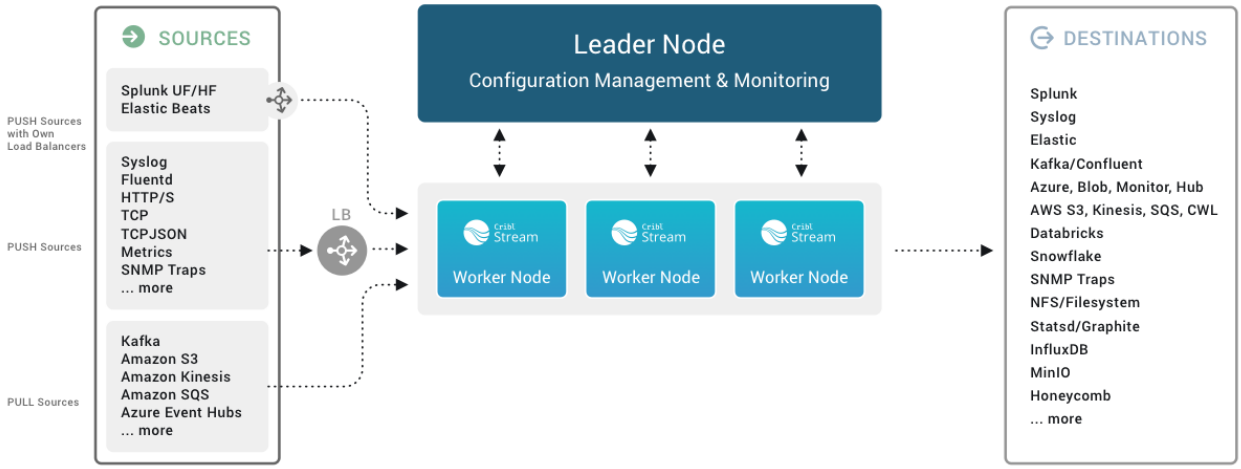

Push and Pull Sources

COLLECTOR Sources

Collectors, the top group of Sources in Cribl Stream's UI, are designed to ingest data **intermittently** – in on-demand bursts ("ad hoc collection"), or on preset schedules, or by "replaying" data from local or remote stores:

- Amazon S3
- Azure Blob Storage
- Database
- File System/NFS
- Google Cloud Storage
- Health Check
- REST/API Endpoint
- Script
- Splunk Search

For background and instructions on using Collectors, see:

- Collectors

- Scheduling and Running
- Job Limits

PUSH Sources

Supported data Sources that **send** to Cribl Stream:

- Amazon Kinesis Firehose
- Datadog Agent
- Elasticsearch API
- Grafana
- HTTP/S (Bulk API)
- Raw HTTP/S
- Loki
- Metrics
- OpenTelemetry (OTel)
- Prometheus Remote Write
- SNMP Trap
- Splunk HEC
- Splunk TCP
- Syslog
- TCP JSON
- TCP (Raw)
- UDP (Raw)
- Windows Event Forwarder

Data from these Sources is normally sent to a set of Cribl Stream Workers through a load balancer. Some Sources, such as Splunk forwarders, have native load-balancing capabilities, so you should point these directly at Cribl Stream.

PULL Sources

Supported Sources that Cribl Stream **fetches** data from:

- Amazon Kinesis Streams
- Amazon SQS

- Amazon S3
- Google Cloud Pub/Sub
- Azure Event Hubs
- Azure Blob Storage
- Confluent Cloud
- CrowdStrike FDR
- Office 365 Services
- Office 365 Activity
- Office 365 Message Trace
- Prometheus Scraper
- Kafka
- Amazon MSK
- Splunk Search

System and Internal Sources

Sources that supply information generated by Cribl Stream about itself, or from files that it monitors; or, that move data among Workers within your Cribl deployment.

- AppScope
- Cribl Internal
- Cribl HTTP
- Cribl TCP
- Datagen
- Exec
- File Monitor
- System Metrics

Configuring and Managing Sources

For each Source *type*, you can create multiple definitions, depending on your requirements.

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select the desired Source. Next, click either **Add Destination** or (if

displayed) **Select Existing**.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select the desired Source. Next, click **New Source** to open a **New Source** modal.

To edit any Source's definition in a JSON text editor, click **Manage as JSON** at the bottom of the **New Source** modal, or on the **Configure** tab when editing an existing Source. You can directly edit multiple values, and you can use the **Import** and **Export** buttons to copy and modify existing Source configurations as `.json` files.

Capturing Source Data

To capture data from a single enabled Source, you can bypass the Preview pane, and instead capture directly from a **Manage Sources** page. Just click the **Live** button beside the Source you want to capture.

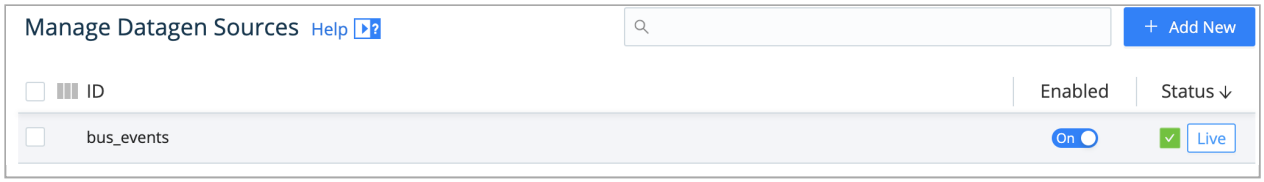

Source > Live button

You can also start an immediate capture from within an enabled Source's config modal, by clicking the modal's **Live Data** tab.

Source modal > Live Data tab

Preconfigured Sources

To accelerate your setup, Cribl Stream ships with several common Sources configured for typical listening ports, but not switched on. Open, clone (if desired), modify, and enable any of these preconfigured Sources to get started quickly:

- **Syslog** – TCP Port 9514, UDP Port 9514
- **Splunk TCP** – Port 9997
- **Splunk HEC** – Port 8088
- **TCP JSON** – Port 10070
- **TCP** – Port 10060
- **HTTP** – Port 10080
- **Elasticsearch API** – Port 9200
- **SNMP Trap** – Port 9162
- **Cribl Internal** > **CriblLogs** – Internal
- **Cribl Internal** > **CriblMetrics** – Internal

Backpressure Behavior and Persistent Queues

On the Destination side, you can configure how each Cribl Stream output will respond to a **backpressure** situation – a situation where its in-memory queue is overwhelmed with data.

All Destinations default to **Block** mode, in which they will refuse to accept new data until the downstream receiver is ready. Here, Cribl Stream will back-propagate block signals through the Source, all the way back to the sender (if it supports backpressure, too).

All Destinations also support **Drop** mode, which will simply discard new events until the receiver is ready.

Persistent Queues

Several Destinations also support a **Persistent Queue** option to minimize data loss. Here, the Destination will write data to disk until the receiver is ready. Then it will drain the disk-buffered data in FIFO (first in, first out) order. You can also define fallback behavior when the queue's allotted disk space is full.

Push Sources' config modals provide a corresponding **Persistent Queue Settings** option for inbound streaming data. When you enable this, you can choose between two trigger conditions: **Smart** Mode will engage PQ upon backpressure from Destinations, whereas **Always On** Mode will use PQ as a buffer for **all** events.

For details about all the above modes and options, see Persistent Queues.

> Persistent Queues, when engaged, slow down data throughput somewhat. It is redundant to enable PQ on a Source whose upstream sender is configured to safeguard events in its own disk buffer.

Other Backpressure Options

The S3 Source provides a configurable **Advanced Settings > Socket timeout** option, to prevent data loss (partial downloading of logs) during backpressure delays.

Diagnosing Backpressure Errors

When backpressure affects HTTP Sources (Splunk HEC, HTTP/S, Raw HTTP/S, and Kinesis Firehose), Cribl Stream internal logs will show a `503` error code.

10.1. Collector Sources

Unlike other Cribl Stream Sources, Collectors are designed to ingest data intermittently, rather than continuously. You can use Collectors to dispatch on-demand (ad hoc) collection tasks, which fetch or "replay" (re-ingest) data from local or remote locations.

Collectors also support **scheduled** periodic collection jobs – recurring tasks that can make batch collection of stored data more like continual processing of streaming data. You configure Collectors prior to, and independently from, your configuration of ad hoc versus scheduled collection runs.

Collectors are integral to Cribl Stream's larger story about optimizing your data throughput. Send full-fidelity log and metrics data ("everything") to low-cost storage, and then use Cribl Stream Collectors to selectively route ("replay") only needed data to your systems of analysis.

Collector Resources

- Video introduction to Data Collection, in < 2 minutes.
- Video introduction to Data Collection Scheduling, in < 2 minutes.
- Free, interactive try-out of Collectors in Cribl's Data Collection & Replay sandbox.
- Using Collectors guides: S3 Storage and Replay | REST API Collectors | Microsoft Graph API Collection | ServiceNow API Collection | Creating a Custom Collector.

Collector Types

Cribl Stream currently provides the following Collector options:

- Azure Blob – enables data collection and replay from Azure Blob Storage objects.
- Database – enables data collection from database management systems like MySQL and SQL Server.
- File System/NFS – enables data collection and replay from local or remote filesystem locations.
- Google Cloud Storage – enables data collection and replay from Google Cloud Storage buckets.
- Health Check – monitors the availability of system endpoints.
- REST/API Endpoint – enables data collection and replay via REST API calls. Provides four Discover options, to support progressively more complex (and dynamic) item enumerations.
- S3 – enables data collection and replay from Amazon S3 buckets or S3-compatible stores.
- Script – enables data collection and replay via custom scripts.

- Splunk Search – enables data collection and replay from Splunk queries. Supports both simple and complex queries, as well as real-time searches.

If you are exploring Collectors for the first time, the File System/NFS Collector is the simplest to configure, while the REST/API Collector offers the most complex configuration options.

How Do Collectors Work

You can configure a Cribl Stream Node to retrieve data from a remote system by selecting **Manage** from the top nav, then a **Worker Group** to configure. Next, click **Data** > **Sources** > **Collectors**. Data collection is a multi-step process:

First, define a Collector instance. In this step, you configure **collector-specific settings** by selecting a Collector type and pointing it at a specific target. (E.g., the target will be a directory if the type is File System, or an S3 bucket/path if the type is Amazon S3.)

Next, schedule or manually run the Collector. In this step, you configure either scheduled-job–specific or run-specific settings – such as the run Mode (Preview, Discovery, or Full Run), the Filter expression to match the data against, the time range, etc.

When a Node receives this configuration, it prepares the infrastructure to execute a collection job.
A collection job is typically made up of one or more tasks that: discover the data to be fetched; fetch data that match the run filter; and finally, pass the results either through the Routes or (optionally) into a specific Pipeline and Destination.

> Select **Monitoring** > **System** > **Job Inspector** to see the results of recent collection runs. You can filter the display by Worker Group (in distributed deployments), and by run type and run timing.

Advanced Collector Configuration

To edit any Collector's definition in a JSON text editor, click **Manage as JSON** at the bottom of the **New Collector** modal, or on the **Configure** tab when editing an existing Collector. You can directly edit multiple values, and you can use the **Import** and **Export** buttons to copy and modify existing Collector configurations as `.json` files.

Scheduled Collection Jobs

You might process data from inherently non-streaming sources, such as REST endpoints, blob stores, etc. Scheduled jobs enable you to emulate a data stream by scraping data from these sources in batches, on a set interval.

You can schedule a specific job to pick up new data from the source – data that hadn't been picked up in previous invocations of this scheduled job. This essentially transforms a non-streaming data source into a streaming data source.

Collectors in Distributed Deployments

In a distributed deployment, you configure Collectors at the Worker Group level, and Worker Nodes execute the tasks. However, the Leader Node oversees the task distribution, and tries to maintain a fair balance across jobs.

When Workers ask for tasks, the Leader will normally try to assign the next task from a job that has the least tasks in progress. This is known as "Least-In-Flight Scheduling," and it provides the fairest task distribution for most cases. If desired, you can change this default behavior by opening **Group Settings** > **General Settings** > **Limits** > **Jobs**, and then setting **Job dispatching** to **Round Robin**.

> More generally: In a distributed deployment, you configure Collectors and their jobs on individual Worker Groups. But because the Leader manages Collectors' state, if the Leader instance fails, Collection jobs will fail as well. (This is unlike other Sources, where Worker Groups can continue autonomously receiving incoming data if the Leader goes down.)

Monitoring and Inspecting Collection Jobs

Select **Monitoring** > **System** > **Job Inspector** to view and manage pending, in-flight, and completed collection jobs and their tasks.

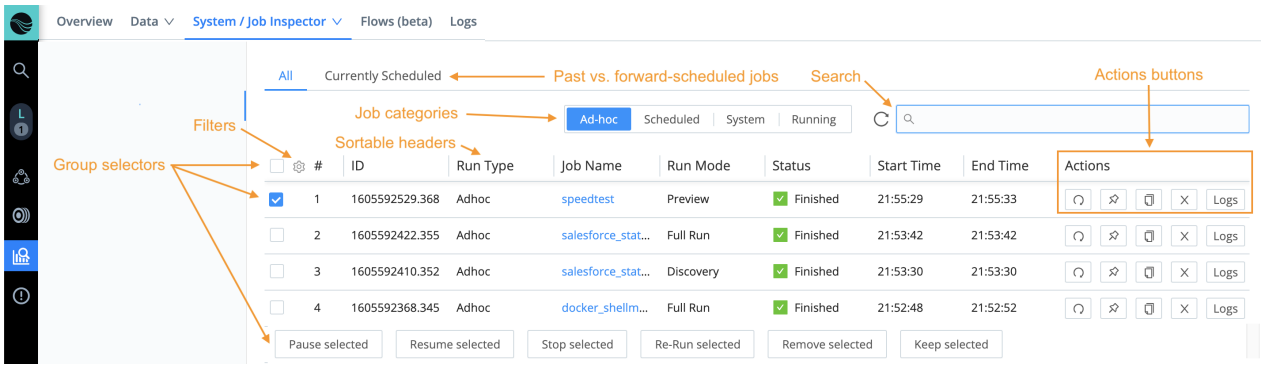

Here are the options available on the Job Inspector page:

- **All** vs. **Currently Scheduled** tabs: Click **Currently Scheduled** to see jobs forward-scheduled for future execution – including their cron schedule details, last execution, and next scheduled execution. Click **All** to see all jobs initiated in the past, regardless of completion status.
- Job categories (buttons): Select among **Ad hoc**, **Scheduled**, **System**, and **Running**. (At this level, **Scheduled** means scheduled jobs already running or finished.)
- Filters: Click the gear icon to open a drop-down with multiple options to filter the jobs shown within your selected category.
- Group selectors: Select one or more check boxes to display the **Pause**, **Resume**, etc., buttons shown along the bottom.
- Sortable headers: Click any column to reverse its sort direction.
- Search bar: Click to filter displayed jobs by arbitrary strings.
- Action buttons: For finished jobs, the icons (from left to right) indicate: **Re-run**; **Keep job artifacts**; **Copy job artifacts**; **Delete job artifacts**; and **Display job logs** in a modal. For running jobs, the options (again from left to right) are: **Pause**; **Stop**; **Copy job artifacts**; **Delete job artifacts**; and **Live** (show collection status in a modal).

Last updated by: Dritan Bitincka

10.1.1. Azure Blob Storage

Cribl Stream supports collecting data, and replaying specific events, both from Azure Blob Storage, and from Azure Data Lake Storage Gen2, which implements a hierarchical namespace over blob data. This page covers how to configure the Collector.

Configuring an Azure Blob Storage Collector

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Sources**, then select **Collectors** > **Azure Blob** from the **Manage Sources** page's tiles or left nav. Click **Add Collector** to open the **Azure Blob** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.
>
> Collector Sources currently cannot be selected or enabled in the QuickConnect UI.
>
> Cribl Stream supports data collection and replay from Azure's **hot** and **cool** access tiers, but not from the **archive** tier – whose stated retrieval lag, up to several hours, cannot guarantee data availability.

Collector Settings

The Collector Settings determine how data is collected before processing.

Collector ID: Unique ID for this Collector. E.g., `azure_42-a`.

Auto-populate from: Optionally, select a predefined Destination that will be used to auto-populate Collector settings. Useful when replaying data.

Container name: Container to collect from. This value can be a constant, or a JavaScript expression that can be evaluated only at init time. E.g., referencing a Global Variable: `myBucket-${C.vars.myVar}`.

> Container names can include only lowercase letters, numbers, and/or hyphens (-). This restriction is imposed by Azure.

Authentication

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Use this default option to enter your Azure Storage connection string directly. Exposes a **Connection string** field for this purpose. (If left blank, Cribl Stream will fall back to `env.AZURE_STORAGE_CONNECTION_STRING`.)

- **Secret**: This option exposes a **Connection string (text secret)** drop-down, in which you can select a stored secret that references an Azure Storage connection string. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. A **Create** link is available if you need to generate a new secret.

Optional Settings

Path: The directory from which to collect data. Templating is supported (e.g., `myDir/${datacenter}/${host}/${app}/`). Time-based tokens are also supported (e.g., `myOtherDir/${_time:%Y}/${_time:%m}/${_time:%d}/`). More on templates and Filters.

Path extractors: Extractors allow using template tokens as context for expressions that enrich discovery results.

Click **Add Extractor** to add each extractor as a key-value pair, mapping a **Token** name on the left (of the form `/<path>/${<token>}`) to a custom JavaScript **Extractor expression** on the right (e.g., `{host: value.toLowerCase()}`).

Each expression accesses its corresponding `<token>` through the `value` variable, and evaluates the token to populate event fields. Here is a complete example:

TOKEN	EXPRESSION	MATCHED VALUE	EXTRACTED RESULT
`/var/log/${foobar}`	`foobar: {program: value.split('.')[0]}`	`/var/log/syslog.1`	`{program: syslog, foobar: syslog.1}`

Recursive: If set to `Yes` (the default), data collection will recurse through subdirectories.

Include metadata: With the default `Yes` setting, Cribl Stream will include Azure Blob metadata in collected events (at `__collectible.metadata`).

Include tags: With the default `Yes` setting, Cribl Stream will include Azure Blob tags in collected events (at `__collectible.tags`). To prevent errors, toggle this to `No` when using a Shared Access Signature connection string, especially on storage accounts that do not support Azure Blob index tags.

Max batch size (objects): Maximum number of metadata objects to batch before recording as results. Defaults to `10`. To override this limit in the Collector's Schedule/Run modal, use Advanced Settings > Upper task bundle size.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Connection String Format

Either authentication method uses an Azure Storage connection string in this format:
`DefaultEndpointsProtocol=[http|https];AccountName=<your-account-name>;AccountKey=<your-account-key>`

A fictitious example, using Microsoft's recommended HTTPS option, is:
`DefaultEndpointsProtocol=https;AccountName=storagesample;AccountKey=12345678...32`

Result Settings

The Result Settings determine how Cribl Stream transforms and routes the collected data.

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default

`10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Result Routing

Send to Routes: If set to `Yes` (the default), Cribl Stream will send events to normal routing and event processing. Toggle to `No` to select a specific Pipeline/Destination combination. The `No` setting exposes these two additional fields:

- **Pipeline**: Select a Pipeline to process results.
- **Destination**: Select a Destination to receive results.

The default `Yes` setting instead exposes this field:

- **Pre-processing Pipeline**: Pipeline to process results before sending to Routes. Optional.

This field is always exposed:

- **Throttling**: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

> You might disable **Send to Routes** when configuring a Collector that will connect data from a specific Source to a specific Pipeline and Destination. This keeps the Collector's configuration self-contained and separate from Cribl Stream's routing table for live data – potentially simplifying the Routes structure.

Advanced Settings

Advanced Settings enable you to customize post-processing and administrative options.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Time to live: How long to keep the job's artifacts on disk after job completion. This also affects how long a job is listed in **Job Inspector**. Defaults to `4h`.

Remove Discover fields: List of fields to remove from the Discover results. This is useful when discovery returns sensitive fields that should not be exposed in the Jobs user interface. You can specify wildcards (such as `aws*`).

Resume job on boot: Toggle to `Yes` to resume ad hoc collection jobs if Cribl Stream restarts during the jobs' execution.

Replay

See these resources that demonstrate how to replay data from object storage. Both are written around Amazon S3-compatible stores, but the general principles apply to Azure blobs as well:

- Data Collection & Replay sandbox: Step-by-step tutorial, in a hosted environment, with all inputs and outputs preconfigured for you. Takes about 30 minutes.
- Using S3 Storage and Replay: Guided walk-through on setting up your own replay.

How the Collector Pulls Data

In the Discover phase, the first available Worker returns the list of files to the Leader Node. In the Collect phase, Cribl Stream spreads the list of files to process spread across 1..N Workers, based on file size, with the goal of distributing tasks as evenly as possible across Workers. These Workers then stream in their assigned files from the remote Azure Blob Storage location.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Troubleshooting

When permissions are correct on the object store, and events are reaching the Collector, the Preview pane will show events and the Job Inspector will show an **Events collected** count.

However, if previewing returns no events and throws no error, first check your Filter expression by previewing without it (e.g., simplify the Filter expression to `true`). Then check the Job Inspector: If the **Total size** is

greater than `0`, and the **Received size** is `NA` or `0`, make sure you have list and read permissions on the object store.

Last updated by: Dritan Bitincka

10.1.2. Database

You can configure Database Collectors to pull events from database management systems (DBMSs). This enables you to combine such structured data with unstructured machine data, and then route combined data to downstream systems of analysis to gain new insights.

Cribl Stream 4.1 and later support integrating this Collector with MySQL, SQL Server, and Postgres databases.

How the Collector Pulls Data

Like other Cribl Stream Collectors, a Database Collector can perform Preview, Discovery, and Full Run operations in ad hoc or scheduled runs.

Database Collectors rely on Cribl Stream Database Connections Knowledge objects. Before you configure a Collector, configure a Database Connection to negotiate authenticated communication with the appropriate database type.

Configuring a Database Collector

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Sources**, then select **Collectors** > **Database** from the **Manage Sources** page's tiles or left nav. Click **New Collector** to open a modal that provides the following options and fields.

> The sections described below are spread across several tabs. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.
>
> Collector Sources currently cannot be selected or enabled in the QuickConnect UI.

Collector Settings

The Collector Settings determine how data is collected before processing.

Collector ID: Unique ID for this Collector. E.g., `sh2GetStuff`.

Connection: Use the drop-down to select a Database Connections already configured on your Cribl Stream installation.

SQL query: Enter a JavaScript expression, enclosed in backticks, that resolves to a query string for selecting data from the database. Supports only a single statement, and only `SELECT`. Has access to the special `${earliest}` and `${latest}` variables, which will resolve to the Collector run's start and end time. Example:

```
`SELECT * FROM table_name WHERE timestamp > ${earliest} AND timestamp < ${latest} ;`
```

You can also craft a query that says, in effect, "give me everything new since my last collection job." To do this, you specify a **tracking column** in the query. The tracking column (also known as a **rising column**) must be one whose values you know always increase from one record to the next. See the explanation and example below.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Result Settings

The Result Settings determine how Cribl Stream transforms and routes the collected data.

Custom Command

In this section, you can pass the data from this Collector to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Result Routing

Send to Routes: If set to `Yes` (the default), Cribl Stream will send events to normal routing and event processing. Toggle to `No` to select a specific Pipeline/Destination combination to receive the events. The `No` setting exposes these two fields:

- **Pipeline**: Select a Pipeline to process results.
- **Destination**: Select a Destination to receive results.

The default `Yes` setting instead exposes this field:

- **Pre-processing Pipeline**: Optionally, use the drop-down to select an existing Pipeline to process results before sending them to Routes.

This final field is always exposed:

- **Throttling**: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

> You might disable **Send to Routes** when you're configuring a Collector that will connect data from a specific Source to a specific Pipeline and Destination. This keeps the Collector's configuration self-contained and separate from Cribl Stream's routing table for live data – potentially simplifying the Routes structure.

Advanced Settings

Advanced Settings enable you to customize post-processing and administrative options.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Time to live: How long to keep the job's artifacts on disk after job completion. This also affects how long a job is listed in **Job Inspector**. Defaults to `4h`.

Remove Discover fields : List of fields to remove from the Discover results. This is useful when discovery returns sensitive fields that should not be exposed in the Jobs user interface. You can specify wildcards (such as `aws*`).

Resume job on boot: Toggle to `Yes` to resume ad hoc collection jobs if Cribl Stream restarts during the jobs' execution.

Working with a Tracking Column

You can configure the Collector to use a **tracking column** (also known as a **rising column**). This prevents overlap between jobs – when the Collector fetches the same record more than once. It likewise prevents the occurrence of gaps between data collected by consecutive jobs. (If your database already has mechanisms that protect against overlap and gaps, you probably don't need to use a tracking column.)

For your tracking column, you can choose any column whose values always increase from one record to the next. (A sequence of values that behaves like this is said to increase monotonically.) Many database tables have monotonically-increasing `id`, `time`, and/or `date` columns.

State tracking is available only for scheduled collection (and not ad hoc collection). Once you configure your Collector, it's in the process of scheduling its jobs that you enable state tracking and specify a tracking column.

To explain the syntax queries that work with state tracking, we'll break down a few examples.

Tracking Column Queries: A Basic Example

```
`SELECT * FROM my_table WHERE ${state && state.id ? `id > ${state.id.value}` : '1 =
1'} ORDER BY id`
```

The `SELECT` statement must satisfy one requirement: that the tracking column be among the columns named. `SELECT * FROM my_table` satisfies this requirement because the wildcard (`*`) means "all columns."

The `WHERE` clause illustrates the key techniques required for state tracking:

- First, we verify that state has been saved (on a prior run of the Collector); and, if it has, that it includes the desired tracking column – for this example, a column named `id`.

```
WHERE ${state && state.id
```

- If state **has** been saved, we'll apply the test right after the `?` in the ternary operator. This determines whether the value of the `id` column for a given row is greater than the last-saved value for that column. If it is not, that means that the row was collected already, and should not be collected again.

```
? `id > ${state.id.value}` : '1 = 1'}`
```

- If state has **not** been saved, we'll apply the `'1 = 1'` that follows the ternary operator's `:`. This is what we'll see the first time the Collector runs, and the appropriate action here is to collect all rows. That's why we have `'1 = 1'` here – it always evaluates to true, so every row gets collected.

Finally, the `ORDER BY` clause, `ORDER BY id`, guarantees that the query returns rows such that the value of the tracking column (here, `id`) increases monotonically from row to row. For state tracking to work correctly, rows **must** be returned such that the value of the tracking column increases monotonically. Some databases have mechanisms that achieve this without an `ORDER BY` clause, but one way or another, this requirement must be satisfied.

Tracking Column Queries: Advanced Example

Timestamp columns are a popular choice for state tracking. Here's an example:

```
SELECT id, text_data, timestamp, UNIX_TIMESTAMP(timestamp) as tracking_timestamp
FROM my_table \
WHERE ${state && state.tracking_timestamp ? `UNIX_TIMESTAMP(timestamp) >
${state.tracking_timestamp.value}` : "1=1"} \
ORDER BY tracking_timestamp
```

This query differs from the basic example above in one important way: We use the SQL function `UNIX_TIMESTAMP()` to convert the value in the database's `timestamp` column, from a date to an integer. (This example assumes that we're dealing with a MySQL database, where the `timestamp` column's value will be a date.)

Cribl Stream requires the tracking column's value to be an integer; and here, we satisfy that requirement by means of the `UNIX_TIMESTAMP()` function. In your own queries, depending on the nature of the columns you want to use for tracking, you might be able to adapt this syntax – or you might need to get more creative.

Clearing a Collector's State

You'll find the **Clear state** button along the bottom edge of the Database Collector's configuration modal, between the **Scheduled** and **Delete Collector** buttons. This button exists because deleting the Collector does **not** delete its saved state information. In this section, we'll explore the benefits of decoupling these two operations.

To begin with, note that Collector state is stored on disk, not in Git. Each Collector's state is stored separately.

Secondly, the uses of state-clearing differ depending on whether your Database Collector is on a single-instance deployment of Cribl Stream, or a distributed deployment.

Clearing Collector State in a Single-Instance Deployment

When you first configure a Database Collector, you might need to experiment with SQL queries until you arrive at one that returns the desired results. In doing this, you might need the queries you're testing to always start from the same place in the database. If you're using a tracking column, this won't work, because each query will move you further along in the database. The solution is to clear state between iterations of the query you're building.

Clearing Collector State in a Distributed Deployment

Just like in single-instance deployments, in distributed deployments it can be useful to clear Collector state when you're testing SQL queries for a Collector with state tracking enabled.

Beyond that, with distributed deployments it's important to know that Cribl Stream decouples the deleting of Collectors themselves from the deleting of their saved state, and to see the benefits of that decoupling.

Suppose you have been running a Collector with state tracking enabled, and it's working its way through a database. At some point you decide you're not happy with that Collector and you click the **Delete Collector** button. What happens next? There are at least three possibilities:

- If you're sure you want to delete the Collector, you should Commit and Deploy. Once you do that, the Leader pushes the change out to the Worker Nodes, and the Collector is gone (although you can recover it by rolling back to a previous commit in Git).

- If you realize that you made a mistake, and want to keep the Collector after all, then you should **not** Commit and Deploy. Instead, click the **Undo All Changes** button in the **Git Changes** modal – this un-deletes the Collector. And, since the Collector's state remains on disk, the Collector will pick up where it left off.

- If you deleted the Collector because you want to create another Collector with the same ID, the same tracking column, but an otherwise different configuration – here, you should go ahead and Commit and Deploy, then create your new Collector. Because the old Collector's state remains on disk, the new

Collector with the same ID picks up the saved state. When you begin using the new Collector, it will pick up where the old Collector left off. On the other hand, if you prefer the new Collector to start from zero, just click the **Clear state** button before you start using it.

The moral of the story is that Cribl Stream's decoupling of Collector deletion from state deletion gives you control in a manner that can save you from messy situations where your Collector cannot find the state it needs.

10.1.3. File System/NFS

Cribl Stream supports collecting data from a locally mounted filesystem location that is available on all Worker Nodes.

Configuring a File System Collector

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Sources**, then select **Collectors** > **File System** from the **Manage Sources** page's tiles or left nav. Click **Add Collector** to open the **File System** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.
>
> Collector Sources currently cannot be selected or enabled in the QuickConnect UI.

Collector Settings

The Collector Settings determine how data is collected before processing.

Collector ID: Unique ID for this Collector. E.g., `DysonV11Roomba960`.

Auto-populate from: Select a Destination with which to auto-populate Collector settings. Useful when replaying data.

Directory: The directory from which to collect data. Templating is supported (e.g., `/myDir/${host}/${year}/${month}/`). You can also use templating to specify (e.g.) a Splunk bucket from which to collect. Symlinks will not be followed. More on templates and Filters.

Optional Settings

Path extractors: Extractors allow using template tokens as context for expressions that enrich discovery results.

Click **Add Extractor** to add each extractor as a key-value pair, mapping a **Token** name on the left (of the form `/<path>/${<token>}`) to a custom JavaScript **Extractor expression** on the right (e.g., `{host: value.toLowerCase()}`).

Each expression accesses its corresponding `<token>` through the `value` variable, and evaluates the token to populate event fields. Here is a complete example:

TOKEN	EXPRESSION	MATCHED VALUE	EXTRACTED RESULT
`/var/log/${foobar}`	`foobar: {program: value.split('.')[0]}`	`/var/log/syslog.1`	`{program: syslog, foobar: syslog.1}`

Recursive: If set to `Yes` (the default), data collection will recurse through subdirectories.

Max batch size (files): Maximum number of lines written to the discovery results files each time. Defaults to `10`. To override this limit in the Collector's Schedule/Run modal, use Advanced Settings > Upper task bundle size.

Destructive: If set to `Yes`, the Collector will delete files after collection. Defaults to `No`.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

> Cribl Stream automatically detects gzip compression where a file name ends in `.gz`.

Result Settings

The Result Settings determine how Cribl Stream transforms and routes the collected data.

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Result Routing

Send to Routes: If set to `Yes` (the default), Cribl Stream will send events to normal routing and event processing. Toggle to `No` to select a specific Pipeline/Destination combination. The `No` setting exposes these two additional fields:

- **Pipeline**: Select a Pipeline to process results.
- **Destination**: Select a Destination to receive results.

The default `Yes` setting instead exposes this field:

- **Pre-processing Pipeline**: Pipeline to process results before sending to Routes. Optional.

This field is always exposed:

- **Throttling**: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

> You might disable **Send to Routes** when configuring a Collector that will connect data from a specific Source to a specific Pipeline and Destination. This keeps the Collector's configuration self-contained and separate from Cribl Stream's routing table for live data – potentially simplifying the Routes structure.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Advanced Settings enable you to customize post-processing and administrative options.

Time to live: How long to keep the job's artifacts on disk after job completion. This also affects how long a job is listed in **Job Inspector**. Defaults to `4h`.

Remove Discover fields : List of fields to remove from the Discover results. This is useful when discovery returns sensitive fields that should not be exposed in the Jobs user interface. You can specify wildcards (such as `aws*`).

Resume job on boot: Toggle to `Yes` to resume ad hoc collection jobs if Cribl Stream restarts during the jobs' execution.

How the Collector Pulls Data

When you run a Filesystem/NFS Collector in Discovery mode, the first available Worker returns the list of available files to the Leader Node.

In Full Run mode, the Leader distributes the list of files to process across 1..*N* Workers as evenly as possible, based on file size. These Workers then stream in their assigned files from the filesystem location.

Last updated by: Dritan Bitincka

10.1.4. Google Cloud Storage

Cribl Stream supports collecting data objects from Google Cloud Storage buckets. This page covers how to configure the Collector.

Configuring a Google Cloud Storage Collector

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Sources**, then select **Collectors** > **Google Cloud Storage** from the **Manage Sources** page's tiles or left nav. Click **Add Collector** to open the **Google Cloud Storage** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.
>
> Collector Sources currently cannot be selected or enabled in the QuickConnect UI.

Collector Settings

The Collector Settings determine how data is collected before processing.

Collector ID: Unique ID for this Collector. E.g., `gcs_24-7`.

Auto-populate from: Optionally, select a predefined Destination that will be used to auto-populate Collector settings. Useful when replaying data.

Bucket name: Google Cloud Storage bucket to collect from. This value can be a constant, or a JavaScript expression that can be evaluated only at init time. E.g., referencing a Global Variable: `myBucket-${C.vars.myVar}`.

Authentication

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Use this default option to enter your Google Cloud Storage connection string directly. Exposes a **Service account credentials** field for this purpose.

The **Service account credentials** are the contents of a Google Cloud service account credentials (JSON keys) file. To upload a file, click the upload button at this field's upper right.

- **Secret**: This option exposes a **Service account credentials (text secret)** drop-down, in which you can select a stored secret that references an Google Cloud Storage connection string. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. A **Create** link is available if you need to generate a new secret.

> You can access service account credentials in the Google Cloud Console under **Service Accounts >** <service account associated with bucket> **> Keys**. The key file must be in JSON format.

Optional Settings

Path: The directory from which to collect data. Templating is supported (e.g., `myDir/${datacenter}/${host}/${app}/`). Time-based tokens are also supported (e.g., `myOtherDir/${_time:%Y}/${_time:%m}/${_time:%d}/`). More on templates and Filters.

Path extractors: Extractors allow using template tokens as context for expressions that enrich discovery results.

Click **Add Extractor** to add each extractor as a key-value pair, mapping a **Token** name on the left (of the form `/<path>/${<token>}`) to a custom JavaScript **Extractor expression** on the right (e.g., `{host: value.toLowerCase()}`).

Each expression accesses its corresponding `<token>` through the `value` variable, and evaluates the token to populate event fields. Here is a complete example:

TOKEN	EXPRESSION	MATCHED VALUE	EXTRACTED RESULT
`/var/log/${foobar}`	`foobar: {program: value.split('.')[0]}`	`/var/log/syslog.1`	`{program: syslog, foobar: syslog.1}`

Endpoint: Google Cloud Storage service endpoint. If empty, the endpoint will be automatically constructed using the service account credentials.

Disable time filter: Toggle to `Yes` if your Run or Schedule configuration specifies a date range and no events are being collected. This will disable the Collector's event time filtering to prevent timestamp conflicts.

Recursive: If set to `Yes` (the default), data collection will recurse through subdirectories.

Max batch size (objects): Maximum number of metadata objects to batch before recording as results. Defaults to `10`. To override this limit in the Collector's Schedule/Run modal, use Advanced Settings > Upper task bundle size.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Result Settings

The Result Settings determine how Cribl Stream transforms and routes the collected data.

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Result Routing

Send to Routes: If set to `Yes` (the default), Cribl Stream will send events to normal routing and event processing. Toggle to `No` to select a specific Pipeline/Destination combination. The `No` setting exposes these two additional fields:

- **Pipeline**: Select a Pipeline to process results.
- **Destination**: Select a Destination to receive results.

The default `Yes` setting instead exposes this field:

- **Pre-processing Pipeline**: Pipeline to process results before sending to Routes. Optional.

This field is always exposed:

- **Throttling**: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

> You might disable **Send to Routes** when configuring a Collector that will connect data from a specific Source to a specific Pipeline and Destination. This keeps the Collector's configuration self-contained and separate from Cribl Stream's routing table for live data – potentially simplifying the Routes structure.

Pre-processing Pipeline: Pipeline to process results before sending to Routes. Optional, and available only when **Send to Routes** is toggled to `Yes`.

Throttling: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

Advanced Settings

Advanced Settings enable you to customize post-processing and administrative options.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Time to live: How long to keep the job's artifacts on disk after job completion. This also affects how long a job is listed in **Job Inspector**. Defaults to `4h`.

Remove Discover fields : List of fields to remove from the Discover results. This is useful when discovery returns sensitive fields that should not be exposed in the Jobs user interface. You can specify wildcards (such as `aws*`).

Resume job on boot: Toggle to `Yes` to resume ad hoc collection jobs if Cribl Stream restarts during the jobs' execution.

Google Cloud Roles and Permissions

Your Google Cloud service account will need, at a minimum, roles and permissions that enable you to set up a new bucket or modify an existing one:

Roles

- Storage Legacy Bucket Reader: `roles/storage.legacyBucketReader`
- Storage Legacy Object Reader: `roles/storage.legacyObjectReader`

Permissions

- `storage.buckets.get`
- `storage.objects.get`
- `storage.objects.list`

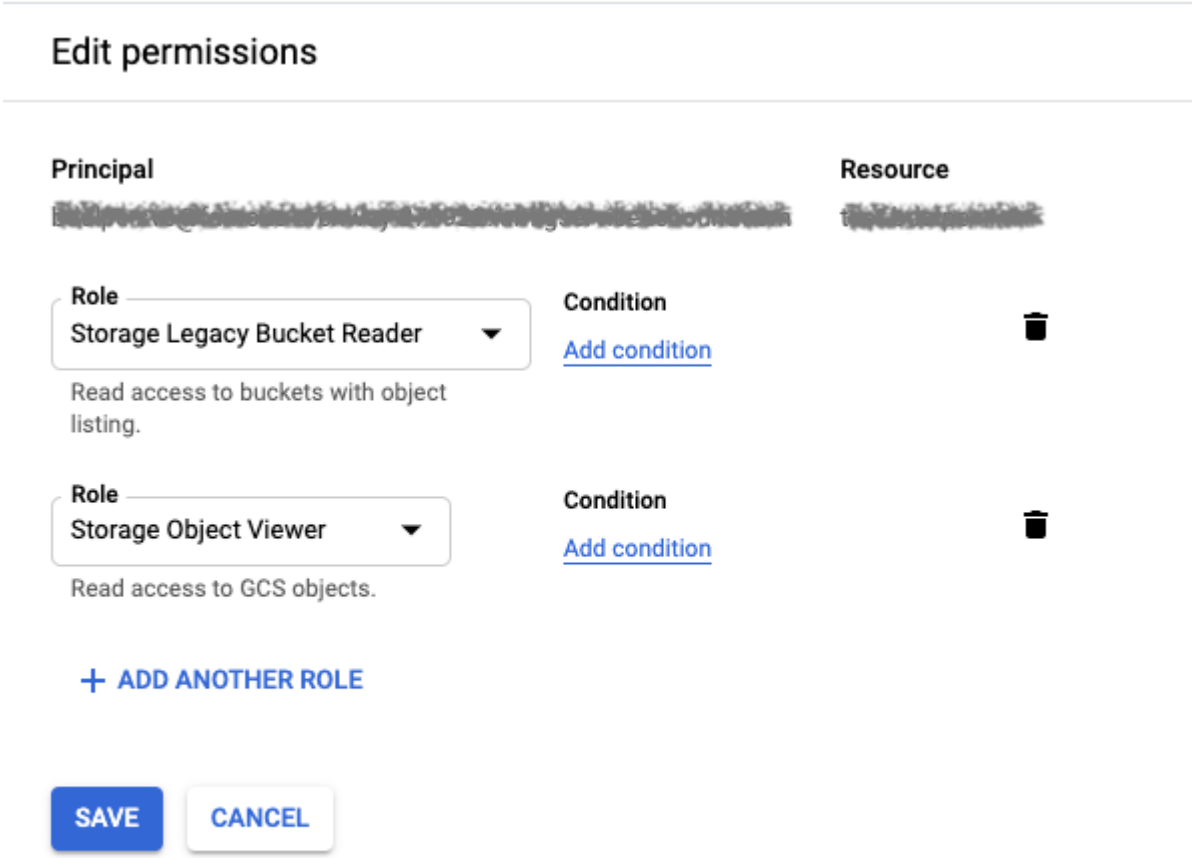

Editing Google Cloud roles and permissions

For additional details, see the Google Cloud Access Control topic.

Replay

See these resources that demonstrate how to replay data from object storage. Both are written around Amazon S3-compatible stores, but the general principles apply to Google Cloud buckets as well:

- Data Collection & Replay sandbox: Step-by-step tutorial, in a hosted environment, with all inputs and outputs preconfigured for you. Takes about 30 minutes.
- Using S3 Storage and Replay: Guided walk-through on setting up your own replay.

How the Collector Pulls Data

In the Discover phase, the first available Worker returns the list of files to the Leader Node. In the Collect phase, Cribl Stream spreads the list of files to process spread across 1..N Workers, based on file size, with the goal of distributing tasks as evenly as possible across Workers. These Workers then stream in their assigned files from the remote Google Cloud Storage location.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Troubleshooting

When permissions are correct on the object store, and events are reaching the Collector, the Preview pane will show events and the Job Inspector will show an **Events collected** count.

However, if previewing returns no events and throws no error, first check your Filter expression by previewing without it (e.g., simplify the Filter expression to `true`). Then check the Job Inspector: If the **Total size** is greater than `0`, and the **Received size** is `NA` or `0`, make sure you have list and read permissions on the object store.

Last updated by: Dritan Bitincka

10.1.5. Health Check

The Health Check Collector monitors endpoints by sending requests and generating events based on the responses. This Collector provides multiple Discover types and Health Check options.

Configuring a Health Check Collector

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Sources**, then select **Collectors** > **Health Check** from the **Manage Sources** page's tiles or left nav. Click **New Collector** to open the **Health Check** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs, some of which contain collapsible accordions. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.
>
> See Formatting Expressions below for guidance on this Collector's specific requirement to enter JavaScript expressions as template literals.
>
> Collector Sources cannot be selected or enabled in the QuickConnect UI.

Collector Settings

The Collector Settings determine how Health Checks are made before processing.

Collector ID: Unique ID for this Collector. E.g., `healthMonitoring`.

Discover

Within the **Discover** accordion, the **Discover type** drop-down provides four options, corresponding to different use cases. Each **Discover type** selection will expose a different set of fields. Below, we cover the **Discover type**s from the simplest to the most complex.

- **Discover type: None** matches cases where one simple API call will retrieve all the data you need. This default option suppresses the Discover stage. Use the modal's **Health check** section to specify the endpoint and other details. Cribl Stream will assign the Health Check task to a single Worker.

- **Discover type: Item List** matches cases where you want to enumerate a known list of **Discover items** to retrieve, like specific AWS services to identify hosts to check. Discovery will return one Health Check task per item in the list, and Cribl Stream will spread each of those tasks across all available Workers.

- **Discover type: JSON Response** provides a **Discover result** field where you can (optionally) define Discover tasks as a JSON array of objects. Each entry returned by Discover will generate a Health Check task, and Cribl Stream will spread each of those tasks across all available Workers.

- **Discover type: HTTP Request** matches cases where you need to dynamically discover what you can Health Check from a REST endpoint. This Discover type most fully exploits Cribl Stream's Discover-and-then-health-check architecture. (Example: Make a REST call to get a list of available hosts, then run Health Checks against each of those hosts.) Each item returned will generate a Health Check task, and Cribl Stream will spread each of those tasks across all available Workers.

Discover Type: Item List

Setting the **Discover type** to `Item List` exposes this additional field above the Health Check settings:

Discover items: List of items to return from the Discover task. Each returned item will generate a Health Check task, and can be referenced using `${id}` in the **Health Check URL**, the **Health Check parameters**, or the **Health Check headers**. Sample list with Cribl's health endpoint:

```
http://localhost:8080/services/collector/health,http://0.0.0.0:3000/services/collector/
```

Discover Type: JSON Response

Setting the **Discover type** to `JSON Response` exposes these additional fields above the Health Check settings:

Discover result: Allows hard-coding the Discover result. Must be a JSON object. Works with the **Discover data field**. Sample JSON entry:

```
 `[ {"url": "http://localhost:8088/services/collector/health"},{ "url":
"http://localhost:8088/services/collector/health/1.0" } ]`
```

Discover data field: Within the response, this is the name of the field that contains discovery results. (Leave blank if the result is an array.) Sample JSON entry:

```
items, json: { items: [{id: 'first'},{id: 'second'}] }
```

In an XML response, this is the name of the element that contains discovery results. Sample XML entry:

```
result.items
<response>
 <items>
  <element>
   <id>first</id>
  </element>
  <element>
   <id>second</id>
  </element>
 </items>
</response>
```

Discover Type: HTTP Request

Setting the **Discover type** to `HTTP Request` exposes these additional fields above the Health Check settings:

Discover URL: Enter the URL to use for the Discover operation. This can be a constant URL, or a JavaScript expression to derive the URL.

> Where a URL (path or parameters) includes variables that might contain unsafe ASCII characters, encode these variables using `C.Encode.uri(paramName)`. (Examples of unsafe characters are: space, `$`, `/`, `=`.) Example URL with encoding: `'http://localhost:9000/api/v1/system/logs/' + C.Encode.uri(`${id}`)`.
>
> Request parameters that are not contained directly in the URL are automatically encoded. Cribl Stream URLs/expressions specified in the **Discover URL** field follow redirects.

Discover method: Select the HTTP verb to use for the Discover operation – `GET`, `POST`, or `POST with body`.

Discover POST body: Template for POST body to send with the Discover request. (This field is displayed only when you set the **Discover method** to `POST with body`.)

Discover parameters: Optional HTTP request parameters to append to the Discover request URL. These refine or narrow the request. Click **Add Parameter** to add parameters as key-value pairs:

- **Name**: Parameter name.
- **Value**: JavaScript expression to compute the parameter's value, normally enclosed in backticks (e.g., `` `${id}` ``). Can also be a constant, enclosed in single quotes (`'id'`). Values without delimiters (e.g., `id`) are evaluated as strings.

Discover headers: Optional Discover request headers.: Click **Add Header** to add headers as key-value pairs:

- **Name**: Header name.
- **Value**: JavaScript expression to compute the header's value, normally enclosed in backticks (e.g., `` `${id}` ``). Can also be a constant, enclosed in single quotes (`'id'`). Values without delimiters (e.g., `id`) are evaluated as strings.

Discover data field: Within the response JSON, name of the field that contains Discover results. Leave blank if the result is an array.

> The following sections describe the remaining tabs, whose settings and content apply equally to all **Discover type** selections.

Health Check

Health check URL: URL (constant or JavaScript expression) to use for the Health Check operation.

> Where a URL (path or parameters) includes variables that might contain unsafe ASCII characters, encode these variables using `C.Encode.uri(paramName)` . (Examples of unsafe characters are: space, `$` , `/` , `=` .) Example URL with encoding: `'http://localhost:9000/api/v1/system/logs/' + C.Encode.uri(`${id}`)`.
>
> Request parameters that are not contained directly in the URL are automatically encoded.
> Cribl Stream URLs/expressions specified in the **Health check URL** field follow redirects.

Health check method: Select the HTTP verb to use for the Health Check operation – `GET` , `POST` , or `POST with body` .

Health check POST body: Template for POST body to send with the Health Check request. (This field is displayed only when you set the **Health check method** to `POST with body` .) You can reference parameters from the Discover response using template params of the form: `` `${variable}` ``.

Health check parameters: Optional HTTP request parameters to append to the request URL. These refine or narrow the request. Click **Add parameter** to add parameters as key-value pairs:

- **Name**: Field name.
- **Value**: JavaScript expression to compute the field's value, normally enclosed in backticks (e.g., `` `${id}` ``). Can also be a constant, enclosed in single quotes (`'id'`). Values without delimiters (e.g., `id`) are evaluated as strings.

Health check headers: Click **Add Header** to (optionally) add request headers as key-value pairs:

- **Name**: Header name.
- **Value**: JavaScript expression to compute the header's value, normally enclosed in backticks (e.g., `` `${id}` ``). Can also be a constant, enclosed in single quotes (`'id'`). Values without delimiters (e.g., `id`) are evaluated as strings.

> By adding the appropriate **Health check headers**, you can specify authentication based on API keys, as an alternative to the **Authentication**: `Basic` or `Login` options below.

Authenticate health check: Toggle to `Yes` if you want to authenticate Health Checks. When set to `No` , the default, **Authentication** is applied only to Discover.

Authentication

In the **Authentication** accordion, use the buttons to select one of these options:

- **None**: Don't use authentication. Compatible with REST servers like AWS, where you embed a secret directly in the request URL.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.
- **Basic (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret.
- **Login**: Enables you to specify several credentials, then perform a POST to an endpoint during the Discover operation. The POST response returns a token, which Cribl Stream uses for later Health Check operations. Exposes multiple extra fields – see Login Authentication below.
- **Login (credentials secret)**: Like **Login**, except that you specify a secret referencing the credentials, rather than the credentials themselves. Exposes multiple extra fields – see Login Secret Authentication below.
- **OAuth**: Enables you to directly enter credentials for authentication via the OAuth protocol. Exposes multiple extra fields – see OAuth Authentication below.
- **OAuth (text secret)**: Like the **OAuth** option, except that you specify a stored secret referencing the credentials. Exposes multiple extra fields – see OAuth Secret Authentication below.

Login Authentication

Selecting `Login` exposes the following additional fields:

- **Login URL**: URL for the login API call, which is expected to be a POST call.
- **Username**: Login username.
- **Password**: Login password.
- **POST body**: Template for POST body to send with the login request. The `${username}` and `${password}` variables specify the corresponding credentials' locations in the message.
- **Token attribute**: Path to the token attribute in the login response body. Supports nested attributes.
- **Authorize expression**: JavaScript expression used to compute the Authorization header to pass in Discover and Health Check calls. Uses `${token}` to reference the token obtained from the login POST request.
- **Authentication headers**: Optionally, click **Add Header** for each custom auth header you want to define. In the resulting table, enter each header row's **Name**.

  The corresponding **Value** is a JavaScript expression to compute the header's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `id` instead of `` `${id}` `` – will be evaluated as strings.

Login Secret Authentication

Selecting **Login (credentials secret)** exposes the following additional fields:

- **Login URL**: URL for the login API call, which is expected to be a POST call.
- **Credentials secret**: Select a stored text secret in this drop-down, or click **Create** to configure a new secret.
- **POST body**: Template for POST body to send with the login request. The `${username}` and `${password}` variables specify the corresponding credentials' locations in the message.
- **Token attribute**: Path to the token attribute in the login response body. Supports nested attributes.
- **Authorize expression**: JavaScript expression used to compute the Authorization header to pass in Discover and Health Check calls. Uses `${token}` to reference the token obtained from the login POST request.
- **Authentication headers**: Optionally, click **Add Header** for each custom auth header you want to define. In the resulting table, enter each header row's **Name**.

The corresponding **Value** is a JavaScript expression to compute the header's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `id` instead of `` `${id}` `` – will be evaluated as strings.

OAuth Authentication

Selecting **OAuth** exposes the following additional fields:

- **Login URL**: Endpoint for the OAuth API call, which is expected to be a POST call.
- **Client secret parameter**: The name of the parameter to send with the **Client secret value**.
- **Client secret value**: The OAuth access token to authorize requests.
- **Extra authentication parameters**: Optionally, click **Add parameter** for each additional OAuth request parameter you want to send in the body of POST requests. Automatically sets the `Content-Type` header to `application/x-www-form-urlencoded`.

  In the resulting table, enter each parameter row's **Name**. The corresponding **Value** is a JavaScript expression to compute the parameter's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `id` instead of `` `${id}` `` – will be evaluated as strings.
- **Token attribute**: Path to the token attribute in the login response body. Supports nested attributes.
- **Authorize expression**: JavaScript expression used to compute the Authorization header to pass in Discover and Health Check calls. Uses `${token}` to reference the token obtained from the login POST request.
- **Authentication headers**: Optionally, click **Add Header** for each custom auth header you want to define. In the resulting table, enter each header row's **Name**.

  The corresponding **Value** is a JavaScript expression to compute the header's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `id` instead of `` `${id}` `` – will be evaluated as strings.

OAuth Secret Authentication

Selecting **OAuth (text secret)** exposes the following additional fields:

- **Login URL**: Endpoint for the OAuth API call, which is expected to be a POST call.
- **Client secret parameter**: The name of the parameter to send with the **Client secret value**.

- **Client secret value (text secret)**: Select a stored text secret in this drop-down, or click **Create** to configure a new secret.

- **Extra authentication parameters**: Optionally, click **Add parameter** for each additional OAuth request parameter you want to send in the body of POST requests. Automatically sets the `Content-Type` header to `application/x-www-form-urlencoded`.

  In the resulting table, enter each parameter row's **Name**. The corresponding **Value** is a JavaScript expression to compute the parameter's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `id` instead of `` `${id}` `` – will be evaluated as strings.

- **Token attribute**: Path to the token attribute in the login response body. Supports nested attributes.

- **Authorize expression**: JavaScript expression used to compute the Authorization header to pass in Discover and Health Check calls. Uses `${token}` to reference the token obtained from the login POST request.

- **Authentication headers**: Optionally, click **Add Header** for each custom auth header you want to define. In the resulting table, enter each header row's **Name**.

  The corresponding **Value** is a JavaScript expression to compute the header's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `id` instead of `` `${id}` `` – will be evaluated as strings.

Optional Settings

Request Timeout (secs): Here, you can set a maximum time period (in seconds) for an HTTP request to complete before Cribl Stream treats it as timed out. Defaults to `0`, which disables timeout metering.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `No`.

Safe headers: Optionally, list headers that you consider safe to log in plain text. Separate the header names with tabs or hard returns.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Result Settings

The Result Settings determine how Cribl Stream transforms and routes the Health Check data.

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `Cribl`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Result Routing

Send to Routes: If set to `Yes` (the default), Cribl Stream will send events to normal routing and event processing. Toggle to `No` to select a specific Pipeline/Destination combination.

The `No` setting exposes these two additional fields:

- **Pipeline**: Select a Pipeline to process results.
- **Destination**: Select a Destination to receive results.

The default `Yes` setting instead exposes this field:

- **Pre-processing Pipeline**: Pipeline to process results before sending to Routes. Optional.

This field is always exposed:

- **Throttling**: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

> You might disable **Send to Routes** when configuring a Collector that will connect data from a specific Source to a specific Pipeline and Destination. One use case might be a Health Check Collector that gathers a known, simple type of data from a single endpoint. This approach keeps the Collector's configuration self-contained and separate from Cribl Stream's routing table for live data – potentially simplifying the Routes structure.

Advanced Settings

Advanced Settings enable you to customize post-processing and administrative options.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Time to live: How long to keep the job's artifacts on disk after job completion. This also affects how long a job is listed in **Job Inspector**. Defaults to `4h`.

Remove Discover fields: List of fields to remove from the Discover results. This is useful when discovery returns sensitive fields that should not be exposed in the Jobs user interface. You can specify wildcards (such as `aws*`).

Resume job on boot: Toggle to `Yes` to resume ad hoc Health Check jobs if Cribl Stream restarts during the jobs' execution.

Formatting Expressions

JavaScript expression fields in this Health Check Collector behave differently from those elsewhere in Cribl Stream. Here, you must enter expressions as template literals, with placeholders referencing variables and JS functions. Here are a few examples:

- To reference the `__collectible.id` internal field in a URL, header, or parameter (etc.), you would write the variable as `` `${id}` ``.

- To reference a function call: `` `${Date.now()}` ``.
- To call a function that references a variable: `` `${Math.floor(earliest)}` ``.

Responses

The Health Check Collector generates error or success events based on the received response from the Health Check request.

Error Events

The Health Check Collector generates error events when no response is received, a request times out, or receives an error (non 200) response. The following is an example error event:


```
{
  "host": "Cribl.local",
  "_raw": "{\"url\":\"http://0.0.0.0:3000/services/collector/health\",\"method\":\"get\
{\\\"host\\\":\\\"0.0.0.0:3000\\\",\\\"port\\\":\\\"3000\\\",\\\"path\\\":\\\"/services
<!DOCTYPE html>\\\\n<html lang=\\\\\\\"en\\\\\\\">\\\\n<head>\\\\n<meta charset=\\\\\\\
/services/collector/health</pre>\\\\n</body>\\\\n</html>\\\\n\\\",\\\"elapsed\\\":24}\"
  "method": "get",
  "url": "http://0.0.0.0:3000/services/collector/health",
  "statusCode": 404,
  "error": "Http Error, statusCode: 404, details:
{\"host\":\"0.0.0.0:3000\",\"port\":\"3000\",\"path\":\"/services/collector/health\",\"
lang=\\\"en\\\">\\n<head>\\n<meta charset=\\\"utf-8\\\">\\n<title>Error</title>\\n</hea
/services/collector/health</pre>\\n</body>\\n</html>\\n\",\"elapsed\":24}",
  "_time": 1660152577.93,
  "cribl_breaker": "Cribl:ndjson"
}
```


Success Events

The Health Check Collector generates success events when a 200 success status code is received. The following is an example success event:

```
{
  "host": "Cribl.local",
  "_raw": "
{\"url\":\"http://0.0.0.0:3000/api/v1/health\",\"method\":\"get\",\"statusCode\":200,\"
{\\\"status\\\":\\\"healthy\\\",\\\"startTime\\\":1660152114781}\"}",
  "method": "get",
  "url": "http://0.0.0.0:3000/api/v1/health",
  "statusCode": 200,
  "body": "{\"status\":\"healthy\",\"startTime\":1660152114781}",
  "_time": 1660152114.781,
  "cribl_breaker": "Cribl:ndjson"
}
```


Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Retry Logic

If this Collector receives an HTTP `429` or `503` response code, and the `retry-after` header is present, Cribl Stream will use the header's `delay-seconds` or `http-date` value to determine how long to wait before retrying the request. Cribl Stream will log a warning message with the value retrieved from the header.

If the `retry-after` header is absent, Cribl Stream will make five retries, using a backoff algorithm, at the following intervals (in milliseconds): `200`, `400`, `800`, `1600`, `3200`.

Mitigating Stuck-Job Problems

Occasionally, a scheduled job fails, but continues running for hours or even days, until someone intervenes and cancels it. If left alone, such a "stuck", "orphaned," or "zombie" job will never complete. This can cause missing events in downstream receivers, along with `HTTP timeout` or similar errors in Cribl Stream's logs.

To keep stuck jobs from running excessively long:

- First, try setting **Optional Settings** > **Request Timeout (secs)** – whose default of `0` means "wait forever" – to a desired maximum duration.
- If adjusting **Timeout (secs)** does not fix the problem, try the global setting **Job Timeout** – whose default of `0` allows a job to run indefinitely – to a desired maximum duration. You'll find **Job Timeout** among the task manifest and buffering limits.

Using these settings in tandem works like this:

- **Timeout (secs)** limits the time that Cribl Stream will wait for an HTTP request to complete.
- Then, if a job gets stuck and keeps running beyond that limit, **Job Timeout** can catch and terminate the job, because it monitors the overall time the job has been running.

Last updated by: Dritan Bitincka

10.1.6. REST / API Endpoint

Cribl Stream supports collecting data from REST endpoints. This Collector provides multiple Discover types and Collect options.

> For usage examples, see Using REST / API Collectors and our adjacent guides.

Configuring a REST Collector

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Sources**, then select **Collectors** > **REST** from the **Manage Sources** page's tiles or left nav. Click **Add Collector** to open the **REST** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs, some of which contain collapsible accordions. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.
>
> See Formatting Expressions below for guidance on this Collector's specific requirement to enter JavaScript expressions as template literals.
>
> Collector Sources currently cannot be selected or enabled in the QuickConnect UI.

Collector Settings

The Collector Settings determine how data is collected before processing.

Collector ID: Unique ID for this Collector. E.g., `rest42json`.

Discover Settings

Within the **Discover** accordion, the **Discover type** drop-down provides four options, corresponding to different use cases. Each **Discover type** selection will expose a different set of **Collector Settings** fields. Below, we cover the **Discover type**s from simplest to most-complex.

- **Discover type: None** matches cases where one simple API call will retrieve all the data you need. This default option suppresses the Discover stage. Use the modal's **Collect** section to specify the endpoint and other details. Cribl Stream will assign the Collect task to a single Worker. (Example: Collect a list of configured Cribl Stream Pipelines.)

- **Discover type: Item List** matches cases where you want to enumerate a known list of **Discover items** to retrieve. (Examples: Collect network traffic data that's tagged with specific subnets; or collect weather data for a known list of ZIP codes.) Discovery will return one Collect task per item in the list, and Cribl Stream will spread each of those Collect tasks across all available Workers.

- **Discover type: JSON Response** provides a **Discover result** field where you can (optionally) define Discover tasks as a JSON array of objects. Each entry returned by Discover will generate a Collect task, and Cribl Stream will spread each of those Collect tasks across all available Workers. (Example: Collect data for specific geo locations in the National Weather Service API's stream of worldwide weather data. This particular API requires multiple parameters in the request URL – latitude, longitude, etc. – so **Item List** discovery would not work.)

- **Discover type: HTTP Request** matches cases where you need to dynamically discover what you can collect from a REST endpoint. This Discover type most fully exploits Cribl Stream's Discover-and-then-Collect architecture. (Example: Make a REST call to get a list of available log files, then run Collect against each of those files.) Each item returned will generate a Collect task, and Cribl Stream will spread each of those Collect tasks across all available Workers. As of Cribl Stream 3.0.2, this Discover type supports XML responses.

Collect Settings (Common)

Within the **Collect** accordion, the following options appear for **Discover type**: `None`, as well as for all other **Discover type** selections:

Collect URL: URL (constant or JavaScript expression) to use for the Collect operation.

> Where a URL (path or parameters) includes variables that might contain unsafe ASCII characters, encode these variables using `C.Encode.uri(paramName)`. (Examples of unsafe characters are: space, `$`, `/`, `=`.) Example URL with encoding: `'http://localhost:9000/api/v1/system/logs/' + C.Encode.uri(`${id}`)`.
>
> Request parameters are not contained directly in the URL are automatically encoded. Cribl Stream URLs/expressions specified in the **Collect URL** field follow redirects.

Collect method: Select the HTTP verb to use for the Collect operation – `GET`, `POST`, `POST with body`, or `Other`.

Collect POST body: Template for POST body to send with the Collect request. (This field is displayed only when you set the **Collect method** to `POST with body`.) You can reference parameters from the Discover response using template params of the form: `` `${variable}` ``.

Collect verb: Custom HTTP method to use for the Collect operation. (This field is displayed only when you set the **Collect method** to `Other`.)

Collect parameters: Optional HTTP request parameters to append to the request URL. These refine or narrow the request. Click **Add Parameter** to add parameters as key-value pairs:

- **Name**: Field name.
- **Value**: JavaScript expression to compute the field's value, normally enclosed in backticks (e.g., `` `${earliest}` ``). Can also be a constant, enclosed in single quotes (`'earliest'`). Values without delimiters (e.g., `earliest`) are evaluated as strings.

Collect headers:: Click **Add Header** to (optionally) add collection request headers as key-value pairs:

- **Name**: Header name.
- **Value**: JavaScript expression to compute the header's value, normally enclosed in backticks (e.g., `` `${earliest}` ``). Can also be a constant, enclosed in single quotes (`'earliest'`). Values without delimiters (e.g., `earliest`) are evaluated as strings.

> By adding the appropriate **Collect headers**, you can specify authentication based on API keys, as an alternative to the **Authentication**: `Basic` or `Login` options below.

Pagination: For the options exposed by this drop-down list, see the Pagination section below.

Authentication: For the options within this accordion, see the Authentication Settings section below.

> ### Time Range Variables
>
> The following fields accept `` `${earliest}` `` and `` `${latest}` `` variables, which reference any **Time Range** values that have been set in manual or scheduled collection jobs:
>
> - **Collect URL**, **Collect parameters**, **Collect headers**
> - **Discover URL**, **Discover parameters**, **Discover headers**.
>
> As an example, here is a **Collect URL** entry using these variables:
> `http://localhost/path?from=${earliest}&to=${latest}`

> Both variables are formatted as UNIX epoch time, in seconds units. When using them in contexts that require milliseconds resolution, multiply them by 1,000 to convert to ms.

Pagination

Use this drop-down list to select the pagination scheme for collection results. Defaults to `None`. The other options, expanded below, are:

- Response Body Attribute / Response Header Attribute
- RFC 5988 – Web Linking
- Offset/Limit
- Page/Size

Response Body Attribute / Response Header Attribute

Select `Response Body Attribute` to extract a value from the response body that identifies the next page of data to retrieve.

Select `Response Header Attribute` to extract this next-page value from the response header. Either of these selections exposes these additional fields:

- **Response attribute**: Name(s) of attribute(s) in the response payload or header that contain next-page information. If you have multiple attributes with the same name within the response body, you can provide the path to the one you need, e.g.: `foo.0.bar`. If Cribl Stream cannot find an exact match for a specified attribute name, it will fallback to the last-found partial match.

- **Max pages**: The maximum number of pages to retrieve. Defaults to `50` pages. Set to `0` to retrieve all pages.

Selecting `Response Body Attribute` exposes one more field:

- **Last-page expression**: Optionally, enter a JavaScript expression that Cribl Stream will use to determine when the last page has been reached. The values tested by this expression must be present in the **Response attributes** section above. Example expression: `morePages === false`.

> Use this expression with APIs like Smartsheet Event Reporting, which return an attribute that signals whether more pages are present, rather than simply returning an empty result set beyond the last page.

RFC 5988 – Web Linking

Select this option with APIs that follow RFC 5988 conventions to provide the next-page link in a header. This selection exposes three additional fields:

Next page relation name: Header substring that refers to the next page in the result set. Defaults to `next`, corresponding to the following example link header:
`<https://myHost/curPage>; rel="self" <https://myHost/nextPage>; rel="next"`

Current page relation name: Optionally, specify the relation name within the link header that refers to the current result set. In this same example, `rel="self"` refers to the current page of results:
`<https://myHost/curPage>; rel="self" <https://myHost/nextPage>; rel="next"`

Max pages: The maximum number of pages to retrieve. Defaults to `50` pages. Set to `0` to retrieve all pages.

Offset/Limit

Select this option to receive data from APIs that use offset/limit pagination. This selection exposes several additional fields:

Offset field name: Query string parameter that sets the index from which to begin returning records. E.g.: `/api/v1/query?term=cribl&limit=100&offset=0`. Defaults to `offset`.

Starting offset: (Optional) offset index from which to start request. Defaults to undefined, which will start collection from the first record.

Limit field name: Query string parameter to set the number of records retrieved per request. E.g.: `/api/v1/query?term=cribl&limit=100&offset=0`. Defaults to `limit`.

Limit: Maximum number of records to collect per request. Defaults to `50`.

Total record count field name: Identifies the attribute, within the response, that contains the total number of records for the query.

Max pages: The maximum number of pages to retrieve. Defaults to `50`. Set to `0` to retrieve all pages.

Zero-based index: Toggle to `Yes` to indicate that the requested data's first record is at index `0`. The default (No) indicates that the first record is at index `1`.

Page/Size

Select this option to receive data from APIs that use page/size pagination. This selection exposes several additional fields:

Page number field name: Query string parameter that sets the page index to be returned. E.g.: `/api/v1/query?term=cribl&page_size=100&page_number=0`. Defaults to `page`.

Starting page number: (Optional) page number from which to start request. Defaults to undefined, which will start collection from the first page.

Page size field name: Query string parameter to set the number of records retrieved per request. E.g.: `/api/v1/query?term=cribl&page_size=100&page_number=0`. Defaults to `size`.

Page size: Maximum number of records to collect per page. Defaults to `50`.

Total page count field name: Identifies the attribute, within the response, that contains the total number of pages for the query.

Total record count field name: Identifies the attribute, within the response, that contains the total number of records for the query.

Max pages: The maximum number of pages to retrieve. Defaults to `50`. Set to `0` to retrieve all pages.

Zero-based index: Toggle to `Yes` to indicate that the requested data's first record is at index `0`. The default (No) indicates that the first record is at index `1`.

Authentication Settings

In the **Authentication** accordion, use the buttons to select one of these options:

- **None**: Don't use authentication. Compatible with REST servers like AWS, where you embed a secret directly in the request URL.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.
- **Basic (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret.
- **Login**: Enables you to specify several credentials, then perform a POST to an endpoint during the Discover operation. The POST response returns a token, which Cribl Stream uses for later Collect operations. Exposes multiple extra fields – see Login Authentication below.
- **Login (credentials secret)**: Like **Login**, except that you specify a secret referencing the credentials, rather than the credentials themselves. Exposes multiple extra fields – see Login Secret Authentication below.

- **OAuth**: Enables you to directly enter credentials for authentication via the OAuth protocol. Exposes multiple extra fields – see OAuth Authentication below.

- **OAuth (text secret)**: Like the **OAuth** option, except that you specify a stored secret referencing the credentials. Exposes multiple extra fields – see OAuth Secret Authentication below.

Login Authentication

Selecting **Login** exposes the following additional fields:

- **Login URL**: URL for the login API call, which is expected to be a POST call.

- **Username**: Login username.

- **Password**: Login password.

- **POST body**: Template for POST body to send with the login request. The `${username}` and `${password}` variables specify the corresponding credentials' locations in the message.

- **Authorization header**: Authorization header key to pass in Discover and Collect calls. Defaults to the literal name `Authorization`. (Cribl Stream 4.0 and later.)

- **Authorize expression**: JavaScript expression used to compute an Authorization header to pass in Discover and Collect calls. Uses `${token}` to reference the token obtained from the login POST request.

- **Authentication headers**: Optionally, click **Add Header** for each custom auth header you want to define. In the resulting table, enter each header row's **Name**.

  The corresponding **Value** is a JavaScript expression to compute the header's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `earliest` instead of `` `${earliest}` `` – will be evaluated as strings.

Login Secret Authentication

Selecting **Login (credentials secret)** exposes the following additional fields:

- **Login URL**: URL for the login API call, which is expected to be a POST call.

- **Credentials secret**: Select a stored text secret in this drop-down, or click **Create** to configure a new secret.

- **POST body**: Template for POST body to send with the login request. The `${username}` and `${password}` variables specify the corresponding credentials' locations in the message.

- **Token attribute**: Path to the token attribute in the login response body. Supports nested attributes.
- **Authorization header**: Authorization header key to pass in Discover and Collect calls. Defaults to the literal name `Authorization`. (Cribl Stream 4.0 and later.)
- **Authorize expression**: JavaScript expression used to compute an Authorization header to pass in Discover and Collect calls. Uses `${token}` to reference the token obtained from the login POST request.
- **Authentication headers**: Optionally, click **Add Header** for each custom auth header you want to define. In the resulting table, enter each header row's **Name**.

  The corresponding **Value** is a JavaScript expression to compute the header's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `earliest` instead of `` `${earliest}` `` – will be evaluated as strings.

OAuth Authentication

Selecting **OAuth** exposes the following additional fields:

- **Login URL**: Endpoint for the OAuth API call, which is expected to be a POST call.
- **Client secret parameter**: The name of the parameter to send with the **Client secret value**.
- **Client secret value**: The OAuth access token to authorize requests.
- **Extra authentication parameters**: Optionally, click **Add parameter** for each additional OAuth request parameter you want to send in the body of POST requests. Automatically sets the `Content-Type` header to `application/x-www-form-urlencoded`.

  In the resulting table, enter each parameter row's **Name**. The corresponding **Value** is a JavaScript expression to compute the parameter's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `earliest` instead of `` `${earliest}` `` – will be evaluated as strings.
- **Token attribute**: Path to the token attribute in the login response body. Supports nested attributes.
- **Authorization header**: Authorization header key to pass in Discover and Collect calls. Defaults to the literal name `Authorization`. (Cribl Stream 4.0 and later.)
- **Authorize expression**: JavaScript expression used to compute an Authorization header to pass in Discover and Collect calls. Uses `${token}` to reference the token obtained from the login POST request.
- **Authentication headers**: Optionally, click **Add Header** for each custom auth header you want to define. In the resulting table, enter each header row's **Name**.

The corresponding **Value** is a JavaScript expression to compute the header's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `earliest` instead of `` `${earliest}` `` – will be evaluated as strings.

OAuth Secret Authentication

Selecting **OAuth (text secret)** exposes the following additional fields:

- **Login URL**: Endpoint for the OAuth API call, which is expected to be a POST call.
- **Client secret parameter**: The name of the parameter to send with the **Client secret value**.
- **Client secret value (text secret)**: Select a stored text secret in this drop-down, or click **Create** to configure a new secret.
- **Extra authentication parameters**: Optionally, click **Add parameter** for each additional OAuth request parameter you want to send in the body of POST requests. Automatically sets the `Content-Type` header to `application/x-www-form-urlencoded`.

  In the resulting table, enter each parameter row's **Name**. The corresponding **Value** is a JavaScript expression to compute the parameter's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `earliest` instead of `` `${earliest}` `` – will be evaluated as strings.
- **Token attribute**: Path to the token attribute in the login response body. Supports nested attributes.
- **Authorization header**: Authorization header key to pass in Discover and Collect calls. Defaults to the literal name `Authorization`. (Cribl Stream 4.0 and later.)
- **Authorize expression**: JavaScript expression used to compute an Authorization header to pass in Discover and Collect calls. Uses `${token}` to reference the token obtained from the login POST request.
- **Authentication headers**: Optionally, click **Add Header** for each custom auth header you want to define. In the resulting table, enter each header row's **Name**.

  The corresponding **Value** is a JavaScript expression to compute the header's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `earliest` instead of `` `${earliest}` `` – will be evaluated as strings.

Optional Settings

Request Timeout (secs): Here, you can set a maximum time period (in seconds) for an HTTP request to complete before Cribl Stream treats it as timed out. Defaults to `0`, which disables timeout metering.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Disable time filter: Toggle to `Yes` if your Run or Schedule configuration specifies a date range and no events are being collected. This will disable the Collector's event time filtering to prevent timestamp conflicts.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `No`.

Safe headers: Optionally, list headers that you consider safe to log in plain text. Separate the header names with tabs or hard returns.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Settings By Discover Type

For Discover types other than `None`, Cribl Stream exposes additional fields specific to the selected Discover type.

Discover Type: Item List

Setting the **Discover type** to `Item List` exposes this additional field above the Common Collector Settings:

Discover items: List of items to return from the Discover task. Each returned item will generate a Collect task, and can be referenced using `${id}` in the **Collect URL**, the **Collect parameters**, or the **Collect headers**.

Discover Type: JSON Response

Setting the **Discover type** to `JSON Response` exposes these additional fields above the Common Collector Settings:

Discover result: Allows hard-coding the Discover result. Must be a JSON object. Works with the Discover data field.

Discover data field: Within the response, this is the name of the field that contains discovery results. (Leave blank if the result is an array.) Sample JSON entry:

```
items, json: { items: [{id: 'first'},{id: 'second'}] }
```

In an XML response, this is the name of the element that contains discovery results. Sample XML entry:

```
result.items
<response>
 <items>
  <element>
   <id>first</id>
  </element>
  <element>
   <id>second</id>
  </element>
 </items>
</response>
```

Discover Type: HTTP Request

Setting the **Discover type** to `HTTP Request` exposes these additional fields above the Common Collector Settings:

Discover URL: Enter the URL to use for the Discover operation. This can be a constant URL, or a JavaScript expression to derive the URL.

> Where a URL (path or parameters) includes variables that might contain unsafe ASCII characters, encode these variables using `C.Encode.uri(paramName)`. (Examples of unsafe characters are: space, `$`, `/`, `=`.) Example URL with encoding: `'http://localhost:9000/api/v1/system/logs/' + C.Encode.uri(`${id}`).`
>
> Request parameters are not contained directly in the URL are automatically encoded. Cribl Stream URLs/expressions specified in the **Discover URL** field follow redirects.

Discover method: Select the HTTP verb to use for the Discover operation – `GET`, `POST`, `POST with body`, or `Other`.

Discover POST body: Template for POST body to send with the Discover request. (This field is displayed only when you set the **Discover method** to `POST with body`.)

Discover verb: Custom HTTP method to use for the Discover operation. (This field is displayed only when you set the **Discover method** to `Other`.)

Discover parameters: Optional HTTP request parameters to append to the Discover request URL. These refine or narrow the request. Click **Add Parameter** to add parameters as key-value pairs:

- **Name**: Parameter name.

- **Value**: JavaScript expression to compute the parameter's value, normally enclosed in backticks (e.g., `` `${earliest}` ``). Can also be a constant, enclosed in single quotes (`'earliest'`). Values without delimiters (e.g., `earliest`) are evaluated as strings.

Discover headers: Optional Discover request headers.: Click **Add Header** to add headers as key-value pairs:

- **Name**: Header name.
- **Value**: JavaScript expression to compute the header's value, normally enclosed in backticks (e.g., `` `${earliest}` ``). Can also be a constant, enclosed in single quotes (`'earliest'`). Values without delimiters (e.g., `earliest`) are evaluated as strings.

Discover data field: Within the response JSON, name of the field that contains Discover results. Leave blank if the result is an array.

> The following sections describe the Collector Settings' remaining tabs, whose settings and content apply equally to all **Discover type** selections.

Result Settings

The Result Settings determine how Cribl Stream transforms and routes the collected data.

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No` . Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `System Default Rule` .

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Result Routing

Send to Routes: If set to `Yes` (the default), Cribl Stream will send events to normal routing and event processing. Toggle to `No` to select a specific Pipeline/Destination combination. The `No` setting exposes these two additional fields:

- **Pipeline**: Select a Pipeline to process results.
- **Destination**: Select a Destination to receive results.

The default `Yes` setting instead exposes this field:

- **Pre-processing Pipeline**: Pipeline to process results before sending to Routes. Optional.

This field is always exposed:

- **Throttling**: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

> You might disable **Send to Routes** when configuring a Collector that will connect data from a specific Source to a specific Pipeline and Destination. One use case might be a REST Collector that gathers a known, simple type of data from a single endpoint. This approach keeps the Collector's configuration self-contained and separate from Cribl Stream's routing table for live data – potentially simplifying the Routes structure.

Pre-processing Pipeline: Pipeline to process results before sending to Routes. Optional, and available only when **Send to Routes** is toggled to `Yes`.

Throttling: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

Advanced Settings

Advanced Settings enable you to customize post-processing and administrative options.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Time to live: How long to keep the job's artifacts on disk after job completion. This also affects how long a job is listed in **Job Inspector**. Defaults to `4h`.

Remove Discover fields : List of fields to remove from the Discover results. This is useful when discovery returns sensitive fields that should not be exposed in the Jobs user interface. You can specify wildcards (such as `aws*`).

Resume job on boot: Toggle to `Yes` to resume ad hoc collection jobs if Cribl Stream restarts during the jobs' execution.

Formatting Expressions

JavaScript expression fields in this REST/API Collector behave differently from those elsewhere in Cribl Stream. Here, you must enter expressions as template literals, with placeholders referencing variables and JS functions. Here are a few examples:

- To reference the earliest time variable in a URL, header, or parameter (etc.), you would write the variable as `` `${earliest}` ``.
- To reference a function call: `` `${Date.now()}` ``.
- To call a function that references a variable: `` `${Math.floor(earliest)}` ``.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Response Errors

The Collector treats all non-`200` responses from configured URL endpoints as errors. This includes `1xx`, `3xx`, `4xx`, and `5xx` responses.

On Discover, Preview, and most Collect jobs, it interprets these as fatal errors. On Collect jobs, a few exceptions are treated as non-fatal:

- Where a Collect job launches multiple tasks, and only a subset of those tasks fail, Cribl Stream places the job in failed status, but treats the error as non-fatal. (Note that Cribl Stream does not retry the failed tasks.)
- Where a Collect job receives a `3xx` redirection error code, it follows the error's treatment by the underlying library, and does not necessarily treat the error as fatal.

Retry Logic

If this Source receives an HTTP `429` or `503` response code, and the `retry-after` header is present, Cribl Stream will use the header's `delay-seconds` or `http-date` value to determine how long to wait before retrying the request. Cribl Stream will log a warning message with the value retrieved from the header.

If the `retry-after` header is absent, Cribl Stream will make five retries, using a backoff algorithm, at the following intervals (in milliseconds): `200`, `400`, `800`, `1600`, `3200`.

Mitigating Stuck-Job Problems

Occasionally, a scheduled job fails, but continues running for hours or even days, until someone intervenes and cancels it. If left alone, such a "stuck", "orphaned," or "zombie" job will never complete. This can cause missing events in downstream receivers, along with `HTTP timeout` or similar errors in Cribl Stream's logs.

To keep stuck jobs from running excessively long:

- First, try setting **Optional Settings** > **Request Timeout (secs)** – whose default of `0` means "wait forever" – to a desired maximum duration.
- If adjusting **Timeout (secs)** does not fix the problem, try the global setting **Job Timeout** – whose default of `0` allows a job to run indefinitely – to a desired maximum duration. You'll find **Job Timeout** among the task manifest and buffering limits.

Using these settings in tandem works like this:

- **Timeout (secs)** limits the time that Cribl Stream will wait for an HTTP request to complete.
- Then, if a job gets stuck and keeps running beyond that limit, **Job Timeout** can catch and terminate the job, because it monitors the overall time the job has been running.

Last updated by: Dritan Bitincka

10.1.7. S3

Cribl Stream supports collecting data from Amazon S3 stores. This page covers how to configure the Collector.

> For a step-by-step tutorial on using Cribl Stream to replay data from an S3-compatible store, see our Data Collection & Replay sandbox. The sandbox takes about 30 minutes. It provides a hosted environment, with all inputs and outputs preconfigured for you.
>
> Also see our Amazon S3 Better Practices and Using S3 Storage and Replay guides.

How the Collector Pulls Data

When you run an S3 Collector in Discovery mode, the first available Worker returns the list of available files to the Leader Node.

In Full Run mode, the Leader distributes the list of files to process across 1..*N* Workers, as evenly as possible, based on file size. Each Worker then streams the files from the S3 bucket/path to itself.

Compression

Cribl Stream can ingest compressed S3 files if they meet all the following conditions:

- Compressed with the `x-gzip` MIME type.
- End with the `.gz` extension.
- Can be uncompressed using the `zlib.gunzip` algorithm.

Storage Class Compatibility

Cribl Stream does **not** support data preview, collection, or replay from S3 Glacier or S3 Deep Glacier storage classes, whose stated retrieval lags (variously minutes to 48 hours) cannot guarantee data availability when the Collector needs it.

Cribl Stream **does** support data preview, collection, and replay from S3 Glacier Instant Retrieval when you're using the S3 Intelligent-Tiering storage class.

Configuring an S3 Collector

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Sources**, then select **Collectors** > **S3** from the **Manage Sources** page's tiles or left nav. Click **Add Collector** to open the **S3** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.
>
> Collector Sources currently cannot be selected or enabled in the QuickConnect UI.

Collector Settings

The Collector Settings determine how data is collected before processing.

Collector ID: Unique ID for this Collector. E.g., `Attic42TreasureChest`.

Auto-populate from: Select a Destination with which to auto-populate Collector settings. Useful when replaying data.

S3 bucket: Simple Storage Service bucket from which to collect data.

Authentication

Select an AWS authentication method.

The **Auto** option (default) will use environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`, or the attached IAM role. Will work only when running on AWS.

The **Manual** option exposes these fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. if not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials. Optional when running on AWS.

The **Secret** option swaps in this drop-down:

- **Secret key pair**: Select a secret key pair that you've configured in Cribl Stream's internal secrets manager or (if enabled) an external KMS. Follow the **Create** link if you need to configure a key pair.

> The **Manual** option's **Access key** and **Secret key** values override the **Auto** option. For any Workers that you want to associate with an AWS IAM role, using the **Assume Role** controls below – including Cribl-managed or hybrid Cribl.Cloud Workers – ensure that the **Manual** option's key fields are empty.

Assume Role

Enable Assume Role: Slide to `Yes` to enable Assume Role behavior.

AssumeRole ARN: Amazon Resource Name (ARN) of the role to assume.

External ID: External ID to use when assuming role. Enter this if defined in your IAM policy's trust relationship; otherwise, leave blank. (Usage example: AWS Cross-Account Data Collection.)

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Optional Settings

Region: S3 Region from which to retrieve data.

Path: Path, within the bucket, from which to collect data. Templating is supported (e.g., `/myDir/${host}/${year}/${month}/`). More on templates and Filters here.

Path extractors: Extractors enable you to use template tokens as context for expressions that enrich discovery results. For usage details and examples, see Using Path Extractors.

Endpoint: S3 service endpoint. If empty, Cribl Stream will automatically construct the endpoint from the AWS Region. To access the AWS S3 endpoints, use the path-style URL format. You don't need to specify the bucket name in the URL, because Cribl Stream will automatically add it to the URL path. For details, see AWS' Path-Style Requests topic.

Signature version: Signature version to use for signing S3 requests. Defaults to `v4`.

Recursive: If set to `Yes` (the default), data collection will recurse through subdirectories.

Max batch size (files): Maximum number of lines written to the discovery results files each time. Defaults to `10`. To override this limit in the Collector's Schedule/Run modal, use Advanced Settings > Upper task bundle size.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes` .

Verify bucket permissions: Toggle this to `No` if you can access files within the bucket, but not the bucket itself. This resolves errors of the form: `discover task initialization failed...error: Forbidden.`

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Result Settings

The Result Settings determine how Cribl Stream transforms and routes the collected data.

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No` . Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `System Default Rule` .

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Result Routing

Send to Routes: If set to `Yes` (the default), Cribl Stream will send events to normal routing and event processing. Toggle to `No` to select a specific Pipeline/Destination combination. The `No` setting exposes these two additional fields:

- **Pipeline**: Select a Pipeline to process results.
- **Destination**: Select a Destination to receive results.

The default `Yes` setting instead exposes this field:

- **Pre-processing Pipeline**: Pipeline to process results before sending to Routes. Optional.

This field is always exposed:

- **Throttling**: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

> You might disable **Send to Routes** when configuring a Collector that will connect data from a specific Source to a specific Pipeline and Destination. This keeps the Collector's configuration self-contained and separate from Cribl Stream's routing table for live data – potentially simplifying the Routes structure.

Advanced Settings

Advanced Settings enable you to customize post-processing and administrative options.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Time to live: How long to keep the job's artifacts on disk after job completion. This also affects how long a job is listed in **Job Inspector**. Defaults to `4h`.

Remove Discover fields : List of fields to remove from the Discover results. This is useful when discovery returns sensitive fields that should not be exposed in the Jobs user interface. You can specify wildcards (such as `aws*`).

Resume job on boot: Toggle to `Yes` to resume ad hoc collection jobs if Cribl Stream restarts during the jobs' execution.

Using Path Extractors

Click **Add Extractor** to add each extractor as a key-value pair, mapping a **Token** name on the left (a substring of the **Path**) to a custom JavaScript **Extractor expression** on the right (e.g., `{host: value.toLowerCase()}`).

Each expression accesses its corresponding token through its `value` variable, and evaluates the token to populate event fields.

> You can define each token in only one **Extractor expression** per S3 Collector config.

Example #1

Here is a simple, complete example, using a single expression:

TOKEN	EXTRACTOR EXPRESSION	MATCHED VALUE	EXTRACTED RESULT
`/var/log/${foobar}`	`foobar: {program: value.split('.')[0]}`	`/var/log/syslog.1`	`{program: syslog, foobar: syslog.1}`

Example #2

Here is a multi-expression example. Assuming that your S3 bucket path supports the Collector's configured **Path**, this shows how to extract each segment of this example **Path**, and transform it into a reformatted field:

First, the path:

```
/${index}/${_time:%Y}/${_time:%m}/${_time:%d}/${host}/${category}/${_time:%H}/${file}
```

Next, the tokens and extractor expressions:

TOKEN	EXTRACTOR EXPRESSION	PURPOSE
`index`	`{"indexUppercase" : value.toUpperCase()}`	Uppercase the `index`
`host`	`{"hostUpperPrefix" : value.toUpperCase().replace(/(.+?)\..+/,'$1'), "domain" : value.match(/.+?\.(.+)/)[1]}`	Use one token for two fields: `hostUpperPrefix` and `domain`
`category`	`{"categoryUpperFirstLetter" : `${value.substring(0,1).toUpperCase()}${value.substring(1)}`}`	Uppercase the `category` string's first letter
`file`	`{"fileCleanName" : value.replace(/ARCHIVE-/i,'').toUpperCase().split('.')[0], "CRIBL_WORKER_ID" : value.split('.')[1], "compression" : value.split('.')[2]}`	Split the object (file name) into three fields

Here is a corresponding example event, as collected/replayed from S3. The metadata fields at the bottom show the results of the path extractor expressions:

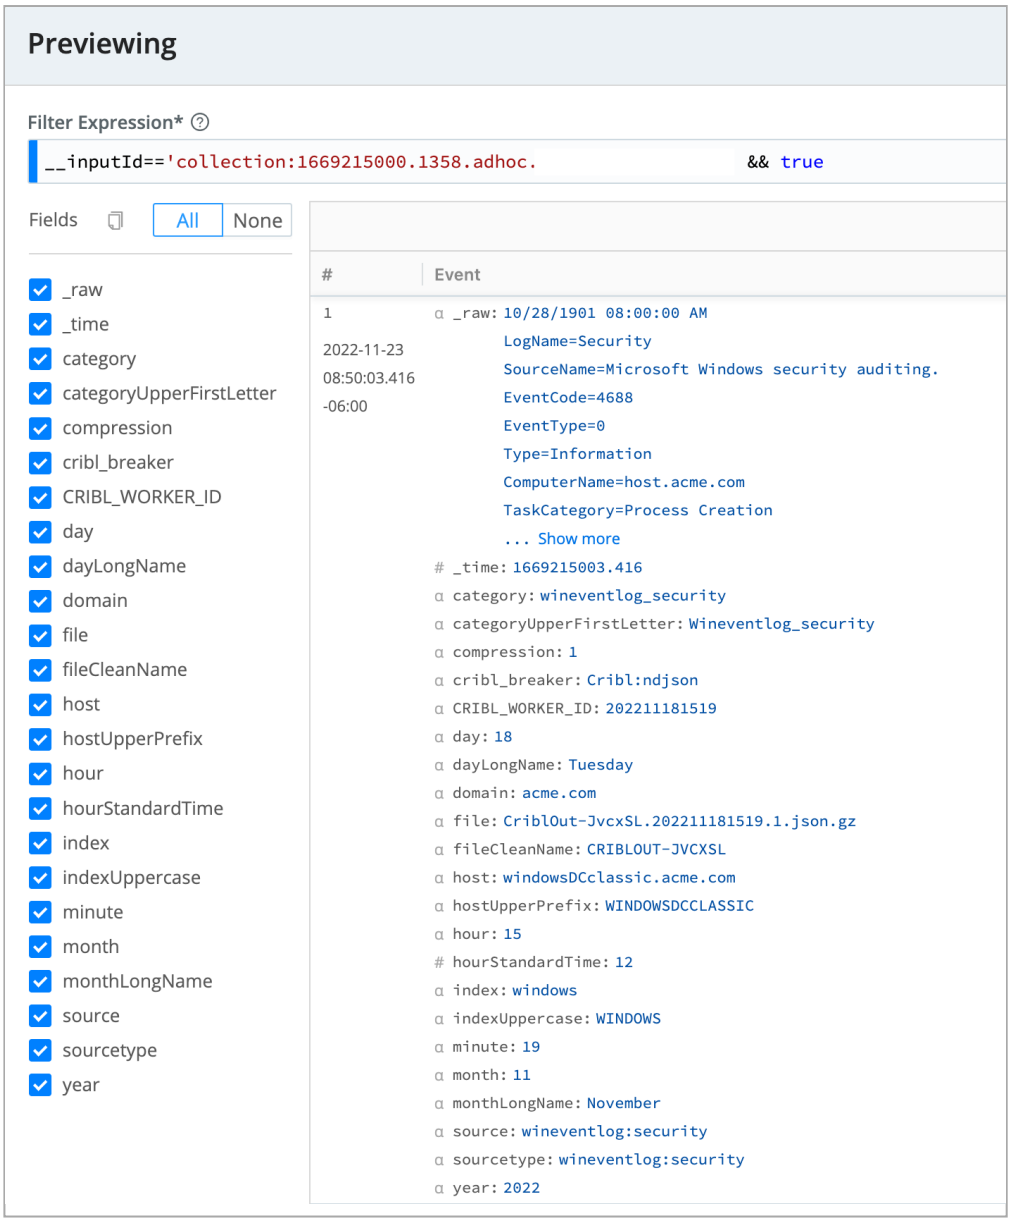

Event with path extractors' transformations

Temporary Access via SSO Provider

You can use Okta or SAML to provide access to S3 buckets using temporary security credentials.

Troubleshooting

When permissions are correct on the object store, and events are reaching the Collector, the Preview pane will show events and the Job Inspector will show an **Events collected** count.

However, if previewing returns no events and throws no error, first check your Filter expression by previewing without it (e.g., simplify the Filter expression to `true`). Then check the Job Inspector: If the **Total size** is

greater than `0`, and the **Received size** is `NA` or `0`, make sure you have list and read permissions on the object store.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Last updated by: Dritan Bitincka

10.1.8. Script

Cribl Stream supports flexible data collection configured by your custom scripts.

How the Collector Pulls Data

When you run a Script Collector in Discovery mode, the first available Worker returns one line of data per discovered item. Each item (line) turns into a Collection task on the Leader Node.

In Full Run mode, the Leader passes the item to collect into the script in the `$CRIBL_COLLECT_ARG` variable, and spreads collection across all available Workers.

Configuring a Script Collector

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Sources**, then select **Collectors** > **Script** from the **Manage Sources** page's tiles or left nav. Click **Add Collector** to open the **Script** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.
>
> Collector Sources currently cannot be selected or enabled in the QuickConnect UI.

Collector Settings

The Collector Settings determine how data is collected before processing.

Collector ID: Unique ID for this Collector. E.g., `sh2GetStuff`.

Discover script: Script to discover which objects/files to collect. This script should output one task per line in `stdout`. Discovery is especially important in a distributed deployment, where the Leader must track all tasks, and must guarantee that each is run by a single Worker. See Examples below.

Collect script: Script to perform data collections. Pass in tasks from the Discover script as `$CRIBL_COLLECT_ARG`. Should output results to `stdout`.

Optional Settings

Shell: Shell in which to execute scripts. Defaults to `/bin/bash`.

> **With Great Power Comes Great Responsibility!**
>
> Scripts will allow you to execute almost anything on the system where Cribl Stream is running. Make sure you understand the impact of what you're executing before you do so! These scripts run as the user running Cribl Stream, so if you are running it as root, these commands will run with root user permissions.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Result Settings

The Result Settings determine how Cribl Stream transforms and routes the collected data.

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Result Routing

Send to Routes: If set to `Yes` (the default), Cribl Stream will send events to normal routing and event processing. Toggle to `No` to select a specific Pipeline/Destination combination. The `No` setting exposes these two additional fields:

- **Pipeline**: Select a Pipeline to process results.
- **Destination**: Select a Destination to receive results.

The default `Yes` setting instead exposes this field:

- **Pre-processing Pipeline**: Pipeline to process results before sending to Routes. Optional.

This field is always exposed:

- **Throttling**: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

> You might disable **Send to Routes** when configuring a Collector that will connect data from a specific Source to a specific Pipeline and Destination. This keeps the Collector's configuration self-contained and separate from Cribl Stream's routing table for live data – potentially simplifying the Routes structure.

Advanced Settings

Advanced Settings enable you to customize post-processing and administrative options.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Time to live: How long to keep the job's artifacts on disk after job completion. This also affects how long a job is listed in **Job Inspector**. Defaults to `4h`.

Remove Discover fields : List of fields to remove from the Discover results. This is useful when discovery returns sensitive fields that should not be exposed in the Jobs user interface. You can specify wildcards (such as `aws*`).

Resume job on boot: Toggle to `Yes` to resume ad hoc collection jobs if Cribl Stream restarts during the jobs' execution.

How the Collector Pulls Data

In the Discover phase, the first available Worker returns one line of data per item discovered. Each item line turns into a Collect task on the Leader Node. In the Collect phase, the items to collect are passed into the script as the variable `$CRIBL_COLLECT_ARG`, and are spread across all available Workers.

Examples

Telemetry Collector

You could define this Collector to check for Cribl Stream telemetry errors, which could cause license validation to fail, eventually (after a delay) blocking data input.

Collector type: `Script`

Discover script: `ls $CRIBL_HOME/log/cribl*`

Collect script: `grep 'Failed to send anonymized telemetry metadata' $CRIBL_COLLECT_ARG`

S3 Collector

In this example, the Discover script retrieves file names from a specified Amazon S3 bucket, and then writes them (one per line) to the standard output. The Collect script processes each line as its `$CRIBL_COLLECT_ARG`, and uses `zcat` to decompress the buckets' data.

Collector type: `Script`

Discover script:

```
aws s3api list-objects --bucket <bucket-name> --prefix <subfolder>/ --query
'Contents[].Key' --output text
```

Collect script: `aws s3 cp s3://<bucket-name>/$CRIBL_COLLECT_ARG - | zcat -f`

Simple Collector

This example essentially spoofs the Discover script with an `echo` command, which simply announces what the Collect script (itself simple) will do.

Collector type: `Script`

Discover script: `echo "speedtest"`

Collect script: `speedtest --json`

Last updated by: Dritan Bitincka

10.1.9. Splunk Search

Cribl Stream supports collecting search results from Splunk queries. The queries can be both simple and complex, as well as real-time searches. This page covers how to configure the Collector.

Configuring a Splunk Search Collector

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Sources**, then select **Collectors** > **Splunk Search** from the **Manage Sources** page's tiles or left nav. Click **Add Collector** to open the **Splunk Search** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.
>
> Collector Sources currently cannot be selected or enabled in the QuickConnect UI.

Collector Settings

The Collector Settings determine how data is collected before processing.

Collector ID: Unique ID for this Collector. E.g., `splunk2search`.

Search endpoint: Rest API used to conduct a search. Defaults to `services/search/jobs/export`.

Output mode: Format of the returned output. Defaults to JSON format.To parse the returned JSON, add the Cribl event breaker which parses newline delimited events in the Event Breakers tab.

Events returned from Splunk search can also be returned in the more compact CSV format. To use CSV format, set the **Output mode** to CSV and specify the CSV event breaker in the Event Breakers tab.

Search

In the **Search** dropdown, type your query parameters:

Search: Enter the Splunk query. For example: `index=myAppLogs level=error channel=myApp OR | mstats avg(myStat) as myStat WHERE index=myStatsIndex.`

Search head: Enter the search head base URL. The default is `https://localhost:8089`.

Earliest: You can enter the earliest time boundary for the search. This maybe be an exact or relative time. For example: `2022-01-14T12:00:00Z` or `-16m@m`.

Latest: You can enter the latest time boundary for the search. This maybe be an exact or relative time. For example: `2022-01-14T12:00:00Z` or `-16m@m`.

Authentication

In the **Authentication** drop-down, use the buttons to select one of these options:

- **None**: Don't use authentication. Compatible with REST servers like AWS, where you embed a secret directly in the request URL.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.
- **Basic (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret.
- **Bearer Token**: Provide the `token` value configured and generated in Splunk.
- **Bearer Token (text secret)**: Provide the Bearer Token referenced by a secret. Select a stored text secret in the resulting **Token (text secret)** drop-down, or click **Create** to configure a new secret.

Optional Settings

Extra parameters: Optional HTTP request parameters to append to the request URL. These refine or narrow the request. Click **Add Parameter** to add parameters as key-value pairs:

- **Name**: Field name.
- **Value**: JavaScript expression to compute the field's value (can be a constant).

Extra headers: Click **Add Header** to (optionally) add collection request headers as key-value pairs:

- **Name**: Header name.
- **Value**: JavaScript expression to compute the header's value (can be a constant).

In the **Request Timeout (secs)** field, you can set a maximum time period (in seconds) for an HTTP request to complete before Cribl Stream treats it as timed out. Defaults to `0`, which disables timeout metering.

> When running a real-time search you must update the **Request Timeout Parameter** to avoid having the collector stuck in a forever running state. Updating the **Request Timeout Parameter** stops the search after the allocated period of time.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Disable time filter: Toggle to `Yes` if your Run or Schedule configuration specifies a date range and no events are being collected. This will disable the Collector's event time filtering to prevent timestamp conflicts.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Result Settings

The Result Settings determine how Cribl Stream transforms and routes the collected data.

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default

`10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Result Routing

Send to Routes: If set to `Yes` (the default), Cribl Stream will send events to normal routing and event processing. Toggle to `No` to select a specific Pipeline/Destination combination. The `No` setting exposes these two additional fields:

- **Pipeline**: Select a Pipeline to process results.
- **Destination**: Select a Destination to receive results.

The default `Yes` setting instead exposes this field:

- **Pre-processing Pipeline**: Pipeline to process results before sending to Routes. Optional.

This field is always exposed:

- **Throttling**: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

> You might disable **Send to Routes** when configuring a Collector that will connect data from a specific Source to a specific Pipeline and Destination. One use case might be a Splunk Search Collector that gathers a known, simple type of data. This approach keeps the Collector's configuration self-contained and separate from Cribl Stream's routing table for live data – potentially simplifying the Routes structure.

Pre-processing Pipeline: Pipeline to process results before sending to Routes. Optional, and available only when **Send to Routes** is toggled to `Yes`.

Throttling: Rate (in bytes per second) to throttle while writing to an output. Also takes values with multiple-byte units, such as `KB`, `MB`, `GB`, etc. (Example: `42 MB`.) Default value of `0` indicates no throttling.

Advanced Settings

Advanced Settings enable you to customize post-processing and administrative options.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Time to live: How long to keep the job's artifacts on disk after job completion. This also affects how long a job is listed in **Job Inspector**. Defaults to `4h`.

Remove Discover fields : List of fields to remove from the Discover results. This is useful when discovery returns sensitive fields that should not be exposed in the Jobs user interface. You can specify wildcards (such as `aws*`).

Resume job on boot: Toggle to `Yes` to resume ad hoc collection jobs if Cribl Stream restarts during the jobs' execution.

How Cribl Stream Pulls Data

This Collector will gather data from the specified **Search head** URL. If you enable scheduled collection, searches will repeat on the interval specified in the **Schedule** modal's **Cron schedule** field.

A single Worker executes each collection job. If the Leader goes down, search jobs in progress will complete, but future scheduled searches will not run until the Leader relaunches.

Mitigating Stuck-Job Problems

Occasionally, a scheduled job fails, but continues running for hours or even days, until someone intervenes and cancels it. If left alone, such a "stuck", "orphaned," or "zombie" job will never complete. This can cause missing events in downstream receivers, along with `HTTP timeout` or similar errors in Cribl Stream's logs.

To keep stuck jobs from running excessively long:

- First, try setting **Optional Settings** > **Request Timeout (secs)** – whose default of `0` means "wait forever" – to a desired maximum duration.
- If adjusting **Timeout (secs)** does not fix the problem, try the global setting **Job Timeout** – whose default of `0` allows a job to run indefinitely – to a desired maximum duration. You'll find **Job Timeout** among the task manifest and buffering limits.

Using these settings in tandem works like this:

- **Timeout (secs)** limits the time that Cribl Stream will wait for an HTTP request to complete.
- Then, if a job gets stuck and keeps running beyond that limit, **Job Timeout** can catch and terminate the job, because it monitors the overall time the job has been running.

Last updated by: Dritan Bitincka

10.1.10. Scheduling and Running

Once you've configured a Collector, you can either run it immediately ("ad hoc") to collect data, or schedule it to run on a recurring interval. Scheduling requires some extra configuration upfront, so we cover this option first.

> For **ad hoc** collection, you can configure whether a job interrupted by an unintended Cribl Stream shutdown will automatically resume upon Cribl Stream restart.
>
> But regardless of this configuration, if you **explicitly** restart or stop Cribl Stream, this will cancel any currently running jobs. This applies to executing the `./cribl restart` or `./cribl stop` CLI commands, as well as to selecting the UI's **Settings** > **Global Settings** > **Controls > Restart** option.
>
> A **scheduled** job interrupted by a shutdown (whether explicit or unintended) will **not** resume upon restart.

Schedule Configuration

Click **Schedule** beside a configured Collector to display the **Schedule configuration** modal. This provides the following controls.

Enabled: Slide to `Yes` to enable this collection schedule.

> The scheduled job will keep running on this schedule forever, unless you toggle **Enabled** back to `Off`. The `Off` setting preserves the schedule's configuration, but prevents its execution.

Cron schedule: A cron schedule on which to run this job.

- The **Estimated schedule** below this field shows the next few collection runs, as examples of the cron interval you've scheduled.

Max concurrent runs: Sets the maximum number of instances of this scheduled job that Cribl Stream will simultaneously run.

Skippable: Skippable jobs can be delayed up to their next run time if the system is hitting concurrency limits. Defaults to `Yes`. Toggling this to `No` displays this additional option:

- **Resume missed runs**: Defaults to `No`. When toggled to `Yes`, if Cribl Stream's Leader (or single instance) restarts, it will run all missed jobs according to their original schedules.

Skippable Jobs and Concurrency Limits

If set to `Yes`, the **Skippable** option obeys these concurrency limits configured separately in **Settings** > **Global Settings** > **General Settings > Job Limits**:

- **Concurrent Job Limit**
- **Concurrent Scheduled Job Limit**

> See Job Limits for details on these and other limits that you can set in global **Settings**.

When the above limits delay a Skippable job:

- The Skippable job will be granted slightly higher priority than non-Skippable jobs.
- If the job receives resources to run before its next scheduled run, Cribl Stream will run the delayed job, then snap back to the original cron schedule.
- If resources do **not** free up before the next scheduled run: Cribl Stream will **skip** the delayed run, and snap back to the original cron schedule.

Set **Skippable** to `No` if you absolutely must have all your data, for compliance or other reasons. In this case, Cribl Stream will build up a backlog of jobs to run.

You can think of **Skippable**: `No` as behaving more like the TCP protocol, with **Skippable**: `Yes` behaving more like UDP.

> **All** collection jobs are constrained by the following options in **Settings** > **Global Settings** > **General Settings > Job Limits**:
>
> - **Concurrent Task Limit**
> - **Max Task Usage Percentage**

Run Configuration and Shared Settings

Most of the remaining fields and options below are shared with the **Run configuration** modal, which you can open by clicking **Run** beside a configured Collector.

Mode

Depending on your requirements, you can schedule or run a collector in these modes:

- Preview – Default for Run, but not offered for scheduled jobs.
- Discovery – Default for scheduled jobs.
- Full Run.

Preview

In the Preview mode, a collection job will return only **a sample subset** of matching results (e.g., 100 events). This is very useful in cases when users need a data sample to:

- Ensure that the correct data comes in.
- Iterate on Filter expressions.
- Capture a sample to iterate on Pipelines.

> **Schedule** configuration omits the Preview option, because Preview is designed for immediate analysis and decision making. To configure a scheduled job with high confidence, you can first manually run Preview jobs with the same Collector, to verify that you're collecting the data you expect.

Preview Settings

In Preview mode, you can optionally configure these options:

Capture time (sec): Maximum time interval (in seconds) to collect data.

Capture up to N events: Maximum number of events to capture.

Where to capture: Select one of the options shown below. (Note that option `2. Before the Routes` is disabled.) If not specified, this will default to `1. Before pre-processing Pipeline`.

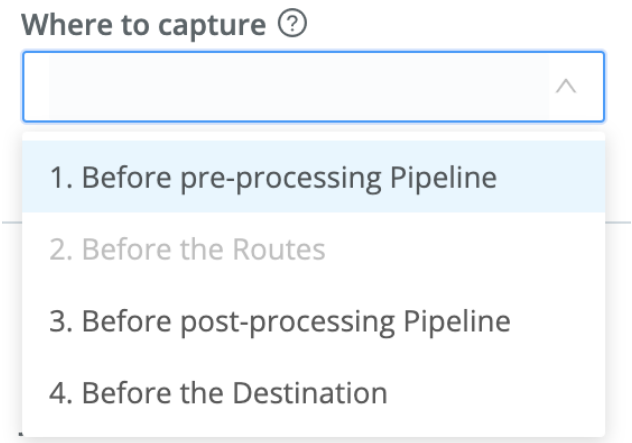

Preview capture options

Discovery

In Discovery mode, a collection job will return only **the list of objects/files** to be collected, but none of the data. This mode is typically used to ensure that the Filter expression and time range are correct before a Full Run job collects unintended data.

Send to Routes

In Discovery mode, this slider enables you to send discovery results to Cribl Stream Routes. Defaults to `No`.

> This setting overrides the Collector configuration's **Result Routing > Send to Routes** setting.

Full Run

In Full Run mode, the collection job is fully executed by Worker Nodes, and will return all data matching the Run configuration.

Time Range

Set an **Absolute** or **Relative** time range for data collection. The **Relative** option is the default, and is particularly useful for configuring scheduled jobs.

> You set dates and times here based on your browser's time zone, but Cribl Stream's backend uses UTC. Set the **Range Timezone** drop-down to your offset from UTC.

Absolute

Select the **Absolute** button to set fixed collection boundaries in your browser's local time. Next, use the **Earliest** and **Latest** controls to set the start date/time and end date/time.

Relative

Select the **Relative** button to set collection boundaries relative to your browser's current local time. Next, use the **Earliest** and **Latest** fields to set start and end times like these:

- **Earliest** example values: `-1h`, `-42m`, `-42m@h`
- **Latest** example values: `now`, `-20m`, `+42m@h`

By default, Cribl Stream uses **Earliest** and **Latest** as time-based tokens, which it evaluates in two ways:

- By comparison to time values specified in the directory path.
- By comparison to the `_time` field.

The Google Cloud Storage, REST/API, and Splunk Search Collectors provide a **Disable time filter** option in their **Collector Settings**. When set to `Yes`, scheduling or running these Collectors against a date range will cause Cribl Stream to ignore event time–based filtering entirely.

Relative Time Syntax

For Relative times, the **Earliest** and **Latest** controls accept the following syntax:

```
[+|-]<time_integer><time_unit>@<snap-to_time_unit>
```

To break down this syntax:

SYNTAX ELEMENT	VALUES SUPPORTED
Offset	Specify: `-` for times in the past, `+` for times in the future, or omit with `now`.
<time_integer>	Specify any integer, or omit with `now`.
<time_unit>	Specify the `now` constant, or one of the following abbreviations: `s[econds]`, `m[inutes]`, `h[ours]`, `d[ays]`, `w[eeks]`, `mon[ths]`, `q[uarters]`, `y[ears]`.
@<snap-to_time_unit>	Optionally, you can append the `@` modifier, followed by any of the above `<time_unit>`s, to round down to the nearest instance of that unit. (See the next section for details.)

Cribl Stream validates relative time values using these rules:

- **Earliest** must not be later than **Latest**.
- Values without units get interpreted as seconds. (E.g., `-1 = -1s`.)

Snap-to-Time Syntax

The `@` snap modifier always rounds **down** (backwards) from any specified time. This is true even in relative time expressions with `+` (future) offsets. For example:

- `@d` snaps back to the beginning of today, 12:00 AM (midnight).
- `+128m@h` looks forward 128 minutes, then snaps back to the nearest round hour. (If you specified this in the `Latest` field, and ran the Collector at 4:20 PM, collection would end at 6:00 PM. The expression would look forward to 6:28 PM, but snap back to 6:00 PM.)

Other options:

- `@w` or `@w7` to snap back to the beginning of the week – defined here as the preceding Sunday.
- To snap back to other days of a week, use `w1` (Monday) through `w6` (Saturday).
- `@mon` to snap back to the 1st of a month.
- `@q` to snap back to the beginning of the most recent quarter – Jan. 1, Apr. 1, Jul. 1, or Oct. 1.
- `@y` to snap back to Jan. 1.

Filter

This is a JavaScript filter expression that is evaluated against token values in the provided collector path (see below), and against the events being collected. The **Filter** value defaults to `true`, which matches all data, but this value can be customized almost arbitrarily.

For example, if a File System or S3 collector is run with this Filter:

```
host=='myHost' && source.endsWith('.log') || source.endsWith('.txt')
```

...then only files/objects with `.log` or `.txt` extensions will be fetched. And, from those, only those events with host field `myHost` will be collected.

At the **Filter** field's right edge are a Copy button, an Expand button to open a validation modal, and a History button. For more extensive options, see Tokens for Filtering below.

Advanced Settings

Log Level: Level at which to set task logging. More-verbose levels are useful for troubleshooting jobs and tasks, but use them sparingly.

Lower task bundle size: Limits the bundle size for small tasks. E.g., bundle five 200KB files into one 1MB task bundle. Defaults to `1MB`.

Upper task bundle size: Limits the bundle size for files above the **Lower task bundle size**. E.g., bundle five 2MB files into one 10MB task bundle. Files greater than this size will be assigned to individual tasks. Defaults to `10MB`.

Reschedule tasks: Whether to automatically reschedule tasks that failed with non-fatal errors. Defaults to `Yes`; does not apply to fatal errors.

Max task reschedule: Maximum number of times a task can be rescheduled. Defaults to `1`.

Job timeout: Maximum time this job will be allowed to run. Units are seconds, if not specified. Sample values: `30`, `45s`, or `15m`. Minimum granularity is 10 seconds, so a `45s` value would round up to a 50-second timeout. Defaults to `0`, meaning unlimited time (no timeout).

State Tracking

See Working with a Tracking Column to learn how to craft a Collector query for state tracking.

Enabled: Slide to `Yes` if you want to use a **tracking column** (also known as a **rising column**) when running scheduled jobs.

Tracking Column: A numeric column whose values increase monotonically. The Collector will track the column's greatest seen value.

> State tracking is available only for Database Collectors.
>
> Cribl recommends that when you enable state tracking on a Database Collector, you configure the schedule to allow only one job to run at a time.
>
> This prevents one run from starting before another has finished, thus avoiding duplicate records being collected and/or state being tracked incorrectly.

Tokens for Filtering

Let's look at the options for path-based (basic) and time-based token filtering.

Basic Tokens

In collectors with paths, such as Filesystem or S3, Cribl Stream supports path filtering via token notation. Basic tokens' syntax follows that of JS template literals: `${<token_name>}` – where `token_name` is the field (name) of interest.

For example, if the path was set to `/var/log/${hostname}/${sourcetype}/`, you could use a Filter such as `hostname=='myHost' && sourcetype=='mySourcetype'` to collect data only from the `/var/log/myHost/mySourcetype/` subdirectory.

Time-based Tokens

In paths with time partitions, Cribl Stream supports further filtering via time-based tokens. This has a direct effect with earliest and latest boundaries. When a job runs against a path with time partitions, the job traverses a minimal superset of the required directories to satisfy the time range, before subsequent event `_time` filtering.

About Partitions and Tokens

Cribl Stream processes time-based tokens as follows:

- For each path, time partitions must be notated in descending order. So Year/Month/Day order is supported, but Day/Month/Year is not.
- Paths may contain more than one partition. E.g., `/my/path/2020-04/20/`.
- In a given path, each time component can be used only once.
  So `/my/path/${_time:%Y}/${_time:%m}/${_time:%d}/...` is a valid expression format, but `/my/path/${_time:%Y}/${_time:%m}/${host}/${_time:%Y}/...` (with a repeated `Y`) is not supported.
- For each path, all extracted dates/times are considered in UTC.

The following strptime format components are allowed:

- `'Y'`, `'y'`, for years
- `'m'`, `'B'`, `'b'`, `'e'`, for months
- `'d'`, `'j'`, for days
- `'H'`, `'I'`, for hours
- `'M'`, for minutes
- `'S'`, for seconds

Token Syntax

Time-based token syntax follows that of a slightly modified JS template literal: `${_time: <some_strptime_format_component>}`. Examples:

FILTER	MATCHES
`/my/path/${_time:%Y}/${_time:%m}/${_time:%d}/...`	`/my/path/2020/04/20/...`
`/my/path/${_time:year=%Y}/${_time:month=%m}/${_time:date=%d}/...`	`/my/path/year=2020/month=05/date`
`/my/path/${_time:%Y-%m-%d}/...`	`/my/path/2020-05-20/...`

Autoscaling with Collection Jobs

Cribl Stream supports autoscaling for streaming data, but not for collection jobs.

If you run a collection job using Workers in an autoscaling group (such as an AWS instance), you must adequately size your Worker Group or Worker Groups and provision the Worker Nodes before you run or schedule a collection job. Otherwise, a race condition may occur between task scheduling and configuration download from the Leader.

Last updated by: Dritan Bitincka

10.1.11. Job Limits

You can configure global limits that optimize the execution of all Collectors and scheduled jobs (including Cribl Stream system tasks). You access these limits as follows:

- Distributed deployments: [Select a Worker Group] > **Group/Fleet Settings** > **System** > **General Settings** > **Limits** > **Jobs**.
- Single-instance deployments: **Settings** > **Global Settings** > **System** > **General Settings** > **Limits** > **Jobs**.

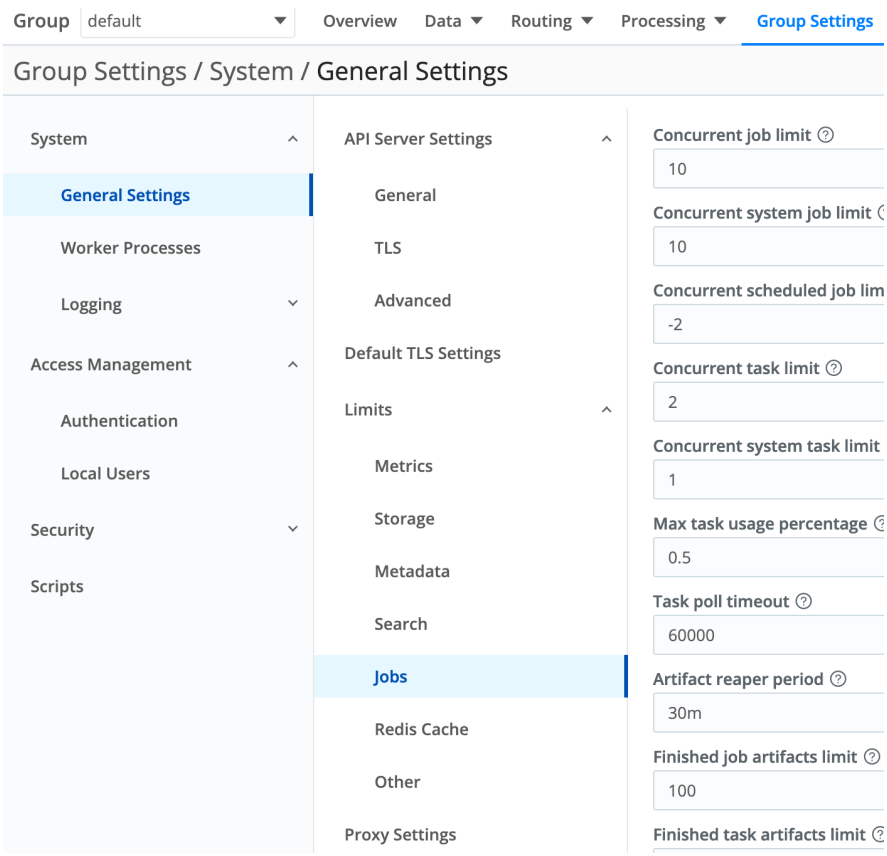

Job Limits settings

Limits Available

The following controls are available at **Settings** > **Global Settings** > **General Settings > Job Limits**.

> In a distributed deployment, these limits are set on, and deployed from, the Leader. They are applied at the Worker Group level (except where noted), and trickle down to individual Worker Processes in the group. Task limits are applied at the Worker Process level.

> In a single-instance deployment, these limits are set on the single instance, and apply to all its Worker Processes.

Job Limits

Concurrent Job Limit: The total number of jobs that can run concurrently. Defaults to `10`.

> If you see jobs being skipped, this indicates that the **Concurrent Job Limit** for this Group has been reached or exceeded. Here, you need to increase this limit to reduce the number of skippable jobs. Note that, for resource-intensive jobs, this might trigger a need to deploy more Worker Nodes.

Concurrent System Job Limit: The total number of **system** jobs that can run concurrently. Defaults to `10`.

Concurrent Scheduled Job Limit: The total number of **scheduled** jobs that can run concurrently. This limit is set as an offset relative to the **Concurrent Job Limit**. Defaults to `-2`.

Task Limits

Concurrent Task Limit: The total number of tasks that a Worker Process can run concurrently. Defaults to `2`.

Concurrent System Task Limit: The number of system tasks that a Worker Process can run concurrently. Defaults to `1`.

Max Task Usage Percentage: Value, between `0` and `1`, representing the percentage of total tasks on a Worker Process that any single job may consume. Defaults to `0.5` (i.e., 50%).

Task Poll Timeout: The number of milliseconds that a Worker's task handler will wait to receive a task, before retrying a request for a task. Defaults to `60000` (i.e., 60 seconds).

Completion Limits

Artifact Reaper Period: Interval on which Cribl Stream attempts to reap jobs' stale disk artifacts. Defaults to `30m`.

Finished Job Artifacts Limit: Maximum number of finished job artifacts to keep on disk. Defaults to `100`.

Finished Task Artifacts Limit: Maximum number of finished task artifacts to keep on disk, per job, on each Worker Node. Defaults to `500`.

Task Manifest and Buffering Limits

Manifest Flush Period: The rate (in milliseconds) at which a job's task manifest should be refreshed. Defaults to `100` ms.

Manifest Max Buffer Size: The maximum number of tasks that the task manifest can hold in memory before flushing to disk. Defaults to `1,000`.

Manifest Reader Buffer Size: The number of bytes that the task manifest reader should pull from disk. Defaults to `4kb`.

Job Dispatching: The method by which tasks are assigned to Worker Processes. Defaults to `Least In-Flight Tasks`, to optimize available capacity. `Round Robin` is also available.

Job Timeout: Maximum time a job is allowed to run. Defaults to `0`, for unlimited time. Units are seconds if not specified. Sample entries: `30`, `45s`, `15m`.

Task Heartbeat Period: The heartbeat period (in seconds) for tasks to report back to the Leader/API. Defaults to `60` seconds.

Last updated by: Dritan Bitincka

10.2. Amazon

10.2.1. Amazon Kinesis Firehose

Cribl Stream supports receiving data from Amazon Kinesis Data Firehose delivery streams via Kinesis' **HTTP endpoint** destination option.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**
>
> This Source supports gzip-compressed inbound data when the `Content-Encoding: gzip` connection header is set.

Configuring Cribl Stream to Receive Data over HTTP(S) from Amazon Kinesis Firehose

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Amazon** > **Firehose**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Amazon** > **Firehose**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Address: Address to bind on. Defaults to 0.0.0.0 (all addresses).

Port: Enter the port number to listen on.

Authentication Settings

Auth tokens: Shared secrets to be provided by any client (Authorization: \<token>). Click **Generate** to create a new secret. If empty, unauthenticated access **will be permitted**.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:

- If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
- If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
- You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

- **Name**: Field name.
- **Value**: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Activity log sample rate: Determines how often request activity is logged at the `info` level. The default `100` value logs every 100th value; a `1` value would log every request; a `10` value would log every 10th request; etc.

Socket timeout (seconds): How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

Request timeout (seconds): How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

> The longer the **Keep-alive timeout**, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and functions can use them to make processing decisions.

Fields for this Source:

- `__firehoseArn`
- `__firehoseEndpoint`
- `__firehoseReqId`
- `__firehoseToken`
- `__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes`.
- `__inputId`
- `__srcIpPort` – See details below.

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the Kinesis Firehose client sending data to this Source.

When any proxies (including load balancers) lie between the Kinesis Firehose client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

Limitations/Troubleshooting

If you set the optional `IntervalInSeconds` and/or `SizeInMBs` parameters in the Kinesis Firehose `BufferingHints` API, beware of selecting extreme values (toward the ends of the API's supported ranges). These can send more bytes than Cribl Stream can buffer, causing Cribl Stream to send HTTP 500 error responses to Kinesis Firehose.

10.2.2. Amazon Kinesis Streams

Cribl Stream supports receiving data records from Amazon Kinesis Streams.

> Type: **Pull** | TLS Support: **YES** (secure API) | Event Breaker Support: **No**

Configuring Cribl Stream to Receive Data from Kinesis Streams

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Amazon** > **Kinesis**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Amazon** > **Kinesis**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Kinesis Stream Source definition.

Stream name: Kinesis stream name (not ARN) to read data from.

Region: Region where the Kinesis stream is located. Required.

Optional Settings

Shard iterator start: Location at which to start reading a shard for the first time. Defaults to `Earliest Record`.

Record data format: Format of data inside the Kinesis Stream records. Gzip compression is automatically detected. Options include:

- Cribl (the default): Use this option if Cribl Stream wrote data to Kinesis in this format. This is a type of NDJSON.

- Newline JSON: Use if the records contain newline-delimited JSON (NDJSON) events – e.g., Kubernetes logs ingested through Kinesis. This is a good choice if you don't know the records' format.
- CloudWatch Logs: Use if you've configured CloudWatch to send logs to Kinesis.
- **Event per line**: NDJSON can use this format when it fails to parse lines as valid JSON.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication Method** buttons to select an AWS authentication method:

- **Auto**: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

- **Manual**: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud.

- **Secret**: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key.

Auto Authentication

When using an IAM role to authenticate with Kinesis Streams, the IAM policy statements must include the following Actions:

- `kinesis:GetRecords`
- `kinesis:GetShardIterator`
- `kinesis:ListShards`

For details, see AWS' Actions, Resources, and Condition Keys for Amazon Kinesis documentation.

Manual Authentication

The **Manual** option exposes these additional fields:

Access key: Enter your AWS access key. If not present, will fall back to `env.AWS_ACCESS_KEY_ID`, or to the metadata endpoint for IAM role credentials.

Secret key: Enter your AWS secret key. If not present, will fall back to `env.AWS_SECRET_ACCESS_KEY`, or to the metadata endpoint for IAM credentials.

Secret Authentication

The **Secret** option exposes this additional field:

Secret key pair: Use the drop-down to select a secret key pair that you've configured in Cribl Stream's internal secrets manager or (if enabled) an external KMS. Follow the **Create** link if you need to configure a key pair.

Assume Role

Enable for Kinesis Streams: Whether to use Assume Role credentials to access Kinesis Streams. Defaults to `No`.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

- **Name**: Field name.
- **Value**: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Shard selection expression: A JavaScript expression to be called with each `shardId` for the stream. The shard will be processed if the expression evaluates to a truthy value. Defaults to `true`.

Service Period: Time interval (in minutes) between consecutive service calls. Defaults to `1` minute.

Endpoint: Kinesis stream service endpoint. If empty, the endpoint will be automatically constructed from the region.

Signature version: Signature version to use for signing Kinesis Stream requests. Defaults to `v4`.

Verify KPL checksums: Enable this setting to verify Kinesis Producer Library (KPL) event checksums.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`.

Avoid duplicate records: If toggled to `Yes`, this Source will always start streaming at the next available record in the sequence. (This can cause data loss after a Worker Node's unexpected shutdown or restart.) With the default `No`, the Source will reread the last two batches of events at startup. (This prevents data loss, but can ingest duplicate events.)

Records limit per call: In v.4.0.4 and later, sets the maximum number of records ingested, per shard, in each getRecords call. You can acclerate data collection by increasing the default/minimum `5000` limit, to as high as `10000` records.

Total records limit: In v.4.0.4 and later, sets the maximum number of records, across all shards, to pull down at once per Worker Process. Default/minimum value is `20000` records. Beware of very high values that could excessively consume Workers' memory.

Shard Load Balancing: The load-balancing algorithm to use for spreading out shards across Workers and Worker Processes. Options include:

- Consistent Hashing (default)
- Round Robin

For the Round Robin option, both the Leader and the Worker Groups must be on Cribl Stream 4.1 or later.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Field for this Source:

- `__inputId`

How Cribl Stream Pulls Data

Worker Processes get a list of available shards from Kinesis, and contact the Leader Node to fetch the latest sequence numbers. Based on the sequence number's value, the Worker either resumes the shard reading from where Cribl Stream previously left off, or starts reading from the beginning.

The Kinesis Streams Source stores shard state on disk, so that it can pick up where it left off across restarts. The state file is located in Cribl Stream's `state/` subdirectory; the path format looks like this:

```
.../state/kvstore/<groupId>/input_kinesis_<inputId>_<streamName>/state.json
```

For example:

```
state/kvstore/default/input_kinesis_kinesisIn_just-a-test/state.json
```

Worker Processes become Kinesis Consumers, and fetch the records for the assigned shards. Every 5 minutes, each Worker Process forwards to the Leader Node the latest sequence numbers for the shards that Worker Process is responsible for. The Leader Node persists the `shardId > sequenceNumber` mapping to disk.

10.2.3. Amazon S3

Cribl Stream supports receiving data from Amazon S3 buckets, using event notifications through SQS.

> Type: **Pull** | TLS Support: **YES** (secure API) | Event Breaker Support: **YES**
>
> Cribl Stream running on Linux (only) can use this Source to read Parquet files, identified by a `.parquet`, `.parq`, or `.pqt` filename extension.
>
> See our Amazon S3 Better Practices and Using S3 Storage and Replay guides.

S3 Setup Strategy

The source S3 bucket must be configured to send `s3:ObjectCreated:*` events to an SQS queue, either directly (easiest) or via SNS (Amazon Simple Notification Service). See the event notification configuration guidelines below.

SQS messages will be deleted after they're read, unless an error occurs, in which case Cribl Stream will retry. This means that although Cribl Stream will ignore files not matching the **Filename Filter**, their SQS events/notifications will still be read, and then deleted from the queue (along with those from files that match).

These ignored files will no longer be available to other S3 Sources targeting the same SQS queue. If you still need to process these files, we suggest one of these alternatives:

- Using a different, dedicated SQS queue. (Preferred and recommended.)
- Applying a broad filter on a single Source, and then using pre-processing Pipelines an/or Route filters for further processing.

Compression

Cribl Stream can ingest compressed S3 files if they meet all the following conditions:

- Compressed with the `x-gzip` MIME type.
- End with the `.gz` extension.
- Can be uncompressed using the `zlib.gunzip` algorithm.

Storage Class Compatibility

Cribl Stream does **not** support data preview, collection, or replay from S3 Glacier or S3 Deep Glacier storage classes, whose stated retrieval lags (variously minutes to 48 hours) cannot guarantee data availability when the Collector needs it.

Cribl Stream **does** support data preview, collection, and replay from S3 Glacier Instant Retrieval when you're using the S3 Intelligent-Tiering storage class.

Configuring Cribl Stream to Receive Data from Amazon S3

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Amazon** > **S3**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Amazon** > **S3**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this S3 Source definition.

Queue: The name, URL, or ARN of the SQS queue to read events from. When specifying a non-AWS URL, you must use the format: `{url}/<queueName>`. (E.g., `https://host:port/<queueName>`.) This value must be a JavaScript expression (which can evaluate to a constant), enclosed in single quotes, double quotes, or backticks.

Optional Settings

Filename filter: Regex matching file names to download and process. Defaults to `.*`, to match all characters. This regex will be evaluated against the S3 key's full path.

Region: AWS Region where the S3 bucket and SQS queue are located. Required, unless the **Queue** entry is a URL or ARN that includes a Region.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication Method** buttons to select an AWS authentication method.

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select a secret key pair that you've configured in Cribl Stream's internal secrets manager or (if enabled) an external KMS. Follow the **Create** link if you need to configure a key pair.

Assume Role

Enable for S3: Whether to use Assume Role credentials to access S3. Defaults to `Yes`.

Enable for SQS: Whether to use Assume Role credentials when accessing SQS (Amazon Simple Queue Service). Defaults to `No`.

AWS account ID: SQS queue owner's AWS account ID. Leave empty if the SQS queue is in the same AWS account.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

This section defines event breaking rulesets that will be applied, in order.

Event Breaker Rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Endpoint: S3 service endpoint. If empty, defaults to AWS's region-specific endpoint. Otherwise, used to point to an S3-compatible endpoint. To access the AWS S3 endpoints, use the path-style URL format. You don't need to specify the bucket name in the URL, because Cribl Stream will automatically add it to the URL path. For details, see AWS' Path-Style Requests topic.

Signature version: Signature version to use for signing SQS requests. Defaults to `v4`.

Max messages: The maximum number of messages that SQS should return in a poll request. Amazon SQS never returns more messages than this value. (However, fewer messages might be returned.) Acceptable values: 1 to 10. Defaults to `1`.

Visibility timeout seconds: The duration (in seconds) that the received messages are hidden from subsequent retrieve requests, after being retrieved by a ReceiveMessage request. Defaults to `600`.

> Cribl Stream will automatically extend this timeout until the initial request's files have been processed – notably, in the case of large files that require additional processing time.

Num receivers: The number of receiver processes to run. The higher the number, the better the throughput, at the expense of CPU overhead. Defaults to `1`.

Poll timeout (secs): How long to wait for events before polling again. Minimum `1` second; default `10`; maximum `20`. Short durations increase the number - and thus the cost – of requests sent to AWS. (The UI will show a warning for intervals shorter than `5` seconds.) Long durations increase the time the Source takes to react to configuration changes and system restarts.

Socket timeout: Socket inactivity timeout (in seconds). Increase this value if retrievals time out during backpressure. Defaults to `300` seconds.

Max Parquet chunk size (MB): Maximum size for each Parquet chunk. Defaults to `5` MB. Valid range is `1` to `100` MB. Cribl Stream stores chunks in the location specified by the `CRIBL_TMP_DIR` environment variable. It removes the chunks immediately after reading them. See Environment Variables.

Parquet chunk download timeout (seconds): The maximum time to wait for a Parquet file's chunk to be downloaded. If a required chunk cannot not be downloaded within this time limit, processing will end. Defaults to `600` seconds. Valid range is `1` second to `3600` seconds (1 hour).

Skip file on error: Toggle to **Yes** to skip files that trigger a processing error. (E.g., corrupted files.) Defaults to **No**, which enables retries after a processing error.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes` .

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__source`

How to Configure S3 to Send Event Notifications to SQS

> For step-by-step instructions, see AWS' Walkthrough: Configure a Bucket for Notifications (SNS Topic and SQS Queue).

1. Create a Standard SQS Queue. Note its ARN.
2. Replace its access policy with one similar to the examples below. To do so, select the queue; and then, in the **Permissions** tab, click: **Edit Policy Document (Advanced)**. (These examples differ only at line 9,

showing public access to the SQS queue versus S3-only access to the queue.)

3. In the Amazon S3 console, add a notification configuration to publish events of the `s3:ObjectCreated:*` type to the SQS queue.

Permissive SQS access policy | Restrictive SQS access policy

```
{
 "Version": "2012-10-17",
 "Id": "example-ID",
 "Statement": [
  {
   "Sid": "<SID name>",
   "Effect": "Allow",
   "Principal": {
    "AWS":"*"
   },
   "Action": [
    "SQS:SendMessage"
   ],
   "Resource": "example-SQS-queue-ARN",
   "Condition": {
      "ArnLike": { "aws:SourceArn": "arn:aws:s3:*:*:example-bucket-name" }
   }
  }
 ]
}
```

S3 and SQS Permissions

The following permissions are required on the S3 bucket:

- `s3:GetObject`
- `s3:ListBucket`

The following permissions are required on the SQS queue:

- `sqs:ReceiveMessage`
- `sqs:DeleteMessage`
- `sqs:ChangeMessageVisibility`
- `sqs:GetQueueAttributes`
- `sqs:GetQueueUrl`

Temporary Access via SSO Provider

You can use Okta or SAML to provide access to S3 buckets using temporary security credentials.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

How Cribl Stream Pulls Data

Workers poll message from SQS. The call will return messages if they are available, or will time out after 1 second if no messages are available.

Each Worker gets its share of the load from S3. By default, S3 returns a maximum of 1 message in a single poll request. You can change this default in **Max messages**.

Best Practices

Beyond these basics, also see our Amazon S3 Better Practices and Using S3 Storage and Replay guides:

- When Cribl Stream instances are deployed on AWS, use IAM Roles whenever possible.
    - Not only is this safer, but it also makes the configuration simpler to maintain.
- Although optional, we highly recommend that you use a **Filename Filter**.
    - This will ensure that Cribl Stream ingests only files of interest.
    - Ingesting only what's strictly needed improves latency, processing power, and data quality.
- If higher throughput is needed, increase **Advanced Settings** > **Number of Receivers** and/or **Max messages**. However, do note:
    - These are set at `1` by default. Which means, **each** Worker Process, in **each** Cribl Stream Worker Node, will run 1 receiver consuming 1 message (i.e., S3 file) at a time.
    - Total S3 objects processed at a time per Worker Node = Worker Processes x Number of Receivers x Max Messages
    - Increased throughput implies additional CPU utilization.
- When ingesting large files, tune up the **Visibility Timeout**, or consider using smaller objects.

- The default value of `600s` works well in most cases, and while you certainly can increase it, we suggest that you also consider using smaller S3 objects.

Troubleshooting Notes

- VPC endpoints for SQS and for S3 might need to be set up in your account. Check with your administrator for details.
- If you're having connectivity issues, but having no problems with the CLI, see if the AWS CLI proxy is in use. Check with your administrator for details.

> **Troubleshooting Resources**
>
> Cribl University offers an Advanced Troubleshooting > Source Integrations: S3 short course. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Advanced Troubleshooting short courses and Troubleshooting Criblets.

See also AWS Sources/Destinations & S3-Compatible Stores for information on common errors.

10.2.4. Amazon SQS

Cribl Stream supports receiving events from Amazon Simple Queuing Service.

> Type: **Pull** | TLS Support: **YES** (secure API) | Event Breaker Support: **No**

Configuring Cribl Stream to Receive Data from Amazon SQS

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Amazon** > **SQS**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Amazon** > **SQS**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this SQS Source definition.

Queue: The name, URL, or ARN of the SQS queue to read events from. This value must be a JavaScript expression (which can evaluate to a constant), enclosed in single quotes, double quotes, or backticks. To specify a non-AWS URL, use the format: `'{url}/<queueName>'`. (E.g., `':port/<myQueueName>'`.)

Queue type: The queue type used (or created). Defaults to `Standard`. `FIFO` (First In, First Out) is the other option.

Optional Settings

Create queue: If toggled to `Yes`, Cribl Stream will create the queue if it does not exist.

Region: AWS Region where the SQS queue is located. Required, unless the **Queue** entry is a URL or ARN that includes a Region.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication Method** buttons to select an AWS authentication method.

Auto

This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual

If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

Secret

If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select a secret key pair that you've configured in Cribl Stream's internal secrets manager or (if enabled) an external KMS. Follow the **Create** link if you need to configure a key pair.

Assume Role

Enable for SQS: Whether to use Assume Role credentials to access SQS. Defaults to `No`.

AWS account ID: SQS queue owner's AWS account ID. Leave empty if SQS queue is in same AWS account.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the external ID to use when assuming role.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Endpoint: SQS service endpoint. If empty, the endpoint will be automatically constructed from the AWS Region.

Signature version: Signature version to use for signing SQS requests. Defaults to `v4`; `v2` is also available.

Max messages: The maximum number of messages that SQS should return in a poll request. Amazon SQS never returns more messages than this value. (However, fewer messages might be returned.) Acceptable values: `1` to `10`. Defaults to `10`.

Visibility timeout seconds: The duration (in seconds) that the received messages are hidden from subsequent retrieve requests, after they're retrieved by a `ReceiveMessage` request. Defaults to `600`.

Num receivers: The number of receiver processes to run. The higher the number, the better the throughput, at the expense of CPU overhead. Defaults to `3`.

Poll timeout (secs): How long to wait for events before polling again. Minimum `1` second; default `10`; maximum `20`. Short durations increase the number - and thus the cost – of requests sent to AWS. (The UI will

show a warning for intervals shorter than `5` seconds.) Long durations increase the time the Source takes to react to configuration changes and system restarts.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to reject certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`, the restrictive option.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__sqsSysAttrs`

The `_sqsSysAttrs` field can take on the following properties, which are reported to Cribl Stream from SQS:

- `__sqsSysAttrs.ApproximateFirstReceiveTimestamp`: Returns the time (epoch time in milliseconds) the message was first received from the queue.
- `__sqsSysAttrs.ApproximateReceiveCount`: Returns the number of times a message has been received from the queue without being deleted.
- `__sqsSysAttrs.SenderId`: For an IAM user, returns the IAM user ID (e.g.: `ABCDEFGHI1JKLMNOPQ23R`). For an IAM role, returns the IAM role ID (e.g.: `ABCDE1F2GH3I4JK5LMNOP:i-a123b456`).
- `__sqsSysAttrs.SentTimestamp`: Returns the time (epoch time in milliseconds) the message was sent to the queue.

- `__sqsSysAttrs.MessageDeduplicationId`: Returns the value provided by the producer that calls the `SendMessage` action.
- `__sqsSysAttrs.MessageGroupId`: Returns the value provided by the producer that calls the `SendMessage` action – messages with the same `MessageGroupId` are returned in sequence.
- `__sqsSysAttrs.SequenceNumber`: Returns the sequence-number value provided by Amazon SQS.
- `__sqsSysAttrs.AWSTraceHeader`: Returns the AWS X-Ray trace header string.

For background on these message properties, see AWS' ReceiveMessage > Request Parameters documentation.

SQS Permissions

The following permissions are needed on the SQS queue:

- `sqs:ReceiveMessage`
- `sqs:DeleteMessage`
- `sqs:GetQueueAttributes`
- `sqs:GetQueueUrl`
- `sqs:CreateQueue` (optional, if and only if you want Cribl Stream to create the queue)

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Troubleshooting Notes

> VPC endpoints for SQS might need to be set up in your account. Check with your administrator for details.

How Cribl Stream Pulls Data

Workers poll messages from SQS. The call will return a message if one is available, or will time out after 1 second if no messages are available.

Each Worker gets its share of the load from SQS, and it receives a notification of a file newly added to an S3 bucket. By default, SQS returns a maximum of 10 messages in a single poll request.

10.3. Azure

10.3.1. Azure Blob Storage

Cribl Stream supports receiving data from Azure Blob Storage buckets. Cribl Stream uses Azure Event Grid to receive notifications, via a queue, when new blobs are added to a storage account.

> Type: **Pull** | TLS Support: **YES** (secure API) | Event Breaker Support: **YES** Available in: Cribl Stream (LogStream) 2.4.4 and above.
>
> Cribl Stream running on Linux (only) can use this Source to read Parquet files, identified by a `.parquet`, `.parq`, or `.pqt` filename extension.

Restrictions

Cribl Stream supports data ingestion from Azure's **hot** and **cool** access tiers, but not from the **archive** tier – whose stated retrieval lag, up to several hours, cannot guarantee data availability.

This Source supports block blobs, but not append blobs, which can change after they are initially created and the create message is sent. Consider using a Cribl Stream Azure Event Hubs Source if you need to ingest changeable Azure data.

Configuring Cribl Stream to Receive Data from Azure Blob Storage

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Azure** > **Blob Storage**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Azure** > **Blob Storage**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Azure Blob Storage Source definition.

Queue: The queue name from which to read Blob notifications. Value must be a JavaScript expression (which can evaluate to a constant value), enclosed in quotes or backticks. Can be evaluated only at init time. E.g., referencing a Global Variable: `myQueue-${C.vars.myVar}`.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Use this default option to enter your Azure Storage connection string directly. Exposes a **Connection string** field for this purpose. (If left blank, Cribl Stream will fall back to `env.AZURE_STORAGE_CONNECTION_STRING`.)

- **Secret**: This option exposes a **Connection string (text secret)** drop-down, in which you can select a stored secret that references an Azure Storage connection string. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. A **Create** link is available if you need a new secret.

Connection String Format

Either authentication method uses an Azure Storage connection string in this format:

```
DefaultEndpointsProtocol=[http|https];AccountName=<your-account-name>;AccountKey=
<your-account-key>;EndpointSuffix=<your-endpoint-suffix>
```

A fictitious example, using Microsoft's recommended HTTPS option, is:

```
DefaultEndpointsProtocol=https;AccountName=storagesample;AccountKey=12345678...32;Endpo
```

Optional Settings

Filename filter: Regex matching file names to download and process. Defaults to `.*`, to match all characters.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Processing Settings

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

This section defines event breaking rulesets that will be applied, in order.

Event Breaker rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Pipelines. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Max messages: The maximum number of messages to return in a poll request. Azure queues never return more messages than this value (although they might return fewer messages). Acceptable values: `1` to `32`.

Visibility timeout (secs): The duration (in seconds) that the received messages are hidden from subsequent retrieve requests, after being retrieved by a `ReceiveMessage` request. Defaults to `600` seconds. Maximum allowed value is `604800` seconds (7 days).

> Cribl Stream will automatically extend this timeout until the initial request's files have been processed – notably, in the case of large files that require additional processing time.

Num receivers: The number of receiver processes to run. The higher the number, the better the throughput, at the expense of CPU overhead. Defaults to `1`.

Service period (secs): The interval (in seconds) at which pollers should be validated, and restarted if exited. Defaults to `5` seconds.

Skip file on error: Toggle to **Yes** to skip files that trigger a processing error (e.g., corrupted files). Defaults to **No**, which enables retries after a processing error.

Max Parquet chunk size (MB): Maximum size for each Parquet chunk. Defaults to `5` MB. Valid range is `1` to `100` MB. Cribl Stream stores chunks in the location specified by the `CRIBL_TMP_DIR` environment variable. It removes the chunks immediately after reading them. See Environment Variables.

Parquet chunk download timeout (seconds): The maximum time to wait for a Parquet file's chunk to be downloaded. If a required chunk cannot not be downloaded within this time limit, processing will end. Defaults to `600` seconds. Valid range is `1` second to `3600` seconds (1 hour).

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__source`

> The remainder of this topic covers required Azure-side configuration.

Configuring Azure Blob Notifications

This Source needs to receive Azure Event Grid notifications, via a queue, when new blobs are added to a storage account. This queue approach enables Cribl Stream to manage backpressure conditions and retries upon errors.

You will therefore need to enable notifications in the Azure portal. The basic flow is:

File upload → Blob container → Blob Created notification → Azure Queue Storage queue

To configure notifications from the Blob storage account in the Azure backend, there are three major steps, outlined below:

1. Create an Event Grid system topic.
2. Create a queue.
3. Configure the generation of storage account notifications when new blobs are uploaded to the queue.

> Azure's UI will change over time. Please fall back to Microsoft's Azure Event Grid documentation for up-to-date instructions and screenshots.

1. Create System Topic

First, you must create a system topic, to which Azure will publish notifications. In the Azure portal, start at **Event Grid System Topics**:

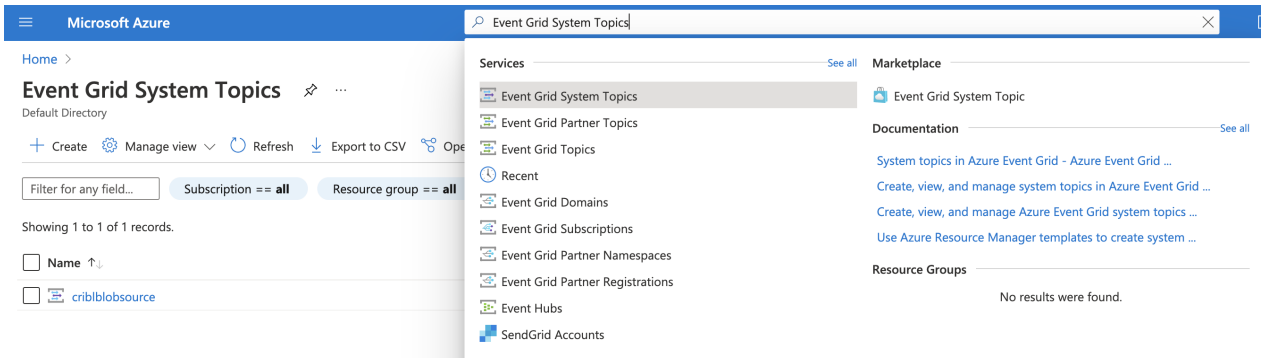

Azure portal > System topics

Select **+Create** to create a new system topic, then set the **Topic Type** to **Storage Account (Blob)**:

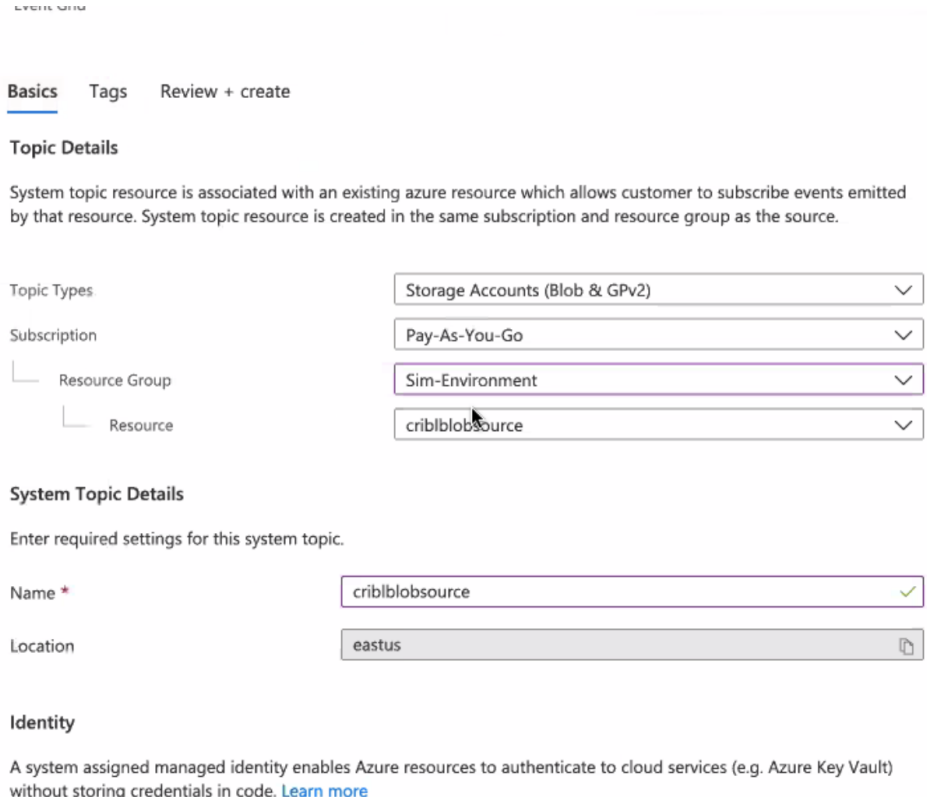

Creating a system topic

In **Subscription > Resource Group > Resource**, reference the storage account where you want to generate notifications.

Give the topic an arbitrary name that is meaningful to you. (In this example, the name is the same as the storage account.)

2. Create Storage Queue

Next, navigate to your storage account to create a queue.

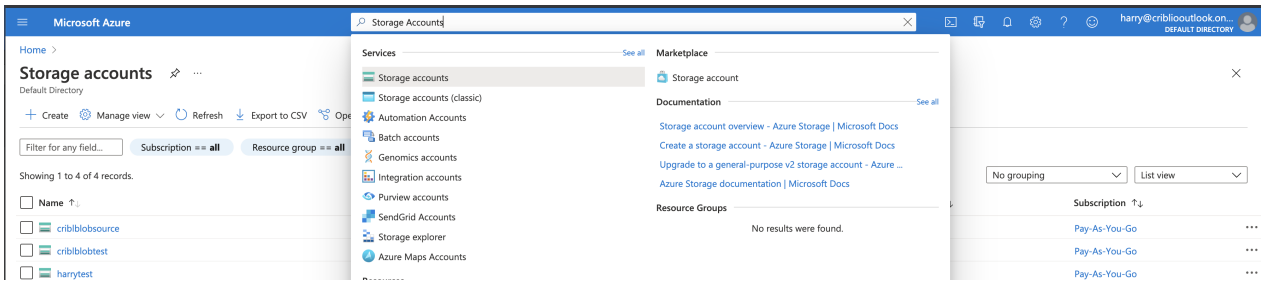

Accessing your storage account

Select the storage account for which you would like to set up notifications. Then, in the submenu, select **Queue service > Queues**:

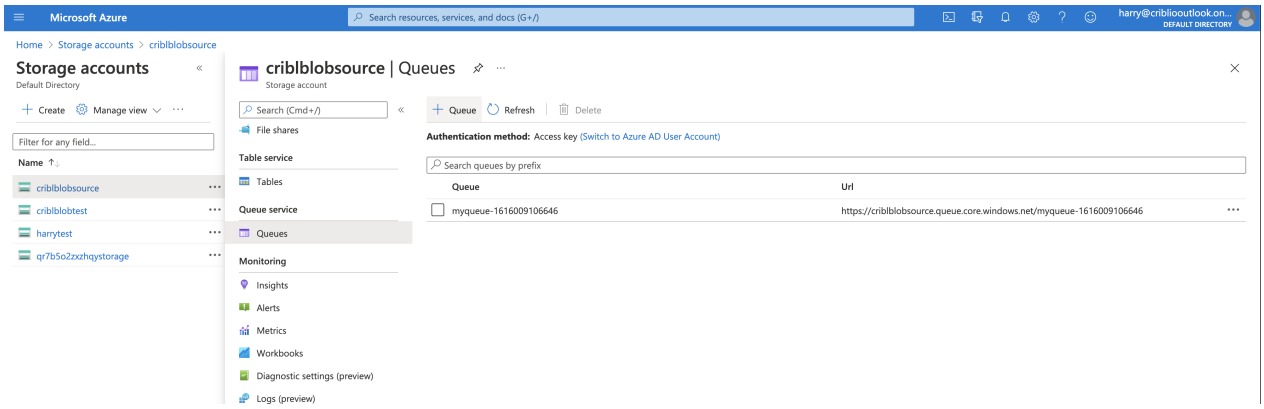

Accessing queues

Select **Create queue**, and give the queue a name that is meaningful to you.

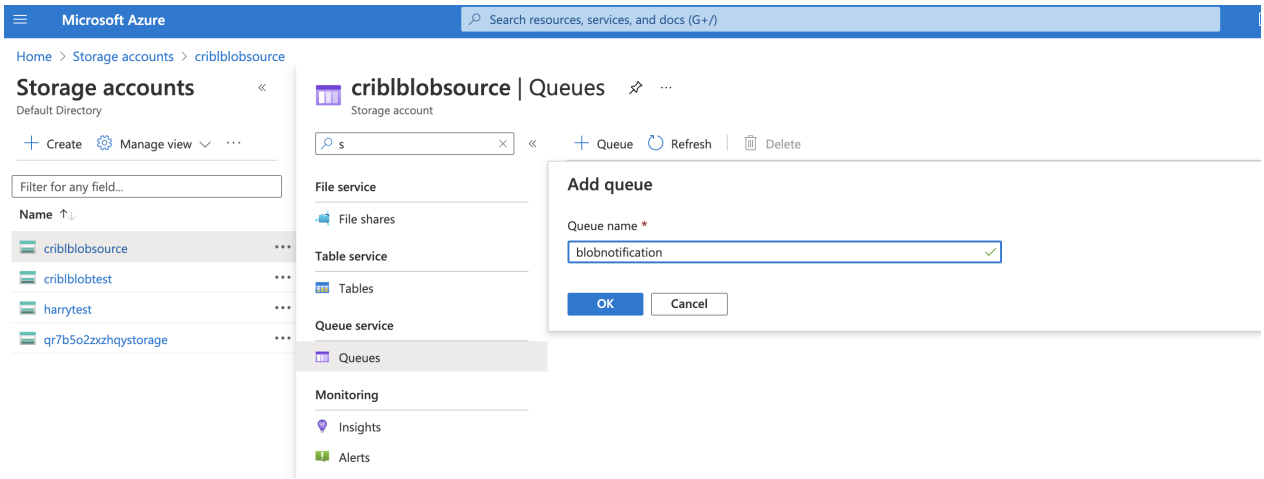

Adding a queue

3. Configure Storage Account Notifications

Next, set up the storage account that will publish **Blob Create** notifications to the queue, using the system topic. From the **Storage Accounts** menu, select **Events**:

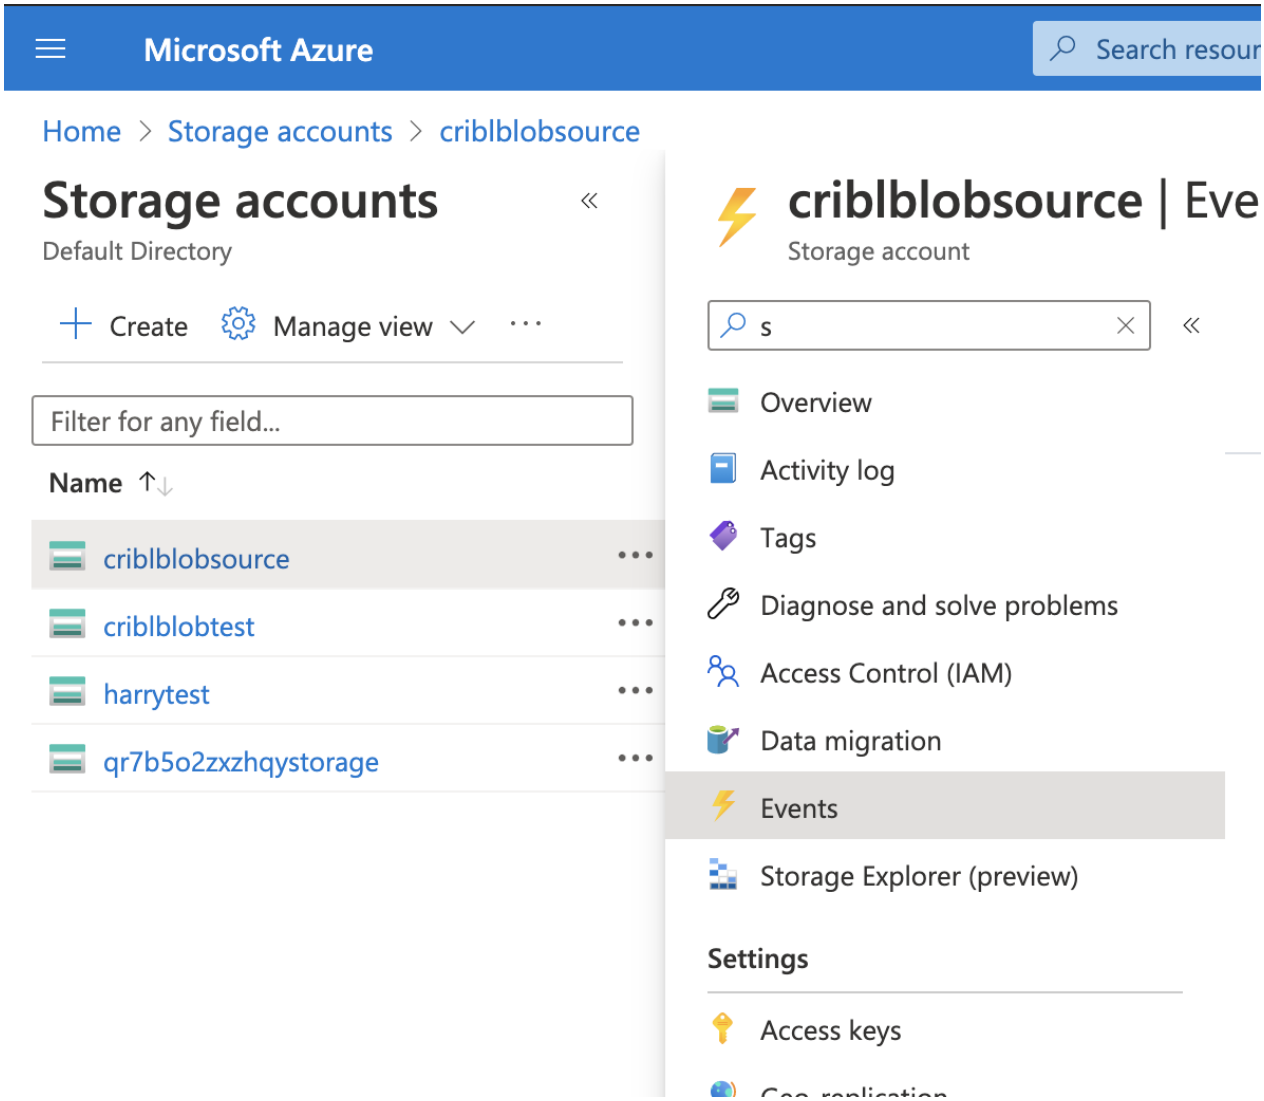

Accessing your storage account

Then click **+ Event Subscription** to proceed:

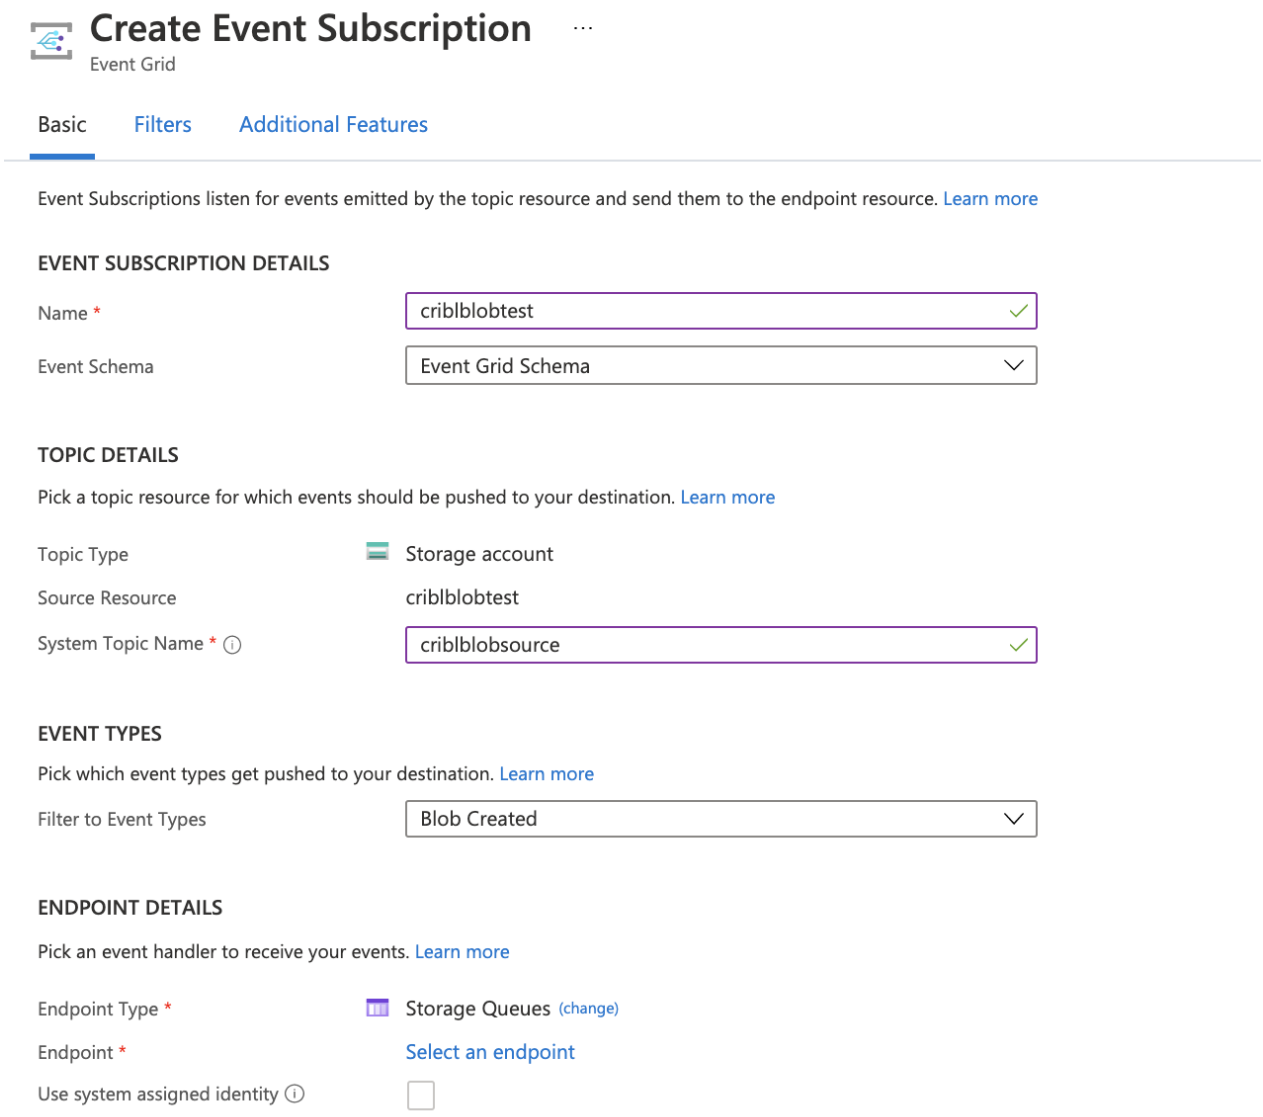

Creating a subscription.

There are a few things to configure here:

- Enter a **Name** for the subscription.
- In **System Topic Name**, enter the name of the system topic you created in 1. Create System Topic above.
- In **Event Types**, select **Blob Created**, and deselect **Blob Deleted**.
- As the **Endpoint Type**, select **Storage Queues**.
- Click **Select an endpoint**, and click the subscription to use (**Pay-As-You-Go**).

Next, select the storage account on which to add the subscription:

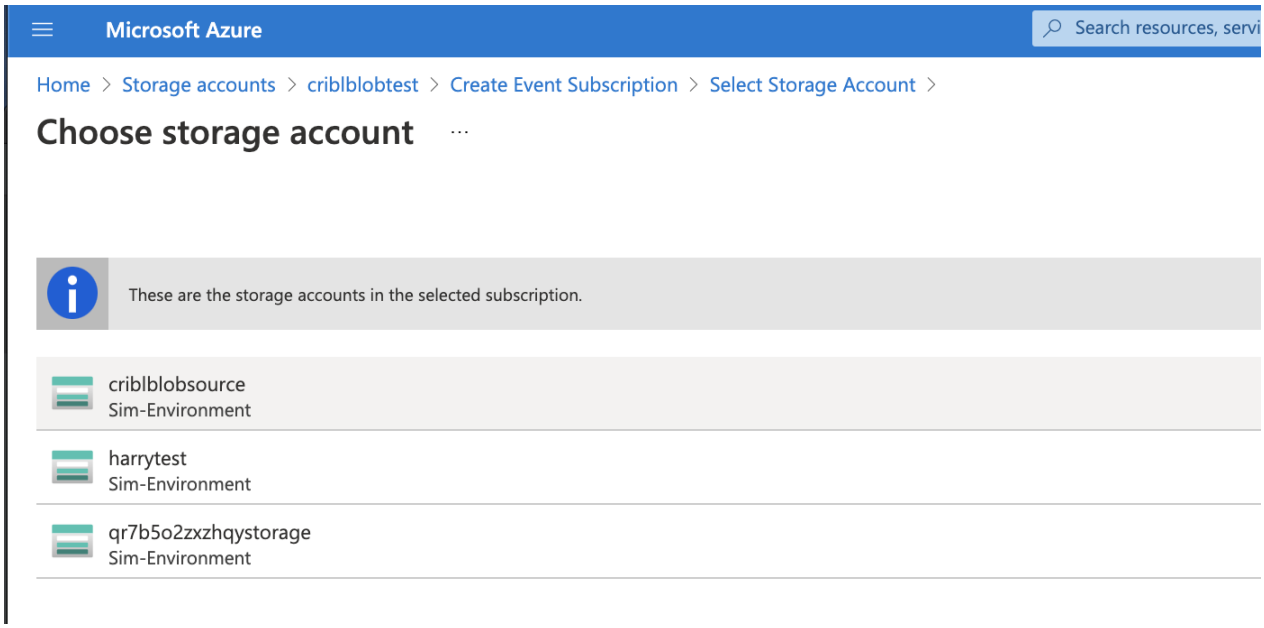

Choosing the storage account

Select the queue you created in Create Storage Queue above, and click **Confirm Selection** to save the settings.

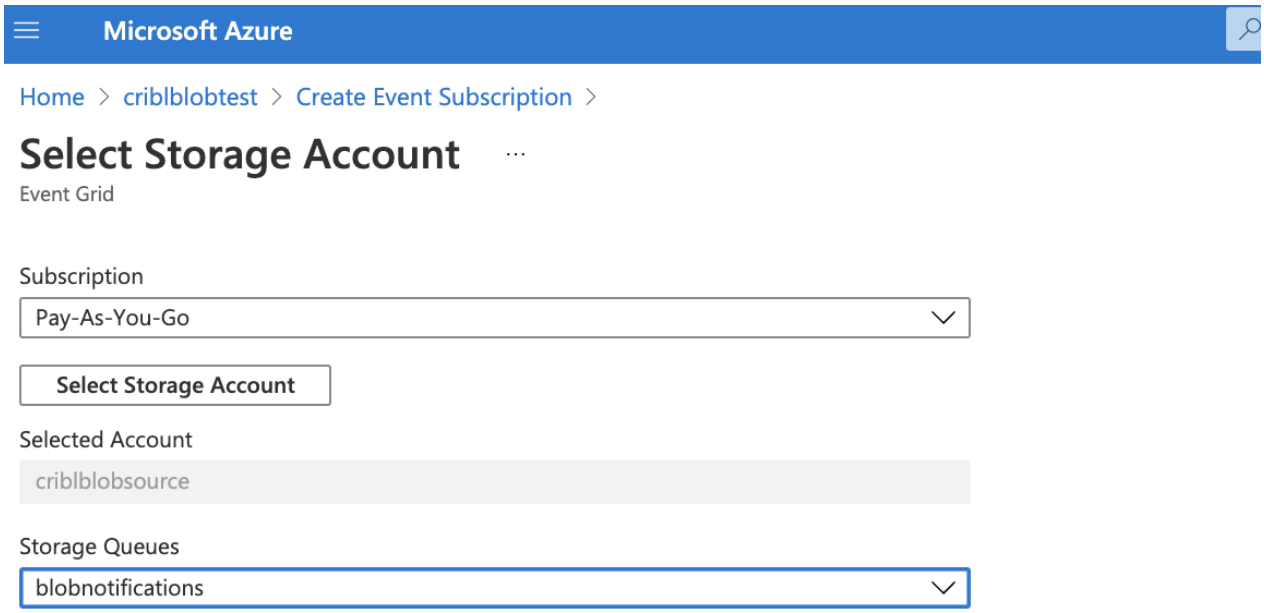

Selecting the storage account

To complete the process, click **Create**.

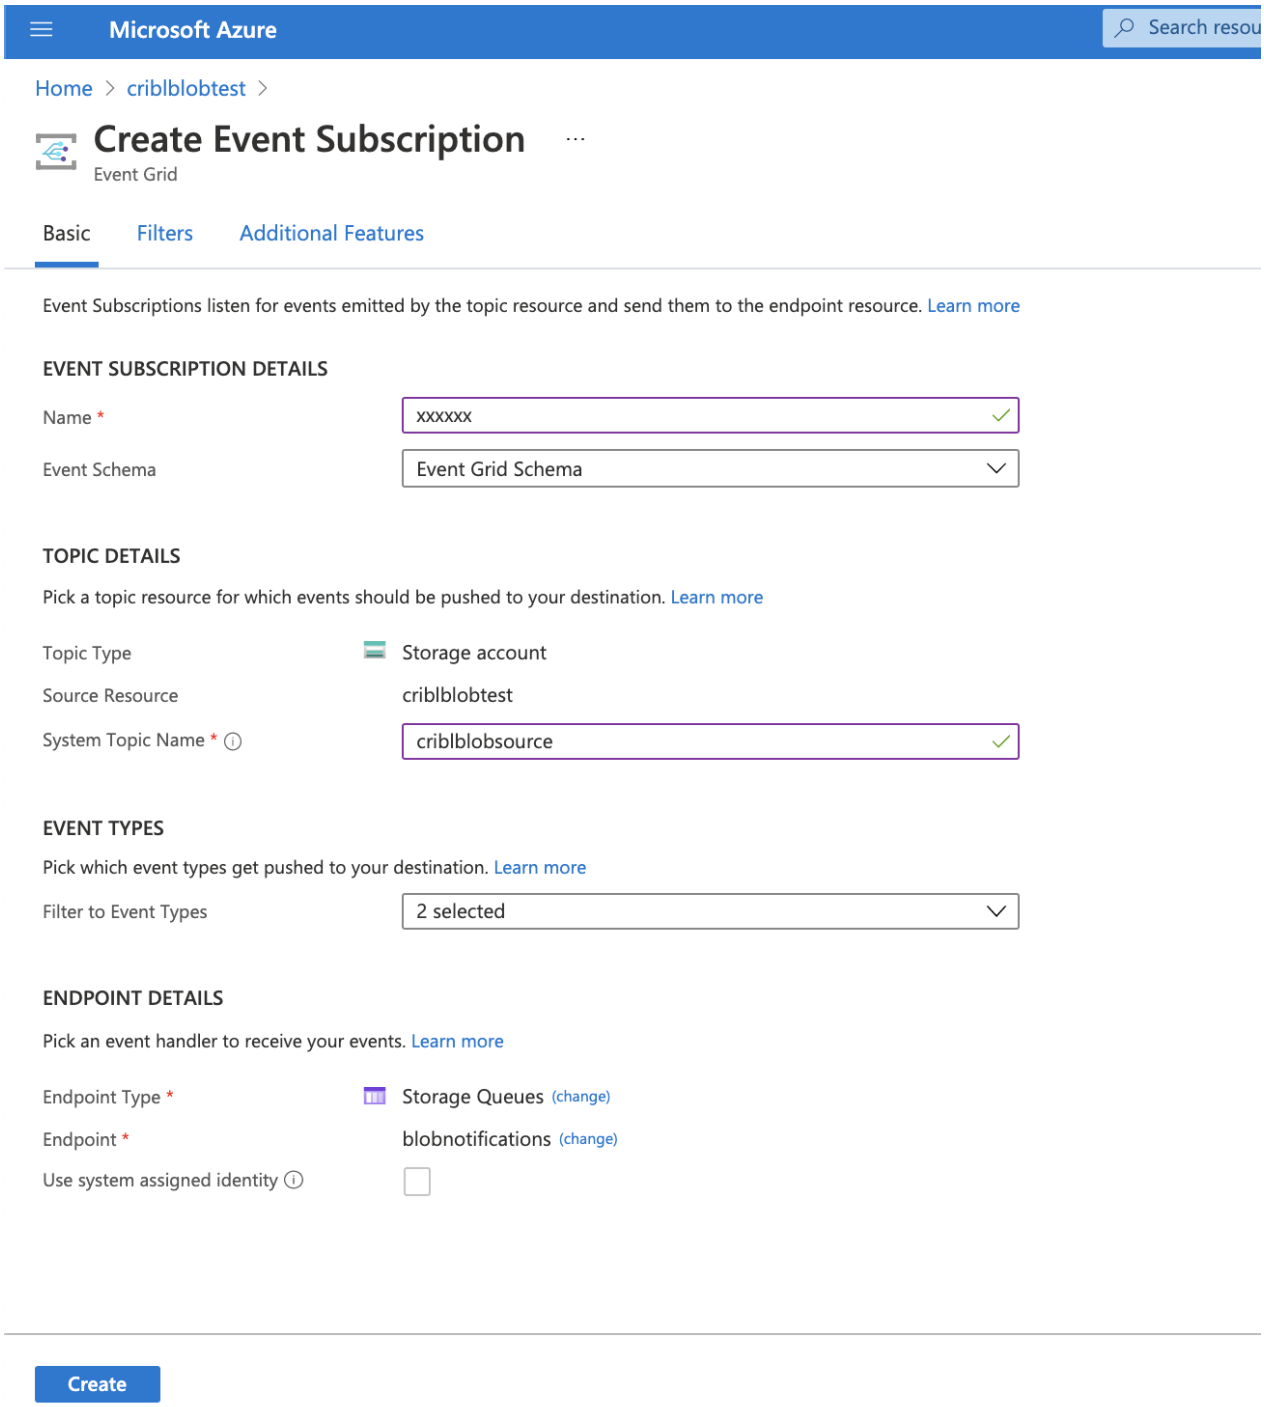

Creating the subscription

How Cribl Stream Pulls Data

Workers poll messages from Azure Blob Storage using the Azure Event Grid Queue. The call will return a message if one is available, or will time out after 5 seconds if no messages are available.

Each Worker gets its share of the load from Azure Event Grid, and receives a notification of a new file added to an Azure Blob Storage bucket.

By default, the maximum number of messages Azure Event Grid returns in a single poll request is 1 per Worker Process.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

10.3.2. Azure Event Hubs

Cribl Stream supports receiving data records from Azure Event Hubs.

> Type: **Pull** | TLS Support: **YES** (secure API) | Event Breaker Support: **No**
>
> Azure Event Hubs uses a binary protocol over TCP. It does not support HTTP proxies, so Cribl Stream must receive events directly from senders. You might need to adjust your firewall rules to allow this traffic.

Configuring Cribl Stream to Receive Data from Azure Event Hubs

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** Edge only. Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Azure** > **Event Hubs**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Azure** > **Event Hubs**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this source definition.

Brokers: List of Event Hubs Kafka brokers to connect to, e.g., `yourdomain.servicebus.windows.net:9093`. Get the hostname from the host portion of the primary or secondary connection string in Shared Access Policies.

Event Hub name: The name of the Event Hub (a.k.a. Kafka Topic) to subscribe to.

Optional Settings

Group ID: The name of the consumer group that includes this Cribl Stream instance. Defaults to `Cribl`.

To prevent excessive Kafka rebalancing and reduced throughput, each **Group ID** that you specify here should be subscribed to only one Kafka Topic – i.e., only to the single Topic you specify in **Event Hub name**. This has a few implications:

- The **Group ID** should be something other than `$Default`, especially if Event Hubs are stored In shared accounts, where the `$Default` group might be subscribed to other Topics.
- The **Group ID** should also be unique for each of your Azure Event Hubs, Kafka, and Confluent Cloud Sources.
- You should configure a **separate** Azure Event Hubs Source for each Group:Topic pair whose events you want to subscribe to.

For details, see Controlling Rebalancing.

From beginning: Whether to start reading from the earliest available data. Relevant only during initial subscription. Defaults to `Yes`.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Client Side)

Enabled: Defaults to `Yes`.

Validate server certs: Whether to reject connections to servers without signed certificates. Defaults to `No` – and for Event Hubs, must always be disabled.

Authentication Settings

Enabled: With the default `Yes` setting, this section's remaining settings are displayed, and all are required settings.

SASL mechanism: SASL (Simple Authentication and Security Layer) authentication mechanism to use with Kafka brokers. Defaults to `PLAIN`, which exposes Basic Authentication options that rely on Azure Event Hubs connection strings. Select `OAUTHBREAKER` to enable OAuth Authentication via a different set of options.

Basic Authentication

Selecting the `PLAIN` SASL mechanism provides the options listed in this section.

Username: The username for authentication. For Event Hubs, this should always be `$ConnectionString`.

Authentication method: Use the buttons to select one of these options:

- **Manual**: Use this default option to enter your Event Hubs connection string's primary or secondary key from the Event Hubs workspace. Exposes a **Password** field for this purpose.
- **Secret**: This option exposes a **Password (text secret)** drop-down, in which you can select a stored secret that references an Event Hubs connection string. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. A **Create** link is available if you need a new secret.

Connection String Format

Either authentication method above uses an Azure Event Hubs connection string in this format:

```
Endpoint=sb://<FQDN>/;SharedAccessKeyName=<your-shared-access-key-name>;SharedAccessKey=<your-shared-access-key-value>
```

A fictitious example is:

```
Endpoint=sb://dummynamespace.servicebus.windows.net/;SharedAccessKeyName=DummyAccessKeyName;SharedAccessKey=5dOntTRytoC24opYThisAsit3is2B+OGY1US/fuL3ly=
```

OAuth Authentication

Selecting the `OAUTHBREAKER` SASL mechanism provides the options listed in this section.

Azure AD authentication endpoint: Specifies the Azure Active Directory endpoint from which to acquire authentication tokens. Defaults to `https://login.microsoftonline.com`. You can instead select `https://login.microsoftonline.us` or `https://login.partner.microsoftonline.cn`.

Client ID: Enter the `client_id` to pass in the OAuth request parameter.

Tenant identifier: Enter your Azure Active Directory subscription's directory ID (tenant ID).

Scope: Enter the scope to pass in the OAuth request parameter. This will be of the form: `https://<Event-Hubs-Namespace-Host-name>/.default`. (E.g., for an Event Hubs Namespace > Host name: `goatyoga.servicebus.windows.net`, **Scope**: `https://goatyoga.servicebus.windows.net/.default`.)

Authentication method: Use the buttons to select one of these options:

- **Manual**: This default option exposes a **Client secret** field, in which to directly enter the `client_secret` to pass in the OAuth request parameter.

- **Secret**: Exposes a **Client secret (text secret)** drop-down, in which you can select a stored secret that references the `client_secret`. A **Create** link is available to define a new secret.
- **Certificate**: Exposes a **Certificate name** drop-down, in which you can select a stored certificate. A **Create** link is available to define a new cert.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Use these settings to fine-tune Cribl Stream's integration with Event Hubs Kafka brokers. For details, see Azure Event Hubs' recommended configuration documentation. If you are unfamiliar with these parameters, contact Cribl Support to understand the implications of changing the defaults.

Heartbeat interval (ms): Expected time between heartbeats to the consumer coordinator when using Kafka's group management facilities. (Corresponds to `heartbeat.interval.ms` in the Kafka domain.) Value must be lower than `sessionTimeout`, and typically should not exceed 1/3 of the `sessionTimeout` value. Defaults to `3000` ms, i.e., 3 seconds.

Session timeout (ms): Timeout used to detect client failures when using Kafka's group management facilities. (Corresponds to `session.timeout.ms` in the Kafka domain.) If the client sends the broker no heartbeats before this timeout expires, the broker will remove this client from the group, and will initiate a rebalance. Value must be lower than `rebalanceTimeout`. Defaults to `30000` ms, i.e., 30 seconds.

Rebalance timeout (ms): Maximum allowed time for each worker to join the group after a rebalance has begun. (Corresponds to `rebalance.timeout.ms` in the Kafka domain.) If this timeout is exceeded, the coordinator broker will remove the worker from the group. Defaults to `60000` ms, i.e., 1 minute.

Connection timeout (ms): Maximum time to wait for a successful connection. Defaults to `10000` ms, i.e., 10 seconds. Valid range is `1000` to `3600000` ms, i.e., 1 second to 1 hour.

Request timeout (ms): Maximum time to wait for a successful request. Defaults to `60000` ms, i.e., 1 minute.

Max retries: Maximum number of times to retry a failed request before the message fails. Defaults to `5`; enter `0` to not retry at all.

Offset commit interval (ms): How often, in milliseconds, to commit offsets. If both this field and the **Offset commit threshold** are empty, Cribl Stream will commit offsets after each batch. If both fields are set, Cribl Stream will commit offsets when either condition is met.

Offset commit threshold: The number of events that will trigger an offset commit. If both this field and the **Offset commit interval** are empty, Cribl Stream will commit offsets after each batch. If both fields are set, Cribl Stream will commit offsets when either condition is met.

Max bytes per partition: The maximum amount of data that the server will return per partition. Must equal or exceed the maximum message size the server allows. (Otherwise, the producer will be unable to send messages larger than the consumer can fetch.) If not specified, defaults to `1048576`.

Max bytes: Maximum amount of bytes to accumulate in the response. The default is `10485760 (10 MB)`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Minimize duplicates: Optionally, toggle to `Yes` to start only one consumer for each topic partition. This reduces duplicates.

> If you observe an excessive number of group rebalances, and/or you observe consumers not regularly pulling messages, try increasing the values of **Heartbeat interval**, **Session timeout**, and **Rebalance timeout**.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__topicIn` (indicates the Kafka topic that the event came from)
- `__partition`
- `__schemaId` (when using Azure Schema Registry)
- `__key` (when using Schema Registry)
- `__headers` (when using Schema Registry)
- `__keySchemaIdIn` (when using Schema Registry)
- `__valueSchemaIdIn` (when using Schema Registry)

How Cribl Stream Pulls Data

Azure Event Hubs treat all the Worker Nodes as members of a Consumer Group, and each Worker gets its share of the load from Azure Event Hubs. This is the same process as normal Kafka. By default, Workers will poll every 5 seconds. In the case of Leader failure, Worker Nodes will continue to receive data as normal.

Controlling Rebalancing

When you configure multiple Sources that subscribe to different topics, but all belong to the same consumer group, a state change affecting any Source in this consumer group will affect all the other Sources. Examples of state changes include: deploying new configs, adding or removing Worker Processes, or Worker Processes crashing.

Here's an example – three Sources, three different topics, all in one consumer group:

- `Source_1 - Topic_1 - ConsumerGroup1`
- `Source_2 - Topic_2 - ConsumerGroup1`
- `Source_3 - Topic_3 - ConsumerGroup1`

Imagine that Source 1 undergoes a state change event, such as a Worker Process crash. Source 2 and Source 3 will rebalance – stopping data flow until the rebalance completes.

Shared Worker Group Mitigation

If Sources that share a consumer group all deploy as part of the same Worker Group, changes will have smaller side effects than when Sources are spread across different Worker Groups. (Conversely, imagine a configuration where deploying new configs for Worker Group 1 caused rebalancing of topics in worker Worker Group 2. This spillover would be especially undesirable.)

Bottom Line

Changes to any member of a consumer group affect all other members of that consumer group. To prevent this undesired behavior, make sure to use a unique **Group ID** for each Kafka, Confluent Cloud, and Azure Event Hubs Source.

10.4. Google Cloud

10.4.1. Google Cloud Pub/Sub

Cribl Stream supports receiving data records from Google Cloud Pub/Sub, a managed real-time messaging service for sending and receiving messages between applications.

> Type: **Pull** | TLS Support: **YES** (secure API) | Event Breaker Support: **No**

Configuring Cribl Stream to Receive Data from Pub/Sub

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Google Cloud** > **Pub/Sub**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Google Cloud** > **Pub/Sub** Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Pub/Sub Source definition.

Topic ID: ID of the Pub/Sub topic from which to receive events.

Subscription ID: ID of the subscription to use when receiving events.

Optional Settings

Create topic: If toggled to `Yes`, Cribl Stream will create the topic on Pub/Sub if it does not exist.

Create subscription: If set to `Yes` (the default), Cribl Stream will create the subscription on Pub/Sub if it does not exist.

Ordered delivery: If toggled to `Yes`, Cribl Stream will receive events in the order that they were added to the queue. (For this to work correctly, the process sending events must have ordering enabled.)

Region: Region to retrieve messages from. Select `default` to allow Google to auto-select the nearest region. (If you've enabled **Ordered delivery**, the selected region must be allowed by message storage policy.)

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication Method** buttons to select a Google authentication method:

Auto: This option uses the environment variables `PUBSUB_PROJECT` and `PUBSUB_CREDENTIALS`, and requires no configuration here.

Manual: With this default option, you use the **Service account credentials** field to enter the contents of your service account credentials file (a set of JSON keys), as downloaded from Google Cloud.

To insert the file itself, click the upload button at this field's upper right. As an alternative, you can use environment variables, as outlined here.

Secret: Use the drop-down to select a key pair that you've configured in Cribl Stream's internal secrets manager or (if enabled) an external KMS.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

- **Name**: Field name.
- **Value**: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Max backlog: When the Destination exerts backpressure, this setting limits the number of events that Cribl Stream will queue for processing before it stops retrieving further events. Defaults to `1000` events.

Request timeout (ms): Pull request timeout, in milliseconds. Defaults to `60000` ms (i.e., 1 minute).

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__messageId` – ID of the message from Google.
- `__projectId` – ID of the Google project from which the data was received.
- `__publishTime` – Time at which the event was originally published to the Pub/Sub topic.
- `__subscriptionIn` – The subscription from which the event was received.
- `__topicIn` – The topic from which the event was received.

Google Cloud Roles and Permissions

Your Google Cloud service account should have at least the following roles on subscriptions:

- `roles/pubsub.subscriber`
- `roles/pubsub.viewer` or `roles/viewer`

To enable Cribl Stream's **Create topic** and/or **Create subscription** options, your service account should have one of the following (or higher) roles:

- `roles/pubsub.editor`
- `roles/editor`

Either `editor` role confers multiple permissions, including those from the lower `viewer`, `subscriber`, and `publisher` roles. For additional details, see the Google Cloud Access Control topic.

How Cribl Stream Pulls Data

Pub/Sub treats all the Worker Nodes as members of a Consumer Group, and each Worker gets its share of the load from Pub/Sub. This is the same process as normal Kafka. By default, Workers will poll every 1 minute. In the case of Leader failure, Worker Nodes will continue to receive data as normal.

10.5. Kafka

10.5.1. Kafka

Cribl Stream supports receiving data records from a Kafka cluster. As of Cribl Stream v.3.3, this Source automatically detects compressed data in `Gzip`, `Snappy`, or `LZ4` format.

> Type: **Pull** | TLS Support: **YES** | Event Breaker Support: **No**
>
> Kafka uses a binary protocol over TCP. It does not support HTTP proxies, so Cribl Stream must receive events directly from senders. You might need to adjust your firewall rules to allow this traffic.

Configuring Cribl Stream to Receive Data from Kafka Topics

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Kafka**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Kafka**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Brokers: List of Kafka brokers to use, e.g., `localhost:9092`.

Topics: Enter the name(s) of topics to subscribe to. Press `Enter` / `Return` between multiple entries.

> To optimize performance and prevent excessive rebalancing, Cribl recommends subscribing each Kafka Source to only one topic. To subscribe to multiple topics, consider creating a dedicated Kafka Source for each one.

> For the same reason, the **Group ID** (below) should be unique for each of your Kafka, Confluent Cloud, and Azure Event Hubs Sources. For details, see Controlling Rebalancing.

Optional Settings

Group ID: The name of the consumer group to which this Cribl Stream instance belongs.

From beginning: Whether to start reading from the earliest available data. Relevant only during initial subscription. Defaults to `Yes`.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Client Side)

Enabled: defaults to `No`. When toggled to `Yes`:

Autofill?: This setting is experimental.

Validate client certs: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Authentication

This section governs SASL (Simple Authentication and Security Layer) authentication to use when connecting to brokers.

Enabled: Defaults to `No`. When toggled to `Yes`:

SASL mechanism: Use this drop-down to select the SASL authentication mechanism to use. The mechanism you select determines the controls displayed below.

PLAIN, SCRAM-256, or SCRAM-512

With any of these authentication mechanisms, select one of the following buttons:

Manual: Displays **Username** and **Password** fields to enter your Kafka credentials directly.

Secret: This option exposes a **Credentials secret** drop-down in which you can select a stored text secret that references your Kafka credentials. A **Create** link is available to store a new, reusable secret.

GSSAPI/Kerberos

Selecting Kerberos as the authentication mechanism displays the following options:

Keytab location: Enter the location of the key table file for the authentication principal.

Principal: Enter the authentication principal, e.g.: `kafka_user@example.com`.

Broker service class: Enter the Kerberos service class for Kafka brokers, e.g.: `kafka`.

Schema Registry

This section governs Kafka Schema Registry authentication for Avro-encoded data with a schema stored in the Confluent Schema Registry.

Enabled: defaults to `No`. When toggled to `Yes`, displays the following controls:

Schema registry URL: URL for access to the Confluent Schema Registry. (E.g., `http://<hostname>:8081`.)

TLS enabled: When toggled to `Yes`, displays the following TLS settings for the Schema Registry.

> These have the same format as the TLS Settings (Client Side) above.

- **Validate server certs**: Require client to reject any connection that is not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to **No**.
- **Server name (SNI)**: Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.
- **Minimum TLS version**: Optionally, select the minimum TLS version to use when connecting.
- **Maximum TLS version**: Optionally, select the maximum TLS version to use when connecting.
- **Certificate name**: The name of the predefined certificate.
- **CA certificate path**: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.
- **Private key path (mutual auth)**: Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.
- **Certificate path (mutual auth)**: Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.
- **Passphrase**: Passphrase to use to decrypt private key.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Use these settings to fine-tune Cribl Stream's integration with Kafka topics. If you are unfamiliar with these parameters, contact Cribl Support to understand the implications of changing the defaults.

Heartbeat interval (ms): Expected time between heartbeats to the consumer coordinator when using Kafka's group management facilities. Value must be lower than `sessionTimeout`, and typically should not exceed 1/3 of the `sessionTimeout` value. Defaults to `3000` ms, i.e., 3 seconds. For details, see the Kafka documentation.

Session timeout (ms): Timeout used to detect client failures when using Kafka's group management facilities. If the client sends the broker no heartbeats before this timeout expires, the broker will remove this client from the group, and will initiate a rebalance. Value must be between the broker's configured `group.min.session.timeout.ms` and `group.max.session.timeout.ms`. Defaults to `30000` ms, i.e., 30 seconds. For details, see the Kafka documentation.

Rebalance timeout (ms): Maximum allowed time for each worker to join the group after a rebalance has begun. If the timeout is exceeded, the coordinator broker will remove the worker from the group. Defaults to `60000` ms, i.e., 1 minute. For details, see the Kafka documentation.

Connection timeout (ms): Maximum time to wait for a successful connection. Defaults to `10000` ms, i.e., 10 seconds. Valid range is `1000` to `3600000` ms, i.e., 1 second to 1 hour. For details, see the Kafka documentation.

Request timeout (ms): Maximum time to wait for a successful request. Defaults to `60000` ms, i.e., 1 minute. For details, see the Kafka documentation.

Max retries: Maximum number of times to retry a failed request before the message fails. Defaults to `5`; enter `0` to not retry at all.

Offset commit interval (ms): How often, in milliseconds, to commit offsets. If both this field and the **Offset commit threshold** are empty, Cribl Stream will commit offsets after each batch. If both fields are set, Cribl Stream will commit offsets when either condition is met.

Offset commit threshold: The number of events that will trigger an offset commit. If both this field and the **Offset commit interval** are empty, Cribl Stream will commit offsets after each batch. If both fields are set, Cribl Stream will commit offsets when either condition is met.

Max bytes per partition: The maximum amount of data that the server will return per partition. Must equal or exceed the maximum message size the server allows. (Otherwise, the producer will be unable to send messages larger than the consumer can fetch.) If not specified, defaults to `1048576`.

Max bytes: Maximum amount of bytes to accumulate in the response. The default is `10485760 (10 MB)`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

> If you observe an excessive number of group rebalances, and/or you observe consumers not regularly pulling messages, try increasing the values of **Heartbeat interval**, **Session timeout**, and **Rebalance timeout**.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__topicIn` (indicates the Kafka topic that the event came from; see `__topicOut` in our Kafka Destination documentation)
- `__partition`
- `__schemaId` (when using Schema Registry)
- `__key` (when using Schema Registry)
- `__headers` (when using Schema Registry)
- `__keySchemaIdIn` (when using Schema Registry)
- `__valueSchemaIdIn` (when using Schema Registry)

How Cribl Stream Pulls Data

Kafka treats all the Worker Nodes as members of a Consumer Group, and Kafka manages each Node's data load. By default, Workers will poll every 5 seconds. In the case of Leader failure, Worker Nodes will continue to receive data as normal.

How Cribl Stream Handles the `_time` Field

Events that the Kafka Source emits always contain a `_time` field, and sometimes also an `__origTime` field. Here's how Cribl Stream determines what to send:

- If the incoming Kafka message contains no `_time` field, the message's timestamp becomes the value of the emitted event's `_time` field.
- If the incoming Kafka message contains a `_time` field whose value is a timestamp in UNIX epoch time, that timestamp becomes the value of the emitted event's `_time` field.
- If the incoming Kafka message contains a `_time` field whose value is **not** a timestamp in UNIX epoch time (e.g., an ISO or UTC timestamp), that becomes the value of the emitted event's `__origTime` field, **and** the message's timestamp becomes the value of the emitted event's `_time` field.

Controlling Rebalancing

When you configure multiple Sources that subscribe to different topics, but all belong to the same consumer group, a state change affecting any Source in this consumer group will affect all the other Sources. Examples of state changes include: deploying new configs, adding or removing Worker Processes, or Worker Processes crashing.

Here’s an example – three Sources, three different topics, all in one consumer group:

- `Source_1 - Topic_1 - ConsumerGroup1`
- `Source_2 - Topic_2 - ConsumerGroup1`
- `Source_3 - Topic_3 - ConsumerGroup1`

Imagine that Source 1 undergoes a state change event, such as a Worker Process crash. Source 2 and Source 3 will rebalance – stopping data flow until the rebalance completes.

Shared Worker Group Mitigation

If Sources that share a consumer group all deploy as part of the same Worker Group, changes will have smaller side effects than when Sources are spread across different Worker Groups. (Conversely, imagine a configuration where deploying new configs for Worker Group 1 caused rebalancing of topics in worker Worker Group 2. This spillover would be especially undesirable.)

Bottom Line

Changes to any member of a consumer group affect all other members of that consumer group. To prevent this undesired behavior, make sure to use a unique **Group ID** for each Kafka, Confluent Cloud, and

Azure Event Hubs Source.

10.5.2. Confluent Cloud

Cribl Stream supports receiving Kafka topics from the Confluent Cloud managed Kafka platform. As of Cribl Stream v.3.3, this Source automatically detects compressed data in `Gzip`, `Snappy`, or `LZ4` format.

> Type: **Pull** | TLS Support: **YES** | Event Breaker Support: **No**
>
> Confluent Cloud uses a binary protocol over TCP. It does not support HTTP proxies, so Cribl Stream must receive events directly from senders. You might need to adjust your firewall rules to allow this traffic.
>
> Your Confluent Cloud permissions should include `Consumer Group: Read`.

Ingesting Kafka Topics from Confluent Cloud

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Confluent Cloud**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Confluent Cloud**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Brokers: List of Confluent Cloud brokers to use, e.g., `myAccount.confluent.cloud:9092`.

Topics: Enter the name(s) of topics to subscribe to. Press `Enter` / `Return` between multiple entries.

> To optimize performance and prevent excessive rebalancing, Cribl recommends subscribing each Confluent Cloud Source to only one topic. To subscribe to multiple topics, consider creating a dedicated Confluent Cloud Source for each one.

> For the same reason, the **Group ID** (below) should be unique for each of your Confluent Cloud, Kafka, and Azure Event Hubs Sources. For details, see Controlling Rebalancing.

Optional Settings

Group ID: The name of the consumer group to which this Cribl Stream instance belongs.

From beginning: Whether to start reading from the earliest available data. Relevant only during initial subscription. Defaults to `Yes`.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Client Side)

Enabled: defaults to `No`. When toggled to `Yes`:

Autofill?: This setting is experimental.

Validate client certs: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Authentication

Enabled: Defaults to `No`. When toggled to `Yes`, all the settings in this section are required.

SASL mechanism: SASL (Simple Authentication and Security Layer) authentication mechanism to use. Currently, `PLAIN` is the only mechanism supported for Confluent Kafka brokers.

Username: The username for authentication. For Confluent, this should always be `$ConnectionString`.

Authentication method: Use the buttons to select one of these options:

- **Manual**: Use this default option to enter your Confluent connection string. Exposes a **Password** field for this purpose.
- **Secret**: This option exposes a **Connection string (text secret)** drop-down, in which you can select a stored secret that references a Confluent connection string. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. A **Create** link is available if you need a new secret.

Schema Registry

This section governs Confluent Schema Registry Authentication for Avro-encoded data with a schema stored in the Confluent Schema Registry.

Enabled: defaults to `No`. When toggled to `Yes`, displays the following controls:

Schema registry URL: URL for access to the Confluent Schema Registry. (E.g., `http://<hostname>:8081`.)

TLS enabled: defaults to `No`. When toggled to `Yes`, displays the following TLS settings for the Schema Registry (in the same format as the TLS Settings (Client Side) above):

- **Validate server certs**: Require client to reject any connection that is not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to **No**.
- **Server name (SNI)**: Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.
- **Minimum TLS version**: Optionally, select the minimum TLS version to use when connecting.
- **Maximum TLS version**: Optionally, select the maximum TLS version to use when connecting.
- **Certificate name**: The name of the predefined certificate.

- **CA certificate path**: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.
- **Private key path (mutual auth)**: Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.
- **Certificate path (mutual auth)**: Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.
- **Passphrase**: Passphrase to use to decrypt private key.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Use these settings to fine-tune Cribl Stream's integration with Kafka topics. If you are unfamiliar with these parameters, contact Cribl Support to understand the implications of changing the defaults.

Heartbeat interval (ms): Expected time between heartbeats to the consumer coordinator when using Kafka's group management facilities. Value must be lower than `sessionTimeout`, and typically should not exceed 1/3 of the `sessionTimeout` value. Defaults to `3000` ms, i.e., 3 seconds. For details, see the Kafka documentation.

Session timeout (ms): Timeout used to detect client failures when using Kafka's group management facilities. If the client sends the broker no heartbeats before this timeout expires, the broker will remove this client from the group, and will initiate a rebalance. Value must be between the broker's configured

`group.min.session.timeout.ms` and `group.max.session.timeout.ms`. Defaults to `30000` ms, i.e., 30 seconds. For details, see the Kafka documentation.

Rebalance timeout (ms): Maximum allowed time for each worker to join the group after a rebalance has begun. If the timeout is exceeded, the coordinator broker will remove the worker from the group. Defaults to `60000` ms, i.e., 1 minute. For details, see the Kafka documentation.

Connection timeout (ms): Maximum time to wait for a successful connection. Defaults to `10000` ms, i.e., 10 seconds. Valid range is `1000` to `3600000` ms, i.e., 1 second to 1 hour. For details, see the Kafka documentation.

Request timeout (ms): Maximum time to wait for a successful request. Defaults to `60000` ms, i.e., 1 minute. For details, see the Kafka documentation.

Max retries: Maximum number of times to retry a failed request before the message fails. Defaults to `5`; enter `0` to not retry at all.

Offset commit interval (ms): How often, in milliseconds, to commit offsets. If both this field and the **Offset commit threshold** are empty, Cribl Stream will commit offsets after each batch. If both fields are set, Cribl Stream will commit offsets when either condition is met.

Offset commit threshold: The number of events that will trigger an offset commit. If both this field and the **Offset commit interval** are empty, Cribl Stream will commit offsets after each batch. If both fields are set, Cribl Stream will commit offsets when either condition is met.

Max bytes per partition: The maximum amount of data that the server will return per partition. Must equal or exceed the maximum message size the server allows. (Otherwise, the producer will be unable to send messages larger than the consumer can fetch.) If not specified, defaults to `1048576`.

Max bytes: Maximum amount of bytes to accumulate in the response. The default is `10485760 (10 MB)`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

> If you observe an excessive number of group rebalances, and/or you observe consumers not regularly pulling messages, try increasing the values of **Heartbeat interval**, **Session timeout**, and **Rebalance timeout**.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__topicIn` (indicates the Confluent Cloud topic that the event came from; see `__topicOut` in our [Confluent Cloud Destination](destinations-Confluent Cloud) documentation)
- `__partition`
- `__schemaId` (when using Schema Registry)

How Cribl Stream Pulls Data

Confluent Cloud treats all the Worker Nodes as members of a Consumer Group, and Confluent Cloud manages each Node's data load. By default, Workers will poll every 5 seconds. In the case of Leader failure, Worker Nodes will continue to receive data as normal.

How Cribl Stream Handles the `_time` Field

Events that the Kafka Source emits always contain a `_time` field, and sometimes also an `__origTime` field. Here's how Cribl Stream determines what to send:

- If the incoming Kafka message contains no `_time` field, the message's timestamp becomes the value of the emitted event's `_time` field.
- If the incoming Kafka message contains a `_time` field whose value is a timestamp in UNIX epoch time, that timestamp becomes the value of the emitted event's `_time` field.
- If the incoming Kafka message contains a `_time` field whose value is **not** a timestamp in UNIX epoch time (e.g., an ISO or UTC timestamp), that becomes the value of the emitted event's `__origTime` field, **and** the message's timestamp becomes the value of the emitted event's `_time` field.

Controlling Rebalancing

When you configure multiple Sources that subscribe to different topics, but all belong to the same consumer group, a state change affecting any Source in this consumer group will affect all the other Sources. Examples of state changes include: deploying new configs, adding or removing Worker Processes, or Worker Processes crashing.

Here's an example – three Sources, three different topics, all in one consumer group:

- `Source_1 - Topic_1 - ConsumerGroup1`
- `Source_2 - Topic_2 - ConsumerGroup1`
- `Source_3 - Topic_3 - ConsumerGroup1`

Imagine that Source 1 undergoes a state change event, such as a Worker Process crash. Source 2 and Source 3 will rebalance – stopping data flow until the rebalance completes.

Shared Worker Group Mitigation

If Sources that share a consumer group all deploy as part of the same Worker Group, changes will have smaller side effects than when Sources are spread across different Worker Groups. (Conversely, imagine a configuration where deploying new configs for Worker Group 1 caused rebalancing of topics in worker Worker Group 2. This spillover would be especially undesirable.)

Bottom Line

Changes to any member of a consumer group affect all other members of that consumer group. To prevent this undesired behavior, make sure to use a unique **Group ID** for each Kafka, Confluent Cloud, and Azure Event Hubs Source.

10.5.3. Amazon MSK

Cribl Stream supports receiving data records from an Amazon Managed Streaming for Apache Kafka (MSK) cluster. This Source automatically detects compressed data in `Gzip`, `Snappy`, or `LZ4` format.

> Type: **Pull** | TLS Support: **YES** | Event Breaker Support: **No**
>
> Kafka uses a binary protocol over TCP. It does not support HTTP proxies, so Cribl Stream must receive events directly from senders. You might need to adjust your firewall rules to allow this traffic.

Configuring Cribl Stream to Receive Data from Kafka Topics

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

In the **QuickConnect** UI: Click **Add Source**. From the resulting drawer's tiles, select [**Pull** >] **Amazon MSK**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources**. From the resulting page's tiles or left nav, select [**Pull** >] **Amazon MSK**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Brokers: List of Kafka brokers to connect to, e.g., `kafkaBrokerHost:9092`. Specify hostname and port, e.g., `mykafkabroker:9092`, or just hostname, in which case Stream will assign port 9092.

Topics: Enter the name(s) of topics to subscribe to. Press `Enter` / `Return` between multiple entries.

> To optimize performance and prevent excessive rebalancing, Cribl recommends subscribing each Kafka Source to only one topic. To subscribe to multiple topics, consider creating a dedicated Kafka Source for each one.

> For the same reason, the **Group ID** (below) should be unique for each of your Kafka, Confluent Cloud, and Azure Event Hubs Sources. For details, see Controlling Rebalancing.

Region: Select the name of the AWS Region where your Amazon MSK cluster is located.

Optional Settings

Group ID: The name of the consumer group to which this Cribl Stream instance belongs.

From beginning: Toggle this off if you want Cribl Stream, upon subscribing to a topic for the first time, to read new messages only. Otherwise Cribl Stream will read all messages available on the server, starting from the oldest.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Client Side)

> For Amazon MSK Sources and Destinations:
>
> - IAM is the only type of authentication that Cribl Stream supports.
> - Because IAM auth requires TLS, TLS is automatically enabled.

Validate server certs: Reject certificates that are **not** authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Authentication

Use the **Authentication Method** buttons to select an AWS authentication method.

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select an API key/secret key pair that you've configured in Cribl Stream's secrets manager. A **Create** link is available to store a new, reusable secret.

Assume Role

Enable for MSK: Toggle on to use Assume Role credentials to access MSK.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role. This is required only when assuming a role that requires this ID in order to delegate third-party access. For details, see AWS' documentation.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Use these settings to fine-tune Cribl Stream's integration with Kafka topics. If you are unfamiliar with these parameters, contact Cribl Support to understand the implications of changing the defaults.

Heartbeat interval (ms): Expected time between heartbeats to the consumer coordinator when using Kafka's group management facilities. Value must be lower than `sessionTimeout`, and typically should not exceed 1/3 of the `sessionTimeout` value. Defaults to `3000` ms, i.e., 3 seconds. For details, see the Kafka documentation.

Session timeout (ms): Timeout used to detect client failures when using Kafka's group management facilities. If the client sends the broker no heartbeats before this timeout expires, the broker will remove this client from the group, and will initiate a rebalance. Value must be between the broker's configured `group.min.session.timeout.ms` and `group.max.session.timeout.ms`. Defaults to `30000` ms, i.e., 30 seconds. For details, see the Kafka documentation.

Rebalance timeout (ms): Maximum allowed time for each Worker to join the Group after a rebalance has begun. If the timeout is exceeded, the coordinator broker will remove the Worker from the Group. Defaults to `60000` ms, i.e., 1 minute. For details, see the Kafka documentation.

Connection timeout (ms): Maximum time to wait for a connection to complete successfully. Defaults to `10000` ms, i.e., 10 seconds. Valid range is `1000` to `3600000` ms, i.e., 1 second to 1 hour. For details, see the Kafka documentation.

Request timeout (ms): Maximum time to wait for Kafka to respond to a request. Defaults to `60000` ms, i.e., 1 minute. For details, see the Kafka documentation.

Max retries: Maximum number of times to retry a failed request before the message fails. Defaults to `5`; enter `0` to not retry at all.

Authentication timeout (ms): Maximum time to wait for Kafka to respond to an authentication request. Defaults to `10000 (10 seconds)`.

Reauthentication threshold (ms): Specifies a time window during which Cribl Stream can reauthenticate if needed. Creates the window measuring backwards from the moment when credentials are set to expire. Defaults to `10000 (10 seconds)`.

Offset commit interval (ms): How often, in milliseconds, to commit offsets. If both this field and the **Offset commit threshold** are empty, Cribl Stream will commit offsets after each batch. If both fields are set, Cribl Stream will commit offsets when either condition is met.

Offset commit threshold: How many events are needed to trigger an offset commit. If both this field and the **Offset commit interval** are empty, Cribl Stream will commit offsets after each batch. If both fields are set, Cribl Stream will commit offsets when either condition is met.

Max bytes per partition: Maximum amount of data that Kafka will return per partition, per fetch request. Must equal or exceed the maximum message size (maxBytesPerPartition) that Kafka is configured to allow. Otherwise, Cribl Stream can get stuck trying to retrieve messages. Defaults to `1048576 (1 MB)`.

Max bytes: Maximum number of bytes that Kafka will return per fetch request. Defaults to `10485760 (10 MB)`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

> If you observe an excessive number of group rebalances, and/or you observe consumers not regularly pulling messages, try increasing the values of **Heartbeat interval**, **Session timeout**, and **Rebalance timeout**.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source’s data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__topicIn` (indicates the Kafka topic that the event came from; see `__topicOut` in our Kafka Destination documentation)
- `__partition`
- `__schemaId` (when using Schema Registry)
- `__key` (when using Schema Registry)
- `__headers` (when using Schema Registry)
- `__keySchemaIdIn` (when using Schema Registry)
- `__valueSchemaIdIn` (when using Schema Registry)

How Cribl Stream Pulls Data

Kafka treats all the Worker Nodes as members of a Consumer Group, and Kafka manages each Node's data load. By default, Workers will poll every 5 seconds. In the case of Leader failure, Worker Nodes will continue to receive data as normal.

How Cribl Stream Handles the `_time` Field

Events that the Kafka Source emits always contain a `_time` field, and sometimes also an `__origTime` field. Here's how Cribl Stream determines what to send:

- If the incoming Kafka message contains no `_time` field, the message's timestamp becomes the value of the emitted event's `_time` field.
- If the incoming Kafka message contains a `_time` field whose value is a timestamp in UNIX epoch time, that timestamp becomes the value of the emitted event's `_time` field.
- If the incoming Kafka message contains a `_time` field whose value is **not** a timestamp in UNIX epoch time (e.g., an ISO or UTC timestamp), that becomes the value of the emitted event's `__origTime` field, **and** the message's timestamp becomes the value of the emitted event's `_time` field.

Controlling Rebalancing

When you configure multiple Sources that subscribe to different topics but all belong to the same consumer group, a state change affecting any Source in this consumer group will affect all the other Sources. Examples of state changes include: deploying new configs, adding or removing Worker Processes, and Worker Processes crashing.

Here's an example – three Sources, three different topics, all in one consumer group:

- `Source_1 - Topic_1 - ConsumerGroup1`
- `Source_2 - Topic_2 - ConsumerGroup1`
- `Source_3 - Topic_3 - ConsumerGroup1`

Imagine that Source 1 undergoes a state change event, such as a Worker Process crash. Source 2 and Source 3 will rebalance – stopping data flow until the rebalance completes.

Shared Worker Group Mitigation

If Sources that share a consumer group all deploy as part of the same Worker Group, changes will have smaller side effects than when Sources are spread across different Worker Groups. (Conversely, imagine a configuration where deploying new configs for Worker Group 1 caused rebalancing of topics in Worker Worker Group 2. This spillover would be especially undesirable.)

Bottom Line

Changes to any member of a consumer group affect all other members of that consumer group. To prevent this undesired behavior, make sure to use a unique **Group ID** for each Kafka, Confluent Cloud, Amazon MSK, and Azure Event Hubs Source.

10.6. Office 365

10.6.1. Office 365 Activity

Cribl Stream supports receiving data from the Office 365 Management Activity API. This facilitates analyzing actions and events on Azure Active Directory, Exchange, and SharePoint, along with global auditing and Data Loss Prevention data.

> Type: **Pull** | TLS Support: **YES** | Event Breaker Support: **YES**

TLS is enabled via the HTTPS protocol on this Source's underlying REST API.

Azure AD Permissions

In Azure Active Directory, the application representing your Cribl Stream instance must be granted the following permissions to pull data. Each permission's **Type** must be `Application` – `Delegated` is not sufficient:

- `ActivityFeed.Read` – Required for all Content Types except `DLP.All`.
- `ActivityFeed.ReadDlp` – Required for the `DLP.All` Content Type.

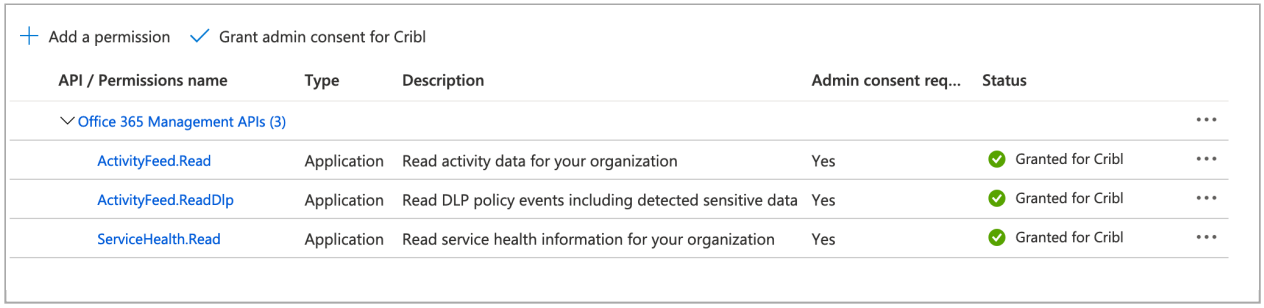

Registered application permissions

Office 365 Subscriptions

Cribl Stream does not support starting/stopping Office 365 subscriptions. You can start subscriptions either via another Office 365 API client, or simply via `curl` commands. We document the `curl` command method below in Starting Content Subscriptions.

Configuring Cribl Stream to Receive Data from the Activity API

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Office 365**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] *Office 365**. Next, click** New Source **to open a** New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Office 365 Activity definition.

Tenant ID: Enter the Office 365 Azure tenant ID.

App ID: Enter the Office 365 Azure application ID.

Subscription Plan: Select the Office 365 subscription plan for your organization. Options include:

- **Office 365 Enterprise**
- **Office 365 GCC**
- **Office 365 GCC High**
- **Office 365 DoD**

Authentication Settings

Authentication method: Select one of the following buttons.

- **Manual**: This default option provides a **Client secret** field, where you directly enter the required Office 365 Azure client secret.
- **Secret**: This option instead exposes a **Client secret (text secret)** drop-down, from which you select a stored text secret to authenticate with. Click **Create** to configure a new secret.

Optional Settings

Publisher identifier: Use in API requests as described here. If not defined, defaults to Microsoft Office 365 tenant ID.

Content Types: See the Content Types section below.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Content Types

Here, you can configure polling independently for the following types of audit data from the Office 365 Management Activity API:

- **Active Directory**
- **Exchange**
- **SharePoint**
- **General**: All workloads not included in the above content types
- **DLP.All**: Data Loss Prevention events only, for all workloads

For each of these content types, the **Content Types** table provides the following controls:

Interval Description: This column is informational only.

Interval: Optionally, override the default polling interval. See About Polling Intervals below.

Log Level: Set the verbosity level to one of `debug`, `info` (the default), `warn`, or `error`.

Enabled: Toggle this to `Yes` for each service that you want to poll.

About Polling Intervals

To poll the Office 365 Management Activity API, Cribl Stream uses the **Interval** field's value to establish the search date range and the cron schedule (e.g.: `*/${interval} * * * *`).

Therefore, intervals set in minutes must divide evenly into 60 minutes to create a predictable schedule. Dividing 60 by intervals like `1`, `2`, `3`, `4`, `5`, `6`, `10`, `12`, `15`, `20`, or `60` itself yields an integer, so you can enter any of these values.

Cribl Stream will reject intervals like `23`, `42`, or `45`, or `75` – which would yield non-integer results, meaning unpredictable schedules.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Ingestion lag (minutes): How far back into the past the Office 365 Activity API should look for events to retrieve. This is necessary because there can be a lag of 60 to 90 minutes (or longer) before Office 365 events become available via the API. The default value of `0` means don't look back. When it's very important to avoid missing events, consider running multiple overlapping jobs, as described below.

Keep Alive Time (seconds): How often Workers should check in with the scheduler to keep their job subscription alive. Defaults to `60`.

Worker timeout (periods): The number of Keep Alive Time periods before an inactive Worker will have its job subscription revoked. Defaults to `3`.

Timeout (secs): The maximum time period for an HTTP request to complete before Cribl Stream treats it as timed out. Defaults to `300` (i.e., 5 minutes). Enter `0` to disable timeout metering.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__final`

- `__inputId`
- `__isBroken`
- `__source`

Starting Content Subscriptions

Content subscriptions (a different concept from the O365 subscription plans) are required in order for Cribl Stream to be able to begin retrieving O365 data. There is a separate subscription required for each Content Type. If you are using an existing Azure-registered application ID that already has subscriptions started, then you can ignore this section. But if you are:

- Using a newly registered application ID, and therefore never had any subscriptions started, or
- Reusing an application ID that had subscriptions started, but are currently stopped

...then you will need to use this procedure to manually start the necessary subscriptions. Follow either of the two methods below, using (respectively) PowerShell or `curl`.

Using PowerShell

This sample PowerShell script will enable all subscriptions for you. Update the appropriate variables as required:

```
# Create app of type Web app / API in Azure AD, generate a Client Secret, and update th
and client secret here
# Get the tenant GUID from Properties | Directory ID under the Azure Active Directory s
$AppID = "<APP_ID>"
$ClientSecret = "<CLIENT_SECRET>"
$TenantID = "<TENANT_ID>"
$loginURL = "https://login.microsoftonline.com/"

# For $resource, use one of these endpoint values based on your subscription plan:
# * Enterprise - manage.office.com
# * GCC - manage-gcc.office.com
# * GCC High - manage.office365.us
# * DoD - manage.protection.apps.mil
$resource = "https://manage.office.com"

$body =
@{grant_type="client_credentials";resource=$resource;client_id=$AppID;client_secret=$Cl
$oauth = Invoke-RestMethod -Method Post -Uri $loginURL/$TenantID/oauth2/token?api-versi
Body $body
$headerParams = @{'Authorization'="$($oauth.token_type) $($oauth.access_token)"}

Invoke-WebRequest -Headers $headerParams -Uri
"$resource/api/v1.0/$TenantID/activity/feed/subscriptions/list"

Invoke-WebRequest -Method Post -Headers $headerParams -Uri
"$resource/api/v1.0/$TenantID/activity/feed/subscriptions/start?
contentType=Audit.AzureActiveDirectory"
Invoke-WebRequest -Method Post -Headers $headerParams -Uri
"$resource/api/v1.0/$TenantID/activity/feed/subscriptions/start?contentType=Audit.Excha
Invoke-WebRequest -Method Post -Headers $headerParams -Uri
"$resource/api/v1.0/$TenantID/activity/feed/subscriptions/start?contentType=Audit.Share
Invoke-WebRequest -Method Post -Headers $headerParams -Uri
"$resource/api/v1.0/$TenantID/activity/feed/subscriptions/start?contentType=Audit.Gener
Invoke-WebRequest -Method Post -Headers $headerParams -Uri
"$resource/api/v1.0/$TenantID/activity/feed/subscriptions/start?contentType=DLP.All"
```

Using curl

This is a two-step process. The first command obtains an auth token, which is used in the second command to actually start the subscription. To execute these commands, you'll need the same information (i.e., client secret, application ID, and tenant ID) that you already require to configure this Source in Cribl Stream's GUI. Replace those three variables as appropriate in the commands below.

1. `curl -d "client_secret=<client secret>&resource=https://manage.office.com&client_id=<app id>&grant_type=client_credentials" -X POST https://login.windows.net/<tenant id>/oauth2/token`

2. `curl -d "" -H "Authorization: Bearer <access token>" -X POST https://manage.office.com/api/v1.0/<tenant id>/activity/feed/subscriptions/start?contentType=<content_type_name>`

Here is an example of each command executed and expected output:

Example Command #1

```
$ curl -d
"client_secret=abcdefghijklmnopqrstuvwxyz12345678&resource=https://manage.office.com&cli
ent_id=00000000-ffff-ffff-ffff-aaaaaaaaaaaa&grant_type=client_credentials" -X POST
https://login.windows.net/12345678-aaaa-4233-cccc-160c6c30154a/oauth2/token
```

Output:

```
{"token_type":"Bearer","expires_in":"3599","ext_expires_in":"3599","expires_on":"1622089
429","not_before":"1622085529","resource":"https://manage.office.com","access_token":"ey
J0...long JWT here...MRDvw"}
```

Example Command #2

```
$ curl -d "" -H "Authorization: Bearer eyJ0...long JWT here...MRDvw" -X POST
"https://manage.office.com/api/v1.0/12345678-aaaa-4233-cccc-
160c6c30154a/activity/feed/subscriptions/start?contentType=Audit.AzureActiveDirectory"
```

Output:

```
{"contentType":"Audit.AzureActiveDirectory","status":"enabled","webhook":null}
```

Note there is no output when executing this second command with a `stop` operation.

You'll need to execute the second command for each Content Type whose logs you wish to collect. Use the exact strings below to specify Content Types in that command:

- `Audit.AzureActiveDirectory`
- `Audit.Exchange`
- `Audit.SharePoint`
- `Audit.General`
- `DLP.All`

How Cribl Stream Pulls Data

The Office 365 Activity Source retrieves data using Cribl Stream scheduled Collection jobs, which include Discover and Collection phases. The Discover phase task returns the URL of the content to collect.

In the Source's **General Settings** > **Content Types** > **Interval** column, you configure the polling schedule for each Content Type independently. Each Content Type that you enable gets its own separate scheduled job.

The job scheduler spreads the Collection tasks across all available Workers. The collected content is paginated, so the collection phase might include multiple calls to fetch data.

Viewing Scheduled Jobs

Once you've configured and saved the Source, you can view the Collection jobs' results by reopening the Source's config modal and clicking its **Job Inspector** tab.

You can also view these jobs (among scheduled jobs for other Collectors and Sources) in the **Monitoring** > **System** > **Job Inspector** > **Currently Scheduled** tab.

Mitigating Stuck-Job Problems

Occasionally, a scheduled job fails, but continues running for hours or even days, until someone intervenes and cancels it. If left alone, such a "stuck", "orphaned," or "zombie" job will never complete. This can cause missing events in downstream receivers, along with `HTTP timeout` or similar errors in Cribl Stream's logs.

To keep stuck jobs from running excessively long:

- First, try setting **Advanced** > **Timeout (secs)** to a duration shorter than the default of `300` seconds (5 minutes).
- If adjusting **Timeout (secs)** does not fix the problem, try the global setting **Job Timeout** – whose default of `0` allows a job to run indefinitely – to a desired maximum duration. You'll find **Job Timeout** among the task manifest and buffering limits.

Using these settings in tandem works like this:

- **Timeout (secs)** limits the time that Cribl Stream will wait for an HTTP request to complete.
- Then, if a job gets stuck and keeps running beyond that limit, **Job Timeout** can catch and terminate the job, because it monitors the overall time the job has been running.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Retry Logic

If this Source receives an HTTP `429`, `500`, or `503` response code, and the `retry-after` header is present, Cribl Stream will use the header's `delay-seconds` or `http-date` value to determine how long to wait before retrying the request. Cribl Stream will log a warning message with the value retrieved from the header.

If the `retry-after` header is absent, Cribl Stream will make five retries, using a backoff algorithm, at the following intervals (in milliseconds): `200`, `400`, `800`, `1600`, `3200`.

Multiple Overlapping Jobs

You can schedule multiple Collection jobs where each job uses a different ingestion lag, e.g., three different jobs with **Ingestion lag** set to `120` (two hours), `720` (twelve hours), and `5760` (four days), respectively.

Although this approach will collect data over partially overlapping time ranges – meaning that you'll have duplicate events – it can improve the chances that you'll catch "straggler" events affected by the known lag times in the Office 365 Management Activity API.

10.6.2. Office 365 Message Trace

Cribl Stream supports receiving Office 365 Message Trace data. This mail-flow metadata can be used to detect and report on malicious activity including bulk emails, spoofed-domain emails, and data exfiltration.

> Type: **Pull** | TLS Support: **YES** | Event Breaker Support: **YES**

TLS is enabled via the HTTPS protocol on this Source's underlying REST API.

Office 365 Setup

At a minimum, your Office 365 service account should include a role with `Message Tracking` and `View-Only Recipients` permissions, assigned to the Office 365 user that will integrate with Cribl Stream. Assign these permissions in the Exchange admin center (https://admin.exchange.microsoft.com).

Modern Authentication (OAuth 2.0) Setup

If you plan to use OAuth, OAuth Secret, or OAuth Certificate authentication, your Office 365 setup must include at least one role with the corresponding required permissions:

1. In the Azure portal, create an Azure AD App Registration. (For details, see documentation from Microsoft, Splunk, or Splunkbase.)

2. Assign the application at least one Azure AD role that will enable it to access the Reporting Web Service:

    - Global Reader
    - Global Administrator
    - Exchange Administrator

Make sure that at least one role includes the `ReportingWebService.Read.All` permission. For detailed steps, see Microsoft's Assign Azure AD Roles to Users topic.

Configuring Cribl Stream to Receive Office 365 Message Trace Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Office 365** > **Message Trace**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Office 365** > **Message Trace**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Office 365 Message Trace definition.

Report URL: Enter the URL to use when retrieving report data. Defaults to: `https://reports.office365.com/ecp/reportingwebservice/reporting.svc/MessageTrace`.

Poll interval: How often (in minutes) to run the report. Must divide evenly into 60 minutes to create a predictable schedule, or Save will fail. See About Polling Intervals below.

Authentication Settings

In the **Authentication** section, use the buttons to select an **Authentication method**: Basic, Basic (credentials secret), OAuth, OAuth (text secret), or OAuth Certificate. The default is **OAuth**. All OAuth options rely on the OAuth 2.0 protocol.

Basic Authentication

Selecting **Basic** exposes **Username** and **Password** fields, where you directly enter the HTTP Basic credentials to use on Message Trace API calls.

Basic Secret Authentication

Selecting **Basic (credentials secret)** exposes a **Credentials secret** drop-down, where you select an existing stored secret that references your credentials on the Message Trace API. You can use the adjacent **Create** button to store a new, reusable secret.

OAuth Authentication

The default **OAuth** authentication method exposes the following fields, all required:

- **Client secret**: Directly enter the `client_secret` to pass in the OAuth request parameter.
- **Tenant identifier**: Directory ID (tenant identifier) in Azure Active Directory.

- **Client ID**: The `client_id` to pass in the OAuth request parameter.
- **Resource**: Resource parameter to pass in the OAuth request parameter. Defaults to: `https://outlook.office365.com`.

OAuth Secret Authentication

Selecting **OAuth (text secret)** exposes three of the same controls as the default OAuth method, but – as you'd expect – you instead enter the **Client secret** by reference:

- **Client secret**: Use the drop-down to select an existing stored `client_secret` to pass in the OAuth request parameter. You can use the adjacent **Create** button to store a new, reusable secret.
- **Tenant identifier**: Directory ID (tenant identifier) in Azure Active Directory.
- **Client ID**: The `client_id` to pass in the OAuth request parameter.
- **Resource**: Resource parameter to pass in the OAuth request parameter. Defaults to: `https://outlook.office365.com`.

OAuth Certificate Authentication

Selecting **OAuth (certificate)** exposes two of the same controls as the above OAuth methods (**Tenant identifier** and **Client ID**). But this authentication method – available in Cribl Stream 4.1.3 and later – foregrounds controls to define the certificate you're using to authenticate. Treat all fields here as required, except for the optional **Passphrase**:

- **Certificate name**: Use the drop-down to select an existing certificate to pass in the OAuth request parameter. You can use the adjacent **Create** button to store a new, reusable cert.
- **Private key path**: Path to the private key to use. The key should be in PEM format. Can reference `$ENV_VARS`.
- **Passphrase**: If your private key requires a passphrase to decrypt it, enter that passphrase here.
- **Certificate path**: Path to the certificate to use. The cert should be in PEM format. Can reference `$ENV_VARS`.
- **Tenant identifier**: Directory ID (tenant identifier) in Azure Active Directory.
- **Client ID**: The `client_id` to pass in the OAuth request parameter.
- **Resource**: Resource parameter to pass in the OAuth request parameter. Defaults to: `https://outlook.office365.com`.
- **Subscription Plan**: Select the Office 365 subscription plan for your organization. Options include:
  - **Office 365 Enterprise**
  - **Office 365 GCC**
  - **Office 365 GCC High**
  - **Office 365 DoD**

Optional Settings

Date range start: Backward offset for the head of the search date range. (E.g., `-3h@h`.) Message Trace data is delayed; this parameter (with **Date range end**) compensates for delay and gaps.

Date range end: Backward offset for the tail of the search date range. (E.g., `-2h@h`.) Message Trace data is delayed; this parameter (with **Date range start**) compensates for delay and gaps.

Log level: For data collection's runtime log, set the verbosity level to one of `debug`, `info`, `warn`, or `error`. (If not selected, defaults to `info`.)

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

About Polling Intervals

To poll the Office 365 Message Trace API, Cribl Stream uses the **Poll interval** field's value to establish the cron schedule. (e.g.: `*/${interval} * * * *`).

Because the interval is set in minutes, it must divide evenly into 60 minutes to create a predictable schedule. Dividing 60 by intervals like `1`, `2`, `3`, `4`, `5`, `6`, `10`, `12`, `15`, `20`, or `60` itself yields an integer, so you can enter any of these values.

Cribl Stream will reject intervals like `23`, `42`, or `45`, or `75` – which would yield non-integer results, meaning unpredictable schedules.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Keep Alive time (seconds): How often Workers should check in with the scheduler to keep their job subscription alive. Defaults to `60`.

Job timeout: Maximum time a job is allowed to run. Defaults to `0`, for unlimited time. Units are seconds if not specified. Sample entries: `30`, `45s`, `15m`.

Worker timeout (periods): The number of Keep Alive Time periods before an inactive Worker will have its job subscription revoked. Defaults to `3`.

Timeout (secs): Maximum time to wait for an individual Message Trace API request to complete. Defaults to `600` seconds (10 minutes). Enter `0` to disable metering, allowing unlimited response time. Because there is a single request to the Message Trace API per page of data, this timeout is applied at the page (request) level.

Disable time filter: Disables Collector event time filtering when a date range is specified in General Settings. Toggle to `No` to allow filtering.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__final`
- `__inputId`
- `__isBroken`
- `__source`

How Cribl Stream Pulls Data

The Office 365 Message Trace Source uses a scheduled REST Collector. It runs one collection task every **Poll interval**, and a single Worker will process the collection. The data is paginated, so the Worker might make multiple calls to fetch the data.

Viewing Scheduled Jobs

This Source executes Cribl Stream's scheduled collection jobs. Once you've configured and saved the Source, you can view those jobs' results by reopening the Source's config modal and clicking its **Job Inspector** tab.

Each content type that you enabled gets its own separate scheduled job.

You can also view these jobs (among scheduled jobs for other Collectors and Sources) in the **Monitoring** > **System** > **Job Inspector** > **Currently Scheduled** tab.

Mitigating Stuck-Job Problems

Occasionally, a scheduled job fails, but continues running for hours or even days, until someone intervenes and cancels it. If left alone, such a "stuck", "orphaned," or "zombie" job will never complete. This can cause missing events in downstream receivers, along with `HTTP timeout` or similar errors in Cribl Stream's logs.

To keep stuck jobs from running excessively long:

- First, try setting **Advanced** > **Timeout (secs)** to a duration shorter than the default of `600` seconds (10 minutes).
- If adjusting **Timeout (secs)** does not fix the problem, try setting **Advanced** > **Job Timeout** – whose default of `0` allows a job to run indefinitely – to a desired maximum duration.

Using these settings in tandem works like this:

- **Timeout (secs)** limits the time that Cribl Stream will wait for an HTTP request to complete.
- Then, if a job gets stuck and keeps running beyond that limit, **Job Timeout** can catch and terminate the job, because it monitors the overall time the job has been running.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Retry Logic

If this Source receives an HTTP `429`, `500`, or `503` response code, and the `retry-after` header is present, Cribl Stream will use the header's `delay-seconds` or `http-date` value to determine how long to wait before retrying the request. Cribl Stream will log a warning message with the value retrieved from the header.

If the `retry-after` header is absent, Cribl Stream will make five retries, using a backoff algorithm, at the following intervals (in milliseconds): `200`, `400`, `800`, `1600`, `3200`.

10.6.3. Office 365 Services

Cribl Stream supports receiving data from the Microsoft Graph service communications API. This facilitates analyzing the status and history of service incidents on multiple Microsoft cloud services, along with associated incident and Message Center communications. For details, see Microsoft's Overview of the Graph API.

> Type: **Pull** | TLS Support: **YES** | Event Breaker Support: **YES**
>
> TLS is enabled via the HTTPS protocol on this Source's underlying REST API.
>
> Microsoft has retired its prior Office 365 Service Communications API, forcing a switch to the Graph API mentioned above. Due to a limitation in this new API, Cribl Stream (LogStream) 3.3 and above can no longer collect the **Historical Status** content type that was available in this Source through LogStream 3.2.2.
>
> For more about the Microsoft Graph API, see our Microsoft Graph API Collection guide.

Azure AD Permissions

In Azure Active Directory, the application representing your Cribl Stream instance must be granted the following permissions to pull data. (The permission **Type** for both must be `Application` – `Delegated` is not sufficient:)

- `ServiceHealth.Read.All`
- `ServiceMessage.Read.All`

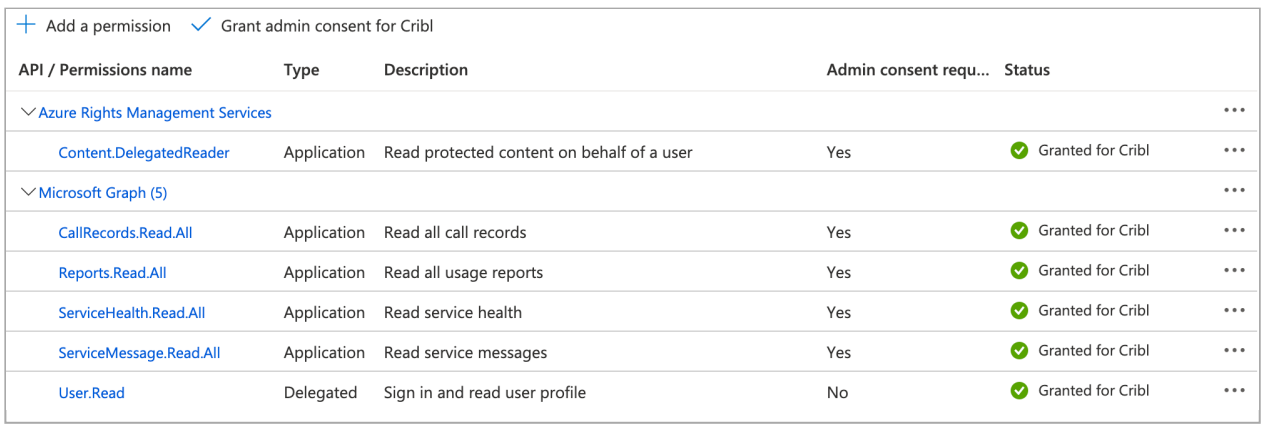

Configuring Cribl Stream to Receive Data from the Service API

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Office 365** > **Services**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Office 365** > **Services**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Office 365 Services definition.

Tenant ID: Enter the Office 365 Azure tenant ID.

App ID: Enter the Office 365 Azure application ID.

Authentication Settings

Authentication method: Select one of the following buttons.

- **Manual**: This default option provides a **Client secret** field, where you directly enter the required Office 365 Azure client secret.
- **Secret**: This option instead exposes a **Client secret (text secret)** drop-down, from which you select a stored text secret to authenticate with. Click **Create** to configure a new secret.

Optional Settings

Subscription Plan: Select the Office 365 subscription plan for your organization. Options include:

- **Office 365 Enterprise**
- **Office 365 GCC**

- **Office 365 GCC High**
- **Office 365 DoD**

Content Types: See the Content Types section below.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Content Types

Here, you can configure polling separately for the following types of data from the Office 365 Service Communications API:

- **Current Status**: Get a real-time view of current and ongoing service incidents.
- **Messages**: Find incident and Message Center communications.

As of this revision, this Microsoft API provides data for Office 365, Yammer, Dynamics CRM, and Microsoft Intune cloud services. For each of these content types, this section provides the following controls:

Enabled: Toggle this to `Yes` for each service that you want to poll.

Interval: Optionally, override the default polling interval. See About Polling Intervals below.

Log level: Set the verbosity level to one of `debug`, `info` (the default), `warn`, or `error`.

About Polling Intervals

To poll the Office 365 Service Communications API, Cribl Stream uses the **Interval** field's value to establish the search date range and the cron schedule, for example: `*/${interval} * * * *`

Therefore, intervals set in minutes – those for **Current Status** – must divide evenly into 60 minutes to create a predictable schedule. Dividing 60 by intervals like `1`, `2`, `3`, `4`, `5`, `6`, `10`, `12`, `15`, `20`, or `60` itself yields an integer, so you can enter any of these values.

Cribl Stream will reject intervals like `23`, `42`, or `45`, or `75` – which would yield non-integer results, meaning unpredictable schedules.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Keep Alive Time (seconds): How often Workers should check in with the scheduler to keep their job subscription alive. Defaults to `60`.

Worker timeout (periods): The number of Keep Alive Time periods before an inactive Worker will have its job subscription revoked. Defaults to `3`.

Timeout (secs): The maximum time period for an HTTP request to complete before Cribl Stream treats it as timed out. Defaults to `300` (i.e., 5 minutes). Enter `0` to disable timeout metering.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__final`
- `__inputId`
- `__isBroken`
- `__source`

How Cribl Stream Pulls Data

The Office 365 Services Source retrieves data using Cribl Stream scheduled Collection jobs, which include Discover and Collection phases. The Discover phase task returns the URL of the content to collect.

In the Source's **General Settings** > **Content Types** > **Interval** column, you configure the polling schedule for each Content Type independently.

The job scheduler spreads the Collection tasks across all available Workers. The collected content is paginated, so the collection phase might include multiple calls to fetch data.

Viewing Scheduled Jobs

This Source executes Cribl Stream's scheduled collection jobs. Once you've configured and saved the Source, you can view those jobs' results by reopening the Source's config modal and clicking its **Job Inspector** tab.

Each content type that you enabled gets its own separate scheduled job.

You can also view these jobs (among scheduled jobs for other Collectors and Sources) in the **Monitoring** > **System** > **Job Inspector** > **Currently Scheduled** tab.

Mitigating Stuck-Job Problems

Occasionally, a scheduled job fails, but continues running for hours or even days, until someone intervenes and cancels it. If left alone, such a "stuck", "orphaned," or "zombie" job will never complete. This can cause missing events in downstream receivers, along with `HTTP timeout` or similar errors in Cribl Stream's logs.

To keep stuck jobs from running excessively long:

- First, try setting **Advanced** > **Timeout (secs)** to a duration shorter than the default of `300` seconds (5 minutes).
- If adjusting **Timeout (secs)** does not fix the problem, try the global setting **Job Timeout** – whose default of `0` allows a job to run indefinitely – to a desired maximum duration. You'll find **Job Timeout** among the task manifest and buffering limits.

Using these settings in tandem works like this:

- **Timeout (secs)** limits the time that Cribl Stream will wait for an HTTP request to complete.
- Then, if a job gets stuck and keeps running beyond that limit, **Job Timeout** can catch and terminate the job, because it monitors the overall time the job has been running.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Retry Logic

If this Source receives an HTTP `429`, `500`, or `503` response code, and the `retry-after` header is present, Cribl Stream will use the header's `delay-seconds` or `http-date` value to determine how long to wait before retrying the request. Cribl Stream will log a warning message with the value retrieved from the header.

If the `retry-after` header is absent, Cribl Stream will make five retries, using a backoff algorithm, at the following intervals (in milliseconds): `200`, `400`, `800`, `1600`, `3200`.

10.7. Prometheus

10.7.1. Prometheus Scraper

Cribl Stream supports receiving batched data from Prometheus targets. This is a pull Source; to ingest Prometheus streaming data, see Prometheus Remote Write.

> Type: **Pull** | TLS Support: **No** | Event Breaker Support: **No**
>
> This Source assumes that incoming data is snappy-compressed. It does not currently support Prometheus metadata.

Configuring Cribl Stream to Scrape Prometheus Data

> As of v.4.1.2, this Source is deprecated on Cribl Edge. Cribl plans to remove it from Cribl Edge by v.4.2. Please use the Edge-specific Prometheus Edge Scraper Source instead.

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Prometheus** > **Scraper**. Next, click either **Add Source** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Prometheus** > **Scraper**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Additional fields appear in this section depending on what discovery type you select.

Input ID: Enter a unique name to identify this Source definition.

Discovery type: Use this drop-down to select a discovery mechanism for targets. See Discovery Type below for the options.

> Some **Discovery type** options replace the **Targets** field with additional controls below the **Poll interval** and **Log level** fields – while also adding an **Assume Role** and/or **Target Discovery** left tab to the modal.

Poll interval: Specify how often (in minutes) to scrape targets for metrics. Defaults to `15`. This value must be an integer that divides evenly into `60`.

Log level: Set the verbosity level to one of `debug`, `info` (the default), `warn`, or `error`.

Discovery Type

Use this drop-down to select a discovery mechanism for targets. To manually enter a targets list, use Static (the default). To enable dynamic discovery of endpoints to scrape, select DNS or AWS EC2. Each selection exposes different controls and/or tabs, listed below.

Static Discovery

The `Static` option adds a **General Settings** > **Targets** field, in which you enter a list of specific Prometheus targets from which to pull metrics.

Values can be in URL or host[:port] format, e.g.: `http://localhost:9090/metrics`, `localhost:9090`, or `localhost`. If you specify only `host[:port]`, the endpoint will resolve to: `http://host[:port]/metrics`. For further options, see Target Discovery for DNS.

DNS Discovery

The `DNS` option adds a Target Discovery tab to the modal, and adds two extra fields to its **General Settings** tab:

- **DNS names**: Enter a list of DNS names to resolve.
- **Record type**: Select the DNS record type to resolve. Defaults to `SRV` (Service). Other options are `A` or `AAAA`.

AWS EC2 Discovery

The `AWS EC2` option adds Assume Role and Target Discovery tabs to the modal, and adds one extra field to the **Optional Settings** tab:

- **Region**: Select the AWS region in which to discover EC2 instances with metrics endpoints to scrape.

This option also adds controls in the **Advanced Settings** tab, as described below.

Optional Settings

Extra dimensions: Specify the dimensions to include in events. Defaults to `host` and `source`.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication (Prometheus)

Use the **Authentication Method** buttons to select one of these authentication options for Prometheus:

- **Manual**: In the resulting **Username** and **Password** fields, enter Basic authentication credentials corresponding to your Prometheus targets.
- **Secret**: This option exposes a **Secret** drop-down, in which you can select a stored secret that references your credentials described above. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. Click **Create** if you need to configure a new secret.

Assume Role

With the AWS EC2 target discovery type, you can configure AssumeRole behavior on AWS.

- **Enable for EC2**: Toggle to `Yes` if you want to use `AssumeRole` credentials to access EC2.
- **AssumeRole ARN**: Enter the Amazon Resource Name (ARN) of the role to assume.
- **External ID**: Enter the External ID to use when assuming the role.
- **Duration (seconds)**: Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Target Discovery

Setting the General Settings > Discovery type drop-down to DNS or AWS EC2 exposes this tab. These two discovery types expose different controls here.

Target Discovery for DNS

Setting the Discovery type drop-down to DNS exposes the following **Target Discovery** fields.

Metrics protocol: Select `http` (the default) or `https` as the protocol to use when collecting metrics.

Metrics path: Specify a path to use when collecting metrics from discovered targets. Defaults to `/metrics`.

Target Discovery for AWS

Setting the Discovery type drop-down to AWS EC2 exposes the following **Target Discovery** controls. The first controls is a special case:

- **Authentication method**: Select the **Auto**, **Manual**, or **Secret** button to determine how Cribl Stream will authenticate against AWS. Each selection changes the fields displayed on this tab – see AWS Authentication Options for details.

These remaining controls are displayed for all **Authentication method** selections:

- **Metrics protocol**: Select `http` (the default) or `https` as the protocol to use when collecting metrics.
- **Metrics port**: Specify the port number to append to the metrics URL for discovered targets. Defaults to `9090`.
- **Metrics path**: Specify a path to use when collecting metrics from discovered targets. Defaults to `/metrics`.
- **Use public IP**: The `Yes` default uses the public IP address for discovered targets. Toggle to `No` to use a private IP address.
- **Search filter**: Click **Add filter** to apply filters when searching for EC2 instances. Each filter row provides two columns:
  - **Filter name**: Select standard attributes from the drop-down, or type in custom attributes.
  - **Filter values**: Enter values to match within this row's attribute, Press `Enter` between values. (If you specify no values, the search will return only `running` EC2 instances.)

AWS Authentication Options

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. This option displays the same fields as Auto, plus:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.

- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. This option displays the same fields as Auto, plus:

- **Secret key pair**: Use the drop-down to select a secret key pair that you've configured in Cribl Stream's internal secrets manager or (if enabled) an external KMS. Click **Create** if you need to configure a key pair.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Keep alive time (seconds): How often workers should check in with the scheduler to keep job subscription alive. Defaults to `60` seconds.

Job timeout: Maximum time a job is allowed to run. Defaults to `0`, for unlimited time. Units are seconds if not specified. Sample entries: `30`, `45s`, `15m`.

Worker timeout (periods): How many **Keep alive time** periods before an inactive worker's job subscription will be revoked. Defaults to `3` periods.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Advanced Settings for AWS

These two additional settings appear only when **Optional Settings** > **Discovery Type** is set to `AWS EC2`.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to reject certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`, the restrictive option.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__source`
- `__isBroken`
- `__inputId`
- `__final`
- `__criblMetrics`
- `__channel`
- `__cloneCount`

How Cribl Stream Pulls Data

The Prometheus Source retrieves data using Cribl Stream scheduled Collection jobs. You determine the schedule using your **Poll interval** entry.

With the `DNS` or `AWS EC2` **Discovery Type**, these jobs include both Discover and Collection phases. The Discover phase runs on a single Worker, and returns 1 collection task per discovered target.

The job scheduler spreads the Collection tasks across all available Workers.

Viewing Scheduled Jobs

This Source executes Cribl Stream's scheduled collection jobs. Once you've configured and saved the Source, you can view those jobs' results by reopening the Source's config modal and clicking its **Job Inspector** tab.

Each content type that you enabled gets its own separate scheduled job.

You can also view these jobs (among scheduled jobs for other Collectors and Sources) in the **Monitoring** > **System** > **Job Inspector** > **Currently Scheduled** tab.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

10.7.2. Prometheus Remote Write

Cribl Stream supports receiving metric data from Prometheus instances that are configured to send data via the remote write protocol.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**
>
> This Source assumes that incoming data is snappy-compressed.

Configuring Cribl Stream to Receive Metrics from Prometheus Remote Write Sources

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Prometheus** > **Remote Write**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Prometheus** > **Remote Write**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Address: Enter the hostname/IP to listen to. Defaults to `0.0.0.0`.

Port: Enter the port number to listen on..

Remote Write API endpoint: Enter the absolute path on which to listen for Prometheus requests. Defaults to `/write`, which will (in this example) expand as: `http://<your-upstream-URL>:<your-port>/write`.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

Select one of the following options for authentication:

- **None**: Don't use authentication.
- **Auth token**: Use HTTP token authentication. In the resulting **Token** field, enter the bearer token that must be included in the HTTP authorization header, or click **Generate** if you need a new token.
- **Auth token (text secret)**: Provide an HTTP token referenced by a secret. Select a stored text secret in the resulting drop-down, or click **Create** to configure a new secret.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials. Click **Generate** if you need a new password.
- **Basic (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal

characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Socket timeout (seconds): How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

Request timeout (seconds): How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

> The longer the **Keep-alive timeout**, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes`.
- `__inputId`
- `__srcIpPort` – See details below.

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the Prometheus Remote Write client sending data to this Source.

When any proxies (including load balancers) lie between the Prometheus Remote Write client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

Detecting Metrics' Types

Because Prometheus remote write requests don't specify metrics' types, Cribl Stream applies the following rules to determine the type as we ingest them:

- If the metric's name ends with `_total`, `_sum`, `_count`, or `_bucket`, the type is set to `counter`.
- Otherwise, the metric's type is set to `gauge`.

This is consistent with the type detection practiced by other services implementing the remote write protocol. See, for example, New Relic's and Elastic's documentation.

Note that Cribl Stream supports the `timer` type in addition to `counter` and `gauge`.

10.7.3. Grafana

Cribl Stream supports receiving metric and log data from Grafana Agent instances via the Prometheus remote write specification. The Grafana Agent uses Prometheus for metrics collection and Grafana Loki for log collection.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**
>
> This Source assumes that incoming data is snappy-compressed.

Configuring Cribl Stream to Receive Metrics and Logs from Grafana Agent Sources

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Grafana**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Grafana**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Address: Enter the hostname/IP to listen to. Defaults to `0.0.0.0`.

Port: Enter the port number to listen on.

Optional Settings

Remote Write API endpoint: Absolute path on which to listen for Grafana Agent's remote write requests. Defaults to `/api/prom/push`, which will (in this example) expand as: `http://<your-upstream-URL>:<your-port>/api/prom/push`.

Logs API endpoint: Absolute path on which to listen for Loki logs requests. Defaults to `/loki/api/v1/push`, which will (in this example) expand as: `http://<your-upstream-URL>:<your-port>/loki/api/v1/push`.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

The **Authentication** tab provides separate **Loki** and **Prometheus** sections, enabling you to configure these inputs separately. The two sections provide identical options.

Select one of the following options for authentication:

- **None**: Don't use authentication.
- **Auth token**: Enter the bearer token that must be included in the authorization header.
- **Auth token (text secret)**: Provide an HTTP token referenced by a secret. Select a stored text secret in the resulting drop-down, or click **Create** to configure a new secret.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.
- **Basic (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified,

Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Socket timeout (seconds): How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

Request timeout (seconds): How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

> The longer the **Keep-alive timeout**, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes`.
- `__inputId`
- `__labels` – For log events only – will contain all the labels found in each event's corresponding Loki stream.
- `__srcIpPort` – See details below.

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the Grafana client sending data to this Source.

When any proxies (including load balancers) lie between the Grafana client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

Detecting Metrics' Types

Because Prometheus remote write requests don’t specify metrics' types, Cribl Stream applies the following rules to determine the type as we ingest them:

- If the metric’s name ends with `_total`, `_sum`, `_count`, or `_bucket`, the type is set to `counter`.
- Otherwise, the metric's type is set to `gauge`.

This is consistent with the type detection practiced by other services implementing the remote write protocol. See, for example, New Relic's and Elastic's documentation.

Note that Cribl Stream supports the `timer` type in addition to `counter` and `gauge`.

10.7.4. Loki

Cribl Stream supports receiving log data from Grafana Loki via an adaptation of the Protobuf (Protocol Buffers) specification.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**
>
> This Source assumes that incoming data is snappy-compressed.

Configuring Cribl Stream to Receive Loki Logs Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Amazon** > **Loki**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Amazon** > **Loki**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Address: Enter the hostname/IP to listen to. Defaults to `0.0.0.0`.

Port: Enter the port number to listen on.

Logs API endpoint: Absolute path on which to listen for Loki logs requests. Defaults to `/loki/api/v1/push`, which will (in this example) expand as: `http://<your-upstream-URL>:<your-port>/loki/api/v1/push`.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication type** drop-down to specify how Loki's Promtail agent will authenticate against Cribl Stream:

- **None**: Don't use authentication.
- **Auth token**: Use HTTP token authentication. In the resulting **Token** field, enter the bearer token that must be included in the HTTP authorization header.
- **Auth token (text secret)**: Provide an HTTP token referenced by a secret. Select a stored text secret in the resulting drop-down, or click **Create** to configure a new secret.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.
- **Basic (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate server certs**: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal

characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Socket timeout (seconds): How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

Request timeout (seconds): How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

> The longer the **Keep-alive timeout**, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes`.
- `__inputId`
- `__labels` – Will contain all the labels found in each event's corresponding Loki stream.

- `__srcIpPort` – See details below.

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the Loki client sending data to this Source.

When any proxies (including load balancers) lie between the Loki client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

10.8. Splunk

10.8.1. Splunk HEC

Cribl Stream supports receiving data over HTTP/S using the Splunk HEC (HTTP Event Collector).

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **YES**
>
> This Source supports gzip-compressed inbound data when the `Content-Encoding: gzip` connection header is set.

Configuring Cribl Stream to Receive Data over Splunk HEC

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Splunk** > **HEC**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Splunk** > **HEC**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> Cribl Stream ships with a Splunk HEC Source preconfigured to listen on Port 8088. You can clone or directly modify this Source to further configure it, and then enable it.

General Settings

Input ID: Enter a unique name to identify this Splunk HEC Source definition.

Address: Enter the hostname/IP on which to listen for HTTP(S) data. E.g.: `localhost` or `0.0.0.0`. Supports IPv4 and IPv6 addresses.

Port: Enter the port number.

Splunk HEC endpoint: Absolute path on which to listen for the Splunk HTTP Event Collector API requests. Defaults to `/services/collector`.

> This single endpoint supports JSON events via `/event`, raw events via `/raw`, and Splunk S2S events via `/s2s`. See the examples below. The Source will automatically detect where to forward the request.

Optional Settings

Allowed Indexes: List the values allowed in the HEC event index field. Allows wildcards. Leave blank to skip validation.

Splunk HEC acks: Whether to enable Splunk HEC acknowledgments. Defaults to `No`. Some senders might require HEC acks to be enabled. As a result, they might keep TCP connections open while waiting for an ack; this behavior can exhaust available file descriptors. Cribl does not maintain a comprehensive list of senders that require acks – please refer to your sender's documentation.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.

- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Event Breakers

This section defines event breaking rulesets that will be applied, in order, on the `/raw` endpoint.

Event Breaker rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maximum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to determine field's value (can be a constant).

> Fields specified on the **Fields** tab will normally override fields of the same name in events. But you can specify that fields in events should override these fields' values.
>
> In particular, where incoming events have no `index` field, this Source adds one with the literal value `default`. You can override this value by using **Add Field** to specify an `index` field, and then setting its **Value** to an expression of the following form: `` `index == 'default' ? 'myIndex' : index` ``
>
> Fields here are evaluated and applied **after** any fields specified in the Auth Tokens section.

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Auth Tokens

If empty (the default), the Splunk HEC Source will permit client access without an auth token. To generate and/or configure tokens, click **Add Token**, which exposes the following fields:

Token: Shared secret to be provided by any client (Authorization: <token>). Click **Generate** to create a new secret. If empty, unauthenticated access **will be permitted**.

Description: Optional description for this token.

Fields: Fields to add to events referencing this token. Each field is a **Name**/**Value** pair.

> Fields specified on the **Auth Tokens** tab will normally override fields of the same name in events. But you can specify that fields in events should override these fields' values.
>
> In particular, where incoming events have no `index` field, this Source adds one with the literal value `default`. You can override this value by using **Add Field** to specify an `index` field, and then setting its **Value** to an expression of the following form: `` `index == 'default' ? 'myIndex' : index` ``
>
> Fields here are evaluated and applied **before** any fields specified in the Fields section.

Advanced Settings

Use Universal Forwarder time zone (S2S only): Leave the default toggle set to `Yes` to have Event Breakers determine the time zone for events based on Universal Forwarder–provided metadata when the time zone

can't be inferred from the raw event.

CORS allowed origins: If you need to enable cross-origin resource sharing with Splunk senders, use this field to specify the HTTP origins to which Cribl Stream should send `Access-Control-Allow-*` headers. You can enter multiple domains and use wildcards. This and its companion **CORS allowed headers** option should seldom be needed – see Working with CORS Headers below. Both options are available in Cribl Stream 4.1.2 and later.

CORS allowed headers: List HTTP headers that Cribl Stream will send in a CORS preflight response to your configured (above) **CORS allowed origins** as `Access-Control-Allow-Headers`. Enter `*` to allow all headers.

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Activity log sample rate: Determines how often request activity is logged at the `info` level. The default `100` value logs every 100th value; a `1` value would log every request; a `10` value would log every 10th request; etc.

Socket timeout (seconds): How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

Request timeout (seconds): How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

> The longer the **Keep-alive timeout**, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes`.
- `__hecToken`
- `__inputId`
- `__s2sVersion` – value can be either `v3` or `v4`. This field is present only when the Source is receiving S2S-encoded payloads.
- `__srcIpPort` – See details below.
- `__TZ`

> **Universal Forwarder Time Zone**
>
> The `__TZ` field uses the universal forwarder time zone to mitigate cases where incoming events have timestamp strings but no time zone information. Event Breakers use the `__TZ` field to derive time zone information, enabling them to set the `_time` field correctly. See Using the UF Time Zone for additional information.

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the Splunk HEC client sending data to this Source.

When any proxies (including load balancers) lie between the Splunk HEC client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

Working with CORS Headers

The **CORS allowed origins** and **CORS allowed headers** settings are needed **only** when you want JavaScript code running in a web browser to send events to the Splunk HEC Source. In this (uncommon) scenario, the code in question sends a preflight request that includes CORS (Cross-Origin Resource Sharing) headers, and the Splunk HEC Source includes CORS headers in its response.

If the settings (and thus the CORS headers in the response) are correct, the browser will allow the code in question to complete requests to the Splunk HEC Source – that is, allow the code to read the Source's responses. (These settings are optional because for some web applications it's sufficient to send requests **without** reading responses.)

The CORS header dance begins when the web browser sends a request with a header stating its origin. What happens next depends on how you've configured the CORS header settings, as explained in the tables below. (For these examples, we'll assume an origin of `https://mycoolwebapp:3001`.)

CORS ALLOWED ORIGINS VALUE	WHAT SPLUNK HEC SOURCE DOES	DOES BROWSER THEN ALLOW CODE TO READ RESPONSE?
`*`	Send `Access-Control-Allow-Origin: *` header.	Yes
Multiple wildcard values	If origin value matches any wildcard, send `Access-Control-Allow-Origin: https://mycoolwebapp:3001` header.	Yes
Nothing (not configured)	Send neither an `Access-Control-Allow-Origin` nor an `Access-Control-Allow-Headers` header.	No

The web browser's request might also include an `Access-Control-Request-Headers` header that lists one or more headers that it wants to use in a subsequent `POST` request (i.e., the "actual" as opposed to preflight request). The Splunk HEC Source can then respond with an `Access-Control-Allow-Headers` header **if and only if** it's also sending the `Access-Control-Allow-Origin` header.

CORS ALLOWED HEADERS VALUE	WHAT SPLUNK HEC SOURCE DOES	DOES BROWSER THEN ALLOW CODE TO READ RESPONSE?
*	Send `Access-Control-Allow-Headers` header with the same list the client sent.	Yes
Multiple wildcard values	If any headers from the client's list match wildcards, send `Access-Control-Allow-Headers` header listing the matching headers.	Yes
Nothing (not configured)	Do not send an `Access-Control-Allow-Headers` header.	Probably not

Format and Endpoint Examples

Splunk HEC to Cribl Stream

- Configure Cribl Stream to listen on port `8088` with an auth token of `myToken42`.
- Send a payload to your Cribl Stream receiver.

Note: Token specification can be either `Splunk <token>` or `<token>`.

Splunk HEC - JSON Event Examples | Splunk HEC - Raw Event Example

```
curl -k http://<myCriblHost>:8088/services/collector/event -H 'Authorization:
myToken42' -d '{"event":"this is a sample event ", "host":"myHost",
"source":"mySource", "fieldA":"valueA", "fieldB":"valueB"}'

curl -k http://<myCriblHost>:8088/services/collector -H 'Authorization: myToken42' -
d '{"event":"this is a sample event ", "host":"myHost", "source":"mySource",
"fieldA":"valueA", "fieldB":"valueB"}'

# Multiple Events
curl -k http://<myCriblHost>:8088/services/collector -H 'Authorization: myToken42' -
d '{"event":"this is a sample event ", "host":"myHost", "source":"mySource",
"fieldA":"valueA", "fieldB":"valueB"}{"event":"this is a sample event 2",
"host":"myHost", "source":"mySource", "fieldA":"valueA", "fieldB":"valueB"}'

# Metrics Events
curl -k http://<myCriblHost>:8088/services/collector/event -H 'Authorization:
myToken42' -d '{"event":"metric", "host":"myHost", "fields":
{"_value":3850,"metric_name":"kernel.entropy_avail"}}'

curl -k http://<myCriblHost>:8088/services/collector/event -H 'Authorization:
myToken42' -d '{"host":"myHost", "fields":
{"_value":3850,"metric_name":"kernel.entropy_avail"}}'

# Send the auth token as a query parameter, with no additional configuration

curl -k "http://<myCriblHost>:8088/services/collector/event?token=mToken42" -d
'{"event":"this is a sample event ", "host":"myHost", "source":"mySource",
"fieldA":"valueA", "fieldB":"valueB"}'
```

Splunk HEC to Cribl Cloud

- Navigate to Cribl Cloud's Splunk HEC Source > **Auth Tokens** tab.
- Copy your token out of the **Token** field.
- From the command line, use `https`, your Cribl.Cloud portal's **Ingest Endpoint** and port, and the token's value:

```
curl -k "https://in.main-default-<Your-Org-ID>.cribl.cloud:8088/services/collector"
\
    -H "Authorization: <token_value>" \
    -d '{"event": "Goats are better than ponies."}{"event": "Goats are better
climbers."}{"event": "Goats are great yoga buddies.", "nested": {"horns": "Two is
better than one!"}}'
```

10.8.2. Splunk Search

Cribl Stream supports receiving Splunk search data from Splunk Search.

> Type: **Pull** | TLS Support: **Yes** | Event Breaker Support: **YES**

Configuring Cribl Stream to Receive Splunk Search Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Splunk Search**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Splunk Search**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Splunk Search Source definition.

Cron schedule: Enter a cron expression to define the schedule on which to run this job. Defaults to one run every 15 minutes. The **Estimated Schedule** below this field shows the next few collection runs, as examples of the cron interval you've scheduled.

> You enter the **Cron schedule** expression in UTC time, but the **Estimated Schedule** examples are displayed in local time.

Search Settings

Search: Enter the Splunk query. For example: `index=myAppLogs level=error channel=myApp OR | mstats avg(myStat) as myStat WHERE index=myStatsIndex.`

Search head: Enter the search head base URL. The default is `https://localhost:8089`.

Earliest: You can enter the earliest time boundary for the search. This maybe be an exact or relative time. For example: `2022-01-14T12:00:00Z` or `-16m@m`.

Latest: You can enter the latest time boundary for the search. This maybe be an exact or relative time. For example: `2022-01-14T12:00:00Z` or `-16m@m`.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

In the **Authentication** tab, use the buttons to select one of these options:

- **None**: Don't use authentication. Compatible with REST servers like AWS, where you embed a secret directly in the request URL.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.
- **Basic (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret.
- **Bearer Token**: Provide the `token` value configured and generated in Splunk.
- **Bearer Token (text secret)**: Provide the Bearer Token referenced by a secret. Select a stored text secret in the resulting **Token (text secret)** drop-down, or click **Create** to configure a new secret.

Processing Settings

Event Breakers

Event Breaker rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to the `Splunk Search Ruleset`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Search endpoint: Rest API used to conduct a search. Defaults to `services/search/jobs/export`.

Output mode: Format of the returned output. Defaults to JSON format.To parse the returned JSON, add the Cribl event breaker which parses newline delimited events in the Event Breakers tab.

Events returned from Splunk search can also be returned in the more compact CSV format. To use CSV format, set the **Output mode** to CSV and specify the CSV event breaker in the Event Breakers tab.

Endpoint parameters: Optional HTTP request parameters to append to the request URL. These refine or narrow the request. Click **Add Parameter** to add parameters as key-value pairs:

- **Name**: Field name.
- **Value**: JavaScript expression to compute the field's value (can be a constant).

Endpoint headers:: Click **Add Header** to (optionally) add request headers to send to the endpoint, as key-value pairs:

- **Name**: Header name.
- **Value**: JavaScript expression to compute the header's value, normally enclosed in backticks (e.g., `` `${earliest}` ``). Can also be a constant, enclosed in single quotes (`'earliest'`). Values without delimiters (e.g., `earliest`) are evaluated as strings.

Log level: Set the verbosity level for the data collection's runtime log.

Keep Alive Time (Seconds): How often Workers should check in with the scheduler to keep their job subscription alive. Defaults to `30`.

Job timeout: Maximum time a job is allowed to run. Defaults to `0`, for unlimited time. Units are seconds if not specified. Sample entries: `30`, `45s`, `15m`.

Worker timeout (periods): The number of Keep Alive Time periods before an inactive Worker will have its job subscription revoked. Defaults to `3`.

Request Timeout (secs): Here, you can set a maximum time period (in seconds) for an HTTP request to complete before Cribl Stream treats it as timed out. Defaults to `0`, which disables timeout metering.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__outputMode`

How Cribl Stream Pulls Data

This Collector-based Source will gather data from the specified **Search head** URL repeatedly, on the interval specified in the **Cron schedule** field. A single Worker executes each collection job.

If the Leader goes down, search jobs in progress will complete, but future scheduled searches will not run until the Leader relaunches.

Retry Logic

If this Collector receives an HTTP `429` or `503` response code, and the `retry-after` header is present, Cribl Stream will use the header's `delay-seconds` or `http-date` value to determine how long to wait before retrying the request. Cribl Stream will log a warning message with the value retrieved from the header.

If the `retry-after` header is absent, Cribl Stream will make five retries, using a backoff algorithm, at the following intervals (in milliseconds): `200`, `400`, `800`, `1600`, `3200`.

Mitigating Stuck-Job Problems

Occasionally, a scheduled job fails, but continues running for hours or even days, until someone intervenes and cancels it. If left alone, such a "stuck", "orphaned," or "zombie" job will never complete. This can cause missing events in downstream receivers, along with `HTTP timeout` or similar errors in Cribl Stream's logs.

To keep stuck jobs from running excessively long:

- First, try setting **Advanced** > **Request Timeout (secs)** – whose default of `0` means "wait forever" – to a desired maximum duration.
- If adjusting **Timeout (secs)** does not fix the problem, try setting **Advanced** > **Job Timeout** – whose default of `0` allows a job to run indefinitely – to a desired maximum duration.

Using these settings in tandem works like this:

- **Timeout (secs)** limits the time that Cribl Stream will wait for an HTTP request to complete.
- Then, if a job gets stuck and keeps running beyond that limit, **Job Timeout** can catch and terminate the job, because it monitors the overall time the job has been running.

10.8.3. Splunk TCP

Cribl Stream supports receiving Splunk data from Universal or Heavy Forwarders.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **YES**

Configuring Cribl Stream to Receive Splunk TCP Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Splunk** > **Splunk TCP**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Splunk** > **Splunk TCP**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> Cribl Stream ships with a Splunk TCP Source preconfigured to listen on Port 9997. You can clone or directly modify this Source to further configure it, and then enable it.

General Settings

Input ID: Enter a unique name to identify this Splunk Source definition.

Address: Enter hostname/IP to listen for Splunk data. E.g., `localhost` or `0.0.0.0`.

Port: Enter port number.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Event Breakers

Event Breaker rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Auth Tokens

Add Token : Click to add authorization tokens. Each token's section provides the fields listed below. If no tokens are specified, unauthenticated access **will be permitted**.

Token: Shared secrets to be provided by any Splunk forwarder (Authorization: \<token>). Click **Generate** to create a new secret.

Description: Optional description of this token.

Advanced Settings

Enable Proxy Protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2.

IP allowlist regex: Regex matching IP addresses that are allowed to establish a connection. Defaults to `.*` (i.e., all IPs).

Max active connections: Maximum number of active connections allowed per Worker Process. Defaults to `1000`. Set a lower value if connection storms are causing the Source to hang. Set `0` for unlimited

connections.

Max S2S version: The highest version of the Splunk-to-Splunk protocol to expose during handshake. Defaults to `v3`; `v4` is also available.

Use Universal Forwarder time zone: Displayed (and enabled by default) only when **Max S2S version** is set to `v4`. Provides Event Breakers with a `__TZ` field, which derives events' time zone from UF-provided metadata. See Using the UF Time Zone and Configuring a Splunk Forwarder, below.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Using the UF Time Zone

Under Advanced Settings, the **Use Universal Forwarder time zone** toggle mitigates cases where incoming events have timestamp strings but no time zone information. For example:

```
12-15-2022 14:57:22.080 WARN TcpOutputFd [1607 TcpOutEloop] - Connect to
172.17.0.1:9997 failed. Connection refused
```

This gap can be problematic, especially if the originating Universal Forwarder is in a different time zone from the processing Worker Node.

The `__TZ` field is the solution. Event Breakers use the `__TZ` field to derive time zone information, enabling them to set the `_time` field correctly. Derived time zone information will appear in Cribl Stream's own logs as shown below:

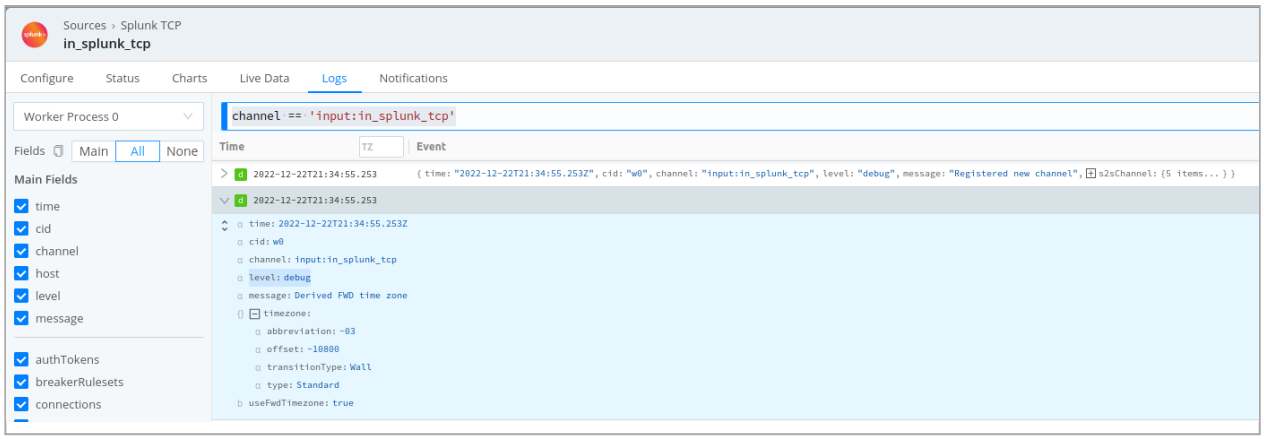

Time zone information in logs

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__s2sVersion` – value can be either `v3` or `v4`
- `__source`
- `__srcIpPort`
- `__TZ` – see above

Configuring a Splunk Forwarder

To configure a Splunk forwarder (UF, HF) use the following sample outputs.conf stanzas:

outputs.conf (on-prem) | outputs.conf (Cribl Cloud)

```
[tcpout]
disabled = false
defaultGroup = cribl, <optional_clone_target_group>,

[tcpout:cribl]
server = [<cribl_ip>|<cribl_host>]:<port>, [<cribl_ip>|<cribl_host>]:<port>, ...
sendCookedData = true
# As of Splunk 6.5, using forceTimebasedAutoLB is no longer recommended. Ensure this
is left at default for UFs
# forceTimebasedAutoLB = false
negotiateProtocolLevel = 0
```

Preventing Data Loss with v3

If you set **Max S2S version** to `v3`, Cribl recommends that you use the `negotiateProtocolLevel = 0` setting shown above to avoid data loss. Depending on your environment, enabling `negotiateProtocolLevel` with a non-`0` value could cause Cribl to not accept data from the forwarder.

If you set **Max S2S version** to `v4`, this setting is not necessary. The Splunk receiver will detect which version is in use and automatically use the correct handler.

See Internal Fields for information on the `__s2sVersion` field.

Troubleshooting Splunk Forwarder Performance Issues

If you encounter performance issues with a Splunk Forwarder, Cribl recommends increasing the number of parallel ingestion Pipelines or increasing forwarder throughput. You can experiment with either or both of these settings.

To increase the number of parallel ingestion Pipelines, adjust the setting for `parallelIngestionPipelines` in `server.conf`. Experiment with values ranging from `2 – 4`.

To adjust forwarder throughput, increase the `maxKBps` value in `limits.conf`. The default value is `256`. A value of `0` removes all throttling from the forwarder.

10.9. Internal

10.9.1. Datagen

Cribl Stream supports generating data from datagen files, as detailed in Using Datagens. When a datagen is enabled, each Worker Process uses the specified data generator file to generate events. These events proceed through Routes and Pipelines, or through a QuickConnect configuration, to configured Destinations. Whichever Worker Process generated an event from the file will also send the same event.

> Type: **System and Internal** | TLS Support: **N/A** | Event Breaker Support: **No**

Configuring Cribl Stream to Generate Sample Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**System and Internal** >] **Datagen**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**System and Internal** >] **Datagen**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Datagens: List of datagens.

- **Data generator file**: Name of the datagen file.
- **Events per second per Worker Node**: Maximum number of events to generate per second, per Worker Node/Edge Node. Defaults to `10`.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`

10.9.2. Cribl Internal

The Cribl Internal Source enables you to capture and send Cribl Stream's own internal **logs** and **metrics** through Routes and Pipelines.

> Type: **System and Internal** | TLS Support: **N/A** | Event Breaker Support: **No**

Scope and Purpose

In distributed mode, this Source's CriblLogs option can process internal logs only from Worker Processes. (Logs on the Leader remain on the Leader, because the Leader Node is not part of any processing path.)

In both distributed and single-instance mode, this Source's CriblLogs option omits API Process logs, meaning that it omits telemetry/license-validation traffic. You can, however, use a Script Collector to check for API Server (or Worker Group) events.

This Source's CriblMetrics option offers Cribl's most up-to-date and precise view of event throughput and transformation, aggregated every 2 seconds at the Worker Process level. The CriblLogs option is less granular – tracking logs that are written once per minute – so CriblLogs might fail to reflect Worker Process crashes or restarts.

Configuring Cribl Internal Logs/Metrics as a Data Source

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**System and Internal** >] **Cribl Internal**. Next, click **Select Existing**, and click either **Cribl Logs** or **Cribl Metrics** to access the configuration options listed below. When prompted, confirm that you want to switch the existing Source to QuickConnect.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**System and Internal** >] **Cribl Internal**. Next, click either **Cribl Logs** or **Cribl Metrics** to open a modal that provides the configuration options listed below.

In either UI, after you've adjusted or confirmed configuration options: On the **CriblLogs** and/or the **CriblMetrics** row, slide the **Enabled** slider to `Yes`. Confirm your choice in the resulting message box. The screenshot below shows both options successfully enabled.

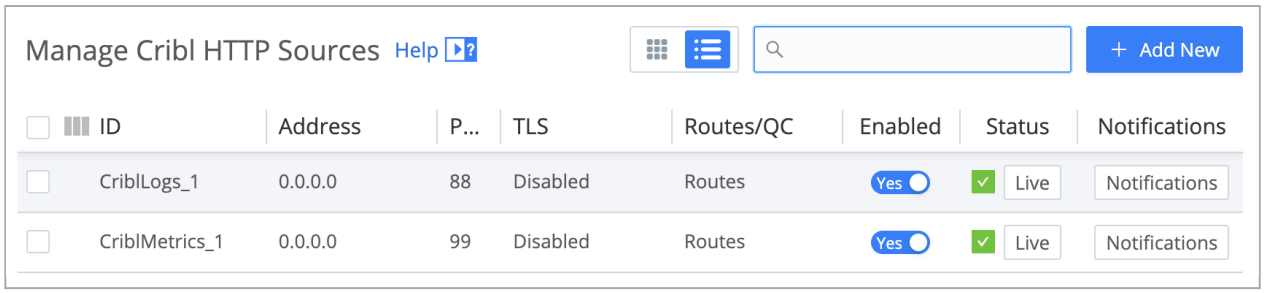

Cribl Internal Sources – click either or both of these rows to configure

CriblLogs – General Settings

Enabled: This duplicates the parent page's **Enabled** slider. Keep it at `Yes` to enable Cribl logs as a Source.

Input ID: Enter a unique name to identify this CriblLogs Source definition.

CriblLogs – Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

> See also Common Settings below.

CriblMetrics – General Settings

Enabled: This duplicates the parent page's **Enabled** slider. Keep it at `Yes` to enable Cribl metrics as a Source.

Input ID: Enter a unique name to identify this CriblMetrics Source definition.

CriblMetrics – Optional Settings

Metric name prefix: Enter an optional prefix that will be applied to metrics provided by Cribl Stream. The prefix defaults to `cribl.logstream`.

> If Cribl Stream detects `source` or `host` fields in metrics, it copies their values into new dimensions with added `event_` prefixes (e.g., `event_source`). This preserves the original fields' values if they're overwritten in downstream services. For details, see Duplicated Fields/Dimensions.

> You can disable metric collection for these and other fields by specifying them in **Settings** > **System** > **General** > **Limits** > **Metrics** > **Disable field metrics**.

Full fidelity: Toggle this to `No` to exclude granular metrics that can cause high CPU load.

The `No` option will drop the following metrics events:

- `cribl.logstream.host.(in_bytes,in_events,out_bytes,out_events)`
- `cribl.logstream.index.(in_bytes,in_events,out_bytes,out_events)`
- `cribl.logstream.source.(in_bytes,in_events,out_bytes,out_events)`
- `cribl.logstream.sourcetype.(in_bytes,in_events,out_bytes,out_events)`

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality. E.g., here you could specify adding an `index` field.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Reporting Metrics Less Frequently

By default, Cribl Stream generates internal metrics every 2 seconds. To consume metrics at longer intervals, you can use or adapt the `cribl_metrics_rollup` Pipeline that ships with Cribl Stream.

Attach this Pipeline to your **Cribl Internal** Source as a pre-processing Pipeline. The Pipeline's **Rollup Metrics** Function has a default **Time Window** of 30 seconds, which you can adjust to a different granularity as needed. This provides a second lever to reduce granularity, in addition to the Full fidelity slider described above.

Omitting `sourcetype`

You can easily drop the `sourcetype` attribute from metrics events, leaving only `event_sourcetype`. This will prevent duplicate `sourcetype` events from being routed to Destinations.

To do this: In the same `cribl_metrics_rollup` pre-processing Pipeline (or a clone) that you attach to your Source, enable the final Eval Function, which applies this **Filter** expression to remove the `sourcetype` field: `_metric && _metric.startsWith('cribl.logstream.sourcetype.')`

Duplicated Fields/Dimensions

The CriblMetrics Source operates on metrics that Worker Nodes report to their Leader Nodes. Typically included are `source` and `host` fields.

Sending metrics from this Source to Splunk is one common use case. Because Splunk might overwrite these two fields, the Source copies their values into new dimensions with added `event_` prefixes: `event_source` and `event_host`. This way, if Splunk does overwrite `source` and/or `host`, their original values remain intact in the new dimensions with `event_` prefixes.

Here's an example of how the added dimensions look in the **Live Capture** window:

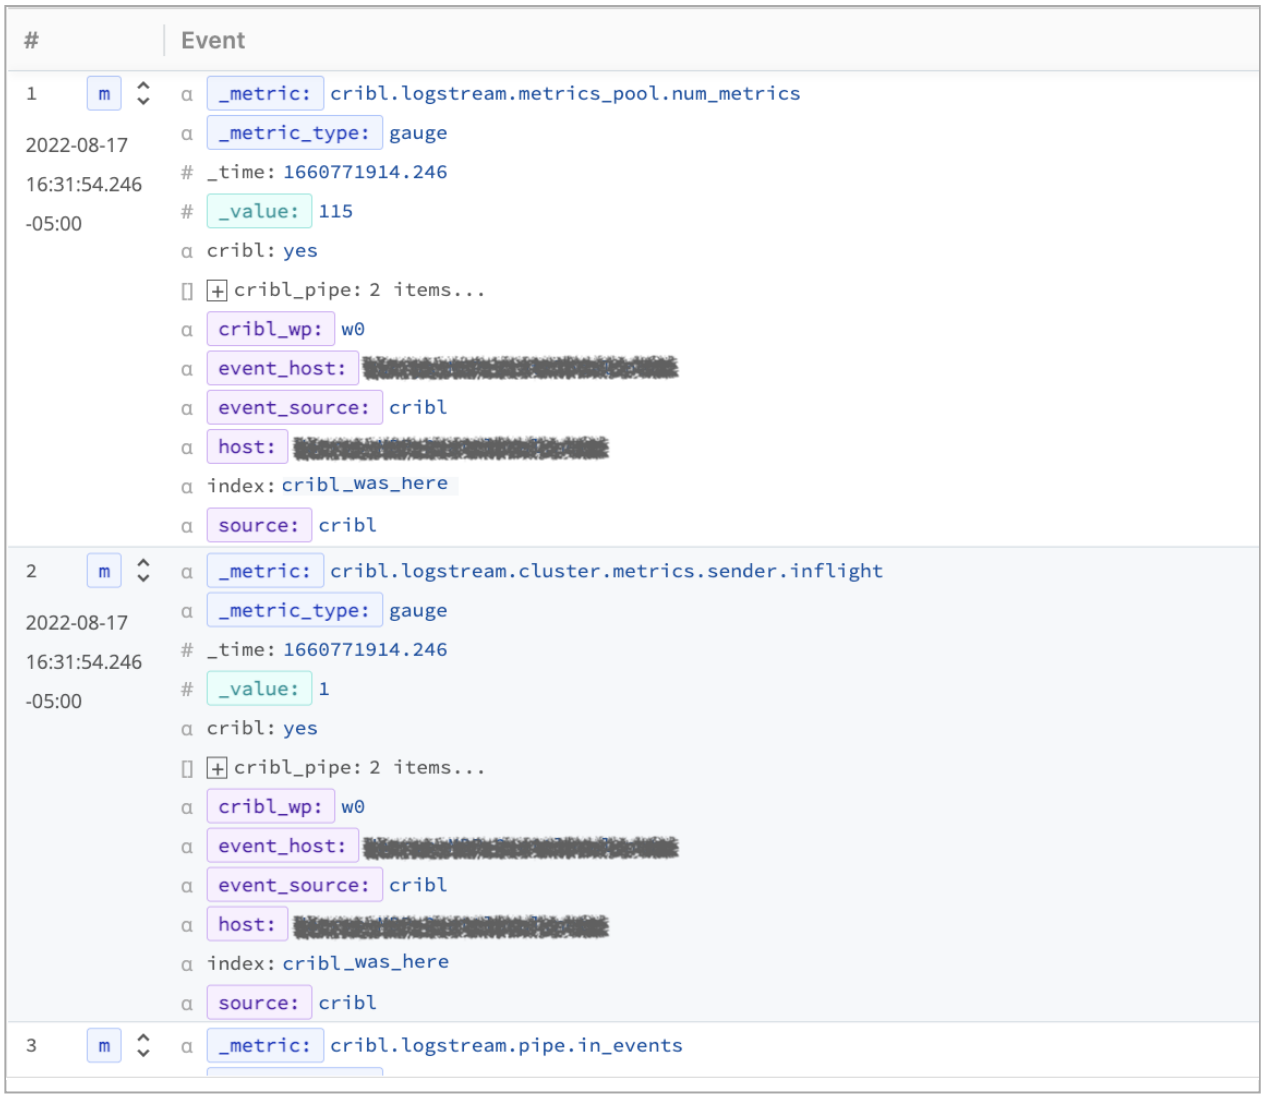

Doubled fields

If you are not sending to a downstream service that overwrites `source` or `host` fields, you can use an appropriate Function to drop the added dimensions. (You also have the option to suppress these fields entirely, as covered above in Optional Settings.)

Internal Fields

The following fields will be added to all events/metrics:

- `source` : set to `cribl` .
- `host` : set to the hostname of the Cribl instance.

Use these fields to guide these events/metrics through Cribl Routes.

All Cribl internal fields are subject to change and modification. Cribl provides them to assist with analytics and diagnostics, but does not guarantee that they will remain available.

10.9.3. Cribl HTTP

The internal Cribl HTTP Source is available only in distributed deployments. It is provided to facilitate sending data between Worker Nodes that are connected to the same Leader. You'll find this Source especially valuable in a hybrid Cloud deployment.

> Type: **System and Internal** | TLS Support: **YES** | Event Breaker Support: **No**

You might choose this Source over the Cribl TCP Source in certain circumstances, such as when a firewall or proxy blocks raw TCP egress. In single-instance mode or for testing, you can substitute the Raw HTTP/S Source. (However, this substitution will not provide the single-billing benefits described in the next section.)

How It Works

You can use the Cribl HTTP Source to transfer data between Workers. If the Cribl HTTP Source receives data from its Cribl HTTP Destination counterpart, you're billed for ingress only once – when Cribl first receives the data. All data subsequently relayed to other Workers via a Cribl HTTP Destination/Source pair is not charged.

This use case is common in hybrid Cribl.Cloud deployments, where a customer-managed (on-prem) Worker Node sends data to a Worker in Cribl.Cloud for additional processing and routing to Destinations. However, the Cribl HTTP Destination/Source pair can similarly reduce your metered data ingress in other scenarios, such as on-prem Edge to on-prem Stream.

As one usage example, assume that you want to send data from one Worker Nodes deployed on-prem, to another that is deployed in Cribl.Cloud. You could do the following:

- Create an on-prem File System Collector (or whatever Collector or Source is suitable) for the data you want to send to Cribl.Cloud.
- Create an on-prem Cribl HTTP Destination.
- Create a Cribl HTTP Source, on the target Worker Group in Cribl.Cloud.
- For an on-prem Worker Node configure a File System Collector to send data to the Cribl HTTP Destination, and from there to the Cribl HTTP Source in Cribl.Cloud.
- On Cribl-managed Cribl.Cloud Worker Nodes, make sure that TLS is either disabled on both the Cribl HTTP Destination and the Cribl HTTP Source it's sending data to, or enabled on both. Otherwise, no data will flow. On Cribl.Cloud instances, the Cribl HTTP Source ships with TLS enabled by default.

Configuration Requirements

The key points about configuring this architecture are:

- The Cribl HTTP Destination must be on a Worker Node that is connected to the same Leader as the Cribl HTTP Source.
- You must specify the same Leader Address on the Worker Nodes that host both the Destination and Source. Otherwise, token verification will fail – breaking the connection and preventing data flow.
- To get the Leader Address specifically for Cribl.Cloud hybrid Workers, see Hybrid Cribl HTTP/Cribl TCP Configuration.
- To configure the Leader Address via the UI, log directly into each Worker Node's UI. Then select **Settings** > **Global Settings** > **Distributed Settings** > **Leader Settings** > **Address**.
- To configure the Leader Address via the instance.yml file, the `host` values on the connecting Worker Nodes must be identical. In this example, both Worker Nodes must point to `cribl-leader`:

```
distributed:
  mode: master
  master:
    host: cribl-leader
    port: 4200
```

- When you configure the Cribl HTTP Destination, its **Cribl endpoint** field must point to the **Address** and **Port** you've configured on the Cribl HTTP Source.
- Finally, it's important to understand the special way the Cribl HTTP Source handles internal fields.

Configuring the Cribl HTTP Source

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select **System and Internal** > **Cribl HTTP**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tile or left nav, select [**System and Internal** >] **Cribl HTTP**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Cribl HTTP Source definition.

Address: Enter the address to bind on. Defaults to `0.0.0.0` (all addresses).

Port: Enter the port number to listen on, e.g., `10200`.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled Defaults to `No`. When toggled to `Yes`, exposes this section's remaining fields.

Certificate name: Select a predefined certificate from the drop-down. A **Create** button is available to create a new certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`, exposes these two additional fields:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

Enable Persistent Queue defaults to `No`. When toggled to `Yes`:

Mode: Choose a mode from the drop-down:

- With `Smart` mode, PQ will write events to the filesystem only when it detects backpressure from the processing engine.
- With `Always On` mode, PQ will always write events directly to the queue before forwarding them to the processing engine.

Max buffer size: Maximum number of events to hold in-memory before dumping them to disk.

Commit frequency: Number of events to send before committing that Stream has read them.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Activity log sample rate: Determines how often request activity is logged at the `info` level. The default `100` value logs every 100th value; a `1` value would log every request; a `10` value would log every 10th request; etc.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Request timeout (seconds): How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

> The longer the **Keep-alive timeout**, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

The Cribl HTTP Source (and the Cribl TCP Source) treat internal fields differently than other Sources do. That's because of the difference in the way that incoming data originates.

Other Sources ingest data that's not coming from Cribl Edge or Stream, meaning that no Cribl internal fields can be present in that data when it arrives at the Source, and the Source is free to add internal fields without clobbering (overwriting) anything that existed already.

By contrast, the Cribl HTTP Source and the Cribl TCP Source ingest data that's coming from a Cribl HTTP or Cribl TCP Destination. That data **can** contain internal fields when it arrives at the Source. This means that if the Source adds internal fields, those could potentially clobber what existed before.

To avoid this problem, the Cribl HTTP Source and the Cribl TCP Source add a unique `__forwardedAttrs` (i.e., "forwarded attributes") field. The nested structure of the `__forwardedAttrs` field contains any of the following fields that are present in the arriving data:

INTERNAL FIELDS
`__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes` .
`__inputId`
`__outputId`
`__srcIpPort` – See details below.

OTHER FIELDS
`cribl_breaker`
`cribl_pipe`

These fields are **copied** into `__forwardedAttrs` , not moved there. As the data (apart from `__forwardedAttrs`) moves through the Source and any Pipelines, the values of these fields can be

overwritten. But the copies of these fields in `__forwardedAttrs` remain unchanged, so you can retrieve them as necessary.

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the HTTP client sending data to this Source.

When any proxies (including load balancers) lie between the HTTP client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

10.9.4. Cribl TCP

The internal Cribl TCP Source is available only in distributed deployments. It is provided to facilitate sending data between Worker Nodes that are connected to the same Leader. You'll find this Source especially valuable in a hybrid Cloud deployment.

> Type: **System and Internal** | TLS Support: **YES** | Event Breaker Support: **No**

You might choose this Source over the Cribl HTTP Source in certain circumstances, such as when a firewall or proxy allows raw TCP egress. In single-instance mode or for testing, you can substitute the TCP JSON Source. (However, this substitution will not provide the single-billing benefits described in the next section.)

How It Works

You can use the Cribl TCP Source to transfer data between Workers. If the Cribl TCP Source receives data from its Cribl TCP Destination counterpart, you're billed for ingress only once – when Cribl first receives the data. All data subsequently transferred to other Workers via the Cribl TCP Destination/Source pair is not charged.

This use case is common in hybrid Cribl.Cloud deployments, where a customer-managed (on-prem) Worker Node sends data to a Worker in Cribl.Cloud for additional processing and routing to Destinations. However, the Cribl TCP Destination/Source pair can similarly reduce your metered data ingress in other scenarios, such as on-prem Edge to on-prem Stream.

As one usage example, assume that you want to send data from one Worker Nodedeployed on-prem, to another that is deployed in Cribl.Cloud. You could do the following:

- Create an on-prem File System Collector (or whatever Collector or Source is suitable) for the data you want to send to Cribl.Cloud.
- Create an on-prem Cribl TCP Destination.
- Create a Cribl TCP Source, on the target Worker Group in Cribl.Cloud.
- For an on-prem Worker Nodes configure a File System Collector to send data to the Cribl TCP Destination, and from there to the Cribl TCP Source in Cribl.Cloud.
- On Cribl-managed Cribl.Cloud Worker Nodes, make sure that TLS is either disabled on both the Cribl TCP Destination and the Cribl TCP Source it's sending data to, or enabled on both. Otherwise, no data will flow. On Cribl.Cloud instances, the Cribl TCP Source ships with TLS enabled by default.

Configuration Requirements

The key points about configuring this architecture are:

- The Cribl TCP Destination must be on a Worker Node that is connected to the same Leader as the Cribl TCP Source.
- You must specify the same Leader Address on the Worker Nodes that host both the Destination and Source. Otherwise, token verification will fail – breaking the connection and preventing data flow.
- To get the Leader Address specifically for Cribl.Cloud hybrid Workers, see Hybrid Cribl HTTP/Cribl TCP Configuration.
- To configure the Leader Address via the UI, log directly into each Worker Node's UI. Then select **Settings** > **Global Settings** > **Distributed Settings** > **Leader Settings** > **Address**.
- To configure the Leader Address via the instance.yml file, the `host` values on the connecting Worker Nodes must be identical. In this example, both Worker Nodes must point to `cribl-leader`:

```
distributed:
  mode: master
  master:
    host: cribl-leader
    port: 4200
```

- When you configure the Cribl TCP Destination, its **Cribl endpoint** field must point to the **Address** and **Port** you've configured on the Cribl TCP Source.
- Finally, it's important to understand the special way the Cribl TCP Source handles internal fields.

Configuring the Cribl TCP Source

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**System and Internal** >] **Cribl TCP**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**System and Internal** >] **Cribl TCP**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Cribl TCP Source definition.

Address: Enter hostname/IP to listen for TCP JSON data. E.g., `localhost` or `0.0.0.0`.

Port: Enter the port number to listen on, e.g., `10300`.

Additional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

Enable Persistent Queue defaults to `No`. When toggled to `Yes`:

Mode: Choose a mode from the drop-down:

- With `Smart` mode, PQ will write events to the filesystem only when it detects backpressure from the processing engine.
- With `Always On` mode, PQ will always write events directly to the queue before forwarding them to the processing engine.

Max buffer size: Maximum number of events to hold in memory before dumping them to disk. Defaults to `1000`.

Commit frequency: Number of events to send before committing that Cribl Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre–Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

The Cribl TCP Source (and the Cribl HTTP Source) treat internal fields differently than other Sources do. That's because of the difference in the way that incoming data originates.

Other Sources ingest data that's not coming from Cribl Edge or Stream, meaning that no Cribl internal fields can be present in that data when it arrives at the Source, and the Source is free to add internal fields without clobbering (overwriting) anything that existed already.

By contrast, the Cribl TCP Source and the Cribl HTTP Source ingest data that's coming from a Cribl TCP or Cribl HTTP Destination. That data **can** contain internal fields when it arrives at the Source. This means that if the Source adds internal fields, those could potentially clobber what existed before.

To avoid this problem, the Cribl TCP Source and the Cribl HTTP Source add a unique `__forwardedAttrs` (i.e., "forwarded attributes") field. The nested structure of the `__forwardedAttrs` field contains any of the following fields that are present in the arriving data:

INTERNAL FIELDS
`__srcIpPort`
`__inputId`
`__outputId`

OTHER FIELDS
`cribl_breaker`
`cribl_pipe`

These fields are **copied** into `__forwardedAttrs`, not moved there. As the data (apart from `__forwardedAttrs`) moves through the Source and any Pipelines, the values of these fields can be overwritten. But the copies of these fields in `__forwardedAttrs` remain unchanged, so you can retrieve them as necessary.

10.9.5. Cribl Stream (Deprecated)

> This Source was deprecated as of Cribl Stream 3.5, and has been removed as of v.4.0. Please instead use the Cribl TCP or the Cribl HTTP Source to enable Worker Nodes to send data to peer Nodes.

The Cribl Stream internal Source is available only in distributed deployments. It is provided to facilitate sending data between Worker Nodes that are connected to the same Leader. You'll find this Source especially valuable in a hybrid Cloud deployment.

This Source can receive data only from a TCP JSON Destination, on a Worker Node that is connected to the same Leader. The following instructions cover configuring such a TCP JSON Destination.

> Type: **System and Internal** | TLS Support: **YES** | Event Breaker Support: **No**

Use New Sources Instead

The replacement Sources, Cribl TCP and the Cribl HTTP, don't rely on IP filtering, for the following reasons:

- Load balancers and/or proxies between the Cribl Destination and Cribl Source can change the IP address, resulting in a bad match and rejected ingest.
- A Lookup table of all IP addresses needed to be sent to each Worker Node/Edge Node from the Leader, which is not scalable.
- The Lookup table of IP addresses required constant communication between the Worker Node/Edge Nodes and the Leader, making this fragile and placing an arbitrary reliance on the Leader that shouldn't be there.

How It Works

You can use the Cribl Stream Source to send data between Workers. In a hybrid Cloud deployment, using this Source ensures that you're billed for ingress only once – when the data is originally received. All other data transferred into Workers via the Cribl Stream Source is not charged.

This use case is common in deployments where a customer-managed (on-prem) Worker sends data to a Worker in Cribl Cloud, for additional processing and then routing to Destinations.

As one usage example, assume that you want to send data from one Worker Node/Edge Node deployed on-prem, to another that is deployed in Cribl Cloud. You could do the following:

- Create an on-prem File System Collector (or whatever Collector or Source is suitable) for the data you want to send to Cribl Cloud.
- Create an on-prem TCP JSON Destination.
- Create a "Cribl Stream" Source, on the target Worker Group/Fleet in Cribl Cloud.
- Configure these to send data from the File System Collector to the TCP JSON Destination, and from there to the "Cribl Stream" Source in Cribl Cloud.

The key points about configuring this architecture are:

- The TCP JSON Destination must be on a Worker Node/Edge Node that is connected to the same Leader as the "Cribl Stream" Source.
- The TCP JSON Destination's **Address** and **Port** must match the "Cribl Stream" Source's **Address** and **Port**.

Configuring the Cribl Stream Source

In the **QuickConnect** UI: Click **New Source** or **Add Source**. From the resulting drawer's tiles, select [**System and Internal** >] **Cribl Stream**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The drawer will now provide the following options and fields.

Or, in the **Data Routes** UI: From the top nav of a Cribl Stream instance or Group, select **Data** > **Sources**. From the resulting page's tiles or the **Sources** left nav, select [**System and Internal** >] **Cribl Stream**. Next, click **New Source** to open a **Cribl Stream** > **New Source** modal that provides the following options and fields.

General Settings

Input ID: Enter a unique name to identify this Cribl Stream Source definition.

Address: Enter hostname/IP to listen for TCP JSON data. E.g., `localhost` or `0.0.0.0`.

Port: Enter the port number to listen on.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Use this default option to enter the shared secret that clients must provide in the `authToken` header field. Exposes an **Auth token** field for this purpose. (If left blank, unauthenticated access will be permitted.) A **Generate** link is available if you need a new secret.

- **Secret**: This option exposes an **Auth token (text secret)** drop-down, in which you can select a stored secret that references the `authToken` header field value described above. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. A **Create** link is available if you need a new secret.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.

- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:

- If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
- If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
- You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable Proxy Protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2.

IP Allowlist Regex: Regex matching IP addresses that are allowed to establish a connection. Although it appears in the **Advanced Settings** UI, this is not a user-configurable setting. Its value is updated automatically to match the IP addresses used in the deployment, and cannot be edited.

Max Active Connections: Maximum number of active connections allowed per Worker Process. Use `0` for unlimited.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Field for this Source:

- `__inputId`
- `__srcIpPort`

10.10. System

10.10.1. Exec

The Exec Source enables you to periodically execute a command and collect its `stdout` output. This is typically used in cases when Cribl Stream cannot accomplish collection with native Collectors or other Sources.

> Type: **System and Internal** | TLS Support: **N/A** | Event Breaker Support: **Yes**

> This Source allows you to run **almost anything** on the host system. Make sure you understand the security and other impacts of commands you plan to execute, before proceeding.

Especially for monitoring or polling, you'll need to receive the command or script's output periodically. For this reason, the Exec Source lets you specify when the command or script should run, by time interval or by cron-style schedule.

Here are a few examples of what you can run from an Exec Source:

- Database queries.
- Custom commands to poll databases or apps.
- `ping` to check latency.
- `ps -ax` to get a list of running processes.
- `SNMP GET` requests to query an SNMP agent about network entities.
- `netstat -natp` to get lists of sockets and TCP ports, and what they're doing.
- `mtr -c 1 --report --json 8.8.8.8` to run a traceroute on a location (here, `8.8.8.8`), and packaging up a report in JSON format.

Configuring an Exec Source

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**System and Internal** >] **Exec**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**System and Internal** >] **Exec**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Enabled: Defaults to `Yes`.

Input ID: Enter a unique name to identify this Exec Source definition.

Command: Command to execute; supports Bourne shell syntax.

Schedule type: Use the buttons to select either `Interval` or `Cron`. Customize the behavior in the corresponding field below the button.

- **Interval**: Specify how often, in seconds, the command should run. Defaults to `60`.
- **Schedule**: Enter a cron expression. (You enter the cron expression in UTC time, but the resulting **Estimated Schedule** displays in local time.)

Optional Settings

Max retries: Maximum number of retry attempts in the event that the command fails.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Processing Settings

Event Breakers

Event Breaker rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source’s data to one or more Destinations via independent, direct connections.

10.10.2. File Monitor

The File Monitor Source generates events from text files, compressed, archived, and (some) binary log files, based on lines and records extracted from the content. This Source is available on Stream and Edge, but not on Cribl.Cloud.

> Type: **System and Internal** | TLS Support: **N/A** | Event Breaker Support: **Yes**

As of v.4.2.x, this Source can process the following file formats:

- **Compressed/archived**: `zip`, `gzip`, `zstd`, and `tar`. Cribl Stream only supports DEFLATE compression for `zip` files.
- **ASCII**: `text`.
- **Non-ASCII binary**.

Binary files are broken into base64-encoded chunks and streamed bypassing Event Breakers. Text files are processed normally through Event Breakers. (Before v.4.2.x, the File Monitor Source could handle only text files.) Also as of v.4.2.x, the File Monitor Source no longer excludes `*.gz` files by default.

> **Known Issue: Memory Leak**
>
> The 4.2.0/4.2.1 File Monitor Source, when run in Manual Discovery mode, causes a memory leak that eventually causes Worker Nodes to crash. For details, fix timeline, and workaround, please see Known Issues.

Discovering and Filtering Files to Monitor

To produce its initial list of files to monitor, the File Monitor Source runs a discovery procedure at a configurable **Polling interval**. The Source then applies an **Allowed list** to filter the initial list down into its final form. Then, for each file on the list, the Source compares current state with previously-stored state. This comparison determines whether the File Monitor Source will actually watch a given file for a given polling interval, or just ignore the file.

In the simplest case, the Source discovers a file for which it has no stored state. This means that the file has just been created, and needs to be monitored. See the Examples for other possibilities, along with a description of the **Status** tab, which displays state information for all files being monitored.

How does the File Monitor Source discover files in the first place? You have the choice of two **Discovery Modes**: **Auto** or **Manual**.

- In **Auto** mode, the Source automatically discovers files that running processes have open for writing. Auto mode collects logs from (the discovered) active files that match the path/allowlist.

  Auto mode is useful to detect which files are being written to. For example, if you enter an allowlist of `*log`, Auto mode will find all the active logs within that directory, no matter what's writing to it, and it will exclude any rotated logs.

> Cribl Edge currently supports Auto mode only when running on Linux, not on Windows.

- In **Manual** mode, the Source discovers files based on the specified directory and depth.

  Manual mode is often used to collect logs in a folder where the process that creates them rotates them when they get large. For example, if you specify a path of `/var/log` and an allowlist of `*/messages*`, Manual mode will capture the current `/var/log/messages`, as well as older logs from `/var/log/messages*`.

> If you are using a tool like `rsync` to transfer files in chunks, the File Monitor Source might start collecting files before the transfer is complete. To prevent this, configure your tool to transfer files serially. (For example, use: `rsync --append`.)

Configuring a File Monitor Source

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**System and Internal** >] **File Monitor**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**System and Internal** >] **File Monitor**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Enabled: Toggle this slider to `Yes` to enable the Source.

Input ID: Enter a unique name to identify this File Monitor Source definition.

Discovery Mode: Use the buttons to select one of these options:

- **Auto**: Tells the Source to automatically discover files that running processes have open for writing.
- **Manual**: Tells the Source to discover the files within the **Search path** (i.e., a directory) that you specify, down to the **Max depth**. The defaults are:
  - **Path** is set to the `/var/log` directory
  - **Allowlist** of `*/log/*` and `*log`
  - **Max depth** of 4

  If you leave the **Max depth** field empty, the Source will search subdirectories, and their subdirectories, and so on, without limit. If you specify `0`, the Source will discover only the top-level files within the **Search path**. For `1`, the Source will discover files one level down.

Both modes allow you to set the **Polling interval**, which otherwise defaults to 10 seconds.

Optional Settings

Filename allowlist: Wildcard syntax, and the exclamation mark (`!`) for negation, are allowed. For example, you can use `!*cribl*access.log` to prevent the Source from discovering Cribl Stream's own log files. The default filters are `*/log/*` and `*log`.

> Always think through how your **Search path** and **Filename allowlist** settings interact: If you're not careful, you can inadvertently create overlapping monitor groups that deliver duplicates of some files. See Using Allowlists Effectively below.

Max age duration: Optionally, specify a maximum age of files to monitor. This Source will filter events with timestamps newer than the configured duration. (Where files don't have a parsable timestamp, it will set their events' timestamp to `Now`.) Enter a duration in a format like `30s`, `4h`, `3d`, or `1w`. Defaults to an empty field, which applies no age filters.

Check file modification times: If toggled to `Yes`, this Source will skip files with modification times older than the configured **Max age duration**.

> When you set a **Max age duration** threshold, the Source will open every file and read through all its contents to seek a timestamp. For best performance, also enable the **Check file modification times**

> toggle to skip older files.

Collect from end: If toggled to `Yes`, then upon Cribl Stream's next startup, this Source will skip to the end of new files. (It will run discovery once, adding any newly discovered files to the state store as if they had already been consumed.) After that initial run, when this Source next discovers new files, it will read those new files from the head.

Enable binary files: If toggled to `Yes`, the Source will report the file as binary and stream it in Base64-encoded chunks. By default, the Source ignores binary (non-text) files such as JPEG images, MP3 audio files, or some binary data files.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Processing Settings

Event Breakers

Event Breaker rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec.), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Idle timeout: Time, in seconds, before an idle file is closed. Defaults to `300` sec. (5 minutes).

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

> This Source defaults to QuickConnect.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are not part of an event, but they are accessible, and Functions can use them to make processing decisions.

For the File Monitor Source, you can use internal fields to enrich events with container and host metadata. The following internal fields are available:

- `__baseFilename`
- `__source` / `source`
- `__raw`
- `__inputId`
- `container_id`
- `container_path`
- `host_path`

Monitoring Renamed Files' State

The File Monitor Source uses a simple scheme to find "backlog" files corresponding to a matching file: Tell it to tail `foo.log`, and it will look for `foo.log.[0-9]` and scrape those, too.

This Source keeps hashes that correspond to the start point within the file, and to the last-read point. This way, if Cribl Stream is stopped, files are rotated, and Cribl Stream is restarted, the File Monitor Source can

find the resume point in those backlog files.

Similarly, if you rename the file **within the same backlog scheme** (e.g., `foo.log` to `foo.log.0`), the File Monitor Source can resume at the right place. However, if you renamed `foo.log` to `bar.log` (a deviation from the expected naming scheme), this Source could not find its resume point.

Using Allowlists Effectively

Done properly, file monitoring collects exactly the files you need to see, without duplication. You want to avoid inadvertently creating overlapping monitor groups that deliver duplicates, because this can "run the meter" twice for affected files, potentially causing license issues.

The key is knowing how to craft allowlists.

Crafting Allowlists: Principles

To get the results you want from file monitoring, always apply the following principles.

Write allowlists to explicitly include the full path of files you want to collect.

The search path itself is **not** excluded from the match. For example, if you want to collect the file `/var/log/messages` when you've set your search path to `/var/log`, your filename allowlist needs to be either `/var/log/messages`, `/var/*/messages`, or `*/log/messages`.

Exclusions (`!`) also need to address the full file path. For example, if you want to collect everything from `/var/log/*` **except for** `/var/log/apache/*`, your allowlist must include one of the following:

- `!/var/log/apache/*`
- `!*/apache/*`
- `!*/log/apache/*`

Wildcards (`*`) match **any** part of the file path:

- `*log` matches `/var/foo/bar/myfile.log`.
- `*.log` matches anything ending in `.log`.
- `/var/log/*` matches anything in `/var/log`, subject to the **Max Depth** setting.

Put explicit matches (and exclusions) at the beginning of the allowlist, ahead of wildcard matches.

For example, an allowlist of `/var/log/*` followed by `!/var/log/apache/*` will fail to exclude the file `/var/log/apache/foo` because that file matches the first allowlist entry.

In allowlists, order matters!

Be as specific as possible, whenever possible, to prevent accidental matches.

Each of the following examples shows how to avoid matching unwanted files within the directories that you're monitoring.

To collect `/var/log/boot.log` (and older versions of `boot.log.*`) as well as `/var/log/messages`:

SEARCH PATH	FILENAME ALLOWLIST
`/var/log`	`/var/log/boot.log, /var/log/messages`

To collect everything in `/var/log` while excluding `/var/log/apache/*`:

SEARCH PATH	FILENAME ALLOWLIST
`/var/log`	`!/var/log/apache/*, /var/log/*`

Example: Excluding the System's Own Logs

Recall that you'll often create a set of File Monitor Sources, each of which monitors one file. This is **not** the right approach in an example like this one, where **Discovery Mode** is set to **Auto**. Using **Auto** mode in a file monitor along with literally any other file monitor can cause unintended, duplicate collection. Use **Auto** mode carefully!

Here's the example:

Suppose you added a File Monitor Source on a Linux machine, set your **Discovery Mode** to **Auto**, and specified your home directory as the **Search path** (e.g., `/home/bogart/`).

You do not want to monitor Cribl Stream's own log files, or any log files generated by Chrome, the web browser you're using. To exclude them, you add `!*cribl*access.log` and `!*chrome*` to your **Allowlist**. You **do** want to monitor any other log files that the Source can discover, so you also add `*log`.

After awhile, the Status tab looks like this:

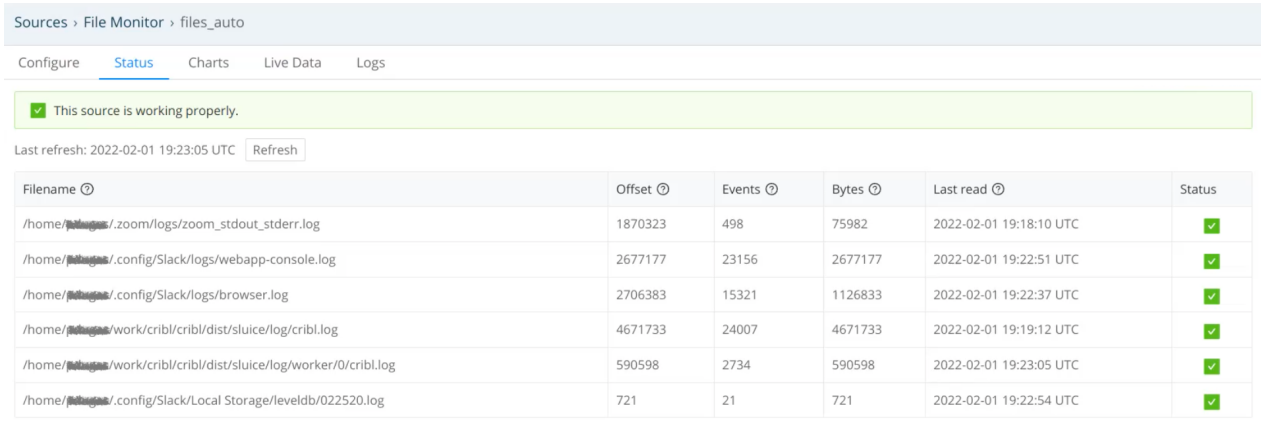

The Status tab

Example: Fixing Overlapping Monitor Groups

Here's an example of the kind of overlapping monitor groups you should avoid:

SEARCH PATH	MAX DEPTH	FILENAME ALLOWLIST
`/var`	(none)	`*/log/*`
`/var/log/apache`	`0`	`*`

The above configuration would collect all the files in `/var/log/apache/` twice. A better solution would be the following:

SEARCH PATH	MAX DEPTH	FILENAME ALLOWLIST
`/var/log`	(none)	`!*/apache/*`
`/var/log/apache`	`0`	`*`

10.10.3. Journal Files

The Journal Files Source collects data from systemd's centralized logging, which is called the journald service. This service is a centralized location for all messages logged by different components in a systemd-enabled Linux system. This includes messages from kernel, boot, syslog, or other services. This Source is currently configured to configured to collect data from the `user` journal, as `system` is privileged.
This Source is disabled by default.

> Type: **System and Internal** | TLS Support: **N/A** | Event Breaker Support: **No**
>
> The Journal Files Source is available on Cribl.Cloud hybrid Workers, but not on Cribl-managed Cloud Workers.

Discovering and Filtering Journal Files to Monitor

To determine all the names of all journals to read, the Journal Files Source runs a discovery procedure at a configurable **Polling interval**. The Source then applies an **Allowed list** to filter the initial list down into its final form. Then, for each journal on the list, the Source compares current state with previously stored state. This comparison determines whether the Journal Files Source will actually stream a given journal for a given polling interval. The Source then runs the files through the **Filter Rules** which allows you to set additional criteria.

Cribl Stream ships with a single, disabled instance of the Journal Files Source with a default configuration. The search path is configured to point to `$CRIBL_EDGE_FS_ROOT/var/log/journal/$MACHINE_ID` and defaults to streaming the primary `system.journal` it finds there. `$MACHINE_ID` is an environment variable that you can insert into the Source's search path. If you use the environment variable but don't assign a value, the Source will look up the local host `machine id` from `/etc/machine-id` and use that value.

> Currently, this Source does not support all of the compression options that the journald service supports. The parser this Source uses to read the files can handle `LZ4` and `ZSTD` compression. When the parser encounters compressed fields it can't unpack, an error message emits in the logs. Below is an example of the error message:
>
> ```
> Error reading journald event, dropping offset=31678152 evt="Mar 02 21:29:54 goats-xps15 multipassd: undefined"
> ```

Configuring a Journal Files Source

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**System and Internal** >] **Journal Files**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**System and Internal** >] **Journal Files**. Next, click **Add Source** to open a **New Source** modal that provides the options below.

General Settings

Enabled: Toggle this slider to `Yes` to enable the Source.

Input ID: Enter a unique name to identify this File Monitor Source definition.

Search path: Specify the directory to search journals on. Accepts environment variables. The default value for this field varies depending on the product:

- In Cribl Edge, it defaults to `$CRIBL_EDGE_FS_ROOT/var/log/journal/$MACHINE_ID`.
- In Cribl Stream, it defaults to `/var/log/journal/$MACHINE_ID`.

Journal allowlist: The full path of each discovered journal is matched against this wildcard list. Defaults to `system`.

Optional Settings

Polling interval: How often, in seconds, to collect metrics. If not specified, defaults to `10` seconds.

Filter Rules: Optionally, specify which journal objects to allow. Events are generated if all the rules' expressions evaluate to true, or if no rules are specified.

- **Filter expression**: JavaScript expression to filter Journal objects. Returns `true` to include it.
- **Description**: Optional description of the rule.

  The default **Filter expression** is `severity <= 4` with a **Description** of `Allow events having 'emergency', 'alert', 'critical', 'error', or 'warning' priority.`

  The screenshot below shows other examples you can use:

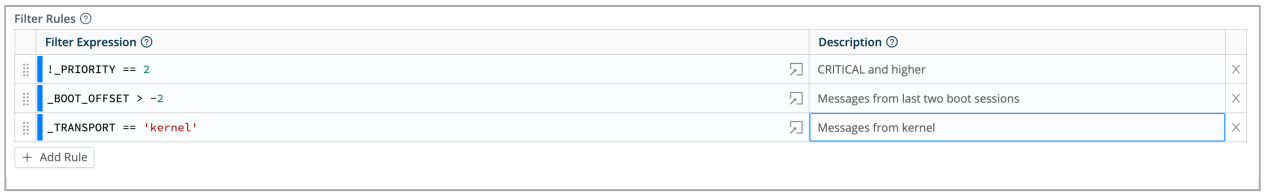

Filter expressions

Current boot only: Skip events that are not part of the current boot session.

Max age duration: Optionally, specify a maximum age of journal objects to stream. This Source will filter events with timestamps newer than the configured duration. Enter a duration in a format like `30s`, `4h`, `3d`, or `1w`. Defaults to an empty field, which applies no age filters.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

> In Cribl Edge, this Source defaults to QuickConnect. While, in Cribl Stream, it defaults to Send to Routes.

10.10.4. System Metrics

Cribl Stream can collect metrics from the host on which it is running, and can populate some standard metrics dashboards right out of the box. For metrics details, see Linux System Metrics Details.

> Type: **System and Internal** | TLS Support: **N/A** | Event Breaker Support: **No**
>
> Cribl Edge Workers support System Metrics only when running on Linux, not on Windows.
>
> This Source is not availabe for Cribl Stream Workers on Cribl-managed Cribl.Cloud.

Configuring Cribl Stream to Collect System Metrics

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**System and Internal** >] **System Metrics**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**System and Internal** >] **System Metrics**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Optional Settings

Polling interval: How often to collect metrics, in seconds. Defaults to `10`.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Host Metrics

Use the buttons to select a level of detail.

- **Basic** enables minimal metrics, averaged or aggregated.
- **All** enables full, detailed metrics, specified for individual CPUs, interfaces, and so on.
- **Custom** displays sub-menus and buttons from which you can choose a level of detail (**Basic**, **All**, **Custom**, or **Disabled**) for each type of event.
- **Disabled** means that no metrics will be generated.

The meaning of **All** and **Disabled** are self-evident. **Basic** and **Custom** have different meanings depending on event type, as follows:

System

Basic level captures load averages, uptime, and CPU count.

Custom toggles **Process** metrics on or off; these are metrics for the numbers of processes in various states.

CPU

Basic level captures active, user, system, idle, iowait percentages over all CPUs.

Custom toggles the following on or off: **Per CPU metrics**, **Detailed metrics** (meaning, for all CPU states), and **CPU time metrics** (meaning raw, monotonic CPU time counters).

Memory

Basic level captures captures total, used, available, `swap_free`, and `swap_total`.

Custom toggles **Detailed metrics** on or off. Detailed means for all memory states.

Network

Basic level captures bytes, packets, errors, connections over all interfaces.

Custom exposes the following:

- The **Interface filter**, which specifies which network interfaces to include or exclude (all are included if the filter is empty).
- **Per interface metrics**, which toggle on or off.
- **Detailed metrics**, which toggle on or off. If on, the **Protocol metrics** toggle appears, allowing you to choose whether to generate metrics for ICMP, ICMPMsg, IP, TCP, UDP, and UDPLite.

Disk

Basic level captures disk used in percent, bytes read and written, and read and write operations, over all mounted disks.

Custom exposes the following:

- The **Device filter**, which specifies which block devices to include or exclude (all are included if the filter is empty). Wildcards and `!` (not) operators are supported.
- The **Mountpoint filter**, which specifies which filesystem mountpoints to include or exclude (all are included if the filter is empty). Wildcards and `!` (not) operators are supported.
- The **Filesystem type filter**, which specifies which filesystem types to include or exclude (all are included if the filter is empty). Wildcards and `!` (not) operators are supported.
- **Per device metrics**, which toggle on or off.
- **Detailed metrics**, which toggle on or off. If on, the **Enable inode metrics** toggle appears, allowing you to choose whether to generate metrics for filesystem inodes.

Container Metrics

Use the buttons to select a level of detail.

- **Basic** generates the server event and per running container events.
- **All** adds per-device and detailed metrics.
- **Custom** provides controls for customizing which containers to generate metrics from.
- **Disabled** means that no metrics will be generated.

The **Custom** buttons displays additional controls, as follows:

- **Container Filters**: Enter a filter expression to govern which containers to generate metrics from. Leave empty (the default) to generate metrics from all containers.
- **All containers**: Toggle to `Yes` to include stopped and paused containers.
- **Per device metrics**: Toggle to `Yes` to generate separate metrics for each device.
- **Detailed metrics**: Toggle to `Yes` to generate full container metrics.

The **Basic**, **All**, and **Custom** buttons provide the following **Advanced Settings**, which are different from those in the main **Advanced Settings** tab:

- **Docker socket**: Enter the full path(s) for Docker's UNIX domain socket. Defaults to `/var/run/docker.sock` and `/run/docker.sock`.
- **Docker timeout**: Timeout, in seconds, for the Docker API. Defaults to `5`.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

If desired, choose a **Pipeline** from the drop-down if you want to process data from this Source before sending it through the Routes.

Disk Spooling

Enable disk persistence: Whether to save metrics to disk. When set to `Yes`, exposes this section's remaining fields.

Bucket time span: What time range of events to hold in each bucket. Default value: `10m` (10 minutes).

Max data size: Maximum disk space the persistent metrics can consume. Once reached, Cribl Stream will delete older data. Example values: `420 MB`, `4 GB`. Default value: `100 MB`.

Max data age: How long to retain data. Once reached, Cribl Stream will delete older data. Example values: `2h`, `4d`. Default value: `24h` (24 hours).

Compression: Optionally compress the data before sending. Defaults to `gzip` compression. Select `none` to send uncompressed data.

Path location: Path to write metrics to. Default value is `$CRIBL_HOME/state/system_metrics`.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Populating Dashboards with System Metrics

Cribl has configured a Prometheus dashboard to display Cribl Stream System Metrics, and shared the dashboard in the Grafana library, which is public. This is a relatively simple dashboard suitable for showing aggregate metrics. Try this dashboard if you prefer **Basic** mode for most of your metrics.

Another useful dashboard is the one that's commonly used with Prometheus and their Node Exporter agent, found here. This dashboard can handle the highly detailed metrics. To use this dashboard, attach the `prometheus_metrics` pre-processing pipeline, and choose **All** mode.

For details on how populate your Grafana Cloud dashboards with system metrics, see System Metrics to Grafana.

10.10.5. System State

The System State Source collects snapshots of the host system's current state, on a configurable schedule, and sends them out as events to downstream systems for operational and security analytics.

> Type: **System and Internal** | TLS Support: **N/A** | Event Breaker Support: **No**
>
> Cribl Stream supports configuring only one System State Source per Worker Node and per Worker Group. This Source is currently unavailable on Cribl-managed Cribl.Cloud Workers.

Configuring Cribl Stream to Collect System State Events

From the top nav, click **Manage**, then select a **Fleet** to configure. Then, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**System and Internal** >] **System State**. By default, a **System State** tile appears at left. Hover over it and select **Configure** to open a drawer that provides the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**System and Internal** >] **System State**. Next, click the default `in_system_state` Source to open modal that provides the options below.

General Settings

Input ID: This is prefilled with the default value `in_system_state`, which cannot be changed via the UI, due to the single-Source restrictions above.

Optional Settings

Polling interval: How often, in seconds, to collect system state events. If not specified, defaults to `300s`.

> Each run of the state collector generates events with identical `_time` values.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Collector Settings

Cribl Stream contains the following System State collectors:

- Host Info
- Disks and File Systems
- DNS
- Firewall
- Hosts File
- Interfaces
- Listening Ports
- Logged-In Users
- Routes
- Services
- Users and Groups

Host Info

With the **Enabled** slider on (the default), Cribl Stream will create events based on entries collected from the hosts file.

A partial list of Host Info events includes:

- `host`
- `timestamp`
- `cribl.version`
- `cribl.mode`
- `cribl.group`
- `cribl.config_version`
- `os.arch`
- `os.cpu_count`

See the **Explore** > **System State** > **Host Info** UI for a full list of events.

Disks and File Systems

With the **Enabled** slider on (the default), Cribl Stream will collect entries on physical disks, partitions, and mounted filesystems. These entries can help you monitor drive status, including available space, percent utilization, inode availability, wait times, and number of blocks free.

This option is available for Windows and Linux Worker Groups, but you must create a different Worker Group for each OS. Follow this procedure:

1. Create a Worker Group for the appropriate OS.
2. Modify the Worker Group by disabling or removing the pre-defined Sources that do not apply to the OS. Remove Windows Event Forwarder or Windows Event Logs and Windows Metrics from Linux Worker Groups, and remove Linux-specific Sources from Windows Worker Groups.
3. Modify the Worker Group mapping to filter by platform – `platform=='win32'` for Windows or `platform=='linux'` for Linux.
4. Deploy Cribl Stream Worker Nodes and verify that the mapping is correct.

> If you are using the free version of Cribl Stream, you will only get a single default Worker Group. If you need more than one Worker Group, you'll have to limit your Cribl Stream deployment to one OS or upgrade to Cribl Stream Enterprise.

For each physical disk, Cribl Stream will collect:

- name
- size (in blocks)
- blockSize (in bytes)
- model
- serial
- firmware
- partitions (count)
- interface type

For each partition on a physical disk, Cribl Stream will collect:

- disk (name)
- disk ID (number)
- type (primary or logical)
- label
- offset
- size (in blocks)
- blockSize (in bytes)
- filesystem (mountpoint)

For each mounted filesystem, Cribl Stream will collect:

- mountpoint (path)
- disk (name)
- partition (ID)
- filesystem type
- size (in blocks)
- blockSize (in bytes)
- blocksFree
- inodes
- inodesFree
- flags

DNS

With the **Enabled** slider on (the default), Cribl Stream will create events for DNS resolvers and search entries. The event field mapping depends on the operating system.

Linux

Cribl Stream emits events with the following fields:

EVENT FIELD	DESCRIPTION
`nameServer`	Name server entries from the file.
`search`	Search entries from the file.
`source`	The source of the data used to populate the event.

Windows

Cribl Stream emits events with the following fields:

EVENT FIELD	DESCRIPTION
`ifAlias`	Interface alias name (if present).
`ifIndex`	Interface index (if present).
`addressFamily`	IPv4 or IPv6.
`nameServer`	Array of name servers.

EVENT FIELD	DESCRIPTION
`search`	Array of search suffixes .
`source`	The source of the data used to populate the event.

Hosts File

With the **Enabled** slider on (the default), Cribl Stream will collect entries from the `hosts` file and emit them as events.

Examples of entries in the `hosts` file are:

- `ip` : IP address of the host.
- `hostnames` : list of hostnames per IP address.

Firewall

With the **Enabled** slider on (the default), Cribl Stream will collect events from host's defined firewall rules.

Chain Policy/References Rule(s) Event Fields

Cribl Stream emits events with the following fields:

- `chain` : Name.
- `policy` : Policy name.
- `pkts` : Total bytes packets processed by the chain.
- `bytes` : Total bytes processed by the chain.
- `references` : Number of chains referencing the current chain.

Chain Rule(s) Event Fields

Cribl Stream emits events with the following fields:

- `chain` : Name.
- `num` : Rule sequence number.
- `pkts` : Number of matched messages processed.
- `bytes` : Cumulative packet size processed (bytes).
- `target` : If the message matches the rule, the specified target is executed.

- `prot`: The specified protocol can be one of `tcp`, `udp`, `udplite`, `icmp`, `icmpv6`, `esp`, `ah`, `sctp`, `mh`, or the special keyword `all`.
- `opt`: Rarely used, this column is used to display IP options.
- `in`: Inbound network interface.
- `out`: Outbound network interface.
- `src`: The source IP address or subnet of the traffic, the latter being anywhere.
- `dest`: The destination IP address or subnet of the traffic, or anywhere.
- `match`: `ctstate`, `state`, `ADDRTYPE` info added to a state field.
- `comment`: Comment defined on the rule.
- `prot_family`: `IPv4` or `IPv6`.

Windows

On Windows, this collector emits events with the following fields:

- `ruleName`: Rule Name.
- `displayName`: Display Name.
- `direction`: Specifies which direction of traffic to match with this rule. The acceptable values for this parameter are `Inbound` or `Outbound`.
- `enabled`: `True` or `False`.
- `action`: Specifies the action to take on traffic that matches this rule. The acceptable values for this parameter are `Allow` or `Block`.
- `group`: Specifies the rule group (if applicable).
- `icmpType`: Specifies the `ICMP` type used.
- `policyStoreSource`: Contains a path to the policy store where the rule originated.
- `profile`: Profile conditions associated with a rule.
- `protocol`: protocols associated with firewall and `IPsec` rules.
- `localPort`: Rules for local-only port mapping.
- `remotePort`: Rules for remote port mapping.

Interfaces

With the **Enabled** slider on (the default), Cribl Stream will create events for each of the host's network interfaces.

Cribl Stream will create separate events for each entry. All events will have identical timestamp values.

Linux IPV4/IPV6

On Linux, Cribl Stream creates `interface` events with the following fields:

- `ifIndex`: Interface index identification numbers.
- `ifName`: The name of the network interface.
- `flags`: Flags.
- `mtu`: Maximum transmission unit (MTU) in bytes for packets sent on this interface.
- `operstate`: Operational State.
- `linkType`: Physical link type.
- `macAddress`: Media Access Control address.
- `broadcast` Broadcast address.
- `addrInfo`: Array of `{family, ipAddress, mask, prefix}`.

Windows: IPV4/IPV6

On Windows, Cribl Stream creates `interface` events with the following fields:

- `ifIndex`: Interface index identification numbers.
- `interface`: The name of the network interface.
- `mtu`: Maximum transmission unit (MTU) in bytes for packets sent on this interface.
- `flags`: Flags.
- `macAddress`: Media Access Control address.
- `addrInfo`: Array of `{family, ipAddress, mask, prefix}`.

Listening Ports

With the **Enabled** slider on (the default), Cribl Stream will create events from the list of listening ports and their associated process identifier (pid).

Cribl Stream will create separate events for each entry. All events will have identical timestamp values.

Sample entries include:

- `Protocol Family`: `ipv4` or `ipv6`.
- `Protocol`: `TCP`, `UDP`, or `UNIX`.
- `Socket`: `${addr}:${port}`, or `${path}` for UNIX sockets.
- `Process id`: The process identifier.
- `Program`: The program listening on the port.

Logged-In Users

With the **Enabled** slider on (the default), Cribl Stream will collect entries from currently logged-in users.

Linux

Cribl Stream emits events with the following fields:

- `uid`: User ID.
- `Last Login date`: Last login date.
- `terminal`: Type of the terminal device.
- `hostname`: Display the hostname of the system, if the user is connected from a remote computer.
- `userName`: Logon name of the user.

Windows

Cribl Stream emits events with the following fields:

- `userName`: Login name of the user.
- `sessionName`: `rdp` (Remote desktop/terminal services login session) or `console` (Direct login session).
- `id`: Session ID.
- `state`: `active` (Active session) or `disc` (Disconnected/inactive session).
- `logonTime`: Date and time the user logged on.
- `source`: Set to `Query User`.

Routes

With the **Enabled** slider on (the default), Cribl Stream will collect entries from host's network routes and emit them as events.

Sample entries include:

- `address_family`: `ipv4` or `ipv6`.
- `destination`: The destination network or host.
- `prefix`: Emits only from Linux IPv6.
- `flags`: Flags.
- `gateway`: The gateway address.
- `interface`: Interface to which packets for this route will be sent.
- `ifIndex`: Interface ID. Emits only from Windows.
- `mask`: The netmask for the destination net. Emits only from Linux IPv4.
- `metric`: The distance to the target.

- `sequence`: Sequence number in the table.
- `source`: The source of the data used to populate the event.

Services

With the **Enabled** slider on (the default), Cribl Stream will create events for each configured service (e.g. `systemd` and `initd`) along with their enabled and running status.

Sample entries include:

- `Name`: Name of the service.
- `Unit Activation Status`: The high-level unit activation state, i.e. generalization of `SUB` for `systemctl`. For `sysV` system value can be `enabled` or `disabled`.
- `Unit Load Status`: Reflects whether the unit definition was properly loaded. (Only `systemctl`).
- `Sub Unit Activation Status`: The low-level unit activation state, values depend on unit type.
- `Description`: Description of the service.

Users and Groups

With the **Enabled** slider on (the default), Cribl Stream will create events for users and groups.

Linux

On Linux, Cribl Stream creates `user` events with the following fields:

- `username`
- `fullname`
- `loginShell`
- `userHome`
- `userid`
- `primaryGroup` (name of primary group, not group ID)
- `groups` (list of group names)

Cribl Stream also creates `group` events with the following fields:

- `name`
- `groupId`
- `users`

Windows

On Windows, Cribl Stream creates `user` events with the following fields:

- `userName`
- `fullname`
- `description`
- `groups`

Cribl Stream also creates `group` events with the following fields:

- `name`
- `description`
- `users`

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

Select a **Pipeline** (or Pack) from the drop-down to process this Source's data. Required to configure this Source via **Data Routes**; optional to configure via **Collect**/**QuickConnect**.

Disk Spooling

Enable disk spooling: Whether to save metrics to disk. When set to `Yes`, exposes this section's remaining fields.

Bucket time span: What time range of events to hold in each bucket. Default value: `10m` (10 minutes).

Max data size: Maximum disk space the persistent metrics can consume. Once reached, Cribl Stream will delete older data. Example values: `420 MB`, `4 GB`. Default value: `100 MB`.

Max data age: How long to retain data. Once reached, Cribl Stream will delete older data. Example values: `2h`, `4d`. Default value: `24h` (24 hours).

Compression: Currently locked to `none`. Cribl plans to add (optional) disk-spooling compression in a future release.

Path location: Path to write metrics to. Default value is `$CRIBL_HOME/state/system_state`.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

10.11. AppScope

AppScope is an open-source instrumentation utility from Cribl. It offers visibility into any Linux command or application, regardless of runtime, with no code modification. For details about configuring the AppScope CLI, loader, and library, see: https://appscope.dev/docs.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **YES**

Configuring Cribl Stream to Receive AppScope Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**System and Internal** >] **AppScope**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**System and Internal** >] **AppScope**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this AppScope Source definition.

UNIX domain socket: When toggled to `Yes`, exposes the following two fields to specify a file-backed UNIX domain socket connection to listen on.

- **UNIX socket path**: Path to the UNIX domain socket. Defaults to `$CRIBL_HOME/state/appscope.sock`.
- **UNIX socket permissions**: Permissions to set for this socket, e.g., `777`. If empty, Cribl Stream will use the runtime user's default permissions.

When **UNIX domain socket** is set to `No` (the default), you instead see the following two fields to specify a network host and port.

- **Address**: Enter the hostname/IP on which to listen for AppScope data. (E.g., `localhost`.) Defaults to `0.0.0.0`, meaning all addresses.
- **Port**: Enter the port number to listen on.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Use this default option to enter the shared secret clients must provide in the `authToken` header field. Click **Generate** if you need a new auth token. If empty, unauthenticated access will be permitted.

- **Secret**: This option exposes an **Auth token (text secret)** drop-down, in which you can select a stored secret that references the auth token described above. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. Click **Create** if you need to configure a new secret.

Optional Settings

UNIX socket permissions: Permissions to set for socket. For the preconfigured `in_appscope` source, defaults to `777`. When creating a new AppScope Source, you should set this to `777`. If empty, falls back to the runtime user's default permissions.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

This left tab is displayed only when the Optional Settings > **UNIX domain socket** slider is set to `No`. It provides the following options.

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

AppScope Rules

Rules: Click **Add Rule** to include processes to scope, and to link to an AppScope config. Once you have saved the configuration, and committed and deployed your changes, AppScope will instrument any process that matches a Rule, on any Edge Node in the Fleet.

(When no Rules are defined, you can still scope by PID in the Edge Processes page. Scope by PID only instruments a single process running in one Edge Node.)

- **Process name**: Matches if the string value you enter corresponds to the basename of the scoped process.

- **Process argument**: Matches if the string value you enter appears as a substring anywhere in the scoped process' full command line (including options and arguments).

- **AppScope config**: Select an AppScope config.

Transport override: Enter a URL to override aspects of the transport configuration, such as the hostname, port, or TLS settings. For details, see Transport Override Details.

Transport Override Details

In scenarios like the following, use the **Transport override** option to extend the defaults in AppScope's transport configuration:

- When this Source is set to **TCP** mode, it typically listens on the default address `0.0.0.0`. Scoped clients will need a specific `IP` or `hostname` to connect. In these cases, set **Transport override** URL to a specific IP/hostname (example format: `tcp://my.host.name`). This Source will parse the URL and look for the `hostname` and `port`, then use those values to override what would otherwise be sent to the `scope start` command.

- When this Source is set to **UNIX domain socket**, it listens by default on `$CRIBL_HOME/state/appscope.sock`. The socket is often created on a mounted volume in a container. The path to that socket might be different outside the container, or when mounted into another container. In these cases, set the **Transport override** URL to specify an alternative path (example format: `unix:///some/other/volume/appscope.sock`).

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Event Breakers

Event Breaker rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Disk Spooling

> For Cribl Search to access the data that arrives at an AppScope Source, **Disk Spooling** must be enabled.

Enable disk persistence: Whether to save metrics to disk. When set to `Yes`, exposes this section's remaining fields.

Bucket time span: What time range of events to hold in each bucket. Default value: `10m` (10 minutes).

Max data size: Maximum disk space the persistent metrics can consume. Once reached, Cribl Stream will delete older data. Example values: `420 MB`, `4 GB`. Default value: `100 MB`.

Max data age: How long to retain data. Once reached, Cribl Stream will delete older data. Example values: `2h`, `4d`. Default value: `24h` (24 hours).

Compression: Optionally compress the data before sending. Defaults to `gzip` compression. Select `none` to send uncompressed data.

Path location: Path to write metrics to. Default value is `$CRIBL_HOME/state/appscope.sock`.

Advanced Settings

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2.

IP allowlist regex: Regex matching IP addresses that are allowed to establish a connection.

Max active connections: Maximum number of active connections allowed per Worker Process. Defaults to `1000`; enter `0` to allow unlimited connections.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

AppScope with Edge on Kubernetes

When Cribl Edge detects that a `scope`'d process is running inside a Kubernetes container, it reports the Kubernetes metadata as `kube_**` properties. It adds these to the incoming events and metrics, and you can view the combined events and metrics on the AppScope Source's **Live Data** tab.

> For Cribl Edge to detect that it's running in a Kubernetes Pod, you must first set the `CRIBL_K8S_POD` environment variable.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__srcIpPort`

Examples

> The following examples work only in Cribl Stream. You can vary the scoped commands (`ps -ef` and `curl`) as desired.

Cribl.Cloud – TLS

An `in_appscope_tls` TLS Source is preconfigured for you on Cribl.Cloud, using port `10090`. You can send it AppScope data using this command:

```
./scope run -c <Your-Ingress-Address>:10090 -- ps -ef
```

Cribl Cloud – TCP

An `in_appscope_tcp` TCP Source is preconfigured for you on Cribl.Cloud, using port `10091`. You can send it AppScope data using this command:

```
./scope run -c tcp://<Your-Ingress-Address>:10091 -- curl -so /dev/null \
https://wttr.in/94105
```

10.12. CrowdStrike FDR

Cribl Stream supports receiving data from the CrowdStrike Falcon Data Replicator (FDR) platform. CrowdStrike data can then be sent to SIEM, threat-hunting, and other security tools and platforms.

This page covers how to configure the Source. Because the FDR platform pulls data from Amazon S3 buckets maintained by CrowdStrike, some of the configuration described here actually involves S3.

> Type: **Pull** | TLS Support: **Yes** | Event Breaker Support: **Yes**
>
> (In Cribl Stream 3.2 through 3.5.x, this Source was labeled simply **CrowdStrike**.)

Configuring a CrowdStrike Source

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **CrowdStrike**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **CrowdStrike**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> The sections described below are spread across several tabs. Click the tab links at left, or the **Next** and **Prev** buttons, to navigate among tabs. Click **Save** when you've configured your Source.

General Settings

Input ID: Unique ID for this Source. E.g., `Endpoint42Investigation`.

Queue: The name, URL, or ARN of the SQS queue to read notifications from. When a non-AWS URL is specified, format must be: `'{url}/myQueueName'`. E.g., `'https://host:port/myQueueName'`. The value must be a JavaScript expression (which can evaluate to a constant value), enclosed in quotes or backticks. The expression can only be evaluated at init time, for example when referencing a Global Variable like this: `https://host:port/myQueue-${C.vars.myVar}`.

Optional Settings

Filename filter: Regex matching file names to download and process. Defaults to: `.*`.

Region: AWS Region where the S3 bucket and SQS queue are located. Required, unless **Queue** is a URL or ARN that includes a Region.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the buttons to select an authentication method.

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select a secret key pair that you've configured in Cribl Stream's internal secrets manager or (if enabled) an external KMS. Follow the **Create** link if you need to configure a key pair.

Assume Role

Enable for S3: Whether to use Assume Role credentials to access S3. Defaults to `Yes`.

Enable for SQS: Whether to use Assume Role credentials when accessing SQS (Amazon Simple Queue Service). Defaults to `No`.

AWS account ID: SQS queue owner's AWS account ID. Leave empty if the SQS queue is in the same AWS account.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role.

Processing Settings

Custom Command

In this section, you can pass the data from this input to an external command for processing, before the data continues downstream.

Enabled: Defaults to `No`. Toggle to `Yes` to enable the custom command.

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument to the command. You can drag arguments vertically to resequence them.

Event Breakers

In this section, you can apply event breaking rules to convert data streams to discrete events.

Event Breaker rulesets: A list of event breaking rulesets that will be applied, in order, to the input data stream. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute the field's value (can be a constant).

Pre-Processing

Optionally, use the drop-down to select an existing Pipeline to process data from this Source before sending it through the Routes. Otherwise (by default), events will be sent to normal routing and event processing.

Advanced Settings

Advanced Settings enable you to customize post-processing and administrative options.

Endpoint: The S3 service endpoint you want CrowdStrike to use. If empty, Cribl Stream will automatically construct the endpoint from the AWS Region. To access the AWS S3 endpoints, use the path-style URL format. You don't need to specify the bucket name in the URL, because Cribl Stream will automatically add it to the URL path. For details, see AWS' Path-Style Requests topic.

Signature version: Signature version to use for signing S3 requests. Defaults to `v4`; `v2` is also available.

Num receivers: The number of receiver processes to run. The higher the number, the better the throughput, at the expense of CPU overhead. Defaults to `1`.

Max messages: The maximum number of messages that SQS should return in a poll request. Amazon SQS never returns more messages than this value. (However, fewer messages might be returned.) Acceptable values: `1` to `10`. Defaults to `1`.

Visibility timeout seconds: After messages are retrieved by a `ReceiveMessage` request, Cribl Stream will hide those messages from subsequent retrieve requests for at least this duration. Default is `21600` seconds (6 hours); maximum allowed threshold is `43200` sec. (12 hours). Set to `0` for no message hiding.

> Cribl Stream will automatically extend this timeout until the initial request's files have been processed – notably, for large files that require additional processing time. The generous 6-hour default allows each Worker Process time to decompress, stitch, and read large multi-part files, without duplicate processing.

Poll timeout (secs): How long to wait for events before polling again. Minimum `1` second; default `10`; maximum `20`. Short durations increase the number - and thus the cost – of requests sent to AWS. (The UI will show a warning for intervals shorter than `5` seconds.) Long durations increase the time the Source takes to react to configuration changes and system restarts.

Socket timeout: Socket inactivity timeout (in seconds). Increase this value if retrievals time out during backpressure. Defaults to `300` seconds.

Skip file on error: Toggle to **Yes** to skip files that trigger a processing error. (E.g., corrupted files.) Defaults to **No**, which enables retries after a processing error.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to reject certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes` , the restrictive option.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

How Cribl Stream Pulls Data

Worker Processes poll for messages from SQS, using the AWS SDK S3 APIs. Each polling call will return (by default) one message, if any are available. You can change this default using `Max messages` .

If no message is available, the call will time out after one second, and then polling will repeat.
All Worker Processes participate in polling, so as to disribute files' collection and processing evenly across Workers.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

10.13. Datadog Agent

Datadog Agent is open-source software that monitors the host on which it runs. Acting as a DogStatsD server, Datadog Agent also aggregates metrics from other processes or containers on the host.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**

Cribl Stream can ingest the following from Datadog Agent, in bundled form:

- Logs.
- Metrics (gauge, rate, counter, and histogram).
- Service checks.
- Agent metadata and other events emitted from the `/intake/` endpoint.

Datadog Agent also emits Application Performance Monitoring data, which it sends to Datadog. Cribl Stream does not currently support ingesting this APM data.

On the system(s) that you want to monitor, you'll need to install Datadog Agent and configure it to send data to Cribl Stream. Cribl Stream can parse, filter, and enrich that data, and then send it to any supported Destination, including a Cribl Stream Datadog Destination. (By default, Datadog Agent sends data only to Datadog.)

For inbound log data, this Source supports gzip -compression when the `Content-Encoding: gzip` connection header is set. For other data types, it assumes that all inbound data is compressed using `deflate`.

Configuring Cribl Stream to Ingest Datadog Agent Output

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Datadog Agent**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Datadog Agent**. Next, click **New Source** to open a

New Source modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Datadog Agent Source definition.

Address: Enter hostname/IP to listen for Datadog Agent data. E.g., `localhost` or `0.0.0.0`.

Port: Enter the port number to listen on.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable Proxy Protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests per worker process. Use `0` for unlimited.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

- **Socket timeout (seconds)**: How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

- **Keep-alive timeout (seconds)**: After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

Extract metrics: Toggle to `Yes` to extract each incoming metric to multiple events, one per data point. This works well when sending metrics to a `statsd`-type output. If sending metrics to DatadogHQ or any destination that accepts arbitrary JSON, leave toggled to `No` (the default).

Forward API key validation requests: Toggle to `Yes` to send key validation requests from Datadog Agent to the Datadog API. If toggled to `No` (the default), Stream handles key validation requests by always responding that the key is valid.

Reject unauthorized certificates: Reject certificates that are not authorized by a trusted CA (e.g., the system's CA). Defaults to `No`. Available when **Forward API key validation requests** is toggled to `Yes`.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes`.
- `__inputId`
- `__srcIpPort` – See details below.

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the Datadog Agent sending data to this Source.

When any proxies (including load balancers) lie between the Datadog Agent and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

Sending Datadog Agent Data to Cribl Stream

Before you begin this section, you should have Datadog Agent running on one or more hosts.

To enable Datadog Agent to send data to Cribl Stream, you'll set the following environment variables:

- `DD_DD_URL`: The URL or IP address and port of your Datadog Agent Source in Cribl Stream.
- `DD_LOGS_CONFIG_LOGS_DD_URL`: The same value as above, assuming log collection is enabled on Datadog Agent.
- `DD_LOGS_CONFIG_USE_HTTP`: Set to `true`. Cribl Stream ingests Datadog Agent logs over HTTP only; ingesting logs over TCP is not supported.

Set these environment variables in one of two ways: (1) through a `docker run` command, or (2) by editing the `datadog.yaml` configuration file that your Datadog Agent uses.

Using the `docker run` Command

Here's an example `docker run` that sets the environment variables described above, along with others required for Datadog Agent but not relevant to Cribl Stream. Replace the example values with values appropriate for your environment.

```
docker run --rm --name dd-agent
  -e DD_API_KEY=6d1ephx1w55p978i6d1ephx1w55p978i \
  -e DD_SKIP_SSL_VALIDATION=true \
  -e DD_DD_URL="http://0.0.0.0:8080" \
  -e DD_LOGS_ENABLED=true \
  -e DD_LOGS_CONFIG_LOGS_DD_URL="0.0.0.0:8080" \
  -e DD_LOGS_CONFIG_USE_HTTP=true \
  -e DD_LOGS_CONFIG_LOGS_NO_SSL=true \
  -e DD_LOGS_CONFIG_CONTAINER_COLLECT_ALL=true \
  -e DD_DOGSTATSD_NON_LOCAL_TRAFFIC="true" \
  gcr.io/datadoghq/agent:7
```

Using a Config File

Instead of using environment variables, you can set the Cribl Stream-related values in your Datadog Agent's `datadog.yaml` config file.

See the documentation links in the example config file that Datadog maintains online; and, the docs that describe filesystem locations relevant to getting Datadog Agent to configure itself with the desired `datadog.yaml` file.

Managing What Data Goes Where

The different kinds of information that Datadog Agents emit - logs, metrics, service checks, agent metadata, and APM data - are not completely independent when you send them to Cribl Stream Datadog Agent Source. The reference to "bundling" near the top of this page introduced this situation in simplified form. The table below explains the relevant constraints for each type of information that Datadog Agents emit, along with the Datadog environment variables that control them.

TYPE(S) OF INFORMATION	DEPENDENCIES AND/OR LIMITATIONS	ENVIRONMENT VARIABLE
Logs	Independent of other types.	`DD_LOGS_CONFIG_DD_URL`
Metrics, Events, Service Checks, and Metadata	Always sent together.	`DD_DD_URL`
APM Data	Can only be sent to Datadog, e.g., `https://trace.agent.datadoghq.com`. Cannot be sent to Cribl Stream even when you **are** sending other types there.	`DD_APM_DD_URL`

Managing API Keys

Suppose your data flow runs from Datadog Agents, to Cribl Stream Datadog Agent Sources, to Cribl Stream Datadog Destinations, to Datadog accounts. You'll need to decide **how many** of each of these elements there are to define the data flow you want. You will also set (or override) **Datadog API keys** to support the desired data flow. For some data flows, you'll need the **General Settings** > **Allow API key from events** toggle in the Cribl Stream Datadog Destination.

Another possibility is that you want data to flow to some Destination other than a Cribl Stream Datadog Destination. If that's the case, try adapting the examples below to your use case. Please connect with us on the `Cribl Community` Slack if you have questions.

Data Flow Examples

The examples which follow start simple and become more complex in terms of desired data flow, and, consequently, of Cribl Stream configuration.

One Agent to One Account

- You're running one Datadog Agent on one host.
- You want the output of the Agent sent to a single Datadog account.
- You only need one API key.
- You configure that single API key on your Cribl Stream Datadog Destination.

Many Agents to One Account

- You're running Datadog Agents on a fleet of hosts.
- You want to consolidate all the output of the Agents into a single Datadog account.
- You only need one API key. This is no different from the simpler one-to-one scenario above.
- You configure that single API key on your Cribl Stream Datadog Destination.
- No matter which host the data originates from, your Cribl Stream Datadog Destination sends it to Datadog using that single API key.

Many Agents to Many Accounts

- You're running Datadog Agents on a fleet of hosts.
- You want the output of the Agents from some hosts to flow into one Datadog account, and the output from other hosts to flow into a different Datadog account.
    - This may need to scale up to multiple accounts, if, for example, you are managing data from several different customers, or from several different organizations within your company.
- You need one API key **for each** Datadog account.

- In the Cribl Stream Datadog Destination, toggle **General Settings** > **Allow API key from events** to `Yes`.
- Here's what happens:
  - Datadog Agent always sends an API key when it communicates with the Cribl Stream Datadog Agent Source. Agents within different subgroups of hosts will send different API keys, as described above.
  - Cribl Stream Datadog Agent Source passes the API key from the Agent to the Cribl Stream Datadog Destination as an internal field.
  - Cribl Stream Datadog Destination uses that API key to direct its output to the correct Datadog account. If need be, you can configure the Destination to override the passed-in API key with a different one. This comes in handy when you know that your Agent(s) are using invalid API keys. You can even override **all** passed-in API keys.

Verifying that Data is Flowing

Once you have configured your Datadog Agent(s) as described above, and they have begun sending data:

- Try viewing the incoming data in the **Live Data** tab in your Cribl Stream Datadog Agent Source.
- If you have a Cribl Stream Datadog Destination set up, connect your Cribl Stream Datadog Agent Source to it via a **QuickConnect Passthru**, and verify that the same data shows up in the Destination's **Live Data** tab.
  - Another possibility is that you want your Cribl Stream Datadog Agent Source to connect to some Destination other than a Cribl Stream Datadog Destination. That's beyond the scope of this example, but verifying data flow should be similar.
- If the Cribl Stream Datadog Destination is configured to send data to a Datadog instance, verify that the same data shows up there, in the appropriate form, according to the transformations you've configured in Cribl Stream.
- If you have a many-to-many data flow as described above, verify that output is being correctly split among the possible Datadog accounts at the end of the data flow.

Assuming that data is behaving as expected, you can proceed to the best part, namely adding one or more Pipelines between Datadog Agent Source and Datadog Destination, to transform the data however you wish. Given the varied nature of what Datadog Agents collect, there should be ample opportunities to make the data leaner and more usable.

10.14. Elasticsearch API

Cribl Stream supports receiving data over HTTP/S using the Elasticsearch Bulk API.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**
>
> This Source supports gzip-compressed inbound data when the `Content-Encoding: gzip` connection header is set.

For examples of receiving data from popular senders via this API, see Configuring Elastic Beats below.

Configuring Cribl Stream to Receive Elasticsearch Bulk API Data over HTTP(S)

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Elasticsearch API**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Elasticsearch API**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> Cribl Stream ships with an Elasticsearch API Source preconfigured to listen on Port 9200. You can clone or directly modify this Source to further configure it, and then enable it.

General Settings

Input ID: Enter a unique name to identify this Elasticsearch Source definition.

Address: Enter the hostname/IP on which to listen for Elasticsearch data. (E.g., `localhost` or `0.0.0.0`.)

Port: Enter the port number.

Elasticsearch API endpoint (for Bulk API): Absolute path on which to listen for Elasticsearch API requests. Defaults to `/`. Cribl Stream automatically appends `_bulk`, so (e.g.) `/myPath` becomes `/myPath/_bulk`. Requests could then be made to either `/myPath/_bulk` or `/myPath/<myIndexName>/_bulk`. Other entries are faked as success.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

In the **Authentication type** drop-down, select one of the following options:

- **None**: Don't use authentication.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials. Click **Generate** if you need a new password.
- **Basic (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret.
- **Auth tokens**: Use HTTP token authentication. Click **Add Token** and, in the resulting **Token** field, enter the bearer token that must be included in the HTTP authorization header. Click **Generate** if you need a new token. Click **Add Token** to display additional rows to specify more tokens.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Activity log sample rate: Determines how often request activity is logged at the `info` level. The default `100` value logs every 100th value; a `1` value would log every request; a `10` value would log every 10th request; etc.

Socket timeout (seconds): How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

Request timeout (seconds): How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

> The longer the **Keep-alive timeout**, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Enable proxy mode: If you toggle this to `Yes`, see Proxy Mode below for the resulting options.

Extra HTTP Headers: Name/Value pairs to pass as additional HTTP headers. By default, Cribl Stream's responses to HTTP requests include the `X-elastic-product` header, with an `Elasticsearch` value. (This is required by certain clients, including some Elastic Beats.)

API Version: To upstream Elastic Beats, this Cribl Stream Source will appear as an Elasticsearch instance matching the version that you set in this drop-down:

- `6.8.4` – Retained for backward compatibility.
- `8.3.2` – This default entry matches Elasticsearch's current `8.3.x` versions.
- `Custom` – Opens an HTTP response object in the **Custom API Version** editor. This object replicates what an Elasticsearch server would send in its HTTP responses to a client. You can edit the `version : number`, and any other fields, as required to satisfy the Elastic Beat sending data to this Source. (This `Custom` option supports future Elasticsearch releases, as long as Elasticsearch keeps the same response-object structure.)

Proxy Mode

Enabling proxy mode allows Cribl Stream to proxy non–Bulk API requests to a downstream Elasticsearch server. This can be useful when integrating with Elasticsearch API senders like Elastic Endgame agents, which send requests that Cribl Stream does not natively support. Sliding **Enable proxy mode** to `Yes` exposes the following controls.

Proxy URL: URL of the Elasticsearch server that will proxy non-bulk requests, e.g.: `http://elastic:9200`.

Reject unauthorized certificates: Reject certificates that are not authorized by a trusted CA (e.g., the system's CA). Defaults to `No`.

Remove headers: Enter any headers that you want removed from proxied requests. Press `Tab` or `Return` to separate header names.

Proxy request timeout: How long, in seconds, to wait for a proxy request to complete before aborting it. Defaults to `60` seconds; minimum timeout is `1` second.

To understand how **Proxy request timeout** interacts with the `X-Forwarded-For` header, see Overriding `__srcIpPort` with Client IP/Port.

Authentication method: Select one of the following options.

- **None**: Don't use authentication.
- **Manual**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.
- **Secret**: This option exposes a **Credentials secret** drop-down, in which you can select a stored secret that references the credentials described above. A **Create** link is available to store a new, reusable secret.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Field Normalization

The Elasticsearch API input normalizes the following fields:

- `@timestamp` becomes `_time` at millisecond resolution.
- `host` is set to `host.name`.
- Original object `host` is stored in `__host`.

The Elasticsearch Destination does the reverse, and it also recognizes the presence of `__host`.

Internal Settings

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes`.
- `__host`
- `__id`
- `__index`
- `__inputId`
- `__srcIpPort` – See details below.
- `__type`

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the Elasticsearch client sending data to this Source.

When any proxies (including load balancers) lie between the Elasticsearch client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

Configuring Elastic Beats

Beats are open-source data shippers that act as agents, sending data to Elasticsearch (or to other services, in this case Cribl Stream). The Beats most popular with Cribl users are Filebeat and Winlogbeat.

To set up a Beat to send data to Cribl Stream, edit the Beat's YAML configuration file: `filebeat.yml` for Filebeat, `winlogbeat.yml` for Winlogbeat, and so on. In the config file, you'll specify your Cribl Stream Elasticsearch Source endpoint as the Beat's Elasticsearch output. To the Beat, Cribl Stream will appear as an instance of Elasticsearch.

If you're using HTTP token authentication (which is disabled by default, both on-prem and on Cribl.Cloud): First, set the token. Then add the following to the Beat config file under `output.elasticsearch.headers`, substituting your token for `myToken42`:

```
output.elasticsearch:
  headers:
    Authorization: "myToken42"
```

Configuring an Elastic Agent

An Elastic Agent is single agent for logs, metrics, security data, and threat prevention that sends data to Elasticsearch (or to other services, in this case Cribl Stream).

When you are sending from an Elastic Agent to Cribl Stream, the `elastic-agent.yml` file doesn't pay any attention to the settings for `output.elasticsarch.allow_older_versions: true`. As a result, the Elasticsearch API Source will not get any data.

To set it up correctly, go to the **Advanced Settings** tab, and change the **API Version** to `Custom`. In the **Custom API Version** editor, edit the `version : number` to match the version of the Elastic Agent you are using. This should allow the data to start flowing to the Source.

10.15. HTTP/S (Bulk API)

Cribl Stream supports receiving data over HTTP/S from Cribl Bulk API, Splunk HEC, and Elastic Bulk API endpoints.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**
>
> This Source supports gzip-compressed inbound data when the `Content-Encoding: gzip` connection header is set.

Configuring Cribl Stream to Receive Data over HTTP(S)

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **HTTP**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **HTTP**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> Cribl Stream ships with an HTTP Source preconfigured to listen on Port 10080, and on several default endpoints. You can clone or directly modify this Source to further configure it, and then enable it.

General Settings

Input ID: Enter a unique name to identify this HTTP(S) Source definition.

Address: Enter the hostname/IP on which to listen for HTTP(S) data. (E.g., `localhost` or `0.0.0.0`.)

Port: Enter the port number.

Authentication Settings

Auth tokens: Shared secrets to be provided by any client (`Authorization: <token>`). Click **Generate** to create a new secret. If empty, unauthenticated access **will be permitted**.

Optional Settings

Cribl HTTP event API: Base path on which to listen for Cribl HTTP API requests. To construct the actual endpoint, Cribl Stream will append `/_bulk` to this path. For example, with the default value of `/cribl`, your senders should send events to a `/cribl/_bulk` path. Use an empty string to disable.

Elastic API endpoint (for Bulk API): Base path on which to listen for Elasticsearch API requests. Currently, the only supported option is the default `/elastic`, to which Cribl Stream will append `/_bulk`. So, your senders should send events to an `/elastic/_bulk` path. Other entries are faked as success. Use an empty string to disable.

> Cribl generally recommends that you use the dedicated Elasticsearch API Source instead of this endpoint. The Elastic API implementation here is provided for backward compatibility, and for users who want to ingest multiple inputs on one HTTP/S port.

Splunk HEC endpoint: Absolute path on which to listen for Splunk HTTP Event Collector (HEC) API requests. Use an empty string to disable. Default entry is `/services/collector`.

> This Splunk HEC implementation is an **event** (i.e., not **raw**) endpoint. For details, see Splunk's documentation. To send data to it from a HEC client, use either `/services/collector` or `/services/collector/event`. (See the examples below.)
>
> Cribl generally recommends that you use the dedicated Splunk HEC Source instead of this endpoint. The Splunk HEC implementation here is provided for backward compatibility, and for users who want to ingest multiple inputs on one HTTP/S port.

Splunk HEC Acks: Whether to enable Splunk HEC acknowledgements. Defaults to `No`.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.

- `Smart` : This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Activity log sample rate: Determines how often request activity is logged at the `info` level. The default `100` value logs every 100th value; a `1` value would log every request; a `10` value would log every 10th request; etc.

Socket timeout (seconds): How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

Request timeout (seconds): How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

> The longer the **Keep-alive timeout**, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes`.
- `__inputId`
- `__srcIpPort` – See details below.
- `__host` (Elastic In)
- `__id` (Elastic In)
- `__index` (Elastic In)
- `__type` (Elastic In)

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the client sending data to this Source.

When any proxies (including load balancers) lie between the HTTP client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original HTTP client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

Format and Endpoint

Cribl Stream expects HTTP(S) events to be formatted as one JSON record per event. Here are two event records:

Sample Event Format

```
{"_time":1541280341, "_raw":"this is a sample event ", "host":"myHost",
"source":"mySource", "fieldA":"valueA", "fieldB":"valueB"}
{"_time":1541280341, "host":"myOtherHost", "source":"myOtherSource", "_raw": "
{\"message\":\"Something informative happened\", \"severity\":\"INFO\"}"}
```

Note 1: Events can be sent as separate POSTs, but Cribl **highly** recommends combining multiple events in newline-delimited groups, and POSTing them together.

Note 2: If an HTTP(S) source is routed to a Splunk destination, fields within the JSON payload are mapped to Splunk fields. Fields that do not have corresponding (native) Splunk fields become index-time fields. For example, let's assume we have a HTTP(S) event like this:

`{"_time":1541280341, "host":"myHost", "source":"mySource", "_raw":"this is a sample event ", "fieldA":"valueA"}`

Here, `_time`, `host` and `source` become their corresponding fields in Splunk. The value of `_raw` becomes the actual body of the event, and `fieldA` becomes an index-time field. (`fieldA`::`valueA`).

Examples

Cribl Stream

The examples in this section demonstrate sending HTTP data into a Cribl Stream binary that you manage on-prem, or on a VM. To set up these examples:

1. Configure Cribl to listen on port `10080` for HTTP (default). Set `authToken` to `myToken42`.
2. Send a payload to your Cribl Stream receiver.

Cribl Endpoint – Single Event

Cribl Single Event Example:

```
curl -k http://<myCriblHost>:10080/cribl/_bulk -H 'Authorization: myToken42' -d
'{"_raw":"this is a sample event ", "host":"myHost", "source":"mySource",
"fieldA":"valueA", "fieldB":"valueB"}'
```

Cribl Endpoint – Multiple Events

```
curl -k http://<myCriblHost>:10080/cribl/_bulk -H 'Authorization: myToken42' -d
$'{"_raw":"this is a sample event ", "host":"myHost", "source":"mySource",
"fieldA":"valueA", "fieldB":"valueB"} \n {"_raw":"this is another sample event ",
"host":"myOtherHost", "source":"myOtherSource", "fieldA":"valueA",
"fieldB":"valueB"}'
```

Splunk HEC Event Endpoint

```
curl -k http://<myCriblHost>:10080/services/collector/event -H 'Authorization:
myToken42' -d '{"event":"this is a sample event ", "host":"myHost",
"source":"mySource", "fieldA":"valueA", "fieldB":"valueB"}'

curl -k http://<myCriblHost>:10080/services/collector -H 'Authorization: myToken42'
-d '{"event":"this is a sample event ", "host":"myHost", "source":"mySource",
"fieldA":"valueA", "fieldB":"valueB"}'
```

> For Splunk HEC, the token specification can be either `Splunk <token>` or `<token>`.

Cribl Cloud – Single Event

1. Generate and copy a token in your Cribl Cloud instance's HTTP Source > **General Settings**.

2. From the command line, use `https`, your Cribl.Cloud portal's **Ingest Endpoint** and port, and the token's value:

```
curl -k https://in.main-default-<Your-Org-ID>.cribl.cloud:10080/cribl/_bulk -H
'Authorization: <token_value>' -d '{"_raw":"this is a sample event ",
"host":"myHost", "source":"mySource", "fieldA":"valueA", "fieldB":"valueB"}'
```

10.16. Raw HTTP/S

Cribl Stream supports receiving raw HTTP data. The Raw HTTP Source listens on a specific port, captures every HTTP request to that port, and creates a corresponding event that it pushes to its configured Event Breakers.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **YES**
>
> This Source supports gzip-compressed inbound data when the `Content-Encoding: gzip` connection header is set.

Configuring Cribl Stream to Receive Raw HTTP Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Pull** >] **Raw HTTP**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Pull** >] **Raw HTTP**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Raw HTTP Source definition.

Address: Enter the address to bind on. Defaults to `0.0.0.0` (all addresses).

Port: Enter the port number to listen on.

Authentication Settings

Auth tokens: Shared secrets to be provided by any client. Click **Generate** to create a new secret. If empty, permits open access.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.

- If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
- You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Event Breakers

Event Breaker rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event using Eval-like functionality.

- **Name**: Field name.
- **Value**: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable Proxy Protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Allowed URI paths: List of URI paths accepted by this input. Supports wildcards, e.g., `/api/v*/hook`. Defaults to `*`, which allows all paths.

Allowed HTTP methods: List of HTTP methods accepted by this input. Supports wildcards, e.g., `P*, GET`. Defaults to `*`, which allows all methods.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Socket timeout (seconds): How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

Request timeout (seconds): How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

> The longer the **Keep-alive timeout**, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and functions can use them to make processing decisions.

Fields for this Source:

- `__channel`
- `__headers` – Automatically includes any headers sent with request.
- `__inputId`

- `__srcIpPort` – See details below.

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the HTTP client sending data to this Source.

When any proxies (including load balancers) lie between the HTTP client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

10.17. Metrics

Cribl Stream supports receiving metrics in these wire formats/protocols: StatsD, StatsD Extended, and Graphite. Automatic protocol detection happens on the first line received over a TCP connection or a UDP packet. Lines not matching the detected protocol are dropped.

> Type: **Push** | TLS Support: **No** | Event Breaker Support: **No**
>
> Cribl Edge Workers support System Metrics only when running on Linux, not on Windows.

Configuring Cribl Stream to Receive Metrics

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Metrics**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [[**Push** >] **Metrics**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Address: Enter the hostname/IP to listen to. Defaults to `0.0.0.0`.

UDP port: Enter the UDP port number to listen on. Not required if listening on TCP.

TCP port: Enter the TCP port number to listen on. Not required if listening on UDP.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (TCP Only)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable Proxy Protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2.

IP allowlist regex: Regex matching IP addresses that are allowed to send data. Defaults to `.*` (i.e., all IPs.)

Max buffer size (events) : Maximum number of events to buffer when downstream is blocking. Defaults to `1000`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__srcIpPort`
- `__metricsInType`

Metric Event Schema and Destination Support

Metric data is read into the following event schema:

```
_metric - the metric name
_metric_type - the type of the metric (gauge, counter, timer)
_value - the value of the metric
_time - metric_time or Date.now()/1000
dim1 - value of dimension1
dim2 - value of dimension2
....
```

Cribl Stream places sufficient information into a field called `__criblMetric` to enable these events to be properly serialized out to any metric outputs (independent of the input type).

The following Destinations natively support the `__criblMetric` field:

- Splunk
- Splunk HEC
- InfluxDB
- Statsd
- Statsd Extended
- Graphite

Data Format/Protocol Examples

StatsD

Format: `MetricName:value|type`

StatsD Example

```
metric1:100|g
metric2:200|ms
metric.dot.3:300.16|c
```

See the StatsD repo.

StatsD Extended

Format: `MetricName:value|type|#dim=value,dim2=value`

StatsD Extended Example

```
metric1:100|g|#dim1:val1,dim2:val2,dim3:val3
metric2:200|ms|#dim1:val1,dim2:val2,dim3:val3
metric.dot.3:300.16|c|#dim1:val1,dim2:val2,dim3:val3
```

Graphite

Format: `MetricName[;dim1=val1[;dim2=val2]] value time`

Graphite Example with Dimensions

```
metric1;dim1=val1;dim2=val2 100 9999
metric2;dim1=val1;dim2=val2 200 9999
metric.dot.3;dim1=val1;dim2=val2 300.16 9999.16
```

Graphite Example without Dimensions

```
metric1 100 9999
metric2 200 9999
metric.dot.3 300.16 9999.16
```

See the Graphite (also known as Carbon) plaintext protocol.

10.18. OpenTelemetry (OTel)

Cribl Stream supports receiving trace and metric events from OTLP-compliant senders. (Cribl plans to add support for log events as more components of the OpenTelemetry protocol's logs support graduate to stable status.)

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**

Supported and Unsupported Input Data

In Cribl Stream 4.0.3 and later, the Open Telemetry Source supports receiving compressed inbound data (with DEFLATE or gzip compression), as well as uncompressed data.

In Cribl Stream 4.1 and later, this Source supports receiving telemetry data over either of the transports that the OpenTelemetry Protocol (OTLP) describes: gRPC or HTTP. OTLP defines Protocol buffer (Protobuf) schemas for its payloads (requests and responses). With the HTTP transport, this Source supports Binary Protobuf payload encoding, but currently does not support JSON Protobuf.

The OpenTelemetry Project's Data Sources documentation provides these hierarchical definitions of Cribl Stream's supported trace and metric event types:

- A **trace** tracks the progression of a single request.
- Each trace is a tree of **spans**.
- A span object represents the work being done by the individual services, or components, involved in a request as that request flows through a system.
- A **metric** provides aggreggated statistical information.
- A metric contains individual measurements called **data points**.

Configuring an OTel Source

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **OpenTelemetry**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **OpenTelemetry**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> The sections described below are spread across several tabs. Click the tab links at left, or the **Next** and **Prev** buttons, to navigate among tabs. Click **Save** when you've configured your Source.

General Settings

Input ID: Unique ID for this Source. E.g., `OTel042`.

Address: Enter the hostname/IP to listen on. Defaults to `0.0.0.0` (all addresses, IPv4 format). IPv6 addresses must be enclosed in square brackets.

Port: By default, OTel applications send output to port `4317` when using the gRPC protocol, and port `4318` when using HTTP. This setting defaults to `4317` – you must change it if you set **Protocol** (below) to `HTTP`, or you want Cribl Stream to collect data from an OTel application that is using a different port.

Optional Settings

Protocol: Use the drop-down to choose the protocol matching the data you will ingest: `gRPC` (the default), or `HTTP`.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Authentication

Select one of the following options for authentication:

- **None**: Don't use authentication.
- **Auth token**: Enter the bearer token that must be included in the authorization header.
- **Auth token (text secret)**: Provide an HTTP token referenced by a secret. Select a stored text secret in the resulting drop-down, or click **Create** to configure a new secret.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.

- **Basic (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret.

TLS Settings (Server Side)

> In OTel terminology, your Cribl Stream OTel Source will receive OTel data from a **Collector** running on a local **agent**. In Cribl Stream's terminology, the Collector is the **client** and the OTel Source is the **server**. This is why this Source's UI identifies the Source's TLS Settings as "server-side."
>
> For more about this client-server relationship, see the TLS Configuration Example below.

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Extract spans: Toggle to `Yes` if you want Cribl Stream to generate an individual event for each span. (Recall that traces contain multiple spans.)

Extract metrics: Toggle to `Yes` if you want Cribl Stream to generate an individual event for each data point. (Recall that OTel metric events contain multiple data points.)

The **Extract spans** and **Extract metrics** settings are unique to OTel. Their default `No` settings allow Cribl Stream to essentially function as a bump on the wire, generating a single event for each incoming OTel event. This can be useful when, for example, you want to send whole OTel events to persistent storage.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Environment: Optionally, specify a single Git branch on which to enable this configuration. If this field is empty, the config will be enabled everywhere.

When **General Settings** > **Protocol** is set to `HTTP`, the UI displays three additional settings:

- **Socket timeout (seconds)**: How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.
- **Request timeout (seconds)**: How long to wait for an incoming request to complete before aborting it. The default `0` value means wait indefinitely.
- **Keep-alive timeout (seconds)**: After the last response is sent, Cribl Stream will wait this long for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second;

maximum is `600` seconds (10 minutes).

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

TLS Configuration Example

Here's a simple example for using TLS to secure the communication between an OpenTelemetry client and your Cribl Stream OTel Source.

1. Choose or generate a certificate and key. If you need to generate a certificate/key pair, you can adapt the following OpenSSL command:

   ```
   openssl req -nodes -new -x509 -newkey rsa:2048 -keyout myKey.pem -out myCert.pem
   -days 420
   ```

   This example command will generate both a self-signed cert named `myCert.pem` (certified for 420 days), and an unencrypted, 2048-bit RSA private key named `myKey.pem`.

2. Configure the **TLS Settings (Server Side)**. Toggle **Enabled** to `Yes`, then:

   - Enter the appropriate values in the **Certificate name**, **Private key path**, and **Certificate path** fields. A **Create** link is available if you need a new certificate, and **Certificate name** also works as a drop-down to allow you to choose from any existing certificates.
   - Leave the **CA certificate path** field empty.
   - Leave **Authenticate client (mutual auth)** toggled to `No`.

3. Configure the OTel client. See the OTel Collector TLS Configuration Settings README for an explanation of the relevant settings. The config file might be named `otel-config.yaml`, `otel-local-config.yaml`, or just `config.yaml`, depending on your environment. This YAML file will have an `exporters` section, which you must edit to include an `otlp` sub-section, as follows:

   - Add an `endpoint` whose value is the IP address of either (a) the Cribl Stream Worker Node on which your OTel Source is running, or (b) the IP address of the load balancer for the relevant

Worker Group. In the example snippet below, this is the `<Cribl_IP_address>`. Specify the port on which Cribl Stream's OTel Source is listening; port `4317` is the default.

- Set `tls` > `insecure` to `false`. This matches your setting **TLS Settings (Server Side)** > **Enabled** to `Yes` on the Cribl Stream OTel Source.
- Set `tls` > `insecure_skip_verify` to `true`. This matches your setting **TLS Settings (Server Side)** > **Authenticate client (mutual auth)** to `No` on the Cribl Stream OTel Source. Setting `insecure_skip_verify` to `true` is also required if you're using a self-signed certificate.

Here's how the section you edited should look:

```
exporters:
  otlp:
    endpoint: "https://<Cribl_IP_address>:4317"
    tls:
      insecure: false
      insecure_skip_verify: true
```

10.19. SNMP Trap

Cribl Stream supports receiving data from SNMP Traps.

> Type: **Push** | TLS Support: **NO** | Event Breaker Support: **No**

Configuring Cribl Stream to Receive SNMP Traps

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **SNMP Trap**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **SNMP Trap**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> Cribl Stream ships with an SNMP Trap Source preconfigured to listen on Port 9162. You can clone or directly modify this Source to further configure it, and then enable it.

General Settings

Input ID: Enter a unique name to identify this Source definition.

Address: Address to bind on. Defaults to `0.0.0.0` (all addresses).

UDP Port: Port on which to receive SNMP traps. Defaults to `162`.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:

- If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
- If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
- You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

IP allowlist regex: Regex matching IP addresses that are allowed to send data. Defaults to `.*`, i.e., all IPs.

Max buffer size (events) : Maximum number of events to buffer when downstream is blocking. Defaults to `1000`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__srcIpPort` : In this particular Source, this field uses a pipe (|) symbol to separate the source IP address and the port, in this format: `event.__srcIpPort = ${rInfo.address}|${rInfo.port};`
- `__snmpVersion` : Acceptable values are `0` , `2` , or `3` . These respectively indicate SNMP v1, v2c, and v3.
- `__snmpRaw` : Buffer containing Raw SNMP packet

Considerations for Working with SNMP Trap Data

- It's possible to work with SNMP metadata (i.e., we'll decode the packet). Options include dropping, routing, etc.
- SNMP packets can be forwarded to other SNMP destinations. However, the contents of the incoming packet **cannot** be modified – i.e., we'll forward the packets verbatim as they came in.
- SNMP packets can be forwarded to non-SNMP destinations (e.g., Splunk, Syslog, S3, etc.).
- Non-SNMP input data **cannot** be sent to SNMP destinations.

10.20. Syslog

Cribl Stream supports receiving syslog data, whether structured according to RFC 3164 or RFC 5424. This Source supports message-length prefixes according to RFC 5425 or RFC 6587.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**
>
> For details on how to replace your syslog server with Cribl Stream, see Syslog Best Practices.

Configuring Cribl Stream to Receive Data over Syslog

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Syslog**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Syslog**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> Cribl Stream ships with a Syslog Source preconfigured to listen for both UDP and TCP traffic on Port 9514. You can clone or directly modify this Source to further configure it, and then enable it.

General Settings

Input ID: Enter a unique name to identify this Syslog Source definition.

Address: Enter the hostname/IP on which to listen for data., E.g. `localhost` or `0.0.0.0`.

UDP port: Enter the UDP port number to listen on. Not required if listening on TCP.

> The maximum supported inbound UDP message size is 16,384 bytes.

TCP port: Enter the TCP port number to listen on. Not required if listening on UDP.

Optional Settings

Fields to keep: List of fields from source data to retain and pass through. Supports wildcards. Defaults to `*` wildcard, meaning keep all fields. Fields **not** specified here (by wildcard or specific name) will be removed from the event.

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (TCP Only)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:

- If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
- If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
- You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable Proxy Protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2.

Single msg per UDP: Enable this to treat received UDP packet data as a full syslog message. With the `No` default, Cribl Stream will treat newlines within the packet as event delimiters.

Octet count framing: Toggle to `Yes` if messages are prefixed with a byte length, according to RFC 5425 or RFC 6587. The default setting (`No`) applies non-transparent framing using `\n` as the delimiter. The framing method utilized by this input will be applied to all events received by this input. Therefore, if your syslog devices use a mixture of framing types (non-transparent vs. octet count), you will need to use a separate Syslog Source for each framing type. Additional inputs will necessitate separate ports.

Allow non-standard app name: Toggle to `Yes` to allow hyphens to appear in an RFC 3164–formatted Syslog message's `TAG` section. For details, see TAG Section Processing.

IP whitelist regex: Regex matching IP addresses that are allowed to send data. Defaults to `.*` (i.e., all IPs).

Max buffer size (events): Maximum number of events to buffer when downstream is blocking. The buffer is only in memory. (This setting is applicable only to UDP syslog.) Events dropped because they exceed this buffer are logged as dropped in `stats` messages.

Default timezone: Timezone to assign to timestamps that omit timezone info. Accept the default `Local` value, or use the drop-down list to select a specific timezone by city name or GMT/UTC offset.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

`TAG` Section Processing

Cribl Stream will try to parse `appname` out of a syslog message's `TAG` section, even when the message is not RFC 5424–formatted.

This practice means that the `TAG` section can contain any alphanumeric character or an underscore (_). When the **Allow–non-standard app name** option is enabled, Cribl Stream will also process hyphens that appear in an RFC 3164–formatted Syslog message's `TAG` section. If Cribl Stream encounters a hyphenated `appname`, it will continue processing to find `procid`. (This setting has no effect on RFC 5424–formatted messages.)

If the `TAG` section contains any non-alphanumeric character, Cribl Stream will treat that character as the termination of the `TAG` section, and as the starting character of the `CONTENT` section.

`CONTENT` Section Processing

Cribl Stream will try to parse `procid` from the beginning of the `CONTENT` section if this section is directly after the `TAG` section, and if it either follows a `:` or is surrounded by `[]`. This process occurs regardless of the **Allow–non-standard app name** setting.

What Fields to Expect

To create fields, the Syslog Source requires messages to comply with RFC 3164 or RFC 5424. If messages sent to the Source comply with neither of these RFCs, you'll see the following fields:

- `_raw`: Contains the whole message, but no other fields broken out.
- `_time`: Contains the time the message was received by Cribl Stream.
- `__srcIpPort <udp|tcpp>:<port>`: See Internal Fields.
- `__syslogFail`: See Internal Fields.
- `host`: IP address of the device sending the incoming message.

If messages sent to the Source comply with either RFC 3164 or RFC 5424, fields that the RFC deems guaranteed will always be there, but fields deemed optional might or might not be. Once Cribl Stream parses the required fields and any optional fields, what remains is the actual message.

To see this in real life, install the `cribl-syslog-input` Pack and preview the `RFC5424-RFC3164.log` sample file.

RFC NAME FOR FIELD	CRIBL NAME FOR FIELD	GUARANTEED?	NOTES
PRI	`facility`, `facilityName`, `severity`, `severityName`	Yes	`PRI` is a bitwise representation of Facility and Severity, which is how Cribl Stream can derive values for all four of its fields.
TIMESTAMP	`_time`	Yes	This field's format differs depending on which RFC the messages adhere to. Cribl Stream converts it to UNIX epoch time.
HOSTNAME	`host`	Yes	
APP-NAME	`appname`	No	
PROCID	`procid`	No	
MSGID	`msgid`	No	
STRUCTURED-DATA	`structuredData`	No	
MSG	`message`	Yes	

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but are accessible and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__srcIpPort <udp|tcpp>:<port>`: Identifies the port of the sending socket.
- `__syslogFail: true` for data that fails RFC 3164/5424 validation as syslog format.

`stats` Log Message

In Cribl Stream 4.2.2 and later, `stats` log messages report the number of events received, buffered, or dropped for exceeding the maximum Cribl buffer size. By default, these messages are logged every 60 seconds. These values also appear in **Sources** > **Syslog** > <Source_name> > **Status**, in the **UDP** row.

Troubleshooting Resources

Cribl University offers an Advanced Troubleshooting > Source Integrations: Syslog short course. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Advanced Troubleshooting short courses and Troubleshooting Criblets.

10.21. TCP JSON

Cribl Stream can receive newline-delimited JSON data over TCP.

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**

Configuring Cribl Stream to Receive TCP JSON Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **TCP JSON**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **TCP JSON**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> Cribl Stream ships with a TCP JSON Source preconfigured to listen on Port 10070. You can clone or directly modify this Source to further configure it, and then enable it.

General Settings

Input ID: Enter a unique name to identify this TCP JSON Source definition.

Address: Enter hostname/IP to listen for TCP JSON data. E.g., `localhost` or `0.0.0.0`.

Port: Enter the port number to listen on.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Use this default option to enter the shared secret that clients must provide in the `authToken` header field. Exposes an **Auth token** field for this purpose. (If left blank, unauthenticated access will be permitted.) A **Generate** link is available if you need a new secret.

- **Secret**: This option exposes an **Auth token (text secret)** drop-down, in which you can select a stored secret that references the `authToken` header field value described above. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. A **Create** link is available if you need a new secret.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources'

configurations. However:

- If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
- If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
- You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event, using Eval-like functionality.

Name: Field name.

Value: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable Proxy Protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2.

IP allowlist regex: Regex matching IP addresses that are allowed to establish a connection. Defaults to `.*` (i.e., all IPs).

Max active connections: Maximum number of active connections allowed per Worker Process. Defaults to `1000`. Set a lower value if connection storms are causing the Source to hang. Set `0` for unlimited connections.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Field for this Source:

- `__inputId`
- `__srcIpPort`

Format

Cribl Stream expects TCP JSON events in newline-delimited JSON format:

1. A header line. Can be empty – e.g., `{}`. If **authToken** is enabled (see above) it should be included here as a field called `authToken`. When `authToken` is **not** set, the header line is **optional**. In this case, the first line will be treated as an event if does not look like a header record.

   In addition, if events need to contain common fields, they can be included here under `fields`. In the example below, `region` and `AZ` will be automatically added to all events.

2. A JSON event/record per line.

Sample TCP JSON Events

```
{"authToken":"myToken42", "fields": {"region": "us-east-1", "AZ":"az1"}}

{"_raw":"this is a sample event ", "host":"myHost", "source":"mySource",
"fieldA":"valueA", "fieldB":"valueB"}
{"host":"myOtherHost", "source":"myOtherSource", "_raw": "
{\"message\":\"Something informative happened\", \"severity\":\"INFO\"}"}
```

TCP JSON Field Mapping to Splunk

If a TCP JSON Source is routed to a Splunk destination, fields within the JSON payload are mapped to Splunk fields. Fields that do not have corresponding (native) Splunk fields become index-time fields. For example, let's assume we have a TCP JSON event as below:

```
{"_time":1541280341, "host":"myHost", "source":"mySource", "_raw":"this is a sample event ", "fieldA":"valueA"}
```

Here, `_time`, `host`, and `source` become their corresponding fields in Splunk. The value of `_raw` becomes the actual body of the event, and `fieldA` becomes an index-time field (`fieldA::`valueA``).

Examples

Testing TCP JSON In

This first example simply tests that data is flowing in through the Source:

1. Configure Cribl Stream to listen on port `10001` for TCP JSON. Set `authToken` to `myToken42`.
2. Create a file called `test.json` with the payload above.
3. Send it over to your Cribl Stream host: `cat test.json | nc <myCriblHost> 10001`

Cribl Stream to Cribl Cloud

This second example demonstrates using TCP JSON to send data from one Cribl Stream instance to a downstream Cribl Cloud instance. We assume that the downstream Cloud instance uses Cribl Cloud's **default** TCP JSON Source configuration.

So all the configuration happens on the upstream instance's TCP JSON Destination. Replace the `<Your-Org-ID>` placeholder with the Org ID from your Cribl Cloud portal.

TCP JSON Destination Configuration

On the upstream Cribl Stream instance's Destination, set the following field values to match the target Cloud instance's defaults:

General Settings

Address: `in.main-default-<Your-Org-ID>.cribl.cloud` – you can simply copy/paste your Cribl Cloud portal's **Ingest Endpoint** here

Port: `10070`

TLS Settings (Client Side)

Enabled: `Yes`

Validate server certs: `Yes`

10.22. TCP (Raw)

Cribl Stream supports receiving of data over TCP. (See examples and header options below.)

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **YES**

Configuring Cribl Stream to Receive TCP Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **TCP**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **TCP**. Next, click **New Source** to open a **New Source** modal that provides the options below.

> Cribl Stream ships with a TCP Source preconfigured to listen on Port 10060. You can clone or directly modify this Source to further configure it, and then enable it.

General Settings

Input ID: Enter a unique name to identify this TCP Source definition.

Address: Enter hostname/IP to listen for raw TCP data. E.g., `localhost` or `0.0.0.0`.

Port: Enter port number.

Enable Header: Toggle to `Yes` to indicate that client will pass a header record with every new connection. The header can contain an `authToken`, and an object with a list of fields and values to add to every event. These fields can be used to simplify Event Breaker selection, routing, etc. Header format: `{ "authToken" : "myToken", "fields": { "field1": "value1", "field2": "value2" }}`.

- **Shared secret (authToken)**: Shared secret to be provided by any client (in `authToken` header field). Click **Generate** to create a new secret. If empty, unauthenticated access will be permitted.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Server Side)

Enabled defaults to `No`. When toggled to `Yes`:

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

Authenticate client (mutual auth): Require clients to present their certificates. Used to perform mutual authentication using SSL certs. Defaults to `No`. When toggled to `Yes`:

- **Validate client certs**: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.
- **Common name**: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.

- If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
- You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Custom Command

In this section, you can pass the data from this input to an external command for processing before the data continues downstream.

Enabled: Defaults to `No`. When toggled to `Yes`:

Command: Enter the command that will consume the data (via `stdin`) and will process its output (via `stdout`).

Arguments: Click **Add Argument** to add each argument for the command. You can drag arguments vertically to resequence them.

Event Breakers

Event Breaker rulesets: A list of event breaking rulesets that will be applied to the input data stream before the data is sent through the Routes. Defaults to `System Default Rule`.

Event Breaker buffer timeout: How long (in milliseconds) the Event Breaker will wait for new data to be sent to a specific channel, before flushing out the data stream, as-is, to the Routes. Minimum `10` ms, default `10000` (10 sec), maxiumum `43200000` (12 hours).

Fields

In this section, you can add Fields to each event using Eval-like functionality.

- **Name**: Field name.
- **Value**: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Enable Proxy Protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2.

IP allowlist regex: Regex matching IP addresses that are allowed to establish a connection. Defaults to `.*` (i.e,. all IPs).

Max active connections: Maximum number of active connections allowed per Worker Process. Defaults to `1000`. Set a lower value if connection storms are causing the Source to hang. Set `0` for unlimited connections.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and functions can use them to make processing decisions.

Fields accessible for this Source:

- `__inputId`
- `__srcIpPort`
- `__channel`

TCP Source Examples

Every new TCP connection may contain an **optional** header line, with an `authToken` and a list of fields and values to add to every event. To use the Cribl Stream Cloud sample, copy the `<token_value>` out of your Cribl Stream Cloud TCP Source.

Sample test.raw (on-prem) | Sample test.raw (Cribl Cloud)

```
{"authToken":"myToken42", "fields": {"region": "us-east-1", "AZ":"az1"}}

this is event number 1
this is event number 2
```

Enabling the Example – Cribl Stream

1. Configure Cribl Stream to listen on port `7777` for raw TCP. Set `authToken` to `myToken42`.
2. Create a file called `test.raw`, with the payload above.
3. Send it over to your Cribl Stream host, using this command: `cat test.raw | nc <myCriblHost> 7777`

Enabling the Example – Cribl Cloud

Use netcat with `--ssl` and `--ssl-verify`:

```
cat test.raw | nc --ssl --ssl-verify in.main-default-<Your-Org-ID>.cribl.cloud 10060
```

10.23. UDP (Raw)

Cribl Stream supports receiving raw, unparsed data via UDP.

> Type: **Push** | TLS Support: **NO** | Event Breaker Support: **NO**

Configuring Cribl Stream to Receive Raw UDP Data

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **+ Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Raw UDP**. Next, click either **+ Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Raw UDP**. Next, click **Add Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this raw UDP Source definition.

Address: Enter the hostname/IP to listen for raw UDP data. E.g., `localhost`, `0.0.0.0`, or `::` (for IPv6).

Port: Enter the port number.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.

- If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
- You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Fields

In this section, you can add Fields to each event using Eval-like functionality.

- **Name**: Field name.
- **Value**: JavaScript expression to compute field's value, enclosed in quotes or backticks. (Can evaluate to a constant.)

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Single msg per UDP: Toggle to `Yes` if each UDP message should be treated as an independent event. Leave set to the default `No` if the message should be broken on newlines to create multiple events.

Ingest raw bytes: Toggle to `Yes` to add a `__rawBytes` field to each event containing an array of the bytes received as the UDP message.

IP allowlist regex: Regex matching IP addresses that are allowed to establish a connection. Defaults to `.*` (i.e, all IPs).

Max buffer size (events): Maximum number of events to buffer when downstream is blocking. The buffer is only in memory.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

What Fields to Expect

The Raw UDP Source does minimal processing of the incoming UDP messages to remain consistent with the internal Cribl event model. For each UDP message received on the socket, you can expect an event with the following fields:

- `_raw`: Contains the UTF-8 representation of the entire message received (if **Single msg per UDP** is set to `Yes`), or of the given line that was split out of the message.
- `_time`: The UNIX timestamp (in seconds) at which the message was received by Cribl Stream.
- `source`: A string in the form `udp|<remote IP address>|<remote port>`, indicating the remote sender.
- `host`: The hostname of the machine running Cribl Stream that ingested this event.

Also, the internal fields listed below will be present.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and functions can use them to make processing decisions.

Fields accessible for this Source:

- `__inputId`
- `__srcIpPort`
- `__rawBytes`: When **Ingest raw bytes** is set to `Yes`, this field will be an array containing the bytes of the UDP message.

10.24. Windows Event Forwarder

Cribl Stream supports receiving Windows events from the Windows Event Forwarding mechanism built into modern versions of Microsoft Windows (including Windows 10, Windows Server 2012, and more-recent releases).

> Type: **Push** | TLS Support: **YES** | Event Breaker Support: **No**

This Source supports client certificates (mutual TLS) authentication and Kerberos authentication on Linux.

On Cribl Edge, this Source currently supports mutual TLS only with Windows Edge Nodes.

Upstream Prerequisites

This page assumes that you:

- Already have Windows Event Forwarding set up.
- Are pointed to one or more Windows Event Collectors (WECs).
- Are using either client certificate authentication over HTTPS or Kerberos authentication over HTTP.

If you are using client certificate authentication, we also assume that you have – or will generate – a server certificate for this Source, issued by the same Certificate Authority as the client certs.

> For details, see Configuring Upstream Clients/Senders.
>
> For a complete walk-through of generating certificates, setting permissions and policies, and ingesting Windows Event subscriptions and data through Cribl.Cloud, see our Configuring WEF for Cribl Stream topic.

Configuring Cribl Stream to Receive Windows Events

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Source** at left. From the resulting drawer's tiles, select [**Push** >] **Windows Event Forwarder**. Next, click either

Add Destination or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Sources** (Stream) or **More** > **Sources** (Edge). From the resulting page's tiles or left nav, select [**Push** >] **Windows Event Forwarder**. Next, click **New Source** to open a **New Source** modal that provides the options below.

General Settings

Input ID: Enter a unique name to identify this Windows Event Forwarder Source definition.

Address: Enter the hostname/IP on which to listen for Windows events data. (E.g., `localhost` or `0.0.0.0`.)

Port: Enter the port number. The default, 5986, is the port used by Windows Event Collector for HTTPS-based subscriptions.

Authentication method: Specify the method for accepting incoming client connections – either `Client certificate` or `Kerebros`.

Client Certification Authentication Settings

Certificate name: Name of the predefined certificate.

Private key path: Server path containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`.

Passphrase: Passphrase to use to decrypt private key.

Certificate path: Server path containing certificates (in PEM format) to use. Path can reference `$ENV_VARS`.

CA certificate path: Server path containing CA certificates (in PEM format) to use. Path can reference `$ENV_VARS`. If multiple certificates are present in a `.pem`, each must directly certify the one preceding it in that file. This should match the order of traversing the chain from the host to the root CA cert.

> The CA certificate that generated the Cribl Stream server certificate must be the same root CA that signed all client certificates that will be forwarding Windows events to this Source. If the issuing CA is an intermediate CA, this CA must also match on the server and all client certs.

Common name: Regex matching subject common names in peer certificates allowed to connect. Defaults to `.*`. Matches on the substring after `CN=`. As needed, escape regex tokens to match literal characters. E.g., to match the subject `CN=worker.cribl.local`, you would enter: `worker\.cribl\.local`.

Minimum TLS version: Optionally, select the minimum TLS version to accept from connections.

Maximum TLS version: Optionally, select the maximum TLS version to accept from connections.

Verify certificate via OCSP: If toggled to `Yes`, Cribl Stream will use an OCSP (Online Certificate Status Protocol) service to check that client certificates presented in incoming requests have not been revoked. Exposes this additional toggle:

Strict validation: If enabled, Cribl Stream will fail checks on **any** OCSP error. Otherwise, Cribl Stream will fail checks only when a certificate is revoked, and will ignore other errors (such as `OCSP server is unavailable` errors).

Kerberos Authentication Settings

To implement Kerberos authentication, you must first prepare your environment.

Service principal name: Specify the full service principal name, in the form `HTTP/<fully qualified domain name>@REALM`. This is case-sensitive.

Keytab location: Specify the path to the keytab file containing the service principal credentials. Cribl Stream will use `/etc/krb5.keytab` if you do not specify a different keytab file.

> Kerberos authentication is disabled for Cribl-managed Cribl.Cloud Workers, but it is enabled for on-prem Worker Groups, whether the Leader is based in Cribl.Cloud or on-prem.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Subscriptions

Click **Add Subscription** to define a new subscription. At least one subscription is required, and has the following options:

Name: A friendly name for the subscription, which is only used to help you identify it.

Version: A read-only field which will be populated when the Source is saved, and will be assigned a new value any time new changes are made to the subscription that affect how a client interprets the subscription.

Format: You can choose `Raw` to receive only XML data about the subscribed events, or `RenderedText` to additionally include amplifying information generated by the client about the event's contents.

Heartbeat: The maximum allowable time, in seconds, before the client will check in with Cribl Stream even if it has no new events to send.

Batch timeout: The maximum time, in seconds, that the client should aggregate new events before sending them to Cribl Stream.

> Windows Event Collector defines two delivery modes of "Event Delivery Optimization":
>
> - The "Minimize Bandwidth" mode corresponds to a **Heartbeat** and **Batch timeout** of 6 hours (21,600 seconds).
> - The "Minimize Latency" mode corresponds to a **Heartbeat** of 1 hour (3,600 seconds) and a **Batch timeout** of 30 seconds.

Read existing events: Control whether historical events should be sent by the client when it first connects. If set to `No`, only events generated by the client after the subscription is received will be forwarded. If set to `Yes`, the behavior depends on the **Use bookmarks** setting:

- If **Use bookmarks** is set to `No`, then each time a client *forcibly* renews its subscription (e.g., after group policy update), all events matching the query will be sent. Restarting Cribl Stream or restarting the client will not cause all events to be re-sent.
- If **Use bookmarks** is set to `Yes`, then when the client receives a subscription for the first time, it will send all historical events matching the query, but on subsequent (even forced) resubscriptions, it will only send events later than the saved bookmark.
- In either case, if a subscription is changed and saved, the saved bookmarks are no longer valid (they are tied to a specific subscription version), and all events matching the updated subscription will be sent.

Use bookmarks: If toggled to `Yes`, Cribl Stream will keep track of which events have been received, resuming from that point even if the client forcibly re-subscribes. If set to `No`, a client (re-)subscribing will either send all historical events, or send only events subsequent to the subscription, depending on the **Read existing events** setting.

Compression: Sets whether Windows clients compress the events sent to Cribl Stream, using the Streaming Lossless Data Compression (SLDC) algorithm. Defaults to `Yes`.

Queries: See the explanation in Configuring Queries below.

Query builder mode: See the explanation in Configuring Queries below.

Targets: Set the DNS names of the clients that should receive this subscription. Wildcard-matching is supported.

Configuring Queries

Queries determine which events to send from the clients. **At least one query is required.** The format is derived from the XPath implementation used by Windows Event Collector. You have two **Query builder mode** options: **Simple** or **Raw XML**.

Select **Raw XML** if you have an existing XPath query. Paste your query into the **XML query** field.

Select **Simple** if you need to manually build queries. Click **Add Query** to define each new query. A query has the following properties:

- **Path**: Set this to the `Path` attribute of a `Select` XPath element. See the example below.
- **Query expression**: Set this to the value inside a `Select` XPath element. See the example below.

With either a **Simple** or **Raw XML** query, you can use the **Targets** field to enter the DNS names of the endpoints that should forward these events. Supports wildcards (e.g., `*.mydomain.com`). The default global wildcard (`*`) enables all endpoints.

> If you have both **Simple** and **Raw XML** queries defined within a given Subscription, the **Query builder mode** button that you select when saving this Source's configuration determines which query/queries Cribl Stream will send. To send both **Simple** and **Raw XML** queries, use the **Add Subscription** button to define multiple subscriptions.

Example

When creating a subscription in a Windows Event Collector, you can view the generated XML/XPath query. Consider a subscription that returns all events from the Security log that are of severities Critical, Error, or Warning, and that occurred within the last 24 hours. This subscription would generate XML like this:

```
<QueryList>
  <Query Id="0" Path="Security">
    <Select Path="Security">*[System[(Level=1  or Level=2 or Level=3) and
TimeCreated[timediff(@SystemTime) &lt;= 86400000]]]</Select>
  </Query>
</QueryList>
```

To use this subscription in a Cribl Stream Windows Event Forwarder Source, you would either use the **Raw XML** option and paste the above XML, or use **Simple** mode and set the following query properties:

- **Path**: `Security`
- **Query expression**: `*[System[(Level=1 or Level=2 or Level=3) and TimeCreated[timediff(@SystemTime) <= 86400000]]]`

> You do not need to use the `<Query>` element's `Id` or `Path` attributes anywhere in the Cribl Stream subscription config.

Persistent Queue Settings

In this section, you can optionally specify persistent queue storage, using the following controls. This will buffer and preserve incoming events when a downstream Destination is down, or exhibiting backpressure.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Enable Persistent Queue** toggle. If enabled, PQ is automatically configured in `Always On` mode, with a maximum queue size of 1 GB disk space allocated per Worker Process.

Enable Persistent Queue: Defaults to `No`. When toggled to `Yes`:

Mode: Select a condition for engaging persistent queues.

- `Always On`: This default option will always write events to the persistent queue, before forwarding them to Cribl Stream's data processing engine.
- `Smart`: This option will engage PQ only when the Source detects backpressure from Cribl Stream's data processing engine.

Max buffer size: The maximum number of events to hold in memory before reporting backpressure to the Source. Defaults to `1000`.

Commit frequency: The number of events to send downstream before committing that Stream has read them. Defaults to `42`.

Max file size: The maximum data volume to store in each queue file before closing it and (optionally) applying the configured **Compression**. Enter a numeral with units of KB, MB, etc. If not specified, Cribl Stream applies the default `1 MB`.

Max queue size: The maximum amount of disk space that the queue is allowed to consume, on each Worker Process. Once this limit is reached, Cribl Stream will stop queueing data, and will apply the **Queue-full behavior**. Enter a numeral with units of KB, MB, etc. If not specified, the implicit `0` default will enable Cribl Stream to fill all available disk space on the volume.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this field's specified path, Cribl Stream will append `/<worker-id>/inputs/<input-id>`.

Compression: Optional codec to compress the persisted data after a file is closed. Defaults to `None`; `Gzip` is also available.

> As of Cribl Stream 4.1, Source-side PQ's default **Mode** changed from `Smart` to `Always on`. This option more reliably ensures events' delivery, and the change does not affect existing Sources' configurations. However:
>
> - If you create Stream Sources programmatically, and you want to enforce the previous `Smart` mode, you'll need to update your existing code.
> - If you enable `Always on`, this can reduce data throughput. As a trade-off for data durability, you might need to either accept slower throughput, or provision more machines/faster disks.
> - You can optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Pre-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

Advanced Settings

Allow MachineID mismatch: Set this to `Yes` if you do not want to verify that the events sent by a client match the client's certificate Common Name (Subject CN). If set to `No`, events where the `MachineID` (by default the client's machine name, like `CLIENT1.domainName.com`) do not match the CN will be rejected.

This setting applies only to client certificate authentication. If you use Kerberos authentication, this option will not appear and will be treated as a `No` value.

Enable proxy protocol: Toggle to `Yes` if the connection is proxied by a device that supports Proxy Protocol v1 or v2. This setting affects how the Source handles the `__srcIpPort` field.

Capture request headers: Toggle this to `Yes` to add request headers to events, in the `__headers` field.

Max active requests: Maximum number of active requests allowed for this Source, per Worker Process. Defaults to `256`. Enter `0` for unlimited.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Socket timeout (seconds): How long Cribl Stream should wait before assuming that an inactive socket has timed out. The default `0` value means wait forever.

Keep-alive timeout (seconds): After the last response is sent, Cribl Stream how long to wait for additional data before closing the socket connection. Defaults to `5` seconds; minimum is `1` second; maximum is `600` seconds (10 minutes).

The longer the timeout, the more Cribl Stream will reuse connections. The shorter the timeout, the closer Cribl Stream gets to creating a new connection for every request. When request frequency is high, you can use longer timeouts to reduce the number of connections created, which mitigates the associated cost.

CA fingerprint override: Use this setting only if the first certificate in the configured CA chain does not match the SHA1 fingerprint that the WEF client expects. If that is the case, enter the expected SHA1 fingerprint.

This setting only applies to client certificate authentication. It is ignored if you use Kerberos authentication.

Timeout Considerations for Kerberos Authentication

If you use Kerberos authentication, there are some trade-offs you should consider when you select settings in **Subscriptions** > **Batch timeout** and **Advanced Settings** > **Keep-alive timeout (seconds)**.

Windows expects socket connections to be long-lived for Kerberos authentation so it can avoid the overhead of performing the two-step Kerberos authentication on each new batch delivery.

If the socket timeout has elapsed between event deliveries, Cribl Stream will still handle it gracefully, but a small additional overhead is incurred.

Setting **Keep-alive timeout** >= **Batch timeout** will prevent this additional re-authentication step, but it also means that Cribl Stream will maintain open socket connections for each client for longer, which could cause it to hit the limit set by **Advanced Settings** > **Max active requests**. As a result, Cribl Stream will no longer accept additional connections for a given worker process.

Keeping the **Keep-alive timeout** low (such as the default 5 seconds) will minimize Cribl Stream memory usage (due to long-lived open connections), but it will result in an additional network round-trip on each batch of events delivered.

Note that the **Subscriptions** > **Heartbeat** setting is unaffected by the above because Windows treats socket connections for heartbeat signals as one-time-use and immediately closes them.

Connected Destinations

Select **Send to Routes** to enable conditional routing, filtering, and cloning of this Source's data via the Routing table.

Select **QuickConnect** to send this Source's data to one or more Destinations via independent, direct connections.

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and Functions can use them to make processing decisions.

Fields for this Source:

- `__inputId`
- `__srcIpPort` – See details below.
- `__subscriptionName`
- `__subscriptionVersion`
- `__headers` – Added only when **Advanced Settings** > **Capture request headers** is set to `Yes`.

Overriding `__srcIpPort` with Client IP/Port

The `__srcIpPort` field's value contains the IP address and (optionally) port of the WEF client sending data to this Source.

When any proxies (including load balancers) lie between the WEF client and the Source, the last proxy adds an `X-Forwarded-For` header whose value is the IP/port of the original client. With multiple proxies, this header's value will be an array, whose first item is the original client IP/port.

If `X-Forwarded-For` is present, and **Advanced Settings** > **Enable proxy protocol** is set to `No`, the original client IP/port in this header will override the value of `__srcIpPort`.

If **Enable proxy protocol** is set to `Yes`, the `X-Forwarded-For` header's contents will **not** override the `__srcIpPort` value. (Here, the upstream proxy can convey the client IP/port without using this header.)

Configuring Upstream Clients/Senders

This section summarizes how to configure Windows endpoints/senders to forward events to this Cribl Stream Source. You can find basic instructions for setting up WEF (in a traditional Windows environment) in this Microsoft guide. You can generally follow that guide's "non-domain" section to correctly configure the endpoints/senders.

> For a complete walk-through of generating certificates, setting permissions and policies, and ingesting Windows Event subscriptions and data through Cribl.Cloud, see Cribl's Configuring WEF for Cribl Stream topic.

1. Set up Cribl Stream's Windows Event Forwarder Source as outlined above. The CA certificate you use should be the issuing authority both for the server certificate, and for all client certs you plan to have forwarding events to this Source.

2. Ensure that your existing Windows Event Collector is receiving events correctly from whatever endpoints and subscriptions you already have in place.

3. For client certificate authentication only: Find the fingerprint of the CA cert you are using for this Source, via a tool like `certutil` or `certlm` on Windows, or `openssl` on other operating systems. You'll need this in the next step.

4. Edit the group policy for endpoints you want to forward to this Source:

    - Under **Computer Configuration > Administrative Templates > Windows Components > Event Forwarding**, modify the **Configure target Subscription Manager** setting.

    - Add a Subscription Manager with a value like: `Server=https://<cribl-instance>:<wef-source-port>/wsman/SubscriptionManager/WEC,Refresh=<desired refresh interval>,IssuerCA=<CA cert fingerprint from above>`

        - For Kerberos authentication, use `http://`, not `https://`. Kerberos provides its own encryption and does not use TLS.
        - For Kerberos authentication, do not enter the `IssuerCA` portion.

    - Note that the path portion is the same as required for a WEC subscription, and is not configurable in Cribl Stream.

    - Ensure that the protocol is one of the following:

        - `https` for client certificate (mutual TLS) authentication.
        - `http` (for Kerberos authentication).

    - When complete, save the policy and apply it to affected endpoints.
5. Check that events are flowing into Cribl Stream now according to the configured subscriptions. If they are not:

    - Certificate authentication only: Verify that the clients can reach the Cribl Stream instance through the network to port 5986 (or other configured port) via TLS/HTTP. If clients are connecting to Cribl Stream via a proxy, you may need to set **Enable proxy protocol** to `Yes` (in the **Advanced** section of the Source configuration). Ensure that the correct outbound firewall port is opened on the client.

    - Certificate authentication only: Verify all of the following: that the certificate chain is correct; that the endpoints have a valid CRL encompassing the CA cert; that the CA cert is a trusted root on the clients; and that the server and client certs are issued by the same CA. The `CAPI2` Windows event log might reveal any errors here.

    - Certificate authentication or Kerberos authentication: Check Cribl Stream for any errors, as well as the `EventForwarding-Plugin` and `Windows Remote Management` event logs on the clients.

Preparing the Environment for Kerberos Authentication

This section documents the setup steps you need to take before configuring a Windows Event Forwarder Source for Kerberos authentication.

Initial Conditions and Assumptions

We assume that:

- The clients that will be sending events are in a Windows domain. In this example, the domain is `contoso.com`, the NETBIOS name is `CONTOSO`, and the domain controller is `DC01.contoso.com`.

- Kerberos KDC is already configured and working on the domain, and WEC with Kerberos authentication already works on the domain.

- You have an x86-64 Worker Node to which you have shell access. This guide assumes a recent Ubuntu distribution.

- The fully qualified domain name (FQDN) of this example Worker Node is `worker1.contoso.com`.

Initial Setup for the Worker Node

To set up the Worker Node:

1. Ensure that the Worker Node can resolve the domain controller's FQDN. You can test it with: `ping DC01.contoso.com`.
2. Ensure that the Worker Node's `hostname` is set to the FQDN. If it's not, you can set it with `hostnamectl set-hostname worker1.contoso.com`.
3. Ensure the Worker Node has its clock synchronized with the domain controller.
4. Install the `krb5-user` package and configure Kerberos to correctly identify your domain. Here's an example configuration (`/etc/krb5.conf`).

```
[libdefaults]
default_realm = CONTOSO.COM

[realms]
  CONTOSO.COM = {
    kdc = DC01.contoso.com
    admin_server = DC01.contoso.com
  }

[domain_realm]
  .contoso.com = CONTOSO.COM
  contoso.com = CONTOSO.COM
```

Setup for the Domain Controller

To set up the domain controller:

1. Set up forward and reverse DNS for the Worker Node's FQDN (i.e., both A and PTR records).
2. Both `nslookup worker1.contoso.com` and `nslookup <worker's IP>` should work.
3. Create a domain user for the Worker Node. This guide assumes the user is called `svc-stream-worker1`.
4. Set the user's password to never expire.
5. Under the user's **Properties** > **Account** tab, set both `This account supports Kerberos AES 128 bit encryption` and `This account supports Kerberos AES 256 bit encryption`.

Keytab Export

To export the keytab:

1. Export a keytab file for this user, which will also create the appropriate service principal name (SPN). The keytab will be exported to the root of the user profile running the command.

2. Open an elevated PowerShell prompt on the domain controller.

3. Run `ktpass /princ http/worker1.contoso.com@CONTOSO.COM /pass <password> /mapuser CONTOSO\svc-stream-worker1 /crypto AES256-SHA1 /ptype KRB5_NT_PRINCIPAL /out worker1.contoso.com.keytab`.

4. Note the SPN created here (in this example, `http/worker1.contoso.com@CONTOSO.COM`) as you will need it later. This SPN is case-sensitive.

5. Copy the keytab file to the Cribl Stream Worker Node. Carefully note the file's location on the Worker Node, because you will need it later.

> If you rotate passwords on this user service account, you'll need to export a new keytab file and merge or replace the keytab on each Worker Node. Microsoft describes a general method for this task. The Microsoft method is for a different service, but it explains the general principles. You could also use a tool like `msktutil`.

Setup for the Windows Event Forwarder Source

The general setup for creating subscriptions is the same as documented in Subscriptions.

When you create the Source, select the `Kerberos` authentication option. Specify the SPN and keytab file location that you set above in Keytab Export. The SPN is case-sensitive, and must be exactly in the form used to export the keytab.

Setup for the Windows Event Forwarding Target

To set up the Windows event forwarding target, you'll need to create group policy objects (GPOs) for the subscription target, the WinRM service, and the NETWORK SERVICE.

Create a GPO for the Subscription Target

1. Access the UI **Computer Configuration** > **Administrative Templates** > **Windows Components** > **Event Forwarding** > **Configure target Subscription Manager**.

2. Set to `Enabled`.

3. Go to **Subscription Managers** > **Show**.

4. Add `Server=http://worker1.contoso.com:5985/wsman/SubscriptionManager/WEC,Refresh=60` to the list.

Create a GPO for the WinRM Service

1. If you haven't already done so, create a GPO to auto-start the WinRM service on the client machines:

2. Access the UI **Computer Configuration** > **Policies** > **Windows Settings** > **Security Settings** > **System Services** > **Windows Remote Management (WS-Management)**.

3. Set **Startup type** to `Automatic`.

Create a GPO for the NETWORK SERVICE

1. If you haven't already done so, create a GPO so that the NETWORK SERVICE can read event logs (required if you want to subscribe to the Security event log):

2. Access the UI **Computer Configuration** > **Policies** > **Windows Settings** > **Security Settings** > **Restricted Groups**.

3. In the right pane, right-click and select **Add Group**.

4. Enter `Event Log Readers` as the group name.

5. Under `Members of this group`, click **Add**.

6. Enter `NETWORK SERVICE` as the member name.

> For the change to take effect, you'll have to restart computers after you apply this GPO.

When you have finished up your environment, select the appropriate settings for Kerberos authentication.

Troubleshooting

When using auto-enroll, the `Eventlog-ForwardingPlugin Operational` logs might display an error of this form:

```
If Kerberos mechanism is used, verify that the client computer and the destination computer are joined to a domain.
```

To resolve this error: In your auto-enroll template's **Client-Server Authentication Properties**, make sure the **Subject Name format** is set to **Common name**.

11. Destinations

Cribl Stream can send data to various Destinations, including Splunk, Kafka, Kinesis, InfluxDB, Snowflake, Databricks, TCP JSON, and many others. Destinations can write data to either IPv4 or IPv6 addresses.

Streaming Destinations

Destinations that accept events in real time are referred to as streaming Destinations:

- Amazon CloudWatch Logs
- Amazon Kinesis Streams
- Amazon MSK
- Amazon SQS
- Azure Event Hubs
- Azure Monitor Logs
- Azure Sentinel
- Confluent Cloud
- Cribl HTTP
- Cribl TCP
- CrowdStrike Falcon LogScale
- Datadog
- DataSet
- Elasticsearch

- Google Chronicle
- Google Cloud Logging
- Google Cloud Pub/Sub
- Grafana Cloud
- Graphite
- Honeycomb
- InfluxDB
- Kafka
- Loki
- New Relic Events
- New Relic Logs & Metrics
- OpenTelemetry (OTel)
- Prometheus
- SignalFx
- SNMP Trap
- Splunk HEC
- Splunk Load Balanced
- Splunk Single Instance
- StatsD
- StatsD Extended
- Sumo Logic
- Syslog
- TCP JSON
- Wavefront
- Webhook

Non-Streaming Destinations

Destinations that accept events in groups or batches are referred to as non-streaming Destinations:

- Amazon S3 Compatible Stores
- Data Lakes > Amazon S3
- Data Lakes > Amazon Security Lake
- Azure Blob Storage
- Filesystem/NFS

- Google Cloud Storage
- MinIO

> The Amazon S3 Compatible Stores Destination can be adapted to send data to downstream services like Databricks and Snowflake, for which Cribl Stream currently has no preconfigured Destination. For details, please contact Cribl Support.

Internal and Special-Purpose Destinations

These special-purpose Destinations route data within your Cribl Stream deployment, or among Workers across distributed or hybrid Cloud deployments:

- Default: Specify a default output from among your configured Destinations.
- Output Router: A "meta-Destination." Configure rules that route data to multiple configured Destinations.
- DevNull: Simply drops events. Preconfigured and active when you install Cribl Stream, so it requires no configuration. Useful for testing.
- Cribl HTTP: Send data among peer Worker Nodes over HTTP.
- Cribl TCP: Send data among peer Worker Nodes over TCP.
- Cribl Stream (Deprecated): Use either Cribl HTTP or Cribl TCP instead.
- **SpaceOut**: This experimental Destination is undocumented. Be careful!

How Does Non-Streaming Delivery Work

Cribl Stream uses a staging directory in the local filesystem to format and write outputted events before sending them to configured Destinations. After a set of conditions is met – typically file size and number of files, further details below – data is compressed and then moved to the final Destination.

An inventory of open, or in-progress, files is kept in the staging directory's root, to avoid having to walk that directory at startup. This can get expensive if staging is also the final directory. At startup, Cribl Stream will check for any leftover files in progress from prior sessions, and will ensure that they're moved to their final Destination. The process of moving to the final Destination is delayed after startup (default delay: 30 seconds). Processing of these files is paced at one file per service period (which defaults to 1 second).

Batching Conditions

Several **conditions** govern when files are closed and rolled out:

1. File reaches its configured maximum size.
2. File reaches its configured maximum open time.
3. File reaches its configured maximum idle time.

If a new file needs to be open, Cribl Stream will enforce the maximum number of open files, by closing files in the order in which they were opened.

Data Delivery and Persistent Queues

Cribl Stream attempts to deliver data to all Destinations on an at-least-once basis. When a Destination is unreachable, there are three possible behaviors:

- **Block** - Cribl Stream will block incoming events.
- **Drop** - Cribl Stream will drop events addressed to that Destination.
- **Queue** - To prevent data loss, Cribl Stream will write events to a **Persistent Queue** disk buffer, then forward them when a Destination becomes available. (Available on several streaming Destinations.)

You can configure your desired behavior through a Destination's **Backpressure Behavior** drop-down. Where other options are not displayed, Cribl Stream's default behavior is **Block**. For details about all the above behaviors and options, see Persistent Queues.

Configuring Destinations

For each Destination **type**, you can create multiple definitions, depending on your requirements.

To configure Destinations, in single-instance deployments, select **Manage**, then proceed to the options below. In distributed deployments, first click **Manage**, then select a **Worker Group** to configure and choose one of the options below.

- To access the graphical QuickConnect UI, click **Destinations**. Next, select the desired type, and then click either **Add New** or (if displayed) Select **Existing**.
- To access the Routing UI, click **Data** > **Destinations**. On the resulting **Manage Destinations** page's tiles, select the desired type, then click **Add New**.

To edit any Destination's definition in a JSON text editor, click **Manage as JSON** at the bottom of the **New Destination** modal, or on the **Configure** tab when editing an existing Destination. You can directly edit multiple values, and you can use the **Import** and **Export** buttons to copy and modify existing Destination configurations as `.json` files.

Capturing Outgoing Data

To capture data from a single enabled Destination, you can bypass the Preview pane, and instead capture directly from a **Manage Destinations** page. Just click the **Live** button beside the Destination you want to capture.

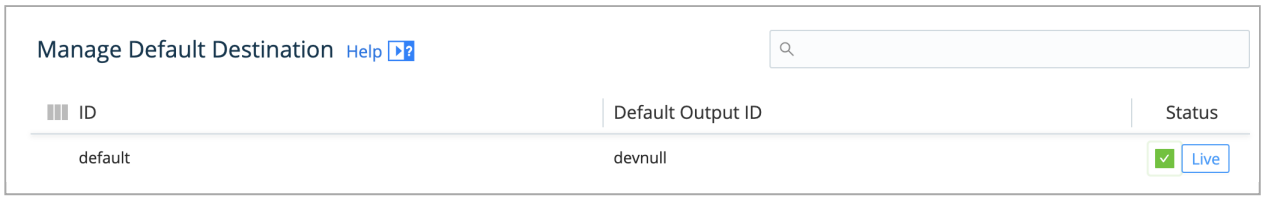

Destination > Live button

You can also start an immediate capture from within an enabled Destination's config modal, by clicking the modal's **Live Data** tab.

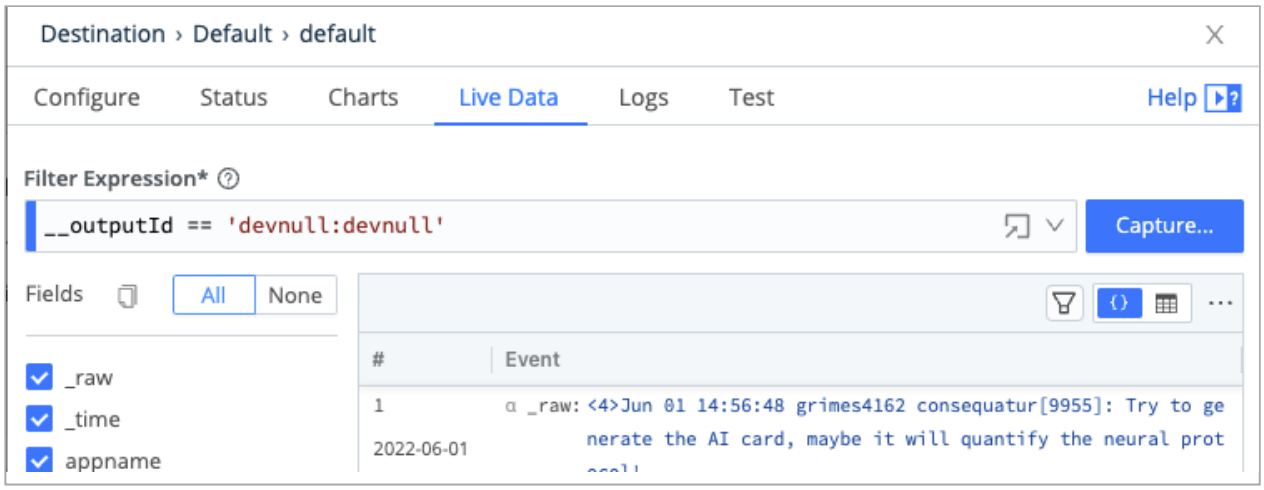

Destination modal > Live Data tab

11.1. Amazon

11.1.1. Amazon CloudWatch Logs

Cribl Stream supports sending data to Amazon CloudWatch Logs. Cribl Stream does **not** have to run on AWS in order to deliver data to CloudWatch Logs.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Amazon CloudWatch Logs

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Amazon** > **CloudWatch Logs**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Amazon** > **CloudWatch Logs**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this CloudWatch definition.

Log group name: CloudWatch log group to associate events with.

Log stream prefix: Prefix for CloudWatch log stream name. This prefix will be used to generate a unique log stream name per Cribl Stream instance. (E.g., `myStream_myHost_myOutputId`.)

Region: AWS region where the CloudWatch Logs group is located.

Optional Settings

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the

throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Authentication

Use the **Authentication Method** buttons to select an AWS authentication method.

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select an API key/secret key pair that you've configured in Cribl Stream's secrets manager. A **Create** link is available to store a new, reusable secret.

Assume Role

Enable for CloudWatch Logs: Toggle to `Yes` to use Assume Role credentials to access CloudWatch Logs.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Endpoint: CloudWatch Logs service endpoint. If empty, defaults to AWS' Region-specific endpoint. Otherwise, use this field to point to a CloudWatchLogs-compatible endpoint.

> To proxy outbound HTTP/S requests, see System Proxy Configuration.

Signature version: Signature version to use for signing CloudWatch Logs requests. Defaults to `v4`.

Max queue size: Maximum number of queued batches before blocking. Defaults to `5`.

Max record size (KB, uncompressed): Maximum size of each individual record before compression. For non-compressible data, 1MB (the default) is the maximum recommended size.

Flush period (sec): Maximum time between requests. Low settings could cause the payload size to be smaller than its configured maximum.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

How the Amazon CloudWatch Logs Destination Batches Events

Amazon CloudWatch Logs specifies that a batch of log events in a single request cannot span more than 24 hours.

When the Amazon CloudWatch Logs Destination transmits a batch of events, it notes the most recent event in the batch (by date-time) and drops all events in the batch that are 24 hours older (or more) than the most recent event.

To monitor dropped events, check **Out of Range Dropped Event Count** under **Status**. Alternately, you can monitor a debug log action to flag how many events are being dropped in a batch.

11.1.2. Amazon Kinesis Streams

Cribl Stream can output events to **Amazon Kinesis Data Streams** records of up to 1MB uncompressed. Cribl Stream does **not** have to run on AWS in order to deliver data to a Kinesis Data Stream.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Amazon Kinesis Data Streams

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Amazon** > **Kinesis**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Amazon** > **Kinesis**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Kinesis definition.

Stream name: Enter the name of the Kinesis Data Stream to which to send events.

Region: Select the AWS Region where the Kinesis Data Stream is located.

Optional Settings

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** drops the newest events from being sent out of Cribl Stream, and throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Authentication

Use the **Authentication Method** buttons to select an AWS authentication method.

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select an API key/secret key pair that you've configured in Cribl Stream's secrets manager. A **Create** link is available to store a new, reusable secret.

Assume Role

Enable for Kinesis Streams: Toggle to `Yes` to use Assume Role credentials to access Kinesis Streams.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Endpoint: Kinesis Stream service endpoint. If empty, the endpoint will be automatically constructed from the region.

> To proxy outbound HTTP/S requests, see System Proxy Configuration.

Signature version: Signature version to use for signing Kinesis stream requests. Defaults to `v4`.

Put request concurrency: Maximum number of ongoing put requests before blocking. Defaults to `5`.

Max record size (KB, uncompressed): Maximum size of each individual record before compression. For non-compressible data, 1MB (the default) is the maximum recommended size.

Flush period (sec): Maximum time between requests. Low settings could cause the payload size to be smaller than its configured maximum.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Format

Currently, outputted events use the following record format:

- Header line containing information about the payload (currently supports one type, as shown below).
- Newline-Delimited JSON (that is, each Kinesis record will contain multiple events, in **ndjson** format).

Record payloads (including header and body) will be gzip-compressed, and then Kinesis will base64-encode them.

Sample Kinesis Record


```
{"format":"ndjson","count":8,"size":3960}
{"_raw":"07-03-2018 18:33:51.136 -0700 ERROR TcpOutputFd - Read error. Connection
reset by peer","_meta":"timestartpos::0 timeendpos::29 _subsecond::.136
date_second::51 date_hour::18 date_minute::33 date_year::2018 date_month::july
date_mday::3 date_wday::tuesday date_zone::-420 punct::--_::._-___-
__.____","_time":"1530668031","source":"/mnt-
big/ledion/hwf/var/log/foo/food.log","host":"ledion-
hwf","sourcetype":"food","index":"_internal","cribl_pipe":"foo2"}
{"_raw":"07-03-2018 18:33:51.136 -0700 INFO  TcpOutputProc - Connection to
127.0.0.1:10000 closed. Read error. Connection reset by
peer","_meta":"timestartpos::0 timeendpos::29 _subsecond::.136 date_second::51
date_hour::18 date_minute::33 date_year::2018 date_month::july date_mday::3
date_wday::tuesday date_zone::-420 punct::--_::._-____-
___...:_.__.____","_time":"1530668031","source":"/mnt-
big/ledion/hwf/var/log/foo/food.log","host":"ledion-
hwf","sourcetype":"food","index":"_internal","cribl_pipe":"foo2"}
...
```

11.1.3. Amazon S3 Compatible Stores

S3 is a non-streaming Destination type. Cribl Stream does **not** have to run on AWS in order to deliver data to S3.

Stores that are S3-compatible will also work with this Destination type. For example, the S3 Destination can be adapted to send data to services like Databricks and Snowflake, for which Cribl Stream currently has no preconfigured Destination. For these integrations, please contact Cribl Support.

> Type: Non-Streaming | TLS Support: Yes | PQ Support: No

Configuring Cribl Stream to Output to S3 Destinations

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Amazon** > **S3**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Amazon** > **S3**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this S3 definition.

S3 bucket name: Name of the destination S3 Bucket. This value can be a constant, or a JavaScript expression that will be evaluated only at init time. E.g., referencing a Global Variable: `myBucket-${C.vars.myVar}`.

> Event-level variables are not available for JavaScript expressions. This is because the bucket name is evaluated only at Destination initialization. If you want to use event-level variables in file paths, Cribl recommends specifying them in the **Partitioning Expression** field (described below), because this is evaluated for each file.

Staging location: Filesystem location in which to locally buffer files before compressing and moving to final destination. Cribl recommends that this location be stable and high-performance. (This field is not displayed or available on Cribl.Cloud-managed Worker Nodes.)

Key prefix: Root directory to prepend to path before uploading. Enter either a constant, or a JS expression (enclosed in single quotes, double quotes, or backticks) that will be evaluated only at init time.

Data format: The output data format defaults to `JSON`. `Raw` and `Parquet` are also available. Selecting `Parquet` (supported only on Linux, not Windows) exposes a **Parquet Settings** left tab, where you **must** configure certain options in order to export data in Parquet format.

Optional Settings

Region: Region where the S3 bucket is located.

Partitioning expression: JavaScript expression that defines how files are partitioned and organized. Default is date-based. If blank, Cribl Stream will fall back to the event's `__partition` field value (if present); or otherwise to the root directory of the **Output Location** and **Staging Location**.

Compress: Data compression format used before moving to final destination. Defaults to `gzip` (recommended). This setting is not available when **Data format** is set to `Parquet`.

File name prefix expression: The output filename prefix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `CriblOut`.

File name suffix expression: The output filename suffix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `` `.${C.env["CRIBL_WORKER_ID"]}.${__format}${__compression === "gzip" ? ".gz" : ""}` ``, where `__format` can be `json` or `raw`, and `__compression` can be `none` or `gzip`.

> To prevent files from being overwritten, Cribl appends a random sequence of 6 characters to the end of their names. File name prefix and suffix expressions do not bypass this behavior.
>
> For example, if you set the **File name prefix expression** to `CriblExec` and set the **File name suffix expression** to `.csv`, the file name might display as `CriblExec-adPRWM.csv` with `adPRWM` appended.

Backpressure behavior: Select whether to block or drop events when all receivers are exerting backpressure. (Causes might include an accumulation of too many files needing to be closed.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication Method** buttons to select one of these options:

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

The values for **Access key** and **Secret key** can be a constant, or a JavaScript expression (such as `${C.env.MY_VAR}`) enclosed in quotes or backticks, which allows configuration with environment variables.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select an API key/secret key pair that you've configured in Cribl Stream's secrets manager. A **Create** link is available to store a new, reusable secret.

Assume Role

Enable for S3: Toggle to `Yes` to use Assume Role credentials to access S3.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role. This is required only when assuming a role that requires this ID in order to delegate third-party access. For details, see AWS' documentation.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports `c*` wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Parquet Settings

To write out Parquet files, note that:

- Cribl Edge Workers support Parquet only when running on Linux, not on Windows.
- See Working with Parquet for pointers on how to avoid problems such as data mismatches.
- The S3 Collector currently does not support ingesting data in the Parquet format. Therefore, data that you export in Parquet format cannot be replayed via the Collector.

Parquet schema: Select a schema from the drop-down.

> If you need to modify a schema or add a new one, follow the instructions in our Parquet Schemas topic. These steps will propagate the freshest schema back to this drop-down.

Row group size: Set the target memory size for row group segments. Modify this value to optimize memory use when writing. Value must be a positive integer smaller than the **File size** value, with appropriate units. Defaults to `16 MB`.

Page size: Set the target memory size for page segments. Generally, set lower values to improve reading speed, or set higher values to improve compression. Value must be a positive integer smaller than the

Row group size value, with appropriate units. Defaults to `1 MB`.

Parquet version: Determines which data types are supported, and how they are represented. Defaults to `2.6`; `2.4` and `1.0` are also available.

Data page version: Serialization format for data pages. Defaults to `V2`. If your toolchain includes a Parquet reader that does not support `V2`, use `V1`.

Log invalid rows: Toggle to `Yes` to output up to 20 unique rows that were skipped due to data format mismatch. Log level must be set to `debug` for output to be visible.

Advanced Settings

Max file size (MB): Maximum uncompressed output file size. Files of this size will be closed and moved to final output location. Defaults to `32`.

Max file open time (sec): Maximum amount of time to write to a file. Files open for longer than this limit will be closed and moved to final output location. Defaults to `300`.

Max file idle time (sec): Maximum amount of time to keep inactive files open. Files open for longer than this limit will be closed and moved to final output location. Defaults to `30`.

Max open files: Maximum number of files to keep open concurrently. When this limit is exceeded, on any individual Worker Process, Cribl Stream will close the oldest open files, and move them to the final output location. Defaults to `100`.

> Cribl Stream will close files when **any** of the four above conditions is met.

Max concurrent file parts: Maximum number of parts to upload in parallel per file. Minimun part size is 5 MB. A value of `1` will upload the file's contents sequentially, with a maximum concurrency of `1`. Defaults to `4`.

Add Output ID: When set to `Yes` (the default), adds the **Output ID** field's value to the staging location's file path. This ensures that each Destination's logs will write to its own bucket.

> For a Destination originally configured in a Cribl Stream version below 2.4.0, the **Add Output ID** behavior will be switched **off** on the backend, regardless of this slider's state. This is to avoid losing any files pending in the original staging directory, upon Cribl Stream upgrade and restart. To enable this option for such Destinations, Cribl's recommended migration path is:
>
> - Clone the Destination.

- Redirect the Routes referencing the original Destination to instead reference the new, cloned Destination.

This way, the original Destination will process pending files (after an idle timeout), and the new, cloned Destination will process newly arriving events with **Add output ID** enabled.

Remove empty staging dirs: Toggle to `Yes` to delete empty staging directories after moving files. This prevents the proliferation of orphaned empty directories. When enabled, exposes this additional option:

- **Staging cleanup period**: How often (in seconds) to delete empty directories when **Remove staging dirs** is enabled. Defaults to `300` seconds (every 5 minutes). Minimum configurable interval is `10` seconds; maximum is `86400` seconds (every 24 hours).

Endpoint: S3 service endpoint. If empty, Cribl Stream will automatically construct the endpoint from the AWS Region. To access the AWS S3 endpoints, use the path-style URL format. You don't need to specify the bucket name in the URL, because Cribl Stream will automatically add it to the URL path. For details, see AWS' Path-Style Requests topic.

Object ACL: Object ACL (Access Control List) to assign to uploaded objects.

Storage class: Select a storage class for uploaded objects. Defaults to `Standard`. The other options are: `Reduced Redundancy Storage`; `Standard, Infrequent Access`; `One Zone, Infrequent Access`; `Intelligent Tiering`; `Glacier`; or `Deep Archive`.

Server-side encryption: Encryption type for uploaded objects – used to enable encryption on data at rest. Defaults to no encryption; the other options are `Amazon S3 Managed Key` or `AWS KMS Managed Key`.

AWS S3 always encrypts data in transit using HTTPS, with default one-way authentication from server to clients. With other S3-compatible stores (such as our native MinIO Destination), use an `https://` URL to invoke in-transit encryption. Two-way authentication is not required to get encryption, and requires clients to possess a certificate.

Signature version: Signature version to use for signing S3 requests. Defaults to `v4`.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`.

Verify if bucket exists: Toggle this to `No` if you can access files within the bucket, but not the bucket itself. This resolves errors of the form: `error initializing...Bucket does not exist.`

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Amazon S3 Permissions

The following permissions are needed to write to an Amazon S3 bucket:

- `s3:ListBucket`
- `s3:GetBucketLocation`
- `s3:PutObject`

Temporary Access via SSO Provider

You can use Okta or SAML to provide access to S3 buckets using temporary security credentials.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Field for this Destination:

- `__partition`

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Troubleshooting Resources

Cribl University offers an Advanced Troubleshooting > Destination Integrations: S3 short course. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Advanced Troubleshooting short courses and Troubleshooting Criblets.

See also AWS Sources/Destinations & S3-Compatible Stores for information on common errors.

11.1.4. Amazon SQS

Cribl Stream supports sending events to Amazon Simple Queuing Service.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Send Data to Amazon SQS

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Amazon** > **SQS**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Amazon** > **SQS**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this SQS Destination.

Queue name: The name, URL, or ARN of the SQS queue to send events to. This value must be a JavaScript expression (which can evaluate to a constant), enclosed in single quotes, double quotes, or backticks. To specify a non-AWS URL, use the format: `'{url}/<queueName>'`. (E.g., `':port/<myQueueName>'`.)

Queue type: The queue type used (or created). Defaults to `Standard`. `FIFO` (First In, First Out) is the other option.

Optional Settings

Message group ID: This parameter applies only to queues of type FIFO. Enter the tag that specifies that a message belongs to a specific message group. (Messages belonging to the same message group are processed in FIFO order.) Defaults to `cribl`. Use event field `__messageGroupId` to override this value.

Create queue: Specifies whether to create the queue if it does not exist. Defaults to `Yes`.

Region: Region where SQS queue is located.

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Authentication

Use the **Authentication Method** buttons to select an AWS authentication method.

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.

- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select an API key/secret key pair that you've configured in Cribl Stream's secrets manager. A **Create** link is available to store a new, reusable secret.

Assume Role

Enable for SQS: Toggle to `Yes` to use Assume Role credentials to access SQS.

AWS account ID: Enter the SQS queue owner's AWS account ID. Leave empty if the SQS queue is in the same AWS account where this Cribl Stream instance is located.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Endpoint: SQS service endpoint. If empty, the endpoint will be automatically constructed from the region.

Signature version: Signature version to use for signing SQS requests. Defaults to `v4`.

Max queue size: Maximum number of queued batches before blocking. Defaults to `100`.

Max record size (KB): Maximum size of each individual record. Per the SQS spec, the maximum allowed value is 256 KB. (the default).

Flush period (sec): Maximum time between requests. Low settings could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Max concurrent requests: The maximum number of in-progress API requests before backpressure is applied. Defaults to `10`.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

SQS Permissions

The following permissions are needed to write to an SQS queue:

- `sqs:ListQueues`
- `sqs:SendMessage`
- `sqs:SendMessageBatch`
- `sqs:CreateQueue`
- `sqs:GetQueueAttributes`
- `sqs:SetQueueAttributes`
- `sqs:GetQueueUrl`

Internal Fields

Cribl Stream uses a set of internal fields to assist in handling of data. These "meta" fields are **not** part of an event, but they are accessible, and functions can use them to make processing decisions.

Fields for this Destination:

- `__messageGroupId`
- `__sqsMsgAttrs`
- `__sqsSysAttrs`

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

11.2. Azure

11.2.1. Azure Blob Storage

Cribl Stream supports sending data to (and replaying specific events from) both Azure Blob Storage, and Azure Data Lake Storage Gen2, which implements a hierarchical namespace over blob data. This Destination can deliver data to Azure whether Cribl Stream is running on Azure, another cloud platform, or on-prem.

> Type: Non-Streaming | TLS Support: Yes | PQ Support: No

Configuring Cribl Stream to Output to Azure Blob Storage

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Azure** > **Blob Storage**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Azure** > **Blob Storage**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Destination definition.

Container name: Enter the container name. (A container organizes a set of blobs, similar to a directory in a file system.)

> Container names can include only lowercase letters, numbers, and/or hyphens (-). This restriction is imposed by Azure.

Blob prefix: Root directory to prepend to path before uploading.

Staging location: Local filesystem location in which to buffer files before compressing and moving them to the final destination. Cribl recommends that this location be stable and high-performance. (This field is not displayed or available on Cribl.Cloud-managed Worker Nodes.)

Data format: The output data format defaults to `JSON`. `Raw` and `Parquet` are also available. Selecting `Parquet` (supported only on Linux, not Windows) exposes a **Parquet Settings** left tab, where you **must** configure certain options in order to export data in Parquet format.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Use this default option to enter your Azure Storage connection string directly. Exposes a **Connection string** field for this purpose. (If left blank, Cribl Stream will fall back to `env.AZURE_STORAGE_CONNECTION_STRING`.)
- **Secret**: This option exposes a **Connection string (text secret)** drop-down, in which you can select a stored secret that references an Azure Storage connection string. A **Create** link is available to store a new, reusable secret.

Connection String Format

Either authentication method uses an Azure Storage connection string in this format:

```
DefaultEndpointsProtocol=[http|https];AccountName=<your-account-name>;AccountKey=
<your-account-key>;EndpointSuffix=<your-endpoint-suffix>
```

A fictitious example, using Microsoft's recommended HTTPS option, is:

```
DefaultEndpointsProtocol=https;AccountName=storagesample;AccountKey=12345678...32;Endpo
```

Optional Settings

Create container: Toggle to `Yes` to create the configured container in Azure Blob Storage if one does not already exist.

Partitioning expression: JavaScript expression that defines how files are partitioned and organized. Default is date-based. If blank, Cribl Stream will fall back to the event's `__partition` field value (if present); or otherwise to the root directory of the **Output Location** and **Staging Location**.

Compress: Data compression format used before moving to final destination. Defaults to `gzip` (recommended). This setting is not available when **Data format** is set to `Parquet`.

File name prefix expression: The output filename prefix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `CriblOut`.

File name suffix expression: The output filename suffix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `` `.${C.env["CRIBL_WORKER_ID"]}.${__format}${__compression === "gzip" ? ".gz" : ""}` ``, where `__format` can be `json` or `raw`, and `__compression` can be `none` or `gzip`.

> To prevent files from being overwritten, Cribl appends a random sequence of 6 characters to the end of their names. File name prefix and suffix expressions do not bypass this behavior.
>
> For example, if you set the **File name prefix expression** to `CriblExec` and set the **File name suffix expression** to `.csv`, the file name might display as `CriblExec-adPRWM.csv` with `adPRWM` appended.

Backpressure behavior: Whether to block or drop events when all receivers are exerting backpressure. (Causes might include an accumulation of too many files needing to be closed.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Parquet Settings

To write out Parquet files, note that:

- Cribl Edge Workers support Parquet only when running on Linux, not on Windows.
- See Working with Parquet for pointers on how to avoid problems such as data mismatches.

Parquet schema: Select a schema from the drop-down.

> If you need to modify a schema or add a new one, follow the instructions in our Parquet Schemas topic. These steps will propagate the freshest schema back to this drop-down.

Row group size: Set the target memory size for row group segments. Modify this value to optimize memory use when writing. Value must be a positive integer smaller than the **File size** value, with appropriate units. Defaults to `16 MB`.

Page size: Set the target memory size for page segments. Generally, set lower values to improve reading speed, or set higher values to improve compression. Value must be a positive integer smaller than the **Row group size** value, with appropriate units. Defaults to `1 MB`.

Parquet version: Determines which data types are supported, and how they are represented. Defaults to `2.6`; `2.4` and `1.0` are also available.

Data page version: Serialization format for data pages. Defaults to `V2`. If your toolchain includes a Parquet reader that does not support `V2`, use `V1`.

Log invalid rows: Toggle to `Yes` to output up to 20 unique rows that were skipped due to data format mismatch. Log level must be set to `debug` for output to be visible.

Advanced Settings

Max file size (MB): Maximum uncompressed output file size. Files reaching this size will be closed and moved to the final output location. Defaults to `32`.

Max file open time (sec): Maximum amount of time to write to a file. Files open for longer than this limit will be closed and moved to final output location. Defaults to `300`.

Max file idle time (sec): Maximum amount of time to keep inactive files open. Files open for longer than this limit will be closed and moved to final output location. Default: `30`.

Max open files: Maximum number of files to keep open concurrently. When exceeded, the oldest open files will be closed and moved to final output location. Default: `100`.

> Cribl Stream will close files when **either** of the `Max file size (MB)` or the `Max file open time (sec)` conditions are met.

Add Output ID: When set to `Yes` (the default), adds the **Output ID** field's value to the staging location's file path. This ensures that each Destination's logs will write to its own bucket.

> For a Destination originally configured in a Cribl Stream version below 2.4.0, the **Add Output ID** behavior will be switched **off** on the backend, regardless of this slider's state. This is to avoid losing any files pending in the original staging directory, upon Cribl Stream upgrade and restart. To enable this option for such Destinations, Cribl's recommended migration path is:
>
> - Clone the Destination.
> - Redirect the Routes referencing the original Destination to instead reference the new, cloned Destination.
>
> This way, the original Destination will process pending files (after an idle timeout), and the new, cloned Destination will process newly arriving events with **Add output ID** enabled.

Remove staging dirs: Toggle to `Yes` to delete empty staging directories after moving files. This prevents the proliferation of orphaned empty directories. When enabled, exposes this additional option:

- **Staging cleanup period**: How often (in seconds) to delete empty directories when **Remove staging dirs** is enabled. Defaults to `300` seconds (every 5 minutes). Minimum configurable interval is `10` seconds; maximum is `86400` seconds (every 24 hours).

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Field for this Destination:

- `__partition`

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

11.2.2. Azure Event Hubs

Cribl Stream supports sending data to Azure Event Hubs.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes
>
> Azure Event Hubs uses a binary protocol over TCP. It does not support HTTP proxies, so Cribl Stream must send events directly to receivers. You might need to adjust your firewall rules to allow this traffic.

See Microsoft's Compare Azure Event Hubs Tiers topic to configure tiers whose features and quotas match your desired data volume and throughput.

Configuring Cribl Stream to Output to Azure Event Hubs

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Azure** > **Events Hub**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Azure** > **Events Hub**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Azure Event Hubs definition.

Brokers: List of Event Hub Kafka brokers to connect to. (E.g., `yourdomain.servicebus.windows.net:9093`.) Find the hostname in Shared Access Policies, in the host portion of the primary or secondary connection string.

Event Hub name: The name of the Event Hub (a.k.a., Kafka Topic) on which to publish events. Can be overwritten using the `__topicOut` field.

Optional Settings

Acknowledgments: Control the number of required acknowledgments. Defaults to `Leader`.

Record data format: Format to use to serialize events before writing to the Event Hub Kafka brokers. Defaults to `JSON`.

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

TLS Settings (Client Side)

Enabled Defaults to `Yes`.

Validate server certs: Defaults to `No` – and for Event Hubs, this must always be disabled.

Authentication

Authentication parameters to use when connecting to brokers. Using TLS is highly recommended.

Enabled: With the default `Yes` setting, this section's remaining settings are displayed, and all are required settings.

SASL mechanism: SASL (Simple Authentication and Security Layer) authentication mechanism to use with Kafka brokers. Defaults to `PLAIN`, which exposes Basic Authentication options that rely on Azure Event Hubs connection strings. Select `OAUTHBREAKER` to enable OAuth Authentication via a different set of options.

Basic Authentication

Selecting the `PLAIN` SASL mechanism provides the options listed in this section.

Username: The username for authentication. For Event Hubs, this should always be `$ConnectionString`.

Authentication method: Use the buttons to select one of these options:

- **Manual**: Use this default option to enter your Event Hubs connection string's primary or secondary key from the Event Hubs workspace. Exposes a **Password** field for this purpose.
- **Secret**: This option exposes a **Password (text secret)** drop-down, in which you can select a stored secret that references an Event Hubs connection string. The secret can reside in Cribl Stream's internal secrets manager or (if enabled) in an external KMS. A **Create** link is available if you need a new secret.

Connection String Format

Either authentication method above uses an Azure Event Hubs connection string in this format:

```
Endpoint=sb://<FQDN>/;SharedAccessKeyName=<your-shared-access-key-name>;SharedAccessKey=<your-shared-access-key-value>
```

A fictitious example is:

```
Endpoint=sb://dummynamespace.servicebus.windows.net/;SharedAccessKeyName=DummyAccessKeyName;SharedAccessKey=5dOntTRytoC24opYThisAsit3is2B+OGY1US/fuL3ly=
```

OAuth Authentication

Selecting the `OAUTHBREAKER` SASL mechanism provides the options listed in this section.

Azure AD authentication endpoint: Specifies the Azure Active Directory endpoint from which to acquire authentication tokens. Defaults to `https://login.microsoftonline.com`. You can instead select `https://login.microsoftonline.us` or `https://login.partner.microsoftonline.cn`.

Client ID: Enter the `client_id` to pass in the OAuth request parameter.

Tenant identifier: Enter your Azure Active Directory subscription's directory ID (tenant ID).

Scope: Enter the scope to pass in the OAuth request parameter. This will be of the form: `https://<Event-Hubs-Namespace-Host-name>/.default`. (E.g., for an Event Hubs Namespace > Host name: `goatyoga.servicebus.windows.net`, **Scope**: `https://goatyoga.servicebus.windows.net/.default`.)

Authentication method: Use the buttons to select one of these options:

- **Manual**: This default option exposes a **Client secret** field, in which to directly enter the `client_secret` to pass in the OAuth request parameter.
- **Secret**: Exposes a **Client secret (text secret)** drop-down, in which you can select a stored secret that references the `client_secret`. A **Create** link is available to define a new secret.
- **Certificate**: Exposes a **Certificate name** drop-down, in which you can select a stored certificate. A **Create** link is available to define a new cert.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Max record size (KB, uncompressed): Maximum size (KB) of each record batch before compression. Setting should be < `message.max.bytes` settings in Kafka brokers. Defaults to `768`.

Max events per batch: Maximum number of events in a batch before forcing a flush. Defaults to `1000`.

Flush period (sec): Maximum time between requests. Low settings could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Connection timeout (ms): Maximum time to wait for a successful connection. Defaults to `10000` ms, i.e., 10 seconds. Valid range is `1000` to `3600000` ms, i.e., 1 second to 1 hour.

Request timeout (ms): Maximum time to wait for a successful request. Defaults to `60000` ms, i.e., 1 minute.

Max retries: Maximum number of times to retry a failed request before the message fails. Defaults to `5`; enter `0` to not retry at all.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Fields for this Destination:

- `__topicOut`

- `__key`
- `__headers`
- `__keySchemaIdOut`
- `__valueSchemaIdOut`

Troubleshooting Resources

Cribl University offers an Advanced Troubleshooting > Destination Integrations: Azure Event Hubs short course. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Advanced Troubleshooting short courses and Troubleshooting Criblets.

11.2.3. Azure Monitor Logs

Cribl Stream supports sending data to Azure Monitor Logs.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Azure Monitor Logs

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Azure** > **Monitor Logs**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Azure** > **Monitor Logs**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Azure Monitor Logs definition.

Log type: The Record Type of events sent to this LogAnalytics workspace. Defaults to `Cribl`. Use only letters, numbers, and `_` characters. (See Microsoft's Azure Monitor documentation.) Can be overwritten by an event's `__logType` field.

Authentication Settings

Authentication method: Use the buttons to select one of these options:

- **Manual**: Displays fields in which to enter your Azure Log Analytics **Workspace ID** and your Primary or Secondary Shared **Workspace key**. See the Azure Monitor documentation.
- **Secret**: This option exposes a **Secret key pair** drop-down, in which you can select a stored secret that references the credentials described above. A **Create** link is available to store a new, reusable secret.

Optional Settings

DNS name of API endpoint: Enter the DNS name of the Log API endpoint that sends log data to a Log Analytics workspace in Azure Monitor. Defaults to: `.ods.opinsights.azure.com`. Cribl Stream will add a prefix and suffix around this DNS name, to construct a URI in this format: `https://<Workspace_ID><your_DNS_name>/api/logs?api-version=<API version>`.

Resource ID: Resource ID of the Azure resource to associate the data with. This populates the `_ResourceId` property, and allows the data to be included in resource-centric queries. (Optional, but if this field is not specified, the data will not be included in resource-centric queries.)

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block**

option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096`.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low settings could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Azure Monitor Limitations

The Azure Monitor Logs architecture limits the number of columns per table, characters per column name, and other parameters. For details, see Microsoft's Azure Monitor Service Limits topic.

Azure will drop logs if your data exceeds these limits. To diagnose this, you can search in the Azure Data Explorer console with a query like this:

```
Operation | summarize count() by Detail
```

...for error messages of this form:

```
Data of type <type> was dropped: The number of custom fields <number> is above the limit of 500 fields per data type.
```

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, the connection will be thrown away, and a new one will be reattempted. This is to prevent sticking to a particular Destination when there is a constant flow of events.
- If keepalives are not supported by the server (or if the server closes a pooled connection while idle), a new connection will be established for the next request.
- When resolving the Destination's hostname, Cribl Stream will pick the first IP in the list for use in the next connection. Enable Round-robin DNS to better balance distribution of events between destination cluster nodes.

11.2.4. Azure Sentinel

Cribl Stream can send log and metric events to the Azure Sentinel SIEM. (These docs use the terms "Azure Sentinel" and "Microsoft Sentinel" interchangeably.)

> Type: Streaming | TLS Support: No | PQ Support: Yes

Configuring Cribl Stream to Output to Azure Sentinel

> See Azure Sentinel SIEM Integration for the overall procedure into which this topic's instructions fit.

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Azure Sentinel**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Azure Sentinel**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this HTTP output definition.

Endpoint configuration: Method for configuring the endpoint. Options include:

- **URL** – lets you directly enter the data collection endpoint.
- **ID** – lets you enter individual IDs.

Selecting `URL` exposes the following field.

URL: Endpoint URL to send events to. The internal field `__url`, where present in events, will override the `URL` and `ID` values. See Internal Fields below.

Selecting `ID` exposes the following fields.

Data collection endpoint: Data collection endpoint (DCE) in the format `https://<endpoint-name>.<identifier>.<region>.ingest.monitor.azure.com`.

Data collection route ID: Immutable ID for the data collection route (DCR).

Stream name: Name of the Sentinel table in which to store events.

Optional Settings

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

- **Login URL**: Endpoint for the OAuth API call, which is expected to be a POST call.
- **OAuth secret**: Secret parameter value to pass in the API call's request body.
- **Client ID**: JavaScript expression used to compute the application (client) ID for the Azure application. Can be a constant.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Reject certificates that are not authorized by a trusted CA (e.g., the system's CA). Toggle this to `No` if you want Cribl Stream to accept such certificates. Defaults to `Yes`.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: By default, Cribl Stream enables gzip-compress to compress the payload body before sending. Toggle this off if you want Cribl Stream not to gzip-compress the payload body.

Keep alive: By default, Cribl Stream sends `Keep-Alive` headers to the remote server and preserves the connection from the client side. Toggle this off if you want Cribl Stream to close the connection immediately after sending a request.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `1000` KB. Be aware that high values can cause high memory usage per Worker Node, especially if a dynamically constructed URL (see Internal Fields) causes this Destination to send events to more than one URL.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass to all events as additional HTTP headers. Values will be sent encrypted. You can also add headers dynamically on a per-event basis in the `__headers` field. See Internal Fields below.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Fields for this Destination:

- `__criblMetrics`
- `__url`
- `__headers`

If an event contains the internal field `__criblMetrics`, Cribl Stream will send it to the HTTP endpoint as a metric event. Otherwise, Cribl Stream will send it as a log event.

If an event contains the internal field `__url`, that field's value will override the **General Settings** > **URL** value. This way, you can determine the endpoint URL dynamically.

For example, you could create a Pipeline containing an Eval Function that adds the `__url` field, and connect that Pipeline to your Azure Sentinel Destination. Configure the Eval Function to set `__url`'s value to a URL that varies depending on a global variable, or on some property of the event, or on some other dynamically-generated value that meets your needs.

If an event contains the internal field `__headers`, that field's value will be a JSON object containing Name/Value pairs, each of which defines a header. By creating Pipelines that set the value of `__headers` according to conditions that you specify, you can add headers dynamically.

For example, you could create a Pipeline containing Eval Functions that add the `__headers` field, and connect that Pipeline to your Azure Sentinel Destination. Configure the Eval Functions to set `__headers` values to Name/Value pairs that vary depending on some properties of the event, or on dynamically-generated values that meet your needs.

Here's an overview of how to add headers:

- To add "dynamic" (a.k.a. "custom") headers to some events but not others, use the `__headers` field.
- To define headers to add to **all** events, use **Advanced Settings** > **Extra HTTP Headers**.
- An event can include headers added by both methods. So if you use `__headers` to add `{ "api-key": "foo" }` and **Extra HTTP Headers** to add `{ "goat": "Kid A" }`, you'll get both headers.
- Headers added via the `__headers` field take precedence. So if you use `__headers` to add `{ "api-key": "foo" }` and **Extra HTTP Headers** to add `{ "api-key": "bar" }`, you'll get only one header, and that will be `{ "api-key": "foo" }`.

Use Case

See Azure Sentinel Integration for more information on configuring an Azure Sentinel Destination to integrate with the Azure Sentinel SIEM.

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, it will throw away the connection and attempt a new one. This is to prevent sticking to a particular destination when there is a constant flow of events.
- If the server does not support keepalives (or if the server closes a pooled connection while idle), Cribl Stream will establish a new connection for the next request.
- When resolving the Destination's hostname, Cribl Stream will pick the first IP in the list for use in the next connection. Enable **Round-robin DNS** to better balance distribution of events among destination cluster nodes.

11.3. Data Lakes

11.3.1. Amazon S3

The **Data Lake Amazon S3 Destination** sends data to Amazon Simple Storage Service (**Amazon S3**) and uses a partitioning scheme that is designed to work with Cribl Search. You can organize your bucket structure by event fields for referencing in Cribl Search. See the Cribl Search setup for Data Lake Amazon S3 for details.

> Type: Non-Streaming | TLS Support: Yes | PQ Support: No

Configuring Cribl Stream to Output to S3 Destinations

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI. Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Data Lakes** > **Amazon S3**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations**. From the resulting page's tiles or the **Destinations** left nav, select **Data Lakes** > **Amazon S3**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this S3 definition.

S3 bucket name: Name of the destination S3 Bucket. This value can be a constant, or a JavaScript expression that will be evaluated only at init time. E.g., referencing a Global Variable: `myBucket-${C.vars.myVar}`.

Optional Settings

Partition by fields: List of fields to partition the path by, in addition to time, which is included automatically.

The partitioning scheme is designed to work with Cribl Search. This scheme optimizes how objects are searched relative to the search's time range.

In AWS S3, bucket content is returned in ascending alphanumeric order, by default, they are sorted "oldest-first". This Destination uses alpha characters to prefix objects, so ascending sort returns them in "newest-first" order, allowing Search to find files that will likely have the requested objects soonest.

The effective partition will be `<4-letters>-YYYY/<2-letters>-MM/<2-letters>-DD/<2-letters>-HH/<list/of/fields>`. For example, `hjhh-2023/ag-07/ai-25/aj-14/<field>/`.

Backpressure behavior: Select whether to block or drop events when all receivers are exerting backpressure. (Causes might include an accumulation of too many files needing to be closed.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication Method** buttons to select one of these options:

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

The values for **Access key** and **Secret key** can be a constant, or a JavaScript expression (such as `${C.env.MY_VAR}`) enclosed in quotes or backticks, which allows configuration with environment variables.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select an API key/secret key pair that you've configured in Cribl Stream's secrets manager. A **Create** link is available to store a new, reusable secret.

Assume Role

Enable for S3: Toggle to `Yes` to use Assume Role credentials to access S3.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role. This is required only when assuming a role that requires this ID in order to delegate third-party access. For details, see AWS' documentation.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports `c*` wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Max file size (MB): Maximum uncompressed output file size. Files of this size will be closed and moved to final output location. Defaults to `32`.

Max file open time (sec): Maximum amount of time to write to a file. Files open for longer than this limit will be closed and moved to final output location. Defaults to `300`.

Max file idle time (sec): Maximum amount of time to keep inactive files open. Files open for longer than this limit will be closed and moved to final output location. Defaults to `30`.

Max open files: Maximum number of files to keep open concurrently. When this limit is exceeded, on any individual Worker Process, Cribl Stream will close the oldest open files, and move them to the final output

location. Defaults to `100`.

> Cribl Stream will close files when **any** of the four above conditions is met.

Max concurrent file parts: Maximum number of parts to upload in parallel per file. Minimun part size is 5 MB. A value of `1` will upload the file's contents sequentially, with a maximum concurrency of `1`. Defaults to `4`.

Add Output ID: When set to `Yes` (the default), adds the **Output ID** field's value to the staging location's file path. This ensures that each Destination's logs will write to its own bucket.

> For a Destination originally configured in a Cribl Stream version below 2.4.0, the **Add Output ID** behavior will be switched **off** on the backend, regardless of this slider's state. This is to avoid losing any files pending in the original staging directory, upon Cribl Stream upgrade and restart. To enable this option for such Destinations, Cribl's recommended migration path is:
>
> - Clone the Destination.
> - Redirect the Routes referencing the original Destination to instead reference the new, cloned Destination.
>
> This way, the original Destination will process pending files (after an idle timeout), and the new, cloned Destination will process newly arriving events with **Add output ID** enabled.

Remove staging dirs: Toggle to `Yes` to delete empty staging directories after moving files. This prevents the proliferation of orphaned empty directories. When enabled, exposes this additional option:

- **Staging cleanup period**: How often (in seconds) to delete empty directories when **Remove staging dirs** is enabled. Defaults to `300` seconds (every 5 minutes). Minimum configurable interval is `10` seconds; maximum is `86400` seconds (every 24 hours).

Endpoint: S3 service endpoint. If empty, Cribl Stream will automatically construct the endpoint from the AWS Region. To access the AWS S3 endpoints, use the path-style URL format. You don't need to specify the bucket name in the URL, because Cribl Stream will automatically add it to the URL path. For details, see AWS' Path-Style Requests topic.

Object ACL: Object ACL (Access Control List) to assign to uploaded objects.

Storage class: Select a storage class for uploaded objects. Defaults to `Standard`. The other options are: `Reduced Redundancy Storage`; `Standard, Infrequent Access`; `One Zone, Infrequent Access`; `Intelligent Tiering`; `Glacier`; or `Deep Archive`.

Server-side encryption: Encryption type for uploaded objects – used to enable encryption on data at rest. Defaults to no encryption; the other options are `Amazon S3 Managed Key` or `AWS KMS Managed Key`.

> AWS S3 always encrypts data in transit using HTTPS, with default one-way authentication from server to clients. With other S3-compatible stores (such as our native MinIO Destination), use an `https://` URL to invoke in-transit encryption. Two-way authentication is not required to get encryption, and requires clients to possess a certificate.

Signature version: Signature version to use for signing S3 requests. Defaults to `v4`.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Amazon S3 Permissions

The following permissions are needed to read and write to an Amazon S3 bucket:

- `s3:GetObject`
- `s3:ListBucket`
- `s3:GetBucketLocation`
- `s3:PutObject`

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Field for this Destination:

- `__partition`

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

11.3.2. Amazon Security Lake

This Destination delivers data to Amazon Security Lake, a fully-managed security data lake service backed by Amazon S3 buckets.

> Type: Non-Streaming | TLS Support: Yes | PQ Support: No

Security Lake ingests events described by the Open Cybersecurity Schema Framework (OCSF) and conveyed as Parquet files. This Destination sends the Parquet files in batches. Cribl Stream does not read or replay the data sent to Security Lake.

> Cribl recommends that you start with the Amazon Security Lake Integration topic, which will guide you through the following steps in the correct order:
>
> 1. Set up Amazon Security Lake.
> 2. Set up Cribl Stream.
> 3. Create an Amazon Security Lake custom source, This is an S3 bucket dedicated to a single OCSF event class.
> 4. Create a Cribl Amazon Security Lake Destination.
> 5. Connect a Cribl Source to the Amazon Security Lake Destination.
> 6. Send data to Amazon Security Lake.
>
> As shown above, you'll create and configure this Destination as the fourth of the six overall steps. The Integration topic covers the key points about configuring this Destination. Meanwhile, refer to the present topic as needed for details about any given setting.

Although Cribl Stream does **not** need to be deployed in Cribl.Cloud in order to deliver data to Amazon Security Lake, setup procedures will differ from those documented here. To learn more, please contact Cribl via the `#packs` channel of Cribl Community Slack.

Configuring Cribl Stream to Output to Amazon Security Lake

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Data Lakes** > **Amazon Security Lake**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Data Lakes** > **Amazon Security Lake**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

> The Integration topic should be your primary guide to setting up Amazon Security Lake. For that reason, some of the instructions below assume that you have noted IDs, values, etc., from procedures you have already completed as directed by the Integration topic.

Output ID: Enter a unique name to identify this Amazon Security Lake Destination definition.

S3 bucket name: Name of the destination S3 Bucket you created when setting up Amazon Security Lake. This value can be a constant, or a JavaScript expression that will be evaluated only at init time. E.g., referencing a Global Variable: `myBucket-${C.vars.myVar}`.

> Event-level variables are not available for JavaScript expressions. This is because the bucket name is evaluated only at Destination initialization.

Region: Region where the Amazon Security Lake is located.

Account ID: The ID of the AWS Account whose admin enabled Amazon Security Lake.

Custom source name: The name of the custom source you created in Amazon Security Lake to receive data from this Destination.

Staging location: Filesystem location in which to locally buffer files before compressing and moving to final destination. Cribl recommends that this location be stable and high-performance. (This field is not displayed or available on Cribl.Cloud-managed Worker Nodes.)

Optional Settings

File name prefix expression: The output filename prefix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `CriblOut`.

Backpressure behavior: Select whether to block or drop events when all receivers are exerting backpressure. (Causes might include an accumulation of too many files needing to be closed.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

For the **Authentication Method**, you **must** leave the default **Auto** method selected.

This method uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance. The attached IAM role grants Cribl Stream Worker Nodes access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Assume Role

For these settings, you'll enter values that you noted when creating the custom source in Security Lake.

AssumeRole ARN: The custom source's **Provider role ARN**.

External ID: In the custom source, this is the value of the `ExternalId` element of the trust relationship JSON object.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output. Use the drop-down to select the Pack you installed when setting up Cribl Stream.

System fields: Remove any fields specified here.

Parquet Settings

Note that:

- Cribl Edge Workers support Parquet only when running on Linux, not on Windows.

Row group size: Ideal memory size for row group segments. E.g., 128 MB or 1 GB. Affects memory use when writing. Imposes a target, not a strict limit; the final size of a row group may be larger or smaller. Defaults to 16 MB.

Page size: Ideal memory size for page segments. E.g., 1 MB or 128 MB. Generally, lower values improve reading speed, while higher values improve compression. Imposes a target, not a strict limit; the final size of a row group may be larger or smaller. Defaults to 1 MB.

Parquet version: Which version of Parquet your schemas are in determines which data types are supported and how they are represented. Defaults to version 2.6.

Data page version: Serialization format of data pages. Note that not all reader implementations support Data page V2.

Advanced Settings

Max file size (MB): Maximum uncompressed output file size. Files of this size will be closed and moved to final output location. Defaults to `32`.

Max file open time (sec): Maximum amount of time to write to a file. Files open for longer than this limit will be closed and moved to final output location. Defaults to `300`.

Max file idle time (sec): Maximum amount of time to keep inactive files open. Files open for longer than this limit will be closed and moved to final output location. Defaults to `30`.

Max open files: Maximum number of files to keep open concurrently. When this limit is exceeded, on any individual Worker Node Process, Cribl Stream will close the oldest open files, and move them to the final output location. Defaults to `100`.

> Cribl Stream will close files when **any** of the four above conditions is met.

Add Output ID: When set to `Yes` (the default), adds the **Output ID** field's value to the staging location's file path. This ensures that each Destination's logs will write to its own bucket.

Remove staging dirs: Toggle to `Yes` to delete empty staging directories after moving files. This prevents the proliferation of orphaned empty directories. When enabled, exposes this additional option:

- **Staging cleanup period**: How often (in seconds) to delete empty directories. Defaults to `300` seconds (every 5 minutes). Minimum configurable interval is `10` seconds; maximum is `86400` seconds (every 24

hours).

Endpoint: Security Lake service endpoint. If empty, defaults to AWS' Region-specific endpoint. Otherwise, it must point to Security Lake-compatible endpoint.

Object ACL: Object ACL (Access Control List) to assign to uploaded objects.

Storage class: Select a storage class for uploaded objects. Defaults to `Standard`. The other options are: `Reduced Redundancy Storage`; `Standard, Infrequent Access`; `One Zone, Infrequent Access`; `Intelligent Tiering`; `Glacier`; or `Deep Archive`.

Server-side encryption: Encryption type for uploaded objects – used to enable encryption on data at rest. Defaults to no encryption; the other options are `Amazon S3 Managed Key` or `AWS KMS Managed Key`.

> Amazon S3 always encrypts data in transit using HTTPS, with default one-way authentication from server to clients. Two-way authentication is not required to get encryption, and requires clients to possess a certificate.

Signature version: Signature version to use for signing Security Lake requests. Defaults to `v4`.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Amazon S3 Permissions

The following permissions are needed to write to an Amazon S3 bucket:

- `s3:ListBucket`
- `s3:GetBucketLocation`
- `s3:PutObject`

Creating and Modifying Parquet Schemas

When you need to add a new Parquet schema or modify an existing one:

1. Navigate to the Parquet Schema Library, located at **Processing** > **Knowledge** > **Parquet Schemas**.
2. Create or modify the schema, as described here.

> Cribl strongly recommends that to modify an existing schema, you first clone it and give the clone its own distinct name.

3. Return to this Destination, and select the new or modified schema in the **Parquet schema** drop-down.
4. Click **Save**.

Cloning First is Safer Than Just Modifying

Modifying an existing schema in the Schema Library does **not** propagate your modifications to the Destination's copy of the schema.

- Cloning and renaming schemas is the safest approach, because in Step 3 above, it removes any doubt that your Destination will now use the newly-modified version of your schema.
- If you do **not** clone and rename the schema (i.e., you leave the schema name unchanged), you still must re-select the schema in the Destination's **Parquet schema** drop-down, and click **Save**, to bring the modified version into the Destination.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Field for this Destination:

- `__partition`

Troubleshooting Resources

Cribl University offers an Advanced Troubleshooting > Destination Integrations: S3 short course. Since Amazon Security Lake relies on S3 buckets, what you learn from the course can augment your Security Lake skills.

To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Advanced Troubleshooting short courses and Troubleshooting Criblets.

11.4. Google Cloud

11.4.1. Google Chronicle

Cribl Stream supports sending data to Google Chronicle, a cloud service for retaining, analyzing, and searching enterprise security and network telemetry data.

To define a Google Chronicle Destination, you need to obtain an API key from Google. If you want Cribl Stream or an external KMS to manage the API key, configure a key pair that references the API key.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Chronicle

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Google Cloud** > **Chronicle** Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Google Cloud** > **Chronicle**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Chronicle output definition.

Default log type: Select an application log type to send to Chronicle. (Google Chronicle expects all batches for a given Destination to have the same log type.) Can be overwritten by the `__logType` event field, and interacts with the optional **Custom log types** controls below. See the Google documentation for a current list of supported log types.

Optional Settings

Custom log types: In Cribl Stream 4.0 and later, you can use the **Add type** button here to define each desired type. Each will be a table row with **Log type** and **Description** fields. If you set the **Default log type** drop-down above to the value `Custom`, Cribl Stream will automatically select the first custom log type in this table as the default log type. Use the grab handles at left to reorder table rows.

Namespace: Optionally, configure an environment namespace to identify logs' originating data domain. You can use this as a tag when indexing and/or enriching data. The `__namespace` event field, if present, will overwrite this.

Customer ID: A unique identifier (UUID) corresponding to a particular Chronicle instance. To use this optional field, request the ID from your Chronicle representative.

Send events as: `Unstructured` is the only currently supported format. Cribl plans to add UDM (Unified Data Model) support in a future release.

Log text field: Specify the event field that contains the log text to send. If you do not specify a log text field, Cribl Stream sends a JSON representation of the whole event.

Region: From the drop-down, choose the Google Chronicle regional endpoint to send events to.

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

The Google Chronicle API key is required to complete this part of the Destination definition.

Use the **Authentication Method** buttons to select one of these options:

- **Manual**: In the resulting **API key** field, enter your Google Chronicle API key.
- **Secret**: This option exposes a **Secret** drop-down, in which you can select a stored secret that references your Google Chronicle API key. A **Create** link is available to store a new, reusable secret.

Persistent Queue Settings

> This section is displayed when the **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of `KB`, `MB`, etc. Defaults to 1 MB.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, queueing is stopped and data blocking is applied. Enter a numeral with units of `KB`, `MB`, etc.

Queue file path: The location for the persistent queue files. This will be of the form: `your/path/here/<worker-id>/<output-id>`. Defaults to: `$CRIBL_HOME/state/queues`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data from this input before the data is sent through the Routes.

System fields: Specify any fields you want Cribl Stream to automatically add to events using this output. Wildcards are supported. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.

- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Enter an amount of time, in seconds, to wait for a request to complete before aborting it.

Request concurrency: Enter the maximum number of ongoing requests to allow before blocking.

Max body size (KB): Enter a maximum size, in KB, for the request body.

Max events per request: Enter the maximum number of events to include in the request body. Defaults to `0` (unlimited).

Flush period (sec): Enter the maximum time to allow between requests. Be aware that small values could cause the payload size to be smaller than the configured **Max body size**.

Extra HTTP Headers: Click **Add Header** to insert extra headers as **Name/Value** pairs. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

11.4.2. Google Cloud Logging

Cribl Stream supports sending log data to Google Cloud Logging, a real-time log storage and management service with search, analysis and alerting.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Google Cloud Logging

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Google Cloud** > **Logging**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Google Cloud** > **Logging**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Google Cloud Logging definition.

Log location type: Select one of the following.

- `Project`: Displays a **Project ID expression** field. Here, enter a JavaScript expression to compute the value of the project ID to associate log entries with.
- `Organization`: Displays a **Organization ID expression** field. Enter a JS expression to compute the value of the organization ID to associate log entries with.
- `Billing Account`: Displays a **Billing account ID expression** field. Enter a JS expression to compute the value of the billing account ID to associate log entries with.
- `Folder`: Displays a **Folder expression** field. Enter a JS expression to compute the value of the folder ID to associate log entries with.

Log name expression: Ener a JavaScript expression to compute the log name's value.

Field Mappings

Payload format: Select one of the following.

- `Text`: This default option displays a **Payload text expression** field. Here, enter JavaScript expression to compute the payload's value. Must evaluate to a JavaScript string value; if validation fails, this will default to a JSON string representation of the event.
- `JSON`: Displays a **Payload object expression** field. Enter a JS expression to compute the payload's value. Must evaluate to a JavaScript object value; if validation fails, this will default to the entire event.

> This Destination compresses all payloads, using gzip.

Log labels: Click **Add label** to apply one or more labels to log entries. On each row of the resulting table, define each label with:

- **Label**: Arbitrary name for the label.
- **Value**: JavaScript expression to compute the label's value.

Resource type expression: JavaScript expression to compute the field value for the managed resource type. Must evaluate to one of the monitored resource types listed here. If not specified, falls back to `global`.

Resource labels: Click **Add label** to apply one or more labels to the managed resource. Each must correspond to a valid label for the resource type you've specified in the **Resource type expression**, or else Google Cloud Logging will drop it. On each row of the resulting table, define each label with:

- **Label**: Arbitrary name for the label.
- **Value**: JavaScript expression to compute the label's value.

Severity expression: JavaScript expression to compute the severity field's value. Must evaluate to one of the `LogSeverity` values listed here. Case-insensitive. If not specified, falls back to `DEFAULT`.

Insert ID expression: JavaScript expression to compute the insert ID field's value.

Optional Settings

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication Method** buttons to select one of these options:

- **Auto**: This option uses the `GOOGLE_APPLICATION_CREDENTIALS` environment variable, and requires no configuration here.
- **Manual**: This default option displays a **Service account credentials** field for you to enter the contents of your service account credentials file (a set of JSON keys), as downloaded from Google Cloud. To insert the file itself, click the upload button at this field's upper right. As an alternative, you can use environment variables, as outlined here.
- **Secret**: This option exposes a drop-down in which you can select a stored secret that references the service account credentials described above. A **Create** link is available to store a new, reusable secret.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Connection timeout: Amount of time (in milliseconds) to wait for the connection to establish before retrying. Defaults to `10000` (10 sec.).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30` sec.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. Defaults to `0` (unlimited).

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than the configured **Max body size**. Defaults to `1` sec.

Throttle request rate: Enter a maximum number of requests to send per second, as necessary to comply with Google Cloud's API limits. This field defaults to empty (no throttling), and accepts throttling rates as high as `2000` requests per second.

Environment: Optionally, specify a single Git branch on which to enable this configuration. If this field is empty, the config will be enabled everywhere.

Google Cloud Roles and Permissions

Your Google Cloud service account must have at least the following role:

- `Logs Writer`

11.4.3. Google Cloud Pub/Sub

Cribl Stream supports sending data to Google Cloud Pub/Sub, a managed real-time messaging service for sending and receiving messages between applications.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Pub/Sub

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Google Cloud** > **Pub/Sub**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Google Cloud** > **Pub/Sub**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Pub/Sub output definition.

Topic ID: ID of the Pub/Sub topic to send events to.

Optional Settings

Create topic: Toggle to `Yes` if you want Cribl Stream to create the topic on Pub/Sub if it does not exist.

Ordered delivery: Toggle to `Yes` if you want Cribl Stream to send events in the order that they arrived in the queue. (For this to work correctly, the process receiving events must have ordering enabled.)

Region: Region to publish messages to. Select `default` to allow Google to auto-select the nearest region. (If you've enabled **Ordered delivery**, the selected region must be allowed by message storage policy.)

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication Method** buttons to select one of these options:

- **Auto**: This option uses the environment variables `PUBSUB_PROJECT` and `PUBSUB_CREDENTIALS`, and requires no configuration here.
- **Manual**: This default option displays a **Service account credentials** field for you to enter the contents of your service account credentials file (a set of JSON keys), as downloaded from Google Cloud.
  To insert the file itself, click the upload button at this field's upper right. As an alternative, you can use environment variables, as outlined here.
- **Secret**: This option exposes a drop-down in which you can select a stored secret that references the service account credentials described above. A **Create** link is available to store a new, reusable secret.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block**

option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Batch size: The maximum number of items the Google API should batch before it sends them to the topic. Defaults to `10` items.

Batch timeout (ms): The maximum interval (in milliseconds) that the Google API should wait to send a batch (if the configured **Batch size** limit has not been reached).. Defaults to `100` ms.

Max queue size: Maximum number of queued batches before blocking. Defaults to `100`.

Max batch size (KB): Maximum size for each sent batch. Defaults to `256` KB.

Max concurrent requests: The maximum number of in-progress API requests before Cribl Stream applies backpressure. Defaults to `10`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Google Cloud Roles and Permissions

Your Google Cloud service account should have at least the following roles on topics:

- `roles/pubsub.publisher`
- `roles/pubsub.viewer` or `roles/viewer`

To enable Cribl Stream's **Create topic** option, your service account should have one of the following (or higher) roles:

- `roles/pubsub.editor`
- `roles/editor`

Either `editor` role confers multiple permissions, including those from the lower `viewer`, `subscriber`, and `publisher` roles. For additional details, see the Google Cloud Access Control topic.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Let's Change the Topic

The Pub/Sub Destination supports alternate topics specified at the event level in the `__topicOut` field. So (e.g.) if a Pub/Sub Destination is configured to send to main topic `topic1`, and Cribl Stream receives an event with `__topicOut: topic2`, then Cribl Stream will override the main topic and send this event to `topic2`.

However, a topic specified in the event's `__topicOut` field must already exist on Pub/Sub. If it does not, Cribl Stream cannot dynamically create the topic, and will drop the event. On the Destination's **Status** tab, the **Dropped** metric tracks the number of events dropped because a specified alternate topic did not exist.

11.4.4. Google Cloud Storage

Google Cloud Storage is a non-streaming Destination type.

> Type: Non-Streaming | TLS Support: Yes | PQ Support: No

Configuring Cloud Storage Permissions

For Cribl Stream to send data to Google Cloud Storage buckets, the following access permissions must be set on the Cloud Storage side:

- Fine-grained access control must be enabled on the buckets.
- The Google service account or user must have the Storage Admin or Owner role.

For details, see the Cloud Storage Overview of Access Control and Understanding Roles documentation.

Configuring Cribl Stream to Output to Cloud Storage Destinations

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles or the **Destinations** left nav, select **Google Cloud** > **Storage**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles, select **Google Cloud** > **Storage**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Cloud Storage definition.

Bucket name: Name of the destination bucket. This value can be a constant. or a JavaScript expression that can be evaluated only at init time. E.g., referencing a Global Variable: `myBucket-${C.vars.myVar}`.

Region: Region where the bucket is located.

Staging location: Filesystem location in which to locally buffer files before compressing and moving to final destination. Cribl recommends that this location be stable and high-performance. (This field is not displayed or available on Cribl.Cloud-managed Worker Nodes.)

Key prefix: Root directory to prepend to path before uploading. Enter a constant, or a JS expression enclosed in single quotes, double quotes, or backticks.

Data format: The output data format defaults to `JSON`. `Raw` and `Parquet` are also available. Selecting `Parquet` (supported only on Linux, not Windows) exposes a **Parquet Settings** left tab, where you **must** configure certain options in order to export data in Parquet format.

Optional Settings

Partitioning expression: JavaScript expression that defines how files are partitioned and organized. Default is date-based. If blank, Cribl Stream will fall back to the event's `__partition` field value (if present); or otherwise to the root directory of the **Output Location** and **Staging Location**.

Compress: Data compression format used before moving to final destination. Defaults to `gzip` (recommended). This setting is not available when **Data format** is set to `Parquet`.

File name prefix expression: The output filename prefix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `CriblOut`.

File name suffix expression: The output filename suffix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `` `.${C.env["CRIBL_WORKER_ID"]}.${__format}${__compression === "gzip" ? ".gz" : ""}` ``, where `__format` can be `json` or `raw`, and `__compression` can be `none` or `gzip`.

> To prevent files from being overwritten, Cribl appends a random sequence of 6 characters to the end of their names. File name prefix and suffix expressions do not bypass this behavior.
>
> For example, if you set the **File name prefix expression** to `CriblExec` and set the **File name suffix expression** to `.csv`, the file name might display as `CriblExec-adPRWM.csv` with `adPRWM` appended.

Backpressure behavior: Select whether to block or drop events when all receivers are exerting backpressure. (Causes might include an accumulation of too many files needing to be closed.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication Method** buttons to select one of these options:

- **Manual**: With this default option, authentication is via HMAC (Hash-based Message Authentication Code). To create a key and secret, see Google Cloud's Managing HMAC Keys for Service Accounts documentation. This option exposes these two fields:
  - **Access key**: Enter the HMAC access key.
  - **Secret key**: Enter the HMAC secret.

The values for **Access key** and **Secret key** can be a constant, or a JavaScript expression (such as `${C.env.MY_VAR}`) enclosed in quotes or backticks, which allows configuration with environment variables.

- **Secret**: This option exposes a **Secret key pair** drop-down, in which you can select a stored secret that references the secret key pair described above. A **Create** link is available to store a new, reusable secret.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports `c*` wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Parquet Settings

To write out Parquet files, note that:

- Cribl Edge Workers support Parquet only when running on Linux, not on Windows.

- See Working with Parquet for pointers on how to avoid problems such as data mismatches.

Parquet schema: Select a schema from the drop-down.

> If you need to modify a schema or add a new one, follow the instructions in our Parquet Schemas topic. These steps will propagate the freshest schema back to this drop-down.

Row group size: Set the target memory size for row group segments. Modify this value to optimize memory use when writing. Value must be a positive integer smaller than the **File size** value, with appropriate units. Defaults to `16 MB`.

Page size: Set the target memory size for page segments. Generally, set lower values to improve reading speed, or set higher values to improve compression. Value must be a positive integer smaller than the **Row group size** value, with appropriate units. Defaults to `1 MB`.

Parquet version: Determines which data types are supported, and how they are represented. Defaults to `2.6`; `2.4` and `1.0` are also available.

Data page version: Serialization format for data pages. Defaults to `V2`. If your toolchain includes a Parquet reader that does not support `V2`, use `V1`.

Log invalid rows: Toggle to `Yes` to output up to 20 unique rows that were skipped due to data format mismatch. Log level must be set to `debug` for output to be visible.

Advanced Settings

Max file size (MB): Maximum uncompressed output file size. Files of this size will be closed and moved to final output location. Defaults to `32`.

Max file open time (sec): Maximum amount of time to write to a file. Files open for longer than this limit will be closed and moved to final output location. Defaults to `300`.

Max file idle time (sec): Maximum amount of time to keep inactive files open. Files open for longer than this limit will be closed and moved to final output location. Defaults to `30`.

Max open files: Maximum number of files to keep open concurrently. When exceeded, the oldest open files will be closed and moved to final output location. Defaults to `100`.

> Cribl Stream will close files when **either** of the `Max file size (MB)` or the `Max file open time (sec)` conditions are met.

Add Output ID: Whether to append output's ID to staging location. Defaults to `Yes`.

Remove staging dirs: Toggle to `Yes` to delete empty staging directories after moving files. This prevents the proliferation of orphaned empty directories. When enabled, exposes this additional option:

- **Staging cleanup period**: How often (in seconds) to delete empty directories when **Remove staging dirs** is enabled. Defaults to `300` seconds (every 5 minutes). Minimum configurable interval is `10` seconds; maximum is `86400` seconds (every 24 hours).

Endpoint: The Google Cloud Storage service endpoint. Typically, there is no reason to change the default https://storage.googleapis.com endpoint.

Object ACL: Select an Access Control List to assign to uploaded objects. Defaults to `private`.

Storage class: Select a storage class for uploaded objects.

Signature version: Signature version to use for signing requests. Defaults to `v4`.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Field for this Destination:

- `__partition`

Troubleshooting

Nonspecific messages from Google Cloud of the form `Error: failed to close file` can indicate problems with the permissions listed above.

11.5. Kafka

11.5.1. Kafka

Cribl Stream supports sending data to a Kafka topic.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes
>
> Kafka uses a binary protocol over TCP. It does not support HTTP proxies, so Cribl Stream must send events directly to receivers. You might need to adjust your firewall rules to allow this traffic.

Configuring Cribl Stream to Output to Kafka

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Kafka**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Kafka**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Kafka definition.

Brokers: List of Kafka brokers to connect to. (E.g., `localhost:9092`.)

Topic: The topic on which to publish events. Can be overwritten using event's `__topicOut` field.

Optional Settings

Acknowledgments: Select the number of required acknowledgments. Defaults to `Leader`.

Record data format: Format to use to serialize events before writing to Kafka. Defaults to `JSON`.

Compression: Codec to compress the data before sending to Kafka. Select `None`, `Gzip Snappy`, or `LZ4`.

> Cribl strongly recommends enabling compression. Doing so improves Cribl Stream's performance, enabling faster data transfer using less bandwidth.

Backpressure behavior: Select whether to block, drop, or queue incoming events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, queueing is stopped and data blocking is applied. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. This will be of the form: `your/path/here/<worker-id>/<output-id>`. Defaults to: `$CRIBL_HOME/state/queues`.

Compression: Codec to use to compress the persisted data, once a file is closed. Select `None`, `Gzip`, `Snappy`, or `LZ4`. Defaults to `Gzip`.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down.**Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Calculating the Time PQ Will Take to Engage

PQ will not engage until Cribl Stream has exhausted all attempts to send events to the Kafka receiver. This can take several minutes if requests continue to fail or time out.

To calculate the longest possible time this can take, multiply the values of **Advanced Settings** > **Request timeout** and **Max retries**. For the default values (`60` seconds and `5`, respectively), this would be `60` seconds times `5` retries = 300 seconds, or 5 minutes.

TLS Settings (Client Side)

Enabled Defaults to `No`. When toggled to `Yes`:

Validate server certs: Reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Authentication

This section governs SASL (Simple Authentication and Security Layer) authentication to use when connecting to brokers. Using TLS is highly recommended.

Enabled: Defaults to `No`. When toggled to `Yes`:

SASL mechanism: Use this drop-down to select the SASL authentication mechanism to use. The mechanism you select determines the controls displayed below.

PLAIN, SCRAM-256, or SCRAM-512

With any of these authentication mechanisms, select one of the following buttons:

Manual: Displays **Username** and **Password** fields to enter your Kafka credentials directly.

Secret: This option exposes a **Credentials secret** drop-down in which you can select a stored text secret that references your Kafka credentials. A **Create** link is available to store a new, reusable secret.

GSSAPI/Kerberos

Selecting Kerberos as the authentication mechanism displays the following options:

Keytab location: Enter the location of the key table file for the authentication principal.

Principal: Enter the authentication principal, e.g.: `kafka_user@example.com`.

Broker service class: Enter the Kerberos service class for Kafka brokers, e.g.: `kafka`.

Schema Registry

This section governs Kafka Schema Registry Authentication for Avro-encoded data with a schema stored in the Confluent Schema Registry.

Enabled: defaults to `No`. When toggled to `Yes`, displays the following controls:

Schema registry URL: URL for access to the Confluent Schema Registry. (E.g., `http://<hostname>:8081`.)

Default key schema ID: Used when `__keySchemaIdOut` is not present to transform key values. Leave blank if key transformation is not required by default.

Default value schema ID: Used when `__valueSchemaIdOut` not present to transform `_raw`. Leave blank if value transformation is not required by default.

TLS enabled: defaults to `No`. When toggled to `Yes`, displays the following TLS settings for the Schema Registry (in the same format as the TLS Settings (Client Side) above):

- **Validate server certs**: Require client to reject any connection that is not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to **No**.
- **Server name (SNI)**: Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.
- **Minimum TLS version**: Optionally, select the minimum TLS version to use when connecting.
- **Maximum TLS version**: Optionally, select the maximum TLS version to use when connecting.
- **Certificate name**: The name of the predefined certificate.
- **CA certificate path**: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.
- **Private key path (mutual auth)**: Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.
- **Certificate path (mutual auth)**: Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.
- **Passphrase**: Passphrase to use to decrypt private key.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.

- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Max record size (KB, uncompressed): Maximum size (KB) of each record batch before compression. Setting should be < `message.max.bytes settings` in Kafka brokers. Defaults to `768`.

Max events per batch: Maximum number of events in a batch before forcing a flush. Defaults to `1000`.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Connection timeout (ms): Maximum time to wait for a successful connection. Defaults to `10000` ms, i.e., 10 seconds. Valid range is `1000` to `3600000` ms, i.e., 1 second to 1 hour.

Request timeout (ms): Maximum time to wait for a successful request. Defaults to `60000` ms, i.e., 1 minute.

Max retries: Maximum number of times to retry a failed request before the message fails. Defaults to `5`; enter `0` to not retry at all.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Fields for this Destination:

- `__topicOut`
- `__key`
- `__headers`
- `__keySchemaIdOut`
- `__valueSchemaIdOut`

11.5.2. Confluent Cloud

Cribl Stream supports sending data to Kafka topics on the Confluent Cloud managed Kafka platform.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes
>
> Confluent Cloud uses a binary protocol over TCP. It does not support HTTP proxies, so Cribl Stream must send events directly to receivers. You might need to adjust your firewall rules to allow this traffic.

Sending Kafka Topic Data to Confluent Cloud

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Confluent Cloud**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Confluent Cloud**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Destination definition.

Brokers: List of Confluent Cloud brokers to connect to. (E.g., `myAccount.confluent.cloud:9092`.)

Topic: The topic on which to publish events. Can be overwritten using event's `__topicOut` field.

Optional Settings

Acknowledgments: Select the number of required acknowledgments. Defaults to `Leader`.

Record data format: Format to use to serialize events before writing to Kafka. Defaults to `JSON`.

Compression: Codec to use to compress the data before sending to Kafka. Select `None`, `Gzip`, `Snappy`, or `LZ4`. Defaults to `Gzip`.

Backpressure behavior: Select whether to block, drop, or queue incoming events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, queueing is stopped and data blocking is applied. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. This will be of the form: `your/path/here/<worker-id>/<output-id>`. Defaults to: `$CRIBL_HOME/state/queues`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip`, `Snappy`, and `LZ4` are also available.

> Cribl strongly recommends enabling compression. Doing so improves Cribl Stream's performance, enabling faster data transfer using less bandwidth.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Calculating the Time PQ Will Take to Engage

PQ will not engage until Cribl Stream has exhausted all attempts to send events to the Kafka receiver. This can take several minutes if requests continue to fail or time out.

To calculate the longest possible time this can take, multiply the values of **Advanced Settings** > **Request timeout** and **Max retries**. For the default values (`60` seconds and `5`, respectively), this would be `60` seconds times `5` retries = 300 seconds, or 5 minutes.

TLS Settings (Client Side)

Enabled When toggled to `Yes` (the default):

Autofill?: This setting is experimental.

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

> With a dedicated Confluent Cloud cluster hosted in Microsoft Azure, be sure to specify the **Server name (SNI)**. If this is omitted, Confluent Cloud might reset the connection to Cribl Stream.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Authentication

Authentication parameters to use when connecting to brokers. Using TLS is highly recommended.

Enabled: Defaults to `No`. When toggled to `Yes`:

- **SASL mechanism**: Select the SASL (Simple Authentication and Security Layer) authentication mechanism to use. Defaults to `PLAIN`. `SCRAM-SHA-256` and `SCRAM-SHA-512` are also available.

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.
- **Secret**: This option exposes a **Credentials secret** drop-down, in which you can select a stored secret that references the credentials described above. A **Create** link is available to store a new, reusable secret.

Schema Registry

This section governs Kafka Schema Registry Authentication for Avro-encoded data with a schema stored in the Confluent Schema Registry.

Enabled: Defaults to `No`. When toggled to `Yes`, displays the following controls:

Schema registry URL: URL for access to the Confluent Schema Registry. (E.g., `http://localhost:8081`.)

Default key schema ID: Used when `__keySchemaIdOut` is not present to transform key values. Leave blank if key transformation is not required by default.

Default value schema ID: Used when `__valueSchemaIdOut` not present to transform `_raw`. Leave blank if value transformation is not required by default.

TLS enabled: defaults to `No`. When toggled to `Yes`, displays the following TLS settings for the Schema Registry (in the same format as the TLS Settings (Client Side) above):

- **Validate server certs**: Require client to reject any connection that is not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to **No**.
- **Server name (SNI)**: Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

> With a dedicated Confluent Cloud cluster hosted in Microsoft Azure, be sure to specify the **Server name (SNI)**. If this is omitted, Confluent Cloud might reset the connection to Cribl Stream.

- **Minimum TLS version**: Optionally, select the minimum TLS version to use when connecting.
- **Maximum TLS version**: Optionally, select the maximum TLS version to use when connecting.
- **Certificate name**: The name of the predefined certificate.
- **CA certificate path**: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.
- **Private key path (mutual auth)**: Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.
- **Certificate path (mutual auth)**: Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.
- **Passphrase**: Passphrase to use to decrypt private key.

Processing Settings

Post-Processing

In this section's **Pipeline** drop-down list, you can select a single existing Pipeline to process data before it is sent through this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Max record size (KB, uncompressed): Maximum size (KB) of each record batch before compression. Setting should be < `message.max.bytes settings` in Kafka brokers. Defaults to `768`.

Max events per batch: Maximum number of events in a batch before forcing a flush. Defaults to `1000`.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Connection timeout (ms): Maximum time to wait for a successful connection. Defaults to `10000` ms, i.e., 10 seconds. Valid range is `1000` to `3600000` ms, i.e., 1 second to 1 hour.

Request timeout (ms): Maximum time to wait for a successful request. Defaults to `60000` ms, i.e., 1 minute.

Max retries: Maximum number of times to retry a failed request before the message fails. Defaults to `5`; enter `0` to not retry at all.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Fields for this Destination:

- `__topicOut`
- `__key`
- `__headers`
- `__keySchemaIdOut`
- `__valueSchemaIdOut`

11.5.3. Amazon MSK

Cribl Stream supports sending data to an Amazon Managed Streaming for Apache Kafka (MSK) topic.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes
>
> Kafka uses a binary protocol over TCP. It does not support HTTP proxies, so Cribl Stream must send events directly to receivers. You might need to adjust your firewall rules to allow this traffic.

Configuring Cribl Stream to Output to Kafka

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Amazon MSK**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Amazon MSK**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Amazon MSK Destination definition.

Brokers: List of Kafka brokers to connect to. (E.g., `kafkaBrokerHost:9092`.)

Topic: The topic on which to publish events. Can be overwritten using the event's `__topicOut` field.

Region: From the drop-down, select the name of the AWS Region where your Amazon MSK cluster is located.

Optional Settings

Acknowledgments: Select the number of required acknowledgments. Defaults to `Leader`.

Record data format: Format to use to serialize events before writing to Kafka. Defaults to `JSON`.

Compression: Codec to compress the data before sending to Kafka. Select `None`, `Gzip`, `Snappy`, or `LZ4`. Defaults to `Gzip`.

> Cribl strongly recommends enabling compression. Doing so improves Cribl Stream's performance, enabling faster data transfer using less bandwidth.

Backpressure behavior: Select whether to block, drop, or queue incoming events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, queueing is stopped and data blocking is applied. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. This will be of the form: `your/path/here/<worker-id>/<output-id>`. Defaults to: `$CRIBL_HOME/state/queues`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Calculating the Time PQ Will Take to Engage

PQ will not engage until Cribl Stream has exhausted all attempts to send events to the Kafka receiver. This can take several minutes if requests continue to fail or time out.

To calculate the longest possible time this can take, multiply the values of **Advanced Settings** > **Request timeout** and **Max retries**. For the default values (`60` seconds and `5`, respectively), this would be `60` seconds times `5` retries = 300 seconds, or 5 minutes.

TLS Settings (Client Side)

> For Amazon MSK Sources and Destinations:
>
> - IAM is the only type of authentication that Cribl Stream supports.
> - Because IAM auth requires TLS, TLS is automatically enabled.

Validate server certs: Reject certificates that are **not** authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Authentication

Use the **Authentication Method** buttons to select an AWS authentication method.

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. The **Secret** option exposes this additional field:

- **Secret key pair**: Use the drop-down to select an API key/secret key pair that you've configured in Cribl Stream's secrets manager. A **Create** link is available to store a new, reusable secret.

Assume Role

Enable for MSK: Toggle on to use Assume Role credentials to access MSK.

AssumeRole ARN: Enter the Amazon Resource Name (ARN) of the role to assume.

External ID: Enter the External ID to use when assuming role. This is required only when assuming a role that requires this ID in order to delegate third-party access. For details, see AWS' documentation.

Duration (seconds): Duration of the Assumed Role's session, in seconds. Minimum is 900 (15 minutes). Maximum is 43200 (12 hours). Defaults to 3600 (1 hour).

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Max record size (KB, uncompressed): Maximum size (KB) of each record batch before compression. Setting should be < `message.max.bytes settings` in Kafka brokers. Defaults to `768`.

Max events per batch: Maximum number of events in a batch before forcing a flush. Defaults to `1000`.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Connection timeout (ms): Maximum time to wait for a connection to complete successfully. Defaults to `10000` ms, i.e., 10 seconds. Valid range is `1000` to `3600000` ms, i.e., 1 second to 1 hour.

Request timeout (ms): Maximum time to wait for Kafka to respond to a request. Defaults to `60000` ms, i.e., 1 minute.

Max retries: Maximum number of times to retry a failed request before the message fails. Defaults to `5`; enter `0` to not retry at all.

Authentication timeout (ms): Maximum time to wait for Kafka to respond to an authentication request.

Reauthentication threshold (ms): Specifies a time window during which Cribl Stream can reauthenticate if needed. Creates the window measuring backwards from the moment when credentials are set to expire.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Fields for this Destination:

- `__topicOut`
- `__key`
- `__headers`
- `__keySchemaIdOut`
- `__valueSchemaIdOut`

11.6. Metrics

11.6.1. Graphite

Cribl Stream supports sending data to a Graphite backend Destination.

> Type: Streaming | TLS Support: No | PQ Support: Yes

Configuring Cribl Stream to Output to a Graphite Backend

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Metrics** > **Graphite**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Metrics** > **Graphite**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Graphite definition.

Destination protocol: Protocol to use when communicating with the Destination. Defaults to `UDP`.

Host: The hostname of the Destination.

Port: Destination port. Defaults to `8125`.

Optional Settings

Throttling: Displayed only when **General Settings** > **Destination protocol** is set to `TCP`. Rate (in bytes per second) at which at which to throttle while writing to an output. Also takes numerical values in multiples of bytes (KB, MB, GB, etc.). Default value of `0` indicates no throttling.

Backpressure behavior: Displayed only when **General Settings** > **Destination protocol** is set to `TCP`. Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This section is displayed only when **General Settings** > **Destination protocol** is set to `TCP`, and only when **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Timeout Settings

> This section is displayed only when **General Settings** > **Destination protocol** is set to `TCP`.

Connection timeout: Amount of time (in milliseconds) to wait for the connection to establish, before retrying. Defaults to `10000`.

Write timeout: Amount of time (milliseconds) to wait for a write to complete, before assuming connection is dead. Defaults to `60000`.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Max record size (bytes): Used when Protocol is UDP. Specifies the maximum size of packets sent to the Destination. (Also known as the MTU – maximum transmission unit – for the network path to the destination system.) Defaults to `512`.

Flush period (sec): Used when Protocol is TCP. Specifies how often buffers should be flushed, sending records to the Destination. Defaults to `1`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

11.6.2. StatsD

Cribl Stream supports sending data to a StatsD Destination.

> Type: Streaming | TLS Support: No | PQ Support: Yes

Configuring Cribl Stream to Output via StatsD

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Metrics** > **StatsD**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Metrics** > **StatsD**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this StatsD definition.

Destination protocol: Protocol to use when communicating with the Destination. Defaults to `UDP`.

Host: The hostname of the Destination.

Port: Destination port. Defaults to `8125`.

Optional Settings

Throttling: Displayed only when **General Settings** > **Destination protocol** is set to `TCP`. Rate (in bytes per second) at which at which to throttle while writing to an output. Also takes numerical values in multiples of bytes (KB, MB, GB, etc.). Default value of `0` indicates no throttling.

Backpressure behavior: Displayed only when **General Settings** > **Destination protocol** is set to `TCP`. Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This section is displayed only when **General Settings** > **Destination protocol** is set to `TCP`, and only when **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue fallback behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** drops the newest events from being sent out of Cribl Stream, and throws away incoming data, while leaving the contents of the PQ unchanged.

Timeout Settings

> This section is displayed only when **General Settings** > **Destination protocol** is set to `TCP`.

Connection timeout: Amount of time (in milliseconds) to wait for the connection to establish, before retrying. Defaults to `10000`.

Write timeout: Amount of time (milliseconds) to wait for a write to complete, before assuming connection is dead. Defaults to `60000`.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Max record size (bytes): Used when Protocol is UDP. Specifies the maximum size of packets sent to the Destination. (Also known as the MTU – maximum transmission unit – for the network path to the Destination system.) Defaults to `512`.

Flush period (sec): Used when Protocol is TCP. Specifies how often buffers should be flushed, sending records to the Destination. Defaults to `1`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

11.6.3. StatsD Extended

Cribl Stream's StatsD Extended Destination supports sending out data in expanded StatsD format.

The output is an expanded StatsD metric protocol that supports dimensions, along with a sample rate for counter metrics. As with StatsD, downstream components listen for application metrics over UDP or TCP, can aggregate and summarize those metrics, and can relay them to virtually any graphing or monitoring backend.

For details about the syntax expected by one common downstream service, see Splunk's Expanded StatsD Metric Protocol documentation.

> Type: Streaming | TLS Support: No | PQ Support: Yes

Configuring Cribl Stream to Output via StatsD Extended

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Metrics** > **StatsD Extended**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Metrics** > **StatsD Extended**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this StatsD Extended definition.

Destination protocol: Protocol to use when communicating with the Destination. Defaults to `UDP`.

Host: The hostname of the Destination.

Port: Destination port. Defaults to `8125`.

Optional Settings

Throttling: Displayed only when **General Settings** > **Destination protocol** is set to `TCP`. Rate (in bytes per second) at which at which to throttle while writing to an output. Also takes numerical values in multiples of bytes (KB, MB, GB, etc.). Default value of `0` indicates no throttling.

Backpressure behavior: Displayed only when **General Settings** > **Destination protocol** is set to `TCP`. Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This section is displayed only when **General Settings** > **Destination protocol** is set to `TCP`, and only when **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue fallback behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** drops the newest events from being sent out of Cribl Stream, and throws away incoming data, while leaving the contents of the PQ unchanged.

Timeout Settings

> This section is displayed only when **General Settings** > **Destination protocol** is set to `TCP`.

Connection timeout: Amount of time (in milliseconds) to wait for the connection to establish, before retrying. Defaults to `10000`.

Write timeout: Amount of time (milliseconds) to wait for a write to complete, before assuming connection is dead. Defaults to `60000`.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Max record size (bytes): Used when Protocol is UDP. Specifies the maximum size of packets sent to the Destination. (Also known as the MTU – maximum transmission unit – for the network path to the Destination system.) Defaults to `512`.

Flush period (sec): Used when Protocol is TCP. Specifies how often buffers should be flushed, sending records to the Destination. Defaults to `1`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

11.7. New Relic Ingest

11.7.1. New Relic Events

Cribl Stream supports sending events to New Relic via the New Relic Event API. Use this Destination to export ad hoc events that New Relic ingestion treats as custom events.

To export structured log and/or metric events, use Cribl Stream's New Relic Logs & Metrics Destination.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output Events to New Relic

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **New Relic Ingest** > **Events**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **New Relic Ingest** > **Events**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Destination.

Region: Select which New Relic region endpoint to use.

Account ID: Enter your New Relic account ID. (You can access this ID from New Relic's **account** drop-down, by selecting **Manage your plan**.)

Event type: Default `eventType` to apply when not specified in an event. You can use arbitrary values, as long as they do not conflict with New Relic reserved words. (Where an `eventType` is specified in an event, it will override this value.)

Authentication Settings

> If an incoming event contains an internal field named `__newRelic_apiKey`, the New Relic Events Destination will use that field's value as the API key when sending the event to New Relic.
>
> For events that do not contain a `__newRelic_apiKey` field, the Destination will use whatever API key you have configured in this section.

Authentication method: Select one of the following buttons.

- **Manual**: This default option exposes an **API key** field. Directly enter your New Relic Ingest License API key, as you created or accessed it from New Relic's **account** drop-down. (For details, see the New Relic API Keys documentation.)
- **Secret**: This option exposes an **API key (text secret)** drop-down, in which you can select a stored secret that references a New Relic Ingest License API key. A **Create** link is available to store a new, reusable secret.

Optional Settings

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`. For the `Persistent Queue` option, see the section just below.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This section is displayed when the **Backpressure behavior** is set to `Persistent Queue`.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out via this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Defaults to `Yes`, meaning compress the payload body before sending.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `1000` KB.

Max events per request: Maximum number of events to include in the request body. Defaults to `0`, allowing unlimited events.

Flush period (sec): Maximum time between requests. Low values can cause the payload size to be smaller than the configured **Max body size**. Defaults to `1` second.

Extra HTTP headers: Click **Add Header** to insert extra headers as **Name**/**Value** pairs. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Verifying the New Relic Events Destination

Once you've configured event sources, create one or more Routes to send data to New Relic.

In New Relic, you can create visualizations incorporating the Cribl Stream-supplied data, then add them to new or existing dashboards as widgets.

Alternatively, in the New Relic backend, you can select **Query you data** (top nav) > **Events** (left tab), and then select the event type you exported from Cribl Stream.

To view more events, change the time frame at the upper right. To see raw events, click **Raw data** on the right.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

11.7.2. New Relic Logs & Metrics

Cribl Stream supports sending events to the New Relic Log API and the New Relic Metric API.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes
>
> In Cribl Stream v.3.1.2 and later, this Destination now authenticates using New Relic's Ingest License API key. (New Relic will retire the Insights Insert API keys, which this Destination previously used for authentication.)
>
> Also in v.3.1.2 and later, Cribl Stream provides a separate New Relic Events Destination that you can use to send ad hoc (loosely structured) events to New Relic via the New Relic Event API.
>
> Within New Relic's platform, you can monitor Cribl Stream's performance and data flow by installing New Relic's Cribl dashboard.

Configuring Cribl Stream to Output to New Relic

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **New Relic Ingest** > **Logs & Metrics**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **New Relic Ingest** > **Logs & Metrics**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this New Relic definition.

Region: Select which New Relic region endpoint to use.

Authentication Settings

> If an incoming event contains an internal field named `__newRelic_apiKey`, the New Relic Logs & Metrics Destination uses that field's value as the API key when sending the event to New Relic.
>
> For events that do not contain an `__newRelic_apiKey` field, the Destination uses whatever API key you have configured in the **Authentication method** settings.

Authentication method: Select one of the following buttons.

- **Manual**: This default option exposes an **API key** field. Directly enter your New Relic Ingest License API key, as you created or accessed it from New Relic's **account** drop-down. (For details, see the New Relic API Keys documentation.)
- **Secret**: This option exposes an **API key (text secret)** drop-down, in which you can select a stored secret that references a New Relic Ingest License API key. A **Create** link is available to store a new, reusable secret.

Optional Settings

Log type: Name of the `logType` to send with events. E.g., `observability` or `access_log`.

> This sets a default. Where a `sourcetype` is specified in an event, it will override this value.

Log message field: Name of the field to send as the log `message` value. If not specified, the event will be serialized and sent as JSON.

Fields: Additional fields to (optionally) add, as **Name**-**Value** pairs. Click **Add Field** to add more.

- **Name**: Enter the field name.
- **Value**:JavaScript expression to compute field's value, enclosed in single quotes, double quotes, or backticks. (Can evaluate to a constant.)

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`. For the `Persistent Queue` option, see the section just below.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

This section is displayed when the **Backpressure behavior** is set to `Persistent Queue`.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `1000` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values can cause the payload size to be smaller than the configured **Max body size**. Defaults to `1` second.

Extra HTTP headers: Click **Add Header** to insert extra headers as **Name**/**Value** pairs. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Verifying the New Relic Destination

Once you've configured log and/or metrics sources, create one or more Routes to send data to New Relic.

In New Relic, you can create visualizations incorporating the Cribl Stream-supplied data, then add them to new or existing dashboards as widgets.

Logs and metrics land in two different places in New Relic.

Log Queries

To access and query log data:

- Navigate to the New Relic home screen's **Logs** header option, and click the **(+)** button at right.
- Then to build your queries, use the **Find logs where** input field, and add desired columns to the table view below the graph,.

Metrics Queries

To access and query metrics data:

- From the New Relic home screen, *Click **Browse Data** > **Metrics** > **Can Search for metricNames**.
- Then, customize time range and dimensions to build the desired logic for your queries.
- Alternatively, you can use NRQL to build your own query searches.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

11.8. Prometheus

11.8.1. Prometheus

Cribl Stream can send metric events to targets and third-party platforms that support Prometheus' remote write specification (overview here).

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Configuring Cribl Stream to Output to Prometheus

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Prometheus**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Prometheus**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Prometheus output definition.

Remote Write URL: The endpoint to send events to, e.g.: `http://localhost:9200/write`

Optional Settings

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

Select one of the following options for authentication:

- **None**: Don't use authentication.
- **Auth token**: Use HTTP token authentication. In the resulting **Token** field, enter the bearer token that must be included in the HTTP authorization header.
- **Auth token (text secret)**: This option exposes a **Token (text secret)** drop-down, in which you can select a stored text secret that references the bearer token described above. A **Create** link is available to store a new, reusable secret.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.
- **Basic (credentials secret)**: This option exposes a **Credentials secret** drop-down, in which you can select a stored text secret that references the Basic authentication credentials described above. A **Create** link is available to store a new, reusable secret.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, queueing is stopped and data blocking is applied. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. This will be of the form: `your/path/here/<worker-id>/<output-id>`. Defaults to: `$CRIBL_HOME/state/queues`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_host` (Cribl Stream Node that processed the event) and `cribl_wp` (Cribl Stream Worker Process that processed the event). Supports wildcards. Other options include:

- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_pipe` – Cribl Stream Pipeline that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.

Advanced Settings

Validate server certs: Reject certificates that are **not** authorized by a trusted CA (e.g., the system's CA). Defaults to `Yes`.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers. Values will be sent encrypted.

Metric renaming expression: A JavaScript expression that can be used to rename metrics.
The default expression – `name.replace(/\\./g, \'_\')` – replaces all `.` characters in a metric's name with the Prometheus-supported `_` character. Use the `name` global variable to access the metric's name. You can access event fields' values via `__e.<fieldName>`.

Send metadata: Whether to generate and send metrics' metadata (`type` and `metricFamilyName`) along with the metrics. The default `Yes` value displays this additional field:

- **Metadata flush period (sec)**: How frequently metrics metadata is sent out. Value must at least equal the base **Flush period (sec)**. (In other words, metadata cannot be flushed on a shorter interval.) Defaults to `60` seconds.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

If an event contains the internal field `__criblMetrics`, Cribl Stream will send it to the HTTP endpoint as a metric event. Otherwise, Cribl Stream will drop the event.

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- Unlike other HTTP-based Destinations, Prometheus does not display an **Advanced Settings > Compress** option. The Prometheus `remote_write` spec assumes that payloads are snappy-compressed by default.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, the connection will be thrown away, and a new one will be reattempted. This is to prevent sticking to a particular destination when there is a constant flow of events.
- If the server does not support keepalives (or if the server closes a pooled connection while idle), a new connection will be established for the next request.
- When resolving the Destination's hostname, Cribl Stream will pick the first IP in the list for use in the next connection. Enable Round-robin DNS to better balance distribution of events between Prometheus cluster nodes.

11.8.2. Grafana Cloud

Cribl Stream can send data to two of the services available in Grafana Cloud: Loki for logs and Prometheus for metrics. The Grafana Cloud Destination shapes events appropriately for Loki and Prometheus, and routes events to the correct endpoint for each service.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Preparing Prometheus and Loki to Receive Data from Cribl Stream

To define a Grafana Cloud Destination, you need a Grafana Cloud account.

While logged in to your Grafana account, navigate to the Grafana Cloud Portal, which should be located at `https://grafana.com/orgs/<your-organization-name>`, and complete the following steps.

Obtain an API key, setting its Role to `MetricsPublisher`. If you want Cribl Stream or an external KMS to manage the API key, configure a key pair that references the API key.

In the Prometheus tile, click **Send Metrics** to open the Prometheus configuration page. Write down:

- Your **Remote Write Endpoint** URL, for example: `https://prometheus-blocks-prod-us-central1.grafana.net/api/prom/push`.
- Your Prometheus **Username**.

In the Loki tile, click **Send Logs** to open the Loki configuration page. Write down:

- Your **Grafana Data Source settings** URL, for example: `https://logs-prod-us-central1.grafana.net`.
- Your Loki **User** ID.

Decide what type of authentication to use and prepare accordingly:

- If you choose Basic authentication, the username (**Username** in Prometheus, **User** in Loki) and password (simply your Grafana API key) will remain separate.

- If you choose token-based authentication, construct your tokens by concatenating username, colon (`:`), and password, for example `12345:cOQvDj6sJGFS3Bk2MguBW==`. Because the Prometheus and Loki usernames differ, you need to construct a separate token for each service.

Configuring Cribl Stream to Output to Grafana Cloud

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Grafana Cloud**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Grafana Cloud**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Grafana Cloud output definition.

Loki URL: The endpoint to send log events to, e.g.: `https://logs-prod-us-central1.grafana.net`. This is the **Grafana Data Source settings** URL you wrote down earlier.

Prometheus URL: The endpoint to send metric events to, e.g.: `https://prometheus-blocks-prod-us-central1.grafana.net/api/prom/push`. This is the **Remote Write Endpoint** URL you wrote down earlier.

Optional Settings

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.

> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, queueing is stopped and data blocking is applied. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. This will be of the form: `your/path/here/<worker-id>/<output-id>`. Defaults to: `$CRIBL_HOME/state/queues`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`. `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Authentication

The **Authentication** tab provides separate **Loki** and **Prometheus** sections, enabling you to configure these inputs separately. The two sections provide identical options.

Select one of the following options for authentication:

- **Auth token**: Enter the bearer token that must be included in the authorization header. Use the token that you constructed earlier. In Grafana Cloud, the bearer token is generally built by concatenating the

username and the API key, separated by a colon. E.g.: `<your-username>:<your-api-key>`.

- **Auth token (text secret)**: This option exposes a drop-down in which you can select a stored text secret that references the bearer token described above. A **Create** link is available to store a new, reusable secret.

- **Basic**: This default option displays fields for you to enter HTTP Basic authentication credentials. **Username** is the Loki **User** or Prometheus **Username** that you wrote down earlier. **Password** is your API key in the Grafana Cloud domain.

- **Basic (credentials secret)**: This option exposes a **Credentials secret** drop-down, in which you can select a stored text secret that references the Basic authentication credentials described above. A **Create** link is available to store a new, reusable secret.

Processing Settings

Metric events can have dimensions, and log events have labels. Dimensions, labels, and their values are determined by several different settings in Cribl Stream. This section explains how that works, along with other kinds of settings.

Loki uses labels to define separate streams of logging data. This is a key concept. Cribl recommends that you familiarize yourself with the information and documentation Grafana provides about labels in Loki.

One canonical example is processing logs from servers in three environments: production, staging, and testing. You could create a label named `env` whose possible values are `prod`, `staging`, and `test`.

One basic principle is that if you set too many labels, you can end up with too many streams.

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output—both metric events, as dimensions; and, log events, as labels. Supports wildcards.

By default, includes `cribl_host` (Cribl Stream Node that processed the event) and `cribl_wp` (Cribl Stream Worker Process that processed the event). On the Loki side, this creates different streams, which prevents Loki from rejecting some events as being out of order when different Nodes or Worker Processes are emitting at different rates.

Other options include:

- `cribl_input` – Cribl Stream Source that processed the event.

- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_pipe` – Cribl Stream Pipeline that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.

Advanced Settings

Validate server certs: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

> Loki and Prometheus might complain about entries being delivered out of order when **Request concurrency** is set > `1` and any of **Flush period (sec)**, **Max body size (KB)**, or **Max events per request** are set to low values.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers. Values will be sent encrypted.

Metric renaming expression: A JavaScript expression that can be used to rename metrics.
The default expression – `name.replace(/\\./g, \'_\')` – replaces all `.` characters in a metric's name with the Prometheus-supported `_` character. Use the `name` global variable to access the metric's name. You can access event fields' values via `__e.<fieldName>`.

Message format: Whether to send events as `Protobuf` (the default) or `JSON`.

Compress: When the **Message format** is `JSON`, this setting controls the data compression format used before sending the data to Grafana Cloud. Defaults to `Yes` for GZIP-compression. (Applies only to Loki's JSON payloads. This slider is hidden when the **Message format** is `Protobuf`, because both Prometheus' and Loki's Protobuf implementations are Snappy-compressed by default.)

Logs message field: The event field to send as log output, for example: `_raw`. All other event fields are discarded. If left blank, Cribl Stream sends a JSON representation of the whole event.

Logs labels: Name/value pairs where the value can be a static or dynamic expression that has access to all log event fields.

Failed request logging mode: Determines which data is logged when a request fails. Use the drop-down to select one of these options:

- `None` (default).
- `Payload`.
- `Payload + Headers`. Use the **Safe Headers** field below to specify the headers to log. If you leave that field empty, all headers are redacted, even with this setting.

Safe headers: List the headers you want to log, in plain text.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

If an event contains the internal field `__criblMetrics`, Cribl Stream will send it Prometheus as a metric event. If `__criblMetrics` is absent, Cribl Stream will treat the event as a log and send it to Loki.

The internal field `__labels` specifies labels to add to log events. If a label is set in both the `__labels` field and in **Logs labels** and/or **System fields**, Cribl Stream sends the value from `__labels` to Loki. Setting the `__labels` field in a Pipeline gives you a quick way to experiment with the logs being sent.

If there are no labels set (this would happen when **System fields**, **Logs labels**, and `__labels` are all empty), Cribl Stream adds a default `source` label, which prevents Loki from rejecting events. The `source` label the concatenation of `cribl`, underscore (`_`), source type, colon (`:`), source-name, where source name and type are values in the `__inputId` event field, for example: `cribl_metrics:in_prometheus_rw`. If `__inputId` is missing, `source` is set to `cribl`.

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- The **Advanced Settings > Compress** toggle determines whether to compress the payload body before sending to Loki only. The toggle setting does not apply to Prometheus payloads, which are always compressed using Snappy.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, the connection will be thrown away, and a new one will be reattempted. This is to prevent sticking to a particular destination when there is a constant flow of events.
- If the server does not support keepalives (or if the server closes a pooled connection while idle), a new connection will be established for the next request.
- When resolving the Destination's hostname, Cribl Stream will pick the first IP in the list for use in the next connection. Enable Round-robin DNS to better balance distribution of events between Grafana Cloud nodes.

11.8.3. Loki

Cribl Stream can send log events to Grafana's Loki log aggregation system.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Loki

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Loki**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Loki**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Loki output definition.

Loki URL: The endpoint to send events to, e.g.: `https://logs-prod-us-central1.grafana.net`.

> To proxy outbound HTTP/S requests, see System Proxy Configuration.

Optional Settings

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

Select one of the following options for authentication:

- **None**: Don't use authentication.
- **Auth token**: Use HTTP token authentication. In the resulting **Token** field, enter the bearer token that must be included in the HTTP authorization header.
- **Auth token (text secret)**: This option exposes a drop-down in which you can select a stored text secret that references the bearer token described above. A **Create** link is available to store a new, reusable secret.
- **Basic**: This default option displays fields for you to enter HTTP Basic authentication credentials. **Username** is the Loki **User**. **Password** is your API key in the Grafana Cloud domain.
- **Basic (credentials secret)**: This option exposes a **Credentials secret** drop-down, in which you can select a stored text secret that references the Basic authentication credentials described above. A **Create** link is available to store a new, reusable secret.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, queueing is stopped and data blocking is applied. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. This will be of the form: `your/path/here/<worker-id>/<output-id>`. Defaults to: `$CRIBL_HOME/state/queues`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`. `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block**

option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Loki uses labels to define separate streams of logging data. This is a key concept. Cribl recommends that you familiarize yourself with the information and documentation Grafana provides about labels in Loki.

One canonical example is processing logs from servers in three environments: production, staging, and testing. You could create a label named `env` whose possible values are `prod`, `staging`, and `test`.

One basic principle is that if you set too many labels, you can end up with too many streams.

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to log events as labels. Supports wildcards.

By default, includes `cribl_host` (Cribl Stream Node that processed the event) and `cribl_wp` (Cribl Stream Worker Process that processed the event). On the Loki side, this creates different streams, which prevents Loki from rejecting some events as being out of order when different Nodes or Worker Processes are emitting at different rates.

Other options include:

- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_pipe` – Cribl Stream Pipeline that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.

Advanced Settings

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Validate server certs: Reject certificates that are not authorized by a trusted CA (e.g., the system's CA). Defaults to `Yes`.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `1`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `15`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers. Values will be sent encrypted.

Message format: Whether to send events as `Protobuf` (the default) or `JSON`.

Compress: When the **Message format** is `JSON`, this setting controls the data compression format used before sending the data to Loki. Defaults to `Yes` for GZIP-compression. (Applies only to Loki's JSON payloads. This slider is hidden when the **Message format** is `Protobuf`, because both Prometheus' and Loki's Protobuf implementations are Snappy-compressed by default.)

Logs message field: The event field to send as log output, for example: `_raw`. All other event fields are discarded. If left blank, Cribl Stream sends a JSON or Protobuf representation of the whole event.

Logs labels: Name/value pairs where the value can be a static or dynamic expression that has access to all log event fields.

Failed request logging mode: Determines which data is logged when a request fails. Use the drop-down to select one of these options:

- `None` (default).
- `Payload`.

- `Payload + Headers`. Use the **Safe Headers** field below to specify the headers to log. If you leave that field empty, all headers are redacted, even with this setting.

Safe headers: List the headers you want to log, in plain text.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

11.9. Splunk

11.9.1. Splunk HEC

The **Splunk HEC** Destination can stream data to a Splunk HEC (HTTP Event Collector) receiver through the event endpoint. The data arrives to Splunk cooked and parsed, so it enters at the Splunk data pipeline's indexing segment.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes
>
> Events sent to the Splunk HEC Destination will show higher outbound data volume than the same events sent to the Splunk Single Instance or Splunk Load Balanced Destinations, which use the S2S binary protocol.

Configuring Cribl Stream to Output to Splunk HEC Destinations

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Splunk** > **HEC**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Splunk** > **HEC**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Splunk HEC definition.

Load balancing: When enabled (default), lets you specify multiple Splunk HEC endpoints and load weights. With the default `No` setting, if you notice that Cribl Stream is not sending data to all possible IP addresses, enable **Advanced Settings** > **Round-robin DNS**.

Splunk HEC endpoint: URL of a Splunk HEC endpoint to send events to (e.g., `http://myhost.example.com:8088/services/collector/event`). This setting appears only when **Load balancing** is toggled to `No`.

Splunk HEC Endpoints

The **Splunk HEC Endpoints** table is where you specify a known set of receivers on which to load-balance data. It appears only when **Load balancing** is toggled to `Yes`.

Click **Add Endpoint** to specify more receivers on new rows. Each row provides the following fields:

HEC Endpoint: Specify the URL to a Splunk HEC endpoint to send events to – e.g., `http://localhost:8088/services/collector/event`.

Load weight: Set each connection's relative traffic-handling capability by assigning a weight (`> 0`). This column accepts arbitrary values, but for best results, assign weights in the same order of magnitude to all connections. Cribl Stream will attempt to distribute traffic to the connections according to their relative weights.

The final column provides an `X` button to delete any row from the table.

> When you first enable load balancing, or if you edit the load weight once your data is load–balanced, give the logic time to settle. The changes might take a few seconds to register.

For details on configuring all these options, see About Load Balancing.

> For Splunk Cloud endpoints, change the **Splunk HEC endpoint**'s default `http:` prefix to: `https:`.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Displays an **HEC Auth token** field for you to enter your Splunk HEC API access token.
- **Secret**: This option exposes an **HEC Auth token (text secret)** drop-down, in which you can select a stored secret that references the API access token described above. A **Create** link is available to store a new, reusable secret.

This Destination does not support Mutual TLS (mTLS).

Indexer Acknowledgement

Do not set **Enable Indexer Acknowledgement** on the Splunk token. With this setting enabled, Splunk receivers expect the Channel GUID to be passed in, and requests will fail with errors of this form:

```
channel: output:splunk_cloud_hec
cid: w2
level: error
message: Request failed
reason: Received status code=400, method=POST, url=https://http-inputs-
bazookatron.splunkcloud.com/services/collector/event
response: {"text":"Data channel is missing","code":10}
time: 2023-02-14T15:26:03.413Z
```

Optional Settings

Exclude current host IPs: This slider appears when **Load balancing** is set to `Yes`. It determines whether to exclude all IPs of the current host from the list of any resolved hostnames. Defaults to `No`, which keeps the current host available for load balancing.

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

This section is displayed when the **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Output multi-metrics: Toggle to `Yes` to output multiple-measurement metric data points. (Supported in Splunk 8.0 and above, this format enables sending multiple metrics in a single event, improving the efficiency of your Splunk capacity.)

Validate server certs: Reject certificates that are not authorized by a trusted CA (e.g., the system's CA). Defaults to `Yes`.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned. (This setting is available only when **General Settings** > **Load balancing** is set to `No`.)

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`. Each request can potentially hit a different HEC receiver.

Max body size (KB): Maximum size, in KB, of the request body. Defaults to `4096`. Lowering the size can potentially result in more parallel requests and also cause outbound requests to be made sooner.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values can cause the payload size to be smaller than the configured **Max body size**. Defaults to `1`.

- Retries happen on this flush interval.
- Any HTTP response code in the `2xx` range is considered success.
- Any response code in the `5xx` range is considered a retryable error, which will not trigger Persistent Queue (PQ) usage.
- Any other response code will trigger PQ (if PQ is configured as the Backpressure behavior).

Extra HTTP headers: Click **Add Header** to add **Name**/**Value** pairs to pass as additional HTTP headers. Values will be sent encrypted.

The next two fields take effect only in the Cribl App for Splunk. (Cribl Stream ignores their values.)

Next processing queue: Specify the next Splunk processing queue to send the events to, after HEC processing. Defaults to `indexQueue`.

Default _TCP_ROUTING: Specify the value of the `_TCP_ROUTING` field for events that do not have `_ctrl._TCP_ROUTING` set. Defaults to `nowhere`. This is useful only when you expect the HEC receiver to route this data on to another destination.

> The next two fields appear only when the **General Settings** > **Load balancing** option is set to `Yes`.

DNS resolution period (seconds): Re-resolve any hostnames after each interval of this many seconds, and pick up destinations from A records. Defaults to `600` seconds.

Load balance stats period (seconds): Lookback traffic history period. Defaults to `300` seconds. (Note that if multiple receivers are behind a hostname – i.e., multiple A records – all resolved IPs will inherit the weight of the host, unless each IP is specified separately. In Cribl Stream load balancing, IP settings take priority over those from hostnames.)

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, the connection will be thrown away, and a new connection will be reattempted. This is to prevent sticking to a particular Destination when there is a constant flow of events.
- If the server does not support keepalives – or if the server closes a pooled connection while idle – a new connection will be established for the next request.

- When resolving the Destination's hostname with load balancing disabled, Cribl Stream will pick the first IP in the list for use in the next connection. Enable Round-robin DNS to better balance distribution of events between Splunk HEC servers.

- See Splunk's documentation on editing `fields.conf` to ensure the visibility of index-time fields sent to Splunk by Cribl Stream.

Troubleshooting Resources

Cribl University offers an Advanced Troubleshooting > Destination Integrations: Splunk Cloud short course. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Advanced Troubleshooting short courses and Troubleshooting Criblets.

11.9.2. Splunk Single Instance

This Splunk Destination can stream data to a **free** Splunk Cloud instance. From the perspective of the receiving Splunk Cloud instance, the data arrives cooked and parsed.

For a **Standard** Splunk Cloud instance whose `../default/outputs.conf` file contains multiple indexer entries, you must instead use Cribl Stream's Splunk Load Balanced Destination.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Configuring Cribl Stream to Output to Splunk Destinations

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles or the **Destinations** left nav, select **Splunk** > **Single Instance**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles, select **Splunk** > **Single Instance**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Splunk Single Instance definition.

Address: Hostname of the Splunk receiver.

Port: The port number on the host.

Optional Settings

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** drops the newest events from being sent out of Cribl Stream, and throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

TLS Settings (Client Side)

Enabled defaults to `No`. When toggled to `Yes`:

Validate server certs: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

> ### Single .pem File
>
> If you have a **single** .pem file containing `cacert`, `key`, and `cert` sections, enter it in all of these fields above: **CA certificate path**, **Private key path (mutual auth)**, and **Certificate path (mutual auth)**.

Timeout Settings

Connection timeout: Amount of time (in milliseconds) to wait for the connection to establish, before retrying. Defaults to `10000`.

Write timeout: Amount of time (in milliseconds) to wait for a write to complete, before assuming connection is dead. Defaults to `60000`.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Output multiple metrics: Toggle to `Yes` to output multiple-measurement metric data points. (Supported in Splunk 8.0 and above, this format enables sending multiple metrics in a single event, improving the efficiency of your Splunk capacity.)

Minimize in-flight data loss: If set to `Yes` (the default), Cribl Stream will check whether the indexer is shutting down, and if so, will stop sending data. This helps minimize data loss during shutdown. (Note that Splunk logs will indicate that the Cribl app has set `UseAck` to `true`, even though Cribl does not enable full `UseAck` behavior.) If toggled to `No`, exposes the following alternative option:

Max failed health checks: Displayed (and set to `1` by default) only if **Minimize in-flight data loss** is disabled. This option sends periodic requests to Splunk once per minute, to verify that the Splunk endpoint is still alive and can receive data. Its value governs how many failed requests Cribl Stream will allow before closing this connection.

> A low threshold value improves connections' resilience, but by proliferating connections, this can complicate troubleshooting. Set to `0` to disable health checks entirely – here, if the connection to Splunk is forcibly closed, you risk some data loss.

Max S2S version: The highest version of the Splunk-to-Splunk protocol to expose during handshake. Defaults to `v3`; `v4` is also available.

Throttling: Throttle rate, in bytes per second. Defaults to `0`, meaning no throttling. Multiple-byte units such as KB, MB, GB etc. are also allowed, e.g., `42 MB`. When throttling is engaged, your **Backpressure behavior** selection determines whether Cribl Stream will handle excess data by blocking it, dropping it, or queueing it to disk.

Nested field serialization: Specifies how to serialize nested fields into index-time fields. Defaults to `None`.

Authentication method: Use the buttons to select one of these options:

- **Manual**: In the resulting **Auth token** field, enter the shared secret token to use when establishing a connection to a Splunk indexer.
- **Secret**: This option exposes an **Auth token (text secret)** drop-down, in which you can select a stored secret that references the auth token described above. A **Create** link is available to store a new, reusable secret.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Notes about Forwarding to Splunk

- Data sent to Splunk is not compressed.
- The only `ack` from indexers that Cribl Stream listens for and acts upon is the shutdown signal described in Minimize in-flight data loss above.
- If events have a Cribl Stream internal field called `__criblMetrics`, they'll be forwarded to Splunk as metric events.
- If events do **not** have a `_raw` field, they'll be serialized to JSON prior to sending to Splunk.
- See Splunk's documentation on editing `fields.conf` to ensure the visibility of index-time fields sent to Splunk by Cribl Stream.

Troubleshooting Resources

Cribl University offers an Advanced Troubleshooting > Destination Integrations: Splunk Cloud short course. To follow the direct course link, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before

proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Advanced Troubleshooting short courses and Troubleshooting Criblets.

11.9.3. Splunk Load Balanced

The **Splunk Load Balanced** Destination can load-balance the data it streams to multiple Splunk receivers. Downstream Splunk instances receive the data cooked and parsed.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes
>
> For additional details about sending to Splunk Cloud, see Splunk Cloud and BYOL Integrations.

Configuring Cribl Stream to Load-Balance to Multiple Splunk Destinations

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Splunk** > **Load Balanced**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Splunk** > **Load Balanced**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Splunk LB Destination definition.

Toggling **Indexer discovery** to `Yes` enables automatic discovery of indexers in an indexer clustering environment. This hides both **Exclude current host IPs** and the **Destinations** section, and displays the following fields:

Site: Clustering site from which indexers need to be discovered. In the case of a single site cluster, `default` is the default entry.

Cluster Manager URI: Full URI of Splunk cluster manager, in the format: `scheme://host:port`. (Worker Nodes/Edge Nodes normally access the cluster manager on **port 8089** to get the list of currently online indexers.)

Refresh period: Time interval (in seconds) between two consecutive fetches of indexer list from cluster manager. Defaults to `300` seconds, i.e., 5 minutes.

Authentication method: Use the buttons to select one of these options for authenticating to cluster Manager for indexer discovery:

- **Manual**: In the resulting **Auth token** field, enter the required token.
- **Secret**: This option exposes a **Auth token (text secret)** drop-down, in which you can select a stored secret that references the auth token. A **Create** link is available to store a new, reusable secret.

> Each Worker Process performs its own indexer discovery according to the above settings.

Destinations

The **Destinations** section appears only when **Indexer discovery** is set to its `No` default. Here, you specify a known set of Splunk receivers on which to load-balance data.

Click **Add Destination** to specify more receivers on new rows. Each row provides the following fields:

- **Address**: Hostname of the Splunk receiver. Optionally, you can paste in a comma-separated list, in `<host>:<port>` format.
- **Port**: Port number to send data to.
- **TLS**: Whether to inherit TLS configs from group setting, or disable TLS. Defaults to `inherit`.
- **TLS servername**: Servername to use if establishing a TLS connection. If not specified, defaults to connection host (if not an IP). Otherwise, uses the global TLS settings.
- **Load weight**: Set each connection's relative traffic-handling capability by assigning a weight (`> 0`). This column accepts arbitrary values, but for best results, assign weights in the same order of magnitude to all connections. Cribl Stream will attempt to distribute traffic to the connections according to their relative weights.

The final column provides an `X` button to delete any row from the **Destinations** table.

> For details on configuring all load balancing settings, see About Load Balancing.

Optional Settings

Toggle **Exclude current host IPs** to `Yes` if you want to exclude all the current host's IP addresses from the list of resolved hostnames.

Backpressure behavior: Select whether to block, drop, or queue events when all receivers in this group are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`. When toggled to `Persistent Queue`, adds the Persistent Queue Settings section (left tab) to the modal.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Enabling Cluster Manager Authentication

To enable token authentication on the Splunk cluster manager, you can find complete instructions in Splunk's Enable or Disable Token Authentication documentation. This option requires Splunk 7.3.0 or higher, and requires the following capabilites: `list_indexer_cluster` and `list_indexerdiscovery`.

For details on creating the token, see Splunk's Create Authentication Tokens topic – especially its section on how to Configure Token Expiry and "Not Before" Settings.

> Be sure to give the token an **Expiration** setting well in the future, whether you use **Relative Time** or **Absolute Time**. Otherwise, the token will inherit Splunk's default expiration time of `+30d` (30 days in the future), which will cause indexer discovery to fail.

If you have a failover site configured on Splunk's cluster manager, Cribl respects this configuration, and forwards the data to the failover site in case of site failure.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with

units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down.. **Drop new data** drops the newest events being sent out of Cribl Stream, throws away incoming data, and leaves the contents of the PQ unchanged.

TLS Settings (Client Side)

Enabled defaults to `No`. When toggled to `Yes`:

Validate server certs: Reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

> **Single PEM File**

> If you have a **single** `.pem` file containing `cacert`, `key`, and `cert` sections, enter this file's path in all of these fields above: **CA certificate path**, **Private key path (mutual auth)**, and **Certificate path (mutual auth)**.

Timeout Settings

- **Connection timeout**: Amount of time (in milliseconds) to wait for the connection to establish, before retrying. Defaults to `10000` ms.
- **Write timeout**: Amount of time (in milliseconds) to wait for a write to complete, before assuming connection is dead. Defaults to `60000` ms.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Output multiple metrics: Toggle this slider to `Yes` to output multiple-measurement metric data points. (Supported in Splunk 8.0 and above, this format enables sending multiple metrics in a single event, improving the efficiency of your Splunk capacity.)

Minimize in-flight data loss: If set to `Yes` (the default), Cribl Stream will check whether the indexer is shutting down, and if so, will stop sending data. This helps minimize data loss during shutdown. (Note that Splunk logs will indicate that the Cribl app has set `UseAck` to `true`, even though Cribl does not enable full `UseAck` behavior.) If toggled to `No`, exposes the following alternative option:

Max failed health checks: Displayed (and set to `1` by default) only if **Minimize in-flight data loss** is disabled. This option sends periodic requests to Splunk once per minute, to verify that the Splunk endpoint is still alive and can receive data. Its value governs how many failed requests Cribl Stream will allow before closing this connection.

> A low threshold value improves connections' resilience, but by proliferating connections, this can complicate troubleshooting. Set to `0` to disable health checks entirely – here, if the connection to Splunk is forcibly closed, you risk some data loss.

Max S2S version: The highest version of the Splunk-to-Splunk protocol to expose during handshake. Defaults to `v3`; `v4` is also available.

DNS resolution period (seconds): Re-resolve any hostnames after each interval of this many seconds, and pick up destinations from A records. Defaults to `600` seconds.

Load balance stats period (seconds): Lookback traffic history period. Defaults to `300` seconds. (Note that If multiple receivers are behind a hostname – i.e., multiple A records – all resolved IPs will inherit the weight of the host, unless each IP is specified separately. In Cribl Stream load balancing, IP settings take priority over those from hostnames.)

Max connections: Constrains the number of concurrent indexer connections, per Worker Process, to limit memory utilization. If set to a number > `0`, then on every DNS resolution period (or indexer discovery), Cribl Stream will randomly select this subset of discovered IPs to connect to. Cribl Stream will rotate IPs in future resolution periods – monitoring weight and historical data, to ensure fair load balancing of events among IPs.

Nested field serialization: Specifies whether and how to serialize nested fields into index-time fields. Select `None` (the default) or `JSON`.

Authentication method: Use the buttons to select one of these options:

- **Manual**: In the resulting **Auth token** field, enter the shared secret token to use when establishing a connection to a Splunk indexer.
- **Secret**: This option exposes an **Auth token (text secret)** drop-down, in which you can select a stored secret that references the auth token described above. A **Create** link is available to store a new, reusable secret.

Endpoint health fluctuation time allowance (ms): How long (in milliseconds) each receiver endpoint can report blocked, before this Destination as a whole reports unhealthy, blocking senders. (Grace period for

transient fluctuations.) Use `0` to disable the allowance; default is `100` ms; maximum allowed value is `60000` ms (1 minute).

Throttling: Throttle rate, in bytes per second. Multiple byte units such as KB, MB, GB, etc., are also allowed. E.g., `42 MB`. Default value of `0` indicates no throttling. When throttling is engaged, excess data will be dropped only if **Backpressure behavior** is set to **Drop events**. (Data will be blocked for all other **Backpressure behavior** settings.)

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

SSL Configuration for Splunk Cloud – Special Note

To connect to Splunk Cloud, you will need to extract the private and public keys from the Splunk-provided Splunk Cloud Universal Forwarder credentials package. You will also need to reference the CA Certificate located in the same package.

You can reuse many of the settings in this Splunk Cloud package to set up Splunk Cloud Destinations. Use the following steps:

Step 1. Extract the `splunkclouduf.spl` package on the Cribl Stream instance that you will be connecting to Splunk Cloud. You will have a folder that looks something like this:

```
100_my-splunk-cloud_splunkcloud
    /default/
        outputs.conf
        limits.conf
        your-splunk-cloud_server.pem
        your-splunk-cloud_cacert.pem
```

Step 2. (optional) Test connectivity to Splunk Cloud, using the Root CA certificate:

```
echo | openssl s_client -CAfile 100_<your-splunk-cloud>_splunkcloud/default/my-
splunk-cloud_cacert.pem -connect inputs1.<your-splunk-cloud>.splunkcloud.com:9997
```

To test the connection, you can use any of the URLs listed in the `[tcpout:splunkcloud]` stanza's `outputs.conf` section.

> You can simplify Steps 3 and 4 below by dragging and dropping (or uploading) the `.pem` files into Cribl Stream's **New Certificates** modal. See SSL Certificate Configuration.

Step 3. Extract the private key from the Splunk Cloud certificate. At the prompt, you will need the `sslPassword` value from the `outputs.conf`. Using Elliptic Curve keys:

```
openssl ec -in 100_<your-splunk-cloud>_splunkcloud/default/<your-splunk-
cloud>_server_cert.pem -out private.pem
```

If you are using RSA keys, instead use:

```
openssl rsa -in 100_<your-splunk-cloud>_splunkcloud/default/<your-splunk-
cloud>_server_cert.pem -out private.pem
```

Step 4. Extract the public key for the Server Certificate:

```
openssl x509 -in 100_<your-splunk-cloud>_splunkcloud/default/<your-splunk-
cloud>_server_cert.pem -out server.pem
```

Step 5. In the Splunk Load Balanced Destination's TLS Settings (Client Side) section, enter the following:

- CA Certificate Path: Path to `<your-splunk-cloud>_cacert.pem`.
- Private Key Path (mutual auth): Path to `private.pem` (Step 3 above).
- Certificate Path (mutual auth): Path to `server.pem` (Step 4 above).

> In a distributed deployment, enter this Destination configuration on each Worker Group/Fleet that forwards to Splunk Cloud. Then commit and deploy your changes.

Step 6. In a distributed deployment, enable Worker UI access, and verify that the Certificate files have been distributed to individual workers. If they are not present, copy the Certificate files to the Workers, using exactly the same paths you used at the Group level.

Notes About Forwarding to Splunk

- Data sent to Splunk is **not** compressed.
- The only `ack` from indexers that Cribl Stream listens for and acts upon is the shutdown signal described in Minimize in-flight data loss above.
- If events have a Cribl Stream internal field called `__criblMetrics`, they'll be forwarded to Splunk as metric events.

- If events do not have a `_raw` field, they'll be serialized to JSON prior to sending to Splunk.
- You can copy and paste the Splunk Cloud servers from the `[tcpout:splunkcloud]` stanza into the Splunk Load Balanced Destination's **General Settings** > **Destinations** section. E.g., from the example stanza below, you would copy only the bolded contents:

  ~~`[tcpout:splunkcloud]`~~

  ~~`server =`~~ **`inputs1.your-splunk-cloud.splunkcloud.com:9997, inputs2.your-splunk-cloud.splunkcloud.com:9997, inputs3.your-splunk-cloud.splunkcloud.com:9997, inputs4.your-splunk-cloud.splunkcloud.com:9997, inputs5.your-splunk-cloud.splunkcloud.com:9997, inputs6.your-splunk-cloud.splunkcloud.com:9997, inputs7.your-splunk-cloud.splunkcloud.com:9997, inputs8.your-splunk-cloud.splunkcloud.com:9997, inputs9.your-splunk-cloud.splunkcloud.com:9997, inputs10.your-splunk-cloud.splunkcloud.com:9997, inputs11.your-splunk-cloud.splunkcloud.com:9997, inputs12.your-splunk-cloud.splunkcloud.com:9997, inputs13.your-splunk-cloud.splunkcloud.com:9997, inputs14.your-splunk-cloud.splunkcloud.com:9997, inputs15.your-splunk-cloud.splunkcloud.com:9997`**

  ~~`compressed = false`~~

  From `limits.conf`, copy the `[thruput]` value, and paste it into the Splunk Load Balanced Destination's **Advanced Settings** tab > **Throttling** setting.
- If you enable TLS including cert validation, indexer discovery might trigger errors. This is because by default, Cribl will get the indexers' IPs from their certs, not their fully qualified domain names (FQDNs).

  As a workaround, use `server.conf` on each indexer, setting `register_forwarder_address = <your.idx.fqdn>`. Cribl will now get that value, and the certs will match.
- See Splunk's documentation on editing `fields.conf` to ensure the visibility of index-time fields sent to Splunk by Cribl Stream.

Troubleshooting Resources

Cribl University's Advanced Troubleshooting short courses include Destination Integrations: Splunk LB and Destination Integrations: Splunk Cloud. To follow these direct course links, first log into your Cribl University account. (To create an account, click the **Sign up** link. You'll need to click through a short **Terms & Conditions** presentation, with chill music, before proceeding to courses – but Cribl's training is always free of charge.) Once logged in, check out other useful Advanced Troubleshooting short courses and Troubleshooting Criblets.

11.10. Internal

11.10.1. Cribl HTTP

The Cribl HTTP Destination is available only in distributed deployments. It enables Worker Nodes to send data to peer Nodes, as long as all Nodes are connected to the same Leader.

You'll find the Cribl HTTP Destination/Source pair especially valuable in a hybrid Cloud deployment, where it ensures that you're billed for ingress only once – when Cribl first receives the data. All data subsequently transferred to other Workers via the Cribl HTTP Destination/Source pair is not charged. However, the Cribl HTTP Destination/Source pair can similarly reduce your metered data ingress in other scenarios, such as on-prem Edge to on-prem Stream.

In single-instance mode, or for testing, you can substitute the Webhook Destination. (However, this substitution will not facilitate sending all internal fields, as described below.)

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

You might choose this Destination over the Cribl TCP Destination in certain circumstances, such as when a firewall or proxy blocks raw TCP egress.

Configuration Requirements

Configuring Cribl HTTP flow between peer Worker Nodes imposes some particular requirements:

- The Cribl HTTP Destination must be on a Worker Node that is connected to the same Leader as the Cribl HTTP Source(s).
- You must specify the same Leader Address on the Worker Nodes that host both the Destination and Source. Otherwise, token verification will fail – breaking the connection and preventing data flow.
- To get the Leader Address specifically for Cribl.Cloud hybrid Workers, see Hybrid Cribl HTTP/Cribl TCP Configuration.
- To configure the Leader Address via the UI, log directly into each Worker Node's UI. Then select **Settings** > **Global Settings** > **Distributed Settings** > **Leader Settings** > **Address**.

- To configure the Leader Address via the instance.yml file, the `host` values on the connecting Worker Nodes must be identical. In this example, both Worker Nodes must point to `cribl-leader`:

```
distributed:
  mode: master
  master:
    host: cribl-leader
    port: 4200
```

- This Destination's **Cribl endpoint** field must point to the **Address** and **Port** you've configured on its peer Cribl HTTP Source(s).

Configuring a Cribl HTTP Destination

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Cribl HTTP**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Cribl HTTP**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Destination definition.

Load balancing: Set to `No` by default. When toggled to `Yes`, see Load Balancing Settings below. With the default `No` setting, if you notice that Cribl Stream is not sending data to all possible IP addresses, enable **Advanced Settings** > **Round-robin DNS**.

Cribl endpoint: URL of a Cribl Worker to send events to, e.g., `http://localhost:10200`.

> The **Cribl endpoint** field appears only when **Load balancing** is toggled to `Off`. Its value must point to the **Address** and **Port** you've configured on the peer Cribl HTTP Source to which you're sending.

Optional Settings

Compression: Codec to use to compress the data before sending. Defaults to `Gzip`.

Backpressure behavior: Specifies whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`. See Persistent Queue Settings below.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Load Balancing Settings

Enabling the **Load balancing** slider displays the following controls.

Exclude Current Host IPs: This slider determines whether to exclude all IPs of the current host from the list of any resolved hostnames. Defaults to `No`, which keeps the current host available for load balancing.

Cribl Worker Endpoints: In this table, you specify a set of Cribl Workers on which to load-balance data. To specify more Workers on new rows, click **Add Endpoint**. Each row provides the following fields.

- **Cribl Endpoint**: Enter the URL of a Worker to send events to.

  > Must point to the **Address** and **Port** configured on a peer Cribl HTTP Source to which you're sending.

- **Load weight**: Set each connection's relative traffic-handling capability by assigning a weight (`> 0`). This column accepts arbitrary values, but for best results, assign weights in the same order of magnitude to all connections. Cribl Stream will attempt to distribute traffic to the connections according to their relative weights.

- The final column provides an `X` button to delete any row from the table.

For details on configuring all these options, see About Load Balancing.

Persistent Queue Settings

> This section displays when the **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned. Only displayed when the General Settings tab's **Load balancing** option is disabled.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Exclude fields: Fields to exclude from the event. By default, `__kube_*` and `__metadata` are excluded. This Destination forwards all other Internal Fields.

> If you are running Cribl Stream 4.0.x (or earlier) and are using the Kubernetes Metrics Source with this Destination, consider excluding the following fields to reduce event size:
>
> `!__inputId,!__outputId,!__criblMetrics,__* .`
>
> The contents of `__raw` are often redundant with the `_raw` field's contents. Where they are identical, consider excluding one of the two.

Auth Token TTL minutes: The number of minutes before the internally generated authentication token expires, valid values between 1 and 60.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

The following options are added if you enable the General Settings tab's **Load balancing** option:

DNS resolution period (seconds): Re-resolve any hostnames after each interval of this many seconds, and pick up destinations from A records. Defaults to `600` seconds.

Load balance stats period (seconds): Lookback traffic history period. Defaults to `300` seconds. (Note that If multiple receivers are behind a hostname – i.e., multiple A records – all resolved IPs will inherit the weight of the host, unless each IP is specified separately. In Cribl Stream load balancing, IP settings take priority over those from hostnames.)

Internal Fields Loopback to Sources

The Cribl HTTP and Cribl TCP Destinations differ from all other Destinations in the way they handle internal fields: They normally send data back to their respective Cribl Sources – where Cribl internal fields, metrics, and sender-generated fields can all be useful.

These Destinations forward all internal fields by default, except for any that you exclude in **Advanced Settings** > **Exclude fields**.

As examples, if the following fields are present on an event forwarded by a Cribl HTTP or Cribl TCP Destination, they'll be accessible in the ingesting Cribl HTTP/TCP Source: `__criblMetrics`, `__srcIpPort`, `__inputId`, and `__outputId`.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

11.10.2. Cribl TCP

The Cribl TCP Destination is available only in distributed deployments. It enables Worker Nodes to send data to peer Nodes, as long as all Nodes are connected to the same Leader.

You'll find the Cribl TCP Destination/Source pair especially valuable in a hybrid Cloud deployment, where it ensures that you're billed for ingress only once – when Cribl first receives the data. All data subsequently transferred to other Workers via the Cribl TCP Destination/Source pair is not charged. However, the Cribl TCP Destination/Source pair can similarly reduce your metered data ingress in other scenarios, such as on-prem Edge to on-prem Stream.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

You might choose this Destination over the Cribl HTTP Destination in certain circumstances, such as when a firewall or proxy allows raw TCP egress. In single-instance mode or for testing, you can substitute the TCP JSON Destination. (However, this substitution will not facilitate sending all internal fields, as described below.)

Configuration Requirements

Configuring Cribl TCP flow between peer Worker Nodes imposes some particular requirements:

- The Cribl TCP Destination must be on a Worker Node that is connected to the same Leader as the Cribl TCP Source(s).
- You must specify the same Leader Address on the Worker Nodes that host both the Destination and Source. Otherwise, token verification will fail – breaking the connection and preventing data flow.
- To get the Leader Address specifically for Cribl.Cloud hybrid Workers, see Hybrid Cribl HTTP/Cribl TCP Configuration.
- To configure the Leader Address via the UI, log directly into each Worker Node's UI. Then select **Settings** > **Global Settings** > **Distributed Settings** > **Leader Settings** > **Address**.
- To configure the Leader Address via the instance.yml file, the `host` values on the connecting Worker Nodes must be identical. In this example, both Worker Nodes must point to `cribl-leader`:

```
distributed:
  mode: master
  master:
    host: cribl-leader
    port: 4200
```

- This Destination's **Address** and **Port** values must match the **Address** and **Port** you've configured on its peer Cribl TCP Source(s).

Configuring a Cribl TCP Destination

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Cribl TCP**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Cribl TCP**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Destination definition.

Load balancing: When toggled to `Yes`, see Load Balancing Settings below.

> The following two fields appear **only** with **Load balancing**'s default `No` setting, and must match the **Address** and **Port** you've configured on the peer Cribl TCP Source to which you're sending.

Address: Hostname of the receiver.

Port: Port number to connect to on the host, e.g., `10300`.

Optional Settings

Compression: Codec to use to compress the data before sending. Defaults to `None`.

Throttling: Throttle rate, in bytes per second. Defaults to `0`, meaning no throttling. Multiple-byte units such as KB, MB, GB etc. are also allowed, e.g., `42 MB`. When throttling is engaged, your **Backpressure behavior**

selection determines whether Cribl Stream will handle excess data by blocking it, dropping it, or queueing it to disk.

Backpressure behavior: Specifies whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`. See Persistent Queue Settings below.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Load Balancing Settings

Enabling the **Load balancing** slider displays the following controls:

Exclude Current Host IPs

This slider determines whether to exclude all IPs of the current host from the list of any resolved hostnames. Defaults to `No`, which keeps the current host available for load balancing.

Destinations

The **Destinations** table is where you specify a set of receivers on which to load-balance data.
Click **Add Destination** to specify more receivers on new rows. Each row provides the following fields:

Address: Hostname of a receiver. Optionally, you can paste in a comma-separated list, in `<host>:<port>` format.

Port: Port number to send data to on the host.

> Each **Address**/**Port** combination must match the **Address** and **Port** configured on a peer Cribl HTTP Source to which you're sending.

TLS: Whether to inherit TLS configs from group setting, or disable TLS. Defaults to `inherit`.

TLS servername: Servername to use if establishing a TLS connection. If not specified, defaults to connection host (if not an IP); otherwise, uses the global TLS settings.

Load weight: Set each connection's relative traffic-handling capability by assigning a weight (`> 0`). This column accepts arbitrary values, but for best results, assign weights in the same order of magnitude to all connections. Cribl Stream will attempt to distribute traffic to the connections according to their relative weights.

The final column provides an `X` button to delete any row from the table.

For details on configuring all these options, see About Load Balancing.

Persistent Queue Settings

> This section displays when the **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

TLS Settings (Client Side)

Use TLS defaults to `No`. When toggled to `Yes`:

Autofill?: This setting is experimental.

Validate server certs: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Timeout Settings

Connection timeout: Amount of time (in milliseconds) to wait for the connection to establish before retrying. Defaults to `10000`.

Write timeout: Amount of time (in milliseconds) to wait for a write to complete before assuming connection is dead. Defaults to `60000`.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Auth Token TTL minutes: The number of minutes before the internally generated authentication token expires, valid values between 1 and 60.

Exclude fields: Fields to exclude from the event. By default, `__kube_*` and `__metadata` are excluded. This Destination forwards all other Internal Fields.

> If you are running Cribl Stream 4.0.x (or earlier) and are using the Kubernetes Metrics Source with this Destination, consider excluding the following fields to reduce event size:
>
> `!__inputId,!__outputId,!__criblMetrics,__* .`
>
> The contents of `__raw` are often redundant with the `_raw` field's contents. Where they are identical, consider excluding one of the two.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

The following options are added if you enable the General Settings tab's **Load balancing** option:

DNS resolution period (seconds): Re-resolve any hostnames after each interval of this many seconds, and pick up destinations from A records. Defaults to `600` seconds.

Load balance stats period (seconds): Lookback traffic history period. Defaults to `300` seconds. (Note that If multiple receivers are behind a hostname – i.e., multiple A records – all resolved IPs will inherit the weight of the host, unless each IP is specified separately. In Cribl Stream load balancing, IP settings take priority over those from hostnames.)

Max connections: Constrains the number of concurrent receiver connections, per Worker Process, to limit memory utilization. If set to a number > `0`, then on every DNS resolution period, Cribl Stream will randomly select this subset of discovered IPs to connect to. Cribl Stream will rotate IPs in future resolution periods – monitoring weight and historical data, to ensure fair load balancing of events among IPs.

Internal Fields Loopback to Sources

The Cribl TCP and Cribl HTTP Destinations differ from all other Destinations in the way they handle internal fields: They normally send data back to their respective Cribl Sources – where Cribl internal fields, metrics, and sender-generated fields can all be useful.

These Destinations forward all internal fields by default, except for any that you exclude in **Advanced Settings** > **Exclude fields**.

As examples, if the following fields are present on an event forwarded by a Cribl HTTP or Cribl TCP Destination, they'll be accessible in the ingesting Cribl HTTP/TCP Source: `__criblMetrics`, `__srcIpPort`, `__inputId`, and `__outputId`.

11.10.3. Cribl Stream (Deprecated)

> This Destination was deprecated as of Cribl Stream 3.5, and has been removed as of v.4.0. Please instead use the Cribl TCP or the Cribl HTTP Destination to enable Worker Nodes to send data to peer Nodes.

The Cribl Stream Destination enables Edge Nodes, and/or Cribl Stream instances, to send data to one or multiple Cribl Stream instances.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Use New Destinations Instead

The replacement Destinations, Cribl TCP and Cribl HTTP, don't rely on IP filtering, for the following reasons:

- Load balancers and/or proxies between the Cribl Destination and Cribl Source can change the IP address, resulting in a bad match and rejected ingest.
- A Lookup table of all IP addresses needed to be sent to each Worker Node/Edge Node from the Leader, which is not scalable.
- The Lookup table of IP addresses required constant communication between the Worker Node/Edge Nodes and the Leader, making this fragile and placing an arbitrary reliance on the Leader that shouldn't be there.

Configuring a Cribl Stream Destination

In the **QuickConnect** UI: Click **Add Destination** beside **Destinations**. From the resulting drawer's tiles, select **Cribl Stream**. Next, click **Add Destination** to open a **New Cribl Stream** drawer.

Or, in the **Data Routes** UI: From the top nav of a Cribl Stream instance or Group, select **Data** > **Destinations**. From the top nav of a Cribl Edge instance or Fleet, select **More** > **Destinations**.

From the resulting page's tiles or the **Destinations** left nav, select **Cribl Stream**. Next, click **New Destination** to open a **Cribl Stream** > **New Destination** modal that provides the following options and fields.

General Settings

Output ID: Enter a unique name to identify this Destination definition.

Address: Hostname of the receiver.

Port: Port number to connect to on the host.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: In the resulting **Auth token** field, you can optionally enter an auth token to use in the connection header.
- **Secret**: This option exposes an **Auth token (text secret)** drop-down, in which you can select a stored secret that references the `authToken` header field value described above. A **Create** link is available to store a new, reusable secret.

Optional Settings

Compression: Codec to use to compress the data before sending. Defaults to `None`.

Throttling: Throttle rate, in bytes per second. Defaults to `0`, meaning no throttling. Multiple-byte units such as KB, MB, GB etc. are also allowed, e.g., `42 MB`. When throttling is engaged, your **Backpressure behavior** selection determines whether Cribl Stream will handle excess data by blocking it, dropping it, or queueing it to disk.

Backpressure behavior: Specifies whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`. See Persistent Queue Settings below.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated

> per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

TLS Settings (Client Side)

Enabled defaults to `No`. When toggled to `Yes`:

Autofill?: This setting is experimental.

Validate server certs: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `No`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Timeout Settings

Connection timeout: Amount of time (in milliseconds) to wait for the connection to establish before retrying. Defaults to `10000`.

Write timeout: Amount of time (in milliseconds) to wait for a write to complete before assuming connection is dead. Defaults to `60000`.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.

- `cribl_output` – Cribl Stream Destination that processed the event.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

11.10.4. Default

The **Default** Destination simply enables you to specify a default output from among your already-configured Destinations.

> Type: Internal | TLS Support: N/A | PQ Support: N/A

Configuring Cribl Stream's Default Destination

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). A **Default** Destination is preconfigured and ready to use in the right **Destinations** column. Hover over the tile and click its **Configure** button to proceed.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Default**. From the resulting **Manage Default Destination** page, click anywhere on the `default` row to proceed.

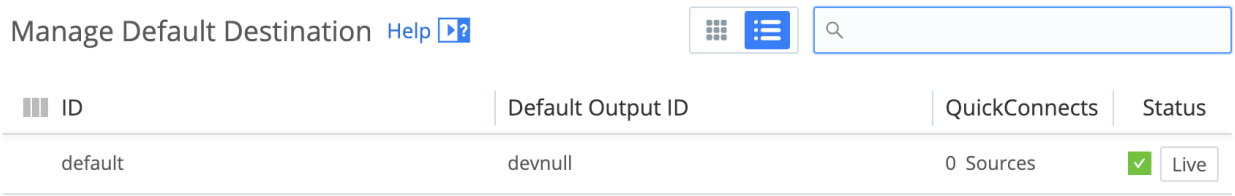

Default Destination – click to configure

In the resulting **Destinations > Default** drawer or modal, use the **Default Output ID** drop-down to select one of your configured Destinations. After you click **Save**, this will become Cribl Stream's default Destination.

The only other field here is the **Output ID**, whose value is locked to `default`.

Preventing Circular References

If you've configured an Output Router Destination with a branch that points to this Default Destination (`default:default`), you cannot select that Output Router here. This restriction prevents a circular

dependency.

11.10.5. DevNull

The DevNull Destination simply drops events. Cribl provides this as a basic output to test Pipelines and Routes.

> Type: Internal | TLS Support: N/A | PQ Support: N/A

Configuring Cribl Stream to Forward to DevNull

DevNull requires no configuration: A DevNull Destination is preconfigured and active as soon as you install Cribl Stream.

To verify this, from the top nav, click **Manage**, then select a **Worker Group** to configure. Next, select **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Devnull**. Look for the **Live** indicator at the top right.

In the QuickConnect UI, click **Collect** (Edge only), a **DevNull** Destination is preconfigured and ready to use in the right **Destinations** column.

11.10.6. Output Router

Output Routers are meta-destinations that allow for output selection based on rules. Rules are evaluated in order, top-down, with the first match being the winner.

> Type: Internal | TLS Support: N/A | PQ Support: N/A

Configuring Cribl Stream to Send to an Output Router

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Output Router**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Output Router**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Router name: Enter a unique name to identify this Router definition.

Rules: A list of event routing rules. Each provides the following settings:

- **Filter expression**: JavaScript expression to select events to send to output.
- **Output**: Output to send matching events to.
- **Description**: Optionally, enter a description of this rule's purpose.
- **Final**: Toggle to `No` if you want the event to be checked against other rules lower in the stack.

Optional Settings

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.

- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Limitations/Options

- An Output Router cannot reference another. This is by design, to avoid circular references.
- Also to avoid circular references, an Output Router cannot reference a Default Destination that points back to Output Router.
- **Events that do not match any of the rules are dropped**. Use a catch-all rule to change this behavior.
- No post-processing (conditioning) can be attached to the Output Router Destination itself. But you are free to use pre-processing Pipelines on the Source tier, and post-processing Pipelines on any or all Destinations that the Output Router references.
- Data can be cloned by toggling the `Final` flag to `No`. (The default is `Yes`, i.e., no cloning.)

Example

Scenario:

- Send all events where `host` starts with `66` to Destination `San Francisco`.
- From the rest of the events: Send all events with `method` field `POST` or `GET` to both `Seattle` and `Los Angeles` (i.e., clone them).
- Send the remaining events to `New York City`.

Router Name: **router66**

FILTER EXPRESSION	OUTPUT	FINAL
`host.startsWith('66')`	**San Francisco**	Yes

FILTER EXPRESSION	OUTPUT	FINAL
`method=='POST' || method=='GET`	**Seattle**	No
`method=='POST' || method=='GET'`	**Los Angeles**	Yes
`true`	**New York**	Yes

11.11. CrowdStrike Falcon LogScale

The **CrowdStrike Falcon LogScale** Destination can stream data to a LogScale HEC (HTTP Event Collector) in JSON or Raw format.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes
>
> (In Cribl Stream 3.5.x, this Destination was labeled **Humio HEC**. Some links from this page might still lead to "Humio"-branded resources that CrowdStrike has not renamed.)

Recommendations

To load-balance, Cribl recommends following LogScale's Cluster Setup – place a load balancer in front of cluster nodes.

We recommend sending events with the `sourceType` field set to a LogScale parser. This tells LogScale which parser to use to extract fields (e.g., `"sourceType":"json"`).

If LogScale cannot match the `sourceType` value to a parser, it will use the `kv` parser, and you will get an error that LogScale could not resolve the specified parser. Alternatively, you can assign a parser to the ingest token that you use to authenticate this Destination.

> The `fields` element does not support Nested JSON. Any nested elements will be dropped.

Configuring Cribl Stream to Output to CrowdStrike Falcon LogScale Destinations

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **CrowdStrike Falcon LogScale**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **CrowdStrike Falcon LogScale**.

Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this CrowdStrike Falcon LogScale definition.

LogScale endpoint: URL of a CrowdStrike Falcon LogScale endpoint to send events to (e.g., `https://cloud.us.humio.com:443/api/v1/ingest/hec`).

- JSON-formatted events normally go to `/api/v1/ingest/hec` or `/services/collector`.
- Raw (simple line-delimited) events normally go to `/api/v1/ingest/hec/raw` or `/services/collector/raw`.

Request format: Select how you want events formatted, either `JSON` or `Raw`. Make sure your selection here matches the **LogScale endpoint** you specify above.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Displays a **LogScale Auth token** field for you to enter your CrowdStrike Falcon LogScale HEC API token.
- **Secret**: Displays a **LogScale token (text secret)** drop-down, in which you can select a stored secret that references the API token described above. A **Create** link is available to store a new, reusable secret.

Optional Settings

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.

- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Defaults to `Yes` to reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA).

Round–robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned. (This setting is available only when **General Settings** > **Load balancing** is set to `No`.)

Compress: Defaults to `Yes` to compress the payload body before sending.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`. Each request can potentially hit a different HEC receiver.

Max body size (KB): Maximum size, in KB, of the request body. Defaults to `4096`. Lowering the size can potentially result in more parallel requests and also cause outbound requests to be made sooner.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values can cause the payload size to be smaller than the configured **Max body size**. Defaults to `1`.

- Retries happen on this flush interval.
- Any HTTP response code in the `2xx` range is considered success.
- Any response code in the `5xx` range is considered a retryable error, which will not trigger Persistent Queue (PQ) usage.
- Any other response code will trigger PQ (if PQ is configured as the Backpressure behavior).

Extra HTTP headers: Click **Add Header** to add **Name**/**Value** pairs to pass as additional HTTP headers. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers that you want to declare as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, the connection will be thrown away, and a new connection will be reattempted. This is to prevent sticking to a particular Destination when there is a constant flow of events.
- If the server does not support keepalives – or if the server closes a pooled connection while idle – a new connection will be established for the next request.
- Cribl Stream will pick the first IP in the list for use in the next connection. Enable Round-robin DNS to better balance distribution of events between CrowdStrike Falcon LogScale servers.

11.12. Datadog

Cribl Stream can send log and metric events to Datadog. (Datadog supports metrics only of type `gauge`, `counter`, and `rate` via its REST API.)

Cribl Stream sends events to the following Datadog endpoints in the US region. Use a DNS lookup to discover and include the corresponding IP addresses in your firewall rules' allowlist.

- Logs: `https://http-intake.logs.datadoghq.com/v1/input`
- Metrics: `https://api.datadoghq.com/api/v1/series`

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Datadog

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Datadog**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Datadog**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Destination definition.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Displays a field for you to enter an **API key** that is available in your Datadog profile.
- **Secret**: This option exposes an **API key (text secret)** drop-down, in which you can select a stored secret that references the API access token described above. A **Create** link is available to store a new, reusable

secret.

API key: Enter your Datadog organization's API key.

Optional Settings

Datadog site: Select the Datadog region you are sending to. Defaults to `US`; the other options are `US3`, `US5`, `Europe`, `US1-FED`, and `AP1`.

Send logs as: Specify the content type to use when sending logs. Defaults to `application/json`, where each log message is represented by a JSON object. The alternative `text/plain` option sends one message per line, with newline `\n` delimiters.

Message field: Name of the event field that contains the message to send. If not specified, Cribl Stream sends a JSON representation of the whole event (regardless of whether **Send logs as** is set to JSON or plain text).

Source: Name of the source to send with logs. If you're sending logs as JSON objects (i.e., you've selected **Send logs as**: `application/json`), the event's `source` field (if set) will override this value.

Host: Name of the host to send with logs. If you're sending logs as JSON objects, the event's `host` field (if set) will override this value.

Service: Name of the service to send with logs. If you're sending logs as JSON objects, the event's `__service` field (if set) will override this value.

Datadog tags: List of tags to send with logs (e.g., `env:prod`, `env_staging:east`).

Severity: Default value for message severity. If you're sending logs as JSON objects, the event's `__severity` field (if set) will override this value. Defaults to `info`; the drop-down offers many other severity options.

> Datadog uses the above five fields (`source`, `host`, `__service`, `tags`, and `__severity`) to enhance searches and UX.

Allow API key from events: If toggled to `Yes`, any API key in the `__agent_api_key` internal field will override the **API key** field's value. This option is useful if events originate from multiple Datadog Agent Sources, each configured with a different API key. (For further details, see Managing API Keys.)

Backpressure behavior: Specify whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`. Select `Gzip` to enable compression.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (s): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

If an event contains the internal field `__criblMetrics`, Cribl Stream will send it to Datadog as a metric event. Otherwise, Cribl Stream will send it as a log event.

You can use these fields to override outbound event values for log events:

- `__service`
- `__severity`

No internal fields are supported for metric events.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

For More Information

You might find these Datadog references helpful:

- Submit Metrics
- Send Logs
- Metrics Types

11.13. DataSet

Cribl Stream can send log events to DataSet. This Destination sends batches of events, as JSON, to the DataSet API's addEvent method.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to DataSet

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **DataSet**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **DataSet**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Destination definition.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Displays a field for you to enter an **API key** that is available in your DataSet profile.
- **Secret**: This option exposes an **API key (text secret)** drop-down to select a stored secret that references an API key. A **Create** link is available to store a new, reusable secret.

API key: Enter your DataSet API key that has `Log Write Access`.

Optional Settings

DataSet site: Select the `US` (default), `Europe`, or `Custom` region. If you select `Custom`, enter your custom endpoint URL.

Message field: Name of the event field that contains the message to send. If not specified, Cribl Stream sends all non-internal fields of events passing through the Destination. If specified, we follow this logic:

- If an event does not contain the specified field, send the whole event (except internal fields).
- If an event has the specified field, and the field's value is a non-object, send the event in the format: `{ message: <value from event> }`.
- If an event has the specified field, and the field's value is an object, send the event in the format: `{ <all fields from the object> }`.

Exclude fields: Fields to exclude from the event if the **Message field** either is unspecified or refers to an object. Ignored if the **Message field** is a string, number, or boolean. If empty, Cribl Stream sends all non-internal fields.

Default exclude fields are `sev`, `_time`, `ts`, and `thread`. We automatically send these fields as metadata of the event, in DataSet's required format. This is to avoid charges for field bytes – metadata bytes do not count toward ingestion.

Server/host field: Name of the event field that contains the server or host that generated the event. Cribl Stream groups events by the value of this field, and gives them a unique session token to conform to the DataSet API. Each group is sent out as a separate batch; therefore, Cribl recommends specifying a field with a low cardinality, to avoid queuing up many different batches at the Destination. If not specified, or not a string, the implicit default value is `cribl_<outputId>`.

Timestamp field: Name of the event field that contains the event timestamp. Cribl Stream sends this value as part of each event's metadata, not as an attribute field on the event.

> Timestamps are automatically converted to a nanosecond-precision string. If an event does not contain the field specified **Timestamp field**, or if the value cannot be converted into a nanosecond-precision string, Cribl Stream assigns a timestamp using the first valid output returned from `ts`, `_time`, or `Date.now()`, in that order.

Severity: Use the drop-down to assign a default value to the `severity` field (which is sent as event metadata, not as an attribute field). Cribl Stream falls back to this value when an event contains no valid `sev` or `__severity` field. DataSet's severity model ranges from `0` least-severe (finest) to `6` most-severe (fatal).

- Where an event's `sev` field contains an integer in this range, Cribl Stream passes it through as the severity.

- Where the `sev` field contains a string matching DataSet's enum (`finest`, `finer`, `fine`, `info`, `warning`, `error`, `fatal`), Cribl Stream converts it to the corresponding integer.

Backpressure behavior: Specify whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This section is displayed when the **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`. Select `Gzip` to enable compression.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Defaults to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Click **Add header** to define **Name**/**Value** pairs to pass as additional HTTP headers.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers here to declare them as safe to log in plaintext. (Sensitive headers like `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

The `__severity` field is included in the severity assignment order, after the `sev` field. The order is `sev`, `__severity`, then the configured default **Severity**.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

11.14. Elasticsearch

Cribl Stream can send events to an Elasticsearch cluster using the Bulk API. As of v.3.3, Cribl Stream supports Elastic data streams.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Configuring Cribl Stream to Output to Elasticsearch

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Elasticsearch**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Elasticsearch**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Elasticsearch Destination definition.

Load balancing: When enabled (default), lets you specify multiple bulk API URLs and load weights. With the default `No` setting, if you notice that Cribl Stream is not sending data to all possible IP addresses, enable **Advanced Settings** > **Round-robin DNS**.

Bulk API URL or Cloud ID: Specify either an Elasticsearch cluster or Elastic Cloud deployment to send events to. For an Elasticsearch cluster, enter a URL (e.g., `http://<myElasticCluster>:9200/_bulk`). For an Elastic Cloud deployment, enter its Cloud ID. This setting is not available when **Load balancing** is enabled.

Bulk API URLs

The **Bulk API URLs** table is where you specify a known set of receivers on which to load-balance data. Click **Add URL** to specify more receivers on new rows. Each row provides the following fields:

URL: Specify the URL to an Elastic node to send events to – e.g., `http://elastic:9200/_bulk`

Load weight: Set each connection's relative traffic-handling capability by assigning a weight (`> 0`). This column accepts arbitrary values, but for best results, assign weights in the same order of magnitude to all connections. Cribl Stream will attempt to distribute traffic to the connections according to their relative weights.

The final column provides an `X` button to delete any row from the table.

For details on configuring all these options, see About Load Balancing.

> When you first enable load balancing, or if you edit the load weight once your data is load–balanced, give the logic time to settle. The changes might take a few seconds to register.

Index or data stream: Enter a JavaScript expression that evaluates to the name of the Elastic data stream or Elastic index where you want events to go. The expression is evaluated for each event; can evaluate to a constant value; and must be enclosed in quotes or backticks. An event's `__index` field can overwrite the index or data stream name.

Authentication Settings

Authentication enabled: When toggled to `Yes`, use the **Authentication method** buttons to select one of these options:

Manual: Enter your credentials directly in the resulting **Username** and **Password** fields.

Secret: Exposes a **Credentials secret** drop-down, in which you can select a stored secret that references the credentials described above. A **Create** link is available to store a new, reusable secret.

Manual API Key: Exposes an **API key** field to directly enter your Elasticsearch API key.

Secret API Key: Exposes an **API key (text secret)** drop-down, in which you can select a stored text secret that references your Elasticsearch API key. A **Create** link is available to store a new, reusable secret.

Optional Settings

Exclude current host IPs: This slider appears when **Load balancing** is set to `Yes`. It determines whether to exclude all IPs of the current host from the list of any resolved hostnames. Defaults to `No`, which keeps the current host available for load balancing.

Type: Specify document type to use for events. An event's `__type` field can overwrite this value.

Backpressure behavior: Specify whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the `Block` option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the

throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Reject certificates that are **not** authorized by a trusted CA (e.g., the system's CA). Defaults to `Yes`.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned. (This option is visible only when the **General Settings** > **Load balancing** option is set to `No`.)

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Flush period (s): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers. Values will be sent encrypted.

Extra parameters: Name/Value pairs to pass as additional parameters. If you are using Elastic ingest pipelines, specify an extra parameter whose name is `pipeline` and whose value is the name of your pipeline, similar to these examples.

Elastic version: Determines how to format events. For Elastic Cloud, you must explicitly set version `7.x`. For other Elasticsearch clusters, the `Auto` default will discover the downstream Elasticsearch version automatically, but you have the option to explicitly set version `6.x` or `7.x`.

Elastic pipeline: To send data to an Elastic Ingest pipeline, optionally enter that pipeline's name as a constant. Or, enter a JavaScript expression that evaluates outgoing events, and sends matching events to the desired Elastic Ingest pipeline(s). For example, the expression `sourcetype=='access_common'?'cribl_pipeline':undefined` matches events whose `sourcetype` is `access_common`, and sends them to an Elastic Ingest pipeline named `cribl_pipeline`.

> The next two fields appear only when the **General Settings** > **Load balancing** option is set to `Yes`.

DNS resolution period (seconds): Re-resolve any hostnames each time this interval recurs, and pick up destinations from the A records. Defaults to `600` seconds.

Load balance stats period (seconds): Lookback traffic history period. Defaults to `300` seconds.

Include document_id: Toggle this setting to `No` to omit the `document_id` field when sending events to an Elastic TSDS (time series data stream).

Failed request logging mode: Determines which data is logged when a request fails. Use the drop-down to select one of these options:

- `None` (default).
- `Payload`.
- `Payload + Headers`. Use the **Safe Headers** field below to specify the headers to log. If you leave that field empty, all headers are redacted, even with this setting.

Safe headers: List the headers you want to log, in plain text.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Field Normalization

This Destination normalizes the following fields:

- `_time` becomes `@timestamp` at millisecond resolultion.
- `host.name` is set to `host`.

See also our Elasticsearch Source documentation's **Field Normalization** section.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Fields for this Destination:

- `__id`
- `__type`
- `__index`

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, the connection will be thrown away, and a new one will be reattempted. This is to prevent sticking to a particular destination when there is a constant flow of events.
- If the server does not support keepalives (or if the server closes a pooled connection while idle), a new connection will be established for the next request.
- When resolving the Destination's hostname with load balancing disabled, Cribl Stream will pick the first IP in the list for use in the next connection. Enable Round-robin DNS to better balance distribution of events between Elasticsearch cluster nodes.

11.15. Filesystem/NFS

Filesystem is a non-streaming Destination type that Cribl Stream can use to output files to a local file system or a network-attached file system (NFS).

> Type: Non-Streaming | TLS Support: N/A | PQ Support: N/A

Configuring Cribl Stream to Output to Filesystem Destinations

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Filesystem**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Filesystem**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Filesystem definition.

Output location: Final destination for the output files.

Data format: The output data format defaults to `JSON`. `Raw` and `Parquet` are also available. Selecting `Parquet` (supported only on Linux, not Windows) exposes a **Parquet Settings** left tab, where you **must** configure certain options in order to export data in Parquet format.

Optional Settings

Staging location: Local filesystem location in which to buffer files before compressing and moving them to the final destination. Cribl recommends that this location be stable and high-performance. (This field is not displayed or available on Cribl.Cloud-managed Worker Nodes.)

Partitioning expression: JavaScript expression that defines how files are partitioned and organized. Default is date-based. If blank, Cribl Stream will fall back to the event's `__partition` field value (if present); or otherwise to the root directory of the **Output Location** and **Staging Location**.

Compress: Data compression format used before moving to final destination. Defaults to `gzip` (recommended). This setting is not available when **Data format** is set to `Parquet`.

File name prefix expression: The output filename prefix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `CriblOut`.

File name suffix expression: The output filename suffix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `` `.${C.env["CRIBL_WORKER_ID"]}.${__format}${__compression === "gzip" ? ".gz" : ""}` ``, where `__format` can be `json` or `raw`, and `__compression` can be `none` or `gzip`.

> To prevent files from being overwritten, Cribl appends a random sequence of 6 characters to the end of their names. File name prefix and suffix expressions do not bypass this behavior.
>
> For example, if you set the **File name prefix expression** to `CriblExec` and set the **File name suffix expression** to `.csv`, the file name might display as `CriblExec-adPRWM.csv` with `adPRWM` appended.

Backpressure Behavior: Select whether to block or drop events when all receivers are exerting backpressure. (Causes might include an accumulation of too many files needing to be closed.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.

- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Parquet Settings

To write out Parquet files, note that:

- Cribl Edge Workers support Parquet only when running on Linux, not on Windows.
- See Working with Parquet for pointers on how to avoid problems such as data mismatches.

Parquet schema: Select a schema from the drop-down.

> If you need to modify a schema or add a new one, follow the instructions in our Parquet Schemas topic. These steps will propagate the freshest schema back to this drop-down.

Row group size: Set the target memory size for row group segments. Modify this value to optimize memory use when writing. Value must be a positive integer smaller than the **File size** value, with appropriate units. Defaults to `16 MB`.

Page size: Set the target memory size for page segments. Generally, set lower values to improve reading speed, or set higher values to improve compression. Value must be a positive integer smaller than the **Row group size** value, with appropriate units. Defaults to `1 MB`.

Parquet version: Determines which data types are supported, and how they are represented. Defaults to `2.6`; `2.4` and `1.0` are also available.

Data page version: Serialization format for data pages. Defaults to `V1`; `V2` is also available, but not all reader implementations support it.

Log invalid rows: Toggle to `Yes` to output up to 20 unique rows that were skipped due to data format mismatch. Log level must be set to `debug` for output to be visible.

Advanced Settings

Max file size (MB): Maximum uncompressed output file size. Files of this size will be closed and moved to final output location. Defaults to `32`.

Max file open time (sec): Maximum amount of time to write to a file. Files open for longer than this will be closed and moved to final output location. Defaults to `300`.

Max file idle time (sec): Maximum amount of time to keep inactive files open. Files open for longer than this will be closed and moved to final output location. Defaults to `30`.

Max open files: Maximum number of files to keep open concurrently. When exceeded, the oldest open files will be closed and moved to final output location. Defaults to `100`.

> Cribl Stream will close files when **either** of the `Max file size (MB)` or the `Max file open time (sec)` conditions are met.

Add Output ID: When set to `Yes` (the default), adds the **Output ID** field's value to the staging location's file path. This ensures that each Destination's logs will write to its own bucket.

> For a Destination originally configured in a Cribl Stream version below 2.4.0, the **Add Output ID** behavior will be switched **off** on the backend, regardless of this slider's state. This is so that upon Cribl Stream upgrade and restart, any files pending in the original staging directory will not be lost. To enable this option for such Destinations, Cribl's recommended migration path is:
>
> - Clone the Destination.
> - Where Routes reference the original Destination, redirect them to instead reference the new, cloned Destination.
>
> This way, the original Destination will process pending files (after an idle timeout), and the new, cloned Destination will process newly arriving events with **Add output ID** enabled.

Remove staging dirs: Toggle to `Yes` to delete empty staging directories after moving files. This prevents the proliferation of orphaned empty directories. When enabled, exposes this additional option:

- **Staging cleanup period**: How often (in seconds) to delete empty directories when **Remove staging dirs** is enabled. Defaults to `300` seconds (every 5 minutes). Minimum configurable interval is `10` seconds; maximum is `86400` seconds (every 24 hours).

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Field for this Destination:

- `__partition`

> To export events from an intermediate stage **within a Pipeline** to a file, see the Tee Function.

11.16. Honeycomb

Cribl Stream supports sending events to a Honeycomb dataset.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Honeycomb

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Honeycomb**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Honeycomb**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Honeycomb definition.

Dataset name: Name of the dataset to send events to. (E.g., `iLoveObservabilityDataset`.)

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Displays a field for you to enter the **API key** for the team to which the dataset belongs.
- **Secret**: This option exposes an **API key (text secret)** drop-down, in which you can select a stored secret that references the API key described above. A **Create** link is available to store a new, reusable secret.

Optional Settings

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, the connection will be thrown away, and a new one will be reattempted. This is to prevent sticking to a particular Destination when there is a constant flow of events.
- If the server does not support keepalives (or if the server closes a pooled connection while idle), a new connection will be established for the next request.
- When resolving the Destination's hostname, Cribl Stream will pick the first IP in the list for use in the next connection. Enable Round-robin DNS to better balance distribution of events between destination cluster nodes.

11.17. InfluxDB

Cribl Stream supports sending data to InfluxDB (versions 1.x and 2.0.x) and InfluxDB Cloud.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Configuring Cribl Stream to Output to InfluxDB

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **InfluxDB**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **InfluxDB**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this InfluxDB definition.

Write API URL: The URL of an InfluxDB cluster to send events to. (E.g., `http://localhost:8086/write`.)

Use v2 API: You can enable the InfluxDB v2 API with InfluxDB version 1.8 or later. This toggle defaults to `No` – which falls back to the v1 API, and displays a **Database** field.

If you toggle **Use v2 API** to `Yes`, Cribl Stream communicates using InfluxDB's v2 API, and instead displays these two fields:

- **Bucket**: Enter the bucket to write to. (Required.)
- **Organization**: The Organization ID corresponding to the specified **Bucket**. (Required in this configuration, although InfluxDB v.1.8 will ignore it.)

Database: Name of the database on which to write data points. (Required.)

Optional Settings

Timestamp precision: Sets the precision for the supplied UNIX time values. Defaults to `Milliseconds`.

Dynamic value fields: When enabled, Cribl Stream will pull the value field from the metric name. (E.g., `db.query.user` will use `db.query` as the measurement and `user` as the value field). Defaults to `Yes`.

Value field name: Name of the field in which to store the metric when sending to InfluxDB. This will be used as a fallback if dynamic name generation is enabled but fails. Defaults to `value`.

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Authentication

Use the **Authentication type** drop-down to select one of these options:

None: This default setting does not use authentication.

Auth token: Use HTTP token authentication. In the resulting **Token** field, enter the bearer token that must be included in the HTTP authorization header.

Auth token (text secret): This option exposes a **Token (text secret)** drop-down, in which you can select a stored text secret that references the bearer token described above. A **Create** link is available to store a new, reusable secret.

Basic: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.

Basic (credentials secret): This option exposes a **Credentials secret** drop-down, in which you can select a stored text secret that references the Basic authentication credentials described above. A **Create** link is available to store a new, reusable secret.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.

- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Reject certificates that are **not** authorized by a trusted CA (e.g., the system's CA). Defaults to `Yes`.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

11.18. MinIO

MinIO is a non-streaming Destination type, to which Cribl Stream can output objects.

> Type: Non-Streaming | TLS Support: Configurable | PQ Support: No

Configuring Cribl Stream to Output to MinIO Destinations

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **MinIO**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **MinIO**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this MinIO definition.

MinIO endpoint: MinIO service URL (e.g., http://minioHost:9000).

MinIO bucket name:Name of the destination MinIO bucket. This value can be a constant, or a JavaScript expression that will be evaluated only at init time. E.g., referencing a Global Variable: `myBucket-${C.vars.myVar}`. Ensure that the bucket already exists, otherwise MinIO will generate "bucket does not exist" errors.

> Event-level variables are not available for JavaScript expressions. This is because the bucket name is evaluated only at Destination initialization. If you want to use event-level variables in file paths, Cribl recommends specifying them in the **Partitioning Expression** field (described below), because this is evaluated for each file.

Staging location: Filesystem location in which to locally buffer files before compressing and moving to final destination. Cribl recommends that this location be stable and high-performance. (This field is not displayed or available on Cribl.Cloud-managed Worker Nodes.)

Key prefix: Root directory to prepend to path before uploading. Enter a constant, or a JS expression enclosed in single quotes, double quotes, or backticks.

Prefix to apply to files/objects before uploading to the specified bucket. MinIO will display key prefixes as folders.

Data format: The output data format defaults to `JSON`. `Raw` and `Parquet` are also available. Selecting `Parquet` (supported only on Linux, not Windows) exposes a **Parquet Settings** left tab, where you **must** configure certain options in order to export data in Parquet format.

Optional Settings

Partitioning expression: JavaScript expression that defines how files are partitioned and organized. Default is date-based. If blank, Cribl Stream will fall back to the event's `__partition` field value (if present); or otherwise to the root directory of the **Output Location** and **Staging Location**.

> Cribl Stream's internal `__partition` field can be populated in multiple ways. The precedence order is: explicit **Partitioning expression** value -> `${host}/${sourcetype}` (default) **Partitioning expression** value -> user-defined `event.__partition`, set with an Eval Function (takes effect only where this **Partitioning expression** field is blank).

Compress: Data compression format used before moving to final destination. Defaults to `gzip` (recommended). This setting is not available when **Data format** is set to `Parquet`.

File name prefix expression: The output filename prefix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `CriblOut`.

File name suffix expression: The output filename suffix. Must be a JavaScript expression (which can evaluate to a constant), enclosed in quotes or backticks. Defaults to `` `.${C.env["CRIBL_WORKER_ID"]}.${__format}${__compression === "gzip" ? ".gz" : ""}` ``, where `__format` can be `json` or `raw`, and `__compression` can be `none` or `gzip`.

Backpressure behavior: Select whether to block or drop events when all receivers are exerting backpressure. (Causes might include an accumulation of too many files needing to be closed.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

How MinIO Composes File Names

The full path to a file consists of:

```
<bucket_name>/<keyprefix><partition_expression | __partition><file_name_prefix>
<filename>.<extension>
```

As an example, assume that the **MinIO bucket name** is `bucket1`, the **Key prefix** is `aws`, the **Partitioning expression** is `` `${host}/${sourcetype}` ``, the source is undefined, the **File name prefix** is the default `CriblOut`, and the **Data format** is `json`. Here, the full path as displayed in MinIO would have this form: `/bucket1/aws/192.168.1.241/undefined/CriblOut-<randomstring>0.json`

> Although MinIO will display the **Key prefix** and **Partitioning expression** values as folders, both are actually just part of the overall key name, along with the file name.

Authentication

Use the **Authentication Method** buttons to select one of these options:

Auto: This default option uses the AWS instance's metadata service to automatically obtain short-lived credentials from the IAM role attached to an EC2 instance, local credentials, sidecar, or other source. The attached IAM role grants Cribl Stream Workers access to authorized AWS resources. Can also use the environment variables `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`. Works only when running on AWS.

Manual: If not running on AWS, you can select this option to enter a static set of user-associated IAM credentials (your access key and secret key) directly or by reference. This is useful for Workers not in an AWS VPC, e.g., those running a private cloud. The **Manual** option exposes these corresponding additional fields:

- **Access key**: Enter your AWS access key. If not present, will fall back to the `env.AWS_ACCESS_KEY_ID` environment variable, or to the metadata endpoint for IAM role credentials.
- **Secret key**: Enter your AWS secret key. If not present, will fall back to the `env.AWS_SECRET_ACCESS_KEY` environment variable, or to the metadata endpoint for IAM credentials.

The values for **Access key** and **Secret key** can be a constant, or a JavaScript expression (such as `${C.env.MY_VAR}`) enclosed in quotes or backticks, which allows configuration with environment variables.

Secret: If not running on AWS, you can select this option to supply a stored secret that references an AWS access key and secret key. This option exposes a **Secret key pair** drop-down, in which you can select a stored secret that references the set of user-associated IAM credentials described above. A **Create** link is available to store a new, reusable secret.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Parquet Settings

To write out Parquet files, note that:

- Cribl Edge Workers support Parquet only when running on Linux, not on Windows.
- See Working with Parquet for pointers on how to avoid problems such as data mismatches.

Parquet schema: Select a schema from the drop-down.

> If you need to modify a schema or add a new one, follow the instructions in our Parquet Schemas topic. These steps will propagate the freshest schema back to this drop-down.

Row group size: Set the target memory size for row group segments. Modify this value to optimize memory use when writing. Value must be a positive integer smaller than the **File size** value, with appropriate units. Defaults to `16 MB`.

Page size: Set the target memory size for page segments. Generally, set lower values to improve reading speed, or set higher values to improve compression. Value must be a positive integer smaller than the

Row group size value, with appropriate units. Defaults to `1 MB`.

Parquet version: Determines which data types are supported, and how they are represented. Defaults to `2.6`; `2.4` and `1.0` are also available.

Data page version: Serialization format for data pages. Defaults to `V2`. If your toolchain includes a Parquet reader that does not support `V2`, use `V1`.

Log invalid rows: Toggle to `Yes` to output up to 20 unique rows that were skipped due to data format mismatch. Log level must be set to `debug` for output to be visible.

Advanced Settings

Max file size (MB): Maximum uncompressed output file size. Files of this size will be closed and moved to final output location. Defaults to `32`.

Max file open time (sec): Maximum amount of time to write to a file. Files open for longer than this limit will be closed and moved to final output location. Defaults to `300`.

Max file idle time (sec): Maximum amount of time to keep inactive files open. Files open for longer than this limit will be closed and moved to final output location. Defaults to `30`.

Max open files: Maximum number of files to keep open concurrently. When exceeded, the oldest open files will be closed and moved to final output location. Defaults to `100`.

> Cribl Stream will close files when **either** of the `Max file size (MB)` or the `Max file open time (sec)` conditions is met.

Max concurrent file parts: Maximum number of parts to upload in parallel per file. Minimun part size is 5 MB. A value of `1` will upload the file's contents sequentially, with a maximum concurrency of `1`. Defaults to `4`.

Add Output ID: When set to `Yes` (the default), adds the **Output ID** field's value to the staging location's file path. This ensures that each Destination's logs will write to its own bucket.

> For a Destination originally configured in a Cribl Stream version below 2.4.0, the **Add Output ID** behavior will be switched **off** on the backend, regardless of this slider's state. This is to avoid losing any files pending in the original staging directory, upon Cribl Stream upgrade and restart. To enable this option for such Destinations, Cribl's recommended migration path is:
>
> - Clone the Destination.

- Redirect the Routes referencing the original Destination to instead reference the new, cloned Destination.

This way, the original Destination will process pending files (after an idle timeout), and the new, cloned Destination will process newly arriving events with **Add output ID** enabled.

Remove staging dirs: Toggle to `Yes` to delete empty staging directories after moving files. This prevents the proliferation of orphaned empty directories. When enabled, exposes this additional option:

- **Staging cleanup period**: How often (in seconds) to delete empty directories when **Remove staging dirs** is enabled. Defaults to `300` seconds (every 5 minutes). Minimum configurable interval is `10` seconds; maximum is `86400` seconds (every 24 hours).

Region: Region where the MinIO service/cluster is located. Leave blank when using a containerized MinIO.

Object ACL: ACL (Access Control List) to assign to uploaded objects. Defaults to `Private`.

Storage class: Select a storage class for uploaded objects. Defaults to `Standard`.

Server-side encryption: Server side encryption type for uploaded objects. Defaults to `none`.

Signature version: Signature version to use for signing MinIO requests. Defaults to `v4`.

Reuse connections: Whether to reuse connections between requests. The default setting (`Yes`) can improve performance.

Reject unauthorized certificates: Whether to accept certificates that cannot be verified against a valid Certificate Authority (e.g., self-signed certificates). Defaults to `Yes`.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Field for this Destination:

- `__partition`

Troubleshooting

See also AWS Sources/Destinations & S3-Compatible Stores for information on common errors.

11.19. OpenTelemetry (OTel)

Cribl Stream supports sending events to OpenTelemetry Protocol (OTLP)-compliant targets. (Cribl Stream can receive OTel events through the OTel Source.) Besides native OTel Trace and Metric events, you can send Cribl Stream's Gauge metric events through this OTel Destination.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Protocol and Transport Support

In Cribl Stream 4.1 and later, this Destination supports either of the transports that OTLP specifies: gRPC or HTTP. OTLP defines Protocol buffer (Protobuf) schemas for its payloads (requests and responses). With the HTTP transport, this Destination supports Binary Protobuf payload encoding, but currently does not support JSON Protobuf.

When configuring Pipelines (including pre-processing and post-processing Pipelines), you need to ensure that events sent to this Destination conform to the relevant Protobuf specification:

- For traces, opentelemetry-proto/trace.proto at v0.9.0 · open-telemetry/opentelemetry-proto
- For metrics, opentelemetry-proto/metrics.proto at v0.9.0 · open-telemetry/opentelemetry-proto

The OTel Destination will drop non-conforming events. Also, when trying to convert an event to OTLP, if the Destination encounters a parsing error, it discards the event, and Cribl Streams logs the error.

Configuring Cribl Stream to Output to OTel

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **OpenTelemetry**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **OpenTelemetry**.
Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this OTel output definition.

Endpoint: Where to send events, in any of a variety of formats (FQDN, PQDN, IP address and port, etc). Supports both IPv4 and IPv6 – IPv6 addresses must be enclosed in square brackets. The same endpoint is used for both Traces and Metrics. If no port is specified, we normally default to the standard port for OTel Collectors, 4137 – however, if TLS is enabled or the endpoint is an HTTPS-based URL, we default instead to port 443.

> To proxy outbound HTTP/S requests, see System Proxy Configuration.

Optional Settings

Protocol: Use the drop-down to choose the protocol to use when sending data: `gRPC` (the default), or `HTTP`. When set to `HTTP`, the UI displays two additional settings:

- **Traces endpoint override**: By default, the Destination will send traces to `<endpoint>/v1/traces`, where `<endpoint>` is what you specified for the **Endpoint** setting above. To send traces to a different endpoint, enter that endpoint here.
- **Metrics endpoint override**: By default, the Destination will send traces to `<endpoint>/v1/metrics`, where `<endpoint>` is what you specified for the **Endpoint** setting above. To send metrics to a different endpoint, enter that endpoint here.

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Client Side)

TLS is available only when **General Settings** > **Protocol** is set to `gRPC`.

Enabled Defaults to `No`. When toggled to `Yes`:

Validate server certs: Reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Authentication

Select one of the following options for authentication:

- **None**: Don't use authentication.
- **Auth token**: Enter the bearer token that must be included in the authorization header. Since OpenTelemetry runs over gRPC, authorization headers are sent as Metadata entries which are essentially key-value pairs. E.g.: `Bearer <your-configured-token>`.
- **Auth token (text secret)**: This option exposes a drop-down in which you can select a stored text secret that references the bearer token described above. A **Create** link is available to store a new, reusable secret.
- **Basic**: This default option displays fields for you to enter HTTP Basic authentication credentials.
- **Basic (credentials secret)**: This option exposes a **Credentials secret** drop-down, in which you can select a stored text secret that references the Basic authentication credentials described above. A **Create** link is available to store a new, reusable secret.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated

> per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, queueing is stopped and data blocking is applied. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. This will be of the form: `your/path/here/<worker-id>/<output-id>`. Defaults to: `$CRIBL_HOME/state/queues`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`. `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output – both metric events, as dimensions; and log events, as labels. Supports wildcards.

By default, includes `cribl_pipe` (Cribl Stream Pipeline that processed the event).

Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

This tab's options depend on whether **General Settings** > **Protocol** is set to the `gRPC` or `HTTP` transport. The common settings directly are displayed for both transports.

Common Settings

Compression: Compression type to apply to messages sent to the OpenTelemetry endpoint. `Gzip` (the default) and `None` are available for both protocols; `Deflate` is available for gRPC only.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30` sec.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than the configured **Max body size**. Defaults to `1` sec.

Environment: Optionally, specify a single Git branch on which to enable this configuration. If this field is empty, the config will be enabled everywhere.

Additional Settings for gRPC

When **General Settings** > **Protocol** is set to `gRPC`, the **Advanced Settings** tab adds the following options.

Connection timeout: Amount of time (milliseconds) to wait for the connection to establish before retrying. Defaults to `10000` (10 sec.).

Keep alive time (seconds): How often the sender should ping the peer to keep the connection alive. Defaults to `30`.

Metadata: Extra information to send with each gRPC request. Click **Add Metadata** to add each item as a **Key**-**Value** pair. The **Key** field is arbitrary. The **Value** field is a JavaScript expression that is evaluated just once, when this Destination is initialized. If you pass credentials as metadata, Cribl recommends using C.Secret().

Additional Settings for HTTP

When **General Settings** > **Protocol** is set to `HTTP`, the **Advanced Settings** tab adds the following options.

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Keep alive: By default, Cribl Stream sends `Keep-Alive` headers to the remote server and preserves the connection from the client side. Toggle this off if you want Cribl Stream to close the connection immediately after sending a request.

Extra HTTP headers: Click **Add Header** to define additional HTTP headers to pass to all events. Each row is a **Name**-**Value** pair. Values will be sent encrypted. You can also add headers dynamicall,y on a per-event basis, in the `__headers` field.

Safe headers: Add headers here to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

11.20. SignalFx

Cribl Stream supports sending events to SignalFx.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to SignalFx

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **SignalFx**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **SignalFx**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this SignalFx definition.

Realm: SignalFx realm name (e.g., `us0`). Required.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Displays an **Auth token** field for you to enter your SignalFx API access token. See SignalFx's Manage Tokens topic.
- **Secret**: This option exposes an **Auth token (text secret)** drop-down, in which you can select a stored secret that references the API access token described above. A **Create** link is available to store a new, reusable secret.

Optional Settings

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the

throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values can cause the payload size to be smaller than the configured **Max body size**. Defaults to `1` second.

Extra HTTP headers: Click **Add Header** to insert extra headers as **Name**/**Value** pairs. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Notes About SignalFx

For details on integrating with SignalFx, see the SignalFx Developers Guide. Especially relevant is the SignalFx HTTP Send Metrics Reference.

11.21. SNMP Trap

Cribl Stream supports forwarding of SNMP Traps out.

> Type: Streaming | TLS Support: No | PQ Support: No

Configuring Cribl Stream to Forward to SNMP Traps

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **SNMP Trap**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **SNMP Trap**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this SNMP Trap definition.

SNMP Trap destinations: Click **Add Destination** to specify more SNMP destinations to forward traps to, on new rows. Each row provides the following fields:

- **Address**: Destination host.
- **Port**: Destination port. Defaults to `162`.

Optional Settings

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Considerations for Working with SNMP Traps Data

- It's possible to work with SNMP metadata (i.e., we'll decode the packet). Options include dropping, routing, etc. However, packets **cannot** be modified and sent to another SNMP Destination.
- SNMP packets can be forwarded to non-SNMP Destinations (e.g., Splunk, Syslog, S3, etc.).
- SNMP packets can be forwarded to other SNMP Destinations. However, the contents of the incoming packet cannot be modified – i.e., we'll forward the packets verbatim as they came in.
- Non-SNMP input data **cannot** be sent to SNMP Destinations.

11.22. Sumo Logic

Cribl Stream can send log and metric events to Sumo Logic over HTTP.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Configuring Cribl Stream to Output to Sumo Logic

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Sumo Logic**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Sumo Logic**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Sumo Logic Destination definition.

API URL: Enter the URL of the Sumo Logic HTTP Source to which events should be sent. (E.g., `https://endpoint6.collection.us2.sumologic.com/receiver/v1/http/<long-hash>`.)

Optional Settings

Custom source name: Optionally, override the source name configured on the Sumo Logic HTTP Source. This value will be sent with events via the `X-Sumo-Name` HTTP header. You can set the `__sourceName` field on events to assign a custom source name at the event level.

Custom source category: Optionally, override the source category configured on the Sumo Logic Collector and/or HTTP Source. This value will be sent with events via the `X-Sumo-Category` HTTP header. You can set the `__sourceCategory` field on events to assign a custom source category at the event level.

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Data Format: This drop-down defaults to `JSON`. Change this to `Raw` if you prefer to preserve outbound events' raw format instead of JSONifying them.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the

throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass as additional HTTP headers. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

If an event contains the internal field `__criblMetrics`, Cribl Stream will send it to Sumo Logic as a metric event. Otherwise, Cribl Stream will send it as a log event.

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, the connection will be thrown away, and a new one will be reattempted. This is to prevent sticking to a particular destination when there is a constant flow of events.
- If the server does not support keepalives (or if the server closes a pooled connection while idle), a new connection will be established for the next request.
- When resolving the Destination's hostname, Cribl Stream will pick the first IP in the list for use in the next connection. Enable Round-robin DNS to better balance distribution of events between destination cluster nodes.

11.23. Syslog

Cribl Stream supports sending out data over syslog via TCP or UDP.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes
>
> This Syslog Destination supports RFC 3164 and RFC 5424. Before you configure this Destination, review Understanding Syslog Format Options below, to ensure that your configuration will structure compliant outbound events that downstream services can read.

Configuring Cribl Stream to Output Data in Syslog Format

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Syslog**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Syslog**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Syslog definition.

Protocol: The network protocol to use for sending out syslog messages. Defaults to `TCP`; `UDP` is also available.

Load balancing: This option is displayed only when the **Protocol** is set to `TCP`. When enabled (default), lets you specify multiple destinations. See Load Balancing Settings below. With the default `No` setting, if you notice that Cribl Stream is not sending data to all possible IP addresses, enable **Advanced Settings** > **Round-robin DNS**.

The following two fields appear **only** with the `No` setting.

Address: Address/hostname of the receiver.

Port: Port number to connect to on the host.

Max record size: Displayed when **Protocol** is set to `UDP`. Sets the maximum size of syslog messages. Defaults to `1500`, and must be ≤ `2048`. To avoid packet fragmentation, keep this value <= the MTU (maximum transmission unit for the network path to the Destination system).

Optional Settings

Facility: Default value for message facility. If set, will be overwritten by the value of `__facility`. Defaults to `user`.

Severity: Default value for message severity. If set, will be overwritten by the value of `__severity`. Defaults to `notice`.

App name: Default value for application name. If set, will be overwritten by the value of `__appname`. Defaults to `Cribl`.

Message format: The syslog message format supported by the receiver. Defaults to `RFC3164`.

Timestamp format: The timestamp format to use when serializing an event's time field. Options include `Syslog` (default) and `ISO8601`.

For `Syslog`, the format is `Mmm dd hh:mm:ss`, using the timezone of the syslog device. For example: `Jan 18 16:56:36`.

For `ISO8601`, the basic format is `YYYY-MM-DD`. For example: `2023-01-18`. For extended formats, add hours, minutes, seconds, decimal fractions (optional), and timezone. For example: `2023-01-18T16:56:36.996-08:00`.

Throttling: Throttle rate, in bytes per second. Defaults to `0`, meaning no throttling. Multiple-byte units such as KB, MB, GB etc. are also allowed, e.g., `42 MB`. When throttling is engaged, your **Backpressure behavior** selection determines whether Cribl Stream will handle excess data by blocking it, dropping it, or queueing it to disk.

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Load Balancing Settings

> Load balancing is available only when the **Protocol** is set to `TCP`.

Enabling the **Load balancing** slider replaces the static **General Settings** > **Address** and **Port** fields with the following controls:

Exclude current host IPs: This slider appears when **Load balancing** is set to `Yes`. It determines whether to exclude all IPs of the current host from the list of any resolved hostnames. Defaults to `No`, which keeps the current host available for load balancing.

Destinations

The **Destinations** table is where you specify a known set of receivers on which to load-balance data. Click **Add Destination** to specify more receivers on new rows. Each row provides the following fields:

Address: Hostname of the receiver. Optionally, you can paste in a comma-separated list, in `<host>:<port>` format.

Port: Port number to send data to on this host.

TLS: Whether to inherit TLS configs from group setting, or disable TLS. Defaults to `inherit`.

TLS servername: Servername to use if establishing a TLS connection. If not specified, defaults to connection host (if not an IP). Otherwise, uses the global TLS settings.

Load weight: Set each connection's relative traffic-handling capability by assigning a weight (`> 0`). This column accepts arbitrary values, but for best results, assign weights in the same order of magnitude to all connections. Cribl Stream will attempt to distribute traffic to the connections according to their relative weights.

The final column provides an `X` button to delete any row from the table.

For details on configuring all these options, see About Load Balancing.

Persistent Queue Settings

> This section is displayed only for **TCP**, and only when **Backpressure behavior** is set to **Persistent Queue**.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

TLS Settings (Client Side)

Enabled defaults to `No`. When toggled to `Yes`:

Validate server certs: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Timeout Settings

> These timeout settings apply only to the TCP protocol.

Connection timeout: Amount of time (in milliseconds) to wait for the connection to establish, before retrying. Defaults to `10000`.

Write timeout: Amount of time (milliseconds) to wait for a write to complete, before assuming connection is dead. Defaults to `60000`.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

The first two options are always displayed:

Octet count framing: When enabled, Cribl Stream prefixes messages with their byte count. When disabled, Cribl Stream omits prefixes, and instead appends a `\n` to messages.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

The following options are added if you enable the General Settings tab's **Load balancing** option:

DNS resolution period (seconds): Re-resolve any hostnames after each interval of this many seconds, and pick up destinations from A records. Defaults to `600` seconds.

Load balance stats period (seconds): Lookback traffic history period. Defaults to `300` seconds. (Note that If multiple receivers are behind a hostname – i.e., multiple A records – all resolved IPs will inherit the weight of the host, unless each IP is specified separately. In Cribl Stream load balancing, IP settings take priority over those from hostnames.)

Max connections: Constrains the number of concurrent receiver connections, per Worker Process, to limit memory utilization. If set to a number > `0`, then on every DNS resolution period, Cribl Stream will randomly select this subset of discovered IPs to connect to. Cribl Stream will rotate IPs in future resolution periods – monitoring weight and historical data, to ensure fair load balancing of events among IPs.

Understanding Syslog Format Options

Unlike other Cribl Stream Destinations, Syslog applies an additional post-processing step after the Pipeline(s) transform events. This additional step structures the data for compliance with the syslog transport protocol (RFC 5424 and/or RFC 5425) before it is transmitted to downstream services.

The Syslog Destination's **General Settings** page offers several settings to format the timestamps, to format the message delivering the event, and to set the syslog-specific default settings for Facility, Severity, and App Name.

Below are two examples of RFC-compliant syslog events:

- `<13>Jul 11 10:34:35 testbox testing[42]`
- `<214>1 2022-07-11T18:58:45.000Z testbox testing[42]: foo=bar this=that base=ball gizmo=sprocket`

Cribl Stream offers three different output approaches in the Syslog Destination. The flowchart below summarizes how Cribl Stream determines which approach to use:

- `message` : For ease of use, Cribl recommends using this option. When you define `message`, Cribl Stream discards `_raw`, and composes a new payload using the other syslog-related fields. Cribl Stream automatically processes the values of the `message`, `_time`, `host`, and other fields, and creates an ISO-compliant timestamp and a properly formatted event. To use this method, you must configure `message` and must **not** set `__syslogout`.

- `__syslogout` : When you define `__syslogout`, Cribl Stream sends it as the entire syslog message, discards `_raw`, and ignores all the other fields.

- `_raw` (with or without a header): If you didn't define `message` or `__syslogout`, then Cribl Stream uses the existing `_raw` field as the `message` field, and prepends all the other syslog-related fields to the event.

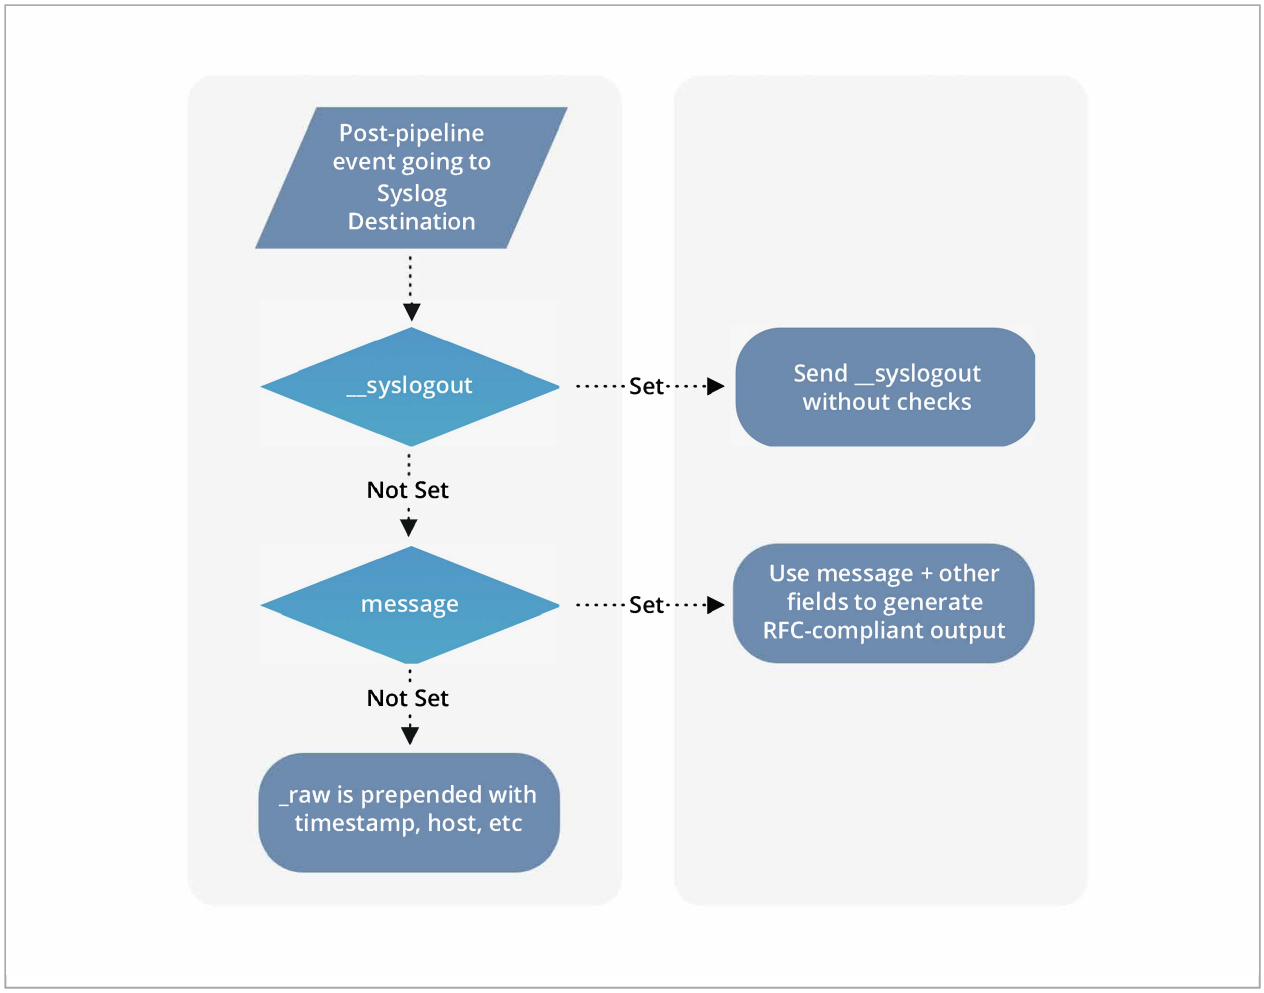

Syslog output flow

The subsections below walk you through some considerations for each of these options, before you configure this Destination. First, let's take a look at internal fields, since they play a critical role in formatting.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to downstream services. Fields for this Destination:

- `__priority`
- `__facility`
- `__severity`
- `__procid`
- `__appname`
- `__msgid`
- `__host`
- `__syslogout`

Defining `message`

This approach is easiest and least error-prone, because Cribl Stream creates the payload for you. To define the `message`, all you need to supply are the following required fields:

- `__facility`
- `__severity`
- `__host`

Or, to make this even simpler, you can substitute `__priority` for `__facility` and `__severity`. Either way, Cribl Stream will create a new payload using a combination of these required fields. For details on the fields assembled here, see Important Fields below.

Exporting `__syslogout`

As a second approach, if you choose to send `__syslogout` to downstream services, it is exclusive – it becomes the entire syslog message sent. Neither `_raw`, nor any other metadata, will be sent downstream. Also, Cribl Stream will not check to ensure that the value of `__syslogout` is RFC-compliant.

The result will be a proper syslog message only if you hand-build the event yourself. You must manually construct the `__syslogout` payload, starting with `_time`, for all the fields that Cribl Stream would automatically handle with the above `message` option. In particular:

> When defining `__syslogout`, you must follow the syslog protocol's RFCs. Otherwise, downstream services will misinterpret or completely ignore the message. Some syslog receivers might drop non-

> compliant events entirely, or try to “fix” the format by supplying missing fields.

The most common uses for the `__syslogout` method are:

- When the value of `_raw` is already in syslog format as it comes in, and minimal processing is necessary.
- When sending raw TCP data to a destination that doesn’t enforce syslog RFCs, such as a raw TCP listener. Cribl Stream currently does not provide a native "raw TCP" Destination. However, in some environments, configuring a Syslog Destination with the TCP protocol and `__syslogout` is an effective method for delivering raw data over TCP.

Constructing `__syslogout`

You'll need to add `_time` to the payload. For example, in an Eval Function, you could use **Evaluate fields** to build up `__syslogout` in the expression below. Here, the `priority` encodes the `severity + facility`, according to the syslog protocol.

NAME	VALUE EXPRESSION
`priority`	`(8*facility)+severity`
`__syslogout`	`` `<${priority}>${C.Time.strftime(_time,"%Y-%m-%dT%H:%M:%S.%f%z")} ${host} ${appname} [${procid}]: ${_raw}` ``

Here's that example expression in a full Function:

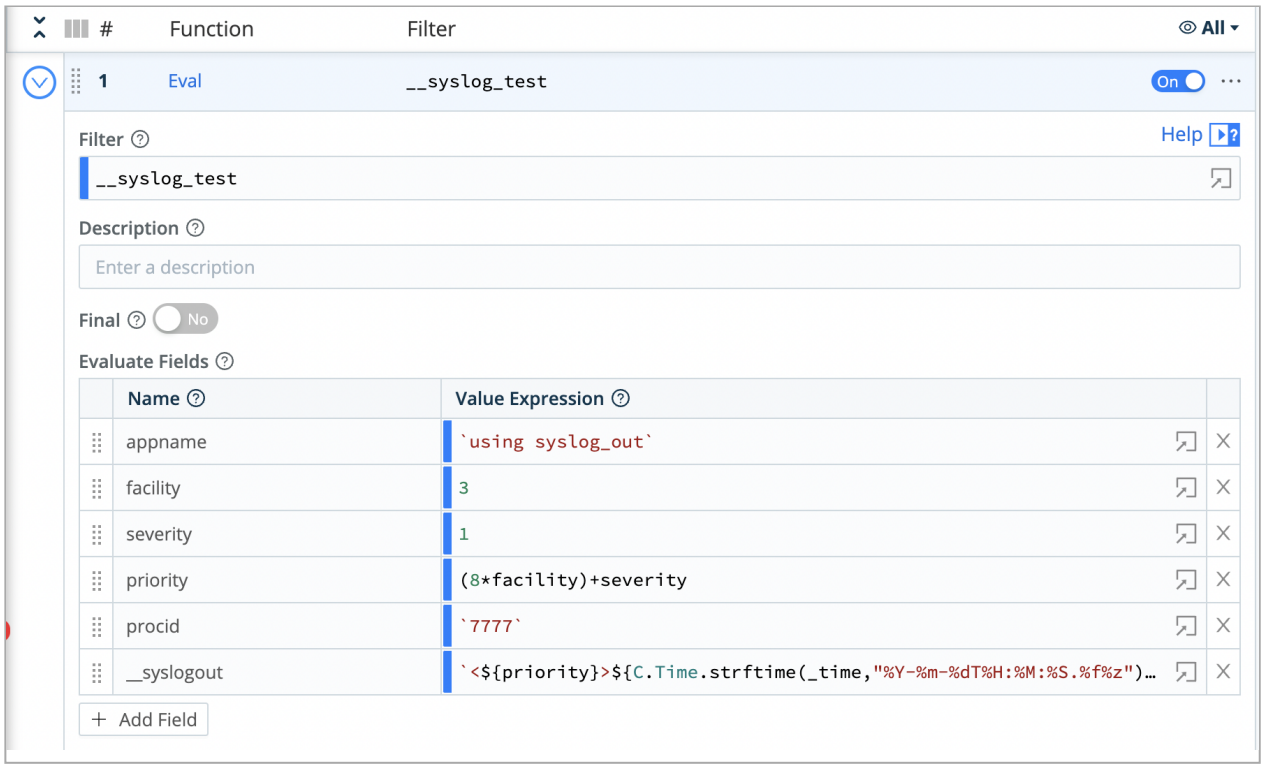

Adding `__syslogout`, `_time` to construct a valid syslog message

Enhancing `_raw` with syslog

A third approach is to add the message content in `_raw`, and construct the syslog "envelope" around `_raw` by including the `severity`, `priority`, `facility`, `procid`, `msgid`, and `appname` fields, as required.

Here's an alternative Eval Function that illustrates this:

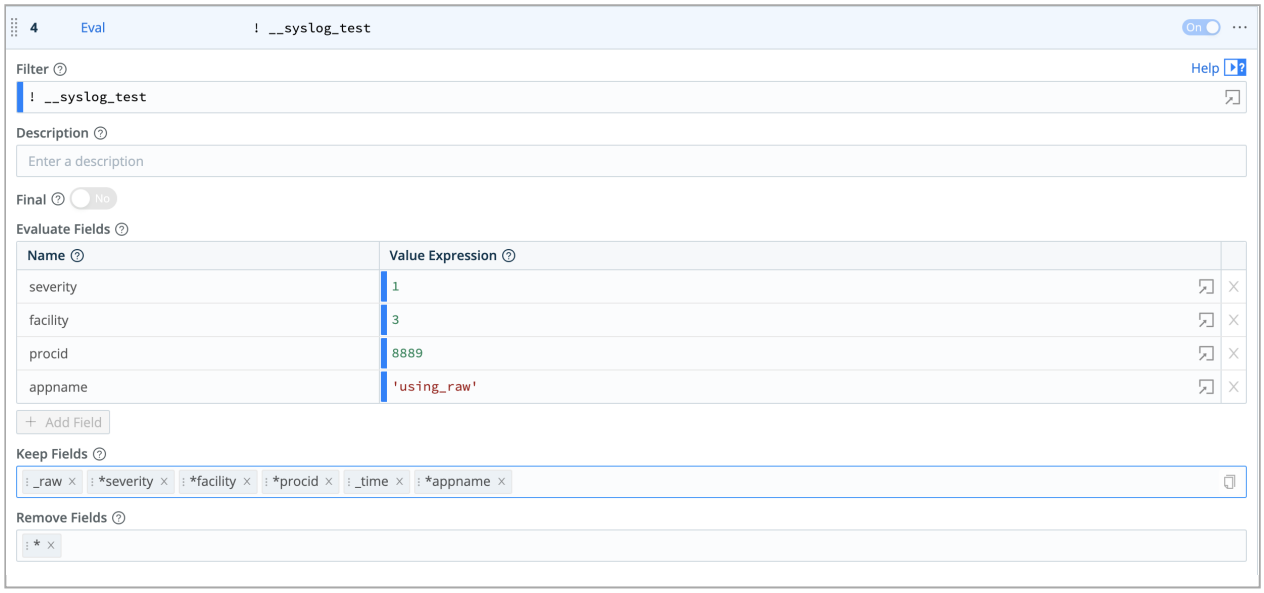

Adding syslog decorations to `_raw`

Both Eval Functions are provided in this example Pipeline:

syslog_loop.json

```
{
  "id": "syslog_loop",
  "conf": {
    "output": "default",
    "groups": {},
    "asyncFuncTimeout": 1000,
    "functions": [
      {
        "filter": "true",
        "conf": {
          "mode": "reserialize",
          "type": "json",
          "srcField": "_raw",
          "dstField": "_raw",
          "keep": [
            "resource",
            "path",
            "httpMethod"
          ],
          "remove": []
        },
        "id": "serde",
        "disabled": false
      },
      {
        "filter": "true",
        "conf": {
          "clones": [
            {
              "__syslog_test": "true"
            }
          ]
        },
        "id": "clone",
        "disabled": false
      },
      {
        "filter": "__syslog_test",
        "conf": {
          "add": [
            {
              "name": "appname",
              "value": "'using_syslogout'"
            },
            {
              "name": "severity",
              "value": "1"
            },
            {
              "name": "facility",
              "value": "3"
            },
            {
              "name": "pri",
              "value": "(8 * facility) + severity"
            },
            {
              "name": "procid",
              "value": "'7777'"
```

```
            },
            {
              "name": "__syslogout",
              "value": "`<${pri}>${C.Time.strftime(_time,\"%b %d %H:%M:%S\")}
${host} ${appname}[${procid}]: ${_raw}`"
            }
          ],
          "keep": [],
          "remove": []
        },
        "id": "eval",
        "disabled": false
      },
      {
        "filter": "! __syslog_test",
        "conf": {
          "add": [
            {
              "name": "severity",
              "value": "1"
            },
            {
              "name": "facility",
              "value": "3"
            },
            {
              "name": "procid",
              "value": "8889"
            },
            {
              "name": "appname",
              "value": "'using_raw'"
            }
          ],
          "keep": [
            "_raw",
            "*severity",
            "*facility",
            "*procid",
            "_time",
            "*appname"
          ],
          "remove": [
            "*"
          ]
        },
        "id": "eval",
        "disabled": false
      }
    ]
  }
}
```

In this method, Cribl Stream takes the value of `_raw` verbatim, and then prepends a human-readable timestamp, host, and other information.

If you are using `_raw` as the `message` field, make sure you explicitly set the `priority` and `facility` whenever possible. Otherwise, Cribl Stream will use the default values. The acceptable values are defined in the RFCs.

> When using `_raw`, you might end up with duplicate fields in the event. For example, even if your event already contains a `timestamp`, Cribl Stream might prepend another `timestamp` to the beginning of `_raw`, without checking whether the data is already present. This can increase event sizes with redundant data. If you use this method, make sure you first strip the prepended (duplicate) fields.
>
> Also, when using `_raw`, this Destination does not check whether there's a valid header defined in the event – it always adds one. Also, because this Destination reformats the data, you might not see the header information when you preview it in Live Capture.

For details on the fields assembled here, see Important Fields below.

Defined `message` and `_raw` Fields

If Cribl Stream's Destination stage receives an event that contains both `message` and `_raw` fields, it will build the syslog package using the `message` field, discarding `_raw`.

The `message` (or `_raw`) field must be an ASCII string in order to be put on the syslog wire. This Destination does not handle JSON objects. Avoid mismatching these types, or else no data might be sent out.

If your intermediate processing – such as a `JSON.parse(_raw)` transformation – has converted the `_raw` field's contents into a JSON object literal, you will need to stringify the result, using a method like `JSON.stringify(_raw)`. You can do so in a post-processing Pipeline attached to the Syslog Destination.

Important Fields

The `Message` and `_raw` prepend methods use additional fields to create the final payload. When using `__syslogout`, Cribl Stream ignores these fields.

The fields below appear in the order generated by a syslog-formatted event.

Sample syslog-formatted event: `<38>1 2022-07-11T22:04:46.000Z testbox app01 [4321] AC-123 - foo=bar this=that base=ball gizmo=sprocket`

- `__facility` or **facility**: Cribl Stream uses this field to calculate priority. The RFC protocol dictates Facility levels. For details, see Facility.

- `__severity` or **severity**: Cribl Stream also uses this field to calculate priority. The RFC protocol dictates Severity levels. For details, see Severity.

- `__priority`: If you configure this field, Cribl Stream will use it and override the `severity` and `facility` values. The priority displays at the beginning of a syslog event, `<38>` in the example above. If you don't configure this field, then Cribl Stream calculates it using the formula: `priority = (8*facility + severity)`.

  For example, if the `facility` is `13` (Security) and the `severity` is `2` (Critical), the `priority` will be `13*8 + 2 = 106`. The `priority` of `<38>` in the example above is `8*4(Facility of auth) + 6 (Severity of info)`.

- `_time`: The value of `_time` in Cribl events is in epoch format, but the syslog RFCs dictate that each event's timestamp is must be in human-readable format. When defining a Syslog Destination, you can have an option to use the ISO8601 (recommended) or the syslog format. ISO8601 defines the method for specifying time zone and year, whereas the older syslog format lacks this information. The example above shows the ISO8601 format, listed after the `priority` (`<13>`) and `version`.

- `__host` OR **host**: the value for the required host field in a syslog event, following the timestamp. `testbox` in the example above.

- `__appname` or **appname**: The required application name. `app01` in the example above. This is typically the name of the daemon or process that is logging any given event.

- `__procid` or **procid**: This optional field is the Process ID. `4321` in the example above. Use a numeric value for this field, optionally this may be surrounded with brackets [ ]. Cribl Stream will automatically adjust the spaces and syntax to ensure RFC-compliant formatting.

- `__msgid` or **msgid**: This optional field is the Message ID. `AC-123` in the example above.

For each pair of attribute names (above), Cribl Stream uses the values as specified here:

1. The event contains both `__<key>` and `<key>`: Cribl Stream uses the value of `__<key>` and ignores `<key>` if also present. For example, if the event contains `__host`, the value of **host** will be ignored if also present.

2. The event contains `<key>`: Cribl Stream uses the value of `<key>`. For example, if **host** is set, the value is applied.

3. The event contains neither `__<key>` nor `<key>`, Cribl Stream uses the default values configured in the Syslog Destination.

11.24. TCP JSON

Cribl Stream supports sending data over TCP in JSON format.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Configuring Cribl Stream to Output Data in TCP JSON Format

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **TCP JSON**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **TCP JSON**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Destination definition.

Load balancing: When enabled (default), lets you specify multiple destinations. See Load Balancing Settings below. The following two fields appear **only** with the `No` setting.

Address: Hostname of the receiver.

Port: Port number to connect to on the host.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: In the resulting **Auth token** field, you can optionally enter an auth token to use in the connection header.

- **Secret**: This option exposes an **Auth token (text secret)** drop-down, in which you can select a stored secret that references the `authToken` header field value described above. A **Create** link is available to store a new, reusable secret.

Optional Settings

Exclude current host IPs: This slider appears when **Load balancing** is set to `Yes`. It determines whether to exclude all IPs of the current host from the list of any resolved hostnames. Defaults to `No`, which keeps the current host available for load balancing.

Compression: Codec to use to compress the data before sending. Defaults to `Gzip`.

Throttling: Throttle rate, in bytes per second. Defaults to `0`, meaning no throttling. Multiple-byte units such as KB, MB, GB etc. are also allowed, e.g., `42 MB`. When throttling is engaged, your **Backpressure behavior** selection determines whether Cribl Stream will handle excess data by blocking it, dropping it, or queueing it to disk.

Backpressure behavior: Specifies whether to block, drop, or queue events when all receivers are exerting backpressure. Defaults to `Block`. See Persistent Queue Settings below.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Load Balancing Settings

Enabling the **Load balancing** slider replaces the static **General Settings** > **Address** and **Port** fields with the following controls:

Destinations

The **Destinations** table is where you specify a known set of receivers on which to load-balance data. Click **Add Destination** to specify more receivers on new rows. Each row provides the following fields:

Address: Hostname of the receiver. Optionally, you can paste in a comma-separated list, in `<host>:<port>` format.

Port: Port number to send data to on this host.

TLS: Whether to inherit TLS configs from group setting, or disable TLS. Defaults to `inherit`.

TLS servername: Servername to use if establishing a TLS connection. If not specified, defaults to connection host (if not an IP). Otherwise, uses the global TLS settings.

Load weight: Set each connection's relative traffic-handling capability by assigning a weight (`> 0`). This column accepts arbitrary values, but for best results, assign weights in the same order of magnitude to all connections. Cribl Stream will attempt to distribute traffic to the connections according to their relative weights.

The final column provides an `X` button to delete any row from the table.

For details on configuring all these options, see About Load Balancing.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

TLS Settings (Client Side)

Use TLS defaults to `No`. When toggled to `Yes`:

Autofill?: This setting is experimental.

Validate server certs: Reject certificates that are not authorized by a CA in the **CA certificate path**, or by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Timeout Settings

Connection timeout: Amount of time (in milliseconds) to wait for the connection to establish before retrying. Defaults to `10000`.

Write timeout: Amount of time (in milliseconds) to wait for a write to complete before assuming connection is dead. Defaults to `60000`.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Setting General Settings > **Load balancing** to `Yes` adds the following settings:

DNS resolution period (seconds): Re-resolve any hostnames after each interval of this many seconds, and pick up destinations from A records. Defaults to `600` seconds.

Load balance stats period (seconds): Lookback traffic history period. Defaults to `300` seconds. (Note that If multiple receivers are behind a hostname – i.e., multiple A records – all resolved IPs will inherit the weight of the host, unless each IP is specified separately. In Cribl Stream load balancing, IP settings take priority over those from hostnames.)

Max connections: Constrains the number of concurrent receiver connections, per Worker Process, to limit memory utilization. If set to a number > `0`, then on every DNS resolution period, Cribl Stream will randomly select this subset of discovered IPs to connect to. Cribl Stream will rotate IPs in future resolution periods – monitoring weight and historical data, to ensure fair load balancing of events among IPs.

Format

TCP JSON events are sent in newline-delimited JSON format, consisting of:

1. A header line. Can be empty, e.g.: `{}`. If **Auth Token** is enabled, the token will be included here as a field called `authToken`. In addition, if events contain common fields, they will be included here under `fields`.

2. A JSON event/record per line.

See an example in our TCP JSON Source topic.

11.25. Wavefront

Cribl Stream supports sending events to Wavefront analytics.

> Type: Streaming | TLS Support: Yes | PQ Support: Yes

Configuring Cribl Stream to Output to Wavefront

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Wavefront**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Wavefront**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this Wavefront definition.

Domain name: WaveFront domain name, e.g., `longboard`. Required.

Authentication Settings

Use the **Authentication method** buttons to select one of these options:

- **Manual**: Displays an **API key** field for you to enter your Wavefront API auth token. See Wavefront's Generating an API Token topic.
- **Secret**: This option exposes an **Auth token (text secret)** drop-down, in which you can select a stored secret that references the API auth token described above. A **Create** link is available to store a new, reusable secret.

Optional Settings

Backpressure behavior: Select whether to block, drop, or queue events when all receivers are exerting backpressure. (Causes might include a broken or denied connection, or a rate limiter.) Defaults to `Block`.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the

throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Toggle to `Yes` to reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA).

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB.

Flush period (sec): Maximum time between requests. Low values can cause the payload size to be smaller than the configured **Max body size**. Defaults to `1` second.

Extra HTTP headers: Click **Add Header** to insert extra headers as **Name**/**Value** pairs. Values will be sent encrypted.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Proxying Requests

If you need to proxy HTTP/S requests, see System Proxy Configuration.

Notes About Wavefront

For details on integrating with Wavefront, see these Wavefront resources:

- Direct Data Ingestion, and adjacent topics on Wavefront Proxies.
- Wavefront Data Format.

11.26. Webhook

Cribl Stream can send log and metric events to webhooks and other generic HTTP endpoints.

> Type: Streaming | TLS Support: Configurable | PQ Support: Yes

Configuring Cribl Stream to Output via HTTP

From the top nav, click **Manage**, then select a **Worker Group** to configure. Next, you have two options:

To configure via the graphical QuickConnect UI, click **Collect** (Edge only). Next, click **Add Destination** at right. From the resulting drawer's tiles, select **Webhook**. Next, click either **Add Destination** or (if displayed) **Select Existing**. The resulting drawer will provide the options below.

Or, to configure via the Routing UI, click **Data** > **Destinations** (Stream) or **More** > **Destinations** (Edge). From the resulting page's tiles or the **Destinations** left nav, select **Webhook**. Next, click **Add Destination** to open a **New Destination** modal that provides the options below.

General Settings

Output ID: Enter a unique name to identify this HTTP output definition.

URL: Endpoint URL to send events to. The internal field `__url`, where present in events, will override this value. See Internal Fields below.

Method: The HTTP verb to use when sending events. Defaults to `POST`. Change this to `PUT` or `PATCH` where required by the endpoint.

Format: The format in which to send out events. One of:

- `NDJSON (newline-delimited JSON)`: The default.
- `JSON Array`: Arrays in JSON-parseable format.
- `Custom`: A wrapper object that contains batched events. You define the format for both the wrapper and the individual event. See Custom Format below.

Backpressure behavior: Whether to block, drop, or queue events when all receivers are exerting backpressure.

Tags: Optionally, add tags that you can use for filtering and grouping at the final destination. Use a tab or hard return between (arbitrary) tag names.

TLS Settings (Client Side)

Enabled Defaults to `No`. When toggled to `Yes`:

Server name (SNI): Server name for the SNI (Server Name Indication) TLS extension. This must be a host name, not an IP address.

Minimum TLS version: Optionally, select the minimum TLS version to use when connecting.

Maximum TLS version: Optionally, select the maximum TLS version to use when connecting.

Certificate name: The name of the predefined certificate.

CA certificate path: Path on client containing CA certificates (in PEM format) to use to verify the server's cert. Path can reference `$ENV_VARS`.

Private key path (mutual auth): Path on client containing the private key (in PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Certificate path (mutual auth): Path on client containing certificates in (PEM format) to use. Path can reference `$ENV_VARS`. **Use only if mutual auth is required**.

Passphrase: Passphrase to use to decrypt private key.

Authentication

Select one of the following options for authentication:

- **None**: Don't use authentication.
- **Auth token**: Use HTTP token authentication. In the resulting **Token** field, enter the bearer token that must be included in the HTTP authorization header.
- **Auth token (text secret)**: This option exposes a **Token (text secret)** drop-down, in which you can select a stored text secret that references the bearer token described above. A **Create** link is available to store a new, reusable secret.
- **Basic**: Displays **Username** and **Password** fields for you to enter HTTP Basic authentication credentials.

- **Basic (credentials secret)**: This option exposes a **Credentials secret** drop-down, in which you can select a stored text secret that references the Basic authentication credentials described above. A **Create** link is available to store a new, reusable secret.

- **OAuth**: Configure authentication via the OAuth protocol. Exposes multiple extra options – see OAuth Authentication below.

OAuth Authentication

Selecting **OAuth** exposes the following additional fields:

- **Login URL**: Endpoint for the OAuth API call, which is expected to be a POST call.

- **OAuth secret**: Secret parameter value to pass in the API call's request body.

- **OAuth secret parameter name**: Secret parameter name to pass in API call's request body.

- **Token attribute name**: Name of the auth token attribute in the OAuth response. Can be top-level (e.g., `token`); or nested, using a period (e.g., `data.token`).

- **Authorize expression**: JavaScript expression used to compute the Authorization header to pass in requests. Uses `${token}` to reference the token obtained from the login POST request, e.g.: `` `Bearer ${token}` ``.

- **Refresh interval (secs.)**: How often to refresh the OAuth token. Default `3600` seconds (1 hour); minimum `1` second; maximum `300000` seconds (about 83 hours).

- **OAuth parameters**: Optionally, click **Add parameter** for each additional parameter you want to send in the OAuth login request. Cribl Stream will combine the secret with these parameters, and will send the URL-encoded result in a POST request to the endpoint specified in the **Login URL**. We'll automatically add the `Content-Type` header `application/x-www-form-urlencoded` when sending this request.

  In each row of the resulting table, enter the parameter's **Name**. The corresponding **Value** is a JavaScript expression to compute the parameter's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `id` instead of `` `${id}` `` – will be evaluated as strings.

- **Authentication headers**: Optionally, click **Add Header** for each custom auth header you want to define and send in the OAuth login request. Stream will automatically add the `Content-Type` header `application/x-www-form-urlencoded` when sending this request.

  In each row of the resulting table, enter the custom OAuth header's **Name**. The corresponding **Value** is a JavaScript expression to compute the header's value. This can also evaluate to a constant. Values not formatted as expressions – e.g., `id` instead of `` `${id}` `` – will be evaluated as strings.

Persistent Queue Settings

> This tab is displayed when the **Backpressure behavior** is set to **Persistent Queue**.
>
> On Cribl-managed Cribl.Cloud Workers (with an Enterprise plan), this tab exposes only the **Clear Persistent Queue** button. A maximum queue size of 1 GB disk space is automatically allocated per Worker Process. If the queue fills up, Cribl Stream will block outbound data.

Max file size: The maximum data volume to store in each queue file before closing it. Enter a numeral with units of KB, MB, etc. Defaults to `1 MB`.

Max queue size: The maximum amount of disk space the queue is allowed to consume. Once this limit is reached, Cribl Stream stops queueing and applies the fallback **Queue-full behavior**. Enter a numeral with units of KB, MB, etc.

Queue file path: The location for the persistent queue files. Defaults to `$CRIBL_HOME/state/queues`. To this value, Cribl Stream will append `/<worker-id>/<output-id>`.

Compression: Codec to use to compress the persisted data, once a file is closed. Defaults to `None`; `Gzip` is also available.

Queue-full behavior: Whether to block or drop events when the queue is exerting backpressure (because disk is low or at full capacity). **Block** is the same behavior as non-PQ blocking, corresponding to the **Block** option on the **Backpressure behavior** drop-down. **Drop new data** throws away incoming data, while leaving the contents of the PQ unchanged.

Clear persistent queue: Click this button if you want to flush out files that are currently queued for delivery to this Destination. A confirmation modal will appear. (Appears only after **Output ID** has been defined.)

Strict ordering: The default `Yes` position enables FIFO (first in, first out) event forwarding. When receivers recover, Cribl Stream will send earlier queued events before forwarding newly arrived events. To instead prioritize new events before draining the queue, toggle this off. Doing so will expose this additional control:

- **Drain rate limit (EPS)**: Optionally, set a throttling rate (in events per second) on writing from the queue to receivers. (The default `0` value disables throttling.) Throttling the queue's drain rate can boost the throughput of new/active connections, by reserving more resources for them. You can further optimize Workers' startup connections and CPU load at **Group Settings** > Worker Processes.

Processing Settings

Post-Processing

Pipeline: Pipeline to process data before sending the data out using this output.

System fields: A list of fields to automatically add to events that use this output. By default, includes `cribl_pipe` (identifying the Cribl Stream Pipeline that processed the event). Supports wildcards. Other options include:

- `cribl_host` – Cribl Stream Node that processed the event.
- `cribl_input` – Cribl Stream Source that processed the event.
- `cribl_output` – Cribl Stream Destination that processed the event.
- `cribl_route` – Cribl Stream Route (or QuickConnect) that processed the event.
- `cribl_wp` – Cribl Stream Worker Process that processed the event.

Advanced Settings

Validate server certs: Reject certificates that are **not** authorized by a CA in the **CA certificate path**, nor by another trusted CA (e.g., the system's CA). Defaults to `Yes`.

Round-robin DNS: Toggle to `Yes` to use round-robin DNS lookup across multiple IPv6 addresses. When a DNS server returns multiple addresses, this will cause Cribl Stream to cycle through them in the order returned.

Compress: Compresses the payload body before sending. Defaults to `Yes` (recommended).

Keep alive: By default, Cribl Stream sends `Keep-Alive` headers to the remote server and preserves the connection from the client side. Toggle this off if you want Cribl Stream to close the connection immediately after sending a request.

Request timeout: Amount of time (in seconds) to wait for a request to complete before aborting it. Defaults to `30`.

Request concurrency: Maximum number of concurrent requests before blocking. This is set per Worker Process. Defaults to `5`.

Max body size (KB): Maximum size of the request body. Defaults to `4096` KB. You can set this limit to as high as 500 MB (`512000` KB). Be aware that high values can cause high memory usage per Worker Node, especially if a dynamically constructed URL (see Internal Fields) causes this Destination to send events to more than one URL.

Max events per request: Maximum number of events to include in the request body. The `0` default allows unlimited events.

Flush period (sec): Maximum time between requests. Low values could cause the payload size to be smaller than its configured maximum. Defaults to `1`.

Extra HTTP headers: Name/Value pairs to pass to all events as additional HTTP headers. Values will be sent encrypted. You can also add headers dynamically on a per-event basis in the `__headers` field. See Internal Fields below.

Failed request logging mode: Use this drop-down to determine which data should be logged when a request fails. Select among `None` (the default), `Payload`, or `Payload + Headers`. With this last option, Cribl Stream will redact all headers, except non-sensitive headers that you declare below in **Safe headers**.

Safe headers: Add headers to declare them as safe to log in plaintext. (Sensitive headers such as `authorization` will always be redacted, even if listed here.) Use a tab or hard return to separate header names.

Environment: If you're using GitOps, optionally use this field to specify a single Git branch on which to enable this configuration. If empty, the config will be enabled everywhere.

Custom Format

Choosing `Custom` from the **General Settings** > **Format** drop-down exposes the additional fields described in this section. **Source expression** and most of the rest of the controls define the format of individual events, i.e., what data you want to make available from the event. **Batch expression** defines the wrapper object for batched events, i.e., how to package events within the request payload. Both expressions **must** be enclosed in backticks.

- **Source expression**: JavaScript expression to evaluate on every event; Cribl Stream will send the result of that evaluation instead of the original event. Sample expression: `` `${fieldA}, ${fieldB}` `` (with literal backticks). Defaults to `__httpOut` – i.e., the value of the `__httpOut` field. Use the button at right to open a validation modal.

- **Drop when null**: If toggled to `Yes`, Cribl Stream will drop events when the **Source expression** evaluates to `null`.

- **Event delimiter**: Delimiter string to insert between events. Defaults to the newline character (`\n`). Cannot be a space (this will be converted to `\n`).

- **Content type**: Content type to use for requests. Defaults to `application/x-ndjson`. Any content types set in **Advanced Settings > Extra HTTP headers** will override this entry.

- **Batch expression**: Expression specifying how to format the payload for each batch. Defines a wrapper object in which to include the formatted events, such as a JSON document. This enables requests to APIs that require such objects. To reference the events to send, use the `${events}` variable. An example expression to send the batch inside a JSON object would be: `{"items" : [${events}] }`.

Custom Format Example

Suppose that the API you're sending events to requires request payloads in the following form:

```
{
   "Events":[
      {
         "one":"1",
         "two":"2"
      },
      {
         "one":"1.1",
         "two":"2.2"
      }
   ]
}
```

And here's how the events coming into your Webhook Destination look – note that the field names need to change, and `field3` and `field4` need to be dropped:

```
{ "field1": 1, "field2": 2, "field3": 3, "field4": 4 }
{ "field1": 1.1, "field2": 2.2, "field3": 3.3, "field4": 4.4 }
```

To send these events in the required form, you'd do the following:

- Set the **Source expression** to `` `{ "one": "${field1}", "two": "${field2}" }` `` – note that this renames and sends only the desired fields (`one` and `two`).
- Enter the comma (,) as your **Event delimiter**.
- Set the **Batch expression** to `` `{ "Events": [${events}] }` ``.

Internal Fields

Cribl Stream uses a set of internal fields to assist in forwarding data to a Destination.

Fields for this Destination:

- `__criblMetrics`

- `__url`
- `__headers`

If an event contains the internal field `__criblMetrics`, Cribl Stream will send it to the HTTP endpoint as a metric event. Otherwise, Cribl Stream will send it as a log event.

If an event contains the internal field `__url`, that field's value will override the **General Settings** > **URL** value. This way, you can determine the endpoint URL dynamically.

For example, you could create a Pipeline containing an Eval Function that adds the `__url` field, and connect that Pipeline to your Webhook Destination. Configure the Eval Function to set `__url`'s value to a URL that varies depending on a global variable, or on some property of the event, or on some other dynamically-generated value that meets your needs.

If an event contains the internal field `__headers`, that field's value will be a JSON object containing Name/Value pairs, each of which defines a header. By creating Pipelines that set the value of `__headers` according to conditions that you specify, you can add headers dynamically.

For example, you could create a Pipeline containing Eval Functions that add the `__headers` field, and connect that Pipeline to your Webhook Destination. Configure the Eval Functions to set `__headers` values to Name/Value pairs that vary depending on some properties of the event, or on dynamically-generated values that meet your needs.

Here's an overview of how to add headers:

- To add "dynamic" (a.k.a. "custom") headers to some events but not others, use the `__headers` field.
- To define headers to add to **all** events, use **Advanced Settings** > **Extra HTTP Headers**.
- An event can include headers added by both methods. So if you use `__headers` to add `{ "api-key": "foo" }` and **Extra HTTP Headers** to add `{ "goat": "Kid A" }`, you'll get both headers.
- Headers added via the `__headers` field take precedence. So if you use `__headers` to add `{ "api-key": "foo" }` and **Extra HTTP Headers** to add `{ "api-key": "bar" }`, you'll get only one header, and that will be `{ "api-key": "foo" }`.

Use Cases

See these examples of configuring a Webhook Destination to integrate with specific services:

- Azure Analytics/Sentinel Integration
- Webhook/BigPanda Integration

- Webhook/Sumo Logic Integration

Notes on HTTP-Based Outputs

- To proxy outbound HTTP/S requests, see System Proxy Configuration.
- Cribl Stream will attempt to use keepalives to reuse a connection for multiple requests. After 2 minutes of the first use, it will throw away the connection and attempt a new one. This is to prevent sticking to a particular destination when there is a constant flow of events.
- If the server does not support keepalives (or if the server closes a pooled connection while idle), Cribl Stream will establish a new connection for the next request.
- When resolving the Destination's hostname, Cribl Stream will pick the first IP in the list for use in the next connection. Enable **Round-robin DNS** to better balance distribution of events among destination cluster nodes.

12. Knowledge Objects

Select **Processing** > **Knowledge** to access Cribl Stream's libraries of default Lookup tables, Event Breaker rulesets, Parsers, Global Variables, Regex expressions, Grok patterns, Schemas, Database Connections, and AppScope config templates. You can customize these libraries by adding your own Knowledge objects.

From the **Processing** > **Knowledge** top nav, you can select:

- Lookups
- Event Breakers
- Parsers
- Global Variables
- Regexes
- Grok Patterns
- Schemas (JSON)
- Parquet Schemas
- Database Connections (currently supported only in Cribl Stream)
- AppScope Configs

12.1. Lookups Library

What Are Lookups

Lookups are data tables that can be used in Cribl Stream to enrich events as they are processed by the Lookup Function. You can access the Lookups library, which provides a management interface for all lookups, from Cribl Stream's top nav under **Processing** > **Knowledge** > **Lookups**.

This library is searchable, and each lookup can be tagged as necessary. There's full support for `.csv` files. Compressed files are supported, but must be in gzip format (`.gz` extension). You can add files in multimedia database (`.mmdb`) binary format, but you cannot edit these binary files through Cribl Stream's UI.

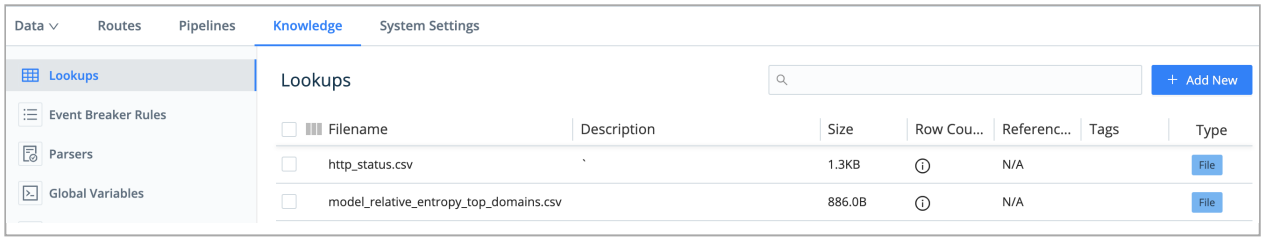

Lookups Library

How Does the Library Work

In single-instance deployments, all files handled by the interface are stored in `$CRIBL_HOME/data/lookups`. In distributed deployments, the storage path on the Leader Node is `$CRIBL_HOME/groups/<groupname>/data/lookups/` for each Worker Group.

> For large and/or frequently replicated lookup files, you might want to bypass the Lookups Library UI and instead manually place the files in a different location. This can both reduce deploy traffic and prevent errors with Cribl Stream's default Git integration. For details, see Managing Large Lookups.

Adding Lookup Files

To upload or create a new lookup file, click **New Lookup File**, then click the appropriate option from the drop-down.





Adding a lookup file

Modifying Lookup Files

To re-upload, expand, edit, or delete an existing `.csv` or `.gz` lookup file, click its row on the Lookups page. (No editing option is available for `.mmdb` files; you can only re-upload or delete these.)

In the resulting modal, you can edit files in **Table** or **Text** mode. However, **Text** mode is disabled for files larger than 1 MB.

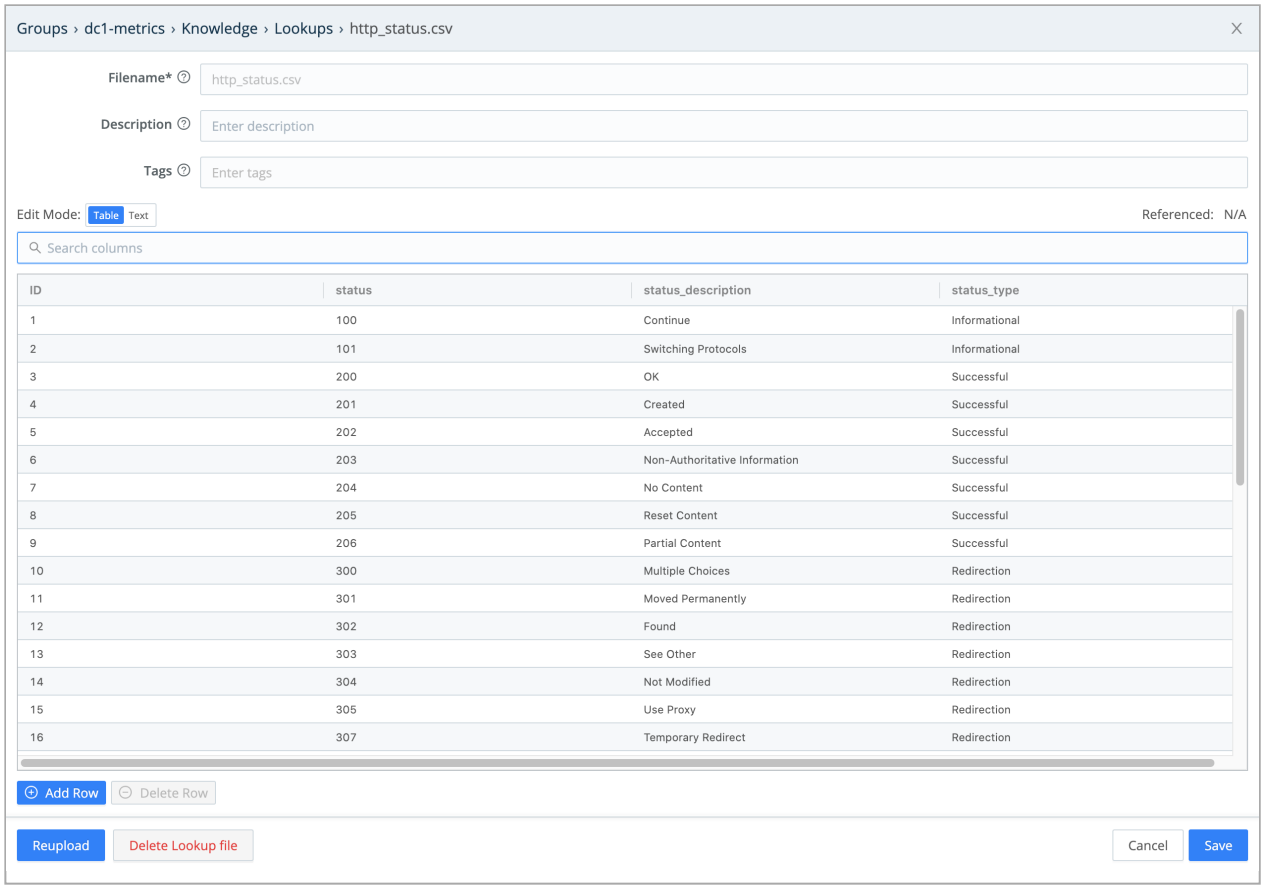

Editing in **Table** mode

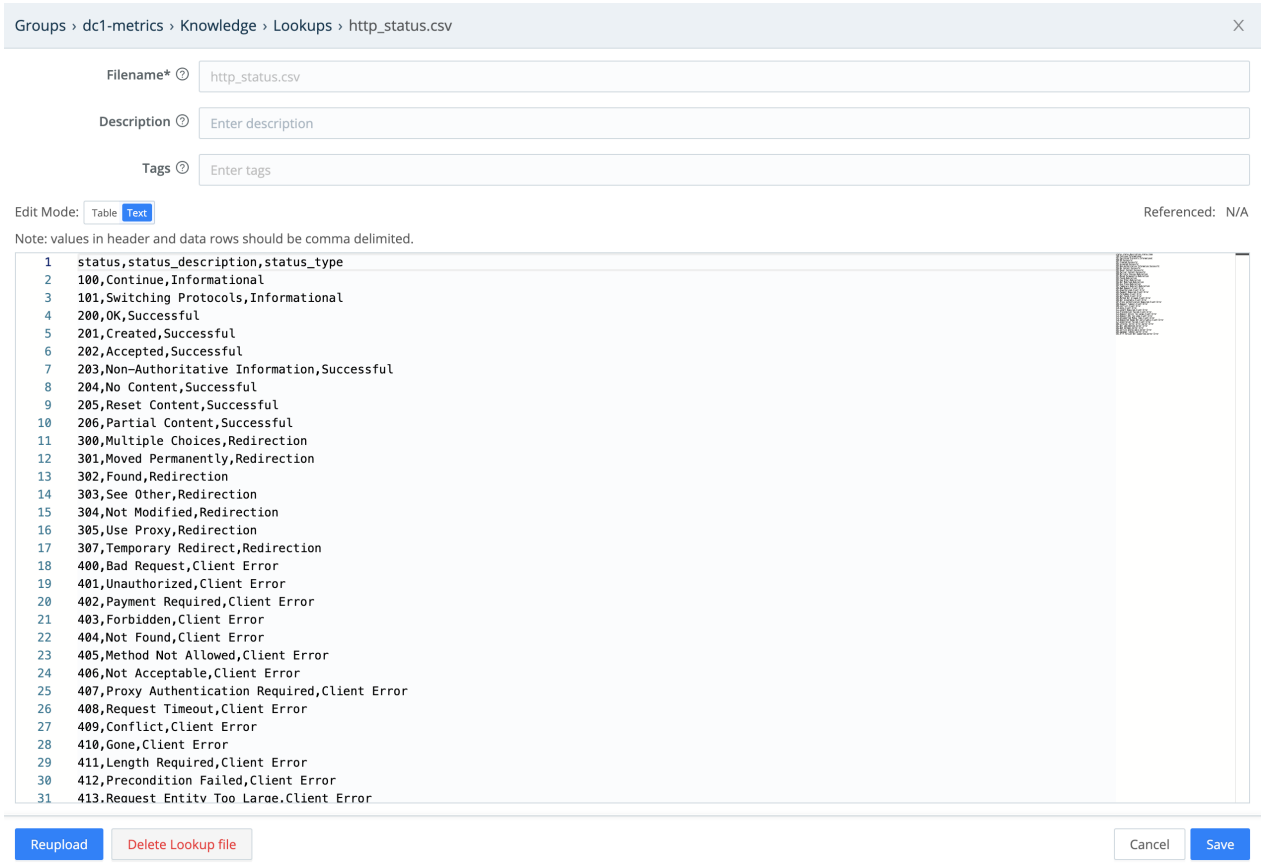

Editing in **Text** mode

> **Editing Regex with Quotation Marks**
>
> When a regex contains quotes, edit it in **Text** mode. Do not edit it **Table** mode, which can cause the regex to behave in unexpected ways.

Memory Sizing for Large Lookups

For large lookup files, you'll need to provide extra memory beyond basic requirements for Cribl Stream and the OS. To determine how much extra memory to add to a Worker Node/Edge Node for a lookup, use this formula:

```
Lookup file's uncompressed size (MB) * 2.25 (to 2.75) *  numWorkerProcesses = Extra RAM required for lookup
```

For example, if you have a lookup file that is 1 GB (1,000 MB) on disk, and three Worker Processes, you could use an average 2.50 as the multiplier:

```
1,000 * 2.50 * 3 = 7,500
```

In this case, the Node's server or VM would need an extra 7,500 MB (7.5 GB) to accommodate the lookup file across all three worker processes.

What's with That Multiplier?

We've cited a squishy range of 2.25–2.75 for the multiplier, because we've found that it varies inversely with the number of columns in the lookup file:

- The fewer columns, the higher the extra memory overhead (2.75 multiplier).
- The more columns, the lower the overhead (2.25 multiplier).

In Cribl's testing:

- 5 columns required a multiplier of 2.75
- 10 columns required a multiplier of only 2.25.

These are general (not exact) guidelines, and this multiplier depends only on the lookup table's number of columns. The memory overhead imposed by each additional row appears to decline when more columns are present in the data.

Maximum Table Size

Aside from the memory requirements above, the Node.js runtime imposes a hard limit on the size of lookup tables that Cribl Stream can handle. No table can contain more than 16,777,216 (i.e., 2^{24}) rows. If a lookup exceeds this size, attempting to load the lookup will log errors of the form: `failed to load function...Value undefined out of range....`

Other Scenarios

See also:

- Lookup Function.
- Ingest-time Lookups use case.
- Managing Large Lookups use case.
- Redis Function for faster lookups using a Redis integration (bypasses the Lookups Library).

12.2. Event Breakers

Event Breakers help break incoming streams of data into discrete events. To see how Event Breakers interact with the rest of Cribl Stream's data flow, see Event Processing Order.

Accessing Event Breakers

You access the Event Breakers management interface from Cribl Stream's top nav under **Processing** > **Knowledge** > **Event Breaker Rules**. On the resulting **Event Breaker Rules** page, you can edit, add, delete, search, and tag Event Breaker rules and rulesets, as necessary.

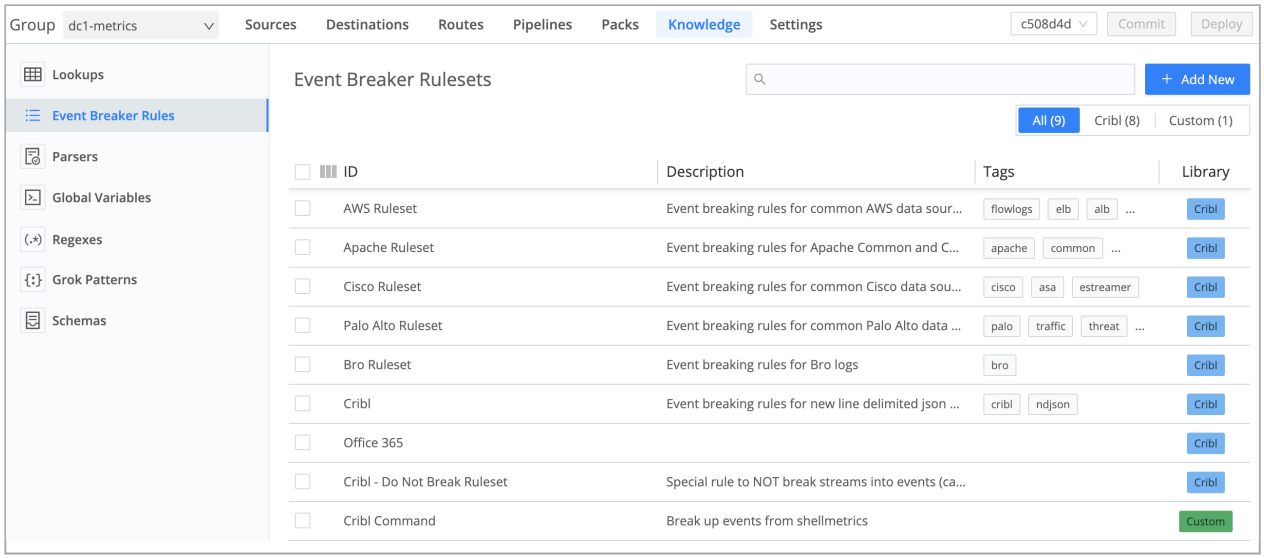

Event Breaker Rulesets page

Limitations

Event Breakers are directly accessible only on Sources that require incoming events to be broken into a better-defined format. (Check individual Cribl Stream Sources' documentation for Event Breaker support.) Also, Event Breakers are currently not supported in Packs.

However, you can instead use the Event Breaker Function in Pipelines that process data from unsupported Sources, and in Pipelines within Packs.

Event Breaker Rulesets

Rulesets are **collections of Event Breaker rules** that are associated with Sources. Rules define configurations needed to break down a stream of data into events.

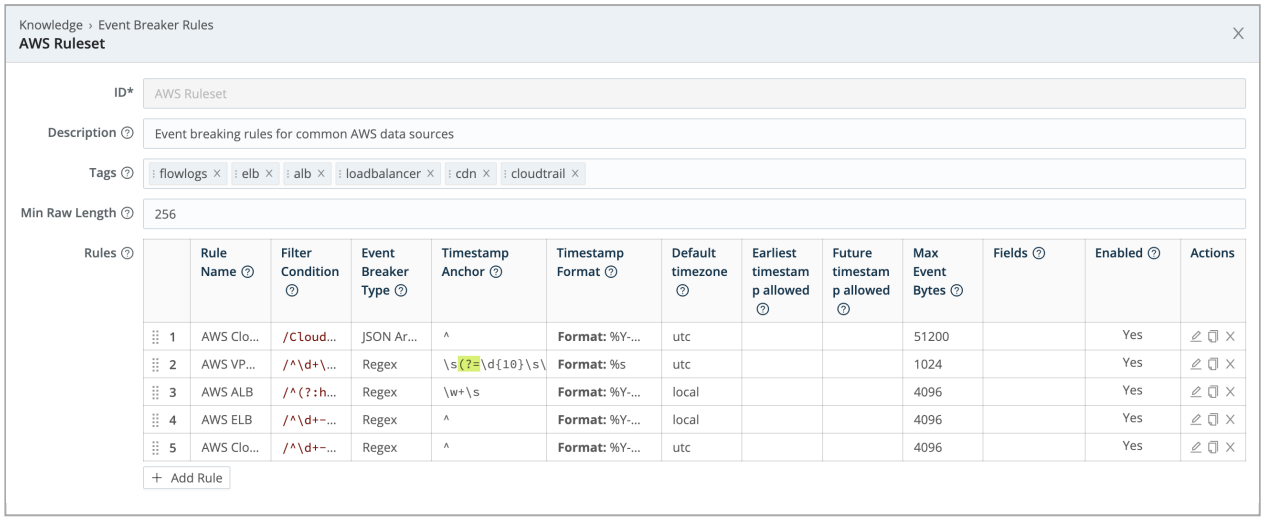

Rules within an example (AWS) ruleset that ships with Cribl Stream

Rules within a ruleset are ordered and evaluated top->down. One or more rulesets can be associated with a Source, and these rulesets are also evaluated top->down. For a stream from a given Source, the first matching rule goes into effect.

```
Ruleset A
  Rule 1
  Rule 2
  ...
  Rule n

...

Ruleset B
  Rule Foo
  Rule Bar
  ...
  Rule FooBar
```

An example of multiple rulesets associated with a Source:

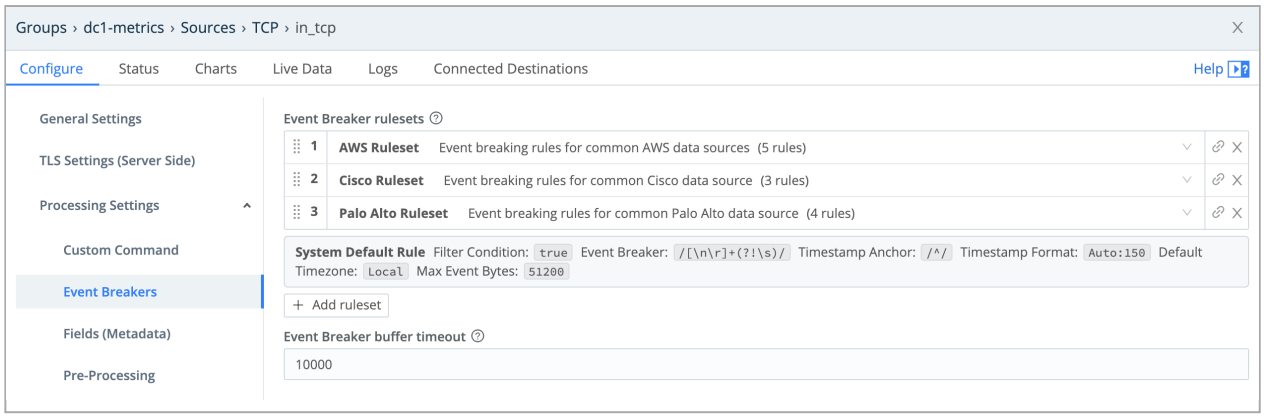

Three Event Breaker rulesets added to a Source

Rule Example

This rule breaks on newlines and uses Manual timestamping **after** the sixth comma, as indicated by this pattern: `^(?:[^,]*,){6}`.

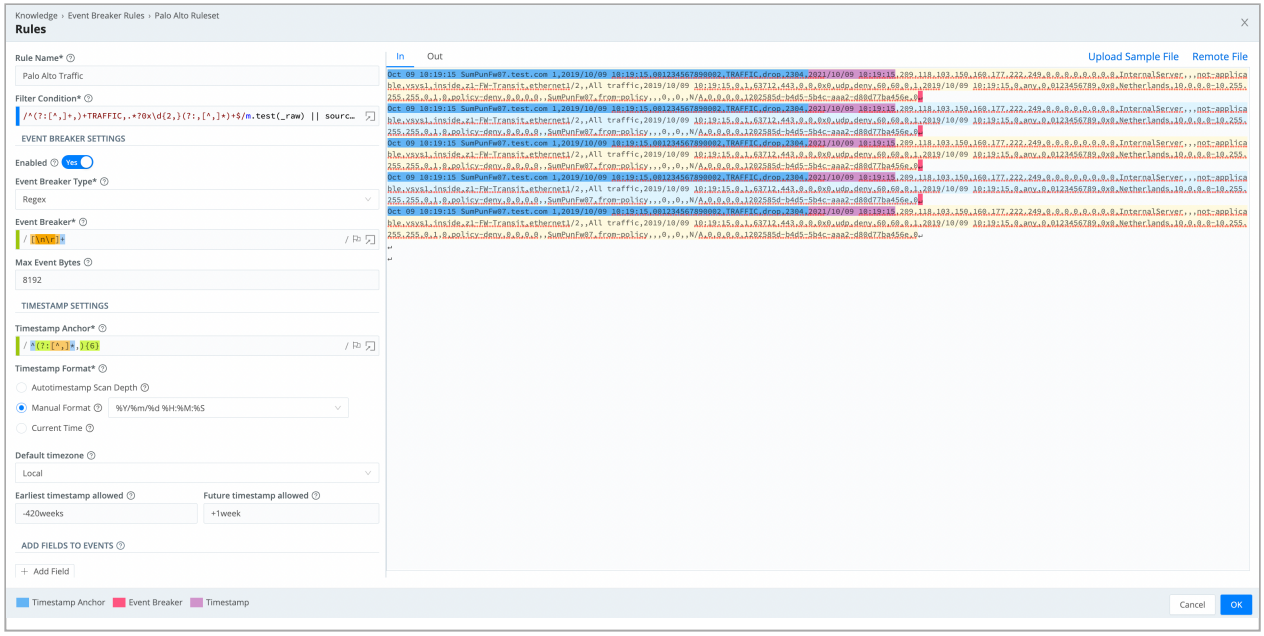

An Event Breaker rule

System Default Rule

The system default rule functionally sits at the bottom of the ruleset/rule hierarchy (but is built-in and not displayed on the Event Breakers page), and goes into effect if there are no matching rules:

- Filter Condition defaults to `true`
- Event Breaker to `[\n\r]+(?!\s)`

- Timestamp anchor to `^`
- Timestamp format to `Auto` and a scan depth of `150` bytes
- Max Event Bytes to `51200`
- Default Timezone to `Local`

How Do Event Breakers Work

On the **Event Breaker Rules** page (see screenshot above), click **Add Ruleset** to create a new Event Breaker ruleset. Click **Add Rule** within a ruleset to add a new Event Breaker.

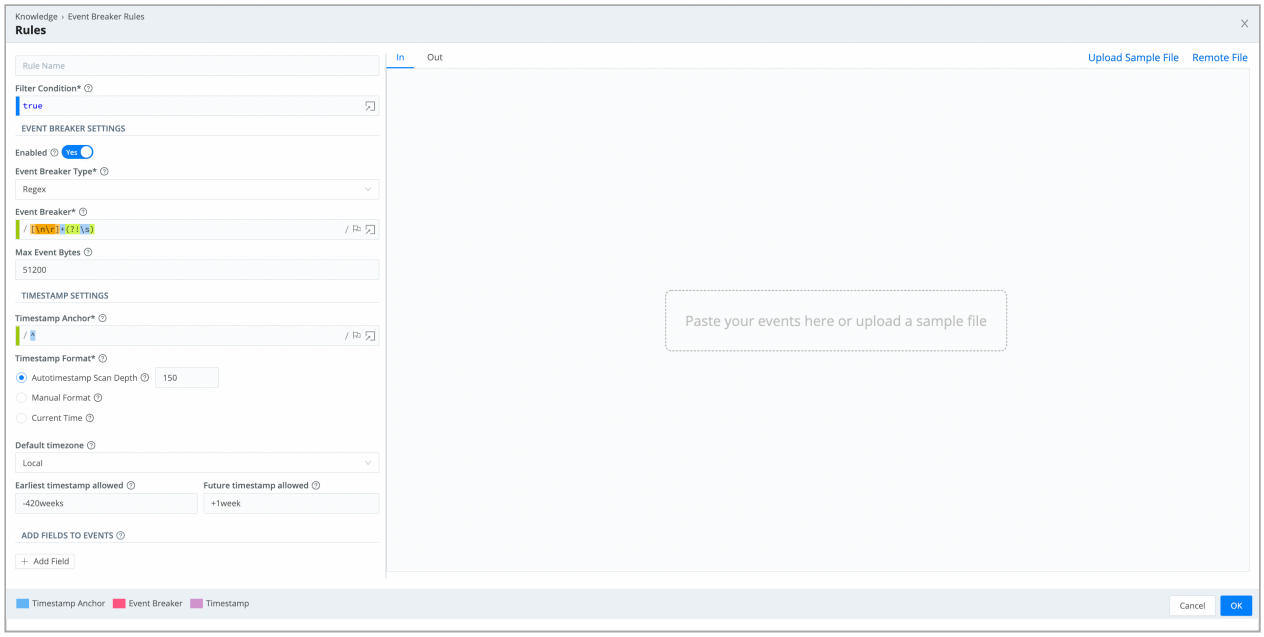

Adding a new Event Breaker rule

Each Event Breaker includes the following components, which you configure from top to bottom in the above **Event Breaker Rules** modal:

Filter Condition

As a stream of data moves into the engine, a rule's filter expression is applied. If the expression evaluates to `true`, the rule configurations are engaged for the entire duration of that stream. Otherwise, the next rule down the line is evaluated.

The "stickiness" of the first `true` expression can lead to some unintended behavior. For example, if an S3 Source ingests an archive file that contains multiple files in different formats – where each file requires its own unique Event Breaker – events will not be broken correctly.

Event Breaker Type

After a breaker pattern has been selected, it will apply on the stream **continuously**. See below for specific information on different Event Breaker Types.

Timestamp Settings

After events are synthesized out of streams, Cribl Stream will attempt timestamping. First, a timestamp anchor will be located inside the event. Next, starting there, the engine will try to do one of the following:

- Scan up to a configurable depth into the event and autotimestamp, **or**
- Timestamp using a manually supplied `strptime` format, **or**
- Timestamp the event with the current time.

The closer an anchor is to the timestamp pattern, the better the performance and accuracy – especially if multiple timestamps exist within an event. For the manually supplied option, the anchor must lead the engine **right before** the timestamp pattern begins.

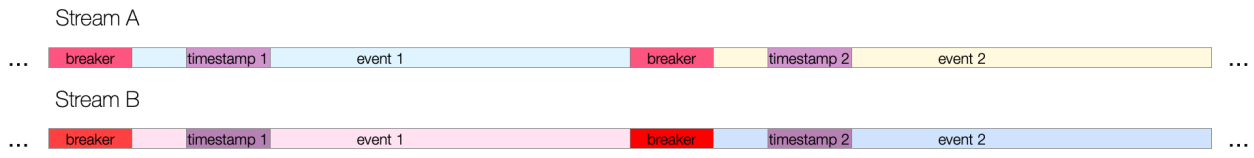

Anchors preceding timestamps

This timestamping executes the same basic algorithm as the Auto Timestamp Function and the C.Time.timestampFinder() native method.

Cribl Stream truncates timestamps to three-digit (milliseconds) resolution, omitting trailing zeros.

In Cribl Stream 3.4.2 and above, where an Event Breaker has set an event's `_time` to the current time – rather than extracting the value from the event itself – it will mark this by adding the internal field `__timestampExtracted: false` to the event.

Add Fields to Events

After events have been timestamped, one or more fields can be added here as key-value pairs. In each field's **Value Expression**, you can fully evaluate the field value using JavaScript expressions.

> Event Breakers **always** add the `cribl_breaker` field to output events. Its value is the name of the chosen ruleset. (Some examples below omit the `cribl_breaker` field for brevity, but in real life the field is always added.)

Event Breaker Types

Several types of Event Breaker can be applied to incoming data streams:

- Regex
- File Header
- JSON Array
- JSON New Line Delimited
- Timestamp
- CSV

Regex

The Regex breaker uses regular expressions to find breaking points in data streams.

After a breaker regex pattern has been selected, it will apply on the stream **continuously**. Breaking will occur at the beginning of the match, and the matched content will be consumed/thrown away. If necessary, you can use a positive lookahead regex to keep the content – e.g.: `(?=pattern)`

Capturing groups are **not allowed** to be used anywhere in the Event Breaker pattern, as they will further break the stream – which is often undesirable. Breaking will also occur if **Max Event Bytes** has been reached.

> The highest **Max Event Bytes** value that you can set is about 128 MB (`134217728` bytes). Events exceeding the maximum will be split into separate events, but left unbroken. Cribl Stream will set these events' `__isBroken` internal field to `false`.

Example

Break after a newline or carriage return, but only if followed by a timestamp pattern:
Event Breaker: `[\n\r]+(?=\d+-\d+-\d+\s\d+:\d+:\d+)`

```
--- input ---
2020-05-19 16:32:12 moen3628 ipsum[5213]: Use the mobile TCP feed, then you can
program the auxiliary card!
   Try to connect the FTP sensor, maybe it will connect the digital bus!
   Try to navigate the AGP panel, maybe it will quantify the mobile alarm!
2020-05-19 16:32:12 moen3628 ipsum[5213]: Use the mobile TCP feed, then you can
program the auxiliary card!
   Try to connect the FTP sensor, maybe it will connect the digital bus!
   Try to navigate the AGP panel, maybe it will quantify the mobile alarm!


--- output event 1 ---
{
  "_raw": "2020-05-19 16:32:12 moen3628 ipsum[5213]: Use the mobile TCP feed, then
you can program the auxiliary card! \n   Try to connect the FTP sensor, maybe it
will connect the digital bus!\n   Try to navigate the AGP panel, maybe it will
quantify the mobile alarm!",
  "_time": 1589920332
}

--- output event 2 ---
{
  "_raw": "2020-05-19 16:32:12 moen3628 ipsum[5213]: Use the mobile TCP feed, then
you can program the auxiliary card!\n   Try to connect the FTP sensor, maybe it will
connect the digital bus!\n   Try to navigate the AGP panel, maybe it will quantify
the mobile alarm!",
  "_time": 1589920332
}
```

File Header

You can use the File Header breaker to break files with headers, such as IIS or Bro logs. This type of breaker relies on a header section that lists field names. The header section is typically present at the top of the file, and can be single-line or greater.

After the file has been broken into events, fields will also be extracted, as follows:

- **Header Line**: Regex matching a file header line. For example, `^#`.
- **Field Delimiter**: Field delimiter regex. For example, `\s+`.
- **Field Regex**: Regex with one capturing group, capturing all the fields to be broken by field delimiter. For example, `^#[Ff]ields[:]?\s+(.*)`
- **Null Values**: Representation of a null value. Null fields are not added to events.
- **Clean Fields**: Whether to clean up field names by replacing non `[a-zA-Z0-9]` characters with `_`.

Example

Using the values above, let's see how this sample file breaks up:

```
--- input ---
#fields ts      uid     id.orig_h       id.orig_p       id.resp_h       id.resp_p
proto
#types  time    string  addr    port    addr    port    enum
1331904608.080000       -     192.168.204.59  137     192.168.204.255 137     udp
1331904609.190000       -     192.168.202.83  48516   192.168.207.4   53      udp


--- output event 1 ---
{
  "_raw": "1331904608.080000       -     192.168.204.59  137     192.168.204.255 137
udp",
  "ts": "1331904608.080000",
  "id_orig_h": "192.168.204.59",
  "id_orig_p": "137",
  "id_resp_h": "192.168.204.255",
  "id_resp_p": "137",
  "proto": "udp",
  "_time": 1331904608.08
}

--- output event 2 ---
{
  "_raw": "1331904609.190000       -     192.168.202.83  48516   192.168.207.4   53
udp",
  "ts": "1331904609.190000",
  "id_orig_h": "192.168.202.83",
  "id_orig_p": "48516",
  "id_resp_h": "192.168.207.4",
  "id_resp_p": "53",
  "proto": "udp",
  "_time": 1331904609.19
}
```

JSON Array

You can use the JSON Array to extract events from an array in a JSON document (e.g., an Amazon CloudTrail file).

- **Array Field**: Optional path to array in a JSON event with records to extract. For example, `Records`.
- **Timestamp Field**: Optional path to timestamp field in extracted events. For example, `eventTime` or `level1.level2.eventTime`.
- **JSON Extract Fields**: Enable this slider to auto-extract fields from JSON events. If disabled, only `_raw` and `time` will be defined on extracted events.
- **Timestamp Format**: If **JSON Extract Fields** is set to **No**, you **must** set this to **Autotimestamp** or **Current Time**. If **JSON Extract Fields** is set to **Yes**, you can select any option here.

Example

Using the values above, let's see how this sample file breaks up:

```
--- input ---
{"Records":[{"eventVersion":"1.05","eventTime":"2020-04-
08T01:35:55Z","eventSource":"ec2.amazonaws.com","eventName":"DescribeVolumes",
"more_fields":"..."},
{"eventVersion":"1.05","eventTime":"2020-04-
08T01:35:56Z","eventSource":"ec2.amazonaws.com","eventName":"DescribeInstanceAttribute"
"more_fields":"..."}]}

--- output event 1 ---
{
  "_raw": "{\"eventVersion\":\"1.05\",\"eventTime\":\"2020-04-
08T01:35:55Z\",\"eventSource\":\"ec2.amazonaws.com\",\"eventName\":\"DescribeVolumes\",
\"more_fields\":\"...\"}",
  "_time": 1586309755,
  "cribl_breaker": "j-array"
}

--- output event 2 ---
{
  "_raw": "{\"eventVersion\":\"1.05\",\"eventTime\":\"2020-04-
08T01:35:56Z\",\"eventSource\":\"ec2.amazonaws.com\",\"eventName\":\"DescribeInstanceAt
\"more_fields\":\"...\"}",
  "_time": 1586309756,
  "cribl_breaker": "j-array"
}
```

JSON New Line Delimited

You can use the JSON New Line Delimited breaker to break and extract fields in newline-delimited JSON streams.

Example

Using default values, let's see how this sample stream breaks up:

```
--- input ---
{"time":"2020-05-
25T18:00:54.201Z","cid":"w1","channel":"clustercomm","level":"info","message":"metric
sender","total":720,"dropped":0}
{"time":"2020-05-
25T18:00:54.246Z","cid":"w0","channel":"clustercomm","level":"info","message":"metric
sender","total":720,"dropped":0}


--- output event 1 ---
{
  "_raw": "{\"time\":\"2020-05-
25T18:00:54.201Z\",\"cid\":\"w1\",\"channel\":\"clustercomm\",\"level\":\"info\",\"mess
sender\",\"total\":720,\"dropped\":0}",
  "time": "2020-05-25T18:00:54.201Z",
  "cid": "w1",
  "channel": "clustercomm",
  "level": "info",
  "message": "metric sender",
  "total": 720,
  "dropped": 0,
  "_time": 1590429654.201,
}

--- output event 2 ---
{
  "_raw": "{\"time\":\"2020-05-
25T18:00:54.246Z\",\"cid\":\"w0\",\"channel\":\"clustercomm\",\"level\":\"info\",\"mess
sender\",\"total\":720,\"dropped\":0}",
  "time": "2020-05-25T18:00:54.246Z",
  "cid": "w0",
  "channel": "clustercomm",
  "level": "info",
  "message": "metric sender",
  "total": 720,
  "dropped": 0,
  "_time": 1590429654.246,
}
```

Timestamp

You can use the Timestamp breaker to break events at the beginning of any line in which Cribl Stream finds a timestamp. This type enables breaking on lines whose timestamp pattern is not known ahead of time.

Example

Using default values, let's see how this sample stream breaks up:

```
--- input ---
{"level":"debug","ts":"2021-02-
02T10:38:46.365Z","caller":"sdk/sync.go:42","msg":"Handle ENIConfig Add/Update: us-
west-2a, [sg-426fdac8e5c22542], subnet-42658cf14a98b42"}
{"level":"debug","ts":"2021-02-
02T10:38:56.365Z","caller":"sdk/sync.go:42","msg":"Handle ENIConfig Add/Update: us-
west-2a, [sg-426fdac8e5c22542], subnet-42658cf14a98b42"}


--- output event 1 ---
{
  "_raw": "{\"level\":\"debug\",\"ts\":\"2021-02-
02T10:38:46.365Z\",\"caller\":\"sdk/sync.go:42\",\"msg\":\"Handle ENIConfig
Add/Update: us-west-2a, [sg-426fdac8e5c22542], subnet-42658cf14a98b42\"}",
  "_time": 1612262326.365
}

--- output event 2 ---
{
  "_raw": "{\"level\":\"debug\",\"ts\":\"2021-02-
02T10:38:56.365Z\",\"caller\":\"sdk/sync.go:42\",\"msg\":\"Handle ENIConfig
Add/Update: us-west-2a, [sg-426fdac8e5c22542], subnet-42658cf14a98b42\"}",
  "_time": 1612262336.365
}
```

CSV

The CSV breaker extracts fields in CSV streams that include a header line. Selecting this type exposes these extra fields:

- **Delimiter**: Delimiter character to use to split values. Defaults to: ,
- **Quote Char**: Character used to quote literal values. Defaults to: "
- **Escape Char**: Character used to escape the quote character in field values. Defaults to: "

  Example: Using default values, let's see how this sample stream breaks up:

Example

Using default values, let's see how this sample stream breaks up:

```
--- input ---
time,host,source,model,serial,bytes_in,bytes_out,cpu
1611768713,"myHost1","anet","cisco","ASN4204269",11430,43322,0.78
1611768714,"myHost2","anet","cisco","ASN420423",345062,143433,0.28


--- output event 1 ---
{
  "_raw":
"\"1611768713\",\"myHost1\",\"anet\",\"cisco\",\"ASN4204269\",\"11430\",\"43322\",\"0.7
  "time": "1611768713",
  "host": "myHost1",
  "source": "anet",
  "model": "cisco",
  "serial": "ASN4204269",
  "bytes_in": "11430",
  "bytes_out": "43322",
  "cpu": "0.78",
  "_time": 1611768713
}

--- output event 2 ---
{
  "_raw":
"\"1611768714\",\"myHost2\",\"anet\",\"cisco\",\"ASN420423\",\"345062\",\"143433\",\"0.
  "time": "1611768714",
  "host": "myHost2",
  "source": "anet",
  "model": "cisco",
  "serial": "ASN420423",
  "bytes_in": "345062",
  "bytes_out": "143433",
  "cpu": "0.28",
  "_time": 1611768714
}
```

With **Type: CSV** selected, an Event Breaker will properly add quotes around all values, regardless of their initial state.

Cribl Versus Custom Rulesets

Event Breaker rulesets shipped by Cribl will be listed under the **Cribl** tag, while user-built rulesets will be listed under **Custom**. Over time, Cribl will ship more patterns, so this distinction allows for both sets to grow independently. In the case of an ID/Name conflict, the Custom pattern takes priority in listings and search.

Exporting and Importing Rulesets

You can export and import Custom (or Cribl) rulesets as JSON files. This facilitates sharing rulesets among Worker Groups or Cribl Stream deployments.

To export a ruleset:

1. Click to open an existing ruleset, or create a new ruleset.
2. In the resulting modal, click **Advanced Mode** to open the JSON editor.
3. You can now modify the ruleset directly in JSON, if you choose.
4. Click **Export**, select a destination path, and name the file.

To import any ruleset that has been exported as a valid JSON file:

1. Create a new ruleset.
2. In the resulting modal, click **Advanced Mode** to open the JSON editor.
3. Click **Import**, and choose the file you want.
4. Click **OK** to get back to the **New Ruleset** modal.
5. Click **Save**.

> Every ruleset must have a unique value in its top `id` key. Importing a JSON file with a duplicate `id` value will fail at the final **Save** step, with a message that the ruleset already exists. You can remedy this by giving the file a unique `id` value.

Edge: Building Breakers from Files

You can use Cribl Edge to apply and author Event Breakers while exploring files – even files that you have not saved as sample files. This option includes remote files that are viewable only from Edge. See Exploring Cribl Edge on Linux or Exploring Cribl Edge on Windows.

Troubleshooting

If you notice fragmented events, check whether Cribl Stream has added a `__timeoutFlush` internal field to them. This diagnostic field's presence indicates that the events were flushed because the Event Breaker

buffer timed out while processing them. These timeouts can be due to large incoming events, backpressure, or other causes.

Specifying Minimum `_raw` Length

If you notice that the same Collector or Source is applying inconsistent Event Breakers to different datasets – e.g., intermittently falling back to the **System Default Rule** – you can address this by adjusting Breakers' **Min Raw Length** setting.

When determining which Event Breaker to use, Cribl Stream creates a substring from the incoming `_raw` field, at the length set by rules' **Max Event Bytes** parameters. If Cribl Stream does not get a match, it checks whether the substring of `_raw` has at least the threshold number of characters set by **Min Raw Length**. If so, Cribl Stream does not wait for more data.

You can tune this **Min Raw Length** threshold to account for varying numbers of inapplicable characters at the beginning of events. The default is `256` characters, but you can set this as low as `50`, or as high as `100000` (100 KB).

12.3. Parsers Library

What Are Parsers

Parsers are definitions and configurations for the Parser Function. You can find the library from Cribl Stream's top nav under **Processing** > **Knowledge** > **Parsers**, and its purpose is to provide an interface for creating and editing Parsers. The library is searchable, and each parser can be tagged as necessary.

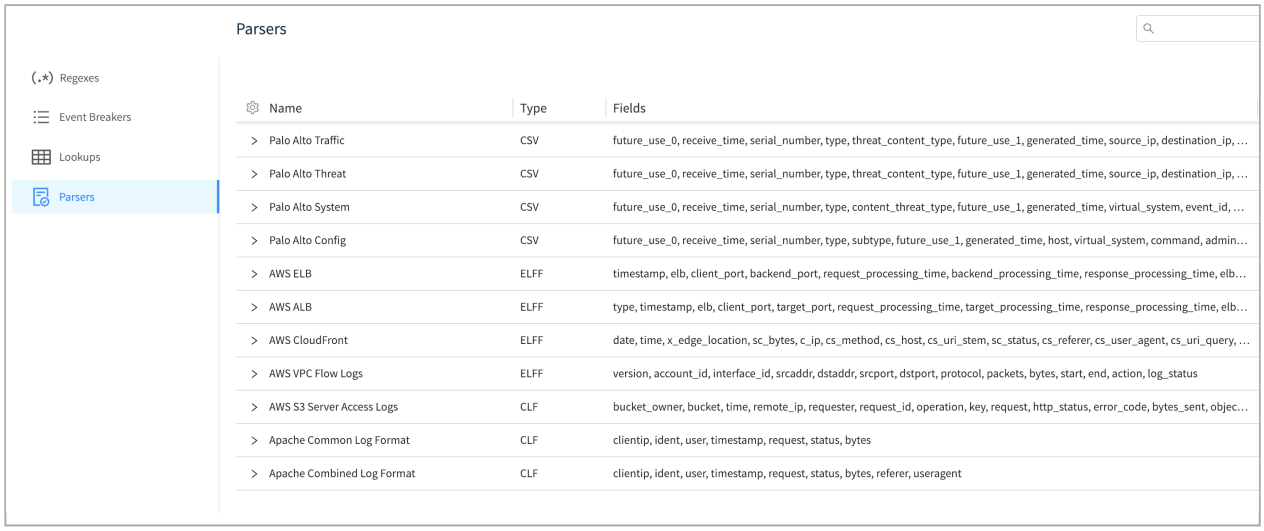

Parsers Library

Parsers can be used to **extract** or **reserialize** events. See Parser Function page for examples.

Supported Parser Types:

- CSV – Parse and reserialize comma-separated values.
- ELFF – Parse and reserialize events in Extended Log File Format.
- CLF – Parse and reserialize events in Common Log Format.

Creating a Parser

To create a parser, follow these steps:

1. Go to **Knowledge > Parsers** and click **Add New**.
2. Enter a unique **ID**.
3. Optionally, enter a **Description**.

4. Select a **Parser type** (see the supported types above).
5. Enter the **List of fields** expected to be extracted, in order. Click this field's Maximize icon (far right) if you'd like to open a modal where you can work with sample data and iterate on results.
6. Optionally, enter any desired **Tags**.

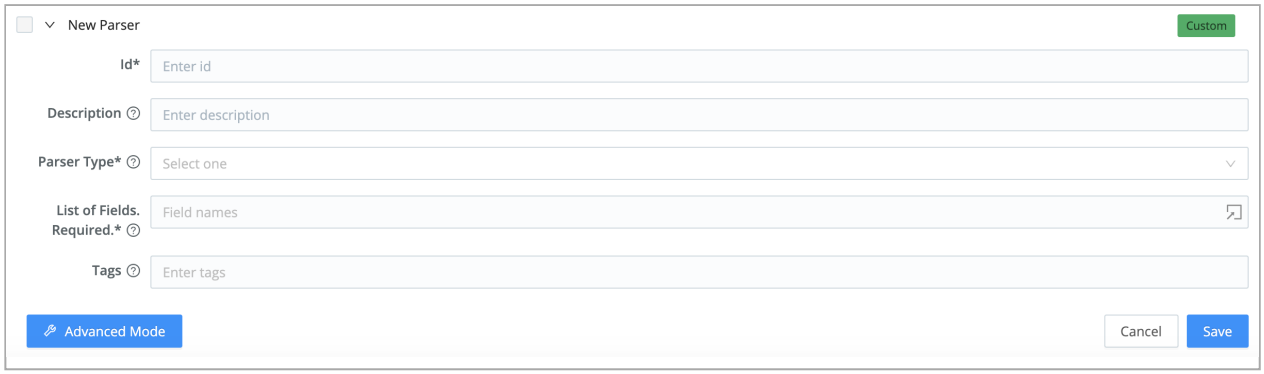

Adding a new parser

12.4. Global Variables Library

What Are Global Variables

Global Variables are reusable JavaScript expressions that can be accessed in Functions in any Pipeline. You can access the library from Cribl Stream's top nav under **Processing** > **Knowledge** > **Global Variables**.

Typical use cases for Global Variables include:

- Storing a constant that you can reference from any Function in any Pipeline.
- Storing a relatively long value expression, or one that uses one or more **arguments**.

Global Variables can be of the following types:

- Number
- String
- Boolean
- Object
- Array
- Expression

Global Variables can be accessed via `C.vars.` – which can be called anywhere in Cribl Stream that JS expressions are supported. Typeahead is provided. More on Cribl Expressions here.

Examples

Scenario 1:

Assign field `foo` the value in `theAnswer` Global Variable.

- Global Variable Name: `theAnswer` <-- ships with Cribl Stream by default.
- Global Variable Value: `42`
- **Sample Eval Function:** `foo = C.vars.theAnswer`

Scenario 2:

Assign field `nowEpoch` the current time, in epoch format.

- Global Variable Name: `epoch` <-- ships with Cribl Stream by default.
- Global Variable Value: `Date.now()/1000`
- **Sample Eval Function:** `nowEpoch = C.vars.epoch()`

Scenario 3:

Create a new field called `storage`, by converting the value of event field `size` to human-readable format.

- Global Variable Name: `convertBytes` <-- ships with Cribl Stream by default
- Global Variable Value: `` `${Math.round(bytes / Math.pow(1024, (Math.floor(Math.log(bytes) / Math.log(1024)))), 2)}${['Bytes', 'KiB', 'MiB', 'GiB', 'TiB', 'PiB', 'EiB', 'ZiB', 'YiB'][(Math.floor(Math.log(bytes) / Math.log(1024)))]}` ``
  Note the use of quotes or backticks around values. Use the opposite delimiter for the enclosing expression.
- Global Variable Argument: `bytes`
- **Sample Eval Function:** `storage = C.vars.convertBytes(size)`
  Note the use of `bytes` here as an argument.

12.5. Regex Library

What Is the Regex Library

Cribl Stream ships with a Regex Library that contains a set of pre-built common regex patterns. This library serves as an easily accessible repository of regular expressions. The Library is searchable, and you can assign tags to each pattern for further organization or categorization. Access the Library from Cribl Stream's top nav under **Processing** > **Knowledge** > **Regex Library** .

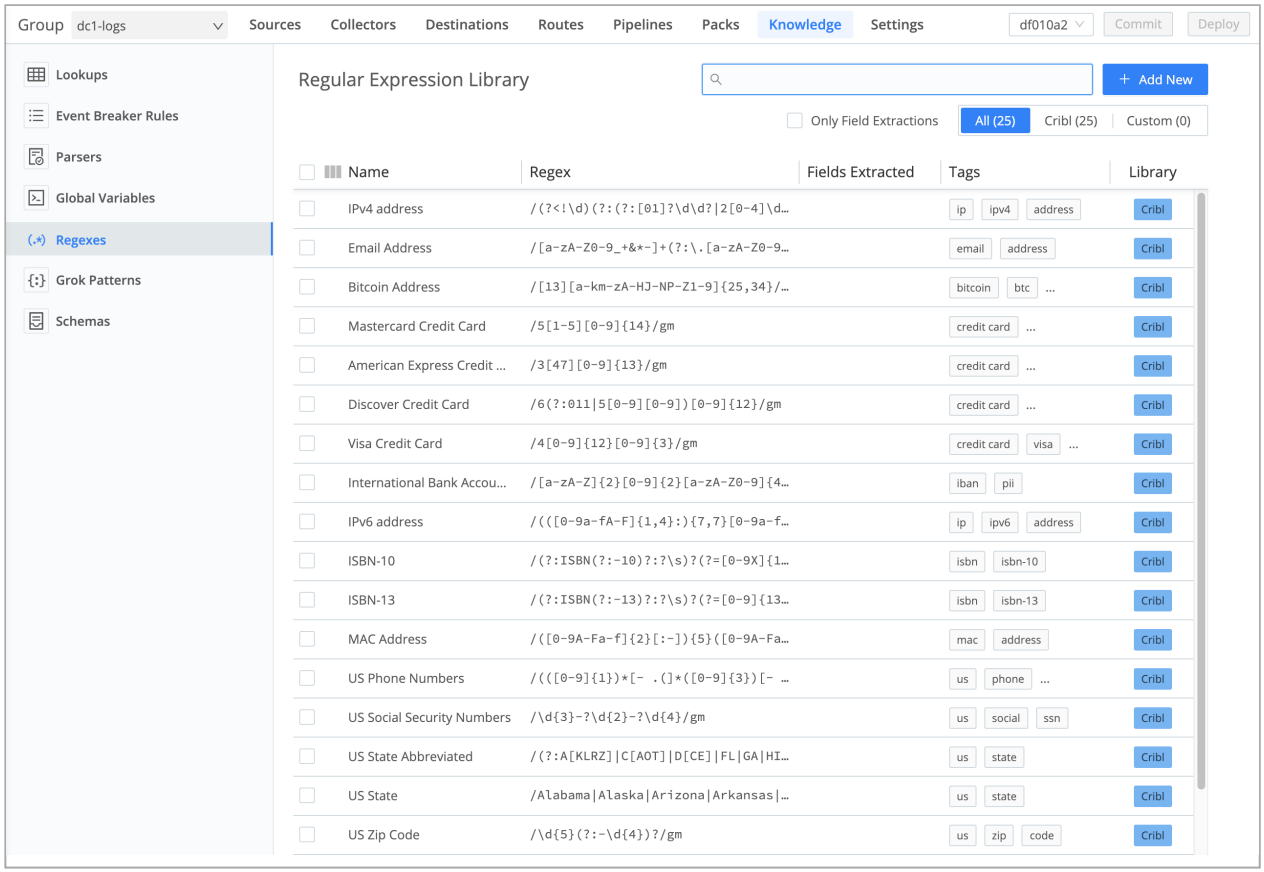

Regular Expression Library

Using Library Patterns

As of this version, the Library contains 25 patterns shipped by Cribl Stream. To insert a pattern into a Function's regex field, first click the pop-out or Edit icon beside that field.

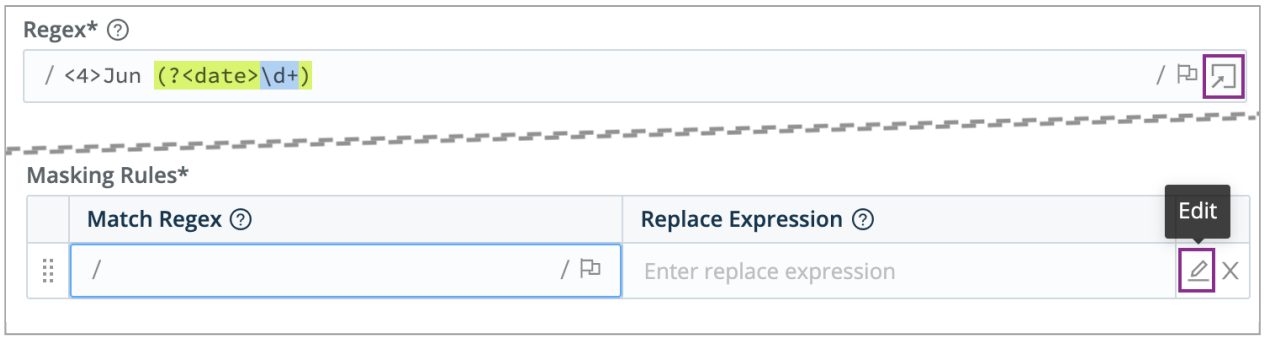

Opening a Regex modal

In the resulting Regex or Rules modal, Regex Library patterns will appear as typeahead options. Click a pattern to paste it in. You can then use the pattern as-is, or modify it as necessary.

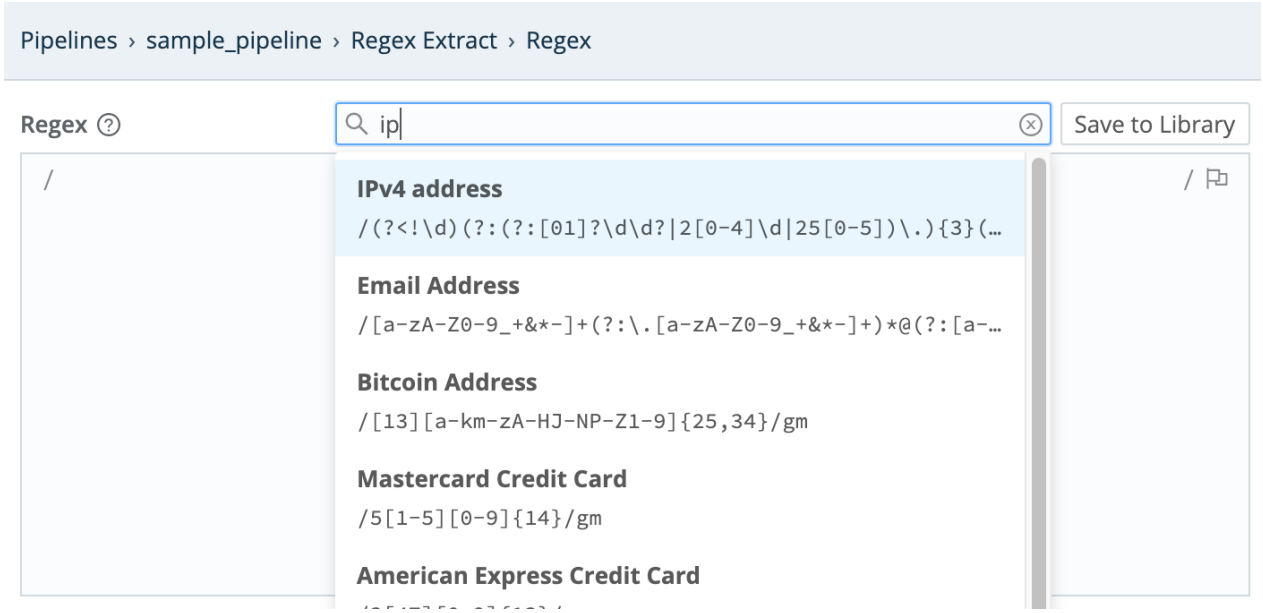

Inserting a pattern from the Regex Library

Adding Patterns to the Library

You can also add new, custom patterns to the Library. In the same modal, once you've built your pattern, click the **Save to Library** button.

Adding a custom pattern to the Regex Library from a Function's Regex modal

In the resulting modal, give your custom pattern a unique ID. Optionally, you can also provide a **Description** (name) and groom the **Sample data**. Then click **Save**.

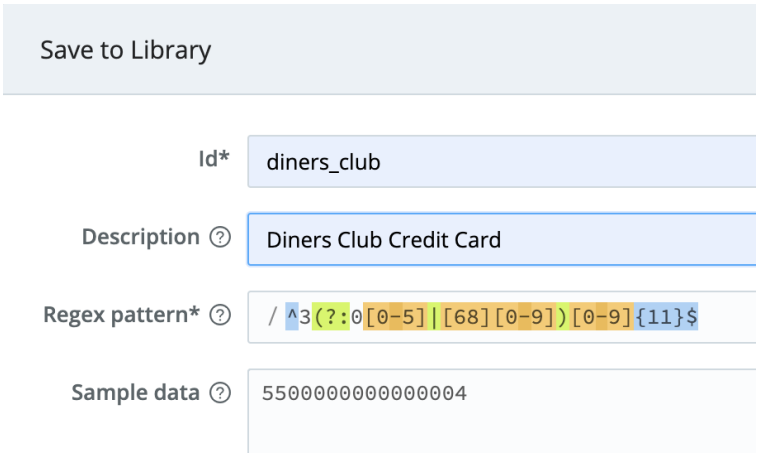

Identifying the custom pattern

Your custom pattern will now reside in the Regex Library. It will be available to Functions using the same typeahead assist as Cribl's pre-built patterns.

Cribl vs. Custom and Priority

Within the Library, patterns shipped by Cribl will be listed under the **Cribl** tab, while those built by users will be found under **Custom**. Over time, Cribl Stream will ship more patterns, and this distinction allows for both sets to grow independently.

In the case of an ID/Name conflict, the Custom pattern takes priority in listings and search. For example, if a Cribl-provided pattern and a Custom one are both named `ipv4`, the one from Cribl will not be displayed or delivered as a search result.

12.6. Grok Patterns Library

What Is the Grok Patterns Library

Cribl Stream ships with a Grok Patterns Library that contains a set of pre-built common patterns, organized as files.

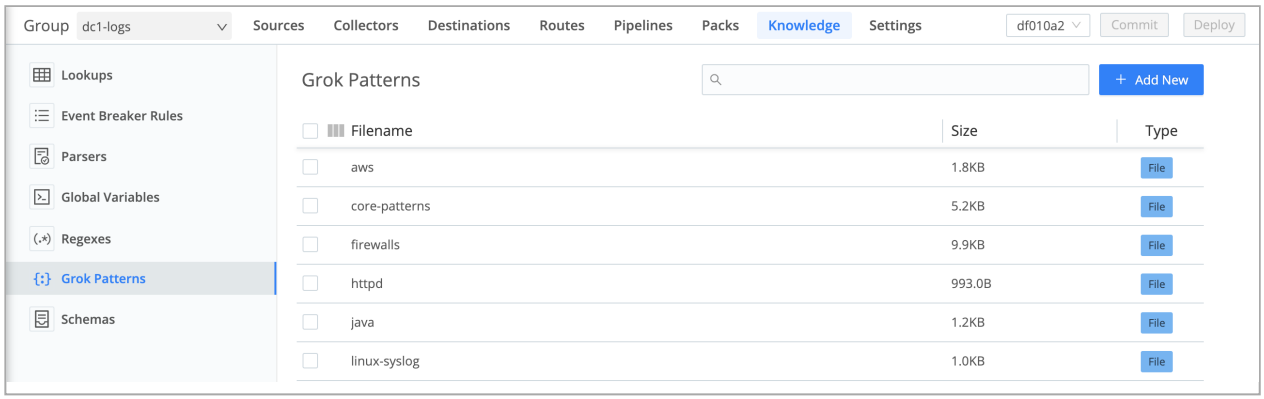

Grok Patterns Library

Managing Library Patterns

You can access the Grok Patterns Library from the UI's top nav by selecting **Processing** > **Knowledge** > **Grok Patterns**. The library contains several pattern files that Cribl provides for basic Grok scenarios, and is searchable.

To edit a pattern file, click **Edit** in its **Actions** column.

To create a new pattern file, click **New Grok pattern file**. In the resulting modal, assign a unique **Filename**, populate the file with patterns, then click **Save**.

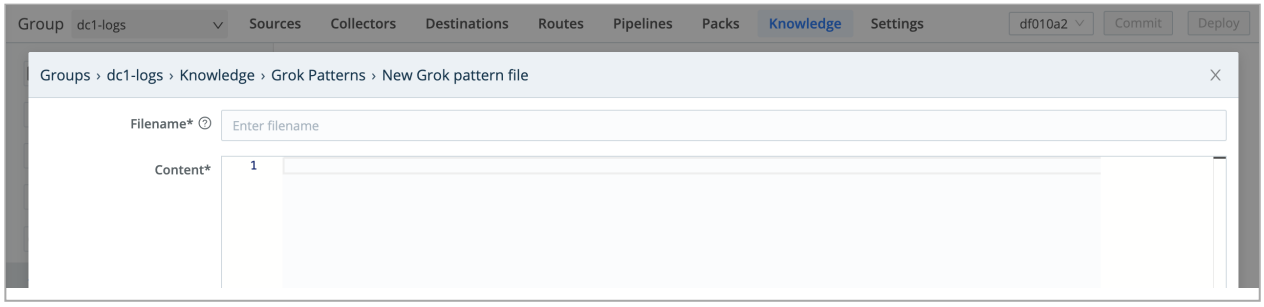

Adding Grok patterns

Pattern files reside in: `$CRIBL_HOME/(default|local)/cribl/grok-patterns/`

Using Grok Patterns

In the current Cribl Stream version, you apply Grok patterns by inserting a Grok Function into a Pipeline, then manually typing or pasting patterns into the **Pattern** field(s).

12.7. Schemas Library

Cribl Stream supports two kinds of schemas:

- JSON schemas for validating JSON events. This page outlines how to manage these in the UI at **Knowledge** > **Schemas**.
- Parquet schemas for writing data from a Cribl Stream Destination to Parquet files.

These schemas obviously serve different purposes. Beware of assuming that operations that work for one kind of schema can be used with the other. For example, the validation method for JSON schemas – `C.Schema('<schema_name>').validate(<object_field>)` – can't be used to validate Parquet schemas.

JSON Schemas

JSON schemas are based on the popular JSON Schema standard, and Cribl Stream supports schemas matching that standard's Drafts 0 through 7.

You can access the schema library from Cribl Stream's top nav under **Processing** > **Knowledge** > **Schemas**. Its purpose is to provide an interface for creating, editing, and maintaining schemas.

You validate a schema using this built-in method: `C.Schema('<schema_name>').validate(<object_field>)`.

You can call this method anywhere in Cribl Stream that supports JavaScript expressions. Typical use cases for schema validation:

- Making a decision before sending an event down to a destination.
- Making a decision before accepting an event. (E.g., drop an event if invalid.)
- Making a decision to route an event based on the result of validation.

JSON Schema Example

To add this example JSON Schema, go to **Processing** > **Knowledge** > **Schemas** and click **New Schema**. Enter the following:

- ID: `schema1`.
- Description: (Enter your own description here.)
- Schema: Paste the following schema.

JSON Schema - Sample

```
{
  "$id": "https://example.com/person.schema.json",
  "$schema": "http://json-schema.org/draft-07/schema#",
  "title": "Person",
  "type": "object",
  "required": ["firstName", "lastName", "age"],
  "properties": {
    "firstName": {
      "type": "string",
      "description": "The person's first name."
    },
    "lastName": {
      "type": "string",
      "description": "The person's last name."
    },
    "age": {
      "description": "Age in years which must be equal to or greater than zero.",
      "type": "integer",
      "minimum": 0,
      "maximum": 42
    }
  }
}
```

Assume that events look like this:

```
{"employee":{"firstName": "John", "lastName": "Doe", "age": 21}}
{"employee":{"firstName": "John", "lastName": "Doe", "age": 43}}
{"employee":{"firstName": "John", "lastName": "Doe"}}
```

To validate whether the `employee` field is valid per `schema1`, we can use the following:

`C.Schema('schema1').validate(employee)`

Results:

- First event is **valid**.
- Second event is **not valid** because `age` is greater than the maximum of `42`.
- Third event is **not valid** because `age` is missing.

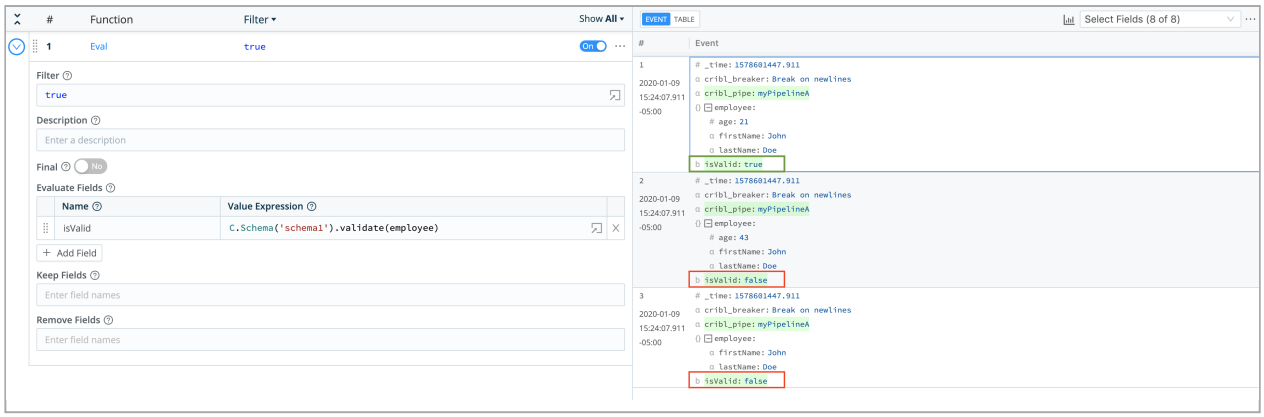

Schema validation results for the above events

12.8. Parquet Schemas

Cribl Stream supports two kinds of schemas:

- Parquet schemas for writing data from a Cribl Stream Destination to Parquet files. This page outlines how to manage these in the UI at **Knowledge** > **Parquet Schemas**.
- JSON schemas for validating JSON events.

These schemas obviously serve different purposes. Beware of assuming that operations that work for one kind of schema can be used with the other. For example, the validation method for JSON schemas – `C.Schema('<schema_name>').validate(<object_field>)` – can't be used to validate Parquet schemas.

Configuring Parquet Schemas

Destinations whose **General Settings** > **Data format** drop-down includes a `Parquet` option can write out data as files in the Apache Parquet columnar storage format.

Before configuring a Destination for Parquet output, you should add an existing Parquet schema, or create a new Parquet schema, that suits the data you're working with. You do not need to start from scratch: Cribl provides sample Parquet schemas for you to clone and then customize as needed.

From the top nav, select **Processing** > **Knowledge**, then select the **Parquet Schemas** left tab.

If you're adding a Parquet schema:

- Click **Add Parquet schema** to open the **New Parquet schema** modal.

If you're cloning an existing Parquet schema to create a new schema:

1. Click the name of the schema you want to start with, to open it in a modal.
2. Click **Clone Parquet Schema** to open the **New Parquet schema** modal.
3. Give the new schema a name and description.

From here, whether you're working with a brand-new or cloned schema:

4. Add and/or edit fields as desired.
5. Click **Save**.

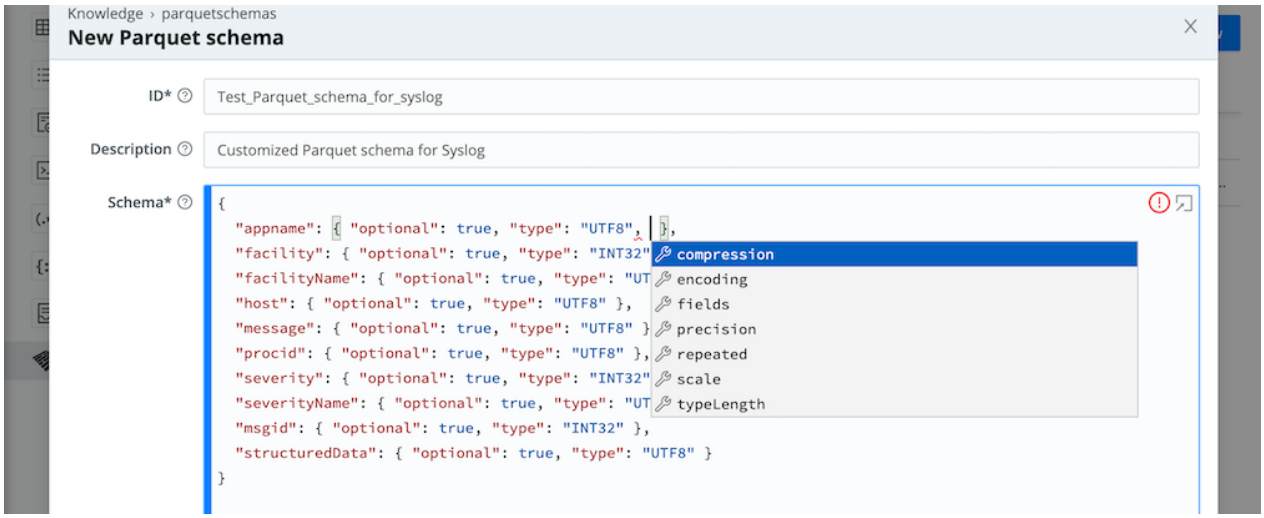

Creating a Parquet schema

Now, when you configure your Destination, the schema you created will be available from the **Parquet Settings** > **Parquet schema** drop-down.

Creating/Modifying Parquet Schemas from Destinations

When the existing schemas on a Destination's **Parquet schema** drop-down don't meet your needs, follow this procedure to add or modify (clone) a new schema.

1. Navigate to the Parquet Schemaa Library at **Processing** > **Knowledge** > **Parquet Schemas**.
2. Add or modify the schema, as described above.

> To modify an existing schema, Cribl strongly recommends that you first clone the schema, and give the clone its own distinct name. See Cloning Is Safer just below.

3. Return to the Destination, and select the new or modified schema from the **Parquet schema** drop-down.

Cloning Is Safer than Modifying

Modifying an existing schema in the Schema Library does **not** propagate your modifications to the Destination's copy of the schema.

- Cloning and renaming schemas is the safest approach, because in Step 3 above, this ensures that your Destination will now use the newly modified version of the schema.

- If you do **not** clone and rename the schema (i.e., you leave the schema name unchanged), you still must **re-select** the schema in the Destination's **Parquet schema** drop-down to bring the modified version into the Destination.

Working with Parquet in Cribl Stream

Different Parquet readers and writers behave differently. Keep the following guidelines in mind when working with Parquet in Cribl Stream.

The Parquet Schema Editor

In the Parquet Schema editor, you express your Parquet schema in JSON. This does not look like the examples in the Parquet spec, which have their own syntax (like the repetition/name/type triple), but they are functionally equivalent. See the examples below.

The editor provides autocompletion and validation to guide you. (However, Cribl Stream currently does not fully support autocompletion on deeply nested schemas.)

File Extensions

For now, Cribl Stream can read Parquet files only if they have the extension `.parquet`, `.parq`, or `.pqt`.

Field Content

When Cribl Stream writes to a Parquet file:

- If the data contains a field that **is not** present in the schema – i.e, an extra field – Cribl Stream writes out the parent rows, but omits the extra field.

- If the data contains a field that **is** present in the Parquet schema, but whose properties violate the schema, Cribl Stream treats this as a data mismatch. Cribl Stream drops the rows containing that field – it does not write those rows to the output Parquet file at all.

- If the data contains JSON, the JSON must be stringified. Otherwise, Cribl Stream treats this as a data mismatch, and does not write out the row. For example, this valid (but not stringified) JSON will trigger a data mismatch:
  `{ "name": "test"}`.

  The same JSON in stringified form will work fine:
  `"{\"name\": \"test\"}"`.

Data Types

Cribl Stream supports:

- All primitive types.
- All logical types.
- All converted types.

Converted types have been superseded by logical types, as described in the Apache Parquet docs. Cribl Stream can read Parquet files that use converted types, but will write out the same data using corresponding logical types.

Repetition Type

You have three alternatives when defining a field's Repetition type:

- Set `optional` to `true`.
- Set `repeated` to `true`.
- Set neither `optional` nor `repeated`. This **implicitly** sets the Repetition type to `required`, and it is the default.

Usage guidelines:

- Do not set both `optional` **and** `repeated` to `true`.
- Do not use the `required` key at all.
- Instead of omitting `optional`, you have the option to include it, but set it to `false`.
- Instead of omitting `repeated`, you have the option to include it, but set it to `false`.
- If any field's Repetition type is `repeated`, Cribl Stream represents this field as a single key whose value is an array – not as separate key-value pairs with identical keys.

Encodings

- Among the `*DICTIONARY` encodings, Cribl Stream supports only `DICTIONARY`. Trying to assign the unsupported encodings `PLAIN_DICTIONARY` or `RLE_DICTIONARY` will produce an error.

- `BYTE_STREAM_SPLIT` encoding can be used only with `DOUBLE` or `FLOAT` types, and otherwise produces errors.

- The `RLE` and all `DELTA*` encodings also produce errors.

Parquet Schema Expressed as JSON

These examples should give you a hint of how to express Parquet schema in JSON. For a full explanation of the Parquet syntax, see the Parquet spec.

List Example

In this example, the whole schema is named `the_list`, and its structure consists of a container named `list` whose zero or more elements are each named `element`. Note that in Parquet schema, to specify that a field is nested (i.e., contains other fields), you just give it the type `group`.

Parquet Schema Example 1

```
message schema {
  REQUIRED group the_list (LIST) {
    REPEATED group list {
      REQUIRED BYTE_ARRAY element (STRING);
    }
  }
}
```

Expressed as JSON, the same schema is more spread-out, because to specify that a field is nested, you give it a sub-field named `fields`. (This is equivalent to declaring the nested field's type as `group`.)

Parquet Schema Example 1 Expressed as JSON

```
{
  "the_list": {
    "type": "LIST",
    "fields": {
      "list": {
        "repeated": true,
        "fields": {
          "element": {
            "type": "STRING"
          }
        }
      }
    }
  }
}
```

Map Example

In this example, the whole schema is named `the_map`, and its structure consists of a container named `key_value` whose zero or more pairs of elements each contain a `key` and a `value` element. Both the `key` and the `value` are strings in this case, but they could be other data types.

Parquet Schema Example 2

```
message schema {
  REQUIRED group the_map (MAP) {
    REPEATED group key_value {
      REQUIRED BYTE_ARRAY key (STRING);
      REQUIRED BYTE_ARRAY value (STRING);
    }
  }
}
```

Parquet Schema Example 2 Expressed as JSON

```
{
  "the_map": {
    "type": "MAP",
    "fields": {
      "key_value": {
        "repeated": true,
        "fields": {
          "key": {
            "type": "STRING"
          },
          "value": {
            "type": "STRING"
          }
        }
      }
    }
  }
}
```

Array of Arrays Example

In this example, the whole schema is named `array_of_arrays`, and its structure consists of a container named `list` whose zero or more elements – which are themselves lists – are each named `element`. Within each of those `element` lists are one or more additional `list`/`element` structures.

Parquet Schema Example 3

```
message schema {
  REQUIRED group array_of_arrays (LIST) {
    REPEATED group list {
      REQUIRED group element (LIST) {
        REPEATED group list {
          REQUIRED INT64 element;
        }
      }
    }
  }
}
```

Expressed as JSON, the same schema is cumbersome to read compared to Parquet, which was designed to express nested structures concisely.

Parquet Schema Example 3 Expressed as JSON

```
{
  "array_of_arrays": {
    "type": "LIST",
    "fields": {
      "list": {
        "repeated": true,
        "fields": {
          "element": {
            "type": "LIST",
            "fields": {
              "list": {
                "repeated": true,
                "fields": {
                  "element": {
                    "type": "INT64"
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}
```

Limitations

Cribl Stream does not support writing Parquet files which employ any of the following:

- Parquet Modular Encryption.

- The Parquet Bloom Filter.
- Separation of metadata and/or column data into multiple files.

Cribl Stream does not support reading or writing Parquet files which employ the deprecated `INT96` data type.

12.9. Database Connections

You configure Database Connections to define DBMS resources from which the Database Collector can retrieve events.

Accessing Database Connections

You access Database Connections from Cribl Stream's top nav under **Processing** > **Knowledge** > **Database Connections**. Select **New Database Connection** to open a modal that provides the following controls.

Initial Settings

ID: Enter a unique ID for this connection. (A descriptive ID will help all users recognize the connection by purpose.)

Database type: Select from the drop-down options. The currently supported options are `MySQL`, `SQL Server`, and `Postgres`.

> The **Database type** that you select exposes slightly different configuration fields and compatible values, listed below.

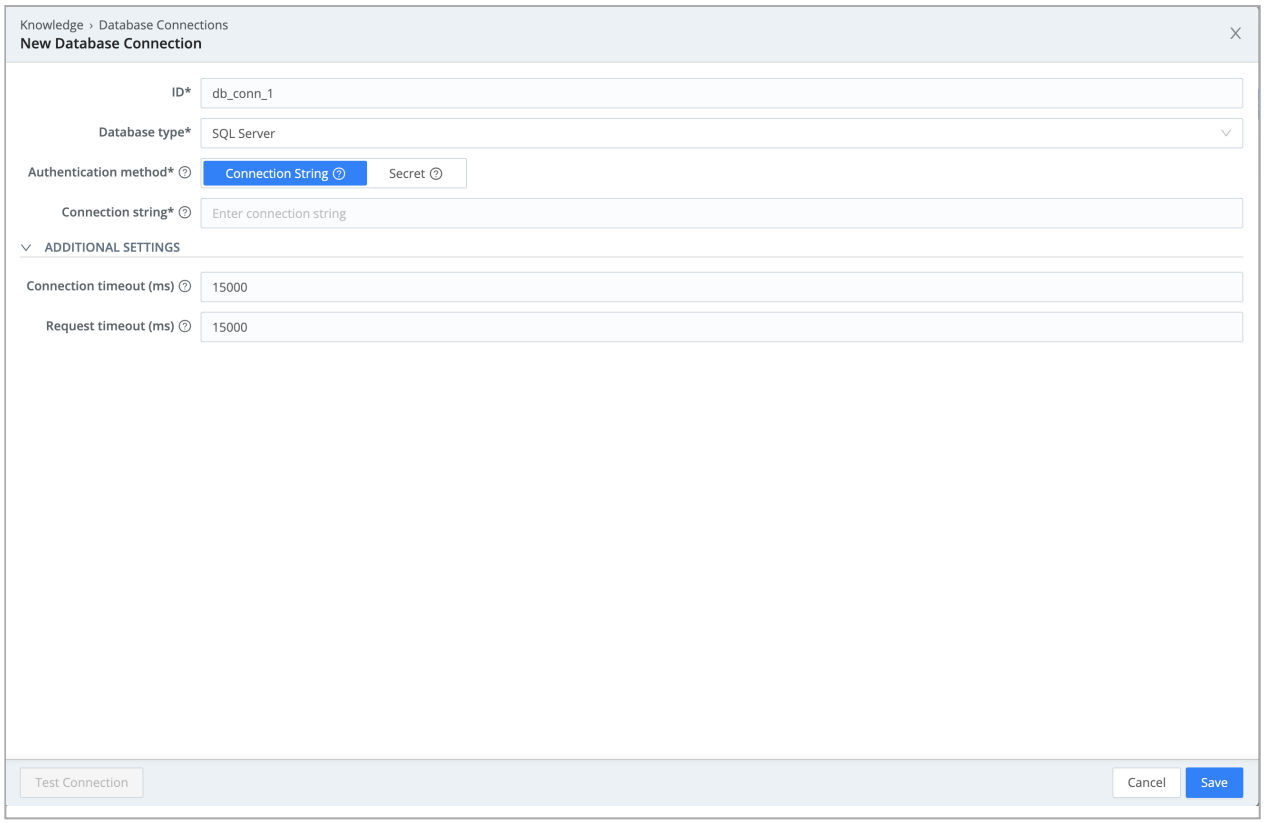

New Database Connection modal

Authentication Settings

Set the **Authentication method** to one of the following buttons.

Connection string: Exposes a field where you directly enter your database connection string. The string's format varies according to your selected **Database type**.

- MySQL format: `mysql[s]://[[user][:password@]][host][:port][/db][?option=value]`
- SQL Server format: `Server=localhost; Database=test;User Id=SA; Password=Testing123![; Option=Value]`
- Postgres format: `postgres[ql]://[userspec@][hostspec][/dbname][?paramspec]`

Secret: Exposes a **Connection-string secret** drop-down, where you select an existing stored text secret that provides your connection string in the appropriate format listed above. A **Create** button is available to define a new secret.

Configuration Object: When **Database type** is set to `SQL Server`, exposes a pane where you can enter a JSON connection configuration object. The object uses the Tedious driver and the node-mssql client.

Additional Settings

Connection timeout (ms): How long, in milliseconds, Cribl Stream should wait before assuming that a connection has failed. This defaults to `10000` (10 sec.) for MySQL databases, and to `15000` (15 sec.) for SQL Server databases. For both, the minimum allowed value is `1000` (1 sec.), and the maximum is `60000` (1 minute).

Request timeout (ms): This setting appears only where **Database type** is set to `SQL Server`. Defines how long, in milliseconds, Cribl Stream should wait before assuming a request has failed. Minimum `1000` (1 sec.); default `15000` (15 sec.); maximum `60000` (1 minute).

Testing/Saving the Connection

Optionally, click **Test Connection** at the modal's lower left, before you **Save** your new configuration.

Examples

To adapt the following examples to your deployment, substitute your own credentials, domain names, etc, for those in the examples.

Connecting to a MySQL Database

- Database type: `MySQL`
- Connection String: `mysqls://userName:pa$$w0rd@server:3306/dbName`

Using Active Directory to Connect to SQL Server on Azure

- Database type: `SQL Server`
- Connection String: `Server=tcp:server.database.windows.net,1433;User ID=userName@domain.onmicrosoft.com;Password=pa$$w0rd;Encrypt=True;TrustServerCertificate=False;Authentication="Active Directory Password";Database="dbName"`

Using NTLM to Connect to SQL Server

Windows Challenge/Response, also known as Microsoft New Technology LAN Manager (NTLM), is an authentication protocol for systems running the Windows operating system.

- Database type: `SQL Server`

- Configuration Object:

```
{
  "authentication": {
    "type": "ntlm",
    "options": {
      "userName": "userName",
      "password": "pa$$w0rd",
      "domain": "domain"
    }
  },
  "options": {
    "connectTimeout": 15000,
    "trustServerCertificate": true
  },
  "connectionTimeout": 15000,
  "port": 1433,
  "server": "server",
  "database": "database"
}
```

12.10. AppScope Configs

You can obtain high-fidelity application data from any Linux command or application using AppScope, an open-source tool from Cribl. This includes data that's difficult or impossible to obtain any other way.

AppScope is included in your Cribl Stream installation. The `in_appscope` AppScope Source is enabled right out-of-the-box; it is configured to send data to Cribl Edge or Cribl Stream on the same host.

If you need one or more reusable AppScope configurations, create and save them in the AppScope Configs UI described below. They will then be available in the AppScope Config Library.

AppScope Configs ship with a `sample_config` file that contains default settings. You can customize this `sample_config`. Once it's customized, a **Restore Default** button appears at the config modal's lower left; click this if you need to restore the sample file's default settings.

> **Rolling Back a `sample_config` Filter**
>
> When the `sample_config` file has been assigned to an AppScope Source's Rules, you can't restore its default settings. (An error message will state that the AppScope Config file is currently in use.) To resolve this:
>
> On the AppScope Source's **AppScope Filter Settings** tab, delete the `sample_config` from the **Allowlist**. Then, use the AppScope Configs UI to restore the `sample_config`'s default settings. You can now add the refreshed `sample_config` back to the AppScope Source's Allowlist.

Creating AppScope Configs

You access the **AppScope Configs** UI from Cribl Stream's top nav:

- In Cribl Stream, select **Processing** > **Knowledge** > **AppScope Configs**.
- In Cribl Edge, select **More** > **Knowledge** > **AppScope Configs**.

Click **Add AppScope config** to open a modal to begin creating an AppScope config, using the options below.

Once you've created AppScope configs, you can edit, delete, search, and tag them as desired.

General Settings

ID: Enter a unique name to identify this AppScope Config.

Description: Optionally, enter a description that will remind you what the config is for when you see it listed in the library.

Tags: Optionally, enter any desired tags.

Transports

> AppScope offers several options for routing data. See Data Routing in the AppScope docs.

Use AppScope Source's IP/port or UNIX domain socket?: The default `Yes` setting applies the transport options defined in the associated AppScope Source. Toggling this to `No` exposes the following fields in this section.

Cribl authentication token: Optionally, set a value to add to the `config-event` header (as a top-level `authToken` property) when AppScope establishes a connection.

Send metrics and events over the same connection?: Defaults to `Yes`, which locks some settings into preconfigured values. Toggle to `No` if you prefer to route metrics and events independently.

Connection type: From the drop-down, choose one of the connection types described below, then enter values in whatever fields the UI exposes.

- When **Send metrics and events over the same connection?** is toggled to `Yes`, you configure a single connection by choosing `TCP`, `Edge` (the default), or `Unix`.
- When routing metrics and events independently, you configure one connection for metrics and another for events; the drop-down offers two additional connection types: `UDP` and `File`.

Transports and Connection Types

At the heart of any AppScope config are the transports you define. In AppScope, a transport specifies something to send, how to send it, and where to send it. The things to send can be metrics, events, or logs.

Depending on the choices you make in the **Transport** settings, the UI will make some or all of the following types of connections available.

UDP: The destination is the network server whose hostname or IP address you specify in the **Host** field, along with a UDP **Port** to listen on.

TCP: The destination is the network server whose hostname or IP address you specify in the **Host** field, along with a TCP **Port** to listen on. The **Enable TLS** toggle defaults to `No`.

Unix: The destination is a Unix domain server listening on the Unix domain **Socket path** you specify.

File: The destination is the file whose directory location you specify in the **File path** field, along with a **Buffering** method.

Edge: The destination is Cribl Edge, listening on a preconfigured Unix domain socket.

TLS Settings (TCP Only)

When the **Connection type** is `TCP`, the UI exposes the **Enabled** toggle, which defaults to `No`.

If you toggle **Enabled** to `Yes`:

- Set **Validate server certs** to `true` if you want the connection to fail when the TLS server certificate cannot be validated. Defaults to `No`.
- Leave **CA certificate path** blank if you toggled the **Validate server certs** to `true` and are using the local OS-provided trusted CA certificates to validate the server's certificate. Otherwise, specify the server path containing CA certificates, which must be in PEM format.

Logs Settings

Configure where and how AppScope should send its own logs.

Connection type: From the drop-down, choose one of the connection types described above, then enter values in whatever fields the UI exposes.

Log level: Set logging verbosity. When **Send metrics and events over the same connection?** is toggled to `Yes`, **Log level** is locked at `warning`.

File path: Specify a directory in which to store logs. If not specified, defaults to `/tmp/scope.log`.

Buffering: Set this method to `Line` if there's a chance that multiple scoped processes will be writing to the same file. This prevents the log file from getting scrambled, with interleaved lines. However, in single-writer scenarios, selecting `Full` often improves performance.

Metrics Settings

The Schema Reference in the AppScope docs lists and fully describes every metric that AppScope can emit.

> Process (`proc.*`) metrics periodically report information about resource usage at a point in time. All other metrics report on actions taken by a scoped process. For examples, see Metrics and Events in AppScope in the AppScope documentation.

Should AppScope emit metrics?: Defaults to `Yes`, which exposes the following options.

Format: AppScope can emit metrics in either of two formats: `NDJSON` (the default), or `StatsD`. If you choose `StatsD`, the UI exposes the following fields:

- **StatsD prefix**: Optionally, enter a prefix for AppScope to add to metrics.
- **StatsD max length**: Optionally, enter a maximum length, in bytes, for StatsD-formatted metrics. AppScope will truncate any metric which exceeds the maximum length. (Defaults to `512`.)

Verbosity: Set a value between `0` and `9`. (Defaults to `4`.) Verbosity controls both the cardinality of metrics that AppScope emits, and which kinds of metrics AppScope aggregates. For details, see Metrics and Events in AppScope in the AppScope documentation. But the general principle is:

- At low verbosity, metrics summarize multiple actions over a reporting period.
- At higher verbosity, metrics provide details about single actions in real time.

Reporting period: Set the metric summary interval in seconds. Defaults to `10`.

Watch list: Select categories of metrics to emit. Defaults to the following categories: `StatsD`, `File System`, `Network`, `HTTP`, `DNS`, `Process`.

Events Settings

The Schema Reference in the AppScope docs lists and fully describes every event that AppScope can emit.

Should AppsScope emit events?: Defaults to `Yes`, which exposes the following controls in this section.

Event-rate limiter (events per second): AppScope discards events generated in excess of the limiter setting, which defaults to `10000`. To disable the limiter, set it to `0`.

Enhance filesystem event data: When toggled to `Yes` (the default), AppScope enhances `fs.open` events by adding the `uid`, `gid`, and `mode` fields.

Watch list: Specify categories of events to emit, and configure their content and structure. Defaults to the following categories: `Console`, `File`, `Filesystem`, `Network`, `DNS`, and `HTTP`. For details, see Categories.

Events Categories

The **Watch list** is a table providing a row for each enabled category of events. The **Type** column contains the category names. The other columns (**Name**, **Field**, and **Value**) contain regular expressions.

At the right edge of the **Name**, **Field**, and **Value** fields is a Copy button, a Flag button to append Regex flags, and an Expand button to open a validation modal.

AppScope emits an event when its values match all the regexes in the corresponding category's row.
For **HTTP**, request and response events must also match the headers listed in the **Header** column.

Allow binary is a toggle, available only for **Console** events. When toggled to `Yes` (the default), **Console** events will include binary data along with text data. If you prefer to redact binary data, toggle to `No`.

The **Type** column enumerates any or all of the following event category names. Toggle **Enabled** to `Yes` to include a category.

- **Console**: Includes writes to standard out and error. Use this to monitor console output, especially in containerized environments where logging to files isn't commonly done.
- **File**: Includes writes to files. Use this to monitor log files and/or any other files of interest.
- **Filesystem**: Includes filesystem operations like `open`, `close`, and `delete`.
- **Network**: Includes `open` and `close` events on network connections.
- **DNS**: Includes DNS request and response events.
- **HTTP**: Includes HTTP request and response events.
- **Granular**: Seldom used, and not emitted by default. Can be useful when tracking down a problem. When this type is enabled, AppScope sends more events than it otherwise would, giving you a more granular view of the activity of the scoped process.

Some usage examples:

- For `fs.*` events, AppScope normally emits `fs.open` and `fs.close` events. With **Granular** enabled, every time a read or write occurs, AppScope emits `fs.read` or `fs.write`, respectively.
- For `net.*` events, AppScope normally emits `net.open`, `net.close`, and `net.app`.With **Granular** enabled, every time a read or write is done on the socket, AppScope emits `net.rx` or `net.tx`, respectively.

Payloads

> AppScope never sends encrypted payloads to disk, to Cribl Stream, or to Cribl Edge.

Capture all payloads: Enable capturing all payloads. Defaults to `No`. Enable this setting with caution: when scoping I/O-intensive programs, it can produce large amounts of data.

Protocol detection: Click **Add Protocol** to specify a protocol (e.g., StatsD, HTTP, Redis) for AppScope to detect in network payloads, as well as what AppScope should do upon detecting that protocol. AppScope checks the first packet on a channel against the regular expression for each protocol until it finds a match. Then AppScope treats the matching protocol as the detected protocol for its channel, and ignores any others listed. See Sample Protocols for regexes that detect common protocols.

Name: Enter a short, descriptive name to define the protocol-detect event. AppScope inserts this value into the header for payloads sent to Cribl. Since AppScope sends this as JSON, you cannot include double quotes or backslashes.

Regex: Enter a regular expression to detect the desired protocol.

Generate protocol-detect-events: Toggle to `Yes` to generate protocol-detect events. Defaults to `No`.

Capture payload: Toggle to `Yes` to send payloads from matching streams to the configured destinations. Defaults to `No`.

Convert to hex: When toggled to `Yes` (the default), AppScope converts part of the payload to a hex-string before applying the regex. Otherwise, AppScope applies the regex to the binary payload.

Bytes to convert: The number of bytes to convert to hex before applying the regex. Defaults to `256`.

Payload directory: Specify the directory where AppScope should store payload files. Consider using a performant filesystem to reduce I/O performance impacts. Defaults to `tmp`. When **General Settings** > **Send metrics and events over the same connection?** is toggled to `Yes`, AppScope ignores this field and sends payloads to the default destination.

Advanced Settings

Send process-start message?: When toggled to `Yes` (the default), enables the process-start message. This message is the first one AppScope sends upon establishing a connection. It describes AppScope's configuration for that session, as well as the application being scoped.

Command directory: If you want to dynamically change AppScope configuration while scoping a running process, save a `scope.<pid>` file to a **command directory** of your choice, where `<pid>` is the PID of the scoped process, and the file contains lines of the form `<ENV_VAR>=<value>`. Once per reporting period, AppScope looks for a `scope.<pid>` file in the **command directory**, which defaults to `/tmp`. You can configure reporting period in the **Metrics** tab.

Metadata: If you want to add a field to events and metrics that AppScope emits, click **Add Metadata** and define it as a key-value pair. Key/value definitions cannot include environment variables.

Per-process configs: Optionally, define a config that, given a process that fits a particular pattern, will partly or completely override the config you have defined already.

Click **Add config** and configure the **Filters** relevant to the process(es) you want to match:

- **Process name**: Enter a string to match the basename of the scoped process.
- **Process argument**: Enter an expression to match the scoped process's full command line including options and arguments.
- **Hostname**: Enter a string to match the hostname of the machine where the scoped process is running.
- **Username**: Enter a string to match the username for the scoped process's UID.
- **Environment**: To match when an environment variable is set, enter its name alone (i.e., `FOO`). To match when the variable is set with a particular value, enter both (i.e., `FOO=bar`).
- **Ancestor**: Enter a string to match the basename of the scoped process's parent, parent's parent, etc.

Then, in the **Config** column, click the **Edit** button. This takes you through the settings, beginning with **General Settings**, but this time you'll be specifying what in the previously-defined settings to override when a process matches your **Filters**.

Protocol Detection Examples for Payloads

Here are some example definitions for detecting protocols in payloads.

Redis

This regex detects the plain-text Redis serialization protocol (RESP).

Name: `Redis`

Regex: `"^[*]\\d+|^[+]\\w+|^[$]\\d+"`

Mongo

This regex detects the MongoDB wire protocol. Since it's binary, we convert to hex.

Name: `Mongo`

Regex: `^2401000000000000000000000d407`

Convert to hex: `Yes`

Convert length: `14`

HTTP

By default, AppScope uses an internally-defined protocol detector for HTTP similar to this example.

Name: `HTTP`

Regex: `"HTTP\\/1\\.[0-2]|PRI \\* HTTP\\/2\\.0\r\n\r\nSM\r\n\r\n"`

StatsD

By default, AppScope uses an internally-defined protocol detector for StatsD similar to this example.

Name: `STATSD`

Regex: `"^([^:]+):([\\d.]+)\\|(c|g|ms|s|h)"`

TLS

By default, AppScope uses an internally-defined protocol detector for TLS/SSL similar to this example.

Name: `TLS`

Regex: `"^(?:(?:16030[0-3].{4})|(?:8[0-9a-fA-F]{3}01))"`

Convert to hex: `Yes`

Convert length: `5`

13. Reference

13.1. API Docs

To complement our API Reference, below are some examples of using the Cribl Stream API to address common scenarios. If you want to automate an action in Cribl Stream for which you can't find documentation, ask us in Cribl Community's `#docs` channel.

> **Breaking Change – v.4.0+**
>
> In Cribl Stream 4.0 and later, `PATCH` requests to all APIs – except for `samples` and `system` endpoints – require the resource to already exist. (In previous versions, a `PATCH` request would create a resource that didn't exist.) To accommodate this change, make a `POST` request to create an item before any `PATCH` request to update it.

Using the Correct API URL

Every Cribl API URL includes a server URL and an endpoint path, which vary depending on the type of deployment.

The server URL follows these patterns:

- Cribl.Cloud deployment:
  `https://logstream.<organizationID>.cribl.cloud/<endpoint_path>`
- On-prem deployment:
  `https://<cribl-stream-leader>:9000/<endpoint_path>`

The endpoint path always begins with `/api/v1/`, but the remainder varies. For example, the `/system/outputs` endpoint follows these patterns:

- Single-instance deployment: `/api/v1/system/outputs/{id}`
- Distributed deployment: `/api/v1/m/{workerGroup}/system/outputs/{id}`
- For licenses limited to a single Worker Group, the `{workerGroup}` value will always be `default`

When composing requests to the Cribl API, use the pattern that matches your deployment type. Adapt examples from this page in the same way.

> In Cribl.Cloud and other distributed deployments, you must **Commit** and **Deploy** your changes after following the steps in the examples. With the API, you can automate commit/deploy commands, too.

Obtaining API Bearer Tokens

Other than calls to `/auth/login` and `/health`, all API requests require a Bearer or access token. You obtain the token in different ways, depending on where your Cribl Stream instance is deployed, as outlined in this section. You can make the listed requests at the command line, programmatically, or using the UI.

On-Prem

To obtain a Bearer token, send a local authentication request and payload to the API as shown below. Adapt the example to include your Leader hostname (or IP address), username, and password.

> If you're using SSO/OpenID Connect Authentication, you must toggle **Allow local auth** on, because you'll need to be a Local user when you authenticate via the API.

Request:

```
POST https://<cribl-stream-leader>:9000/api/v1/auth/login
```

Payload:

```
{
    "username": "<username>",
    "password": "<password>"
}
```

Example request using `curl`:

```
curl -X POST https://<cribl-stream-leader>:9000/api/v1/auth/login -d '{"username":"
<username","password":"<password>"}'
```

You'll get a JSON object as the response, e.g.:

```
{
    "token": "<JWT_Token>",
    "forcePasswordChange": false
}
```

Use this Bearer token in all subsequent requests. Include it in the Authorization header, like this:

```
Bearer <JWT_token>
```

Cribl.Cloud

As of Cribl Stream 4.1 (March 2023), Owners and Admins can generate API access tokens directly in their Cribl.Cloud Organization's portal. This is a two-tier process:

- Generate a Credential to expose a Client ID/Client Secret pair.
- Use the Credential's Client ID and Client Secret to obtain an access token, valid for 24 hours, that can be used to run API calls against Cribl APIs.

Creating an API Credential

Owners and Admins can create Credentials. From your Organization's **Options** (•••) menu, first select **Account** > **Organization**. Then:

1. Select the **API Management** tab.
2. Click **Add Credential**.
3. Specify a **Name**, an optional **Description** of the Credential's purpose, and the **Role** whose permissions the Credential's tokens will grant.

   The **Role** selector is available with an Enterprise plan. Admins can assign Roles up to the Admin level; Owners can assign Roles up to the Owner level. (See Cribl.Cloud Roles.) Without an Enterprise plan, all tokens will be granted the Admin Role.
4. Click **Create** to save the Credential.

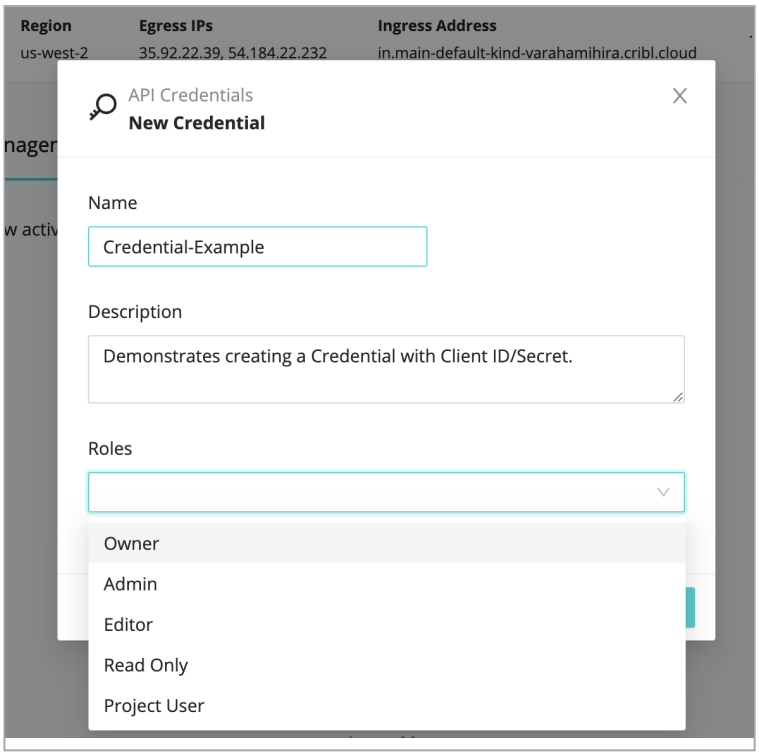

Creating a Cribl.Cloud API Credential

Using an API Credential

The new API Credential will appear on the **API Management** page within a few seconds. Each Credential exposes a **Client ID** and **Client Secret**, with Copy buttons. After Credentials are created, Owners and Admins can use them to generate tokens, and then pass these tokens to Cribl APIs.

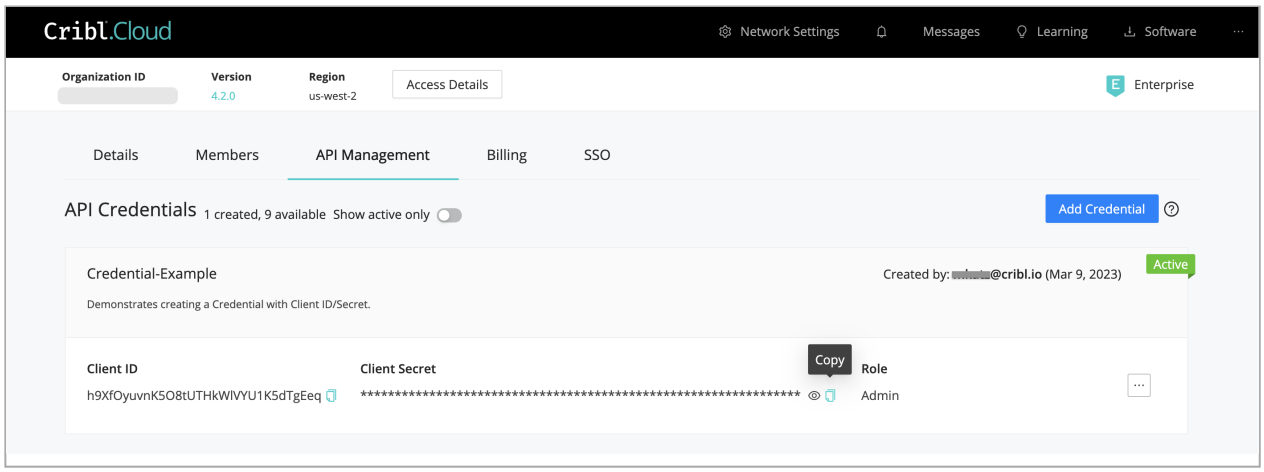

Getting an API Credential's Client ID and Secret

Obtaining Tokens

Obtain a 24-hour access token using a displayed Credential's Client ID and Client Secret. Example curl request, with placeholders:

```
curl --request POST \
--url "https://login.cribl.cloud/oauth/token" \
--header "content-type: application/json" \
--data '{"grant_type":"client_credentials", "client_id": "<client_id>",
"client_secret":"<client_secret>", "audience":"https://api.cribl.cloud"}'
```

Making API Calls

Using the token returned by the preceding example, you can make requests to Cribl APIs. Example curl request, with placeholder token value:

```
curl --location 'https://main-
<organizationID>.cribl.cloud/api/v1/m/default/collectors' \
--header 'Authorization: Bearer <token-generated-above>'
```

Refreshing Tokens

Admins are responsible for ensuring that their applications obtain a new token within each token's 24-hour expiration window. This can be done at any time before expiration.

Managing API Credentials

A Cribl.Cloud Organization's Owners and Admins can view, edit, and disable existing Credentials. Only Owners can delete Credentials.

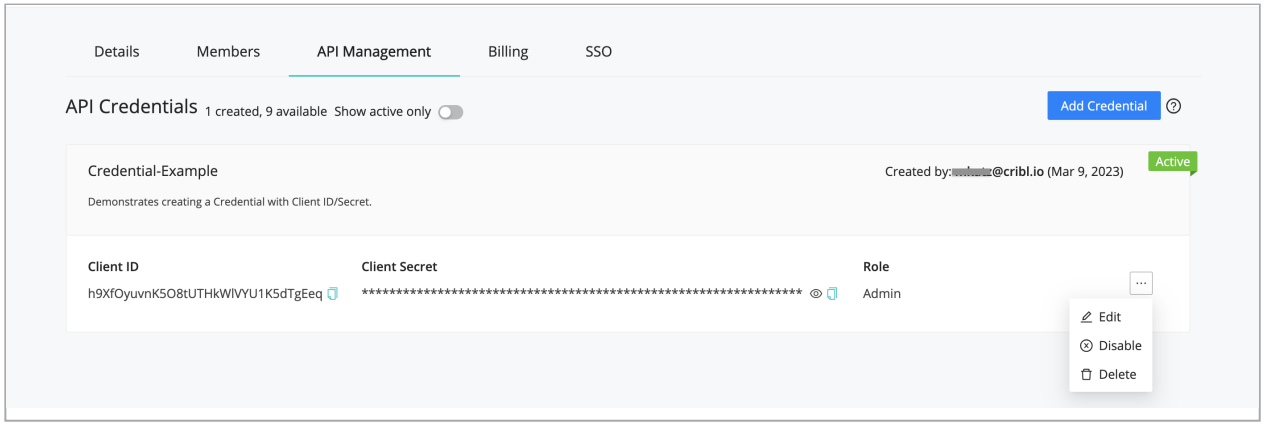

Managing Cribl.Cloud access tokens

Update Basic Configurations

You can use the API to programmatically update the configuration of any object type that the API supports (e.g., Sources and Destinations).

Example: Periodically rotate S3 keys on a preconfigured S3/MinIO destination.

1. Send a `GET` request to the `/outputs` endpoint to retrieve the definition for a Destination (in this case, `MinIO`). The response provides the definition in its payload, as a JSON object.

   Example request:

   ```
   curl -X GET "<url>/api/v1/system/inputs/<output id>" -H "accept:
   application/json" -H "Authorization: Bearer <token>"
   ```

   Example response:

   ```
   {
     "systemFields": [
       "cribl_pipe"
     ],
     "signatureVersion": "v4",
     "objectACL": "private",
     "partitionExpr": "`${host}/${sourcetype}`",
     "format": "json",
     "baseFileName": "CriblOut",
     "compress": "none",
     "maxFileSizeMB": 32,
     "maxFileOpenTimeSec": 300,
     "maxFileIdleTimeSec": 30,
     "maxOpenFiles": 100,
     "onBackpressure": "block",
     "id": "minio",
     "type": "minio",
     "endpoint": "http://minio:9090",
     "bucket": "test",
     "destPath": "keyprefix",
     "stagePath": "tmp",
     "awsApiKey": "minioadmin",
     "awsSecretKey": "minioadmin"
   }
   ```

2. Edit the definition so that when you send it back in a `PATCH` request, it updates the desired Destination's S3 keys.

   - Edit the value of the `id` field to be the ID of the specific Destination whose keys you want to rotate, e.g., `minio_042`.

- Edit the values of the S3 key fields, e.g., `"awsApiKey": "minioadmin_new_api_key"` and `"awsSecretKey": "minioadmin_new_secret_key"`.

3. Send the edited definition as the payload of a `PATCH` request to the `/outputs/{id}` endpoint. This patches (i.e., updates) the specified MinIO Destination's configuration.

Upload a Lookup File

This section demonstrates how to upload a Lookup file via the API. The following examples assume that we're uploading the file to a Worker Group named `default`.

1. Send a `PUT` request to the `/system/lookups` endpoint to upload the file. Example:

```
curl -X PUT "<url>/api/v1/m/default/system/lookups?filename=example.csv" \
-H "Authorization: Bearer <token>" -H 'Content-Type: text/csv' \
--data-binary '@/path/to/your/example.csv'
```

   You will receive a JSON object response similar to the following example:

```
{"filename":"example.csv.random.tmp","rows":100,"size":200}
```

2. Send a `POST` request referencing the Lookup file to the `/system/lookups` endpoint. Replace the filename with the response from the previous `PUT` request. This both creates the Lookup and moves the Lookup file to its final destination. Example:

```
curl -X POST "<url>/api/v1/m/default/system/lookups" \
-H "accept: application/json" -H "Authorization: Bearer <token>" \
-H "Content-Type: application/json" \
-d '{"id":"example.csv","fileInfo":{"filename":"example.csv.random.tmp"}}'
```

   Example response:

```
{
  "items": [
    {
      "id": "example.csv",
      "size": 200
    }
  ],
  "count": 1
}
```

3. If replacing an existing lookup, send a `PATCH` request referencing the existing filename in the URL and the body. Example:

```
curl -X PATCH "<url>/api/v1/m/default/system/lookups/example.csv" \
-H "accept: application/json" -H "Authorization: Bearer <token>" \
-H "Content-Type: application/json" \
-d '{"id":"example.csv","fileInfo":{"filename":"example.csv.random.tmp"}}'
```

Example response:

```
{
  "items": [
    {
      "id": "example.csv",
      "size": 200
    }
  ],
  "count": 1
}
```

Distributed Upload

In a distributed environment, for lookup files of manageable size: Cribl recommends uploading the Lookup file only to the Leader Node, and then making a selective commit and deploy with only those Lookup file changes. The Leader then notifies Worker Nodes that a new configuration is available, and Worker Nodes will pull the new configuration from the Leader Node.

Creating HEC Tokens with Python

Cribl SE Jon Rust has written a Python script which demonstrates how to authenticate to the Cribl API, make a simple POST request, and add a new HEC token.

To use the script, you'll need:

- Python 3.
- The Python 3 Requests module (use brew or pip3 to install).
- A working, distributed Cribl Stream installation, with a configured Splunk HEC Source.
- An admin username and password.

The script and instructions for usage can be found in Jon Rust's GitHub repo.

Managing Packs via APIs

You can perform Pack operations by running Cribl API calls on the command line. This is required if you plan to automate Pack operations – e.g., in a CI/CD pipeline. For more details, see Managing Packs via API .

13.2. Cribl Expression Syntax

As data travels through a Cribl Stream Pipeline, it is operated on by a series of Functions. Functions are fundamentally JavaScript code.

Functions that ship with Cribl Stream are configurable via a set of inputs. Some of these configuration options are literals, such as field names, and others can be JavaScript expressions.

Expressions are **valid units** of code that resolve to a value. Every syntactically valid expression resolves to some value, but conceptually, there are two types of expressions: those that **assign** value to a variable (a.k.a., with side effects), and those that **evaluate** to a value.

ASSIGNING A VALUE	EVALUATING TO A VALUE

`x = 42`
`newFoo = foo.slice(30)`
	`(Math.random() * 42)`
	`3 + 4`
	`'foobar'`
	`'42'`

Filters and Value Expressions

Let's consider evaluation expressions before assignment expressions.

Filters

Filters are used in Routes to select a stream of the data flow, and in Functions to scope or narrow down the applicability of a Function. Filters are expressions that **must** evaluate to either `true` (or truthy) or `false` (or falsy). Keep this in mind when creating Routes or Functions. For example:

- `sourcetype=='access_combined' && host.startsWith('web')`
- `source.endsWith('.log') || sourcetype=='aws:cloudwatchlogs:vpcflow'`

This table shows examples of truthy and falsy values.

TRUTHY	FALSY

`true`
`42`
`-42`
	`false`
	`null`
	`undefined`

TRUTHY	FALSY
`3.14`	`0`
`"foo"`	`NaN`
`Infinity`	`''`
`-Infinity`	`""`

Value Expressions

Value expressions are typically used in Functions to assign a value – for example, to a new field. For example:

- `Math.floor(_time/3600)`
- `source.replace(/.{3}/, 'XXX')`

Best Practices for Creating Predictable Expressions

- In a value expression, ensure that the source variable is not `null`, `undefined`, or `empty`. For example, assume you want to have a field called `len`, to be assigned the length of a second field called `employeeID`. But you're not sure if `employeeID` exists. Instead of `employeeID.length`, you can use a safer shorthand, such as: `(employeeID || '').length`.

- If a field does not exist (undefined), and you're doing a comparison with its properties, then the boolean expression will **always** evaluate to false. For example, if `employeeID` is undefined, then both of these expressions will evaluate to false: `employeeID.length > 10` , and `employeeID.length < 10` .

- `==` means "equal to," while `===` means "equal value **and** equal type." For example, `5 == 5` and `5 == "5"` each evaluate to **true**, while `5 === "5"` evaluates to **false**.

- A ternary operator is a very powerful way to create conditional values. For example, if you wanted to assign either `minor` or `adult` to a field `groupAge`, based on the value of `age`, you could do: `(age >= 18) ? 'adult' : 'minor'`.

Fields with Non-Alphanumeric Characters

If there are fields whose names include non-alphanumeric characters – e.g., `@timestamp` or `user-agent` or `kubernetes.namespace_name` – you can access them using `__e['<field-name-here>']`. (Note the single quotes.) More details here.

In any other place where the field is referenced – e.g., in the Eval function's field names – you should use a single-quoted literal, of the form: `'<field-name-here>'`.

Wildcard Lists

Wildcard Lists are used throughout the product, especially in various Functions, such as Eval, Mask, Publish Metrics, Parser, etc.

Wildcard Lists, as their name implies, accept strings with asterisks (`*`) to represent one or more terms. They also accept strings that start with an exclamation mark (`!`) to **negate** one or more terms. This allows for implementing any combination of allowlists and blocklists.

Wildcard Lists are order-sensitive, evaluated from left to right. This is especially relevant when you use negated terms. For negations to take precedence over wildcards when evaluated, you must list negations before wildcards.

Some examples:

WILDCARD LIST	VALUE	MEANING
List 1	`!foobar, foo*`	All terms that start with **foo**, except **foobar**.
List 2	`!foo*, *`	All terms, except for those that start with **foo**.
List 3	`*, !foo`	All terms (wildcard matches first, negation isn't evaluated).

> You cannot use wildcards to target Cribl Stream internal fields that start with `__` (double underscore). You must specify these fields individually. For example, `__foobartab` cannot be removed by specifying `__foo*`.

13.3. Cribl Expressions

Native Cribl Stream function methods can be found under `C.*`, and can be invoked from any Function that allows for expression evaluations. For example, to create a field that is the SHA1 of a another field's value, you can use the Eval Function with this **Evaluate Fields** pair:

NAME	VALUE EXPRESSION
myNewField	`C.Mask.sha1(myOtherField)`

> Where fields' names contain special characters, you can reference them using the `__e['<field-name-here>']` convention. For details, see Fields with Non-Alphanumeric Characters.

C.Crypto – Data Encryption and Decryption Functions

`C.Crypto.decrypt`
(method) `Crypto.decrypt(value: string, escape: boolean, escapeSeq: string): string`
Decrypt all occurrences of ciphers in the given value. Instances that cannot be decrypted (for any reason) are left intact.
@param – `value` – String in which to look for ciphers.
@param – `escape` – Boolean, defaults to `false`. Set to `true` to escape double quotes in output after decryption. (E.g., for data encrypted in Splunk.)
@param – `escapeSeq` – String used to escape double quotes. The default `'"'` escapes CSV output.
@returns – `value` with ciphers decrypted.

`C.Crypto.encrypt`
(method) `Crypto.encrypt(value: any, keyclass: number, keyId?: string, defaultVal?: string): string`
Encrypt the given value with the `keyId`, or with a `keyId` picked up automatically based on `keyclass`.
@param {string | Buffer} `value` – what to encrypt.
@param – `keyclass` – if `keyId` isn't specified, pick one at the given `keyclass`.
@param – `keyId` - encryption keyId, takes precedence over `keyclass`.
@param – `defaultVal` – what to return if encryption fails for any reason; if unspecified, the original value is returned.
@returns – if encryption succeeds, the encrypted value; otherwise, `defaultVal` if specified; otherwise, `value`.

`C.Crypto.createHmac`
(method) `Crypto.createHmac(value: string | Buffer, secret: string, algorithm: string = 'sha256', outputFormat: 'base64' | 'hex' | 'latin1' = 'hex'): string`
Generates an HMAC that can be added to events, or can be used to validate events that contain an HMAC. (Available in Cribl Stream v.3.1.2+.)
@param – `value` – The data to encrypt, as a string. (When the `outputFormat` is invalid or undefined, this parameter is returned as the digest, via a Buffer.)
@param} – `secret` – The secret key used to generate the MAC, as a string.
@param – `algorithm` – The hash algorithm used to generate the MAC, as a string. Defaults to `'sha256'`. Run `openssl list -digest-algorithms` to see the list of available algorithms.
@param – `outputFormat` – One of `'base64'`, `'hex'`, or `'latin1'`. Defaults to `'hex'`.
@returns – The calculated HMAC digest on success; otherwise, `value`.

C.Decode – Data Decoding Functions

`C.Decode.base64`
(method) `Decode.base64(val: string, resultEnc?: string): any`
Performs base64 decoding of the given string. Returns a string or Buffer, depending on the `resultEnc` value, which defaults to `'utf8'`.
@param – `val` – value to base64-decode.
@param – `resultEnc` – encoding to use to convert the binary data to a string. Defaults to `'utf8'`.
Use `'utf8-valid'` to validate that result is valid UTF8; use `'buffer'` if you need the binary data in a Buffer.

`C.Decode.gzip`
(method) `Decode.gzip(value: any, encoding?: string): string`
Gunzip the supplied value.
@param – `value` – the value to gunzip.
@param – `encoding` – encoding of `value`, for example: `'base64'`, `'hex'`, `'utf-8'`, `'binary'`. Default is `'base64'`. If data is received as Buffer (from gzip with encoding: `'none'`), decoding is skipped.

`C.Decode.hex`
(method) `Decode.hex(val: string): number`
Performs hex to number conversion. (Returns `NaN` if value cannot be converted to a number.)
@param – `val` – hex string to parse to a number (e.g., "0xcafe").

`C.Decode.uri`
(method) `Decode.uri(val: string): string`
Performs URI-decoding of the given string.
@param – `val` – value to URI-decode.

C.Encode – Data Encoding Functions

`C.Encode.base64`
(method) `Encode.base64(val: any, trimTrailEq?: boolean): string`
Returns a base64 representation of the given string or Buffer.
@param – `val` – value to base64-encode.
@param – `trimTrailEq` – whether to trim any trailing `=`.

`C.Encode.gzip`
(method) `Encode.gzip(value: string, encoding?: string): any`
Gzip, and optionally base64-encode, the supplied value.
@param – `value` – the value to gzip.
@param – `encoding` – encoding of `value`, for example: `'base64'`, `'hex'`, `'utf-8'`, `'binary'`, `'none'`. Default is `'base64'`. If `'none'` is specified, data will be returned as a Buffer.

`C.Encode.hex`
(method) `Encode.hex(val: string | number): string`
Rounds the number to an integer and returns its hex representation (lowercase). If a string is provided, it will be parsed into a number or `NaN`.
@param – `val` – value to convert to hex.

`C.Encode.uri`
(method) `Encode.uri(val: string): string`
Returns the URI-encoded representation of the given string.
@param – `val` – value to uri encode.

C.env – Environment

`C.env`
(property) `env: {[key: string]: string;}`
Returns an object containing Cribl Stream's environment variables.

C.Lookup – Inline Lookup Functions

`C.Lookup` – Exact Lookup
(property) `Lookup: (file: string, primaryKey?: string, otherFields?: string[], ignoreCase?: boolean) => InlineLookup`
Returns an instance of a lookup to use inline.

Example invocation, where `host` is the name of the primary key field:

```
C.Lookup('lookup_name.csv', 'IP_field_name_in_lookup_file').match(host)
```

Expanded example, where the quoted `'event_field_or_string_to_match'` could be a string to match in the primary key field:

```
C.Lookup('name_of_lookup_file.csv',
'field_in_csv_to_match').match('event_field_or_string_to_match',
'field_in_csv_to_output')
```

Example that returns a boolean – is `someValue` there or not?:

```
C.Lookup('file','primaryKeyCol',additionalCols).match('someValue')
```

Example that returns a string – the `fieldToReturn` column from the matched lookup row:

```
C.Lookup('file','primaryKeyCol',additionalCols).match('someValue','fieldToReturn')
```

Example that returns an array – the specified `fieldToReturn1` and `fieldToReturn2` columns from the matched lookup row:

```
C.Lookup('file','primaryKeyCol').match('someValue',['fieldToReturn1', 'fieldToReturn2'])
```

Example that returns an array – all columns from the matched lookup row:

```
C.Lookup('file','primaryKeyCol').match('someValue',[])
```

> `C.Lookup` can load lookup files of up to 10 MB.
>
> All inputs to Lookup functions' `match()` method must be strings. If your lookup file contains numeric fields, convert them to strings, e.g.: `.match(String(<fieldname>))`.
>
> You can use the optional `otherFields[]` argument, shown in the above `C.Lookup()` signatures and examples, to limit which columns of the lookup table will be available in a subsequent `.match()` call. If omitted, or set to `undefined`, all columns will be available.
>
> Cribl Stream 4.1 and later support returning all columns from a matched row. Use the empty-array convention shown in the above examples: `.match('someValue',[])`

`C.LookupCIDR` – CIDR Lookup

(property) `LookupCIDR: (file: string, primaryKey?: string, otherFields?: string[]) => InlineLookup`

Returns an instance of a CIDR lookup to use inline.

`C.LookupIgnoreCase` – Case-insensitive Lookup

(property) `LookupIgnoreCase: (file: string, primaryKey?: string, otherFields?: string[]) => InlineLookup`

Returns an instance of a lookup (ignoring case) to use inline. Works identically to `C.Lookup`, except ignores the case of lookup values. (Equivalent to calling `C.Lookup` with its fourth `ignoreCase?` parameter set to `true`).

`C.LookupRegex` – Regex Lookup
(property) `LookupRegex: (file: string, primaryKey?: string, otherFields?: string[]) => InlineLookup`
Returns an instance of a Regex lookup to use inline.

(method) `InlineLookup.match(value: string, fieldToReturn?: string): any`
@param – `value` – the value to look up.
@param – `fieldToReturn` – name of the lookup file > field to return.

E.g., `C.Lookup('lookup-exact.csv', 'foo').match('abc', 'bar')`
Return the value of field **bar** in the lookup table if field **foo** matches `abc`.

Example 1: `C.LookupCIDR('lookup-cidr.csv', 'foo').match('192.168.1.1', 'bar')`
Return the value of field **bar** in the lookup table if the CIDR range in **foo** includes `192.168.1.1`.

Example 2: `C.LookupCIDR('lookup-cidr.csv', 'cidr').match(hostIP, 'location')`
Return the value of column **location** in the lookup table if the **location** includes `hostIP`.

Example 3: `C.LookupRegex('lookup-regex.csv', 'foo').match('manchester', 'bar')`
Return the value of field **bar** in the lookup table if the regex in **foo** matches the string `manchester`.

> With `C.LookupRegex`, ensure that your lookup file contains no empty lines – not even at the bottom. Any empty row will cause `C.LookupRegex().match()` to always return `true`.

C.Mask – Data Masking Functions

`C.Mask.CC` (method) `Mask.CC(value: string, unmasked?: number, maskChar?: string): string`
Check whether a value could be a valid credit card number, and mask a subset of the value. By default, all digits except the last 4 will be replaced with `X`.
@param – `value` – a string whose digits should be masked, **if and only if** it could be a valid credit card number.
@param – `unmasked` – number of digits to leave unmasked: positive for left, negative for right, `0` for none.
@param – `maskChar` – a string/char to replace a digit with.

`C.Mask.IMEI` (method) `Mask.IMEI(value: string, unmasked?: number, maskChar?: string): string`

Check whether a value could be a valid IMEI number, and mask a subset of the value. By default, all digits except the last 4 will be replaced with `X`.
@param – `value` – a string whose digits should be masked, **if and only if** it could be a valid IMEI number.
@param – `unmasked` – number of digits to leave unmasked: positive for left, negative for right, `0` for none.
@param – `maskChar` – a string/char to replace a digit with.

`C.Mask.isCC`
(method) `Mask.isCC(value: string): boolean`
Checks whether the given value could be a valid credit card number, by computing the string's Lunh's checksum modulo 10 == `0`.
@param – `value` – a string to check for being a valid credit card number.

`C.Mask.isIMEI`
(method) `Mask.isIMEI(value: string): boolean`
Checks whether the given value could be a valid IMEI number, by computing the string's Lunh's checksum modulo 10 == `0`.
@param – `value` – a string to check for being a valid IMEI number

`C.Mask.luhn`
(method) `Mask.luhn(value: string, unmasked?: number, maskChar?: string): string`
Check that value Lunh's checksum mod 10 is `0`, and mask a subset of the value. By default, all digits except the last 4 will be replaced with `X`. If the value's Lunh's checksum mod 10 is not `0`, then the value is returned unmodified.
@param – `value` – a string whose digits should be masked, **if and only if** the value's Lunh's checksum mod 10 is `0`.
@param – `unmasked` – number of digits to leave unmasked: positive for left, negative for right, `0` for none.
@param – `maskChar` – a string/char to replace a digit with.

`C.Mask.LUHN_SUB` (property) `Mask.LUHN_SUB: any`

`C.Mask.luhnChecksum`
(method) `Mask.luhnChecksum(value: string, mod?: number): number`
Generates the Luhn checksum (used to validate certain credit card numbers, IMEIs, etc.). By default, the mod 10 of the checksum is returned. Pass mod = `0` to get the actual checksum.
@param – `value` – a string whose digits you want to perform the Lunh checksum on.
@param – `mod` – return checksum modulo this number. If `0`, skip modulo. Default is `10`.

`C.Mask.md5`
(method) `Mask.md5(value: string, len?: string | number): string`
Generate MD5 hash of a given value.
@param – `value` – compute the hash of this.

@param – `len` – length of hash to return: 0 for full hash, a +number for left or a -number for right substring. If a string is passed it's length will be used.

`C.Mask.random`
(method) `Mask.random(len?: string | number): string`
Generates a random alphanumeric string.
@param – `len` – a number indicating the length of the result; or, if a string, use its length.

`C.Mask.REDACTED`
(property) `Mask.REDACTED: string`
The literal `'REDACTED'`.

`C.Mask.repeat`
(method) `Mask.repeat(len?: string | number, char?: string): string`
Generates a repeating char/string pattern, e.g., `XXXX`.
@param – `len` – a number indicating the length of the result; or, if a string, use its length.
@param – `char` – pattern to repeat `len` times.

`C.Mask.sha1` (method) `Mask.sha1(value: string, len?: string | number): string` Generate SHA1 hash of given value.
@param – `value` - compute the hash of this.
@param – `len` - length of hash to return: `0` for full hash, a +number for left, or a -number for right. substring. If a string is passed, its length will be used

C.Misc – Miscellaneous Utility Functions

`C.Misc.zip()`
(method) `Misc.zip(keys: string[], values: any[], dest?: any): any`
Set the given keys to the corresponding values on the given `dest` object. If `dest` is not provided, a new object will be constructed.
@param – `keys` – field names corresponding to keys.
@param – `values` – values corresponding to values.
@param – `dest` – object on which to set field values.
@returns – object on which the fields were set.

E.g., `people = C.Misc.zip(titles, names)`
Sample data: `titles=['ceo', 'svp', 'vp']`, `names=['foo', 'bar', 'baz']`
Create an object called `people`, with key names from elements in `titles`, and with corresponding values from elements in `names`.
Result: `"people": {"ceo": "foo", "svp": "bar", "vp": "baz"}`

C.Net – Network Functions

`C.Net.cidrMatch()`
(method) `Net.cidrMatch(cidrIpRange: string, ipAddress: string): boolean`
Determines whether the supplied IPv4 `ipAddress` is inside the range of addresses identified by `cidrIpRange`. For example: `C.Net.cidrMatch ('10.0.0.0/24', '10.0.0.100')` returns `true`.
@param – `cidrIpRange` – IPv4 address range in CIDR format. E.g., `10.0.0.0/24`.
@param – `ipAddress` – The IPv4 IP address to test for inclusion in `cidrIpRange`.

`C.Net.isIpV4()`
(method) `Net.isIpV4(value: string): boolean`
Determine if the value supplied is an IPv4 address. (Available in Cribl Stream v.3.1.2+.)
@param – `value` – the IP address to test.

`C.Net.isIpV6()`
(method) `Net.isIpV6(value: string): boolean`
Determine if the value supplied is an IPv6 address. (Available in Cribl Stream v.3.1.2+.)
@param – `value` – the IP address to test.

`C.Net.isIpV4AllInterfaces()`
(method) `Net.isIpV4AllInterfaces(value: string): boolean`
Determine if the value supplied is the IPv4 all-interfaces address, typically used to bind to all IPv4 interfaces – i.e., '0.0.0.0'. (Available in Cribl Stream v.3.1.2+.) @param – `value` – the IP address to test.

`C.Net.isIpV6AllInterfaces()`
(method) `Net.isIpV6AllInterfaces(value: string): boolean`
Determine if the value supplied is an IPv6 all-interfaces address, typically used to bind to all IPv6 interfaces – one of: '::', '0:0:0:0:0:0:0:0', or '0000:0000:0000:0000:0000:0000:0000:0000'. (Available in Cribl Stream v.3.1.2+.)
@param – `value` – the IP address to test.

`C.Net.ipv6Normalize()`
(method) `Net.ipv6Normalize(address: string): string`
Normalize an IPV6 address based on RFC draft-ietf-6man-text-addr-representation-04.
@param – `address` – the IPV6 address to normalize.

`C.Net.isPrivate()`
(method) `Net.isPrivate(address: string): string`
Determine whether the supplied IPv4 address is in the range of private addresses per RFC1918.
@param – `address` – address to test.

C.os – System Functions

`C.confVersion`
Returns Cribl Stream config version.

`C.os.hostname()`
Returns hostname of the system running this Cribl Stream instance.

C.Schema – Schema Functions

`C.Schema()`
(property) `Schema: (id: string) => SchemaValidator`
(method) `SchemaValidator.validate(data: any): boolean`
Validates the given object against the schema.
@param – `data` – object to be validated.
@returns – `true` when schema is valid; otherwise, `false`.
Example: `C.Schema('schema1').validate(myField)` will validate if `myField` object conforms to `schema1`.

See Schema Library for more details.

C.Secret – Secrets-Management Functions

`C.Secret()`
(method) `Secret: (id: string, type?: string): ISecret`
(method) `Secret(id: string, type: 'keypair') => IPairSecret`
(method) `Secret(id: string, type: 'text') => ITextSecret`
(method) `Secret(id: string, type: 'credentials') => ICredentialsSecret`
Returns a secret matching the specified ID.
@param `id` – ID of the secret.
@param `type` – optional type of the secret.

Examples:

- `C.Secret('victorias', 'text')` will return a text secret with ID `victorias` (or with undefined, if no such secret exists).
- `C.Secret('api_key', 'keypair').secretKey`
- `C.Secret('secret_hash', 'text').value`
- `C.Secret('user_pass', 'credentials').password`

Common returned attributes for `ISecret` objects:

- `secretType` – one of `keypair`, `text`, or `credentials`.
- `description` (optional) – the secret description.
- `tags` (optional) – a comma separated list of tags.

Additional returned attributes for `IPairSecret` objects:

- `apiKey` – the API key value
- `secretKey` – the Secret key value

Additional returned attributes for `ITextSecret` objects:

- `value` – the text value

Additional returned attributes for `ICredentialsSecret` objects:

- `username` – the username value
- `password` – the password value

See Securing Cribl Stream > Secrets for more details.

C.Text – Text Functions

`C.Text.entropy()`
(method) `Text.entropy(bytes: any): number`
Computes the Shannon entropy of the given buffer or string.
@param – `bytes` – value to undergo Shannon entropy computation.
@returns – the entropy value; or `-1` in case of an error.

`C.Text.hashCode()`
(method) `Text.hashCode(val: string | Buffer | number): number`
Computes hashcode (djb2) of the given value.
@param – `val` - value to be hashed.
@returns – hashcode value.

`C.Text.isASCII()`
(method) `Text.isASCII(bytes: any): boolean`
Checks whether all bytes or chars are in the ASCII printable range.
@param – `bytes` – value to check for character range.
@returns – `true` if all chars/bytes are within ASCII printable range; otherwise, `false`.

`C.Text.isUTF8()`
(method) `Text.isUTF8(bytes: any): boolean`
Checks whether the given Buffer contains valid UTF8.
@param – `bytes` – bytes to check.
@returns – `true` if bytes are UTF8; otherwise, `false`.

`C.Text.parseWinEvent`
(method) `C.Text.parseWinEvent(xml: string, nonValues?: string[]): any`
Parses an XML string representing a Windows event into a compact, prettified JSON object. Works like `C.Text.parseXml`, but with Windows events, produces more-compact output. For a usage example, see Reducing Windows XML Events.
@param – `xml` – an XML string; or an event field containing the XML.
@param – `nonValues` – array of string values. Elements whose value equals any of the values in this array will be omitted from the returned object. Defaults to `['-']`, meaning that elements whose value equals `-` will be discarded.
@returns – an object representing the parsed Windows Event; or `undefined` if the input could not be parsed.

`C.Text.parseXml`
(method) `C.Text.parseXml(xml:string, keepAttr?:boolean, keepMetadata?:boolean, nonValues?:string[]): any`
Parses an XML string and returns a JSON object. Can be used with Eval Function to parse XML fields contained in an event, or with ad hoc XML.
@param – `xml` – XML string, or an event field containing the XML.
@param – `keepAttr` – whether or not to include attributes in the returned object. Defaults to `true`.
@param – `keepMetadata` – whether or not to include metadata found in the XML. The `keepAttr` parameter must be set to `true` for this to work. Defaults to `false`. (Eligible metadata includes namespace definitions and prefixes, and XML declaration attributes such as encoding, version, etc.)
@param – `nonValues` – array of string values. Elements whose value equals any of the values in this array will be omitted from the returned object. Defaults to `[]` (empty array), meaning discard no elements.
@returns – an object representing the parsed XML; or `undefined` if the input could not be parsed. An input collection of elements will be parsed into an array of objects.

`C.Text.relativeEntropy()`
(method) `Text.relativeEntropy(bytes: any, modelName?: string): number`
Computes the relative entropy of the given buffer or string.
@param – `bytes` – Value whose relative entropy to compute.
@param – `modelName` – Optionally, override the default `$CRIBL_HOME/data/lookups/model_relative_entropy_top_domains.csv` model used to test the input. Create a custom lookup file with the same column and value structure as the default, and store it in the same path, as `model_relative_entropy_<custom-name>.csv`. To reference it, pass your `<custom-name>`

substring as the `modelName` parameter.
@returns – The relative entropy value, or `-1` in case of an error.

> When using `modelName` in a distributed deployment, the corresponding paths are `$CRIBL_HOME/groups/<worker-group-name>/data/lookups/`. Creating your custom lookup file via Cribl Stream's UI will automatically set the appropriate paths.

C.Time – Time Functions

`C.Time.adjustTZ()`
(method) `Time.adjustTZ(epochTime: number, tzTo: string, tzFrom?: string): number`
Adjust a timestamp from one timezone to another.
@param – `epochTime` – UNIX epoch time.
@param – `tzTo` – timezone to adjust to.
@param – `tzFrom` – optional timezone of the timestamp.
@returns – the adjusted timestamp, in UNIX epoch time (ms).

> Cribl relies on this timezone-support package, and on this list of TZ Database Time Zones.

`C.Time.clamp()`
(method) `Time.clamp(date, earliest, latest, defaultDate?): number`
Constrains an event's parsed timestamp to realistic earliest and latest boundaries.
@param – `date` – Timestamp originally parsed from event, in UNIX epoch time (ms) or JavaScript Date format.
@param – `earliest` – earliest allowable timestamp, in UNIX epoch time (ms) or JS Date format.
@param – `latest` – latest allowable timestamp, in UNIX epoch time (ms) or JS Date format.
@param – `defaultDate` – optional default date, in UNIX epoch time (ms) or JS Date format, to substitute for values outside the `earliest` or `latest` boundaries.

`C.Time.strftime()`
(method) `Time.strftime(date: number | Date, format: string, utc?: boolean): string`
Format a Date object or number as a time string, using strftime specifier.
@param – `date` – Date object or number (seconds since epoch) to format.
@param – `format` – specifier to use to format the date.
@param – `utc` – whether to output the time in UTC, rather than in local timezone.
@returns – representation of the given date.

`C.Time.strptime()`
(method) `Time.strptime(str: string, format: string, utc?: boolean, strict?: boolean): Date`
Extract time from a string using strptime specifier.
@param – `str` – string to parse to a timestamp (see strict flag).
@param - `format` – `strptime` specifier.
@param – `utc` – whether to interpret times as UTC, rather than as local time.
@param – `strict` – whether to return `null` if there are any extra characters after timestamp.
@returns – a parsed Date object, if successful; otherwise, `null` if the specifier did not match.

`C.Time.timestampFinder()`
(method) `Time.timestampFinder(utc?: boolean).find(<source-field>): AutoTimeParser`
Extract time from the specified `<source-field>`, using the same algorithm as the Auto Timestamp Function and the Event Breaker Function.
@param – `utc` – whether to output the time in UTC, rather than in local timezone.
@param – `<source-field>` – the field in which to search for the time.
@returns – representation of the extracted time; truncates timestamps to three-digit (milliseconds) resolution, omitting trailing zeros.

C.vars – Global Variables

See Global Variables Library for more details.

C.version – Cribl Stream Version

(property) `version: string`
Cribl Stream Version.

13.4. CLI Reference

Command line interface basics

In addition to starting and stopping the Cribl Stream server, Cribl Stream's command line interface enables you to initiate many configuration and administrative tasks directly from your terminal.

Command Syntax

To execute CLI commands, the basic syntax is:

```
cd $CRIBL_HOME/bin
./cribl <command> <sub-command> <options> <arguments>
```

Not all commands have sub-commands.

To see help for any command, append the `--help` option, for example:

```
./cribl vars --help

./cribl vars get --help

./cribl vars get -i myArray --help
```

The `scope` command is an exception: it has no `--help` option, but it has its own CLI Reference in the AppScope documentation.

Avoiding Surprises

Immediate Execution

As indicated in the sample output below, some commands take effect immediately.

Commands that require further input will echo the sub-commands, options, and arguments they expect.

Persistent Volumes

If you start Cribl Stream with the `CRIBL_VOLUME_DIR` variable, all subsequent CLI commands should have this variable defined. Otherwise, those commands will apply Cribl Stream's default directories, yielding misleading results.

You can set `CRIBL_VOLUME_DIR` as an environment variable, or you can explicitly include it in each command, as in this example:

```
CRIBL_VOLUME_DIR=<writable-path-name> /opt/cribl/bin/cribl status
```

When set, `$CRIBL_VOLUME_DIR` overrides `$CRIBL_HOME`.

Avoid setting `$CRIBL_VOLUME_DIR` to an existing folder because it creates predefined folders in the specified directory. If that directory already contains folders with those names, they will be overwritten.

Commands Available

To see a list of available commands, enter `./cribl` alone (or the equivalent `./cribl help`). To execute a command, or to see its required parameters, enter `./cribl <command>`.

`help`

Displays a list of commands with a description (help) for each. Defaults to a selection of generally useful commands.

Usage

```
./cribl help [-a]
```

Options

```
-a              - Display the list of all commands, except for `scope`.
```

Sample Response

```
Software version: 3.4.0
Usage: [sub-command] [options] [args]

Commands:
help               - Display help
mode-edge          - Configure instance in Edge mode
mode-managed-edge  - Configure instance in Managed-Edge mode
mode-master        - Configure instance in Leader mode
mode-single        - Configure instance in Single-Instance mode
mode-worker        - Configure instance in Worker mode
reload             - Reload instance
restart            - Restart instance
start              - Start instance
status             - Display status
stop               - Stop instance
version            - Print version

auth               - Authentication
boot-start         - Enable/Disable boot-start
diag               - Manage diagnostics bundles
git                - Manage Worker Groups config
keys               - Manage encryption keys
nc                 - Listen on a port for traffic and output stats and data
node               - Execute a JavaScript file
pack               - Manage Cribl Packs
pipe               - Feed stdin to a pipeline
vars               - Manage global variables
```

> As of version 3.0, Cribl Stream's former "master" application components are renamed "leader." As long as some legacy terminology remains within CLI commands/options, configuration keys/values, and environment variables, this document will reflect that.

`mode-master`

Configures Cribl Stream as a Leader instance.

Usage

```
./cribl mode-master <options> <args>
```

Options

```
[-H <host>]             - Host (defaults to 0.0.0.0).
[-p <port>]             - Port (defaults to 4200).
[-n <certName>]         – Name of saved certificate. Mutually exclusive with -k or -
c.
[-k <privKeyPath>]      – Path on server to the private key to use. PEM format. Can
reference $ENV_VARS. Requires -c, to successfully connect to the Leader. Mutually
exclusive with -n.
[-c <certPath>]         – Path on server to the certificate to use. PEM format. Can
reference $ENV_VARS. Requires -k, to successfully connect to the Leader. Mutually
exclusive with -n.
[-u <authToken>]        - Optional authentication token to include as part of the
connection header.
[-i <ipWhitelistRegex>] – Regex matching IP addresses that are allowed to establish
a connection.
[-r <resiliency>]       – Resiliency mode for the Leader. Accepts agruments: none,
failover.
[-v <failoverVolume>]   – If the -r option is set to failover, this defines the
volume to use as shared storage.
```

Sample Response

```
Settings updated.
You will need to restart Cribl Stream before your changes take full effect.
```

mode-single

Configures Cribl Stream as a single-instance deployment.

Usage

```
./cribl mode-single [--help]
```

Sample Response

```
Settings updated.
You will need to restart Cribl Stream before your changes take full effect.
```

mode-edge

Configures Cribl Edge as a single-instance deployment.

Usage

```
./cribl mode-edge [--help]
```

Sample Response

```
Settings updated.
```

mode-worker

Configures Cribl Stream as a Worker instance.

Usage

```
./cribl mode-worker -H <host> -p <port> <options> <args>
```

The `-H <host> -p <port>` parameters are required.

Options

```
-H <host>          – Leader Node's Hostname or IP address.
-p <port>          – Leader Node's cluster communications port (defaults to 4200).
[-S <true|false>]  – Sets, or disables, secure communication between Leader and
Worker Nodes via TLS. UI-generated version-update scripts automatically set this
option according to the Leader's configuration.
[-n <certName>]    – Name of saved certificate. Mutually exclusive with -k or -c.
[-k <privKeyPath>] – Path on server to the private key to use. PEM format. Can
reference $ENV_VARS. Requires -c, to successfully connect to the Leader. Mutually
exclusive with -n.
[-c <certPath>]    – Path on server to the certificate to use. PEM format. Can
reference $ENV_VARS. Requires -k, to successfully connect to the Leader. Mutually
exclusive with -n.
[-u <authToken>]   – Authentication token to include as part of the connection
header. By default, this token is included and is set to 'criblmaster'.
[-e <envRegex>]    – Regex that selects environment variables to report to Leader.
Requires slashes to pass validation, e.g., /test/
[-t <tags>]        – Tag values to report to Leader.
[-g <group>]       – Worker Group/Fleet to report to Leader.
```

Sample Response

```
Settings updated.
You will need to restart Cribl Stream before your changes take full effect.
```

mode-managed-edge

Configures Cribl Edge as an Edge Node.

Usage

```
./cribl mode-managed-edge -H <host> -p <port> <options> <args>
```

The `-H <host> -p <port>` parameters are required.

Options

```
-H <host>          – Leader Node's Hostname or IP address.
-p <port>          – Leader Node's cluster communications port (defaults to 4200).
[-S <true|false>]  – Sets, or disables, secure communication between Leader and
Worker Nodes via TLS. UI-generated version-update scripts automatically set this
option according to the Leader's configuration.
[-n <certName>]    – Name of saved certificate. Mutually exclusive with -k or -c.
[-k <privKeyPath>] – Path on server to the private key to use. PEM format. Can
reference $ENV_VARS. Requires -c, to successfully connect to the Leader. Mutually
exclusive with -n.
[-c <certPath>]    – Path on server to the certificate to use. PEM format. Can
reference $ENV_VARS. Requires -k, to successfully connect to the Leader. Mutually
exclusive with -n.
[-u <authToken>]   – Authentication token to include as part of the connection
header. By default, this token is included and is set to 'criblmaster'.
[-e <envRegex>]    – Regex that selects environment variables to report to Leader.
Requires slashes to pass validation, e.g., /test/
[-t <tags>]        – Tag values to report to Leader.
[-g <group>]       – Worker Group/Fleet to report to Leader.
```

Sample Response

```
Settings updated.
```

pack

Manages Cribl Packs.

Usage

```
./cribl pack <sub-command> <options> <args>
```

Sub-commands and Options

```
export              - Export Cribl Packs, args:
   -m <mode>        - Mode to export. Accepts: merge_safe, merge, default_only.
  [-o <filename>]   - Where to export the pack on disk.
  [-n <name>]       - Name to override the installed pack's name on export.
  [-g <group>]      - The Worker Group/Fleet to execute within
install             - Install a Cribl Pack, args:
  [-d ]             - Run install in debug.
  [-f ]             - Force install.
  [-n <name>]       - Name of the pack to install; defaults to source.
  [-g <group>]      - The Worker Group/Fleet to execute within.
list                - List Cribl Packs, args:
  [-v ]             - Display all pack info.
  [-g <group>]      - The Worker Group/Fleet to execute within.
uninstall           - Uninstall a Cribl Pack, args:
  [-d ]             - Run uninstall in debug.
  [-g <group>]      - The Worker Group/Fleet to execute within.
upgrade             - Upgrade a Cribl Pack, args:
  [-d ]             - Run upgrade in debug.
  [-s <source>]     - Provide the pack source.
  [-m <minor>]      - Only upgrade to minor version.
  [-g <group>]      - The Worker Group/Fleet to execute within.
```

Sample Response

```
id          version  spec  displayName    author       description
source
-------------------------------------------------------------------------------
----------------------------------------
HelloPacks  1.0.0    ----  Hello, Packs!  Cribl, Inc.  A sample pack with a simple
example  file:/opt/cribl/default/HelloPacks
```

reload

Reloads Cribl Stream. Executes immediately.

Usage

```
./cribl reload [--help]
```

Sample Response

```
Reload request submitted to Cribl
```

restart

Restarts Cribl Stream. Executes immediately.

> Executing this command cancels any running collection jobs.

Usage

```
./cribl restart [--help]
```

Sample Response

```
Stopping Cribl, process 18
............
Cribl Stream is not running
Starting Cribl Stream...
...
Cribl Stream started
```

`start`

Starts Cribl Stream. Executes immediately. Upon first run, echoes Cribl Stream's default login credentials.

Usage

```
./cribl start <options> <args>
```

Options

```
[-d <dir>]  - Configuration directory
[-r <role>] - Process role
```

Sample Response

```
Starting Cribl Stream...
...
Cribl Stream started
```

`status`

Displays status of Cribl Stream, including the API Server address, instance's mode (Leader or Worker), process ID, and GUID (fictitious example below). Executes immediately.

Usage

```
./cribl status [--help]
```

Sample Response

```
Cribl Stream Status

Address: http://172.17.0.3:9000
Mode: master
Status: Up
Software Version: 3.1.0-f765e418
Config Version: 347079c
Master: 0.0.0.0:4200
PID: 4100
GUID: e706052a-ace9-4511-a7c7-b58a414a07d3
```

`stop`

Stops Cribl Stream. Executes immediately.

> Executing this command cancels any running collection jobs.

Usage

```
./cribl stop [--help]
```

Sample Response

```
Stopping Cribl Stream, process 3951
............
Cribl Stream is not running
```

`version`

Displays Cribl Stream version. Executes immediately.

Usage

```
./cribl version [--help]
```

Sample Response

```
Software Version: 3.1.0-f765e418
```

auth

Log into or out of Cribl Stream.

Usage

```
./cribl auth <sub-command> <options> <args>
```

Sub-commands and Options

```
login             - Log in to Cribl Stream/Edge, args:
  [-h <oldHost>]  - undefined
  [-H <host>]     - Host URL (e.g. http://localhost:9000)
  [-u <username>] - Username
  [-p <password>] - Password
  [-f <file>]     - File with credentials
logout            - Log out from Cribl Stream/Edge
```

Login Examples

Launch interactive login:

```
$CRIBL_HOME/bin/cribl auth login
```

Append credentials as command arguments:

```
$CRIBL_HOME/bin/cribl auth login -h <url> -u <username> -p <password>
```

> All `-h` and `host` arguments are optional, provided that the API host and port are listed in the `cribl.yml` file's `api:` section.

Provide credentials in environment variables:

```
CRIBL_HOST=<url> CRIBL_USERNAME=<username> CRIBL_PASSWORD=<password>
$CRIBL_HOME/bin/cribl auth login
```

Provide credentials in a file:

```
$CRIBL_HOME/bin/cribl auth login -f <path/to/file>
```

--

Corresponding file contents:

```
host=<url>
username=<username>
password=<password>
```

boot-start

Enables or disables Cribl Stream boot-start.

Usage

```
./cribl boot-start <sub-command> <options> <args>
```

Sub-commands and Options

```
disable             - Disable Cribl Stream/Edge boot-start, args:
  [-m <manager>]    - Init manager (systemd|initd)
  [-c <configDir>]  - Config directory for the init manager
enable              - Enable Cribl Stream/Edge boot-start, args:
  [-m <manager>]    - Init manager (systemd|initd)
  [-u <user>]       - User to run Cribl Stream/Edge as
  [-c <configDir>]  - Config directory for the init manager
```

Sample Response

```
Enabling Cribl Stream/Edge to be managed by initd...
boot-start enable command needs root privileges...
Enabled Cribl Stream/Edge to be managed by initd as user=root.
```

diag

Manages diagnostic bundles.

Usage

```
./cribl diag <sub-command> <options> <args>
```

Sub-commands and Options

```
create              - Creates diagnostic bundle for Cribl Stream/Edge, args:
  [-d ]             - Run create in debug mode
  [-j ]             - Do not append '.txt' to js files
  [-t <number> ]    - Latest number of jobs to include in bundle
  [-M ]             - Exclude metrics from bundle to reduce file size
list                - List existing Cribl Stream/Edge diagnostic bundles

send                - Send Cribl Stream/Edge diagnostics bundle to Cribl Support,
args:
   -c <caseNumber>  - Cribl Support Case Number
  [-p <path>]       - Diagnostic bundle path (if empty then new bundle will be
created)

heapsnapshot        - Creates a heap snapshot for Cribl Stream/Edge processes, args:
   -p <pid>         - Process ID
```

Sample Responses

diag create

```
Created @[product] diagnostic bundle at /opt/cribl/diag/logstream-zedborcdb72f-
20210820T204405.tar.gz
```

diag heapsnapshot -p 12345

The response format is `Heap-<epoch-timestamp>-<pid>.heapsnapshot`:

```
Heap-1672574400000-12345.heapsnapshot
```

git

Manages Worker Group/Fleets'/Fleets' configuration.

Usage

```
./cribl git <sub-command> <options> <args>
```

Sub-commands and Options

```
commit             - Commit, args:
  [-g <group>]     - Group ID.
  [-m <message>]   - Commit message.
commit-deploy      - Commit & Deploy, args:
   -g <group>      - Group ID.
  [-m <message>]   - Commit message.
deploy             - Deploy, args:
   -g <group>      - Group ID.
  [-v <version>]   - Deploy version.
list-groups        - List Worker Groups/Fleets.
```

Sample Response

```
Successfully committed version 7c04de1
```

`groups`

Deprecated. See `git`.

`keys`

Manages encryption keys. You must append the `-g <group>` argument to specify a Worker Group/Fleet. As a fallback, append the argument `-g default`, e.g.: `./cribl keys list -g default`

Usage

```
./cribl keys <sub-command> <options> <args> -g <group>
```

Sub-commands and Options

```
add               - Add encryption keys, args:
[-a <algorithm>]  - Encryption algorithm. Supported values: aes-256-cbc (default),
aes-256-gcm.
[-c <keyclass>]   - Key class to set for the key.
[-k <kms>]        - KMS to use. Must be configured; see cribl.yml.
[-e <expires>]    - Expiration time, in epoch time.
[-i]              - Use an initialization vector.
 -g <group>       - Worker Group's ID.
list              - List encryption keys, args:
 -g <group>       - Worker Group's ID.
```

Sample Response

```
Adding key succeeded. Key count=1
```

nc

Listens on a port for traffic, and outputs stats and data. (Netcat-like utility.)

Usage

```
./cribl nc -p <port> <options> <args>
```

Options

```
 -p <port>           - Port to listen on.
[-f 6]               - Listen on IPv6 addresses ("::" format). Omit this option — or
use "-f 4" — to listen on the default IPv4 addresses ("0.0.0.0").
[-s <statsInterval>] - Stats output interval (ms), use 0 to disable.
[-u]                 - Listen on UDP port instead.
[-o]                 - Output received data to stdout.
[-t <throttle>]      - throttle rate in (unit)/sec, where units can be KB,MB,GB, and
TB.
```

Sample Response

```
2021-08-20T22:44:30.457Z - starting server on 0.0.0.0:9999
2021-08-20T22:44:30.462Z - server listening 0.0.0.0:9999
2021-08-20T22:44:31.461Z - messages: 0, socks: 0, thruput: 0MBps
2021-08-20T22:44:32.466Z - messages: 0, socks: 0, thruput: 0MBps
...
2021-08-20T22:44:39.212Z - got connection: 127.0.0.1:37190
2021-08-20T22:44:39.213Z - got connection: 127.0.0.1:37192
```

node

Run with no options, displays a command prompt, as shown here:

```
>
```

To execute a JavaScript file, you can enter path/filename at the prompt.

With the `-v` option, prints the version of NodeJS that is running.

With `-e`, evaluates a string. Write to console to see the output, for example:

```
./cribl node -e 'console.log(Date.now())'
1629740667695
```

Usage

```
./cribl node <options> <args>
```

Options

```
[-e <eval>] - String to eval
[-v]        - Prints NodeJS version
```

Sample Response

```
v14.15.1
```

pipe

Feeds stdin to a pipeline.

Usage

```
./cribl pipe -p <pipelineName> <options> <args>
```

Examples:

```
cat sample.log |  ./cribl pipe -p <pipelineName>
cat sample.log |  ./cribl pipe -p <pipelineName> 2>/dev/null
```

Options

```
 -p <pipeline>    - Pipeline to feed data thru
[-d]              - Include dropped events
[-c <cpuProfile>] - Perform CPU profiling
[-a <pack>]       - Optional Cribl Pack context
```

Sample Response

```
...
{"time":"2021-08-
20T20:37:00.017Z","cid":"api","channel":"commands","level":"info","message":"creating
new pipeline","id":"main","conf":{"asyncFuncTimeout":1000,"functions":
[{"id":"eval","disabled":false,"filter":"true","conf":{"add":
[{"name":"cribl","value":"'yes'"}],"remove":[]}}]}}
{"time":"2021-08-
20T20:37:00.019Z","cid":"api","channel":"pipe:main","level":"info","message":"start
loading and initializing functions","count":1}
{"time":"2021-08-
20T20:37:00.021Z","cid":"api","channel":"pipe:main","level":"info","message":"finished
loading and initializing functions","count":1}
{"time":"2021-08-
20T20:37:00.022Z","cid":"api","channel":"commands","level":"info","message":"START
pushing stdin events","id":"main"}
{"time":"2021-08-
20T20:37:00.028Z","cid":"api","channel":"GrokMgr","level":"info","message":"loaded
grok patterns","count":152}
...
```

`scope`

Greps your apps by the syscalls. Executes immediately.

See the AppScope CLI Reference for usage and examples.

`vars`

Manages Cribl Stream Global Variables.

Usage

```
./cribl vars <sub-command> <options> <args>
```

Sub-commands and Options

```
Sub-commands:
add                   - Add global variable, args:
   -i <id>            - Global variable ID
   -t <type>          - Type
   -v <value>         - Value
  [-a <args>]         - Arguments
  [-d <description>] - Description
  [-c <tags>]         - Custom Tags (comma separated list)
  [-g <group>]        - Group ID
get                   - List global variables, args:
  [-i <id>]           - Global variable ID
  [-g <group>]        - Group ID
remove                - Remove global variable, args:
   -i <id>            - Global variable ID
  [-g <group>]        - Group ID
update                - Update global variable, args:
   -i <id>            - Global variable ID
  [-t <type>]         - Type
  [-v <value>]        - Value
  [-a <args>]         - Arguments
  [-d <description>] - Description
  [-c <tags>]         - Custom Tags (comma separated list)
  [-g <group>]        - Group ID
```

Sample Response

```
[
  {
    "type": "number",
    "lib": "cribl",
    "description": "Sample number variable ",
    "value": "42",
    "tags": "cribl,sample",
    "id": "theAnswer"
  }
]
```

13.5. Environment Variables

This is a consolidated list of environment variables available to configure Cribl Stream instances.

Distributed Deployment

You can use the following environment variables to configure your distributed Cribl Stream instance.

NAME	PURPOSE
`CRIBL_DIST_MASTER_URL`	URL of the Leader Node. Example: `CRIBL_DIST_MASTER_URL=tls://<authToken>@leader:4200`. See Formatting Notes below.
`CRIBL_DIST_MODE`	`worker` or `master`. Defaults to `worker`, if (and only if) `CRIBL_DIST_MASTER_URL` is present.
`CRIBL_HOME`	Auto setup on startup. Defaults to parent of `bin` directory.
`CRIBL_CONF_DIR`	Auto setup on startup. Defaults to parent of `bin` directory.
`CRIBL_NOAUTH`	Disables authentication. Careful here!!
`CRIBL_TMP_DIR`	Defines the root of a temporary directory. See Formatting Notes below.
`CRIBL_VOLUME_DIR`	Sets a directory that persists modified data between different containers or ephemeral instances. When set, this environment variable overrides $CRIBL_HOME. It also creates predefined folders in the specified directory. If that directory already contains folders with those names, they will be overwritten.
`CRIBL_DIST_WORKER_PROXY`	Communicate to the Leader Node via a SOCKS proxy.See Formatting Notes below.
`CRIBL_BOOTSTRAP`	Quickstart a Cribl instance by configuring this variable.
`CRIBL_BOOTSTRAP_HOST`	Host name for connecting to the Leader Node when setting up a new Worker Node. This variable is not related to `CRIBL_BOOTSTRAP`.
`CRIBL_USERNAME`	Used to log in or out of Cribl.
`CRIBL_PASSWORD`	Used to log in or out of Cribl.

NAME	PURPOSE
`CRIBL_HOST`	The Host URL for authentication. Example: `CRIBL_HOST=<url> CRIBL_USERNAME=<username> CRIBL_PASSWORD=<password> $CRIBL_HOME/bin/cribl auth login`

Usage Notes

This section explains how to use certain complex environment variables.

`CRIBL_DIST_MASTER_URL`

Use this format:

```
<tls|tcp>://<authToken>@host:port?group=defaultGroup&tag=tag1&tag=tag2&tls.<tls_settings>
```

Here are the components:

- `group` – The preferred Worker Group assignment.
- `resiliency` – The preferred Leader failover mode.
- `volume` – The location of the NFS directory to support Leader failover.
- `tag` – A list of tags that you can use to assign (Stream, Edge) the Worker to a Worker Group.
- `tls.privKeyPath` – Private Key Path.
- `tls.passphrase` – Key Passphrase.
- `tls.caPath` – CA Certificate Path.
- `tls.certPath` – Certificate Path.
- `tls.rejectUnauthorized` – Validate Client Certs. Boolean, defaults to `false`.
- `tls.requestCert` – Authenticate Client (mutual auth). Boolean, defaults to `false`.
- `tls.commonNameRegex` – Regex matching peer certificate > subject > common names allowed to connect. Used only if `tls.requestCert` is set to `true`.

`CRIBL_TMP_DIR`

Sources use this variable to construct temporary directories in which to stage downloaded Parquet data. If `CRIBL_TMP_DIR` is not set (the default), Cribl applications create subdirectories within your operating system's default temporary directory:

- For Cribl Stream: `<OS_default_temporary_directory>/stream/`.
- For Cribl Edge: `<OS_default_temporary_directory>/edge/`.

For example, on Linux, Stream's default staging directory would be `/tmp/stream/`.

If you explicitly set this `CRIBL_TMP_DIR` environment variable, its value replaces this OS-specific default parent directory.

CRIBL_DIST_WORKER_PROXY

Use the format `<socks4|socks5>://<username>:<password>@<host>:<port>`. Only `<host>:<port>` are required.

The default protocol is `socks5://`, but you can specify `socks4://proxyhost:port` if needed.

To authenticate on a SOCKS4 proxy with username and password, use this format: `username:password@proxyhost:port`. The `proxyhost` can be a `hostname`, `ip4`, or `ip6`.

CRIBL_BOOTSTRAP_HOST

`CRIBL_BOOTSTRAP_HOST` overrides the Add/Bootstrap New Worker script generator's default hostname.

For example, if you set `CRIBL_BOOTSTRAP=myhost`, then `myhost` will appear in the script modal's **Leader hostname/IP** field, instead of the URL used in the browser.

CRIBL_BOOTSTRAP

`CRIBL_BOOTSTRAP` enables specifying a URL, an absolute disk file path, or a YAML string, in order to bootstrap a configuration to the `$CRIBL_HOME/local` directory. Cribl Stream applies this configuration only upon its first startup.

For any method, Cribl Stream expects each targeted config file to be YAML-formatted. Each file's top-level keys should be the paths to config files inside the `$CRIBL_HOME/local/...` subdirectory.

Below is an example of a bootstrap file. Its output, when Cribl Stream starts, would be to create three files inside the `$CRIBL_HOME/local/cribl` path: `inputs.yml`, `outputs.yml`, and `pipelines/route.yml`.

```
cribl/inputs.yml:
  inputs:
    <id>:
      <config>
cribl/outputs.yml:
  outputs:
    <id>:
      <config>
cribl/pipelines/route.yml:
  id: default
  groups: {}
  comments: []
  routes:
    ...
```

For details about each file's syntax, see Config Files and its child topics.

Adding a Second Leader Node

You can configure a second Leader Node via the following environment variables.

NAME	PURPOSE
`CRIBL_DIST_MASTER_RESILIENCY=failover`	Sets the Leader's `Resiliency` to `Failover` mode.
`CRIBL_DIST_MASTER_FAILOVER_VOLUME=/tmp/shared`	Sets the location of the NFS directory to support Leader failover.
`CRIBL_DIST_MASTER_FAILOVER_MISSED_HB_LIMIT`	Determines how many Lease refresh periods elapse before the standby Nodes attempt to promote themselves to primary. Cribl recommends setting this to `3`.
`CRIBL_DIST_MASTER_FAILOVER_PERIOD`	Determines how often the primary Leader refreshes its hold on the Lease file. Cribl recommends setting this to `5s`.
`CRIBL_INSTANCE_HOME`	In `Failover` mode, this variable points to the Leader Node's `root` directory, as opposed to the shared volume. It is used to access `$CRIBL_INSTANCE_HOME/local/_system/instance.yml`. Outside of `Failover` mode, it's the same value as `CRIBL_CONF_DIR`.

GitOps

Cribl Stream provides the following environment variables to facilitate GitOps.

Bootstrap Variables

NAME	PURPOSE
`CRIBL_GIT_REMOTE`	Location of the remote repo to track. Can contain username and password for HTTPS auth.
`GIT_SSH / GIT_SSH_COMMAND`	See Git's documentation.
`CRIBL_GIT_BRANCH`	Git ref (branch, tag, commit) to track/check out.
`CRIBL_GIT_AUTH`	One of: `none`, `basic`, or `ssh`.
`CRIBL_GIT_USER`	Used for `basic` auth.
`CRIBL_GIT_PASSWORD`	Used for `basic` auth.
`CRIBL_GIT_OPS`	One of: `push` to enable the GitOps push workflow, or `none` to disable GitOps.
`CRIBL_GIT_SSH_KEY`	Content of the SSH key used to access git remote.
`CRIBL_GIT_STRICT_HOST_KEY_CHECKING`	Boolean flag sets whether to check the host key strictly.
`CRIBL_INTERACTIVE`	Controls whether git commands called by Cribl CLI at startup are interactive.

Internal Environment Variables

Cribl Stream uses the following variables internally.

NAME	PURPOSE
`CRIBL_AUTO_PORTS`	When set to `true`, allows the Cribl process to listen to the first open port, if the designated API port is taken.
`CRIBL_EDGE`	When set to any value, runs this command at container start: `cribl mode-edge -H 0.0.0.0`. This launches the instance as an Edge Node, listening on a Host at `0.0.0.0`.
`CRIBL_EDGE_FS_ROOT`	Location of the host OS filesystem when mounting in a container. Defaults to `/hostfs`.
`CRIBL_WORKER_ID`	Passed to Worker processes.
`CRIBL_GROUP_ID`	Passed to ConfigHelper processes to identify Worker Groups.

NAME	PURPOSE
CRIBL_K8S_FOOTGUN	Set to `true` to enable resource-intensive, potentially risky modes of the Kubernetes Metrics and Kubernetes Logs Sources.
CRIBL_K8S_POD	Sets the name of the Kubernetes Pod in which Cribl Edge is deployed.
CRIBL_K8S_TLS_REJECT_UNAUTHORIZED	Set to `0` to disable certification validation when connecting to the Kubernetes APIs. When you disable this environment variable, all Kubernetes features (including Metadata, Metrics, Logs, and AppScope metadata) will tolerate invalid TLS certificates (i.e., expired, self-signed, etc.) when connecting to the Kubernetes APIs.
CRIBL_ROLE	Controls the behavior of a Cribl subprocess, e.g., `LEADER`, `WORKER`, `CONFIG_HELPER`.
CRIBL_SERVICE	Set to 1 when using **systemd** to start Cribl at boot time.
CRIBL_SERVICE_NAME	Set to `cribl` when using **systemd** to start Cribl at boot time.
CRIBL_SERVICEACCOUNT_PATH	Path to the `ServiceAccount` to use to query the Kubernetes API. Defaults to `/var/run/secrets/kubernetes.io/serviceaccount`.
CRIBL_SPOOL_DIR	Path to write metrics to disk. Defaults to `/$CRIBL_HOME/state/spoolin/source_type/source_id` and adjusted for `$CRIBL_VOLUME_DIR` if set.

13.6. Config Files

Understanding Configuration Paths and Files

Even though all Cribl Stream Routes, Pipelines, and Functions can be managed from the UI, it's important to understand how the configuration works under the hood. Here is how configuration paths and files are laid out on the filesystem.

PATH PLACEHOLDER	EXPANDED PATH
`$CRIBL_HOME`	Standalone Install: `/path/to/install/cribl/` – referred to below as `$CRIBL_HOME` Cribl App for Splunk Install: `$SPLUNK_HOME/etc/apps/cribl/`

All paths below are relative to `$CRIBL_HOME` in a single-instance deployment, or to `$CRIBL_HOME/groups/<group-name>/` in a distributed deployment.

CATEGORY	RELATIVE PATH
Default Configurations Out-of-the-box defaults (rewritable) and libraries (expandable)	`default/cribl`
Local Configurations User-created integrations and resources	`local/cribl`
System Configuration	`(default|local)/cribl/cribl.yml` See cribl.yml
API Configuration	`(default|local)/cribl/cribl.yml > [api]` section See cribl.yml
Source Configuration	`(default|local)/cribl/inputs.yml` See inputs.yml
Destination Configuration	`(default|local)/cribl/outputs.yml` See outputs.yml
License Configuration	`(default|local)/cribl/licenses.yml`
Regexes Configuration	`(default|local)/cribl/regexes.yml`

CATEGORY	RELATIVE PATH
Breakers Configuration	`(default|local)/cribl/breakers.yml`
Limits Configuration	`(default|local)/cribl/limits.yml`
Pipelines Configuration	`(default|local)/cribl/pipelines/<pname>` Each Pipeline's conf is contained therein.
Routes Configuration	`(default|local)/cribl/pipelines/routes.yml`
Functions	`(default|local)/cribl/functions/<function_name>` Each function's code, conf is contained therein.
Functions Configuration	`(default|local)/cribl/functions/<function_name>/...` Each function's conf is contained therein.
Roles Configuration	`(default|local)/cribl/roles.yml` RBAC Role definitions. See roles.yml.
Policies Configuration	`(default|local)/cribl/policies.yml` RBAC Policy definitions. See policies.yml.

Configurations and Restart

> You can **Restart** and **Reload** via the UI. On the top nav, go to **Settings** > **Global Settings** > **System** > **Controls** then click on the **Reload** button or the **Restart** button.

In a distributed environment, Worker Nodes poll the Leader for configuration changes. Many of these changes require a quick reload to read the new configuration, while others require a restart of the Cribl processes on the Worker Node.

On restarts, be aware of the following:

- Data in process of being received on Syslog/UDP might be dropped.
- Worker Nodes will temporarily disappear from the Leader's Manage/Worker Node page.
- Aggregations and suppressions will start over.
- The local copy of monitoring metrics on the Worker Nodes, before the restart, will be dropped.
- Any events in RAM for persistent queue (PQ) will be lost. PQ data on disk will persist.

Changes that require reloads include configuration changes to:

- Functions

- Pipelines
- Routes
- Lookups
- Parquet schemas
- Global variables
- Group Settings: Limits and Logging Levels

Changes that require restarts include configuration changes to:

- Mode of operation (Leader, distributed Worker Node, Single-instance)
- Worker Group assignment
- Event Breakers
- Quick Connects
- Sources
- Destinations
- Group Settings: Advance Settings, TLS
- Group Settings: Worker Processes - Process Count/Memory

Some general guidelines to keep in mind:

- Configuration changes resulting from most UI interactions – for instance, changing the order of Functions in a Pipeline, or changing the order of Routes – **do not require restarts**.
- Some configuration changes in the **Settings** UI **do require restarts**. You will be prompted to confirm before restarting.
- All direct edits of configuration files in `(bin|local|default)/cribl/...` **will require restarts**.
- Worker Nodes might temporarily disappear from the Leader's **Workers** tab while restarting.
- A `git commit` command on the Leader Node's host (using a freestanding `git` client not embedded in Cribl's CLI or UI) **will require either a reload or restart**.
- When using the Cribl App for Splunk, changes to Splunk configuration files might or might not require restarts. Please check current Splunk docs.

Configuration Layering and Precedence

Similar to most *nix systems, Cribl configurations in `local` take precedence over those in `default`. There is no layering of configuration files.

Editing Configuration Files Manually

When config files **must** be edited manually, save all changes in `local`.

13.6.1. cribl.yml

`cribl.yml` contains settings for configuring API and other system properties.

$CRIBL_HOME/default/cribl/cribl.yml

```
api:
  # Address to bind to. Default: 0.0.0.0
  host: 0.0.0.0
  # Port to listen to. Default: 9000
  port: 9000
  # Number of times to retry binding to API port.
  retryCount: 120
   # Period, in seconds, between consecutive port binding retries. Default: 120.
  retrySleepSecs: 5
  # URL base path from which to serve all assets (useful when behind a proxy).
Default: 5.
  baseUrl: ""
  # Flag to enable/disable local UI access. Default: false
  disabled : false
  # Enable teleporting to @{node}s'. Default: false
  workerRemoteAccess: false
  # Log users out when their roles change. Default: true
  revokeOnRoleChange: true
  # How long (in seconds) authentication tokens remain valid. Default is 1 hr.;
minimum is 1 sec.'
  authTokenTTL: 60
  # How long (in seconds) @{product} will observe no user interaction before
invalidating user's session tokens. Default is 1 hr.; minimum is 60 sec.
  idleSessionTTL: true
  # Custom HTTP headers to be sent with every response.
  headers: true
  # Rate limit, expressed as maximum number of requests per interval (second,
minute, hour, day). E.g., 3/second, 5/minute.
  loginRateLimit: 2/second
  # Rate limit for SSO and SLO callback endpoints. Expressed as maximum number of
requests per second, minute, hour, or day, e.g., 3/second, 5/minute. When limit is
reached, the @{product} sends 429 Too Many Requests HTTP responses.
  ssoRateLimit: 3/second
  # Toggle to 'No' to disable caching of browser's frequent API requests. (Can slow
the UI's response time.)
  apiCache: 3/second
  # SSL Settings
  ssl:
    # SSL is enabled by default
    disabled: false
    # Path to private key
    privKeyPath: /path/to/privkey.pem
    # Path to certificate
    certPath: /path/to/cert.pem

auth: # [object] Authentication Settings
  type: # [string] Type - Select one of the supported authentication providers.

  # -------------- if type is ldap ---------------

  secure: # [boolean] Secure - Enable to use a secure ldap connection (ldaps://),
disable for unsecure (ldap://) connection.
  ldapServers: # [array of strings] LDAP servers - List of LDAP servers, each entry
should contain host:port (e.g., localhost:389)
  bindDN: # [string] Bind DN - Distinguished name of entity to authenticate with
LDAP server, e.g., 'cn=admin,dc=example,dc=org'
  bindCredentials: # [string] Password - Distinguished Name password used to
authenticate with LDAP server
  searchBase: # [string] User search base - Starting point to search LDAP for users,
```

```
e.g., 'dc=example,dc=org'
  usernameField: # [string] Username field - LDAP user search field, e.g. cn or uid
  searchFilter: # [string] User search filter - LDAP search filter to apply when
finding user, e.g. (&(group=admin)(!(department=123*)))
  groupSearchBase: # [string] Group search base - Starting point to search LDAP for
groups, e.g., 'dc=example,dc=org'
  groupMemberField: # [string] Group member field - LDAP group search field, e.g.
member
  groupSearchFilter: # [string] Group search filter - LDAP search filter to apply
when finding group, e.g. (&(cn=cribl*)(objectclass=group))
  groupField: # [string] Group name field - LDAP group field, e.g. cn
  connectTimeout: # [number] Connection timeout (ms)
  rejectUnauthorized: # [boolean] Reject unauthorized - Valid for secure LDAP
connections, set true to reject unauthorized server certificates.
  fallback: # [boolean] Fallback on fatal error - Attempt local authentication if
LDAP authentication is down or mis-configured. Defaults to false.
  groups: # [object]
    default: # [string] Default role - Default role assigned to groups not
explicitly mapped to a role.
    mapping: # [object] Mapping - Group(s)-to-role(s) mappings

  # ------------------------------------------------------


  # -------------- if type is saas ---------------

  issuer: # [string] Issuer - Issuer from which to accept and validate JWT tokens.
  tenantId: # [string] Organization ID - The organization ID within which this
instance is running.
  loginUrl: # [string] Login URL - The URL to redirect unauthenticated users to.

  # ------------------------------------------------------


  # -------------- if type is splunk ---------------

  host: # [string] Host - Hostname or address of Splunk instance that provides
authentication. Defaults to localhost.
  port: # [number] Port - Port of Splunk instance that provides authentication.
Defaults to 8089.
  ssl: # [boolean] SSL - Whether SSL is enabled on Splunk instance that provides
authentication. Defaults to Yes.
  fallback: # [boolean] Fallback on fatal error - Attempt local authentication if
Splunk is unsuccessful. Defaults to false.
  groups: # [object]
    default: # [string] Default role - Default role assigned to groups not
explicitly mapped to a role.
    mapping: # [object] Mapping - Group(s)-to-role(s) mappings

  # ------------------------------------------------------


  # -------------- if type is openid ---------------

  name: # [string] Provider name - The name of the identity provider service. Manual
entries are also allowed.
  audience: # [string] Audience - The Audience from provider configuration. This
will be the base URL of your Cribl server, i.e.: https://yourDomain.com:9000
  client_id: # [string] Client ID - The client_id from provider configuration.
  client_secret: # [string] Client secret - The client_secret provider
```

```
configuration.
  scope: # [string] Scope - Space-separated list of authentication scopes. Default:
openid profile email.
  auth_url: # [string] Authentication URL - The full path to the provider's
authentication endpoint. Be sure to configure the callback URL at provider as
<yourDomainUrl>/api/v1/auth/authorization-code/callback, e.g.
https://yourDomain.com:9000/api/v1/auth/authorization-code/callback
  token_url: # [string] Token URL - The full path to the provider's access token
URL.
  userinfo_url: # [string] User Info URL - The full path to the provider's user info
url. If not provided, Stream will attempt to gather user info from the ID token
returned from the Token URL.
  logout_url: # [string] Logout URL - The full path to the provider's logout URL.
Leave blank if the provider does not support logout or token revocation.
  userIdExpr: # [string] User identifier - Expression used to derive userId from the
id_token returned by the openId provider.
  rejectUnauthorized: # [boolean] Validate certs - Validate certificates; set to
false to allow insecure self-signed certificates.
  filter_type: # [string] Filter type - Optional method for limiting access per
user.
  groupField: # [string] Group name field - Field on the id_token that contains the
user groups.
  fallback: # [boolean] Allow local auth - Allows locally configured users to log in
to Stream.
  groups: # [object]
    default: # [string] Default role - Default role assigned to groups not
explicitly mapped to a role.
    mapping: # [object] Mapping - Group(s)-to-role(s) mappings

  # ------------------------------------------------------

system: # [object]
  upgrade: # [string]
  restart: # [string]
  installType: # [string]
workers: # [object]
  count: # [number]
  memory: # [number]
tls: # [object] Default TLS Settings
  minVersion: # [string] Minimum TLS version - Minimum TLS version. Defaults to
TLSv1.
  maxVersion: # [string] Maximum TLS version - Maximum TLS version. Defaults to
TLSv1.3.
  defaultCipherList: # [string] Default cipher list - Default suite of enabled and
disabled TLS ciphers. Defaults to:
      ECDHE-RSA-AES128-GCM-SHA256:
      ECDHE-ECDSA-AES128-GCM-SHA256:
      ECDHE-RSA-AES256-GCM-SHA384:
      ECDHE-ECDSA-AES256-GCM-SHA384:
      DHE-RSA-AES128-GCM-SHA256:
      ECDHE-RSA-AES128-SHA256:
      DHE-RSA-AES128-SHA256:
      ECDHE-RSA-AES256-SHA384:
      DHE-RSA-AES256-SHA384:
      ECDHE-RSA-AES256-SHA256:
      DHE-RSA-AES256-SHA256:
      HIGH:
      !aNULL:
      !eNULL:
      !EXPORT:
```

```
      !DES:
      !RC4:
      !MD5:
      !PSK:
      !SRP:
      !CAMELLIA
  defaultEcdhCurve: # [string] ECDH curve - The curve name, or a colon-separated
list of curve NIDs or names, to use for ECDH key agreement. For example:
'Pâ□□521:Pâ□□384:Pâ□□256'. Defaults to 'auto'.
  rejectUnauthorized: # [boolean] Validate server certs - Whether to validate server
certificates globally. Set to false to allow self-signed certs.
proxy: # [object]
  useEnvVars: # [boolean]
git: # [object]
  branch: # [string] Branch - The branch to track in your Stream deployment's git
repository.
  gitOps: # [string] GitOps workflow - The GitOps workflow for managing Stream's
config.
  commitDeploySingleAction: # [boolean] Collapse actions - When enabled, Commit &
Deploy will be collapsed into a single action. If you've configured a remote, Commit
& Git Push will also be collapsed. Your DefaultÂ CommitÂ Message below will be used
for all commits.
  defaultCommitMessage: # [string] Default commit message - Enter a default message
to use for all commits.
  remote: # [string] Remote URL - Enter remote git repo's URL.
  authType: # [string] Authentication type - Git authentication type.

  # -------------- if authType is ssh ---------------

  sshKey: # [string] SSH private key - Enter SSH private key (without passphrase) to
use for authentication on remote git repo.
  strictHostKeyChecking: # [boolean] SSH strict host key checking - Validate key
against known hosts, to prevent spoofing or impersonation attacks. For details, see
"VerifyingÂ Host Keys" [here](https://linux.die.net/man/1/ssh).

  # -------------------------------------------------------


  # -------------- if authType is basic ---------------

  user: # [string] User - Username for authentication.
  password: # [string] Password - Password for authentication. (With GitHub, use a
personal access token.)

  # -------------------------------------------------------

  autoAction: # [string] Scheduled global actions - Global git actions to run
automatically on a schedule.

  # -------------- if autoAction is commit ---------------

  autoActionSchedule: # [string] Schedule - Cron schedule to run selected git action
on.
  autoActionMessage: # [string] Commit message - Default scheduled commit message.

  # -------------------------------------------------------


  # -------------- if autoAction is push ---------------
```

```
  autoActionSchedule: # [string] Schedule - Cron schedule to run selected git action
on.

  # ------------------------------------------------------

  timeout: # [number] Git timeout - Max time (milliseconds) to wait for git
processes before killing them, 0 to wait indefinitely
```

Example `cribl.yml`:

$CRIBL_HOME/default/cribl/cribl.yml

```
api:
  host: 0.0.0.0
  port: 9000
  retryCount: 120
  retrySleepSecs: 5
  baseUrl: ""
  # Flag to enable/disable UI. Default: false
  disabled : false
  loginRateLimit: 2/second
  ssl:
    disabled: false
    privKeyPath: /path/to/myKey.pem
    certPath: /path/to/myCert.pem
auth:
  type: local
kms.local:
  type: local
crypto:
  keyPath: $CRIBL_HOME/local/cribl/auth/keys.json
system:
  upgrade: api
  restart: api
  installType: standalone
  intercom: true
workers:
  count: -2
  minimum: 2
  memory: 2048
proxy:
  useEnvVars: true
```

13.6.2. breakers.yml

Cribl's default Event Breaker Library is stored in `$CRIBL_HOME/default/cribl/breakers.yml`.

$CRIBL_HOME/default/cribl/breakers.yml

```
breaker_id: # [object]
  lib: # [string] Library
  description: # [string] Description - Brief description of this ruleset. Optional.
  tags: # [string] Tags - One or more tags related to this ruleset. Optional.
  rules: # [array] Rules - List of rules. Evaluated in order, top down.
    - name: # [string] Rule Name - Rule Name.
      condition: # [string] Filter Condition - Filter expression (JS) that matches
data to apply rule to. To test your sample, use the maximize icon on the right.
      type: # [string] Event Breaker Type - Event Breaker Type
      timestampAnchorRegex: # [string] Timestamp Anchor - Regex to match before
attempting timestamp extraction. Use $ (end of string anchor) to not perform
extraction.
      timestamp: # [object] Timestamp Format - Auto, manual format (strptime) or
current time.
      type: # [string] Timestamp Type
      length: # [number] Length
      format: # [string] Format
      timestampTimezone: # [string] Default timezone - Timezone to assign to
timestamps without timezone info.
      timestampEarliest: # [string] Earliest timestamp allowed - The earliest
timestamp value allowed relative to now. E.g., -42years. Parsed values prior to this
date will be set to current time.
      timestampLatest: # [string] Future timestamp allowed - The latest timestamp
value allowed relative to now. E.g., +42days. Parsed values after this date will be
set to current time.
      maxEventBytes: # [number] Max Event Bytes - The maximum number of bytes that
an event can be before being flushed to the pipelines
      fields: # [array] Fields - Key value pairs to be added to each event.
      - name: # [string] Name - Field Name.
        value: # [string] Value Expression - JavaScript expression to compute fields
value (can be constant).
      disabled: # [boolean] Disabled - Allows breaker rule to be enabled or
disabled, default is enabled.
```

13.6.3. certificates.yml

`certificates.yml` maintains a list of configured certificates and their parameters.

$CRIBL_HOME/local/cribl/certificates.yml

```
cerficate_id: # [object]
  description: # [string] Description - Brief description of this certificate.
Optional.
  cert: # [string] Certificate - Drag/drop or upload host certificate, in PEM/Base64
format. Or paste its contents here.
  privKey: # [string] Private key - Certificate private key.
  passphrase: # [string] Passphrase - Passphrase. Optional.
  ca: # [string] CA certificate - Optionally, drag/drop or upload all CA
certificate(s) in PEM/Base64 format. Or paste certs' contents here. Certs can be
used for client and/or server auth.
  inUse: # [array of strings] Referenced - List of configurations referencing this
certificate.
```

13.6.4. groups.yml

`groups.yml` maintains a list of groups and their configuration versions.

$CRIBL_HOME/local/cribl/groups.yml

```
group_id: # [object]
  configVersion: # [string] Config Version - Configuration version that is active
for this group
  onPrem: # [boolean] On prem - Whether the group accepts on-prem or cloud worker
nodes (this field is only available on cloud deployments)
  isFleet: # [boolean] Is Fleet - Fleet groups only manage edge nodes.
  workerRemoteAccess: # [boolean] UI access - Enable authenticated viewing of
Workers' UI from the Leader.
```

13.6.5. inputs.yml

`inputs.yml` contains settings for configuring inputs into Cribl.

$CRIBL_HOME/default/cribl/inputs.yml

```
inputs: # [object]
  collection_input: # [object]
    type: # [string] Input Type
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    preprocess: # [object]
      disabled: # [boolean] Disabled - Enable Custom Command
      command: # [string] Command - Command to feed the data through (via stdin) and
process its output (stdout)
      args: # [array of strings] Arguments - Arguments
    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
```

```
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  kafka_input: # [object]
    type: # [string] Input Type
    brokers: # [array of strings] Brokers - List of Kafka brokers to use, eg.
localhost:9092
    topics: # [array of strings] [required] Topic - Topic to subscribe to. Warning:
To optimize performance, Cribl suggests subscribing each Kafka Source to only a
single topic.
    groupId: # [string] Group ID - Specifies the consumer group this instance
belongs to, default is 'Cribl'.
    fromBeginning: # [boolean] From beginning - Whether to start reading from
earliest available data, relevant only during initial subscription.
    kafkaSchemaRegistry: # [object] Kafka Schema Registry Authentication
      disabled: # [boolean] Disabled - Enable Schema Registry

      # -------------- if disabled is false ---------------

      schemaRegistryURL: # [string] Schema Registry URL - URL for access to the
Confluent Schema Registry, i.e: http://localhost:8081
      tls: # [object] TLS settings (client side)
        disabled: # [boolean] Disabled

        # -------------- if disabled is false ---------------

        rejectUnauthorized: # [boolean] Validate server certs - Reject certs that
are not authorized by a CA in the CA certificate path, or by another trusted CA
(e.g., the system's CA). Defaults to No.
        servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
        certificateName: # [string] Certificate name - The name of the predefined
certificate.
        caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
        privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
        certPath: # [string] Certificate path (mutual auth) - Path on client in
which to find certificates to use. PEM format. Can reference $ENV_VARS.
        passphrase: # [string] Passphrase - Passphrase to use to decrypt private
key.
        minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
        maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

        # ------------------------------------------------------


      # -------------------------------------------------------

    connectionTimeout: # [number] Connection timeout (ms) - Maximum time to wait for
a successful connection.
    requestTimeout: # [number] Request timeout (ms) - Maximum time to wait for a
successful request.
    sasl: # [object] Authentication - Authentication parameters to use when
connecting to brokers. Using TLS is highly recommended.
```

```
      disabled: # [boolean] Disabled - Enable Authentication

      # -------------- if disabled is false ---------------

      mechanism: # [string] SASL mechanism - SASL authentication mechanism to use.

      # ----------------------------------------------------

    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ----------------------------------------------------

    sessionTimeout: # [number] Session timeout (ms) -
      Timeout used to detect client failures when using Kafka's group management
facilities.
      If the client sends the broker no heartbeats before this timeout expires,
      the broker will remove this client from the group, and will initiate a
rebalance.
      Value must be between the broker's configured group.min.session.timeout.ms and
group.max.session.timeout.ms.
      See details [here]
(https://kafka.apache.org/documentation/#consumerconfigs_session.timeout.ms).
    rebalanceTimeout: # [number] Rebalance timeout (ms) -
      Maximum allowed time for each worker to join the group after a rebalance has
begun.
      If the timeout is exceeded, the coordinator broker will remove the worker from
the group.
      See details [here]
(https://kafka.apache.org/documentation/#connectconfigs_rebalance.timeout.ms).
    heartbeatInterval: # [number] Heartbeat interval (ms) -
      Expected time between heartbeats to the consumer coordinator when using
Kafka's group management facilities.
      Value must be lower than sessionTimeout, and typically should not exceed 1/3
of the sessionTimeout value.
      See details [here]
(https://kafka.apache.org/documentation/#consumerconfigs_heartbeat.interval.ms).
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
```

```
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # --------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  http_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    authTokens: # [array of strings] Auth tokens - Shared secrets to be provided by
any client (Authorization: <token>). If empty, unauthed access is permitted.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------
```

```
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    criblAPI: # [string] Cribl HTTP Event API - Absolute path on which to listen for
the Cribl HTTP API requests. At the moment, only _bulk (default /cribl/_bulk) is
available. Use empty string to disable.
    elasticAPI: # [string] Elasticsearch API endpoint (Bulk API) - Absolute path on
which to listen for the Elasticsearch API requests. At the moment only _bulk
(default /elastic/_bulk) is available. Use empty string to disable
    splunkHecAPI: # [string] Splunk HEC Endpoint - Absolute path on which listen for
the Splunk HTTP Event Collector API requests. Use empty string to disable.
    splunkHecAcks: # [boolean] Splunk HEC Acks - Whether to enable Splunk HEC
acknowledgements
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
```

```
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  splunk_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    ipWhitelistRegex: # [string] IP Allowlist Regex - Regex matching IP addresses
that are allowed to establish a connection.
```

```
    maxActiveCxn: # [number] Max Active Connections - Maximum number of active
connections allowed per Worker Process, use 0 for unlimited
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    authTokens: # [array] Auth tokens - Shared secrets to be provided by any Splunk
forwarder. IfÂ empty, unauthed access is permitted.
      - token: # [string] Token - Shared secrets to be provided by any Splunk
forwarder. IfÂ empty, unauthed access is permitted.
        description: # [string] Description - Optional token description
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # -------------------------------------------------------
```

```
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  splunk_search_input: # [object]
    searchHead: # [string] Search head - Search head base URL, can be expression,
default is https://localhost:8089.
    search: # [string] [required] Search - Enter Splunk search here. For example:
'index=myAppLogs level=error channel=myApp' OR '| mstats avg(myStat) as myStat WHERE
index=myStatsIndex.'
    earliest: # [string] Earliest - The earliest time boundary for the search. Can
be an exact or relative time. For example: '2022-01-14T12:00:00Z' or '-16m@m'
    latest: # [string] Latest - The latest time boundary for the search. Can be an
exact or relative time. For example: '2022-01-14T12:00:00Z' or '-1m@m'
    cronSchedule: # [string] [required] Cron schedule - A cron schedule on which to
run this job.
    endpoint: # [string] [required] Search endpoint - REST API used to create a
search.
    outputMode: # [string] [required] Output mode - Format of the returned output
    endpointParams: # [array] Endpoint parameters - Optional request parameters to
send to the endpoint.
      - name: # [string] Name - Parameter name
        value: # [string] Value - JavaScript expression to compute the parameter's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÃ without delimiters (e.g.,Â earliest) are
evaluated as strings.
    endpointHeaders: # [array] Endpoint headers - Optional request headers to send
to the endpoint.
      - name: # [string] Name - Header Name
        value: # [string] Value - JavaScript expression to compute the header's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÃ without delimiters (e.g.,Â earliest) are
evaluated as strings.
    logLevel: # [string] Log level - Collector runtime log Level (verbosity).
    requestTimeout: # [number] Request timeout (seconds) - HTTP request inactivity
timeout, use 0 to disable
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    keepAliveTime: # [number] Keep Alive Time (seconds) - How often workers should
check in with the scheduler to keep job subscription alive
    maxMissedKeepAlives: # [number] Worker Timeout (periods) - The number of Keep
Alive Time periods before an inactive worker will have its job subscription revoked.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    authType: # [string] Authentication type - Splunk Search authentication type

    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for Basic authentication
    password: # [string] Password - Password for Basic authentication

    # ------------------------------------------------------
```

```
    # -------------- if authType is token ---------------

    token: # [string] Token - Bearer token to include in the authorization header

    # ---------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # ---------------------------------------------------


    # -------------- if authType is textSecret ---------------

    textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret

    # ---------------------------------------------------

    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ---------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
```

```
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  splunk_hec_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    authTokens: # [array] Auth tokens - Shared secrets to be provided by any client
(Authorization: <token>). If empty, unauthed access is permitted
      - token: # [string] Token - Shared secret to be provided by any client
(Authorization: <token>).
        description: # [string] Description - Optional token description
        metadata: # [array] Fields - Fields to add to events referencing this token.
        - name: # [string] Name - Field name
          value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    splunkHecAPI: # [string] [required] Splunk HEC Endpoint - Absolute path on which
to listen for the Splunk HTTP Event Collector API requests. This input supports the
```

```
/event and /raw endpoints.
    metadata: # [array] Fields - Fields to add to every event. May be overridden by
fields added at the token or request level.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    allowedIndexes: # [array of strings] Allowed Indexes - List values allowed in
HEC event index field, allows wildcards. Leave blank to skip validation.
    splunkHecAcks: # [boolean] Splunk HEC Acks - Whether to enable Splunk HEC
acknowledgements
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # -------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  azure_blob_input: # [object]
```

```
    type: # [string] Input Type
    queueName: # [string] Queue - The storage account queue name blob notifications
will be read from. Value must be a JavaScript expression (which can evaluate to a
constant value), enclosed in quotes or backticks. Can be evaluated only at init
time. E.g., referencing a Global Variable: `myQueue-${C.vars.myVar}`
    fileFilter: # [string] Filename filter - Regex matching file names to download
and process. Defaults to: .*
    visibilityTimeout: # [number] Visibility timeout (secs) - The duration (in
seconds) that the received messages are hidden from subsequent retrieve requests
after being retrieved by a ReceiveMessage request.
    numReceivers: # [number] Num receivers - The Number of receiver processes to
run, the higher the number the better throughput at the expense of CPU overhead
    maxMessages: # [number] Max messages - The maximum number of messages to return
in a poll request. Azure storage queues never returns more messages than this value
(however, fewer messages might be returned). Valid values: 1 to 32.
    servicePeriodSecs: # [number] Service period (secs) - The duration (in seconds)
which pollers should be validated and restarted if exited
    skipOnError: # [boolean] Skip file on error - Toggle to Yes to skip files that
trigger a processing error. Defaults to No, which enables retries after processing
errors.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    parquetChunkSizeMB: # [number] Max Parquet chunk size (MB) - Maximum file size
for each Parquet chunk.
    parquetChunkDownloadTimeout: # [number] Parquet chunk download timeout (seconds)
- The maximum time to wait for a Parquet file's chunk to be downloaded. Processing
will end if a required chunk could not be downloaded within the time imposed by this
setting.
    authType: # [string] Authentication method - Enter connection string directly,
or select a stored secret
    connectionString: # [string] Connection string - Enter your Azure Storage
account connection string. If left blank, Stream will fall back to
env.AZURE_STORAGE_CONNECTION_STRING.

    # -------------- if authType is manual ---------------


    # ----------------------------------------------------------

    textSecret: # [string] Connection string (text secret) - Select (or create) a
stored text secret

    # -------------- if authType is secret ---------------


    # ----------------------------------------------------------

    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.
```

```
    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ---------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ---------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  elastic_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
```

```
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    elasticAPI: # [string] [required] Elasticsearch API endpoint - Absolute path on
which to listen for Elasticsearch API requests. Defaults to /. _bulk will be
appended automatically, e.g., /myPath becomes /myPath/_bulk. Requests can then be
made to either /myPath/_bulk or /myPath/<myIndexName>/_bulk. Other entries are faked
as success.
    authType: # [string] Authentication type - Elastic authentication type

    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for Basic authentication
    password: # [string] Password - Password for Basic authentication

    # ------------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # ------------------------------------------------------


    # -------------- if authType is authTokens ---------------

    authTokens: # [array of strings] Token - Bearer tokens to include in the
authorization header

    # ------------------------------------------------------

    apiVersion: # [string] API Version - The API version to use for communicating
with the server.

    # -------------- if apiVersion is custom ---------------

    customAPIVersion: # [string] Custom API Version - Custom version information to
respond to requests

    # ------------------------------------------------------
```

```
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    proxyMode: # [object]
      enabled: # [boolean] Enable Proxy Mode - Enable proxying of non-bulk API
requests to an external Elastic server. Enable this only if you understand the
implications; see docs for more details.

      # -------------- if enabled is true ---------------

      url: # [string] Proxy URL - URL of the Elastic server to proxy non-bulk
requests to, e.g., http://elastic:9200
      removeHeaders: # [array of strings] Remove headers - List of headers to remove
from the request to proxy
      timeoutSec: # [number] Proxy request timeout - Amount of time, in seconds, to
wait for a proxy request to complete before aborting it.
      authType: # [string] Authentication method - Enter credentials directly, or
select a stored secret

      # --------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
```

```
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  confluent_cloud_input: # [object]
    type: # [string] Input Type
    brokers: # [array of strings] Brokers - List of Confluent Cloud brokers to use,
eg. yourAccount.confluent.cloud:9092
    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ------------------------------------------------------

    topics: # [array of strings] [required] Topic - Topic to subscribe to. Warning:
To optimize performance, Cribl suggests subscribing each Kafka Source to only a
single topic.
    groupId: # [string] Group ID - Specifies the consumer group this instance
belongs to, default is 'Cribl'.
    fromBeginning: # [boolean] From beginning - Whether to start reading from
earliest available data, relevant only during initial subscription.
    kafkaSchemaRegistry: # [object] Kafka Schema Registry Authentication
      disabled: # [boolean] Disabled - Enable Schema Registry

      # -------------- if disabled is false ---------------

      schemaRegistryURL: # [string] Schema Registry URL - URL for access to the
Confluent Schema Registry, i.e: http://localhost:8081
      tls: # [object] TLS settings (client side)
        disabled: # [boolean] Disabled

        # -------------- if disabled is false ---------------

        rejectUnauthorized: # [boolean] Validate server certs - Reject certs that
are not authorized by a CA in the CA certificate path, or by another trusted CA
```

```
(e.g., the system's CA). Defaults to No.
        servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
        certificateName: # [string] Certificate name - The name of the predefined
certificate.
        caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
        privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
        certPath: # [string] Certificate path (mutual auth) - Path on client in
which to find certificates to use. PEM format. Can reference $ENV_VARS.
        passphrase: # [string] Passphrase - Passphrase to use to decrypt private
key.
        minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
        maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

        # ------------------------------------------------------


      # -------------------------------------------------------

    connectionTimeout: # [number] Connection timeout (ms) - Maximum time to wait for
a successful connection.
    requestTimeout: # [number] Request timeout (ms) - Maximum time to wait for a
successful request.
    sasl: # [object] Authentication - Authentication parameters to use when
connecting to brokers. Using TLS is highly recommended.
      disabled: # [boolean] Disabled - Enable Authentication

      # -------------- if disabled is false ---------------

      mechanism: # [string] SASL mechanism - SASL authentication mechanism to use.

      # ------------------------------------------------------

    sessionTimeout: # [number] Session timeout (ms) -
      Timeout used to detect client failures when using Kafka's group management
facilities.
      If the client sends the broker no heartbeats before this timeout expires,
      the broker will remove this client from the group, and will initiate a
rebalance.
      Value must be between the broker's configured group.min.session.timeout.ms and
group.max.session.timeout.ms.
      See details [here]
(https://kafka.apache.org/documentation/#consumerconfigs_session.timeout.ms).
    rebalanceTimeout: # [number] Rebalance timeout (ms) -
      Maximum allowed time for each worker to join the group after a rebalance has
begun.
      If the timeout is exceeded, the coordinator broker will remove the worker from
the group.
      See details [here]
(https://kafka.apache.org/documentation/#connectconfigs_rebalance.timeout.ms).
    heartbeatInterval: # [number] Heartbeat interval (ms) -
      Expected time between heartbeats to the consumer coordinator when using
Kafka's group management facilities.
      Value must be lower than sessionTimeout, and typically should not exceed 1/3
of the sessionTimeout value.
      See details [here]
```

```
(https://kafka.apache.org/documentation/#consumerconfigs_heartbeat.interval.ms).
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # --------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  grafana_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------
```

```
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    prometheusAPI: # [string] Remote Write API endpoint - Absolute path on which to
listen for Grafana Agent's Remote Write requests. Defaults to /api/prom/push, which
will expand as: http://<yourâupstreamâURL>:<yourâport>/api/prom/push.
    lokiAPI: # [string] Logs API endpoint - Absolute path on which to listen for
Loki logs requests. Defaults to /loki/api/v1/push, which will (in this example)
expand as: 'http://<yourâupstreamâURL>:<yourâport>/loki/api/v1/push'.
    keepAliveTimeout: # [number] Keep alive timeout (seconds) - Maximum time to wait
for additional data, after the last response was sent, before closing a socket
connection. This can be very useful when Grafana Agent remote write's request
frequency is high so, reusing connections, would help mitigating the cost of
creating a new connection per request. Note that Grafana Agent's embedded Prometheus
would attempt to keep connections open for up to 5 minutes.
    prometheusAuth: # [object]
      authType: # [string] Authentication type - Remote Write authentication type

      # -------------- if authType is basic ---------------

      username: # [string] Username - Username for Basic authentication
      password: # [string] Password - Password for Basic authentication

      # ------------------------------------------------------


      # -------------- if authType is token ---------------

      token: # [string] Token - Bearer token to include in the authorization header

      # ------------------------------------------------------
```

```
      # -------------- if authType is credentialsSecret ---------------

      credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

      # ----------------------------------------------------------


      # -------------- if authType is textSecret ---------------

      textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret

      # ----------------------------------------------------------

    lokiAuth: # [object]
      authType: # [string] Authentication type - Loki logs authentication type

      # -------------- if authType is basic ---------------

      username: # [string] Username - Username for Basic authentication
      password: # [string] Password - Password for Basic authentication

      # ----------------------------------------------------------


      # -------------- if authType is token ---------------

      token: # [string] Token - Bearer token to include in the authorization header

      # ----------------------------------------------------------


      # -------------- if authType is credentialsSecret ---------------

      credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

      # ----------------------------------------------------------


      # -------------- if authType is textSecret ---------------

      textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret

      # ----------------------------------------------------------

    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------
```

```
    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  loki_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
```

```
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    lokiAPI: # [string] [required] Logs API endpoint - Absolute path on which to
listen for Loki logs requests. Defaults to /loki/api/v1/push, which will (in this
example) expand as: 'http://<yourâupstreamâURL>:<yourâport>/loki/api/v1/push'.
    authType: # [string] Authentication type - Loki logs authentication type

    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for Basic authentication
    password: # [string] Password - Password for Basic authentication

    # -------------------------------------------------------


    # -------------- if authType is token ---------------

    token: # [string] Token - Bearer token to include in the authorization header

    # -------------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # -------------------------------------------------------


    # -------------- if authType is textSecret ---------------

    textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret

    # -------------------------------------------------------

    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
```

```
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # --------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  prometheus_rw_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
```

```
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # -------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    prometheusAPI: # [string] [required] Remote Write API endpoint - Absolute path
on which to listen for Prometheus requests. Defaults to /write, which will expand
as: http://<yourâupstreamâURL>:<yourâport>/write.
    keepAliveTimeout: # [number] Keep alive timeout (seconds) - Maximum time to wait
for additional data, after the last response was sent, before closing a socket
connection. This can be very useful when Prometheus remote write's request frequency
is high so, reusing connections, would help mitigating the cost of creating a new
connection per request. Note that Prometheus would attempt to keep connections open
for up to 5 minutes.
    authType: # [string] Authentication type - Remote Write authentication type

    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for Basic authentication
    password: # [string] Password - Password for Basic authentication

    # -------------------------------------------------------


    # -------------- if authType is token ---------------

    token: # [string] Token - Bearer token to include in the authorization header

    # -------------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # -------------------------------------------------------


    # -------------- if authType is textSecret ---------------

    textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret
```

```
    # ------------------------------------------------------

    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  prometheus_input: # [object]
    dimensionList: # [array of strings] Extra Dimensions - Other dimensions to
include in events
    discoveryType: # [string] Discovery Type - Target discovery mechanism. Use
static to manually enter a list of targets.

    # -------------- if discoveryType is static ---------------

    targetList: # [array of strings] Targets - List of Prometheus targets to pull
```

```
metrics from. Values can be in URL or host[:port] format. For example:
http://localhost:9090/metrics, localhost:9090, or localhost. In cases where just
host[:port] is specified, the endpoint will resolve to 'http://host[:port]/metrics'.

    # ------------------------------------------------------


    # -------------- if discoveryType is dns ---------------

    nameList: # [array] DNS Names - List of DNS names to resolve
    recordType: # [string] Record Type - DNS Record type to resolve
    scrapeProtocol: # [string] Metrics Protocol - Protocol to use when collecting
metrics
    scrapePath: # [string] Metrics Path - Path to use when collecting metrics from
discovered targets

    # ------------------------------------------------------


    # -------------- if discoveryType is ec2 ---------------

    usePublicIp: # [boolean] Use Public IP - Use public IP address for discovered
targets. Set to false if the private IP address should be used.
    scrapeProtocol: # [string] Metrics Protocol - Protocol to use when collecting
metrics
    scrapePort: # [number] Metrics Port - The port number in the metrics URL for
discovered targets.
    scrapePath: # [string] Metrics Path - Path to use when collecting metrics from
discovered targets
    searchFilter: # [array] Search Filter - EC2 Instance Search Filter
      - Name: # [string] Filter Name - Search filter attribute name, see:
https://docs.aws.amazon.com/AWSEC2/latest/APIReference/API_DescribeInstances.html
for more information. Attributes can be manually entered if not present in the drop
down list
        Values: # [array of strings] Filter Values - Search Filter Values, if empty
only "running" EC2 instances will be returned
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method. Choose Auto to use IAM roles.
    awsSecretKey: # [string] Secret key - Secret key
    region: # [string] Region - Region where the EC2 is located
    endpoint: # [string] Endpoint - EC2 service endpoint. If empty, defaults to AWS'
Region-specific endpoint. Otherwise, it must point to EC2-compatible endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing EC2 requests.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    enableAssumeRole: # [boolean] Enable for EC2 - Use Assume Role credentials to
access EC2
    assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume
    assumeRoleExternalId: # [string] External ID - External ID to use when assuming
role

    # ------------------------------------------------------

    interval: # [number] Poll Interval - How often in minutes to scrape targets for
metrics, 60 must be evenly divisible by the value or save will fail.
```

```
    logLevel: # [string] [required] Log Level - Collector runtime Log Level
    keepAliveTime: # [number] Keep Alive Time (seconds) - How often workers should
check in with the scheduler to keep job subscription alive
    maxMissedKeepAlives: # [number] Worker Timeout (periods) - The number of Keep
Alive Time periods before an inactive worker will have its job subscription revoked.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    authType: # [string] Authentication method - Enter credentials directly, or
select a stored secret
    username: # [string] Username - Username for Prometheus Basic authentication
    password: # [string] Password - Password for Prometheus Basic authentication

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
```

```
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  office365_mgmt_input: # [object]
    type: # [string] Input Type
    tenantId: # [string] Tenant ID - Office 365 Azure Tenant ID
    appId: # [string] [required] App ID - Office 365 Azure Application ID
    timeout: # [number] Timeout (secs) - HTTP request inactivity timeout, use 0 to
disable
    keepAliveTime: # [number] Keep Alive Time (seconds) - How often workers should
check in with the scheduler to keep job subscription alive
    maxMissedKeepAlives: # [number] Worker Timeout (periods) - The number of Keep
Alive Time periods before an inactive worker will have its job subscription revoked.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    planType: # [string] [required] Subscription Plan - Office 365 subscription plan
for your organization, typically Enterprise
    publisherIdentifier: # [string] Publisher Identifier - Optional Publisher
Identifier to use in API requests, defaults to tenant id if not defined. For more
information see [here](https://docs.microsoft.com/en-us/office/office-365-
management-api/office-365-management-activity-api-reference#start-a-subscription)
    contentConfig: # [array] Content Types - Enable Office 365 Management Activity
API content types and polling intervals. Polling intervals are used to set up search
date range and cron schedule, e.g.: */${interval} * * * *. Because of this,
intervals entered must be evenly divisible by 60 to give a predictable schedule.
      - contentType: # [string] Content Type - Office 365 Management Activity API
Content Type
        description: # [string] Interval Description - If interval type is minutes
the value entered must evenly divisible by 60 or save will fail
        interval: # [number] Interval
        logLevel: # [string] Log Level - Collector runtime Log Level
        enabled: # [boolean] Enabled
    authType: # [string] Authentication method - Enter client secret directly, or
select a stored secret
    clientSecret: # [string] Client secret - Office 365 Azure client secret

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] Client secret (text secret) - Select (or create) a stored
text secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------
```

```
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # --------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  office365_service_input: # [object]
    type: # [string] Input Type
    tenantId: # [string] Tenant ID - Office 365 Azure Tenant ID
    appId: # [string] [required] App ID - Office 365 Azure Application ID
    timeout: # [number] Timeout (secs) - HTTP request inactivity timeout, use 0 to
disable
    keepAliveTime: # [number] Keep Alive Time (seconds) - How often workers should
check in with the scheduler to keep job subscription alive
    maxMissedKeepAlives: # [number] Worker Timeout (periods) - The number of Keep
Alive Time periods before an inactive worker will have its job subscription revoked.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
```

```
    contentConfig: # [array] Content Types - Enable Office 365 Service Communication
API content types and polling intervals. Polling intervals are used to set up search
date range and cron schedule, e.g.: */${interval} * * * *. Because of this,
intervals entered for current and historical status must be evenly divisible by 60
to give a predictable schedule.
      - contentType: # [string] Content Type - Office 365 Services API Content Type
        description: # [string] Interval Description - If interval type is minutes
the value entered must evenly divisible by 60 or save will fail
        interval: # [number] Interval
        logLevel: # [string] Log Level - Collector runtime Log Level
        enabled: # [boolean] Enabled
    authType: # [string] Authentication method - Enter client secret directly, or
select a stored secret
    clientSecret: # [string] Client secret - Office 365 Azure client secret

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] Client secret (text secret) - Select (or create) a stored
text secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
```

```
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  office365_msg_trace_input: # [object]
    url: # [string] Report URL - URL to use when retrieving report data.
    interval: # [number] [required] Poll interval - How often (in minutes) to run
the report. Must divide evenly into 60 minutes to create a predictable schedule, or
Save will fail.
    startDate: # [string] Date range start - Backward offset for the search range's
head. (E.g.: -3h@h) Message Trace data is delayed; this parameter (with Date range
end) compensates for delay and gaps.
    endDate: # [string] Date range end - Backward offset for the search range's
tail. (E.g.: -2h@h) Message Trace data is delayed; this parameter (with Date range
start) compensates for delay and gaps.
    logLevel: # [string] Log level - Log Level (verbosity) for collection runtime
behavior.
    timeout: # [number] Timeout (secs) - HTTP request inactivity timeout. Maximum is
2400 (40 minutes); enter 0 to wait indefinitely.
    disableTimeFilter: # [boolean] Disable time filter - Disables time filtering of
events when a date range is specified.
    authType: # [string] Authentication method - Select authentication method.

    # -------------- if authType is manual ---------------

    username: # [string] Username - Username to run Message Trace API call.
    password: # [string] Password - Password to run Message Trace API call.

    # ------------------------------------------------------


    # -------------- if authType is secret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials.

    # ------------------------------------------------------


    # -------------- if authType is oauth ---------------

    clientSecret: # [string] Client secret - client_secret to pass in the OAuth
request parameter.
    tenantId: # [string] Tenant identifier - Directory ID (tenant identifier) in
Azure Active Directory.
    clientId: # [string] Client ID - client_id to pass in the OAuth request
parameter.
    resource: # [string] Resource - Resource to pass in the OAuth request parameter.

    # ------------------------------------------------------
```

```
    # -------------- if authType is oauthSecret ---------------

    textSecret: # [string] Client secret - Select (or create) a secret that
references your client_secret to pass in the OAuth request parameter.
    tenantId: # [string] Tenant identifier - Directory ID (tenant identifier) in
Azure Active Directory.
    clientId: # [string] Client ID - client_id to pass in the OAuth request
parameter.
    resource: # [string] Resource - Resource to pass in the OAuth request parameter.

    # ----------------------------------------------------------

    keepAliveTime: # [number] Keep Alive Time (seconds) - How often workers should
check in with the scheduler to keep job subscription alive
    maxMissedKeepAlives: # [number] Worker Timeout (periods) - The number of Keep
Alive Time periods before an inactive worker will have its job subscription revoked.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ----------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
```

```
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  eventhub_input: # [object]
    type: # [string] Input Type
    brokers: # [array of strings] Brokers - List of Event Hubs Kafka brokers to
connect to, e.g., yourdomain.servicebus.windows.net:9093. The hostname can be found
in the host portion of the primary or secondary connection string in Shared Access
Policies.
    topics: # [array of strings] [required] Event Hub name - The name of the Event
Hub (a.k.a. Kafka topic) to subscribe to. Warning: To optimize performance, Cribl
suggests subscribing each Event Hubs Source to only a single topic.
    groupId: # [string] Group ID - Specifies the consumer group this instance
belongs to, default is 'Cribl'.
    fromBeginning: # [boolean] From beginning - Whether to start reading from
earliest available data, relevant only during initial subscription.
    connectionTimeout: # [number] Connection timeout (ms) - Maximum time to wait for
a successful connection.
    requestTimeout: # [number] Request timeout (ms) - Maximum time to wait for a
successful request.
    sasl: # [object] Authentication - Authentication parameters to use when
connecting to brokers. Using TLS is highly recommended.
      disabled: # [boolean] Disabled - Enable authentication.

      # -------------- if disabled is false ---------------

      mechanism: # [string] SASL mechanism - SASL authentication mechanism to use.
PLAIN is the only mechanism currently supported for Event Hubs Kafka brokers.
      username: # [string] Username - The username for authentication. For Event
Hubs, this should always be $ConnectionString.
      authType: # [string] Authentication method - Enter password directly, or
select a stored secret

      # ------------------------------------------------------

    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - For Event Hubs, this
should always be false.

      # ------------------------------------------------------

    sessionTimeout: # [number] Session timeout (ms) -
      Timeout (a.k.a session.timeout.ms in Kafka domain) used to detect client
failures when using Kafka's group management facilities.
      If the client sends the broker no heartbeats before this timeout expires, the
broker will remove this client from the group, and will initiate a rebalance.
      Value must be lower than rebalanceTimeout.
      See details [here](https://github.com/Azure/azure-event-hubs-for-
kafka/blob/master/CONFIGURATION.md).
    rebalanceTimeout: # [number] Rebalance timeout (ms) -
      Maximum allowed time (a.k.a rebalance.timeout.ms in Kafka domain) for each
worker to join the group after a rebalance has begun.
```

```
      If the timeout is exceeded, the coordinator broker will remove the worker from
the group.
      See details [here](https://github.com/Azure/azure-event-hubs-for-
kafka/blob/master/CONFIGURATION.md).
    heartbeatInterval: # [number] Heartbeat interval (ms) -
      Expected time (a.k.a heartbeat.interval.ms in Kafka domain) between heartbeats
to the consumer coordinator when using Kafka's group management facilities.
      Value must be lower than sessionTimeout, and typically should not exceed 1/3
of the sessionTimeout value.
      See details [here](https://github.com/Azure/azure-event-hubs-for-
kafka/blob/master/CONFIGURATION.md).
    minimizeDuplicates: # [boolean] Minimize duplicates - Enable feature to minimize
duplicate events by only starting one consumer for each topic partition.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------
```

```
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  exec_input: # [object]
    disabled: # [boolean] Disabled - Enable/disable this input
    command: # [string] Command - Command to execute; supports Bourne shell syntax
    retries: # [number] Max retries - Maximum number of retry attempts in the event
that the command fails.
    scheduleType: # [string] Schedule type - Select a schedule type; either an
interval (in seconds) or a cron-style schedule.

    # -------------- if scheduleType is interval ---------------

    interval: # [number] Interval - Interval between command executions in seconds.

    # -----------------------------------------------------


    # -------------- if scheduleType is cronSchedule ---------------

    cronSchedule: # [string] Schedule - Cron schedule to execute the command on.

    # -----------------------------------------------------

    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    type: # [string] Input Type
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -----------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
```

```
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  firehose_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    authTokens: # [array of strings] Auth tokens - Shared secrets to be provided by
any client (Authorization: <token>). If empty, unauthed access is permitted.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
```

```
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # --------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  google_pubsub_input: # [object]
    type: # [string] Input Type
    topicName: # [string] Topic ID - ID of the topic to receive events from.
    subscriptionName: # [string] [required] Subscription ID - ID of the subscription
to use when receiving events.
    createTopic: # [boolean] Create topic - If enabled, create topic if it does not
exist
    createSubscription: # [boolean] Create subscription - If enabled, create
subscription if it does not exist

    # -------------- if createSubscription is true ---------------
```

```
    orderedDelivery: # [boolean] Ordered delivery - If enabled, receive events in
the order they were added to the queue. For this to work correctly, the process
sending events must have ordering enabled.

    # ------------------------------------------------------

    region: # [string] Region - Region to retrieve messages from. Select 'default'
to allow Google to auto-select the nearest region. When using ordered delivery, the
selected region must be allowed by message storage policy.
    googleAuthMethod: # [string] Authentication Method - Google authentication
method. Choose Auto to use environment variables PUBSUB_PROJECT and
PUBSUB_CREDENTIALS.

    # -------------- if googleAuthMethod is manual ---------------

    serviceAccountCredentials: # [string] Service account credentials - Contents of
service account credentials (JSON keys) file downloaded from Google Cloud. To upload
a file, click the upload button at this field's upper right. As an alternative, you
can use environment variables (see [here](https://googleapis.dev/ruby/google-cloud-
pubsub/latest/file.AUTHENTICATION.html)).

    # ------------------------------------------------------


    # -------------- if googleAuthMethod is secret ---------------

    secret: # [string] Service account credentials (text secret) - Select (or
create) a stored text secret

    # ------------------------------------------------------

    maxBacklog: # [number] Max backlog - If Destination exerts backpressure, this
setting limits how many inbound events Stream will queue for processing before it
stops retrieving events.
    requestTimeout: # [number] Request timeout (ms) - Pull request timeout, in
milliseconds.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------
```

```
    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  cribl_input: # [object]
    type: # [string] Input Type
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
```

```
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  cribl_tcp_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    maxActiveCxn: # [number] Max Active Connections - Maximum number of active
connections allowed per Worker Process, use 0 for unlimited
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------
```

```
    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  cribl_http_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    authTokens: # [array of strings] Auth tokens - Shared secrets to be provided by
any client (Authorization: <token>). If empty, unauthed access is permitted.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
```

```
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ----------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ----------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
```

```
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  tcpjson_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    ipWhitelistRegex: # [string] IP Allowlist Regex - Regex matching IP addresses
that are allowed to establish a connection.
    maxActiveCxn: # [number] Max Active Connections - Maximum number of active
connections allowed per Worker Process, use 0 for unlimited
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token
    authToken: # [string] Auth token - Shared secret to be provided by any client
(in authToken header field). If empty, unauthed access is permitted.

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
```

```
text secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  system_metrics_input: # [object]
    interval: # [number] Polling interval - Time, in seconds, between consecutive
metric collections.
    host: # [object]
      mode: # [string]  - Select level of detail for host metrics

      # -------------- if mode is custom ---------------

      custom: # [object]
```

```
        system: # [object]
          mode: # [string]  - Select the level of details for system metrics

          # -------------- if mode is custom ---------------

          processes: # [boolean] Process metrics - Generate metrics for the numbers
of processes in various states

          # ------------------------------------------------------

        cpu: # [object]
          mode: # [string]  - Select the level of details for CPU metrics

          # -------------- if mode is custom ---------------

          perCpu: # [boolean] Per CPU metrics - Generate metrics for each CPU
          detail: # [boolean] Detailed metrics - Generate metrics for all CPU states
          time: # [boolean] CPU time metrics - Generate raw, monotonic CPU time
counters

          # ------------------------------------------------------

        memory: # [object]
          mode: # [string]  - Select the level of details for memory metrics

          # -------------- if mode is custom ---------------

          detail: # [boolean] Detailed metrics - Generate metrics for all memory
states

          # ------------------------------------------------------

        network: # [object]
          mode: # [string]  - Select the level of details for network metrics

          # -------------- if mode is custom ---------------

          devices: # [array of strings] Interface filter - Network interfaces to
include/exclude. E.g.: eth0, !lo, etc. All interfaces are included if this list is
empty.
          perInterface: # [boolean] Per interface metrics - Generate separate
metrics for each interface
          detail: # [boolean] Detailed metrics - Generate full network metrics

          # ------------------------------------------------------

        disk: # [object]
          mode: # [string]  - Select the level of details for disk metrics

          # -------------- if mode is custom ---------------

          devices: # [array of strings] Device filter - Block devices to
include/exclude. E.g.: sda*, !loop*, etc. Wildcards and ! (not) operators are
supported. All devices are included if this list is empty.
          mountpoints: # [array of strings] Mountpoint filter - Filesystem
mountpoints to include/exclude. E.g.: /, /home, !/proc*, !/tmp, etc. Wildcards and !
(not) operators are supported. All mountpoints are included if this list is empty.
          fstypes: # [array of strings] Filesystem type filter - Filesystem types to
include/exclude. E.g.: ext4, !*tmpfs, !squashfs, etc. Wildcards and ! (not)
operators are supported. All types are included if this list is empty.
```

```
          perDevice: # [boolean] Per device metrics - Generate separate metrics for
each device
          detail: # [boolean] Detailed metrics - Generate full disk metrics

          # ------------------------------------------------------


      # ------------------------------------------------------

    container: # [object]
      mode: # [string]  - Select the level of detail for container metrics

      # -------------- if mode is basic ---------------

      dockerSocket: # [array of strings] Docker socket - Full paths for Docker's
UNIX-domain socket
      dockerTimeout: # [number] Docker timeout - Timeout, in seconds, for the Docker
API

      # ------------------------------------------------------


      # -------------- if mode is all ---------------

      dockerSocket: # [array of strings] Docker socket - Full paths for Docker's
UNIX-domain socket
      dockerTimeout: # [number] Docker timeout - Timeout, in seconds, for the Docker
API

      # ------------------------------------------------------


      # -------------- if mode is custom ---------------

      filters: # [array] Container Filters - Containers matching any of these will
be included. All are included if this is empty.
        - expr: # [string] Expression
      allContainers: # [boolean] All containers - Include stopped and paused
containers
      perDevice: # [boolean] Per device metrics - Generate separate metrics for each
device
      detail: # [boolean] Detailed metrics - Generate full container metrics
      dockerSocket: # [array of strings] Docker socket - Full paths for Docker's
UNIX-domain socket
      dockerTimeout: # [number] Docker timeout - Timeout, in seconds, for the Docker
API

      # ------------------------------------------------------

    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    persistence: # [object] persistence
      enable: # [boolean] Enable disk persistence - Persist metrics on disk

      # -------------- if enable is true ---------------

      timeWindow: # [string] Bucket time span - Time span for each file bucket
      maxDataSize: # [string] Max data size - Maximum disk space allowed to be
```

```
consumed (e.g., 420MB or 4GB). Once reached, older data will be deleted.
      maxDataTime: # [string] Max data age - Maximum amount of time to retain data
(e.g., 2h or 4d). Once reached, older data will be deleted.
      compress: # [string] Compression - Select data compression format. Optional.
      destPath: # [string] Path location - Path to use to write metrics. Defaults to
$CRIBL_HOME/state/<id>`

      # ------------------------------------------------------

    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # -------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  system_state_input: # [object]
    interval: # [number] Polling interval - Time, in seconds, between consecutive
state collections.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
```

```
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    collectors: # [object]
      hostsfile: # [object]
        enable: # [boolean] Enabled
    persistence: # [object]
      enable: # [boolean] Enable disk persistence - Persist metrics on disk

      # -------------- if enable is true ---------------

      timeWindow: # [string] Bucket time span - Time span for each file bucket
      maxDataSize: # [string] Max data size - Maximum disk space allowed to be
consumed (e.g., 420MB or 4GB). Once reached, older data will be deleted.
      maxDataTime: # [string] Max data age - Maximum amount of time to retain data
(e.g., 2h or 4d). Once reached, older data will be deleted.
      compress: # [string] Compression - Select data compression format. Optional.
      destPath: # [string] Path location - Path to use to write metrics. Defaults to
$CRIBL_HOME/state/<id>`

      # ------------------------------------------------------

    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
```

```
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  windows_metrics_input: # [object]
    interval: # [number] Polling interval - Time, in seconds, between consecutive
metric collections.
    host: # [object]
      mode: # [string]  - Select level of detail for host metrics

      # -------------- if mode is custom ---------------

      custom: # [object]
        system: # [object]
          mode: # [string]  - Select the level of details for system metrics

          # -------------- if mode is custom ---------------

          detail: # [boolean] Detailed metrics - Generate metrics for all system
information

          # ------------------------------------------------------

        cpu: # [object]
          mode: # [string]  - Select the level of details for CPU metrics

          # -------------- if mode is custom ---------------

          perCpu: # [boolean] Per CPU metrics - Generate metrics for each CPU
          detail: # [boolean] Detailed metrics - Generate metrics for all CPU states
          time: # [boolean] CPU time metrics - Generate raw, monotonic CPU time
counters

          # ------------------------------------------------------

        memory: # [object]
          mode: # [string]  - Select the level of details for memory metrics

          # -------------- if mode is custom ---------------

          detail: # [boolean] Detailed metrics - Generate metrics for all memory
states

          # ------------------------------------------------------

        network: # [object]
          mode: # [string]  - Select the level of details for network metrics

          # -------------- if mode is custom ---------------

          devices: # [array of strings] Interface filter - Network interfaces to
include/exclude. All interfaces are included if this list is empty.
          perInterface: # [boolean] Per interface metrics - Generate separate
metrics for each interface
          detail: # [boolean] Detailed metrics - Generate full network metrics

          # ------------------------------------------------------
```

```
        disk: # [object]
          mode: # [string]  - Select the level of details for disk metrics

          # -------------- if mode is custom ---------------

          volumes: # [array of strings] Volume filter - Windows volumes to
include/exclude. E.g.: C:, !E:, etc. Wildcards and ! (not) operators are supported.
All volumes are included if this list is empty.
          perVolume: # [boolean] Per volume metrics - Generate separate metrics for
each volume

          # -----------------------------------------------------


      # -------------------------------------------------------

    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    persistence: # [object] persistence
      enable: # [boolean] Enable disk persistence - Persist metrics on disk

      # -------------- if enable is true ---------------

      timeWindow: # [string] Bucket time span - Time span for each file bucket
      maxDataSize: # [string] Max data size - Maximum disk space allowed to be
consumed (e.g., 420MB or 4GB). Once reached, older data will be deleted.
      maxDataTime: # [string] Max data age - Maximum amount of time to retain data
(e.g., 2h or 4d). Once reached, older data will be deleted.
      compress: # [string] Compression - Select data compression format. Optional.
      destPath: # [string] Path location - Path to use to write metrics. Defaults to
$CRIBL_HOME/state/<id>`

      # -------------------------------------------------------

    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -----------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
```

```
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  crowdstrike_input: # [object]
    type: # [string] Input Type
    queueName: # [string] Queue - The name, URL, or ARN of the SQS queue to read
notifications from. When a non-AWS URL is specified, format must be:
'{url}/myQueueName'. E.g., 'https://host:port/myQueueName'. Value must be a
JavaScript expression (which can evaluate to a constant value), enclosed in quotes
or backticks. Can be evaluated only at init time. E.g., referencing a Global
Variable: `https://host:port/myQueue-${C.vars.myVar}`.
    fileFilter: # [string] Filename filter - Regex matching file names to download
and process. Defaults to: .*
    awsAccountId: # [string] AWS Account ID - SQS queue owner's AWS account ID.
Leave empty if SQS queue is in same AWS account.
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method. Choose Auto to use IAM roles.

    # -------------- if awsAuthenticationMethod is manual ---------------

    awsApiKey: # [string] Access key - Access key

    # ------------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
references your access key and secret key.

    # ------------------------------------------------------

    awsSecretKey: # [string] Secret key - Secret key
    region: # [string] Region - AWS Region where the S3 bucket and SQS queue are
located. Required, unless the Queue entry is a URL or ARN that includes a Region.
    endpoint: # [string] Endpoint - S3 service endpoint. If empty, defaults to AWS'
Region-specific endpoint. Otherwise, it must point to S3-compatible endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing S3 requests.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
```

```
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    maxMessages: # [number] Max Messages - The maximum number of messages SQS should
return in a poll request. Amazon SQS never returns more messages than this value
(however, fewer messages might be returned). Valid values: 1 to 10.
    visibilityTimeout: # [number] Visibility timeout seconds - The duration (in
seconds) that received messages are hidden from subsequent retrieve requests, after
being retrieved by a ReceiveMessage request. This value also automatically extends
this duration, to prevent it from expiring before processing completes.
    numReceivers: # [number] Num receivers - The Number of receiver processes to
run, the higher the number the better throughput at the expense of CPU overhead
    socketTimeout: # [number] Socket timeout - Socket inactivity timeout (in
seconds). Increase this value if timeouts occur due to backpressure.
    skipOnError: # [boolean] Skip file on error - Toggle to Yes to skip files that
trigger a processing error. Defaults to No, which enables retries after processing
errors.
    enableAssumeRole: # [boolean] Enable for S3 - Use Assume Role credentials to
access S3
    assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume
    assumeRoleExternalId: # [string] External ID - External ID to use when assuming
role
    enableSQSAssumeRole: # [boolean] Enable for SQS - Use Assume Role credentials
when accessing SQS.
    preprocess: # [object]
      disabled: # [boolean] Disabled - Enable Custom Command
      command: # [string] Command - Command to feed the data through (via stdin) and
process its output (stdout)
      args: # [array of strings] Arguments - Arguments
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pollTimeout: # [number] Poll timeout (secs) - The amount of time to wait for
events before trying polling again. The lower the number the higher the AWS bill.
The higher the number the longer it will take for the source to react to
configuration changes and system restarts.
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
```

```
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  datadog_agent_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
```

```
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    extractMetrics: # [boolean] Extract metrics - Toggle to Yes to extract each
incoming metric to multiple events, one per data point. This works well when sending
metrics to a statsd-type output. If sending metrics to DatadogHQ or any destination
that accepts arbitrary JSON, leave toggled to No (the default).
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    proxyMode: # [object]
      enabled: # [boolean] Forward API key validation requests - Toggle to Yes to
send key validation requests from Datadog Agent to the Datadog API. If toggled to No
(the default), Stream handles key validation requests by always responding that the
key is valid.
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
```

```
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  datagen_input: # [object]
    samples: # [array] Datagen - List of datagens
      - sample: # [string] Data Generator File - Name of the datagen file
        eventsPerSec: # [number] Events Per Second Per Worker Node - Maximum no. of
events to generate per second per worker node. Defaults to 10.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # -------------------------------------------------------
```

```
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  http_raw_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    authTokens: # [array of strings] Auth tokens - Shared secrets to be provided by
any client (Authorization: <token>). If empty, unauthed access is permitted.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ----------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    allowedPaths: # [array of strings] Allowed URI paths - List of URI paths
accepted by this input, wildcards are supported, e.g /api/v*/hook. Defaults to allow
all.
    allowedMethods: # [array of strings] Allowed HTTP methods - List of HTTP methods
accepted by this input, wildcards are supported, e.g. P*, GET. Defaults to allow
all.
```

```
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # -------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  kinesis_input: # [object]
    type: # [string] Input Type
    streamName: # [string] Stream name - Kinesis stream name to read data from.
    serviceInterval: # [number] Service Period - Time interval in minutes between
consecutive service calls
    shardExpr: # [string] Shard selection expression - A JS expression to be called
with each shardId for the stream, if the expression evalutates to a truthy value the
shard will be processed.
    shardIteratorType: # [string] Shard iterator start - Location at which to start
reading a shard for the first time.
    payloadFormat: # [string] Record data format - Format of data inside the Kinesis
Stream records. Gzip compression is automatically detected.
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method. Choose Auto to use IAM roles.

    # -------------- if awsAuthenticationMethod is manual ---------------
```

```
    awsApiKey: # [string] Access key - Access key

    # ------------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
references your access key and secret key.

    # ------------------------------------------------------


    awsSecretKey: # [string] Secret key - Secret key
    region: # [string] [required] Region - Region where the Kinesis stream is
located
    endpoint: # [string] Endpoint - Kinesis stream service endpoint. If empty,
defaults to AWS' Region-specific endpoint. Otherwise, it must point to Kinesis
stream-compatible endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing Kinesis stream requests.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    enableAssumeRole: # [boolean] Enable for Kinesis stream - Use Assume Role
credentials to access Kinesis stream
    assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume
    assumeRoleExternalId: # [string] External ID - External ID to use when assuming
role
    verifyKPLCheckSums: # [boolean] Verify KPL checksums - Verify Kinesis Producer
Library (KPL) event checksums
    avoidDuplicates: # [boolean] Avoid duplicate records - Yes means: when resuming
streaming from a stored state, Stream will read the next available record, rather
than rereading the last-read record. Enabling this can cause data loss after a
Worker Node's unexpected shutdown or restart.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue
```

```
    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ----------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  logstream_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ----------------------------------------------------

    ipWhitelistRegex: # [string] IP Allowlist Regex - Regex matching IP addresses
that are allowed to establish a connection.
    maxActiveCxn: # [number] Max Active Connections - Maximum number of active
```

```
connections allowed per Worker Process, use 0 for unlimited
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token
    authToken: # [string] Auth token - Shared secret to be provided by any client
(in authToken header field). If empty, unauthed access is permitted.

    # -------------- if authType is manual ---------------


    # -----------------------------------------------------

    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

    # -------------- if authType is secret ---------------


    # -----------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -----------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
```

```
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  criblmetrics_input: # [object]
    type: # [string] Input Type
    prefix: # [string] Metric Name Prefix - A prefix that is applied to the metrics
provided by Cribl Stream
    fullFidelity: # [boolean] Full Fidelity - Include granular metrics.  Disabling
this will drop the following metrics events: `cribl.logstream.host.
(in_bytes,in_events,out_bytes,out_events)`, `cribl.logstream.index.
(in_bytes,in_events,out_bytes,out_events)`, `cribl.logstream.source.
(in_bytes,in_events,out_bytes,out_events)`, `cribl.logstream.sourcetype.
(in_bytes,in_events,out_bytes,out_events)`.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
```

```
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  metrics_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. For IPv4 (all addresses), use the
default '0.0.0.0'. For IPv6, enter '::' (all addresses) or specify an IP address.
    udpPort: # [number] UDP Port - Enter UDP port number to listen on. Not required
if listening on TCP.
    tcpPort: # [number] TCP Port - Enter TCP port number to listen on. Not required
if listening on UDP.
    maxBufferSize: # [number] Max Buffer Size (events) - Maximum number of events to
buffer when downstream is blocking. Only applies to UDP.
    ipWhitelistRegex: # [string] IP Allowlist Regex - Regex matching IP addresses
that are allowed to send data
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------

    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
```

```
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  s3_input: # [object]
    type: # [string] Input Type
    queueName: # [string] Queue - The name, URL, or ARN of the SQS queue to read
notifications from. When a non-AWS URL is specified, format must be:
'{url}/myQueueName'. E.g., 'https://host:port/myQueueName'. Value must be a
JavaScript expression (which can evaluate to a constant value), enclosed in quotes
or backticks. Can be evaluated only at init time. E.g., referencing a Global
Variable: `https://host:port/myQueue-${C.vars.myVar}`.
    fileFilter: # [string] Filename filter - Regex matching file names to download
and process. Defaults to: .*
    awsAccountId: # [string] AWS Account ID - SQS queue owner's AWS account ID.
Leave empty if SQS queue is in same AWS account.
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method. Choose Auto to use IAM roles.

    # -------------- if awsAuthenticationMethod is manual ---------------

    awsApiKey: # [string] Access key - Access key

    # ------------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
```

```
references your access key and secret key.

    # ------------------------------------------------------

    awsSecretKey: # [string] Secret key - Secret key
    region: # [string] Region - AWS Region where the S3 bucket and SQS queue are
located. Required, unless the Queue entry is a URL or ARN that includes a Region.
    endpoint: # [string] Endpoint - S3 service endpoint. If empty, defaults to AWS'
Region-specific endpoint. Otherwise, it must point to S3-compatible endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing S3 requests.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    maxMessages: # [number] Max Messages - The maximum number of messages SQS should
return in a poll request. Amazon SQS never returns more messages than this value
(however, fewer messages might be returned). Valid values: 1 to 10.
    visibilityTimeout: # [number] Visibility timeout seconds - The duration (in
seconds) that received messages are hidden from subsequent retrieve requests, after
being retrieved by a ReceiveMessage request. This value also automatically extends
this duration, to prevent it from expiring before processing completes.
    numReceivers: # [number] Num receivers - The Number of receiver processes to
run, the higher the number the better throughput at the expense of CPU overhead
    socketTimeout: # [number] Socket timeout - Socket inactivity timeout (in
seconds). Increase this value if timeouts occur due to backpressure.
    skipOnError: # [boolean] Skip file on error - Toggle to Yes to skip files that
trigger a processing error. Defaults to No, which enables retries after processing
errors.
    enableAssumeRole: # [boolean] Enable for S3 - Use Assume Role credentials to
access S3
    assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume
    assumeRoleExternalId: # [string] External ID - External ID to use when assuming
role
    enableSQSAssumeRole: # [boolean] Enable for SQS - Use Assume Role credentials
when accessing SQS.
    preprocess: # [object]
      disabled: # [boolean] Disabled - Enable Custom Command
      command: # [string] Command - Command to feed the data through (via stdin) and
process its output (stdout)
      args: # [array of strings] Arguments - Arguments
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    parquetChunkSizeMB: # [number] Max Parquet chunk size (MB) - Maximum file size
for each Parquet chunk.
    parquetChunkDownloadTimeout: # [number] Parquet chunk download timeout (seconds)
- The maximum time to wait for a Parquet file's chunk to be downloaded. Processing
will end if a required chunk could not be downloaded within the time imposed by this
setting.
    pollTimeout: # [number] Poll timeout (secs) - The amount of time to wait for
events before trying polling again. The lower the number the higher the AWS bill.
```

```
The higher the number the longer it will take for the source to react to
configuration changes and system restarts.
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # --------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  snmp_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. For IPv4 (all addresses), use the
default '0.0.0.0'. For IPv6, enter '::' (all addresses) or specify an IP address.
    port: # [number] [required] UDP Port - UDP port to receive SNMP traps on.
Defaults to 162.
    maxBufferSize: # [number] Max Buffer Size (events) - Maximum number of events to
buffer when downstream is blocking.
    ipWhitelistRegex: # [string] IP Allowlist Regex - Regex matching IP addresses
that are allowed to send data
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
```

```
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ---------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ---------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  open_telemetry_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
```

```
private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.

      # -------------------------------------------------------

    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    activityLogSampleRate: # [number] Activity log sample rate - How often request
activity is logged at the `info` level. A value of 1 would log every request, 10
every 10th request, etc.
    requestTimeout: # [number] Request timeout (seconds) - How long to wait for an
incoming request to complete before aborting it. Use 0 to disable.
    extractSpans: # [boolean] Extract spans - Toggle to Yes to extract each incoming
span to a separate event.
    extractMetrics: # [boolean] Extract metrics - Toggle to Yes to extract each
incoming Gauge or IntGauge metric to multiple events, one per data point.
    maxActiveCxn: # [number] Max active connections - Maximum number of active
connections allowed per Worker Process, use 0 for unlimited
    authType: # [string] Authentication type - OpenTelemetry authentication type

    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for Basic authentication
    password: # [string] Password - Password for Basic authentication

    # -------------------------------------------------------


    # -------------- if authType is token ---------------

    token: # [string] Token - Bearer token to include in the authorization header

    # -------------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # -------------------------------------------------------


    # -------------- if authType is textSecret ---------------

    textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret

    # -------------------------------------------------------
```

```
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # --------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  sqs_input: # [object]
    type: # [string] Input Type
    queueName: # [string] Queue - The name, URL, or ARN of the SQS queue to read
events from. When a non-AWS URL is specified, format must be: '{url}/myQueueName'.
E.g., 'https://host:port/myQueueName'. Value must be a JavaScript expression (which
can evaluate to a constant value), enclosed in quotes or backticks. Can only be
evaluated at init time. E.g. referencing a Global Variable:
`https://host:port/myQueue-${C.vars.myVar}`.
    queueType: # [string] [required] Queue Type - The queue type used (or created).
Defaults to Standard

    # -------------- if queueType is standard ---------------
```

```
    numReceivers: # [number] Num receivers - The Number of receiver processes to
run, the higher the number the better throughput at the expense of CPU overhead

    # ------------------------------------------------------

    awsAccountId: # [string] AWS Account ID - SQS queue owner's AWS account ID.
Leave empty if SQS queue is in same AWS account.
    createQueue: # [boolean] Create Queue - Create queue if it does not exist.
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method. Choose Auto to use IAM roles.

    # -------------- if awsAuthenticationMethod is manual ---------------

    awsApiKey: # [string] Access key - Access key

    # ------------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
references your access key and secret key.

    # ------------------------------------------------------

    awsSecretKey: # [string] Secret key - Secret key
    region: # [string] Region - AWS Region where the SQS queue is located. Required,
unless the Queue entry is a URL or ARN that includes a Region.
    endpoint: # [string] Endpoint - SQS service endpoint. If empty, defaults to AWS'
Region-specific endpoint. Otherwise, it must point to SQS-compatible endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing SQS requests.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    enableAssumeRole: # [boolean] Enable for SQS - Use Assume Role credentials to
access SQS
    assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume
    assumeRoleExternalId: # [string] External ID - External ID to use when assuming
role
    maxMessages: # [number] Max Messages - The maximum number of messages SQS should
return in a poll request. Amazon SQS never returns more messages than this value
(however, fewer messages might be returned). Valid values: 1 to 10.
    visibilityTimeout: # [number] Visibility Timeout Seconds - The duration (in
seconds) that the received messages are hidden from subsequent retrieve requests
after being retrieved by a ReceiveMessage request.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pollTimeout: # [number] Poll timeout (secs) - The amount of time to wait for
events before trying polling again. The lower the number the higher the AWS bill.
The higher the number the longer it will take for the source to react to
configuration changes and system restarts.
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
```

```
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # --------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  syslog_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. For IPv4 (all addresses), use the
default '0.0.0.0'. For IPv6, enter '::' (all addresses) or specify an IP address.
    udpPort: # [number] UDP port - Enter UDP port number to listen on. Not required
if listening on TCP.
    tcpPort: # [number] TCP port - Enter TCP port number to listen on. Not required
if listening on UDP.
    maxBufferSize: # [number] Max buffer size (events) - Maximum number of events to
buffer when downstream is blocking. Only applies to UDP.
    ipWhitelistRegex: # [string] IP allowlist regex - Regex matching IP addresses
that are allowed to send data
    timestampTimezone: # [string] Default timezone - Timezone to assign to
timestamps without timezone info.
    singleMsgUdpPackets: # [boolean] Single msg per UDP - Whether to treat UDP
packet data received as full syslog message
```

```
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2
    keepFieldsList: # [array of strings] Fields to keep - Wildcard list of fields to
keep from source data, * = ALL (default)
    octetCounting: # [boolean] Octet count framing - Enable if incoming messages use
octet counting per RFC 6587.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ----------------------------------------------------------

    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ----------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
```

```
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  file_input: # [object]
    mode: # [string]  - Choose how to discover files to monitor.

    # -------------- if mode is manual ---------------

    path: # [string] Search path - Directory path to search for files. Environment
variables will be resolved, e.g. $CRIBL_HOME/log/.
    depth: # [number] Max depth - Set how many subdirectories deep to search. Use 0
to search only files in the given path, 1 to also look in its immediate
subdirectories, etc. Leave it empty for unlimited depth.

    # ------------------------------------------------------

    interval: # [number] Polling interval - Time, in seconds, between scanning for
files.
    filenames: # [array of strings] Filename allowlist - The full path of discovered
files are matched against this wildcard list.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------
```

```
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  tcp_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------
```

```
    ipWhitelistRegex: # [string] IP Allowlist Regex - Regex matching IP addresses
that are allowed to establish a connection.
    maxActiveCxn: # [number] Max Active Connections - Maximum number of active
connections allowed per Worker Process, use 0 for unlimited
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    enableHeader: # [boolean] Enable Header - If enabled, client will pass the
header record with every new connection. The header can contain an authToken, and an
object with a list of fields and values to add to every event. These fields can be
used to simplify Event Breaker selection, routing, etc. Header has this format, and
must be followed by a newline: { "authToken" : "myToken", "fields": { "field1":
"value1", "field2": "value2" } }

    # -------------- if enableHeader is true ---------------

    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token

    # ------------------------------------------------------

    preprocess: # [object]
      disabled: # [boolean] Disabled - Enable Custom Command
      command: # [string] Command - Command to feed the data through (via stdin) and
process its output (stdout)
      args: # [array of strings] Arguments - Arguments
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
```

```
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  appscope_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    ipWhitelistRegex: # [string] IP Allowlist Regex - Regex matching IP addresses
that are allowed to establish a connection.
    maxActiveCxn: # [number] Max Active Connections - Maximum number of active
connections allowed per Worker Process, use 0 for unlimited
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    enableUnixPath: # [boolean] UNIX domain socket - Toggle to Yes to specify a
file-backed UNIX domain socket connection, instead of a network host and port.

    # -------------- if enableUnixPath is false ---------------

    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] Port - Port to listen to.
    tls: # [object] TLS settings (server side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] Certificate path - Path on server containing certificates
to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] CA certificate path - Path on server containing CA
certificates to use. PEM format. Can reference $ENV_VARS.
      requestCert: # [boolean] Authenticate client (mutual auth) - Whether to
require clients to present their certificates. Used to perform client authentication
```

```
using SSL certs.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections.

      # ------------------------------------------------------


    # ------------------------------------------------------


    # -------------- if enableUnixPath is true ---------------

    unixSocketPath: # [string] UNIX socket path - Path to the UNIX domain socket to
listen on.
    unixSocketPerms: # [string,number] UNIX socket permissions - Permissions to set
for socket e.g., 777. If empty, falls back to the runtime user's default
permissions.

    # ------------------------------------------------------

    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token
    authToken: # [string] Auth token - Shared secret to be provided by any client
(in authToken header field). If empty, unauthed access is permitted.

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # ------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------
```

```
    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  wef_input: # [object]
    type: # [string] Input Type
    disabled: # [boolean] Disabled - Enable/disable this input
    host: # [string] Address - Address to bind on. Defaults to 0.0.0.0 (all
addresses).
    port: # [number] [required] Port - Port to listen to.
    tls: # [object] [required] mTLS settings
      disabled: # [boolean] Disabled - Enable TLS
      rejectUnauthorized: # [boolean] Validate client certs - Required for WEF
certificate authentication.
      requestCert: # [boolean] Authenticate client - Required for WEF certificate
authentication.
      certificateName: # [string] Certificate name - Name of the predefined
certificate.
      privKeyPath: # [string] Private key path - Path on server containing the
private key to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      certPath: # [string] [required] Certificate path - Path on server containing
certificates to use. PEM format. Can reference $ENV_VARS.
      caPath: # [string] [required] CA certificate path - Path on server containing
CA certificates to use. PEM format. Can reference $ENV_VARS.
      commonNameRegex: # [string] Common name - Regex matching allowable common
names in peer certificates' subject attribute.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to accept
from connections.
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to accept
from connections
    maxActiveReq: # [number] Max active requests - Maximum number of active requests
per Worker Process. Use 0 for unlimited.
    enableProxyHeader: # [boolean] Enable proxy protocol - Enable if the connection
is proxied by a device that supports Proxy Protocol V1 or V2.
    captureHeaders: # [boolean] Capture request headers - Toggle this to Yes to add
request headers to events, in the __headers field.
    caFingerprint: # [string] CA fingerprint override - SHA1 fingerprint expected by
the client, if it does not match the first certificate in the configured CA chain
    allowMachineIdMismatch: # [boolean] Allow MachineID mismatch - Allow events to
```

```
be ingested even if their MachineID does not match the client certificate CN.
    subscriptions: # [array] [required] Subscriptions - Subscriptions to events on
forwarding endpoints.
      - subscriptionName: # [string] Name - Friendly name for this subscription.
        version: # [string] Version - Version UUID for this subscription. If any
subscription parameters are modified, this value will change.
        contentFormat: # [string] Format - Content format in which the endpoint
should deliver events.
        heartbeatInterval: # [number] Heartbeat - Max time (in seconds) between
endpoint checkins before considering it unavailable.
        batchTimeout: # [number] Batch timeout - Interval (in seconds) over which
the endpoint should collect events before sending them to Stream.
        readExistingEvents: # [boolean] Read existing events - Set to Yes if a
newly-subscribed endpoint should send previously existing events. Set to No to only
receive new events
        sendBookmarks: # [boolean] Use bookmarks - If toggled to Yes, @{product}
will keep track of which events have been received, resuming from that point after a
re-subscription. This setting takes precedence over 'Read existing events' -- see
the documentation for details.
        compress: # [boolean] Compression - If toggled to Yes, Stream will receive
compressed events from the source.
        targets: # [array of strings] Targets - Enter the DNS names of the endpoints
that should forward these events. You may use wildcards, for example: *.mydomain.com
        querySelector: # [string] Query builder mode - Select the query builder
mode.
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # --------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
```

```
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  win_event_logs_input: # [object]
    type: # [string] Input Type
    logNames: # [array of strings] Event Logs - Enter the event logs to collect. Run
"Get-WinEvent -ListLog *" in PowerShell to see the available logs.
    readMode: # [string] Read Mode - Read all stored and future event logs, or only
future events.
    interval: # [number] Polling Interval - Time, in seconds, between checking for
new entries.
    batchSize: # [number] Batch Size - Maximum number of event records to read in
one interval.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    disabled: # [boolean] Disabled - Enable/disable this input
    pipeline: # [string] Pipeline - Pipeline to process data from this Source before
sending it through the Routes.
    sendToRoutes: # [boolean]  - Select whether to send data to Routes, or directly
to Destinations.

    # -------------- if sendToRoutes is false ---------------

    connections: # [array] Quick Connections - Direct connections to Destinations,
optionally via a Pipeline or a Pack.
      - pipeline: # [string] Pipeline/Pack - Select Pipeline or Pack. Optional.
        output: # [string] Destination - Select a Destination.

    # -------------------------------------------------------

    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    pqEnabled: # [boolean] Enable Persistent Queue

    # -------------- if pqEnabled is true ---------------

    pq: # [object]
      mode: # [string] Mode - With Smart mode, PQ will write events to the
filesystem only when it detects backpressure from the processing engine.
WithÂ AlwaysÂ On mode, PQ will always write events directly to the queue before
forwarding them to the processing engine.
      maxBufferSize: # [number] Max buffer size - The maximum amount of events to
hold in-memory before dumping the events to disk.
      commitFrequency: # [number] Commit frequency - The number of events to send
downstream before committing that Stream has read them.
      maxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
      maxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
      path: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/inputs/<input-
```

```
id>.
      compress: # [string] Compression - Codec to use to compress the persisted
data.

    # ----------------------------------------------------------

    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
```

13.6.6. instance.yml

Instance configuration is located under `$CRIBL_HOME/local/_system/instance.yml`.

$CRIBL_HOME/local/_system/instance.yml

```
distributed:
    # mode master | worker | single | edge | managed-edge
  mode: master
  master:
    host: 0.0.0.0
    port: 4203
    tls:
      disabled: true
    ipWhitelistRegex: /.&ast;/
    maxActiveCxn: 0
    authToken: criblmaster
    enabledWorkerRemoteAccess: true
    compression: none
    connectionTimeout: 5000
    writeTimeout: 10000
  group: default
  envRegex: /^CRIBL_/
  tags:
       - tag1
       - tag2
       - tag42
```

13.6.7. jobs.yml

`jobs.yml` maintains parameters for configured Collectors, corresponding to those listed on the UI's **Manage Collectors** page. Each collection job is listed according to the pattern shown below.

$CRIBL_HOME/local/cribl/jobs.yml

```
collection_job: # [object]
  workerAffinity: # [boolean] Worker affinity - If enabled tasks are created and run
by the same worker node.
  collector: # [object]
    type: # [string] Collector type - The type of collector to run.

    # -------------- if type is azure_blob ---------------

    conf: # [object] [required]
      outputName: # [string] Auto-populate from - The name of the predefined
Destination that will be used to auto-populate collector settings.
      authType: # [string] Authentication method - Enter authentication data
directly, or select a secret referencing your auth data

      # -------------- if authType is manual ---------------

      connectionString: # [string] Connection string - Enter your Azure storage
account Connection String. If left blank, Cribl Stream will fall back to
env.AZURE_STORAGE_CONNECTION_STRING.

      # -----------------------------------------------------


      # -------------- if authType is secret ---------------

      textSecret: # [string] Connection string (text secret) - Text secret

      # -----------------------------------------------------

      containerName: # [string] Container name - Name of the container to collect
from. This value can be a constant or a JavaScript expression that can only be
evaluated at init time. E.g. referencing a Global Variable:
`myBucket-${C.vars.myVar}`.
      path: # [string] Path - The directory from which to collect data. Templating
is supported, e.g.: myDir/${datacenter}/${host}/${app}/. Time-based tokens are also
supported, e.g.: myOtherDir/${_time:%Y}/${_time:%m}/${_time:%d}/
      extractors: # [array] Path extractors - Allows using template tokens as
context for expressions that enrich discovery results. E.g.: given a template
/path/${epoch}, an extractor under key "epoch" with an expression {date: new
Date(+value*1000)}, will enrich discovery results with a human readable "date" field
        - key: # [string] Token - A token from the template path, e.g.: epoch
          expression: # [string] Extractor expression - JS expression that receives
token under "value" variable, and evaluates to populate event fields, e.g.: {date:
new Date(+value*1000)}
      recurse: # [boolean] Recursive - Whether to recurse through subdirectories.
      maxBatchSize: # [number] Max Batch Size (objects) - Maximum number of metadata
objects to batch before recording as results.

    # -----------------------------------------------------


    # -------------- if type is filesystem ---------------

    conf: # [object] [required]
      outputName: # [string] Auto-populate from - Select a predefined configuration
(e.g., a Destination) to auto-populate collector settings.
      path: # [string] Directory - The directory from which to collect data.
Templating is supported, e.g.: /myDir/${datacenter}/${host}/${app}/. Time-based
tokens are also supported, e.g.: /myOtherDir/${_time:%Y}/${_time:%m}/${_time:%d}/
```

```
      extractors: # [array] Path extractors - Allows using template tokens as
context for expressions that enrich discovery results. E.g.: given a template
/path/${epoch}, an extractor under key "epoch" with an expression {date: new
Date(+value*1000)}, will enrich discovery results with a human readable "date" field
        - key: # [string] Token - A token from the template directory, e.g.: epoch
          expression: # [string] Extractor expression - JS expression that receives
token under "value" variable, and evaluates to populate event fields, e.g.: {date:
new Date(+value*1000)}
      recurse: # [boolean] Recursive - Whether to recurse through subdirectories.
      maxBatchSize: # [number] Max Batch Size (files) - Maximum number of metadata
files to batch before recording as results.

    # -------------------------------------------------------


    # -------------- if type is google_cloud_storage ---------------

    conf: # [object] [required]
      outputName: # [string] Auto-populate from - The name of the predefined
Destination that will be used to auto-populate collector settings.
      bucket: # [string] Bucket name - Name of the bucket to collect from. This
value can be a constant or a JavaScript expression that can only be evaluated at
init time. E.g. referencing a Global Variable: `myBucket-${C.vars.myVar}`.
      path: # [string] Path - The directory from which to collect data. Templating
is supported, e.g.: myDir/${datacenter}/${host}/${app}/. Time-based tokens are also
supported, e.g.: myOtherDir/${_time:%Y}/${_time:%m}/${_time:%d}/
      extractors: # [array] Path extractors - Allows using template tokens as
context for expressions that enrich discovery results. E.g.: given a template
/path/${epoch}, an extractor under key "epoch" with an expression {date: new
Date(+value*1000)}, will enrich discovery results with a human readable "date" field
        - key: # [string] Token - A token from the template path, e.g.: epoch
          expression: # [string] Extractor expression - JS expression that receives
token under "value" variable, and evaluates to populate event fields, e.g.: {date:
new Date(+value*1000)}
      endpoint: # [string] Endpoint - Google Cloud Storage service endpoint. If
empty, the endpoint will be automatically constructed using service credentials.
      disableTimeFilter: # [boolean] Disable time filter - Used to disable collector
event time filtering when a date range is specified.
      recurse: # [boolean] Recursive - Whether to recurse through subdirectories.
      maxBatchSize: # [number] Max Batch Size (objects) - Maximum number of metadata
objects to batch before recording as results.
      authType: # [string] Authentication method - Enter account credentials
manually, or select a secret that references your credentials.

      # -------------- if authType is manual ---------------

      serviceAccountCredentials: # [string] Service account credentials - Contents
of Google Cloud service account credentials (JSON keys) file. To upload a file,
click the upload button at this field's upper right.

      # -------------------------------------------------------


      # -------------- if authType is secret ---------------

      textSecret: # [string] Service account credentials (text secret) - Select (or
create) a stored text secret that references your credentials.

      # -------------------------------------------------------
```

```
    # ------------------------------------------------------


    # -------------- if type is health_check ---------------

    conf: # [object] [required]
      discovery: # [object]
        discoverType: # [string] Discover Type - Defines how task discovery will be
performed. Use None to skip the discovery. Use HTTP Request to make a REST call to
discover tasks. Use Item List to enumerate items for collect to retrieve. Use JSON
Response to manually define discover tasks as a JSON array of objects. Each entry
returned by the discover operation will result in a collect task.

        # -------------- if discoverType is http ---------------

        discoverUrl: # [string] Discover URL - Expression to derive URL to use for
the Discover operation (can be a constant).
        discoverMethod: # [string] Discover method - Discover HTTP method.
        discoverRequestHeaders: # [array] Discover Headers - Optional discover
request headers.
          - name: # [string] Name - Header name.
            value: # [string] Value - JavaScript expression to compute the header
value (can be a constant).
        discoverDataField: # [string] Discover Data Field - Path to field in the
response object which contains discover results (e.g.: level1.name), leave blank if
the result is an array.

        # ------------------------------------------------------


        # -------------- if discoverType is json ---------------

        manualDiscoverResult: # [string] Discover result - Allows hard-coding the
Discover result. Must be a JSON object. Works with the Discover Data field.
        discoverDataField: # [string] Discover data field - Within the response
JSON, name of the field or array element to pull results from. LeaveÂ blank if the
result is an array of values. Sample entry: items, json: { items: [{id: 'first'},
{id: 'second'}] }

        # ------------------------------------------------------


        # -------------- if discoverType is list ---------------

        itemList: # [array of strings] Discover items - Comma-separated list of
items to return from the Discover task. Each item returned will generate a collect
task, and can be referenced using `${id}` in the collect URL, headers, or
parameters.

        # ------------------------------------------------------

      collectUrl: # [string] Health check URL - Expression to derive URL to use for
the health check operation (can be a constant).
      collectMethod: # [string] [required] Health check method - Health check HTTP
method.

      # -------------- if collectMethod is get ---------------

      collectRequestParams: # [array] Health check parameters - Optional health
```

```
check request parameters.
        - name: # [string] Name - Parameter name
          value: # [string] Value - JavaScript expression to compute the parameter
value (can be a constant).

      # ------------------------------------------------------


      # -------------- if collectMethod is post ---------------

      collectRequestParams: # [array] Health check parameters - Optional health
check request parameters.
        - name: # [string] Name - Parameter name.
          value: # [string] Value - JavaScript expression to compute the parameter
value (can be a constant).

      # ------------------------------------------------------


      # -------------- if collectMethod is post_with_body ---------------

      collectBody: # [string] Health check POST Body - Template for POST body to
send with the health check request. You can reference parameters from the Discover
response, using template params of the form: ${variable}.

      # ------------------------------------------------------

      collectRequestHeaders: # [array] Health check headers - Optional health check
request headers.
        - name: # [string] Name - Header Name
          value: # [string] Value - JavaScript expression to compute the header
value (can be a constant).
      authenticateCollect: # [boolean] Authenticate health check - Enable to make
auth health check call.
      authentication: # [string] [required] Authentication - Authentication method
for Discover and Collect REST calls. You can specify API Keyâ□□based authentication
by adding the appropriate CollectÂ headers.

      # -------------- if authentication is basic ---------------

      username: # [string] Username - Basic authentication username
      password: # [string] Password - Basic authentication password

      # ------------------------------------------------------


      # -------------- if authentication is basicSecret ---------------

      credentialsSecret: # [string] Credentials secret - Select (or create) a stored
secret that references your credentials

      # ------------------------------------------------------


      # -------------- if authentication is login ---------------

      loginUrl: # [string] Login URL - URL to use for login API call. This call is
expected to be a POST.
      username: # [string] Username - Login username
      password: # [string] Password - Login password
```

```
      loginBody: # [string] POST Body - Template for POST body to send with login
request, ${username} and ${password} are used to specify location of these
attributes in the message
      tokenRespAttribute: # [string] Token Attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize Expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.
      authRequestHeaders: # [array] Authentication Headers - Optional authentication
request headers.
        - name: # [string] Name - Header name.
          value: # [string] Value - JavaScript expression to compute the header
value (can be a constant).

      # -------------------------------------------------------


      # -------------- if authentication is loginSecret ---------------

      loginUrl: # [string] Login URL - URL to use for login API call, this call is
expected to be a POST.
      credentialsSecret: # [string] Credentials secret - Select (or create) a stored
secret that references your login credentials
      loginBody: # [string] POST Body - Template for POST body to send with login
request, ${username} and ${password} are used to specify location of these
attributes in the message
      tokenRespAttribute: # [string] Token Attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize Expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.
      authRequestHeaders: # [array] Authentication Headers - Optional authentication
request headers.
        - name: # [string] Name - Header name.
          value: # [string] Value - JavaScript expression to compute the header
value (can be a constant).

      # -------------------------------------------------------


      # -------------- if authentication is oauth ---------------

      loginUrl: # [string] Login URL - URL to use for the OAuth API call. This call
is expected to be a POST.
      tokenRespAttribute: # [string] Token attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.
      clientSecretParamName: # [string] Client secret parameter - Parameter name
that contains client secret. Defaults to 'client_secret', and is automatically added
to request parameters.
      clientSecretParamValue: # [string] Client secret value - Secret value to add
to HTTP requests as the 'client secret' parameter. Stored on disk encrypted, and is
automatically added to request parameters
      authRequestParams: # [array] Extra authentication parameters - OAuth request
parameters added to the POST body. The Content-Type header will automatically be set
to application/x-www-form-urlencoded.
        - name: # [string] Name - Parameter name.
          value: # [string] Value - JavaScript expression to compute the parameter's
```

```
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.
      authRequestHeaders: # [array] Authentication headers - Optional authentication
request headers.
        - name: # [string] Name - Header name.
          value: # [string] Value - JavaScript expression to compute the header's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.

      # ------------------------------------------------------


      # -------------- if authentication is oauthSecret ---------------

      loginUrl: # [string] Login URL - URL to use for the OAuth API call. This call
is expected to be a POST.
      tokenRespAttribute: # [string] Token attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.
      clientSecretParamName: # [string] Client secret parameter - Parameter name
that contains client secret. Defaults to 'client_secret', and is automatically added
to request parameters.
      textSecret: # [string] Client secret value (text secret) - Select (or create)
a text secret that contains the client secret's value.
      authRequestParams: # [array] Extra authentication parameters - OAuth request
parameters added to the POST body. The Content-Type header will automatically be set
to application/x-www-form-urlencoded.
        - name: # [string] Name - Parameter name.
          value: # [string] Value - JavaScript expression to compute the parameter's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.
      authRequestHeaders: # [array] Authentication headers - Optional authentication
request headers.
        - name: # [string] Name - Header name.
          value: # [string] Value - JavaScript expression to compute the header's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.

      # ------------------------------------------------------

      timeout: # [number] Request Timeout (secs) - HTTP request inactivity timeout,
use 0 to disable
      defaultBreakers: # [string] Hidden Default Breakers
      safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.

    # ------------------------------------------------------


    # -------------- if type is office365_mgmt ---------------

    conf: # [object] [required]
      plan_type: # [string] Subscription plan - Office 365 subscription plan for
your organization, typically Enterprise
```

```
      tenant_id: # [string] [required] Tenant identifier - Directory ID (tenant
identifier) in Azure Active Directory
      app_id: # [string] [required] Application identifier - Identifier of the
registered application in Azure Active Directory.
      client_secret: # [string] [required] Client secret - Application key of the
registered application.
      publisher_identifier: # [string] Publisher identifier - Optional
PublisherIdentifier to use in API requests, defaults to tenant id if not defined.
      content_type: # [string] [required] Content type - The type of content to
retrieve from the Office 365 management communications API.

    # ------------------------------------------------------


    # -------------- if type is office365_service ---------------

    conf: # [object] [required]
      tenant_id: # [string] Tenant identifier - Directory ID (tenant identifier) in
Azure Active Directory
      app_id: # [string] [required] Application identifier - Identifier of the
registered application in Azure Active Directory.
      client_secret: # [string] [required] Client secret - Application key of the
registered application.
      content_type: # [string] [required] Content type - The type of content to
retrieve from the Office 365 service communications API.

    # ------------------------------------------------------


    # -------------- if type is prometheus ---------------

    conf: # [object] [required]
      dimensionList: # [array] Extra Dimensions - Other dimensions to include in
events
      username: # [string] Username - Optional username for Basic authentication
      password: # [string] Password - Optional password for Basic authentication
      discoveryType: # [string] Discovery Type - Target discovery mechanism, use
static to manually enter a list of targets

      # -------------- if discoveryType is static ---------------

      targetList: # [array] Targets - List of Prometheus targets to pull metrics
from, values can be in URL or host[:port] format. For example:
http://localhost:9090/metrics, localhost:9090, or localhost. In the cases where just
host[:port] are specified, the endpoint will resolve to
'http://host[:port]/metrics'.

      # ------------------------------------------------------


      # -------------- if discoveryType is dns ---------------

      nameList: # [array] DNS Names - List of DNS names to resolve
      recordType: # [string] Record Type - DNS Record type to resolve
      scrapeProtocol: # [string] Metrics Protocol - Protocol to use when collecting
metrics
      scrapePath: # [string] Metrics Path - Path to use when collecting metrics from
discovered targets

      # ------------------------------------------------------
```

```
      # -------------- if discoveryType is ec2 ---------------

      usePublicIp: # [boolean] Use Public IP - Use public IP address for discovered
targets. Set to false if the private IP address should be used.
      scrapeProtocol: # [string] Metrics Protocol - Protocol to use when collecting
metrics
      scrapePort: # [number] Metrics Port - The port number in the metrics URL for
discovered targets.
      scrapePath: # [string] Metrics Path - Path to use when collecting metrics from
discovered targets
      searchFilter: # [array] Search Filter - EC2 Instance Search Filter
        - Name: # [string] Filter Name - Search filter attribute name, see:
https://docs.aws.amazon.com/AWSEC2/latest/APIReference/API_DescribeInstances.html
for more information. Attributes can be manually entered if not present in the drop
down list
          Values: # [array of strings] Filter Values - Search Filter Values
      region: # [string] Region - Region from which to retrieve data.
      awsAuthenticationMethod: # [string] Authentication Method - AWS authentication
method
      enableAssumeRole: # [boolean] Enable Assume Role - Use Assume Role credentials
      endpoint: # [string] Endpoint - EC2 service endpoint. If empty, defaults to
AWS' Region-specific endpoint. Otherwise, used to point to a EC2-compatible
endpoint.
      signatureVersion: # [string] Signature version - Signature version to use for
signing EC2 requests

      # ------------------------------------------------------


    # ------------------------------------------------------


    # -------------- if type is rest ---------------

    conf: # [object] [required]
      discovery: # [object]
        discoverType: # [string] Discover type - Defines how task discovery will be
performed. Use None to skip the discovery. Use HTTP Request to make a REST call to
discover tasks. Use Item List to enumerate items for collect to retrieve. Use JSON
Response to manually define discover tasks as a JSON array of objects. Each entry
returned by the discover operation will result in a collect task.

        # -------------- if discoverType is http ---------------

        discoverUrl: # [string] Discover URL - Expression to derive URL to use for
the Discover operation (can be a constant).
        discoverMethod: # [string] Discover method - Discover HTTP method.
        discoverRequestHeaders: # [array] Discover headers - Optional discover
request headers.
          - name: # [string] Name - Header name.
            value: # [string] Value - JavaScript expression to compute the
parameter's value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a
constant, use single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters
(e.g.,Â earliest) are evaluated as strings.
        discoverDataField: # [string] Discover data field - Path to field in the
response object which contains discover results (e.g.: level1.name), leave blank if
the result is an array.
```

```
        # ------------------------------------------------------


        # -------------- if discoverType is json ---------------

        manualDiscoverResult: # [string] Discover result - Allows hard-coding the
Discover result. Must be a JSON object. Works with the Discover Data field.
        discoverDataField: # [string] Discover data field - Within the response
JSON, name of the field or array element to pull results from. LeaveÂ blank if the
result is an array of values. Sample entry: items, json: { items: [{id: 'first'},
{id: 'second'}] }

        # ------------------------------------------------------


        # -------------- if discoverType is list ---------------

        itemList: # [array of strings] Discover items - Comma-separated list of
items to return from the Discover task. Each item returned will generate a collect
task, and can be referenced using `${id}` in the collect URL, headers, or
parameters.

        # ------------------------------------------------------

      collectUrl: # [string] Collect URL - Expression to derive URL to use for the
collect operation (can be a constant).
      collectMethod: # [string] [required] Collect method - Collect HTTP method.

      # -------------- if collectMethod is get ---------------

      collectRequestParams: # [array] Collect parameters - Optional collect request
parameters.
        - name: # [string] Name - Parameter name
          value: # [string] Value - JavaScript expression to compute the parameter's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.

      # ------------------------------------------------------


      # -------------- if collectMethod is post ---------------

      collectRequestParams: # [array] Collect parameters - Optional collect request
parameters.
        - name: # [string] Name - Parameter name.
          value: # [string] Value - JavaScript expression to compute the parameter's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.

      # ------------------------------------------------------


      # -------------- if collectMethod is post_with_body ---------------

      collectBody: # [string] Collect POST body - Template for POST body to send
with the Collect request. Reference global variables, functions, or parameters from
the Discover response using template params: `${C.vars.myVar}`, or `${Date.now()}`,
`${param}`.
```

```
      # ------------------------------------------------------


      # -------------- if collectMethod is other ---------------

      collectVerb: # [string] Collect verb - DIY HTTP verb to use for the collect
operation.
      collectBody: # [string] Collect body - Template for body to send with the
Collect request. Reference global variables, functions, or parameters from the
Discover response using template params: `${C.vars.myVar}`, or `${Date.now()}`,
`${param}`
      collectRequestParams: # [array] Collect parameters - Optional collect request
parameters.
        - name: # [string] Name - Parameter name.
          value: # [string] Value - JavaScript expression to compute the parameter's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.

      # ------------------------------------------------------

      collectRequestHeaders: # [array] Collect headers - Optional collect request
headers.
        - name: # [string] Name - Header Name
          value: # [string] Value - JavaScript expression to compute the header's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.
      pagination: # [object]
        type: # [string] Pagination - Select collect pagination scheme

        # -------------- if type is response_body ---------------

        attribute: # [array,string] Response attribute - The name of the attribute
in the response that contains next page information
        maxPages: # [number] Max pages - The maximum number of pages to retrieve,
set to 0 to retrieve all pages

        # ------------------------------------------------------


        # -------------- if type is response_header_link ---------------

        nextRelationAttribute: # [string] Next page relation name - Relation name
used in the link header that refers to the next page in the result set. In this
example link header, rel="next" to the next page of results:
<https://myHost/curPage>; rel="self" <https://myHost/nextPage>; rel="next"
        curRelationAttribute: # [string] Current page relation name - Optional
relation name used in the link header that refers to the current result set. In this
example link header, rel="self" refers to the current page of results:
<https://myHost/curPage>; rel="self" <https://myHost/nextPage>; rel="next"
        maxPages: # [number] Max pages - The maximum number of pages to retrieve,
set to 0 to retrieve all pages

        # ------------------------------------------------------


        # -------------- if type is request_offset ---------------
```

```
        offsetField: # [string] Offset field name - Query string parameter that sets
the index from which to begin returning records. E.g.: /api/v1/query?
term=cribl&limit=100&offset=0
        offset: # [number] Starting offset - Offset index from which to start
request. Defaults to undefined, which will start collection from the first record.
        offsetSpacer: # [null]
        limitField: # [string] Limit field name - Query string parameter to set the
number of records retrieved per request. E.g.: /api/v1/query?
term=cribl&limit=100&offset=0
        limit: # [number] Limit - Maximum number of records to collect per request.
        limitSpacer: # [null]
        totalRecordField: # [string] Total record count field name - Identifies the
attribute in the response that contains the total number of records for the query.
        maxPages: # [number] Max pages - The maximum number of pages to retrieve.
Set to 0 to retrieve all pages.
        zeroIndexed: # [boolean] Zero-based index - Toggle to Yes to indicate that
the first record in the requested data is at index 0. The default (No) indicates
index 1.

        # ------------------------------------------------------


        # -------------- if type is request_page ---------------

        pageField: # [string] Page number field name - Query string parameter that
sets the page index to be returned. E.g.: /api/v1/query?
term=cribl&page_size=100&page_number=0
        page: # [number] Starting page number - Page number from which to start
request. Defaults to undefined, which will start collection from the first page.
        offsetSpacer: # [null]
        sizeField: # [string] Page size field name - Query string parameter to set
the number of records retrieved per request. E.g.: /api/v1/query?
term=cribl&page_size=100&page_number=0
        size: # [number] Page size - Maximum number of records to collect per page.
        limitSpacer: # [null]
        totalPageField: # [string] Total page count field name - The name of the
attribute in the response that contains the total number of pages for the query.
        totalRecordField: # [string] Total record count field name - Identifies the
attribute in the response that contains the total number of records for the query.
        maxPages: # [number] Max pages - The maximum number of pages to retrieve.
Set to 0 to retrieve all pages.
        zeroIndexed: # [boolean] zero-based index - Toggle to Yes to indicate that
the first page in the requested data is at index 0. The default (No) indicates index
1.

        # ------------------------------------------------------

      authentication: # [string] [required] Authentication - Authentication method
for Discover and Collect REST calls. You can specify API Keyâ□□based authentication
by adding the appropriate CollectÂ headers.

      # -------------- if authentication is basic ---------------

      username: # [string] Username - Basic authentication username
      password: # [string] Password - Basic authentication password

      # ------------------------------------------------------


      # -------------- if authentication is basicSecret ---------------
```

```
      credentialsSecret: # [string] Credentials secret - Select (or create) a stored
secret that references your credentials

      # ------------------------------------------------------


      # -------------- if authentication is login ---------------

      loginUrl: # [string] Login URL - URL to use for login API call. This call is
expected to be a POST.
      username: # [string] Username - Login username
      password: # [string] Password - Login password
      loginBody: # [string] POST body - Template for POST body to send with login
request, ${username} and ${password} are used to specify location of these
attributes in the message
      tokenRespAttribute: # [string] Token attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.
      authRequestHeaders: # [array] Authentication headers - Optional authentication
request headers.
        - name: # [string] Name - Header name.
          value: # [string] Value - JavaScript expression to compute the header's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.

      # ------------------------------------------------------


      # -------------- if authentication is loginSecret ---------------

      loginUrl: # [string] Login URL - URL to use for login API call, this call is
expected to be a POST.
      credentialsSecret: # [string] Credentials secret - Select (or create) a stored
secret that references your login credentials
      loginBody: # [string] POST body - Template for POST body to send with login
request, ${username} and ${password} are used to specify location of these
attributes in the message
      tokenRespAttribute: # [string] Token attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.
      authRequestHeaders: # [array] Authentication headers - Optional authentication
request headers.
        - name: # [string] Name - Header name.
          value: # [string] Value - JavaScript expression to compute the parameter's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.

      # ------------------------------------------------------


      # -------------- if authentication is oauth ---------------

      loginUrl: # [string] Login URL - URL to use for the OAuth API call. This call
```

```
is expected to be a POST.
      tokenRespAttribute: # [string] Token attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.
      clientSecretParamName: # [string] Client secret parameter - Parameter name
that contains client secret. Defaults to 'client_secret', and is automatically added
to request parameters.
      clientSecretParamValue: # [string] Client secret value - Secret value to add
to HTTP requests as the 'client secret' parameter. Stored on disk encrypted, and is
automatically added to request parameters
      authRequestParams: # [array] Extra authentication parameters - OAuth request
parameters added to the POST body. The Content-Type header will automatically be set
to application/x-www-form-urlencoded.
        - name: # [string] Name - Parameter name.
          value: # [string] Value - JavaScript expression to compute the parameter's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.
      authRequestHeaders: # [array] Authentication headers - Optional authentication
request headers.
        - name: # [string] Name - Header name.
          value: # [string] Value - JavaScript expression to compute the header's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.

      # ------------------------------------------------------


      # -------------- if authentication is oauthSecret ---------------

      loginUrl: # [string] Login URL - URL to use for the OAuth API call. This call
is expected to be a POST.
      tokenRespAttribute: # [string] Token attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.
      clientSecretParamName: # [string] Client secret parameter - Parameter name
that contains client secret. Defaults to 'client_secret', and is automatically added
to request parameters.
      textSecret: # [string] Client secret value (text secret) - Select (or create)
a text secret that contains the client secret's value.
      authRequestParams: # [array] Extra authentication parameters - OAuth request
parameters added to the POST body. The Content-Type header will automatically be set
to application/x-www-form-urlencoded.
        - name: # [string] Name - Parameter name.
          value: # [string] Value - JavaScript expression to compute the parameter's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.
      authRequestHeaders: # [array] Authentication headers - Optional authentication
request headers.
        - name: # [string] Name - Header name.
          value: # [string] Value - JavaScript expression to compute the header's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.
```

```
      # -------------------------------------------------------

      timeout: # [number] Request timeout (secs) - HTTP request inactivity timeout,
use 0 to disable
      useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. Suitable when DNS server returns multiple addresses in sort order.
      disableTimeFilter: # [boolean] Disable time filter - Used to disable collector
event time filtering when a date range is specified.
      safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.

    # -------------------------------------------------------


    # -------------- if type is s3 ---------------

    conf: # [object] [required]
      outputName: # [string] Auto-populate from - The name of the predefined
Destination that will be used to auto-populate collector settings.
      bucket: # [string] S3 bucket - S3 Bucket from which to collect data.
      region: # [string] Region - Region from which to retrieve data.
      path: # [string] Path - The directory from which to collect data. Templating
is supported, e.g.: myDir/${datacenter}/${host}/${app}/. Time-based tokens are also
supported, e.g.: myOtherDir/${_time:%Y}/${_time:%m}/${_time:%d}/
      extractors: # [array] Path extractors - Allows using template tokens as
context for expressions that enrich discovery results. E.g.: given a template
/path/${epoch}, an extractor under key "epoch" with an expression {date: new
Date(+value*1000)}, will enrich discovery results with a human readable "date" field
        - key: # [string] Token - A token from the template path, e.g.: epoch
          expression: # [string] Extractor expression - JS expression that receives
token under "value" variable, and evaluates to populate event fields, e.g.: {date:
new Date(+value*1000)}
      awsAuthenticationMethod: # [string] Authentication Method - AWS authentication
method. Choose Auto to use IAM roles.

      # -------------- if awsAuthenticationMethod is manual ---------------

      awsApiKey: # [string] Access key - Access key. If not present, will fall back
to env.AWS_ACCESS_KEY_ID, or to the metadata endpoint for IAM creds. Optional when
running on AWS.
      awsSecretKey: # [string] Secret key - Secret key. If not present, will fall
back to env.AWS_SECRET_ACCESS_KEY, or to the metadata endpoint for IAM creds.
Optional when running on AWS.

      # -------------------------------------------------------


      # -------------- if awsAuthenticationMethod is secret ---------------

      awsSecret: # [string] Secret key pair - Select (or create) a stored secret
that references AWS access key and secret key.

      # -------------------------------------------------------

      endpoint: # [string] Endpoint - S3 service endpoint. If empty, the endpoint
will be automatically constructed from the region.
      signatureVersion: # [string] Signature version - Signature version to use for
signing S3 requests.
      enableAssumeRole: # [boolean] Enable Assume Role - Use Assume Role
```

```
credentials.
      assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume.
      assumeRoleExternalId: # [string] External ID - External ID to use when
assuming role.
      recurse: # [boolean] Recursive - Whether to recurse through subdirectories.
      maxBatchSize: # [number] Max Batch Size (objects) - Maximum number of metadata
objects to batch before recording as results.
      reuseConnections: # [boolean] Reuse Connections - Whether to reuse connections
between requests, which can improve performance.
      rejectUnauthorized: # [boolean] Reject Unauthorized Certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
      verifyPermissions: # [boolean] Verify bucket permissions - Disable if you can
access files within the bucket but not the bucket itself. Resolves errors of the
form "discover task initialization failed...error: Forbidden".

    # ------------------------------------------------------


    # -------------- if type is script ---------------

    conf: # [object] [required]
      discoverScript: # [string] Discover Script - Script to discover what to
collect. Should output one task per line in stdout.
      collectScript: # [string] [required] Collect Script - Script to run to perform
data collections. Task passed in as $CRIBL_COLLECT_ARG. Should output results to
stdout.
      shell: # [string] Shell - Shell to use to execute scripts.

    # ------------------------------------------------------


    # -------------- if type is splunk ---------------

    conf: # [object] [required]
      searchHead: # [string] [required] Search head - Search Head base URL, can be
expression, default is https://localhost:8089.
      search: # [string] Search - Enter Splunk search here. For example:
'index=myAppLogs level=error channel=myApp' OR '| mstats avg(myStat) as myStat WHERE
index=myStatsIndex.'
      earliest: # [string] Earliest - The earliest time boundary for the search. Can
be an exact or relative time. For example: '2022-01-14T12:00:00Z' or '-16m@m'
      latest: # [string] Latest - The latest time boundary for the search. Can be an
exact or relative time. For example: '2022-01-14T12:00:00Z' or '-1m@m'
      endpoint: # [string] [required] Search endpoint - REST API used to create a
search.
      outputMode: # [string] [required] Output mode - Format of the returned output
      collectRequestParams: # [array] Extra parameters - Optional collect request
parameters.
        - name: # [string] Name - Parameter name
          value: # [string] Value - JavaScript expression to compute the parameter's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.
      collectRequestHeaders: # [array] Extra headers - Optional collect request
headers.
        - name: # [string] Name - Header Name
          value: # [string] Value - JavaScript expression to compute the header's
value, normally enclosed in backticks (e.g.,Â `${earliest}`). IfÂ a constant, use
```

```
single quotes (e.g.,Â 'earliest'). ValuesÂ without delimiters (e.g.,Â earliest) are
evaluated as strings.
      authentication: # [string] [required] Authentication - Authentication method
for Discover and Collect REST calls.

      # -------------- if authentication is basic ---------------

      username: # [string] Username - Basic authentication username
      password: # [string] Password - Basic authentication password

      # ----------------------------------------------------------


      # -------------- if authentication is basicSecret ---------------

      credentialsSecret: # [string] Credentials secret - Select (or create) a stored
secret that references your credentials

      # ----------------------------------------------------------


      # -------------- if authentication is login ---------------

      loginUrl: # [string] Login URL - URL to use for login API call. This call is
expected to be a POST.
      username: # [string] Username - Login username
      password: # [string] Password - Login password
      loginBody: # [string] POST Body - Template for POST body to send with login
request, ${username} and ${password} are used to specify location of these
attributes in the message
      tokenRespAttribute: # [string] Token Attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize Expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.

      # ----------------------------------------------------------


      # -------------- if authentication is loginSecret ---------------

      loginUrl: # [string] Login URL - URL to use for login API call, this call is
expected to be a POST.
      credentialsSecret: # [string] Credentials secret - Select (or create) a stored
secret that references your login credentials
      loginBody: # [string] POST Body - Template for POST body to send with login
request, ${username} and ${password} are used to specify location of these
attributes in the message
      tokenRespAttribute: # [string] Token Attribute - Path to token attribute in
login response body. Nested attributes are OK.
      authHeaderExpr: # [string] Authorize Expression - JavaScript expression to
compute the Authorization header to pass in discover and collect calls. The value
${token} is used to reference the token obtained from login.

      # ----------------------------------------------------------

      timeout: # [number] Request Timeout (secs) - HTTP request inactivity timeout,
use 0 to disable
      useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. Suitable when DNS server returns multiple addresses in sort order.
```

```
      disableTimeFilter: # [boolean] Disable time filter - Used to disable collector
event time filtering when a date range is specified.

    # ------------------------------------------------------

    destructive: # [boolean] Destructive - If set to Yes, the collector will delete
any files that it collects (where applicable).
  input: # [object]
    type: # [string]
    breakerRulesets: # [array of strings] Event Breaker rulesets - A list of event
breaking rulesets that will be applied, in order, to the input data stream.
    staleChannelFlushMs: # [number] Event Breaker buffer timeout - The amount of
time (in milliseconds) the Event Breaker will wait for new data to be sent to a
specific channel, before flushing the data stream out, as-is, to the Pipelines.
    sendToRoutes: # [boolean] Send to Routes - If set to Yes, events will be sent to
normal routing and event processing. Set to No if you want to select a specific
Pipeline/Destination combination.

    # -------------- if sendToRoutes is true ---------------

    pipeline: # [string] Pre-Processing Pipeline - Pipeline to process results
before sending to routes. Optional.

    # -------------------------------------------------------


    # -------------- if sendToRoutes is false ---------------

    pipeline: # [string] Pipeline - Pipeline to process results.
    output: # [string] Destination - Destination to send results to.

    # -------------------------------------------------------

    preprocess: # [object]
      disabled: # [boolean] Disabled - Enable Custom Command
      command: # [string] Command - Command to feed the data through (via stdin) and
process its output (stdout)
      args: # [array of strings] Arguments - Arguments
    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
  type: # [string] Job type - Job type.
  ttl: # [string] Time to live - Time to keep the job's artifacts on disk after job
completion. This also affects how long a job is listed in the Job Inspector.
  removeFields: # [array of strings] Remove Discover fields - List of fields to
remove from Discover results. Wildcards (e.g.: aws*) are allowed. This is useful
when discovery returns sensitive fields that should not be exposed in the Jobs user
interface.
  resumeOnBoot: # [boolean] Resume job on boot - Resumes the ad hoc job if a failure
condition causes Stream to restart during job execution.
  environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
  schedule: # [object] Schedule - Configuration for a scheduled job.
    enabled: # [boolean] Enabled - Determines whether or not this schedule is
enabled.
```

```
    # -------------- if enabled is true ---------------

    cronSchedule: # [string] Cron schedule - A cron schedule on which to run this
job.
    maxConcurrentRuns: # [number] Max concurrent runs - The maximum number of
instances that may be running of this scheduled job at any given time.
    skippable: # [boolean] Skippable - Skippable jobs can be delayed, up to their
next run time, if the system is hitting concurrency limits.
    run: # [object] Run settings

      # -------------- if type is collection ---------------

      rescheduleDroppedTasks: # [boolean] Reschedule tasks - Reschedule tasks that
failed with non-fatal errors.
      maxTaskReschedule: # [number] Max task reschedule - Max number of times a task
can be rescheduled.
      logLevel: # [string] Log Level - Level at which to set task logging.
      jobTimeout: # [string] Job timeout - Maximum time the job is allowed to run
(e.g., 30, 45s or 15m). Units are seconds, if not specified. Enter 0 for unlimited
time.
      mode: # [string] Mode - Job run mode. Preview will either return up to N
matching results, or will run until capture time T is reached. Discovery will gather
the list of files to turn into streaming tasks, without running the data collection
job. Full Run will run the collection job.

      # -------------- if mode is list ---------------

      discoverToRoutes: # [boolean] Send to Routes - If true, send discover results
to routes

      # ------------------------------------------------------


      # -------------- if mode is preview ---------------

      capture: # [object] Capture Settings
        duration: # [number] Capture Time (sec) - Amount of time to keep capture
open, in seconds.
        maxEvents: # [number] Capture Up to N Events - Maximum number of events to
capture.
        level: # [string] Where to capture

      # ------------------------------------------------------

      timeRangeType: # [string] Time range - Time range for scheduled job.
      earliest: # [number,string] Earliest - Earliest time, in local time.
      latest: # [number,string] Latest - Latest time, in local time.
      timestampTimezone: # [string] Range Timezone - Timezone to use for Earliest
and Latest times (defaults to UTC).
      expression: # [string] Filter - A filter for tokens in the provided collect
path and/or the events being collected
      minTaskSize: # [string] Lower task bundle size - Limits the bundle size for
small tasks. E.g., bundle five 200KB files into one 1M task.
      maxTaskSize: # [string] Upper task bundle size - Limits the bundle size for
files above the Lower task bundle size. E.g., bundle five 2MB files into one 10MB
task bundle. Files greater than this size will be assigned to individual tasks.

    # ------------------------------------------------------

  streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
```

```
Stream.
executor_job: # [object]
  executor: # [object]
    type: # [string] Executor type - The type of executor to run.
    storeTaskResults: # [boolean] Store task results - Determines whether or not to
write task results to disk.
    conf: # [object] Executor-specific settings.
  type: # [string] Job type - Job type.
  ttl: # [string] Time to live - Time to keep the job's artifacts on disk after job
completion. This also affects how long a job is listed in the Job Inspector.
  removeFields: # [array of strings] Remove Discover fields - List of fields to
remove from Discover results. Wildcards (e.g.: aws*) are allowed. This is useful
when discovery returns sensitive fields that should not be exposed in the Jobs user
interface.
  resumeOnBoot: # [boolean] Resume job on boot - Resumes the ad hoc job if a failure
condition causes Stream to restart during job execution.
  environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
  schedule: # [object] Schedule - Configuration for a scheduled job.
    enabled: # [boolean] Enabled - Determines whether or not this schedule is
enabled.

    # -------------- if enabled is true ---------------

    cronSchedule: # [string] Cron schedule - A cron schedule on which to run this
job.
    maxConcurrentRuns: # [number] Max concurrent runs - The maximum number of
instances that may be running of this scheduled job at any given time.
    skippable: # [boolean] Skippable - Skippable jobs can be delayed, up to their
next run time, if the system is hitting concurrency limits.
    run: # [object] Run settings

      # -------------- if type is collection ---------------

      rescheduleDroppedTasks: # [boolean] Reschedule tasks - Reschedule tasks that
failed with non-fatal errors.
      maxTaskReschedule: # [number] Max task reschedule - Max number of times a task
can be rescheduled.
      logLevel: # [string] Log Level - Level at which to set task logging.
      jobTimeout: # [string] Job timeout - Maximum time the job is allowed to run
(e.g., 30, 45s or 15m). Units are seconds, if not specified. Enter 0 for unlimited
time.
      mode: # [string] Mode - Job run mode. Preview will either return up to N
matching results, or will run until capture time T is reached. Discovery will gather
the list of files to turn into streaming tasks, without running the data collection
job. Full Run will run the collection job.

      # -------------- if mode is list ---------------

      discoverToRoutes: # [boolean] Send to Routes - If true, send discover results
to routes

      # ------------------------------------------------------


      # -------------- if mode is preview ---------------

      capture: # [object] Capture Settings
        duration: # [number] Capture Time (sec) - Amount of time to keep capture
open, in seconds.
```

```
        maxEvents: # [number] Capture Up to N Events - Maximum number of events to
capture.
        level: # [string] Where to capture

      # ------------------------------------------------------

      timeRangeType: # [string] Time range - Time range for scheduled job.
      earliest: # [number,string] Earliest - Earliest time, in local time.
      latest: # [number,string] Latest - Latest time, in local time.
      timestampTimezone: # [string] Range Timezone - Timezone to use for Earliest
and Latest times (defaults to UTC).
      expression: # [string] Filter - A filter for tokens in the provided collect
path and/or the events being collected
      minTaskSize: # [string] Lower task bundle size - Limits the bundle size for
small tasks. E.g., bundle five 200KB files into one 1M task.
      maxTaskSize: # [string] Upper task bundle size - Limits the bundle size for
files above the Lower task bundle size. E.g., bundle five 2MB files into one 10MB
task bundle. Files greater than this size will be assigned to individual tasks.

    # ------------------------------------------------------

  streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
```

The `workerAffinity` internal parameter defaults to `false`. Cribl automatically sets this to `true` on certain jobs, specifying that collection tasks will be both created and run by the same Worker Node.

13.6.8. job-limits.yml

`job-limits.yml` maintains parameters for collection jobs and system tasks. In the UI, you can configure these at **Group Settings** > **General Settings** > **Limits** > **Jobs**.

$CRIBL_HOME/default/cribl/job-limits.yml

```
concurrentJobLimit: # [number] Concurrent job limit - The total number of jobs that may run concurrently
concurrentSystemJobLimit: # [number] Concurrent system job limit - The total number of system jobs that may run concurrently
concurrentScheduledJobLimit: # [number] Concurrent scheduled job limit - The total number of scheduled jobs that may run concurrently. Limit is relative to concurrent job limit.
concurrentTaskLimit: # [number] Concurrent task limit - The total number of tasks that a worker process may run concurrently
concurrentSystemTaskLimit: # [number] Concurrent system task limit - The number of system tasks that a worker process may run concurrently
maxTaskPerc: # [number] Max task usage percentage - Value from 0 to 1 representing the percentage of total tasks within the system a job may consume
taskPollTimeoutMs: # [number] Task poll timeout - The number of milliseconds the worker's task handler will wait to receive a task before retrying the request for a task.
jobArtifactsReaperPeriod: # [string] Artifact reaper period - Time period at which the system attempts to reap stale disk artifacts belonging to the jobs
finishedJobArtifactsLimit: # [number] Finished job artifacts limit - Maximum number of finished job artifacts to keep on disk.
finishedTaskArtifactsLimit: # [number] Finished task artifacts limit - Maximum number of finished task artifacts to keep on disk per job on each worker node.
taskManifestFlushPeriodMs: # [number] Manifest flush period - The rate at which a job's task manifest should be refreshed in milliseconds.
taskManifestMaxBufferSize: # [number] Manifest max buffer size - The maximum number of tasks the task manifest can hold in memory before flushing to disk.
taskManifestReadBufferSize: # [string] Manifest reader buffer size - The number of bytes the task manifest reader should pull from disk.
schedulingPolicy: # [string] Job dispatching - The method by which tasks are assigned to worker processes to complete the work
jobTimeout: # [string] Job timeout - Maximum time a job is allowed to run. Defaults to 0, for unlimited time. Units are seconds if not specified. Sample entries: 30, 45s, 15m.
taskHeartbeatPeriod: # [number] Task heartbeat period - The heartbeat period (in seconds) for tasks to report back to the leader/API.
```

13.6.9. licenses.yml

`licenses.yml` maintains a list of Cribl Stream licenses.

$CRIBL_HOME/default/cribl/licenses.yml

```
licenses: # [array of string] - list of licenses
```

13.6.10. limits.yml

`limits.yml` maintains parameters for the system. In a distributed deployment, these parameters are configured on both the Leader and the Workers.

In the UI, you can configure them:

- On the Leader at **Settings** > **Global Settings** > **General Settings > Limits**.
- On a single instance at **Settings** > **General Settings > Limits**.
- On Worker Groups at `<group-name>` > **Worker Group Settings** > **General Settings > Limits**.

$CRIBL_HOME/default/cribl/limits.yml

```
samples: # [object] Samples
  maxSize: # [string] Max sample size - Maximum file size for the sample, in binary
units (KB, MB). (Max. 3MB.)
minFreeSpace: # [string] Min free disk space - The minimum amount of disk space in
the system before various features will take measures to prevent disk usage (KB, MB,
etc.).
metricsGCPeriod: # [string] Metrics GC period - The interval on which the system
attempts to free memory, by pruning stale metrics from the Stream system metrics
store.
metricsMaxCardinality: # [number] Metrics cardinality limit - The system's allowed
number of permutations of a given metric name.
metricsMaxDiskSpace: # [string] Metrics max disk space - Maximum allowed disk space
for persisting metrics to disk.
metricsWorkerIdBlacklist: # [array of strings] Metrics worker tracking - List of
metric names for which to disable tracking of Worker Node ID. Supports wildcards.
metricsNeverDropList: # [array of strings] Metrics never drop list - List metric
names for which to ensure delivery. Supports wildcards.
metricsFieldsBlacklist: # [array of strings] Disable field metrics - List of event
fields for which to disable metric collection.
metricsDirectory: # [string] Metrics directory - Directory to store metrics on disk.
cpuProfileTTL: # [string] CPU profile TTL - The time-to-live for collected CPU
profiles.
eventsMetadataSources: # [array of strings] Event metadata sources - List of event
metadata sources to enable.
```

13.6.11. logger.yml

`logger.yml` maintains logging levels and redactions, per channel. In the UI, you can configure these at **Settings** > **Global Settings** > **System > Logging**.

$CRIBL_HOME/default/cribl/logger.yml

```
redactFields: # [array of strings] - list of fields to redact
redactLabel: # [string] - redact label
channels: # [object] Logger channels as logger ID/log level pairs. Log levels:
error, warn, info, http, verbose, debug, silly
  DEFAULT: info
  input:DistMaster: debug
  output:DistWorker: debug
```

13.6.12. mappings.yml

Mapping ruleset configurations are stored in `$CRIBL_HOME/default/cribl/mappings.yml`.

$CRIBL_HOME/default/cribl/mappings.yml

```
mapping_ruleset_id: # [object]
  conf: # [object]
    functions: # [array] Functions - List of functions to pass data through
  active: # [boolean]
```

13.6.13. messages.yml

`messages.yml` stores messages displayed in the UI's `Messages` fly-out.

$CRIBL_HOME/local/cribl/logger.yml

```
message_id: # [object]
  severity: # [string] Severity
  title: # [string] Title
  text: # [string] Text
  time: # [number] Occurrence Time
  group: # [string] Group
  metadata: # [array]
```

13.6.14. outputs.yml

`outputs.yml` contains configuration settings for Cribl Stream Destinations.

$CRIBL_HOME/default/cribl/outputs.yml

```
outputs: # [object]
  default_output: # [object]
    type: # [string] Output Type
    defaultId: # [string,null] Default Output ID - ID of the default output. This
will be used whenever a nonexistent/deleted output is referenced.
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  webhook_output: # [object]
    type: # [string] Output Type
    url: # [string] URL - URL to send events to.
    method: # [string] Method - The method to use when sending events. Defaults to
POST.
    format: # [string] Format - Specifies how to format events before sending out.
Defaults to NDJSON.

    # -------------- if format is custom ---------------

    customSourceExpression: # [string] Source expression - Expression to evaluate as
event. E.g., `${fieldA}, ${fieldB}`. Defaults to __httpOut (i.e. value of field
__httpOut).
    customDropWhenNull: # [boolean] Drop when null - Whether or not to drop events
when the source expression evaluates to null.
    customEventDelimiter: # [string] Event delimiter - Delimiter string to insert
between individual events. Defaults to newline character.
    customContentType: # [string] Content type - Content type to use for request.
Defaults to application/x-ndjson. Any content types set in Advanced Settings > Extra
HTTP headers will override this entry.

    # -------------------------------------------------------

    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
```

```
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    authType: # [string] Authentication type - The authentication method to use for
the HTTP request. Defaults to None.

    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for Basic authentication
    password: # [string] Password - Password for Basic authentication

    # ----------------------------------------------------------


    # -------------- if authType is token ---------------

    token: # [string] Token - Bearer token to include in the authorization header

    # ----------------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # ----------------------------------------------------------


    # -------------- if authType is textSecret ---------------

    textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret

    # ----------------------------------------------------------
```

```
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  devnull_output: # [object]
    type: # [string] Output Type
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  syslog_output: # [object]
    type: # [string] Output Type
    protocol: # [string] Protocol - The network protocol to use for sending out
syslog messages

    # -------------- if protocol is tcp ---------------

    loadBalanced: # [boolean] Load balancing - Use load-balanced destinations
    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    writeTimeout: # [number] Write Timeout - Amount of time (milliseconds) to wait
for a write to complete before assuming connection is dead
    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ------------------------------------------------------

    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.
```

```
    # ------------------------------------------------------


    # -------------- if protocol is udp ---------------

    host: # [string] Address - The hostname of the receiver
    port: # [number] Port - The port to connect to on the provided host
    maxRecordSize: # [number] Max Record Size - Maximum size of syslog messages. If
max record size is > than MTU then UDP packets can be fragmented across, set this
value  <= MTU to avoid fragmentation.

    # ------------------------------------------------------

    facility: # [number] Facility - Default value for message facility, will be
overwritten by value of __facility if set. Defaults to user.
    severity: # [number] Severity - Default value for message severity, will be
overwritten by value of __severity if set. Defaults to notice.
    appName: # [string] App Name - Default value for application name, will be
overwritten by value of __appname if set. Defaults to Cribl.
    messageFormat: # [string] Message Format - The syslog message format depending
on the receiver's support
    timestampFormat: # [string] Timestamp Format - Timestamp format to use when
serializing event's time field
    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    octetCountFraming: # [boolean] Octet count framing - When enabled, messages will
be prefixed with the byte count of the message. Otherwise, no prefix will be set,
and the message will be appended with a \n.
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  splunk_output: # [object]
    type: # [string] Output Type
    host: # [string] Address - The hostname of the receiver
    port: # [number] [required] Port - The port to connect to on the provided host
    nestedFields: # [string] Nested field serialization - Specifies how to serialize
nested fields into index-time fields.
    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    writeTimeout: # [number] Write Timeout - Amount of time (milliseconds) to wait
for a write to complete before assuming connection is dead
    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
```

```
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ----------------------------------------------------------

    enableMultiMetrics: # [boolean] Output multiple metrics - Output metrics in
multiple-metric format in a single event. Supported in Splunk 8.0 and above.
    enableACK: # [boolean] Minimize in-flight data loss - Check if indexer is
shutting down and stop sending data. This helps minimize data loss during shutdown.
    maxS2Sversion: # [string] Max S2S version - The highest S2S protocol version to
advertise during handshake.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token
    authToken: # [string] Auth token - Shared secret token to use when establishing
a connection to a Splunk indexer.

    # -------------- if authType is manual ---------------


    # ----------------------------------------------------------

    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

    # -------------- if authType is secret ---------------
```

```
    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  splunk_lb_output: # [object]
    type: # [string] Output Type
    dnsResolvePeriodSec: # [number] DNS resolution period (seconds) - Re-resolve any
hostnames every this many seconds and pick up destinations from A records.
    loadBalanceStatsPeriodSec: # [number] Load balance stats period (seconds) - How
far back in time to keep traffic stats for load balancing purposes.
    maxConcurrentSenders: # [number] Max connections - Maximum number of concurrent
connections (per worker process). A random set of IPs will be picked on every DNS
resolution period. Use 0 for unlimited.
    nestedFields: # [string] Nested field serialization - Specifies how to serialize
nested fields into index-time fields.
    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    writeTimeout: # [number] Write Timeout - Amount of time (milliseconds) to wait
for a write to complete before assuming connection is dead
    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # -------------------------------------------------------

    enableMultiMetrics: # [boolean] Output multiple metrics - Output metrics in
multiple-metric format in a single event. Supported in Splunk 8.0 and above.
    enableACK: # [boolean] Minimize in-flight data loss - Check if indexer is
```

```
shutting down and stop sending data. This helps minimize data loss during shutdown.
    maxS2Sversion: # [string] Max S2S version - The highest S2S protocol version to
advertise during handshake.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    indexerDiscovery: # [boolean] Indexer Discovery - Automatically discover
indexers in indexer clustering environment.

    # -------------- if indexerDiscovery is true ---------------

    indexerDiscoveryConfigs: # [object]  - List of configurations to set up indexer
discovery in Splunk Indexer clustering environment.
      site: # [string] [required] Site - Clustering site of the indexers from where
indexers need to be discovered. In case of single site cluster, it defaults to
'default' site.
      masterUri: # [string] Cluster Manager URI - Full URI of Splunk cluster Manager
(scheme://host:port). E.g.: https://managerAddress:8089
      refreshIntervalSec: # [number] [required] Refresh Period - Time interval in
seconds between two consecutive indexer list fetches from cluster Manager.
      authType: # [string] Authentication method - Enter a token directly, or
provide a secret referencing a token
      authToken: # [string] Auth token - Authentication token required to
authenticate to cluster Manager for indexer discovery.

      # -------------- if authType is manual ---------------


      # ----------------------------------------------------------

      textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

      # -------------- if authType is secret ---------------


      # ----------------------------------------------------------


    # ----------------------------------------------------------
```

```
    # -------------- if indexerDiscovery is false ---------------

    excludeSelf: # [boolean] Exclude current host IPs - Exclude all IPs of the
current host from the list of any resolved hostnames.
    hosts: # [array] Destinations - Set of Splunk indexers to load-balance data to.
      - host: # [string] Address - The hostname of the receiver.
        port: # [number] Port - The port to connect to on the provided host.
        tls: # [string] TLS - Whether to inherit TLS configs from group setting or
disable TLS.
        servername: # [string] TLS Servername - Servername to use if establishing a
TLS connection. If not specified, defaults to connection host (iff not an IP);
otherwise, to the global TLS settings.
        weight: # [number] Load Weight - The weight to use for load-balancing
purposes.
    dnsResolvePeriodSec: # [number] DNS resolution period (seconds) - Re-resolve any
hostnames every this many seconds and pick up destinations from A records.
    loadBalanceStatsPeriodSec: # [number] Load balance stats period (seconds) - How
far back in time to keep traffic stats for load balancing purposes.
    maxConcurrentSenders: # [number] Max connections - Maximum number of concurrent
connections (per worker process). A random set of IPs will be picked on every DNS
resolution period. Use 0 for unlimited.

    # ------------------------------------------------------

    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token
    authToken: # [string] Auth token - Shared secret token to use when establishing
a connection to a Splunk indexer.

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  splunk_hec_output: # [object]
    type: # [string] Output Type
    loadBalanced: # [boolean] Load balancing - Use load-balanced destinations

    # -------------- if loadBalanced is false ---------------

    url: # [string] Splunk HEC Endpoint - URL to a Splunk HEC endpoint to send
events to, e.g., http://localhost:8088/services/collector/event
```

```
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.

    # -------------------------------------------------------


    # -------------- if loadBalanced is true ---------------

    excludeSelf: # [boolean] Exclude current host IPs - Exclude all IPs of the
current host from the list of any resolved hostnames.
    urls: # [array] Splunk HEC Endpoints
      - url: # [string] HEC Endpoint - URL to a Splunk HEC endpoint to send events
to, e.g., http://localhost:8088/services/collector/event
        weight: # [number] Load Weight - The weight to use for load-balancing
purposes.
    dnsResolvePeriodSec: # [number] DNS resolution period (seconds) - Re-resolve any
hostnames every this many seconds and pick up destinations from A records.
    loadBalanceStatsPeriodSec: # [number] Load balance stats period (seconds) - How
far back in time to keep traffic stats for load balancing purposes.

    # -------------------------------------------------------

    nextQueue: # [string] Next Processing Queue - Which Splunk processing queue to
send the events after HEC processing
    tcpRouting: # [string] Default _TCP_ROUTING - Set the value of _TCP_ROUTING for
events that does not have _ctrl._TCP_ROUTING set
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    enableMultiMetrics: # [boolean] Output multi-metrics - Output metrics in
multiple-metric format, supported in Splunk 8.0 and above to allow multiple metrics
in a single event.
    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token

    # -------------- if authType is manual ---------------

    token: # [string] HEC Auth token - Splunk HEC authentication token
```

```
    # ------------------------------------------------------


    # -------------- if authType is secret ---------------

    textSecret: # [string] HEC Auth token (text secret) - Select (or create) a
stored text secret

    # ------------------------------------------------------

    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  tcpjson_output: # [object]
    type: # [string] Output Type
    loadBalanced: # [boolean] Load balancing - Use load-balanced destinations

    # -------------- if loadBalanced is false ---------------

    host: # [string] Address - The hostname of the receiver
    port: # [number] Port - The port to connect to on the provided host

    # ------------------------------------------------------


    # -------------- if loadBalanced is true ---------------

    excludeSelf: # [boolean] Exclude current host IPs - Exclude all IPs of the
current host from the list of any resolved hostnames.
    hosts: # [array] Destinations - Set of hosts to load-balance data to.
      - host: # [string] Address - The hostname of the receiver.
```

```
        port: # [number] Port - The port to connect to on the provided host.
        tls: # [string] TLS - Whether to inherit TLS configs from group setting or
disable TLS.
        servername: # [string] TLS Servername - Servername to use if establishing a
TLS connection. If not specified, defaults to connection host (iff not an IP);
otherwise, to the global TLS settings.
        weight: # [number] Load Weight - The weight to use for load-balancing
purposes.
    dnsResolvePeriodSec: # [number] DNS resolution period (seconds) - Re-resolve any
hostnames every this many seconds and pick up destinations from A records.
    loadBalanceStatsPeriodSec: # [number] Load balance stats period (seconds) - How
far back in time to keep traffic stats for load balancing purposes.
    maxConcurrentSenders: # [number] Max connections - Maximum number of concurrent
connections (per worker process). A random set of IPs will be picked on every DNS
resolution period. Use 0 for unlimited.

    # ------------------------------------------------------

    compression: # [string] Compression - Codec to use to compress the data before
sending
    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ------------------------------------------------------

    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    writeTimeout: # [number] Write Timeout - Amount of time (milliseconds) to wait
for a write to complete before assuming connection is dead
    tokenTTLMinutes: # [number] Auth Token TTL minutes - The number of minutes
before the internally generated authentication token expires, valid values between 1
and 60
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------
```

```
    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token
    authToken: # [string] Auth token - Optional authentication token to include as
part of the connection header

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  wavefront_output: # [object]
    type: # [string] Output Type
    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token

    # -------------- if authType is manual ---------------

    token: # [string] Auth token - WaveFront API authentication token (see [here]
(https://docs.wavefront.com/wavefront_api.html#generating-an-api-token))

    # ------------------------------------------------------


    # -------------- if authType is secret ---------------
```

```
    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

    # ------------------------------------------------------

    domain: # [string] Domain name - WaveFront domain name, e.g. "longboard"
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
```

```
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  signalfx_output: # [object]
    type: # [string] Output Type
    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token

    # -------------- if authType is manual ---------------

    token: # [string] Auth token - SignalFx API access token (see [here]
(https://docs.signalfx.com/en/latest/admin-guide/tokens.html#working-with-access-
tokens))

    # -----------------------------------------------------


    # -------------- if authType is secret ---------------

    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

    # -----------------------------------------------------

    realm: # [string] Realm - SignalFx realm name, e.g. "us0"
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
```

```
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # --------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  filesystem_output: # [object]
    type: # [string] Output Type
    destPath: # [string] Output location - Final destination for the output files
    stagePath: # [string] Staging location - Filesystem location in which to buffer
files before compressing and moving to final destination. Use performant stable
storage.
    addIdToStagePath: # [boolean] Add output ID - Append output's ID to staging
location.
    removeEmptyDirs: # [boolean] Remove staging dirs - Remove empty staging
directories after moving files.

    # -------------- if removeEmptyDirs is true ---------------

    emptyDirCleanupSec: # [number] Staging cleanup period - How often (secs) to
clean-up empty directories when 'Remove Staging Dirs' is enabled.

    # --------------------------------------------------------

    partitionExpr: # [string] Partitioning expression - JS expression defining how
files are partitioned and organized. Default is date-based. If blank, Stream will
fall back to the event's __partition field value â if present â otherwise to
each location's root directory.
    format: # [string] Data format - Format of the output data.

    # -------------- if format is json ---------------

    compress: # [string] Compress - Choose data compression format to apply before
moving files to final destination.

    # --------------------------------------------------------


    # -------------- if format is parquet ---------------

    parquetSchema: # [string] Parquet schema - Select a Parquet schema. New schemas
can be uploaded under Processing > Knowledge > Parquet Schemas
```

```
    parquetRowGroupSize: # [string] Row group size - Ideal memory size for row group
segments. E.g., 128MB or 1GB. Affects memory use when writing. Imposes a target, not
a strict limit; row groups final size may be larger or smaller.
    parquetPageSize: # [string] Page size - Ideal memory size for page segments.
E.g., 1MB or 128MB. Generally, lower values improve reading speed, while higher
values improve compression. Imposes a target, not a strict limit; pages final size
may be larger or smaller.
    spacer: # [null]
    parquetVersion: # [string] Parquet version - Determines which data types are
supported and how they are represented.
    parquetDataPageVersion: # [string] Data page version - Serialization format of
data pages. Note that not all reader implemtations support Data page V2.
    shouldLogInvalidRows: # [boolean] Log invalid rows - Output up to 20 unique rows
that were skipped due to data format mismatch. Must have Logging set to Debug to see
output.

    # ------------------------------------------------------

    baseFileName: # [string] File name prefix expression - JavaScript expression to
define the output filename prefix (can be constant).
    fileNameSuffix: # [string] File name suffix expression - JavaScript expression
to define the output filename suffix (can be constant).  The `__format` variable
refers to the value of the `Data format` field (`json` or `raw`).  The
`__compression` field refers to the kind of compression being used (`none` or
`gzip`)
    maxFileSizeMB: # [number] Max file size (MB) - Maximum uncompressed output file
size. Files of this size will be closed and moved to final output location.
    maxFileOpenTimeSec: # [number] Max file open time (Sec) - Maximum amount of time
to write to a file. Files open for longer than this will be closed and moved to
final output location.
    maxFileIdleTimeSec: # [number] Max file idle time (Sec) - Maximum amount of time
to keep inactive files open. Files open for longer than this will be closed and
moved to final output location.
    maxOpenFiles: # [number] Max open files - Maximum number of files to keep open
concurrently. When over, the oldest open files will be closed and moved to final
output location.
    onBackpressure: # [string] Backpressure behavior - Whether to block or drop
events when all receivers are exerting backpressure.
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  s3_output: # [object]
    type: # [string] Output Type
    bucket: # [string] S3 bucket name - Name of the destination S3 bucket. Must be a
JavaScript expression (which can evaluate to a constant value), enclosed in quotes
or backticks. Can be evaluated only at init time. E.g., referencing a Global
Variable: `myBucket-${C.vars.myVar}`.
    region: # [string] Region - Region where the S3 bucket is located.
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method. Choose Auto to use IAM roles.

    # -------------- if awsAuthenticationMethod is manual ---------------

    awsApiKey: # [string] Access key - Access key
```

```
    # -------------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
references your access key and secret key.

    # -------------------------------------------------------

    awsSecretKey: # [string] Secret key - Secret key
    endpoint: # [string] Endpoint - S3 service endpoint. If empty, defaults to AWS'
Region-specific endpoint. Otherwise, it must point to S3-compatible endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing S3 requests.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    enableAssumeRole: # [boolean] Enable for S3 - Use Assume Role credentials to
access S3
    assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume
    assumeRoleExternalId: # [string] External ID - External ID to use when assuming
role
    stagePath: # [string] [required] Staging location - Filesystem location in which
to buffer files, before compressing and moving to final destination. Use performant
stable storage.
    addIdToStagePath: # [boolean] Add output ID - Append output's ID to staging
location.
    removeEmptyDirs: # [boolean] Remove staging dirs - Remove empty staging
directories after moving files.

    # -------------- if removeEmptyDirs is true ---------------

    emptyDirCleanupSec: # [number] Staging cleanup period - How often (secs) to
clean-up empty directories when 'Remove Staging Dirs' is enabled.

    # -------------------------------------------------------

    destPath: # [string] [required] Key prefix - Prefix to append to files before
uploading. Must be a JavaScript expression (which can evaluate to a constant value),
enclosed in quotes or backticks. Can be evaluated only at init time. E.g.,
referencing a Global Variable: `myKeyPrefix-${C.vars.myVar}`.
    objectACL: # [string] Object ACL - Object ACL to assign to uploaded objects.
    storageClass: # [string] Storage class - Storage class to select for uploaded
objects.
    serverSideEncryption: # [string] Server side encryption - Server-side encryption
for uploaded objects.

    # -------------- if serverSideEncryption is aws:kms ---------------

    kmsKeyId: # [string] KMS key ID - ID or ARN of the KMS customer managed key to
use for encryption

    # -------------------------------------------------------

    partitionExpr: # [string] Partitioning expression - JS expression defining how
```

```
files are partitioned and organized. Default is date-based. If blank, Stream will
fall back to the event's __partition field value â if present â otherwise to
each location's root directory.
    format: # [string] Data format - Format of the output data.

    # -------------- if format is json ---------------

    compress: # [string] Compress - Choose data compression format to apply before
moving files to final destination.

    # ------------------------------------------------------


    # -------------- if format is parquet ---------------

    parquetSchema: # [string] Parquet schema - Select a Parquet schema. New schemas
can be uploaded under Processing > Knowledge > Parquet Schemas
    parquetRowGroupSize: # [string] Row group size - Ideal memory size for row group
segments. E.g., 128MB or 1GB. Affects memory use when writing. Imposes a target, not
a strict limit; row groups final size may be larger or smaller.
    parquetPageSize: # [string] Page size - Ideal memory size for page segments.
E.g., 1MB or 128MB. Generally, lower values improve reading speed, while higher
values improve compression. Imposes a target, not a strict limit; pages final size
may be larger or smaller.
    spacer: # [null]
    parquetVersion: # [string] Parquet version - Determines which data types are
supported and how they are represented.
    parquetDataPageVersion: # [string] Data page version - Serialization format of
data pages. Note that not all reader implemtations support Data page V2.
    shouldLogInvalidRows: # [boolean] Log invalid rows - Output up to 20 unique rows
that were skipped due to data format mismatch. Must have Logging set to Debug to see
output.

    # ------------------------------------------------------

    baseFileName: # [string] File name prefix expression - JavaScript expression to
define the output filename prefix (can be constant).
    fileNameSuffix: # [string] File name suffix expression - JavaScript expression
to define the output filename suffix (can be constant).  The `__format` variable
refers to the value of the `Data format` field (`json` or `raw`).  The
`__compression` field refers to the kind of compression being used (`none` or
`gzip`)
    maxFileSizeMB: # [number] Max file size (MB) - Maximum uncompressed output file
size. Files of this size will be closed and moved to final output location.
    maxFileOpenTimeSec: # [number] Max file open time (Sec) - Maximum amount of time
to write to a file. Files open for longer than this will be closed and moved to
final output location.
    maxFileIdleTimeSec: # [number] Max file idle time (Sec) - Maximum amount of time
to keep inactive files open. Files open for longer than this will be closed and
moved to final output location.
    maxOpenFiles: # [number] Max open files - Maximum number of files to keep open
concurrently. When over, the oldest open files will be closed and moved to final
output location.
    onBackpressure: # [string] Backpressure behavior - Whether to block or drop
events when all receivers are exerting backpressure.
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
```

```
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  azure_blob_output: # [object]
    type: # [string] Output Type
    containerName: # [string] Container name - A container organizes a set of blobs,
similar to a directory in a file system.
    createContainer: # [boolean] Create container - Creates the configured container
in Azure Blob Storage if it does not already exist.
    destPath: # [string] [required] Blob prefix - Root directory prepended to path
before uploading.
    stagePath: # [string] [required] Staging location - Filesystem location in which
to buffer files, before compressing and moving to final destination. Use performant
stable storage.
    addIdToStagePath: # [boolean] Add output ID - Append output's ID to staging
location.
    removeEmptyDirs: # [boolean] Remove staging dirs - Remove empty staging
directories after moving files.

    # -------------- if removeEmptyDirs is true ---------------

    emptyDirCleanupSec: # [number] Staging cleanup period - How often (secs) to
clean-up empty directories when 'Remove Staging Dirs' is enabled.

    # ----------------------------------------------------------

    partitionExpr: # [string] Partitioning expression - JS expression defining how
files are partitioned and organized. Default is date-based. If blank, Stream will
fall back to the event's __partition field value â if present â otherwise to
each location's root directory.
    format: # [string] Data format - Format of the output data.

    # -------------- if format is json ---------------

    compress: # [string] Compress - Choose data compression format to apply before
moving files to final destination.

    # ----------------------------------------------------------


    # -------------- if format is parquet ---------------

    parquetSchema: # [string] Parquet schema - Select a Parquet schema. New schemas
can be uploaded under Processing > Knowledge > Parquet Schemas
    parquetRowGroupSize: # [string] Row group size - Ideal memory size for row group
segments. E.g., 128MB or 1GB. Affects memory use when writing. Imposes a target, not
a strict limit; row groups final size may be larger or smaller.
    parquetPageSize: # [string] Page size - Ideal memory size for page segments.
E.g., 1MB or 128MB. Generally, lower values improve reading speed, while higher
values improve compression. Imposes a target, not a strict limit; pages final size
may be larger or smaller.
    spacer: # [null]
    parquetVersion: # [string] Parquet version - Determines which data types are
supported and how they are represented.
    parquetDataPageVersion: # [string] Data page version - Serialization format of
data pages. Note that not all reader implemtations support Data page V2.
    shouldLogInvalidRows: # [boolean] Log invalid rows - Output up to 20 unique rows
that were skipped due to data format mismatch. Must have Logging set to Debug to see
output.
```

```
    # ------------------------------------------------------

    baseFileName: # [string] File name prefix expression - JavaScript expression to
define the output filename prefix (can be constant).
    fileNameSuffix: # [string] File name suffix expression - JavaScript expression
to define the output filename suffix (can be constant).  The `__format` variable
refers to the value of the `Data format` field (`json` or `raw`).  The
`__compression` field refers to the kind of compression being used (`none` or
`gzip`)
    maxFileSizeMB: # [number] Max file size (MB) - Maximum uncompressed output file
size. Files of this size will be closed and moved to final output location.
    maxFileOpenTimeSec: # [number] Max file open time (Sec) - Maximum amount of time
to write to a file. Files open for longer than this will be closed and moved to
final output location.
    maxFileIdleTimeSec: # [number] Max file idle time (Sec) - Maximum amount of time
to keep inactive files open. Files open for longer than this will be closed and
moved to final output location.
    maxOpenFiles: # [number] Max open files - Maximum number of files to keep open
concurrently. When over, the oldest open files will be closed and moved to final
output location.
    onBackpressure: # [string] Backpressure behavior - Whether to block or drop
events when all receivers are exerting backpressure.
    authType: # [string] Authentication method - Enter connection string directly,
or select a stored secret
    connectionString: # [string] Connection string - Enter your Azure Storage
account connection string. If left blank, Stream will fall back to
env.AZURE_STORAGE_CONNECTION_STRING.

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] Connection string (text secret) - Select (or create) a
stored text secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  azure_logs_output: # [object]
    type: # [string] Output Type
    logType: # [string] Log Type - The Log Type of events sent to this LogAnalytics
workspace. Can be overwritten by event field __logType.
    resourceId: # [string] Resource ID - Optional Resource ID of the Azure resource
the data should be associated with, can be overridden by event field __resourceId.
This populates the _ResourceId property and allows the data to be included in
resource-centric queries. If this field isn't specified, the data will not be
included in resource-centric queries.
```

```
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    authType: # [string] Authentication method - Enter workspace ID and workspace
key directly, or select a stored secret
    workspaceId: # [string] Workspace ID - Azure Log Analytics Workspace ID. See
Azure Dashboard WorkspaceÂ > Advanced settings.
    workspaceKey: # [string] Workspace key - Azure Log Analytics Workspace Primary
or Secondary Shared Key. See Azure Dashboard WorkspaceÂ > Advanced settings.

    # -------------- if authType is manual ---------------


    # ----------------------------------------------------------
```

```
    keypairSecret: # [string] Secret key pair - Select (or create) a stored secret
that references your access key and secret key.

    # -------------- if authType is secret ---------------


    # -----------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  kinesis_output: # [object]
    type: # [string] Output Type
    streamName: # [string] Stream Name - Kinesis stream name to send events to.
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method. Choose Auto to use IAM roles.

    # -------------- if awsAuthenticationMethod is manual ---------------

    awsApiKey: # [string] Access key - Access key

    # -----------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
references your access key and secret key.

    # -----------------------------------------------------

    awsSecretKey: # [string] Secret key - Secret key
    region: # [string] [required] Region - Region where the Kinesis stream is
located
    endpoint: # [string] Endpoint - Kinesis stream service endpoint. If empty,
defaults to AWS' Region-specific endpoint. Otherwise, it must point to Kinesis
stream-compatible endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing Kinesis stream requests.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    enableAssumeRole: # [boolean] Enable for Kinesis stream - Use Assume Role
credentials to access Kinesis stream
    assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume
    assumeRoleExternalId: # [string] External ID - External ID to use when assuming
role
    concurrency: # [number] Put request concurrency - Maximum number of ongoing put
requests before blocking.
    maxRecordSizeKB: # [number] Max record size (KB, uncompressed) - Maximum size
```

```
(KB) of each individual record before compression. For non-compressible data 1MB is
the max recommended size
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max
record size.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  honeycomb_output: # [object]
    type: # [string] Output Type
    dataset: # [string] Dataset name - Name of the dataset to send events to â
e.g., observability
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
```

```
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # --------------------------------------------------------

    authType: # [string] Authentication method - Enter API key directly, or select a
stored secret
    team: # [string] API key - Team API key where the dataset belongs

    # -------------- if authType is manual ---------------


    # --------------------------------------------------------

    textSecret: # [string] API key (text secret) - Select (or create) a stored text
secret

    # -------------- if authType is secret ---------------


    # --------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  azure_eventhub_output: # [object]
    type: # [string] Output Type
    brokers: # [array of strings] Brokers - List of Event Hubs Kafka brokers to
connect to, eg. yourdomain.servicebus.windows.net:9093. The hostname can be found in
the host portion of the primary or secondary connection string in Shared Access
```

```
Policies.
    topic: # [string] [required] Event Hub Name - The name of the Event Hub (a.k.a.
Kafka Topic) to publish events. Can be overwritten using field __topicOut.
    ack: # [number] Acknowledgments - Control the number of required acknowledgments
    format: # [string] Record data format - Format to use to serialize events before
writing to the Event Hubs Kafka brokers.
    maxRecordSizeKB: # [number] Max record size (KB, uncompressed) - Maximum size
(KB) of each record batch before compression. Setting should be < message.max.bytes
settings in Event Hubs brokers.
    flushEventCount: # [number] Max events per batch - Maximum number of events in a
batch before forcing a flush.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max
record size.
    connectionTimeout: # [number] Connection timeout (ms) - Maximum time to wait for
a successful connection.
    requestTimeout: # [number] Request timeout (ms) - Maximum time to wait for a
successful request.
    sasl: # [object] Authentication - Authentication parameters to use when
connecting to brokers. Using TLS is highly recommended.
      disabled: # [boolean] Disabled - Enable authentication.

      # -------------- if disabled is false ---------------

      mechanism: # [string] SASL mechanism - SASL authentication mechanism to use.
PLAIN is the only mechanism currently supported for Event Hubs Kafka brokers.
      username: # [string] Username - The username for authentication. For Event
Hubs, this should always be $ConnectionString.
      authType: # [string] Authentication method - Enter password directly, or
select a stored secret

      # ---------------------------------------------------------

    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - For Event Hubs, this
should always be false.

      # ---------------------------------------------------------

    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
```

```
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  google_chronicle_output: # [object]
    type: # [string] Output Type
    authenticationMethod: # [string] Authentication Method

    # -------------- if authenticationMethod is manual ---------------

    apiKey: # [string] API key - Organization's API key in Google Chronicle

    # -------------------------------------------------------


    # -------------- if authenticationMethod is secret ---------------

    apiKeySecret: # [string] API key (text secret) - Select (or create) a stored
text secret

    # -------------------------------------------------------

    logType: # [string] Log type - Log type value to send to Chronicle. Can be
overwritten by event field __logType.
    logTextField: # [string] Log text field - Name of the event field that contains
the log text to send. If not specified, Stream sends a JSON representation of the
whole event.
    logFormatType: # [string] Send events as
    region: # [string] Region - Regional endpoint to send events to
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
```

```
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  google_cloud_storage_output: # [object]
    type: # [string] Output Type
    bucket: # [string] Bucket name - Name of the destination Bucket. This value can
be a constant or a JavaScript expression that can only be evaluated at init time.
E.g. referencing a Global Variable: `myBucket-${C.vars.myVar}`.
    region: # [string] [required] Region - Region where the bucket is located.
    endpoint: # [string] [required] Endpoint - Google Cloud Storage service
endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing Google Cloud Storage requests.
    awsAuthenticationMethod: # [string] Authentication method

    # -------------- if awsAuthenticationMethod is manual ---------------

    awsApiKey: # [string] Access key - HMAC access Key
    awsSecretKey: # [string] Secret - HMAC secret

    # ----------------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
```

```
references your access key and secret key.

    # ------------------------------------------------------

    stagePath: # [string] [required] Staging location - Filesystem location in which
to buffer files, before compressing and moving to final destination. Use performant
stable storage.
    destPath: # [string] [required] Key prefix - Prefix to append to files before
uploading. Must be a JavaScript expression (which can evaluate to a constant value),
enclosed in quotes or backticks. Can be evaluated only at init time. E.g.,
referencing a Global Variable: `myKeyPrefix-${C.vars.myVar}`.
    objectACL: # [string] Object ACL - Object ACL to assign to uploaded objects.
    storageClass: # [string] Storage class - Storage class to select for uploaded
objects.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    addIdToStagePath: # [boolean] Add output ID - Append output's ID to staging
location.
    removeEmptyDirs: # [boolean] Remove staging dirs - Remove empty staging
directories after moving files.

    # -------------- if removeEmptyDirs is true ---------------

    emptyDirCleanupSec: # [number] Staging cleanup period - How often (secs) to
clean-up empty directories when 'Remove Staging Dirs' is enabled.

    # -------------------------------------------------------

    partitionExpr: # [string] Partitioning expression - JS expression defining how
files are partitioned and organized. Default is date-based. If blank, Stream will
fall back to the event's __partition field value â if present â otherwise to
each location's root directory.
    format: # [string] Data format - Format of the output data.

    # -------------- if format is json ---------------

    compress: # [string] Compress - Choose data compression format to apply before
moving files to final destination.

    # -------------------------------------------------------


    # -------------- if format is parquet ---------------

    parquetSchema: # [string] Parquet schema - Select a Parquet schema. New schemas
can be uploaded under Processing > Knowledge > Parquet Schemas
    parquetRowGroupSize: # [string] Row group size - Ideal memory size for row group
segments. E.g., 128MB or 1GB. Affects memory use when writing. Imposes a target, not
a strict limit; row groups final size may be larger or smaller.
    parquetPageSize: # [string] Page size - Ideal memory size for page segments.
E.g., 1MB or 128MB. Generally, lower values improve reading speed, while higher
values improve compression. Imposes a target, not a strict limit; pages final size
may be larger or smaller.
    spacer: # [null]
    parquetVersion: # [string] Parquet version - Determines which data types are
supported and how they are represented.
    parquetDataPageVersion: # [string] Data page version - Serialization format of
```

```
data pages. Note that not all reader implemtations support Data page V2.
    shouldLogInvalidRows: # [boolean] Log invalid rows - Output up to 20 unique rows
that were skipped due to data format mismatch. Must have Logging set to Debug to see
output.

    # ------------------------------------------------------

    baseFileName: # [string] File name prefix expression - JavaScript expression to
define the output filename prefix (can be constant).
    fileNameSuffix: # [string] File name suffix expression - JavaScript expression
to define the output filename suffix (can be constant).  The `__format` variable
refers to the value of the `Data format` field (`json` or `raw`).  The
`__compression` field refers to the kind of compression being used (`none` or
`gzip`)
    maxFileSizeMB: # [number] Max file size (MB) - Maximum uncompressed output file
size. Files of this size will be closed and moved to final output location.
    maxFileOpenTimeSec: # [number] Max file open time (Sec) - Maximum amount of time
to write to a file. Files open for longer than this will be closed and moved to
final output location.
    maxFileIdleTimeSec: # [number] Max file idle time (Sec) - Maximum amount of time
to keep inactive files open. Files open for longer than this will be closed and
moved to final output location.
    maxOpenFiles: # [number] Max open files - Maximum number of files to keep open
concurrently. When over, the oldest open files will be closed and moved to final
output location.
    onBackpressure: # [string] Backpressure behavior - Whether to block or drop
events when all receivers are exerting backpressure.
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  google_pubsub_output: # [object]
    type: # [string] Output Type
    topicName: # [string] Topic ID - ID of the topic to send events to.
    createTopic: # [boolean] Create topic - If enabled, create topic if it does not
exist.
    orderedDelivery: # [boolean] Ordered delivery - If enabled, send events in the
order they were added to the queue. For this to work correctly, the process
receiving events must have ordering enabled.
    region: # [string] Region - Region to publish messages to. Select 'default' to
allow Google to auto-select the nearest region. When using ordered delivery, the
selected region must be allowed by message storage policy.
    googleAuthMethod: # [string] Authentication Method - Google authentication
method. Choose Auto to use environment variables PUBSUB_PROJECT and
PUBSUB_CREDENTIALS.

    # -------------- if googleAuthMethod is manual ---------------

    serviceAccountCredentials: # [string] Service account credentials - Contents of
service account credentials (JSON keys) file downloaded from Google Cloud. To upload
a file, click the upload button at this field's upper right. As an alternative, you
can use environment variables (see [here](https://googleapis.dev/ruby/google-cloud-
pubsub/latest/file.AUTHENTICATION.html)).

    # ------------------------------------------------------
```

```
    # -------------- if googleAuthMethod is secret ---------------

    secret: # [string] Service account credentials (text secret) - Select (or
create) a stored text secret

    # ------------------------------------------------------

    batchSize: # [number] Batch size - The maximum number of items the Google API
should batch before it sends them to the topic.
    batchTimeout: # [number] Batch timeout (ms) - The maximum amount of time, in
milliseconds, that the Google API should wait to send a batch (if the Batch size is
not reached).
    maxQueueSize: # [number] Max queue size - Maximum number of queued batches
before blocking.
    maxRecordSizeKB: # [number] Max batch size (KB) - Maximum size (KB) of batches
to send.
    maxInProgress: # [number] Max concurrent requests - The maximum number of in-
progress API requests before backpressure is applied.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  kafka_output: # [object]
    type: # [string] Output Type
    brokers: # [array of strings] Brokers - List of Kafka brokers to connect to,
e.g., kafkaBrokerHost:9092.
    topic: # [string] [required] Topic - The topic to publish events to. Can be
overridden using the __topicOut field.
    ack: # [number] Acknowledgments - Control the number of required
acknowledgments.
    format: # [string] Record data format - Format to use to serialize events before
```

```
writing to Kafka.
    compression: # [string] Compression - Codec to use to compress the data before
sending to Kafka.
    maxRecordSizeKB: # [number] Max record size (KB, uncompressed) - Maximum size
(KB) of each record batch before compression. Setting should be < message.max.bytes
settings in Kafka brokers.
    flushEventCount: # [number] Max events per batch - Maximum number of events in a
batch before forcing a flush.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max
record size.
    kafkaSchemaRegistry: # [object] Kafka Schema Registry Authentication
      disabled: # [boolean] Disabled - Enable Schema Registry

      # -------------- if disabled is false ---------------

      schemaRegistryURL: # [string] Schema Registry URL - URL for access to the
Confluent Schema Registry, i.e.: http://localhost:8081
      defaultKeySchemaId: # [number] Default key schema ID - Used when
__keySchemaIdOut is not present, to transform key values, leave blank if key
transformation is not required by default.
      defaultValueSchemaId: # [number] Default value schema ID - Used when
__valueSchemaIdOut is not present, to transform _raw, leave blank if value
transformation is not required by default.
      tls: # [object] TLS settings (client side)
        disabled: # [boolean] Disabled

        # -------------- if disabled is false ---------------

        rejectUnauthorized: # [boolean] Validate server certs - Reject certs that
are not authorized by a CA in the CA certificate path, or by another trusted CA
(e.g., the system's CA). Defaults to No.
        servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
        certificateName: # [string] Certificate name - The name of the predefined
certificate.
        caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
        privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
        certPath: # [string] Certificate path (mutual auth) - Path on client in
which to find certificates to use. PEM format. Can reference $ENV_VARS.
        passphrase: # [string] Passphrase - Passphrase to use to decrypt private
key.
        minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
        maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

        # ----------------------------------------------------------


      # ----------------------------------------------------------

    connectionTimeout: # [number] Connection timeout (ms) - Maximum time to wait for
a successful connection.
    requestTimeout: # [number] Request timeout (ms) - Maximum time to wait for a
successful request.
    sasl: # [object] Authentication - Authentication parameters to use when
connecting to brokers. Using TLS is highly recommended.
```

```
      disabled: # [boolean] Disabled - Enable Authentication

      # -------------- if disabled is false ---------------

      mechanism: # [string] SASL mechanism - SASL authentication mechanism to use.

      # ----------------------------------------------------

    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ----------------------------------------------------

    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
```

```
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  confluent_cloud_output: # [object]
    type: # [string] Output Type
    brokers: # [array of strings] Brokers - List of Confluent Cloud brokers to
connect to, e.g., yourAccount.confluent.cloud:9092.
    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ----------------------------------------------------------

    topic: # [string] [required] Topic - The topic to publish events to. Can be
overridden using the __topicOut field.
    ack: # [number] Acknowledgments - Control the number of required
acknowledgments.
    format: # [string] Record data format - Format to use to serialize events before
writing to Kafka.
    compression: # [string] Compression - Codec to use to compress the data before
sending to Kafka.
    maxRecordSizeKB: # [number] Max record size (KB, uncompressed) - Maximum size
(KB) of each record batch before compression. Setting should be < message.max.bytes
settings in Kafka brokers.
    flushEventCount: # [number] Max events per batch - Maximum number of events in a
batch before forcing a flush.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max
record size.
    kafkaSchemaRegistry: # [object] Kafka Schema Registry Authentication
      disabled: # [boolean] Disabled - Enable Schema Registry

      # -------------- if disabled is false ---------------

      schemaRegistryURL: # [string] Schema Registry URL - URL for access to the
Confluent Schema Registry, i.e.: http://localhost:8081
      defaultKeySchemaId: # [number] Default key schema ID - Used when
__keySchemaIdOut is not present, to transform key values, leave blank if key
```

```
transformation is not required by default.
      defaultValueSchemaId: # [number] Default value schema ID - Used when
__valueSchemaIdOut is not present, to transform _raw, leave blank if value
transformation is not required by default.
      tls: # [object] TLS settings (client side)
        disabled: # [boolean] Disabled

        # -------------- if disabled is false ---------------

        rejectUnauthorized: # [boolean] Validate server certs - Reject certs that
are not authorized by a CA in the CA certificate path, or by another trusted CA
(e.g., the system's CA). Defaults to No.
        servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
        certificateName: # [string] Certificate name - The name of the predefined
certificate.
        caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
        privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
        certPath: # [string] Certificate path (mutual auth) - Path on client in
which to find certificates to use. PEM format. Can reference $ENV_VARS.
        passphrase: # [string] Passphrase - Passphrase to use to decrypt private
key.
        minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
        maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

        # ----------------------------------------------------------


      # ------------------------------------------------------------

    connectionTimeout: # [number] Connection timeout (ms) - Maximum time to wait for
a successful connection.
    requestTimeout: # [number] Request timeout (ms) - Maximum time to wait for a
successful request.
    sasl: # [object] Authentication - Authentication parameters to use when
connecting to brokers. Using TLS is highly recommended.
      disabled: # [boolean] Disabled - Enable Authentication

      # -------------- if disabled is false ---------------

      mechanism: # [string] SASL mechanism - SASL authentication mechanism to use.

      # ------------------------------------------------------------

    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
```

```
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  elastic_output: # [object]
    type: # [string] Output Type
    loadBalanced: # [boolean] Load balancing - Use load-balanced destinations

    # -------------- if loadBalanced is false ---------------

    url: # [string] Bulk API URL or Cloud ID - Enter Cloud ID or URL to an Elastic
cluster to send events to â e.g., http://elastic:9200/_bulk
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.

    # ----------------------------------------------------------


    # -------------- if loadBalanced is true ---------------

    excludeSelf: # [boolean] Exclude current host IPs - Exclude all IPs of the
current host from the list of any resolved hostnames.
    urls: # [array] Bulk API URLs
      - url: # [string] URL - URL to an Elastic node to send events to â e.g.,
http://elastic:9200/_bulk
        weight: # [number] Load Weight - The weight to use for load-balancing
purposes.
    dnsResolvePeriodSec: # [number] DNS resolution period (seconds) - Re-resolve any
hostnames every this many seconds and pick up destinations from A records.
    loadBalanceStatsPeriodSec: # [number] Load balance stats period (seconds) - How
far back in time to keep traffic stats for load balancing purposes.

    # ----------------------------------------------------------

    index: # [string] Index or Data Stream - Index or Data Stream to send events to.
Must be a JavaScript expression (which can evaluate to a constant value), enclosed
in quotes or backticks. Can be overwritten by an event's __index field.
    docType: # [string] Type - Document type to use for events. Can be overwritten
by an event's __type field
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
```

```
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    extraParams: # [array] Extra Parameters - Extra Parameters.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    auth: # [object]
      disabled: # [boolean] Authentication Disabled

      # -------------- if disabled is false ---------------

      authType: # [string] Authentication method - Enter credentials directly, or
select a stored secret

      # ---------------------------------------------------------

    elasticVersion: # [string] Elastic Version - Optional Elasticsearch version,
used to format events. If not specified, will auto-discover version.
    elasticPipeline: # [string] Elastic pipeline - Optional Elasticsearch
destination pipeline
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ---------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
```

```
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  newrelic_output: # [object]
    type: # [string] Output Type
    region: # [string] Region - Which New Relic region endpoint to use.
    logType: # [string] Log type - Name of the logtype to send with events, e.g.:
observability, access_log. The event's 'sourcetype' field (if set) will override
this value.
    messageField: # [string] Log message field - Name of field to send as log
message value. If not present, event will be serialized and sent as JSON.
    metadata: # [array] Fields - Fields to add to events from this input.
      - name: # [string] Name - Field name
        value: # [string] Value - JavaScript expression to compute field's value,
enclosed in quotes or backticks. (Can evaluate to a constant.)
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
```

```
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    authType: # [string] Authentication method - Enter API key directly, or select a
stored secret
    apiKey: # [string] API key - New Relic API key. Can be overridden using
__newRelic_apiKey field.

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] API key (text secret) - Select (or create) a stored text
secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  newrelic_events_output: # [object]
    type: # [string] Output Type
    region: # [string] [required] Region - Which New Relic region endpoint to use.
    accountId: # [string] Account ID - New Relic account ID
    eventType: # [string] [required] Event type - Default eventType to use when not
present in an event. For more information, see [here]
(https://docs.newrelic.com/docs/telemetry-data-platform/custom-data/custom-
events/data-requirements-limits-custom-event-data/#reserved-words).
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
```

```
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    authType: # [string] Authentication method - Enter API key directly, or select a
stored secret
    apiKey: # [string] API key - New Relic API key. Can be overridden using
__newRelic_apiKey field.

    # -------------- if authType is manual ---------------


    # ----------------------------------------------------------

    textSecret: # [string] API key (text secret) - Select (or create) a stored text
secret

    # -------------- if authType is secret ---------------


    # ----------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  influxdb_output: # [object]
```

```
    type: # [string] Output Type
    url: # [string] Write API URL - URL of an InfluxDB cluster to send events to,
e.g., http://localhost:8086/write
    useV2API: # [boolean] Use v2 API - The v2 API can be enabled with InfluxDB
versions 1.8 and later.

    # -------------- if useV2API is false ---------------

    database: # [string] Database - Database to write to.

    # ----------------------------------------------------------


    # -------------- if useV2API is true ---------------

    bucket: # [string] Bucket - Bucket to write to.
    org: # [string] Organization - Organization ID for this bucket.

    # ----------------------------------------------------------

    timestampPrecision: # [string] Timestamp precision - Sets the precision for the
supplied Unix time values. Defaults to milliseconds.
    dynamicValueFieldName: # [boolean] Dynamic value fields - Enabling this will
pull the value field from the metric name. E,g, 'db.query.user' will use 'db.query'
as the measurement and 'user' as the value field.
    valueFieldName: # [string] Value field name - Name of the field in which to
store the metric when sending to InfluxDB. If dynamic generation is enabled and
fails, this will be used as a fallback.
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------
```

```
    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    authType: # [string] Authentication type - InfluxDB authentication type

    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for Basic authentication
    password: # [string] Password - Password for Basic authentication

    # -------------------------------------------------------


    # -------------- if authType is token ---------------

    token: # [string] Token - Bearer token to include in the authorization header

    # -------------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # -------------------------------------------------------


    # -------------- if authType is textSecret ---------------

    textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret

    # -------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  cloudwatch_output: # [object]
    type: # [string] Output Type
```

```
    logGroupName: # [string] Log group name - CloudWatch log group to associate
events with
    logStreamName: # [string] [required] Log stream prefix - Prefix for CloudWatch
log stream name. This prefix will be used to generate a unique log stream name per
cribl instance, for example: myStream_myHost_myOutputId
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method. Choose Auto to use IAM roles.

    # -------------- if awsAuthenticationMethod is manual ---------------

    awsApiKey: # [string] Access key - Access key

    # --------------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
references your access key and secret key.

    # --------------------------------------------------------

    awsSecretKey: # [string] Secret key - Secret key
    region: # [string] [required] Region - Region where the CloudWatchLogs is
located
    endpoint: # [string] Endpoint - CloudWatchLogs service endpoint. If empty,
defaults to AWS' Region-specific endpoint. Otherwise, it must point to
CloudWatchLogs-compatible endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing CloudWatchLogs requests.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    enableAssumeRole: # [boolean] Enable for CloudWatchLogs - Use Assume Role
credentials to access CloudWatchLogs
    assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume
    assumeRoleExternalId: # [string] External ID - External ID to use when assuming
role
    maxQueueSize: # [number] Max queue size - Maximum number of queued batches
before blocking
    maxRecordSizeKB: # [number] Max record size (KB, uncompressed) - Maximum size
(KB) of each individual record before compression. For non compressible data 1MB is
the max recommended size
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max
record size.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
```

```
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  minio_output: # [object]
    type: # [string] Output Type
    endpoint: # [string] [required] MinIO endpoint - MinIO service url (e.g.
http://minioHost:9000)
    bucket: # [string] MinIO bucket name - Name of the destination MinIO bucket.
This value can be a constant or a JavaScript expression that can only be evaluated
at init time. E.g. referencing a Global Variable: `myBucket-${C.vars.myVar}`.
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method

    # -------------- if awsAuthenticationMethod is manual ---------------

    awsApiKey: # [string] Access key - Access key

    # ------------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
references your access key and secret key.

    # ------------------------------------------------------

    awsSecretKey: # [string] Secret key - Secret key
    region: # [string] Region - Region where the MinIO service/cluster is located
    stagePath: # [string] [required] Staging location - Filesystem location in which
to buffer files, before compressing and moving to final destination. Use performant
stable storage.
    addIdToStagePath: # [boolean] Add output ID - Append output's ID to staging
location.
    removeEmptyDirs: # [boolean] Remove staging dirs - Remove empty staging
directories after moving files.

    # -------------- if removeEmptyDirs is true ---------------

    emptyDirCleanupSec: # [number] Staging cleanup period - How often (secs) to
clean-up empty directories when 'Remove Staging Dirs' is enabled.

    # ------------------------------------------------------
```

```
    destPath: # [string] [required] Key prefix - Root directory to prepend to path
before uploading. Enter a constant, or a JS expression enclosed in quotes or
backticks.
    signatureVersion: # [string] Signature version - Signature version to use for
signing MinIO requests.
    objectACL: # [string] Object ACL - Object ACL to assign to uploaded objects.
    storageClass: # [string] Storage class - Storage class to select for uploaded
objects.
    serverSideEncryption: # [string] Server-side encryption - Server-side encryption
for uploaded objects.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    partitionExpr: # [string] Partitioning expression - JS expression defining how
files are partitioned and organized. Default is date-based. If blank, Stream will
fall back to the event's __partition field value â if present â otherwise to
each location's root directory.
    format: # [string] Data format - Format of the output data.

    # -------------- if format is json ---------------

    compress: # [string] Compress - Choose data compression format to apply before
moving files to final destination.

    # ------------------------------------------------------


    # -------------- if format is parquet ---------------

    parquetSchema: # [string] Parquet schema - Select a Parquet schema. New schemas
can be uploaded under Processing > Knowledge > Parquet Schemas
    parquetRowGroupSize: # [string] Row group size - Ideal memory size for row group
segments. E.g., 128MB or 1GB. Affects memory use when writing. Imposes a target, not
a strict limit; row groups final size may be larger or smaller.
    parquetPageSize: # [string] Page size - Ideal memory size for page segments.
E.g., 1MB or 128MB. Generally, lower values improve reading speed, while higher
values improve compression. Imposes a target, not a strict limit; pages final size
may be larger or smaller.
    spacer: # [null]
    parquetVersion: # [string] Parquet version - Determines which data types are
supported and how they are represented.
    parquetDataPageVersion: # [string] Data page version - Serialization format of
data pages. Note that not all reader implemtations support Data page V2.
    shouldLogInvalidRows: # [boolean] Log invalid rows - Output up to 20 unique rows
that were skipped due to data format mismatch. Must have Logging set to Debug to see
output.

    # ------------------------------------------------------

    baseFileName: # [string] File name prefix expression - JavaScript expression to
define the output filename prefix (can be constant).
    fileNameSuffix: # [string] File name suffix expression - JavaScript expression
to define the output filename suffix (can be constant).  The `__format` variable
refers to the value of the `Data format` field (`json` or `raw`).  The
`__compression` field refers to the kind of compression being used (`none` or
`gzip`)
    maxFileSizeMB: # [number] Max file size (MB) - Maximum uncompressed output file
```

```
size. Files of this size will be closed and moved to final output location.
    maxFileOpenTimeSec: # [number] Max file open time (Sec) - Maximum amount of time
to write to a file. Files open for longer than this will be closed and moved to
final output location.
    maxFileIdleTimeSec: # [number] Max file idle time (Sec) - Maximum amount of time
to keep inactive files open. Files open for longer than this will be closed and
moved to final output location.
    maxOpenFiles: # [number] Max open files - Maximum number of files to keep open
concurrently. When over, the oldest open files will be closed and moved to final
output location.
    onBackpressure: # [string] Backpressure behavior - Whether to block or drop
events when all receivers are exerting backpressure.
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  statsd_output: # [object]
    type: # [string] Output Type
    protocol: # [string] Destination Protocol - Protocol to use when communicating
with the destination.

    # -------------- if protocol is tcp ---------------

    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    writeTimeout: # [number] Write Timeout - Amount of time (milliseconds) to wait
for a write to complete before assuming connection is dead
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # ------------------------------------------------------

    host: # [string] [required] Host - The hostname of the destination.
    port: # [number] [required] Port - Destination port.
    mtu: # [number] Max record Size (Bytes) - Used when Protocol is UDP, to specify
the maximum size of packets sent to the destination. Also known as the MTU for the
network path to the destination system.
    flushPeriodSec: # [number] Flush period (sec) - Used when Protocol is TCP, to
specify how often buffers should be flushed resulting in records sent to the
destination.
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  statsd_ext_output: # [object]
    type: # [string] Output Type
    protocol: # [string] Destination Protocol - Protocol to use when communicating
```

```
with the destination.

    # -------------- if protocol is tcp ---------------

    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    writeTimeout: # [number] Write Timeout - Amount of time (milliseconds) to wait
for a write to complete before assuming connection is dead
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # ------------------------------------------------------

    host: # [string] [required] Host - The hostname of the destination.
    port: # [number] [required] Port - Destination port.
    mtu: # [number] Max record Size (Bytes) - Used when Protocol is UDP, to specify
the maximum size of packets sent to the destination. Also known as the MTU for the
network path to the destination system.
    flushPeriodSec: # [number] Flush period (sec) - Used when Protocol is TCP, to
specify how often buffers should be flushed resulting in records sent to the
destination.
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  graphite_output: # [object]
    type: # [string] Output Type
    protocol: # [string] Destination Protocol - Protocol to use when communicating
with the destination.

    # -------------- if protocol is tcp ---------------

    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    writeTimeout: # [number] Write Timeout - Amount of time (milliseconds) to wait
for a write to complete before assuming connection is dead
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # ------------------------------------------------------

    host: # [string] [required] Host - The hostname of the destination.
    port: # [number] [required] Port - Destination port.
    mtu: # [number] Max record Size (Bytes) - Used when Protocol is UDP, to specify
the maximum size of packets sent to the destination. Also known as the MTU for the
network path to the destination system.
    flushPeriodSec: # [number] Flush period (sec) - Used when Protocol is TCP, to
specify how often buffers should be flushed resulting in records sent to the
destination.
```

```
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  router_output: # [object]
    type: # [string] Output Type
    rules: # [array] Rules - Event routing rules
      - filter: # [string] Filter Expression - JavaScript expression to select
events to send to output
        output: # [string] Output - Output to send matching events to
        description: # [string] Description - Description of this rule's purpose
        final: # [boolean] Final - Flag to control whether to stop the event from
being checked against other rules
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  sqs_output: # [object]
    type: # [string] Output Type
    queueName: # [string] Queue Name - The name, URL, or ARN of the SQS queue to
send events to. When a non-AWS URL is specified, format must be:
'{url}/myQueueName'. E.g., 'https://host:port/myQueueName'. Must be a JavaScript
expression (which can evaluate to a constant value), enclosed in quotes or
backticks. Can be evaluated only at init time. E.g., referencing a Global Variable:
`https://host:port/myQueue-${C.vars.myVar}`.
    queueType: # [string] [required] Queue Type - The queue type used (or created).
Defaults to Standard.
    awsAccountId: # [string] AWS Account ID - SQS queue owner's AWS account ID.
Leave empty if SQS queue is in same AWS account.
    messageGroupId: # [string] Message Group ID - This parameter applies only to
FIFO queues. The tag that specifies that a message belongs to a specific message
group. Messages that belong to the same message group are processed in a FIFO
manner. Use event field __messageGroupId to override this value.
    createQueue: # [boolean] Create Queue - Create queue if it does not exist.
    awsAuthenticationMethod: # [string] Authentication method - AWS authentication
method. Choose Auto to use IAM roles.

    # -------------- if awsAuthenticationMethod is manual ---------------

    awsApiKey: # [string] Access key - Access key

    # --------------------------------------------------------


    # -------------- if awsAuthenticationMethod is secret ---------------

    awsSecret: # [string] Secret key pair - Select (or create) a stored secret that
references your access key and secret key.

    # --------------------------------------------------------
```

```
    awsSecretKey: # [string] Secret key - Secret key
    region: # [string] Region - AWS Region where the SQS queue is located. Required,
unless the Queue entry is a URL or ARN that includes a Region.
    endpoint: # [string] Endpoint - SQS service endpoint. If empty, defaults to AWS'
Region-specific endpoint. Otherwise, it must point to SQS-compatible endpoint.
    signatureVersion: # [string] Signature version - Signature version to use for
signing SQS requests.
    reuseConnections: # [boolean] Reuse connections - Whether to reuse connections
between requests, which can improve performance.
    rejectUnauthorized: # [boolean] Reject unauthorized certificates - Whether to
reject certificates that cannot be verified against a valid CA (e.g., self-signed
certificates).
    enableAssumeRole: # [boolean] Enable for SQS - Use Assume Role credentials to
access SQS
    assumeRoleArn: # [string] AssumeRole ARN - Amazon Resource Name (ARN) of the
role to assume
    assumeRoleExternalId: # [string] External ID - External ID to use when assuming
role
    maxQueueSize: # [number] Max queue size - Maximum number of queued batches
before blocking.
    maxRecordSizeKB: # [number] Max record size (KB) - Maximum size (KB) of batches
to send. Per the SQS spec, the max allowed value is 256 KB.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max
record size.
    maxInProgress: # [number] Max concurrent requests - The maximum number of in-
progress API requests before backpressure is applied.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # --------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  snmp_output: # [object]
```

```
    type: # [string] Output Type
    hosts: # [array] SNMP Trap Destinations - One or more SNMP destinations to
forward traps to
      - host: # [string] Address - Destination host
        port: # [number] Port - Destination port, default is 162
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  sumo_logic_output: # [object]
    type: # [string] Output Type
    url: # [string] API URL - Sumo Logic HTTP collector URL to which events should
be sent.
    customSource: # [string] Custom source name - Optionally, override the source
name configured on the SumoÂ Logic HTTP collector. This can also be overridden at
the event level with the __sourceName field.
    customCategory: # [string] Custom source category - Optionally, override the
source category configured on the SumoÂ Logic HTTP collector. This can also be
overridden at the event level with the __sourceCategory field.
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
```

```
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  datadog_output: # [object]
    type: # [string] Output Type
    contentType: # [string] Send logs as - The content type to use when sending
logs.
    message: # [string] Message field - Name of the event field that contains the
message to send. If not specified, Stream sends a JSON representation of the whole
event.
    source: # [string] Source - Name of the source to send with logs. When you send
logs as JSON objects, the event's 'source' field (if set) will override this value.
    host: # [string] Host - Name of the host to send with logs. When you send logs
as JSON objects, the event's 'host' field (if set) will override this value.
    service: # [string] Service - Name of the service to send with logs. When you
send logs as JSON objects, the event's '__service' field (if set) will override this
value.
    tags: # [array of strings] Datadog tags - List of tags to send with logs (e.g.,
'env:prod', 'env_staging:east').
    allowApiKeyFromEvents: # [boolean] Allow API key from events - If enabled, the
API key can be set from the event's '__agent_api_key' field.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
    severity: # [string] Severity - Default value for message severity. When you
send logs as JSON objects, the event's '__severity' field (if set) will override
this value.
    site: # [string] Datadog site
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
```

```
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # --------------------------------------------------------

    authType: # [string] Authentication method - Enter API key directly, or select a
stored secret
    apiKey: # [string] API key - Organization's API key in Datadog

    # -------------- if authType is manual ---------------


    # --------------------------------------------------------

    textSecret: # [string] API key (text secret) - Select (or create) a stored text
secret

    # -------------- if authType is secret ---------------


    # --------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
  grafana_cloud_output: # [object]
```

```
    type: # [string] Output Type
    lokiUrl: # [string] Loki URL - The endpoint to send logs to, e.g.: https://logs-prod-us-central1.grafana.net
    prometheusUrl: # [string] [required] Prometheus URL - The remote_write endpoint to send Prometheus metrics to, e.g.: https://prometheus-blocks-prod-us-central1.grafana.net/api/prom/push
    message: # [string] Logs message field - Name of the event field that contains the message to send. If not specified, Stream sends a JSON representation of the whole event.
    messageFormat: # [string] Message Format - Which format to use when sending logs to Loki (Protobuf or JSON).  Defaults to Protobuf.

    # -------------- if messageFormat is json ---------------

    compress: # [boolean] Compress - Whether to compress the payload body before sending. Applies only to Loki's JSON payloads, as both Prometheus' and Loki's Protobuf variant are snappy-compressed by default.

    # --------------------------------------------------------

    labels: # [array] Logs labels - List of labels to send with logs. Labels define Loki streams, so use static labels to avoid proliferating label value combinations and streams. Can be merged and/or overridden by the event's __labels field (e.g.: '__labels: {host: "cribl.io", level: "error"}').
      - name: # [string] Name - Name of the label.
        value: # [string] Value - Value of the label.
    metricRenameExpr: # [string] Metrics renaming expression - A JS expression that can be used to rename metrics. E.g.: name.replace(/\./g, '_') will replace all '.' characters in a metric's name with the supported '_' character. Use the 'name' global variable to access the metric's name.  You can access event fields' values via __e.<fieldName>.
    prometheusAuth: # [object]
      authType: # [string] Authentication Type - The authentication method to use for the HTTP requests

      # -------------- if authType is token ---------------

      token: # [string] Auth token - Bearer token to include in the authorization header. In Grafana Cloud, this is generally built by concatenating the username and the API key, separated by a colon. E.g.: <your-username>:<your-api-key>.

      # --------------------------------------------------------


      # -------------- if authType is textSecret ---------------

      textSecret: # [string] Auth token (text secret) - Select (or create) a stored text secret

      # --------------------------------------------------------


      # -------------- if authType is basic ---------------

      username: # [string] Username - Username for authentication
      password: # [string] Password - Password (a.k.a API key in Grafana Cloud domain) for authentication

      # --------------------------------------------------------
```

```
      # -------------- if authType is credentialsSecret ---------------

      credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

      # ----------------------------------------------------------

    lokiAuth: # [object]
      authType: # [string] Authentication Type - The authentication method to use
for the HTTP requests

      # -------------- if authType is token ---------------

      token: # [string] Auth token - Bearer token to include in the authorization
header. In Grafana Cloud, this is generally built by concatenating the username and
the API key, separated by a colon. E.g.: <your-username>:<your-api-key>.

      # ----------------------------------------------------------


      # -------------- if authType is textSecret ---------------

      textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

      # ----------------------------------------------------------


      # -------------- if authType is basic ---------------

      username: # [string] Username - Username for authentication
      password: # [string] Password - Password (a.k.a API key in Grafana Cloud
domain) for authentication

      # ----------------------------------------------------------


      # -------------- if authType is credentialsSecret ---------------

      credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

      # ----------------------------------------------------------

    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking. Warning: Setting this value > 1 can cause Loki and Prometheus to
complain about entries being delivered out of order.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body. Warning: Setting this too low can increase the number of ongoing
requests (depending on the value of 'Request concurrency'); this can cause Loki and
Prometheus to complain about entries being delivered out of order.
    maxPayloadEvents: # [number] Max events per request - Maximum number of events
to include in the request body. Default is 0 (unlimited). Warning: Setting this too
low can increase the number of ongoing requests (depending on the value of 'Request
concurrency'); this can cause Loki and Prometheus to complain about entries being
delivered out of order.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
```

```
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Maximum
time between requests. Small values can reduce the payload size below the configured
'Max record size' and 'Max events per request'. Warning: Setting this too low can
increase the number of ongoing requests (depending on the value of 'Request
concurrency'); this can cause Loki and Prometheus to complain about entries being
delivered out of order.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ---------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  loki_output: # [object]
    type: # [string] Output Type
    url: # [string] Loki URL - The endpoint to send logs to.
    message: # [string] Logs message field - Name of the event field that contains
the message to send. If not specified, Stream sends a JSON representation of the
whole event.
    messageFormat: # [string] Message Format - Which format to use when sending logs
to Loki (Protobuf or JSON).  Defaults to Protobuf.
```

```
    # -------------- if messageFormat is json ---------------

    compress: # [boolean] Compress - Whether to compress the payload body before
sending.

    # --------------------------------------------------------

    labels: # [array] Logs labels - List of labels to send with logs. Labels define
Loki streams, so use static labels to avoid proliferating label value combinations
and streams. Can be merged and/or overridden by the event's __labels field (e.g.:
'__labels: {host: "cribl.io", level: "error"}').
      - name: # [string] Name - Name of the label.
        value: # [string] Value - Value of the label.
    authType: # [string] Authentication Type - The authentication method to use for
the HTTP requests

    # -------------- if authType is token ---------------

    token: # [string] Auth token - Bearer token to include in the authorization
header. In Grafana Cloud, this is generally built by concatenating the username and
the API key, separated by a colon. E.g.: <your-username>:<your-api-key>.

    # --------------------------------------------------------


    # -------------- if authType is textSecret ---------------

    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

    # --------------------------------------------------------


    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for authentication
    password: # [string] Password - Password (a.k.a API key in Grafana Cloud domain)
for authentication

    # --------------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # --------------------------------------------------------

    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking. Warning: Setting this value > 1 can cause Loki to complain about
entries being delivered out of order.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body. Warning: Setting this too low can increase the number of ongoing
requests (depending on the value of 'Request concurrency'); this can cause Loki to
complain about entries being delivered out of order.
    maxPayloadEvents: # [number] Max events per request - Maximum number of events
to include in the request body. Defaults to 0 (unlimited). Warning: Setting this too
low can increase the number of ongoing requests (depending on the value of 'Request
concurrency'); this can cause Loki to complain about entries being delivered out of
```

```
order.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Maximum
time between requests. Small values can reduce the payload size below the configured
'Max record size' and 'Max events per request'. Warning: Setting this too low can
increase the number of ongoing requests (depending on the value of 'Request
concurrency'); this can cause Loki to complain about entries being delivered out of
order.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ---------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  prometheus_output: # [object]
    type: # [string] Output Type
    url: # [string] Remote Write URL - The endpoint to send metrics to.
    metricRenameExpr: # [string] Metric renaming expression - A JS expression that
can be used to rename metrics. E.g.: name.replace(/\./g, '_') will replace all '.'
```

```
characters in a metric's name with the supported '_' character. Use the 'name'
global variable to access the metric's name.  You can access event fields' values
via __e.<fieldName>.
    sendMetadata: # [boolean] Send metadata - Whether to generate and send metadata
(`type` and `metricFamilyName`) requests.

    # -------------- if sendMetadata is true ---------------

    metricsFlushPeriodSec: # [number] Metadata flush period (sec) - How frequently
metrics metadata is sent out. Value cannot be smaller than the base Flush period
(sec) set above.

    # -------------------------------------------------------

    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
```

```
    pqControls: # [object]

    # ------------------------------------------------------

    authType: # [string] Authentication type - Remote Write authentication type

    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for Basic authentication
    password: # [string] Password - Password for Basic authentication

    # -------------------------------------------------------


    # -------------- if authType is token ---------------

    token: # [string] Token - Bearer token to include in the authorization header

    # -------------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # -------------------------------------------------------


    # -------------- if authType is textSecret ---------------

    textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret

    # -------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  ring_output: # [object]
    type: # [string] Output Type
    format: # [string] Data format - Format of the output data.
    partitionExpr: # [string] Partitioning expression - JS expression to define how
files are partitioned and organized. If left blank, Cribl Stream will fallback on
event.__partition.
    maxDataSize: # [string] Max data size - Maximum disk space allowed to be
consumed (e.g., 420MB or 4GB). Once reached, older data will be deleted.
    maxDataTime: # [string] Max data age - Maximum amount of time to retain data
(e.g., 2h or 4d). Once reached, older data will be deleted.
    compress: # [string] Compression - Select data compression format. Optional.
    destPath: # [string] Path location - Path to use to write metrics. Defaults to
$CRIBL_HOME/state/<id>`
    onBackpressure: # [string] Backpressure behavior - Whether to block or drop
events when all receivers are exerting backpressure.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
```

```
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
  open_telemetry_output: # [object]
    type: # [string] Output Type
    endpoint: # [string] Endpoint - The endpoint to send OTEL events to. It can be
any valid URL or an IP address (both IPv4 and IPv6 are supported). If the port is
not specified, it will default to 4317, unless the endpoint is an HTTPS-based URL or
TLS is enabled. In such cases, it will default to 443.
    authType: # [string] Authentication type - OpenTelemetry authentication type

    # -------------- if authType is basic ---------------

    username: # [string] Username - Username for Basic authentication
    password: # [string] Password - Password for Basic authentication

    # ---------------------------------------------------------


    # -------------- if authType is token ---------------

    token: # [string] Token - Bearer token to include in the authorization header

    # ---------------------------------------------------------


    # -------------- if authType is credentialsSecret ---------------

    credentialsSecret: # [string] Credentials secret - Select (or create) a secret
that references your credentials

    # ---------------------------------------------------------


    # -------------- if authType is textSecret ---------------

    textSecret: # [string] Token (text secret) - Select (or create) a stored text
secret

    # ---------------------------------------------------------

    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
```

```
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ------------------------------------------------------

    metadata: # [array] Metadata - Extra information to send with each gRPC request
in the form of a list of key-value pairs. Value supports JavaScript expressions that
are evaluated just once, when the destination gets started. In case you need to pass
credentials as metadata, it's encouraged to use 'C.Secret'.
      - key: # [string] Key - The key of the metadata.
        value: # [string] Value - The value of the metadata.
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    keepAliveTime: # [number] Keep Alive Time (seconds) - How often the sender
should ping the peer to keep the connection alive.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
```

```
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  dataset_output: # [object]
    type: # [string] Output Type
    messageField: # [string] Message field - Name of the event field that contains
the message or attributes to send. If not specified, all of the event's non-internal
fields will be sent as attributes.
    excludeFields: # [array of strings] Exclude fields - Fields to exclude from the
event if the Message field is either unspecified or refers to an object. Ignored if
the Message field is a string. If empty, we send all non-internal fields.
    serverHostField: # [string] Server/host field - Name of the event field that
contains the `serverHost` identifier. If not specified, defaults to
`cribl_<outputId>`.
    timestampField: # [string] Timestamp field - Name of the event field that
contains the timestamp. If not specified, defaults to `ts`, `_time`, or
`Date.now()`, in that order.
    defaultSeverity: # [string] Severity - Default value for event severity. If the
`sev` or `__severity` fields are set on an event, the first one matching will
override this value.
    site: # [string] DataSet site - DataSet site to which events should be sent
    customUrl: # [string]
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
```

```
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    authType: # [string] Authentication method - Enter API key directly, or select a
stored secret
    apiKey: # [string] API key - A 'Log Write Access' API key for the DataSet
account

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] API key (text secret) - Select (or create) a stored text
secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
  logstream_output: # [object]
    type: # [string] Output Type
    loadBalanced: # [boolean] Load balancing - Use load-balanced destinations

    # -------------- if loadBalanced is false ---------------

    host: # [string] Address - The hostname of the receiver
    port: # [number] Port - The port to connect to on the provided host

    # ------------------------------------------------------


    # -------------- if loadBalanced is true ---------------

    excludeSelf: # [boolean] Exclude current host IPs - Exclude all IPs of the
current host from the list of any resolved hostnames.
    hosts: # [array] Destinations - Set of hosts to load-balance data to.
      - host: # [string] Address - The hostname of the receiver.
        port: # [number] Port - The port to connect to on the provided host.
        tls: # [string] TLS - Whether to inherit TLS configs from group setting or
disable TLS.
        servername: # [string] TLS Servername - Servername to use if establishing a
```

```
TLS connection. If not specified, defaults to connection host (iff not an IP);
otherwise, to the global TLS settings.
        weight: # [number] Load Weight - The weight to use for load-balancing
purposes.
    dnsResolvePeriodSec: # [number] DNS resolution period (seconds) - Re-resolve any
hostnames every this many seconds and pick up destinations from A records.
    loadBalanceStatsPeriodSec: # [number] Load balance stats period (seconds) - How
far back in time to keep traffic stats for load balancing purposes.
    maxConcurrentSenders: # [number] Max connections - Maximum number of concurrent
connections (per worker process). A random set of IPs will be picked on every DNS
resolution period. Use 0 for unlimited.

    # ------------------------------------------------------

    compression: # [string] Compression - Codec to use to compress the data before
sending
    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ------------------------------------------------------

    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    writeTimeout: # [number] Write Timeout - Amount of time (milliseconds) to wait
for a write to complete before assuming connection is dead
    tokenTTLMinutes: # [number] Auth Token TTL minutes - The number of minutes
before the internally generated authentication token expires, valid values between 1
and 60
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
```

```
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ------------------------------------------------------

    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token
    authToken: # [string] Auth token - Optional authentication token to include as
part of the connection header

    # -------------- if authType is manual ---------------


    # ------------------------------------------------------

    textSecret: # [string] Auth token (text secret) - Select (or create) a stored
text secret

    # -------------- if authType is secret ---------------


    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  cribl_tcp_output: # [object]
    type: # [string] Output Type
    loadBalanced: # [boolean] Load balancing - Use load-balanced destinations

    # -------------- if loadBalanced is false ---------------

    host: # [string] Address - The hostname of the receiver
    port: # [number] Port - The port to connect to on the provided host

    # ------------------------------------------------------


    # -------------- if loadBalanced is true ---------------

    excludeSelf: # [boolean] Exclude current host IPs - Exclude all IPs of the
current host from the list of any resolved hostnames.
    hosts: # [array] Destinations - Set of hosts to load-balance data to.
      - host: # [string] Address - The hostname of the receiver.
        port: # [number] Port - The port to connect to on the provided host.
```

```
        tls: # [string] TLS - Whether to inherit TLS configs from group setting or
disable TLS.
        servername: # [string] TLS Servername - Servername to use if establishing a
TLS connection. If not specified, defaults to connection host (iff not an IP);
otherwise, to the global TLS settings.
        weight: # [number] Load Weight - The weight to use for load-balancing
purposes.
    dnsResolvePeriodSec: # [number] DNS resolution period (seconds) - Re-resolve any
hostnames every this many seconds and pick up destinations from A records.
    loadBalanceStatsPeriodSec: # [number] Load balance stats period (seconds) - How
far back in time to keep traffic stats for load balancing purposes.
    maxConcurrentSenders: # [number] Max connections - Maximum number of concurrent
connections (per worker process). A random set of IPs will be picked on every DNS
resolution period. Use 0 for unlimited.

    # ------------------------------------------------------

    compression: # [string] Compression - Codec to use to compress the data before
sending
    throttleRatePerSec: # [string] Throttling - Rate (in bytes per second) to
throttle while writing to an output. Also takes values with multiple-byte units,
such as KB, MB, GB, etc. (E.g., 42 MB.) Default value of 0 specifies no throttling.
    tls: # [object] TLS settings (client side)
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ------------------------------------------------------

    connectionTimeout: # [number] Connection Timeout - Amount of time (milliseconds)
to wait for the connection to establish before retrying
    writeTimeout: # [number] Write Timeout - Amount of time (milliseconds) to wait
for a write to complete before assuming connection is dead
    tokenTTLMinutes: # [number] Auth Token TTL minutes - The number of minutes
before the internally generated authentication token expires, valid values between 1
and 60
    excludeFields: # [array of strings] Exclude Fields - Fields to exclude from the
event. By default, all internal fields except `__output` are sent.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.
```

```
    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
  cribl_http_output: # [object]
    type: # [string] Output Type
    loadBalanced: # [boolean] Load balancing - Use load-balanced destinations

    # -------------- if loadBalanced is false ---------------

    url: # [string] Cribl endpoint - URL of a Cribl Worker to send events to, e.g.,
http://localhost:10200
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.

    # ----------------------------------------------------------


    # -------------- if loadBalanced is true ---------------

    excludeSelf: # [boolean] Exclude current host IPs - Exclude all IPs of the
current host from the list of any resolved hostnames.
    urls: # [array] Cribl Worker Endpoints
      - url: # [string] Cribl Endpoint - URL of a Cribl Worker to send events to,
e.g., http://localhost:10200
        weight: # [number] Load Weight - The weight to use for load-balancing
purposes.
    dnsResolvePeriodSec: # [number] DNS resolution period (seconds) - Re-resolve any
hostnames every this many seconds and pick up destinations from A records.
    loadBalanceStatsPeriodSec: # [number] Load balance stats period (seconds) - How
far back in time to keep traffic stats for load balancing purposes.

    # ----------------------------------------------------------

    tls: # [object] TLS settings (client side)
```

```
      disabled: # [boolean] Disabled

      # -------------- if disabled is false ---------------

      rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to No.
      servername: # [string] Server name (SNI) - Server name for the SNI (Server
Name Indication) TLS extension. It must be a host name, and not an IP address.
      certificateName: # [string] Certificate name - The name of the predefined
certificate.
      caPath: # [string] CA certificate path - Path on client in which to find CA
certificates to verify the server's cert. PEM format. Can reference $ENV_VARS.
      privKeyPath: # [string] Private key path (mutual auth) - Path on client in
which to find the private key to use. PEM format. Can reference $ENV_VARS.
      certPath: # [string] Certificate path (mutual auth) - Path on client in which
to find certificates to use. PEM format. Can reference $ENV_VARS.
      passphrase: # [string] Passphrase - Passphrase to use to decrypt private key.
      minVersion: # [string] Minimum TLS version - Minimum TLS version to use when
connecting
      maxVersion: # [string] Maximum TLS version - Maximum TLS version to use when
connecting

      # ----------------------------------------------------------

    tokenTTLMinutes: # [number] Auth Token TTL minutes - The number of minutes
before the internally generated authentication token expires, valid values between 1
and 60.
    excludeFields: # [array of strings] Exclude fields - Fields to exclude from the
event. By default, all internal fields except `__output` are sent.
    compression: # [string] Compression - Codec to use to compress the data before
sending.
    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------
```

```
    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
    pqControls: # [object]

    # ----------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
  humio_hec_output: # [object]
    type: # [string] Output Type
    loadBalanced: # [boolean] Load balancing - Use load-balanced destinations

    # -------------- if loadBalanced is false ---------------

    url: # [string] Humio HEC Endpoint - URL to a Humio HEC endpoint to send events
to, e.g., https://cloud.us.humio.com/api/v1/ingest/hec for JSON and
https://cloud.us.humio.com/api/v1/ingest/hec/raw for raw
    useRoundRobinDns: # [boolean] Round-robin DNS - Enable to use round-robin DNS
lookup. When a DNS server returns multiple addresses, this will cause Stream to
cycle through them in the order returned.

    # ----------------------------------------------------------


    # -------------- if loadBalanced is true ---------------

    excludeSelf: # [boolean] Exclude current host IPs - Exclude all IPs of the
current host from the list of any resolved hostnames.
    urls: # [array] Humio HEC Endpoints
      - url: # [string] HEC Endpoint - URL to a Humio HEC endpoint to send events
to, e.g., https://cloud.us.humio.com/api/v1/ingest/hec for JSON and
https://cloud.us.humio.com/api/v1/ingest/hec/raw for raw
        weight: # [number] Load Weight - The weight to use for load-balancing
purposes.
    dnsResolvePeriodSec: # [number] DNS resolution period (seconds) - Re-resolve any
hostnames every this many seconds and pick up destinations from A records.
    loadBalanceStatsPeriodSec: # [number] Load balance stats period (seconds) - How
far back in time to keep traffic stats for load balancing purposes.

    # ----------------------------------------------------------

    concurrency: # [number] Request concurrency - Maximum number of ongoing requests
before blocking.
```

```
    maxPayloadSizeKB: # [number] Max body size (KB) - Maximum size, in KB, of the
request body.
    maxPayloadEvents: # [number] Max events per request - Max number of events to
include in the request body. Default is 0 (unlimited).
    compress: # [boolean] Compress - Whether to compress the payload body before
sending.
    rejectUnauthorized: # [boolean] Validate server certs - Reject certs that are
not authorized by a CA in the CA certificate path, or by another trusted CA (e.g.,
the system's CA). Defaults to Yes.
    timeoutSec: # [number] Request timeout - Amount of time, in seconds, to wait for
a request to complete before aborting it.
    flushPeriodSec: # [number] Flush period (sec) - Maximum time between requests.
Small values could cause the payload size to be smaller than the configured Max body
size.
    extraHttpHeaders: # [array] Extra HTTP headers - Extra HTTP headers.
      - name: # [string] Name - Field name
        value: # [string] Value - Field value
    failedRequestLoggingMode: # [string] Failed request logging mode - Determines
which data should be logged when a request fails. Defaults to None.  All headers are
redacted by default, except those listed under `Safe Headers`.
    safeHeaders: # [array of strings] Safe headers - List of headers that are safe
to log in plain text.
    format: # [string] Request Format - Send data in JSON format to the
api/v1/ingest/hec endpoint , or raw 1-request-per-line to the api/v1/ingest/hec/raw
endpoint .
    authType: # [string] Authentication method - Enter a token directly, or provide
a secret referencing a token

    # -------------- if authType is manual ---------------

    token: # [string] HEC Auth token - Humio HEC authentication token

    # -----------------------------------------------------


    # -------------- if authType is secret ---------------

    textSecret: # [string] HEC Auth token (text secret) - Select (or create) a
stored text secret

    # -----------------------------------------------------

    onBackpressure: # [string] Backpressure behavior - Whether to block, drop, or
queue events when all receivers are exerting backpressure.

    # -------------- if onBackpressure is queue ---------------

    pqMaxFileSize: # [string] Max file size - The maximum size to store in each
queue file before closing and optionally compressing (KB, MB, etc.).
    pqMaxSize: # [string] Max queue size - The maximum amount of disk space the
queue is allowed to consume. Once reached, the system stops queueing and applies the
fallback Queue-full behavior. Enter a numeral with units of KB, MB, etc.
    pqPath: # [string] Queue file path - The location for the persistent queue
files. To this field's value, the system will append: /<worker-id>/<output-id>.
    pqCompress: # [string] Compression - Codec to use to compress the persisted
data.
    pqOnBackpressure: # [string] Queue-full behavior - Whether to block or drop
events when the queue is exerting backpressure (full capacity or low disk). 'Block'
is the same behavior as non-PQ blocking. 'Drop new data' throws away incoming data,
while leaving the contents of the PQ unchanged.
```

```
    pqControls: # [object]

    # ------------------------------------------------------

    pipeline: # [string] Pipeline - Pipeline to process data before sending out to
this output.
    systemFields: # [array of strings] System fields - Set of fields to
automatically add to events using this output. E.g.: cribl_pipe, c*. Wildcards
supported.
    environment: # [string] Environment - Optionally, enable this config only on a
specified Git branch. If empty, will be enabled everywhere.
    streamtags: # [array of strings] Tags - Add tags for filtering and grouping in
Stream.
```

13.6.15. parsers.yml

`parsers.yml` stores configuration data for the Knowledge > Parsers Library.

$CRIBL_HOME/default/cribl/parsers.yml

```
parser_id: # [object]
  lib: # [string] Library
  description: # [string] Description - Brief description of this parser. Optional.
  tags: # [string] Tags - One or more tags related to this parser. Optional.
  type: # [string] Type - Parser/Formatter type to use.
  fields: # [array of strings] List of Fields - Fields expected to be extracted, in
order. If not specified parser will auto-generate.
```

13.6.16. policies.yml

`policies.yml` contains RBAC Policy definitions. Default example:

$CRIBL_HOME/default/cribl/policies.yml

```
GroupFull:
  args:
    - groupName
  template:
    - PATCH /master/groups/${groupName}/deploy
    - GroupEdit ${groupName}
GroupEdit:
  args:
    - groupName
  template:
    - '* /m/${groupName}'
    - '* /m/${groupName}/*'
    - GroupRead ${groupName}
GroupCollect:
  args:
    - groupName
  template:
    - POST /m/${groupName}/lib/jobs
    - PATCH /m/${groupName}/lib/jobs/*
    - POST /m/${groupName}/jobs
    - PATCH /m/${groupName}/jobs/*
    - GroupRead ${groupName}
GroupRead:
  args:
    - groupName
  template:
    - GET /m/${groupName}
    - GET /m/${groupName}/*
    - POST /m/${groupName}/preview
    - POST /m/${groupName}/system/capture
    - POST /m/${groupName}/lib/expression
    - GET /master/groups/${groupName}
    - GET /master/workers
    - GET /master/workers/*
    - '* /w/*'
    - GET /master/groups
    - GET /system/info
    - GET /system/info/*
    - GET /system/logs
    - GET /system/logs/group/${groupName}/*
    - GET /system/settings
    - GET /system/settings/*
    - GET /system/instance/distributed
    - GET /system/instance/distributed/*
    - GET /version
    - GET /version/*
    - GET /version/info
    - GET /version/info/*
    - GET /version/status
    - GET /version/status/*
    - GET /mappings
    - GET /mappings/*
    - GET /system/messages
    - GET /system/message/*
    - GET /ui/*
    - POST /system/metrics/query
    - GET /clui
    - POST /system/capture
```

13.6.17. regexes.yml

`regexes.yml` maintains a list of regexes. Cribl's Regex Library ships under `default`. Each regex is listed according to the following pattern:

$CRIBL_HOME/default/cribl/regexes.yml

```
egex_id: # [object]
  lib: # [string] Library
  description: # [string] Description - Brief description of this regex. Optional.
  regex: # [string] Regex pattern - Regex pattern. Required.
  sampleData: # [string] Sample data - Sample data for this regex. Optional.
  tags: # [string] Tags - One or more tags related to this regex. Optional.
```

13.6.18. roles.yml

`roles.yml` contains RBAC Role definitions. Default example:

$CRIBL_HOME/default/cribl/roles.yml

```
admin:
  description: 'Members with admin role have permission to do anything and
everything in the system.'
  policy:
    - '* *'
reader_all:
  description: 'Members with reader_all role get read-only access to all
Worker Groups/Fleets.'
  policy:
    - GroupRead *
collect_all:
  description: 'Members of this group can run existing collection jobs of all
Worker Groups/Fleets'
  policy:
    - GroupCollect *
editor_all:
  description: 'Members with editor_all role get read/write access to all
Worker Groups/Fleets.'
  policy:
    - GroupEdit *
owner_all:
  description: 'Members with owner_all role get read/write access as well as Deploy
permissions to all Worker Groups/Fleets.'
  policy:
    - GroupFull *
user:
  description: 'The base user role allows users to see the system info along with
their own profile settings.'
  policy:
    - GET /system/info
    - GET /system/info/*
    - GET /system/users
    - GET /system/instance/distributed
    - GET /system/instance/distributed/*
    - GET /clui
    - PATCH /ui/*
```

13.6.19. samples.yml

`samples.yml` contains metadata about about stored sample data files (size, number of events, date created, name, etc.). Each sample is listed according to the following pattern:

$CRIBL_HOME/local/cribl/samples.yml

```
sample_id: # [object]
  sampleName: # [string] File Name - Filename to save the sample as. Required.
  pipelineId: # [string] Associate with Pipeline - Select a pipeline to associate
with sample with. Select GLOBAL if not sure. Deprecated.
  description: # [string] Description - Brief description of this sample file.
Optional.
  ttl: # [number] Expiration (hours) - Time to live for the sample, the TTL is reset
after each use of the sample. Leave empty to never expire.
  tags: # [string] Tags - One or more tags related to this sample file. Optional.
```

The corresponding sample files reside in `$CRIBL_HOME/data/samples`.

13.6.20. schemas.yml

`schemas.yml` stores configuration data for the Knowledge > Schema Library.

$CRIBL_HOME/default/cribl/schemas.yml

```
schema_id: # [object]
  description: # [string] Description - Brief description of this schema. Optional.
  schema: # [string] Schema - JSON schema matching standards of draft version 2019-
09.
```

13.6.21. scripts.yml

`scripts.yml` stores configuration data for scripts configured at **Settings** > **Global Settings** > **Scripts**:

$CRIBL_HOME/local/cribl/scripts.yml

```
script_id: # [object]
  command: # [string] Command - Command to execute for this script
  description: # [string] Description - Brief description of this script. Optional.
  args: # [array of strings] Arguments - Arguments to pass when executing this
script
  env: # [object] Env Variables - Extra environment variables to set when executing
script
```

13.6.22. vars.yml

`vars.yml` stores configuration data for the Knowledge > Global Variables Library.

$CRIBL_HOME/default/cribl/vars.yml

```
variable_id: # [object]
  lib: # [string] Library
  description: # [string] Description - Brief description of this variable.
Optional.
  type: # [string] Type - Type of variable.
  value: # [string] Value - Value of variable
  tags: # [string] Tags - One or more tags related to this variable. Optional.
```

14. Techniques & Tips

14.1. Tips and Tricks

In designing, supporting, and troubleshooting, complex Cribl Stream deployments and workflows, we've found the following general principles helpful.

> Every use case is different. Don't hesitate to contact Cribl Support for help with solving your specific needs.

Architecture and Deployment

Separate Data by Worker Groups, Routes, or Both?

Separate your data volume by Worker Groups, or by Routes, or both. Common business reasons for sorting by Groups include data isolation by business group, ensuring data privacy, and achieving cost savings through geo-isolation. Another consideration is: Which type of separation will be the easiest to understand and manage as your organization grows?

Connecting Cribl Stream Groups/Instances with Same Leader: Cribl HTTP or Cribl TCP

In Cribl Stream 3.5 and above, where Workers share the same Leader, the obvious choices for sending data between those Workers are the Cribl HTTP Source and Destination pair, or the Cribl TCP Source and Destination pair. Either option prevents double-counting of this internal data flow against your on-prem license or Cribl.Cloud plan.

Connecting Stream Groups/Instances with Different Leaders: TCP JSON

When sending between Cribl Stream Worker Groups and/or instances connected to **different** Leaders, use the TCP JSON Source and Destination pair. While Cribl Stream supports multiple Sources/Destinations for sending and receiving, TCP JSON is ideal because it supports TLS, has solid compression, and is overall well-formatted to maintain data's structure between sender and receiver.

Input Side: Event Breakers and Timestamping

Validate timestamping and event breaking before turning on a Source.

If a Source supports Event Breakers (e.g., AWS Sources), it is much more efficient to perform JSON unroll in a Breaker, versus in a Pipeline Function.

Routes

Avoid Route Creep

Design data paths to move through as few Routes as possible. This usually means we want to reduce volume of events as early as possible. If most of the events being processed are sent to a Destination by the first Route, this will spare all the other Routes and Pipelines wasted processing cycles and testing against whether filter criteria are met.

Prevent Function Creep

As a mirror principle, clone events as late as possible in the Routes. This will minimize the number of Functions acting on data, to the extent possible.

Leave No Data Behind

Create a catchall Route at the end of the list to explicitly route events that fail to match any Route filters.

Pipelines and Functions Logic

Don't Overload Pipelines

Do not use the same Pipeline for both pre-processing and post-processing. This makes isolation and troubleshooting extremely difficult.

Extract or Parse by Desired Yield

If you need to extract one or just a few fields, use the Regex Extract Function. If you need to extract all or most of an event's fields, use the Parser Function.

Use Function Groups for Legibility

Function groups might be helpful in organizing your Pipeline. These groups are abstractions, purely for visual context, and do not affect the movement of data through Functions. Data will move down the listed

Functions, ignoring any grouping assignments.

Use Comments to Preserve Legibility

Comment, comment, comment. There is a lot of contextual information which might become lost over time as users continue to advance and add Routes and Pipelines to Cribl Stream. A good principle is to keep the design decisions as simple and easy to understand as possible, and to document the assumptions around each Route and Pipeline in comments as clearly as possible.

Create Expressions Around Fields with Non-Alphanumeric Characters

If there are fields with non-alphanumeric characters – e.g., `@timestamp` or `user-agent` or `kubernetes.namespace_name` – you can access them using `__e['<field-name-here>']`. (Note the single quotes.) For more details, see MDN's Property Accessors documentation. In any other place where such fields are referenced – e.g., in an Eval Function's Field names – you should use a single-quoted literal, of the form: `'<field-name-here>'`.

Specify Fields' Precedence Order in Expressions

In any Source that supports adding **Fields (Metadata)**, your **Value** expression can specify that fields in events should override these fields' values. E.g., the following expression's L->R/OR logic specifies that if an inbound event includes an `index` field, use that field's value; otherwise, fall back to the `myIndex` constant defined here: `` `${__e['index'] || 'myIndex'}` ``.

Break Up `_raw`

Consider avoiding the use of `_raw` as a temporary location for data. Instead, split out explicitly separate fields/variables.

Optimize PQ Using File Size

Consider using a smaller maximum file size in Persistent Queues settings, for better buffering.

Output Side

Although this might be obvious: Ship metrics out to a dedicated alerting/metrics engine (ELK, Grafana, Splunk, etc.)

Troubleshooting

Troubleshoot streams processing systems from right to left. Start at the Destination, and check for block status from the Destination back to the Source.

Don't run health checks on data ports too frequently, as this can lead to false-positives errors.

14.2. Integrating with Other Services

14.2.1. Amazon S3 Better Practices

The "better practices" in this guide all apply to Cribl Stream's Amazon S3-based Sources and Destinations. Many also apply to other object stores, like Azure Blob Storage, MinIO, and Google Cloud Storage.

> View the AWS S3 with Cribl Best Practices video presentation from Cribl Community Office Hours.

Foundations: Cribl Stream and Object Storage

In this first section, we'll lay out four basic factual underpinnings:

- How Cribl writes to object storage.
- Writing to a Cribl Amazon S3 Destination.
- Reading from Cribl's Amazon SQS Source.
- Replaying from Amazon S3 buckets, via Cribl's S3 Collector.

Then, this guide will go on to detail 10 "better practices" (and a bonus one!) as we cover four broad topics:

- Writing to object storage, generically.
- Cardinality and partitioning expressions.
- Amazon S3–specific optimization.
- Better partitioning expressions.

How Cribl Writes to Object Storage

Cribl does not write data **directly** to its object storage Destinations, which include Amazon S3; any solution with an S3 API; and other object storage Destinations, like Azure Blob Storage, MinIO, and Google Cloud Storage.

Data persists locally to a "staging location" on the Workers. The Worker Processes append new data to the staging location based on partitioning expressions and configurations such as file size and max timeout settings. Each Worker Process, governed by its own specific settings, creates and maintains its own set of files.

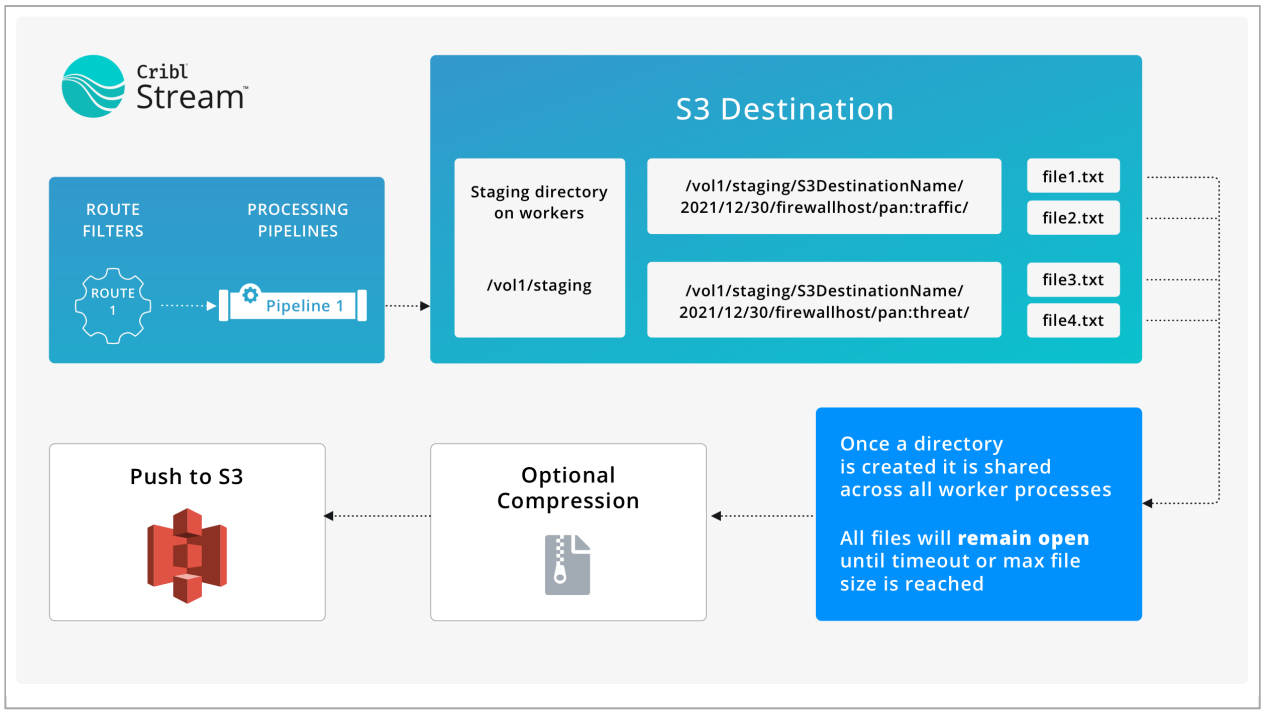

Writing to object storage – example

Writing to a Cribl Amazon S3 Destination

When writing to our Amazon S3 Destination, or any object storage, there are two main things to consider:

- **File Expression**: Cribl allows a maximum of 2000 open files per Worker Process per S3 Destination. On a system with 14 Worker Processes, that translates to a maximum of 28,000 open files per S3 Destination. On a system with 30 CPUs, that translates to 60,000 open files.

  When a specific Worker Process hits the maximum open files, it closes the oldest open files, moves them to the final output location, and creates new ones. If you have multiple object storage Destinations configured in Cribl, ensure that the total maximum open files across all these Destinations is less than your system's configured maximum open files.

  The default maximum open file settings on many Linux systems are too low for Cribl Stream when writing to an object storage Destination. You'll need to increase your system max open files and/or process max open files settings, as explained below.

- **Partitioning Expression**: To limit the number of files in each directory, partitioning expressions should specify dates down to the hour or minute.

Reading from Cribl's Amazon SQS Source

When reading data using Cribl Stream's Amazon SQS Source, a few settings can greatly speed up data retrieval. These are:

- **General Settings** > **Queue**, a.k.a. the filename filter.
- **Advanced Settings** > **Max messages**.
- **Advanced Settings** > **Num receivers**.

Even more importantly, data retrieval speed is also governed by Destination settings and Pipeline efficiency.

Replaying from Amazon S3 Buckets

When replaying from S3 via Cribl's S3 Collector, optimize your performance by adjusting the following:

- **Optional Settings** > **Path**, a.k.a. the filter.
- Pipeline efficiency.
- Destination settings.
- Destination health.

The **Path** should specify the time down to the hour, or in some cases, down to the minute.

Also, consider the API limits for your object storage Destination. AWS sets a limit of 3,500 writes/second and 5,500 reads/second per S3 prefix. An S3 prefix is a path on Amazon S3, including bucket name and any subdirectories up to but not including the object name. The S3 prefix always ends in (and includes) the slash before the object name. In its simplest form, the S3 prefix is just `BucketName/`.

AWS API limits apply to all attempted access to these prefixes, cumulatively. You probably won't hit the write limits while putting the "better practices" in this guide into effect. However, populating too many files in any one directory might trigger throttling when reading and performing replays.

> Some Cribl Destinations have **File prefix expression** and/or **Partitioning expression** settings. Do not confuse these with the AWS prefix.

Writing to Object Storage, Generically

When you deploy a Cribl Amazon S3 Compatible Stores Destination, start with a simple global **Partitioning expression** and the default **File name prefix expression**.

This will work as long as cardinality remains below 2,000 during the max timeout period. Also, apply the procedures to increase the system max open file settings, as described later in this guide.

Better Practice 1: Mind the Partitioning Expression

```
`${C.Time.strftime(_time ? _time : Date.now() / 1000, '%Y/%m/%d/%H')
/${index ? index : 'no_index'}
/${host ? host : 'no_host'}
/${sourcetype ? sourcetype : 'no_sourcetype'}
```

If cardinality exceeds 2,000, you can either:

- Remove the less-important fields from the expression; or
- Create different partitioning expressions for different event types, categories, etc.

On the **Advanced Settings** tab:

- Match the **Max open files** to cardinality, without exceeding 2,000.
- Toggle **Remove staging dirs** to `Yes`.
- Set the **Storage class** to `Intelligent Tiering`.

Still in **Advanced Settings**, keep the default settings for:

- **Max file size (MB)**: `32`.
- **Max file open time (sec)**: `300`.
- **Max file idle time (sec)**: `30`.

As you gain deeper understanding of the data, consider the following options:

- Create a set of different S3 Destinations, each with its own **Partitioning expression**. They can all point to the same S3 bucket.
- If the numbers of open files becomes too large, discuss alternative architectures (e.g., creating additional Worker Groups) with your Cribl Account team or Support.

Better Practice 2: Optimize System Settings for Max Open Files

Consider the workflow for writing to Cribl S3 Destinations:

- Each Cribl Worker Process creates its own set of files in a staging directory based on **Partitioning expression** and **File name expression**.
- The maximum partitioning expression cardinality allowed is 2,000. This translates to a maximum of 2,000 open files per Worker Process per object storage Destination.
- Each Destination writes files to its staging directory until the number of files exceeds the configured maximum, or the Destination reaches any of the following limits: **Max file size (MB)**, **Max file idle time (sec)**, or **Max file open time (sec)**.

When writing to an object store, more Worker Nodes with fewer CPUs is better than fewer Worker Nodes with more CPUs (e.g., 5 Workers with 12 vCPUs is better than 2 systems with 32 vCPUs).

You should apply this principle to realize two benefits:

- To maximize the number of open files.
- To have more S3 Destinations with more precisely-focused partitioning expressions.

Linux defaults for maximum open files tend to be too low for writing to Cribl S3 Destinations. Try updating the Worker's Linux system settings to accommodate a larger quantity of open files. When setting the maximum open files substantially higher than 65,536, you should track system health.

Cribl recommends setting the maximum open files based on the number of S3 Destinations you are planning, and the number of Worker Processes on each Node. The table below provides some examples:

# OF S3 DESTINATIONS IN CRIBL	MAX CARDINALITY PER DEST.	MAX OPEN FILES IN CRIBL DEST.	# WORKER PROCESS ON EACH WORKER NODE	MIN LINUX PER-PROCESS OPEN FILE LIMIT	MIN LINUX SYSTEM PLUS CRIBL USER OPEN FILE
1	2,000	2,000	10	3,000	21,000
1	2,000	2,000	14	3,000	29,000
1	2,000	2,000	22	3,000	45,000
2	2,000	2,000	10	5,000	41,000
2	2,000	2,000	14	5,000	57,000
2	2,000	2,000	22	5,000	89,000
5	2,000	2,000	10	11,000	101,000
5	2,000	2,000	14	11,000	141,000
5	2,000	2,000	22	11,000	221,000

Better Practice 3: Update Max Open File Settings on Hosts

Here are basic instructions that cover many Linux distributions. (Check the documentation for your specific Linux distribution and version for any variations required.)

Edit the first group of settings. You will be required to reboot.

```
# sysctl -w fs.file-max=65536 (as root)

# vi /etc/sysctl.conf (as root)
fs.file-max = 65536

# vi /etc/security/limits.conf (as Cribl user)
* soft nproc 65536
* hard nproc 65536
* soft nofile 65536
* hard nofile 65536
```

After you reboot, verify the settings:

```
# sysctl -p
# cat /proc/sys/fs/file-max
# sysctl fs.file-max
```

Cardinality and Partitioning Expressions

As we've seen, partitioning expressions and file expressions interact to determine cardinality. In this section, we'll examine this interaction more closely and learn better practices based on what we find.

Where Cardinality Begins

Partitioning expressions specify the directory structure that Cribl adds when writing to an object storage Destination.

For example, the following partitioning expression extracts the `year`, `month`, `day`, `hour`, `minute`, `index`, `host`, `sourcetype`, `server_ip`, `status_code`, and `Method`, and populates them as the directory structure.

```
`${C.Time.strftime(_time ? _time : Date.now() / 1000, '%Y/%m/%d/%H')
/${index ? index : 'no_index'}
/${host ? host : 'no_host'}
/${sourcetype ? sourcetype : 'no_sourcetype'}
/${server_ip}
/${status_code}
/${Method}/`
```

A file expression prefix comes into play next. The default file expression is just a random file name. However, an expression like this would create files that also include the hour and minute in each file name. This

reflects the time the file was created, not the time of each event.

```
${C.Time.strftime(_time ? _time : Date.now() / 1000, '%H%M')}
```

> Together, the partitioning expression and the file expression must not produce a cardinality greater than 2,000.

Calculating Cardinality

Cardinality is the quantity of combinations of unique values, within a time period, for each parameter in the expressions.

For example, a partitioning expression could specify the following:

- Within an hour.
- 5 unique sourcetype values.
- 10 unique host values.
- 2 unique source values for each host.

For this example, we could calculate the maximum cardinality as `(5*10*2)=100`.

It's important to also consider the timeframe this is calculated within. That cardinality might be 100 over a 1-minute period, but might be 500 over a 5-minute period.

If we further add a file name prefix expression, this increases the cardinality. For example, let's add the method and top-level URI as file name prefix parameters. If there are 3 possible methods, and 10 URIs, the cardinality just went up from 100 to `100*3*10=3,000`.

Cardinality has the greatest impact on how you should configure an object storage Destination in Cribl. For every combination of partitioning expression, file prefix expression, and Worker Process, there can be an open file on the Worker Node's system.

A partitioning expression and file prefix expression should produce fewer than 2,000 potential combinations. When a Worker Process exceeds the configured **Max open files**, this generates errors; all open files for that Worker Process are simultaneously closed; and, new files will be created.

The Worker Process might experience some extra load while all files are processed. If this occurs infrequently, that's generally okay. But if it happens several times per hour, you should consider how to improve the combination of partitioning and file expressions.

As a starting point, consider these two strategies:

1. Write to one S3 bucket, incorporating parameters common to each event.

   For example, here's a partitioning expression that specifies year, month, day, hour, minute, index, sourcetype, source, and host:

   ```
   ${C.Time.strftime(_time ?
   _time:Date.now()/1000,'%Y/%m/%d/%H/%M')/${index}/${host}/${sourcetype}
   ```

2. Dedicate different S3 Destinations to different event types. During replays, this makes searching specific data faster. However, this benefit comes at the expense of needing a larger number of open files. Should you pursue this option, test large numbers of open files on a test system in your environment. Such testing is especially crucial in virtualized environments with shared disk, CPU, and memory resources.

Better Practice 4: Select Files for Partitioning and File Expressions

The main factors to consider when selecting fields for a partitioning or filename prefix expression are:

- Configure Time-based filtering: All partitioning expressions should include `year`, `month`, `day`, `hour`, and optionally, `minute`. This facilitates filtering during replays. It also limits the files in any one directory, so that replays are not throttled when returning large volumes of files.
- Identify Universal fields: Fields that users will typically search on during replays across all datasets. Examples include `sourcetype`, `host`, `source`, `category`, and `index`.
- Optionally, configure specific fields for different datasets.

Examples include:

- Web logs: server IP, method, status code.
- Firewall logs: source zone, destination zone, accept/deny status.
- Flow logs: protocol, accept/deny status.

  Be careful when pursuing this option as the number of open files can grow exponentially with too many multiple partition and file name prefix expressions.

Analyzing Partitioning Expressions

Let's work through some examples of partitioning expressions, with hypothetical possible values for each parameter, to see what cardinalities they produce.

Example 1

This one produces reasonable results.

```
`${C.Time.strftime(_time ? _time : Date.now(), '%Y/%m/%d/%H')}
/${sourcetype}/${host}/${AttackType}`
```

Possible values:

- `sourcetype`: 5.
- `host`: 100.
- `AttackType`: 5.

Potential cardinality: `5 x 100 x 5 = 2,500`.

Example 2

Here, too, cardinality is kept commendably low.

```
`${C.Time.strftime(_time ? _time : Date.now(),
'%Y/%m/%d/%H')}/${state}/${interface}/${dest_ip}`
```

Possible values:

- `state`: 2.
- `interface`: 50.
- `dest_ip`: 20.

Potential cardinality: `2 x 100 x 10 = 2,000`.

Example 3

This is a bad partitioning expression which produces out-of-control cardinality. Back to the drawing board!

```
`${C.Time.strftime(_time ? _time : Date.now(),
'%Y/%m/%d/%H')}/${state}/${interface}/${src_ip}`
```

Possible values:

- `state`: 2.
- `interface`: 100.
- `src_ip`: 65,535.

Potential cardinality: `2 x 100 x 65,535 = 13,107,000`.

For more examples like these, see Better Partitioning Expressions.

Seeing How Cardinality Changes Over Time

In the examples so far, we've assumed typical expected values for parameters. Another useful exercise is to estimate the maximum possible values of each parameter, and multiply each value to obtain maximum theoretical cardinality.

You should also investigate how cardinality changes depending on when and how long you measure it. To do this, query/search your analytic tool to determine cardinality for different durations over several days.

Run the searches over different duration spans (e.g., 1 minute, 3 minutes, 5 minutes) to determine the best timeout period. For example, your cardinality might be 2,000 over a 2-minute span, but 10,000 over a 5-minute span. In this case, it is most certainly beneficial to set the maximum file timeout to 2 minutes.

Below are examples of Splunk searches over different span periods, with maximum open file time set to 3 minutes. Change the fields to the ones you'd prefer to incorporate into a partition and/or file name prefix expression, and try running them in your environment.

Here's an example using a "traditional" search method:

```
earliest=-24h index=*
|bin _time span=3m
| stats dc(source) as dc by host, sourcetype _time
| stats sum(dc) by _time
```

Here's an example using `tstats`:

```
| tstats dc(source) as dc where index=* earliest=-25h@h latest=-1h@h by _time, host,
sourcetype span=3m
| stats sum(dc) by _time
```

The `tstats` search produces the results shown in the diagram below.

- Cardinality mostly stays below 1,625.
- There are some hourly peaks around 2,500. These spikes, which exceed the max allowed cardinality of 2,000, are infrequent.

All of this is generally acceptable.

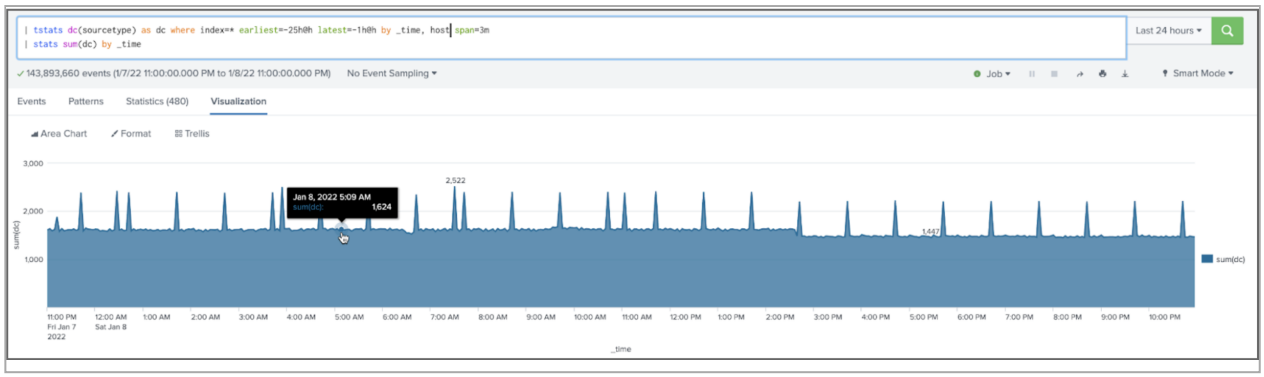

cardinality Check Results

Better Practice 5: Size a Separate Fast(er) Disk for Staging Location

The system's ability to handle enough open files is a key factor that drives performance. This requires:

- Setting **Max open files** high enough.
- Ensuring that the staging directory on the Workers can handle simultaneous writing tens of thousands of open files. The metric to use here is Input/Output Operations per Second (IOPS). A good starting point is 2,000 IOPS.

Cribl recommends that you allocate a separate disk for the staging directory on Workers, especially when you have configured multiple object storage Destinations. Follow these general, conservative guidelines:

- Toggle **Advanced Settings** > **Remove staging dirs** to `Yes`. This means that any empty directory that has not been written to for an hour, is deleted.
- Disk size of 500 GB should be adequate, since the Workers need only enough disk capacity for a few minutes' worth of data. 500 GB errs on the side of caution, allowing us to store as much as 4 hours of data to disk. See the formula and examples below.
- Because Cribl writes to the staging directory only when the object storage Destinations are healthy, disk size does not usually become an issue. If the Worker encounters or triggers a backpressure situation, it stops writing to the staging directory.
- The staging directories are not intended for high availability, but rather to support creation of large-enough files to write to object storage.

> Replay from a dedicated Worker Group. Do not compete for resources against production, real-time, streaming resources to perform replays!

Determining Staging Directory Disk Size

You can calculate an optimal size for your staging directory disk using the following formula:

- `Data Volume` (GB/day or TB/day) you expect to ingest, times `1.25` metadata factor; divided by
- `1440` (minutes in a day) times `Duration` (hours) you want to store data on disk; divided by
- `Number of Workers` writing to a staging directory.

The result will be disk size per Worker.

The figure below illustrates the formula.

$$\frac{Data\ Volume\ (GB/day) \times 1.25\ metadata\ factor}{1440\ mins/day} \times mins\ to\ store\ data\ to\ disk \div number\ of\ Workers$$

Here are some examples:

DATA VOLUME	NUMBER OF WORKERS	DURATION	DISK SIZE PER WORKER
1 TB/day	3	2	35 GB
10 TB/day	5	4	417 GB
50 TB/day	45	4	232 GB

Amazon S3 Optimization

Once you configure your Amazon S3 permissions, verify access, and (if applicable) discover your Cribl.Cloud Organization's AWS ARN, you can start applying some more better practices.

Amazon S3 Permissions

If your Workers are hosted outside AWS, you will need an access key and secret key to access the S3 bucket. If the Workers are EC2 instances or in AWS EKS, it's most ideal to assign an EC2 service role to the instances. The role will need access to the S3 bucket. For policies for reading and writing to/from Amazon S3, see AWS Cross-Account Data Collection.

Here's a policy to grant a role, or user access, with read and write permissions the S3 bucket. Just change the bucket name in this policy:

```
{
 "Version": "2012-10-17",
 "Statement": [
   {
     "Effect": "Allow",
     "Action":
     [
        "s3:GetObject",
        "s3:PutObject"
      ],
     "Resource": "arn:aws:s3:::bucketname/*"
   },
   {
     "Effect": "Allow",
     "Action":
       [
             "s3:ListBucket",
            "s3:GetBucketLocation"
       ],
     "Resource": "arn:aws:s3:::bucketname"
   }
 ]
}
```

If `assumeRole` is required, here's a sample policy to assume the role that has access to the S3 bucket:

```
{
"Version": "2012-10-17",
"Statement": [
  {
    "Effect": "Allow",
    "Principal": {
      "AWS": "arn:aws:iam::111111111111:role/account-a-cribl-stream-assumerole-role"
    },
    "Action": "sts:AssumeRole",
    "Condition": {
      "StringEquals": {
        "sts:ExternalId": "cribl-s3cre3t"
      }
    }
  }
]
}
```

> Test your policy with AWS's IAM policy simulator to ensure there are no boundary policies that might conflict with this policy.

Verifying S3 Access

To troubleshoot access to your S3 bucket, install the AWS CLI on one of the Workers. Log in using your AWS user and Region. Assume the role if necessary. Then, attempt to download a file from the bucket or write a new file to the bucket.

Example of assuming a role:

```
aws sts assume-role --role-arn "arn:aws:iam::123456789012:role/example-role" --role-session-name AWSCLI-Session
```

Example of validating the role you'll use to run subsequent commands:

```
aws sts get-caller-identity
```

Example of listing files in a bucket:

```
aws s3 ls s3://s3-bucket-name
```

Example of sending stdin to a specified bucket:

```
aws s3 cp - <target> [--options]
```

Example of writing a local file to the bucket:

```
aws s3 cp localfilename.txt s3://bucket-name
```

Example of reading a file from S3:

```
aws s3 cp s3://bucket-name localfilename.txt
```

Accessing Amazon S3 from Cribl.Cloud

Every Cribl.Cloud Organization exposes its own unique AWS ARN.

From the main Cribl.Cloud portal, click the **Network Settings** link, then select the **Trust** tab to expose the Cribl.Cloud ARN.

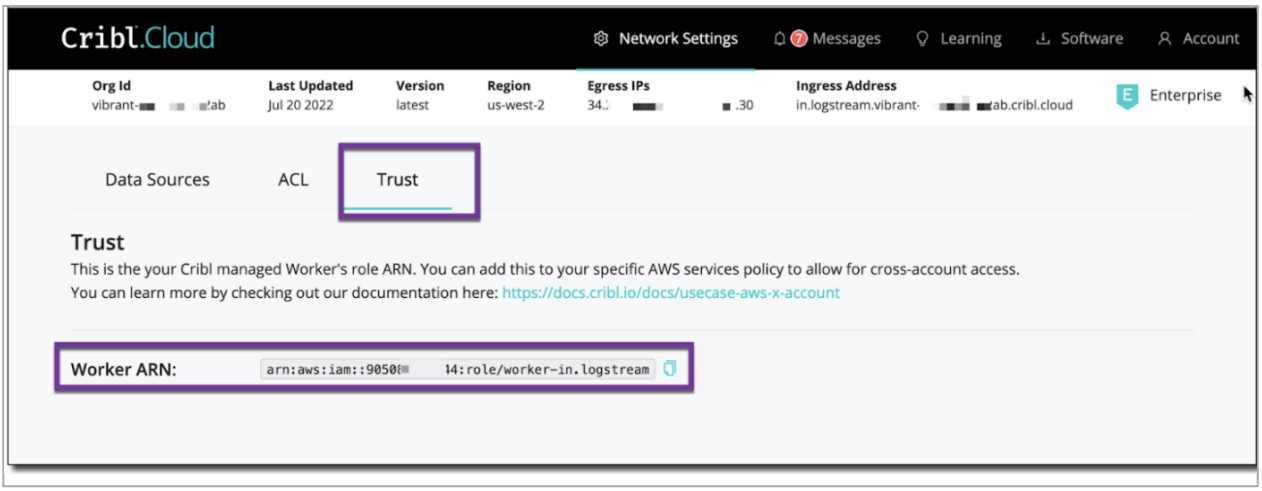

Cribl.Cloud ARN

Configure your AWS account with access to the S3 bucket, to allow Cribl.Cloud to assume that role, as illustrated above in Amazon S3 Permissions.

Better Practice 6: Tuning Amazon S3 Destination Settings

Under the Amazon S3 Destination's **General Settings** and **Advanced Settings** tabs are several settings for tuning your Amazon S3 Destination. Below are some recommendations for tuning those settings, in order of importance:

1. **Staging Location**: Change this to a directory on the Workers with increased IOPS, to accommodate thousands or tens of thousands of simultaneous open files. (Cannot be configured on Cribl.Cloud-managed Workers.)
2. **Remove staging dirs**: This setting must be enabled, so as not to leave millions of empty directories on the system over time.
3. **Compress**: Always enable compression, to reduce the size of files uploaded and downloaded from S3. This can reduce your S3 bill by 8–15x. Note that compression does add to the processing time – but transfer time will be substantially faster.
4. **Max open files**: Adjust this to be slightly larger than the data's cardinality, but not greater than 2,000. Also, ensure that the system can support the number of open files for all Worker Processes, and across all configured S3 Destinations.
5. **Max file size (MB)**: If you have a separate S3 Destination for high-volume data sources, such as VPC Flow Logs or firewall logs, consider raising this value in order to create fewer files. Start with 64 MB. Otherwise, the default 32 MB setting is generally acceptable.
6. **Max file open time (sec)**: First, determine your cardinality over 1 minute, 3 minutes, 5 minutes, and 10 minutes. Adjust this setting to match the lowest-cardinality period. E.g., if cardinality is 10,000 over 5 minutes, but 2,000 over 90 seconds, change this setting to 90 seconds. If cardinality is 2,000 over 5 minutes, then the default 5 minutes (300 seconds) is acceptable.

7. **Max idle time (sec)**: The default 30 seconds is generally acceptable. In cases with high cardinality, lowering this setting can result in fewer open files when processing bursty data. Data format: If using a Passthru Pipeline, change this setting to `Raw`. Otherwise, leave it at the JSON default to preserve all metadata added to the events.
8. **Storage class**: For Amazon S3 Destinations, consider the "infrequent access tier" or "intelligent tier" to reduce overall cost if the data will be rarely searched. Examples of rarely-searched data include threat-hunting or compliance-reporting use cases.
9. **AWS Region**: Leave this field blank for non-AWS Destinations, unless instructed otherwise. For AWS, set this to the nearest geographic location to the Workers.

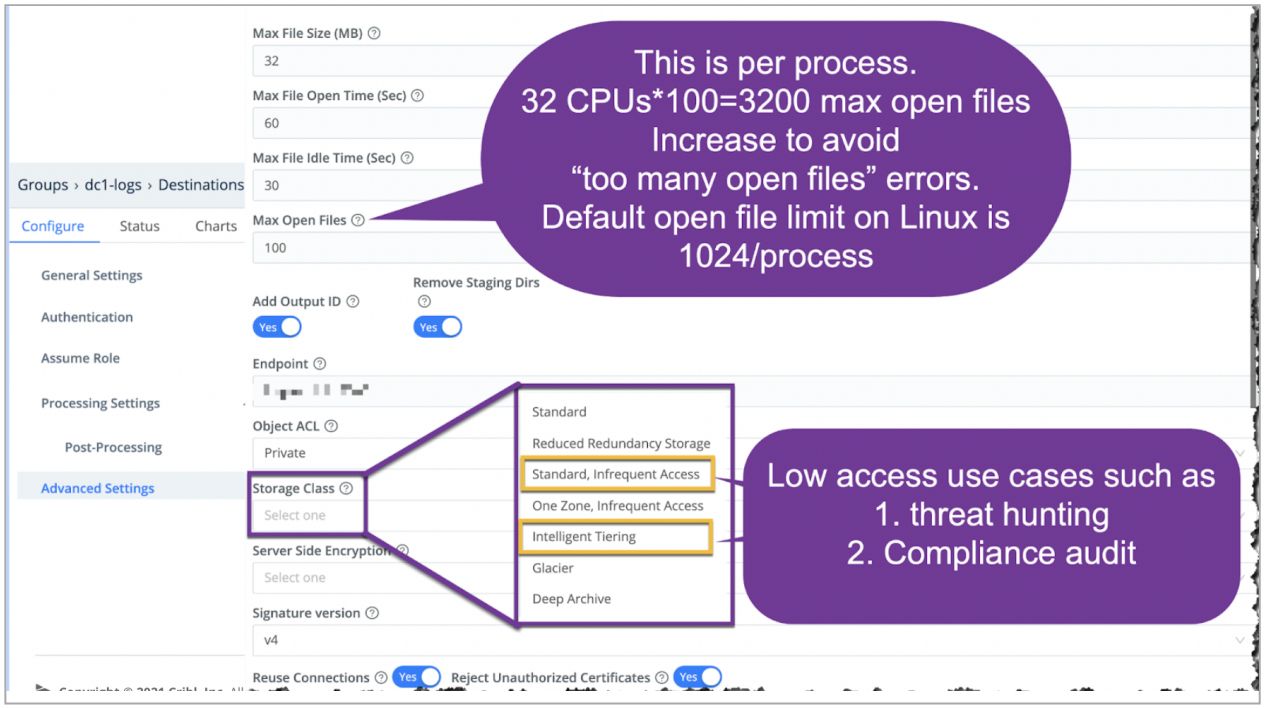

Configuring S3 Destination Settings

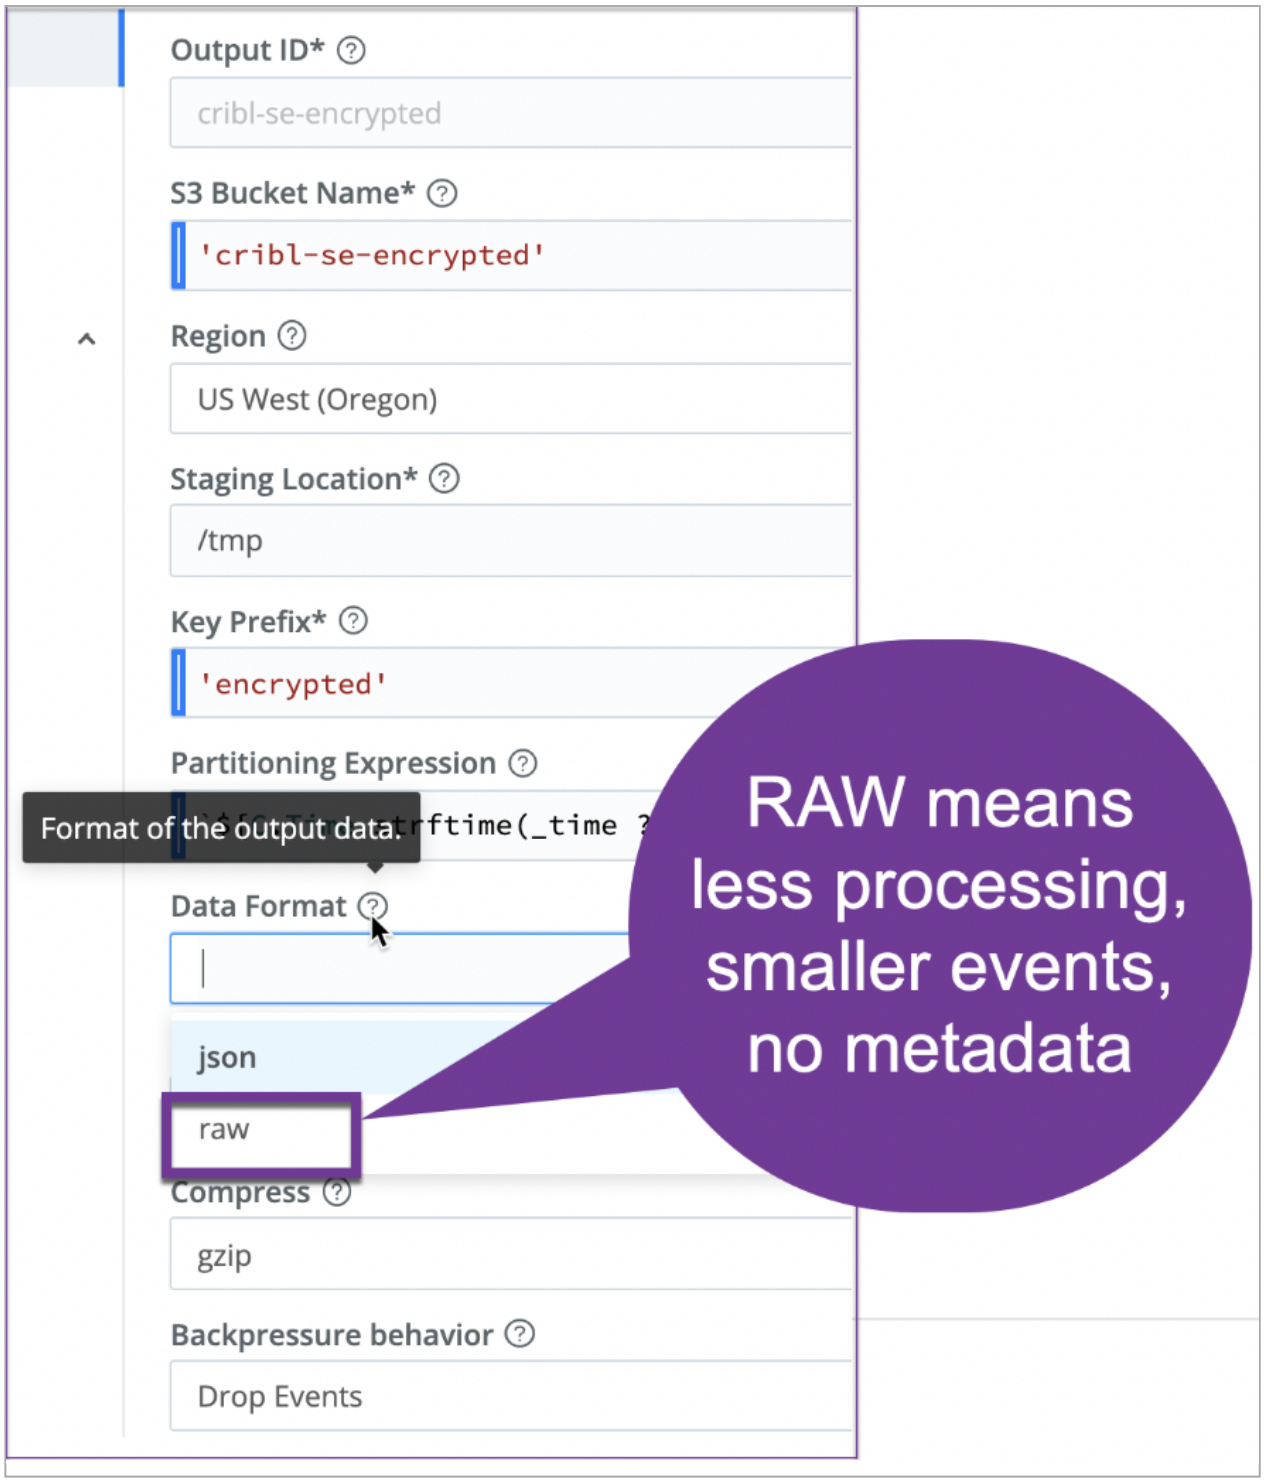

Configuring S3 Destination Settings- Continued

Better Practice 7: Lower AWS Costs

Lowering AWS costs can be achieved by a few means. First and foremost, ensure that compression is enabled on your Cribl S3 Destination. This will reduce both egress costs and S3 storage costs.

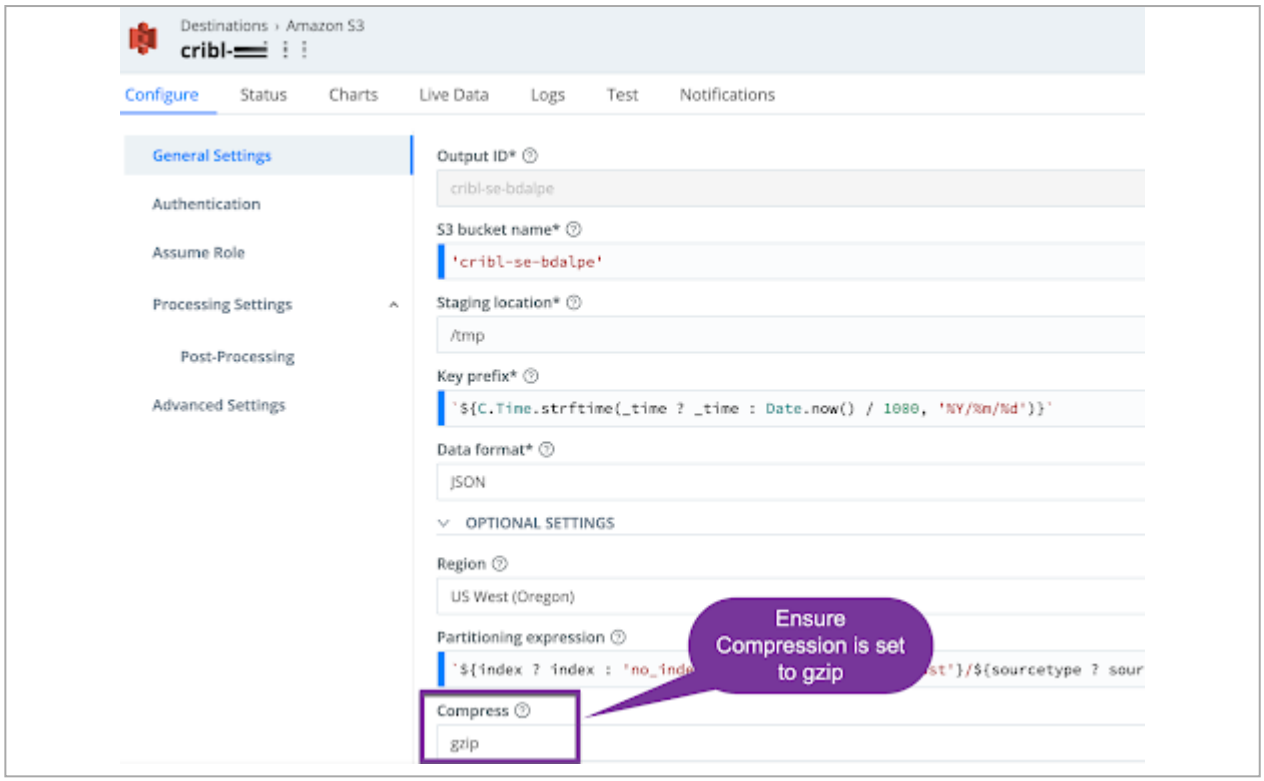

Set File Compression

To eliminate egress costs from your Workers to S3, map a VPC endpoint on the S3 bucket to the VPC where your Workers reside.

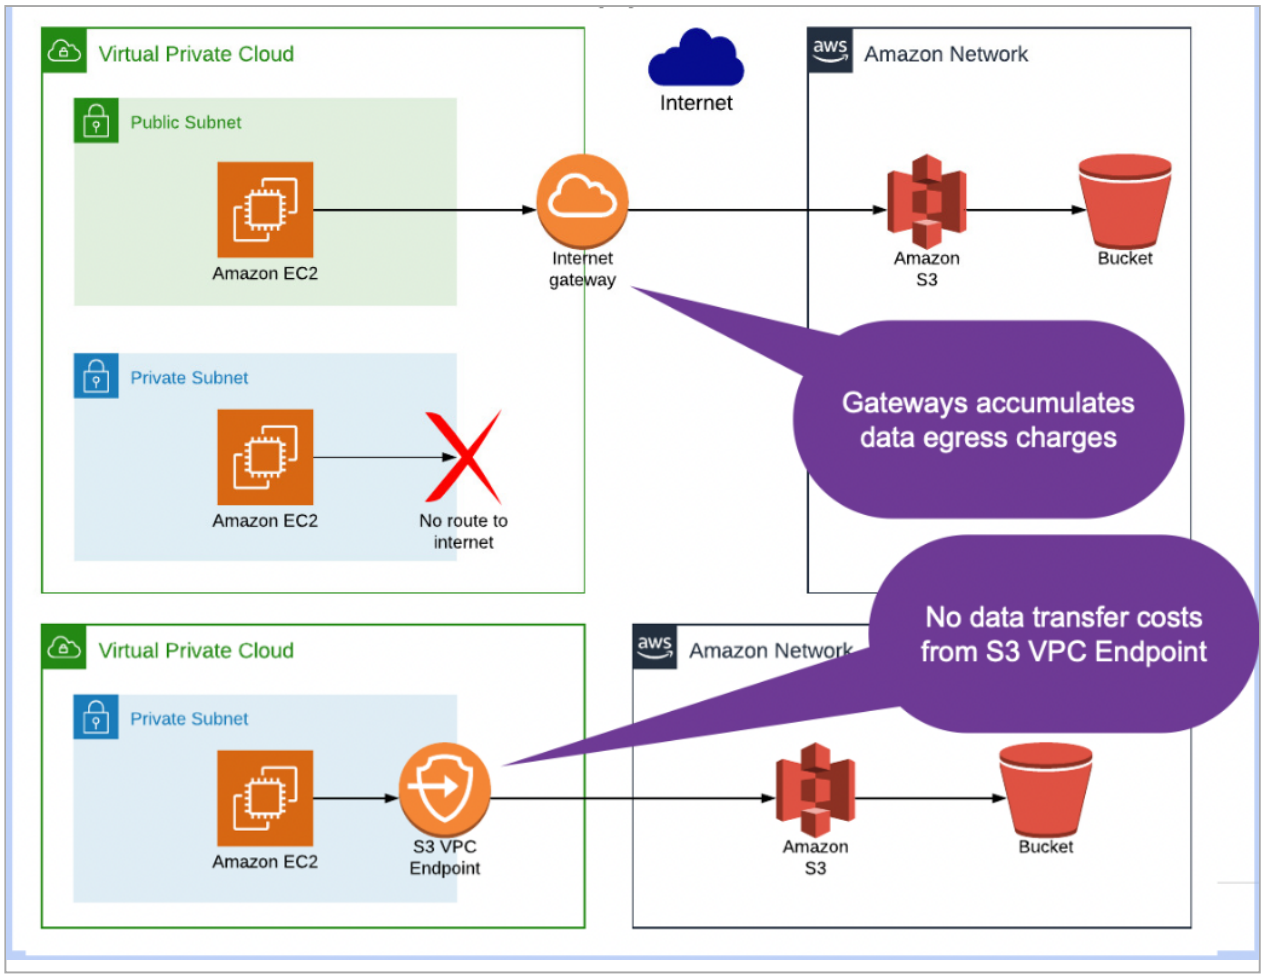

Mapping a VPC endpoint to an S3 bucket

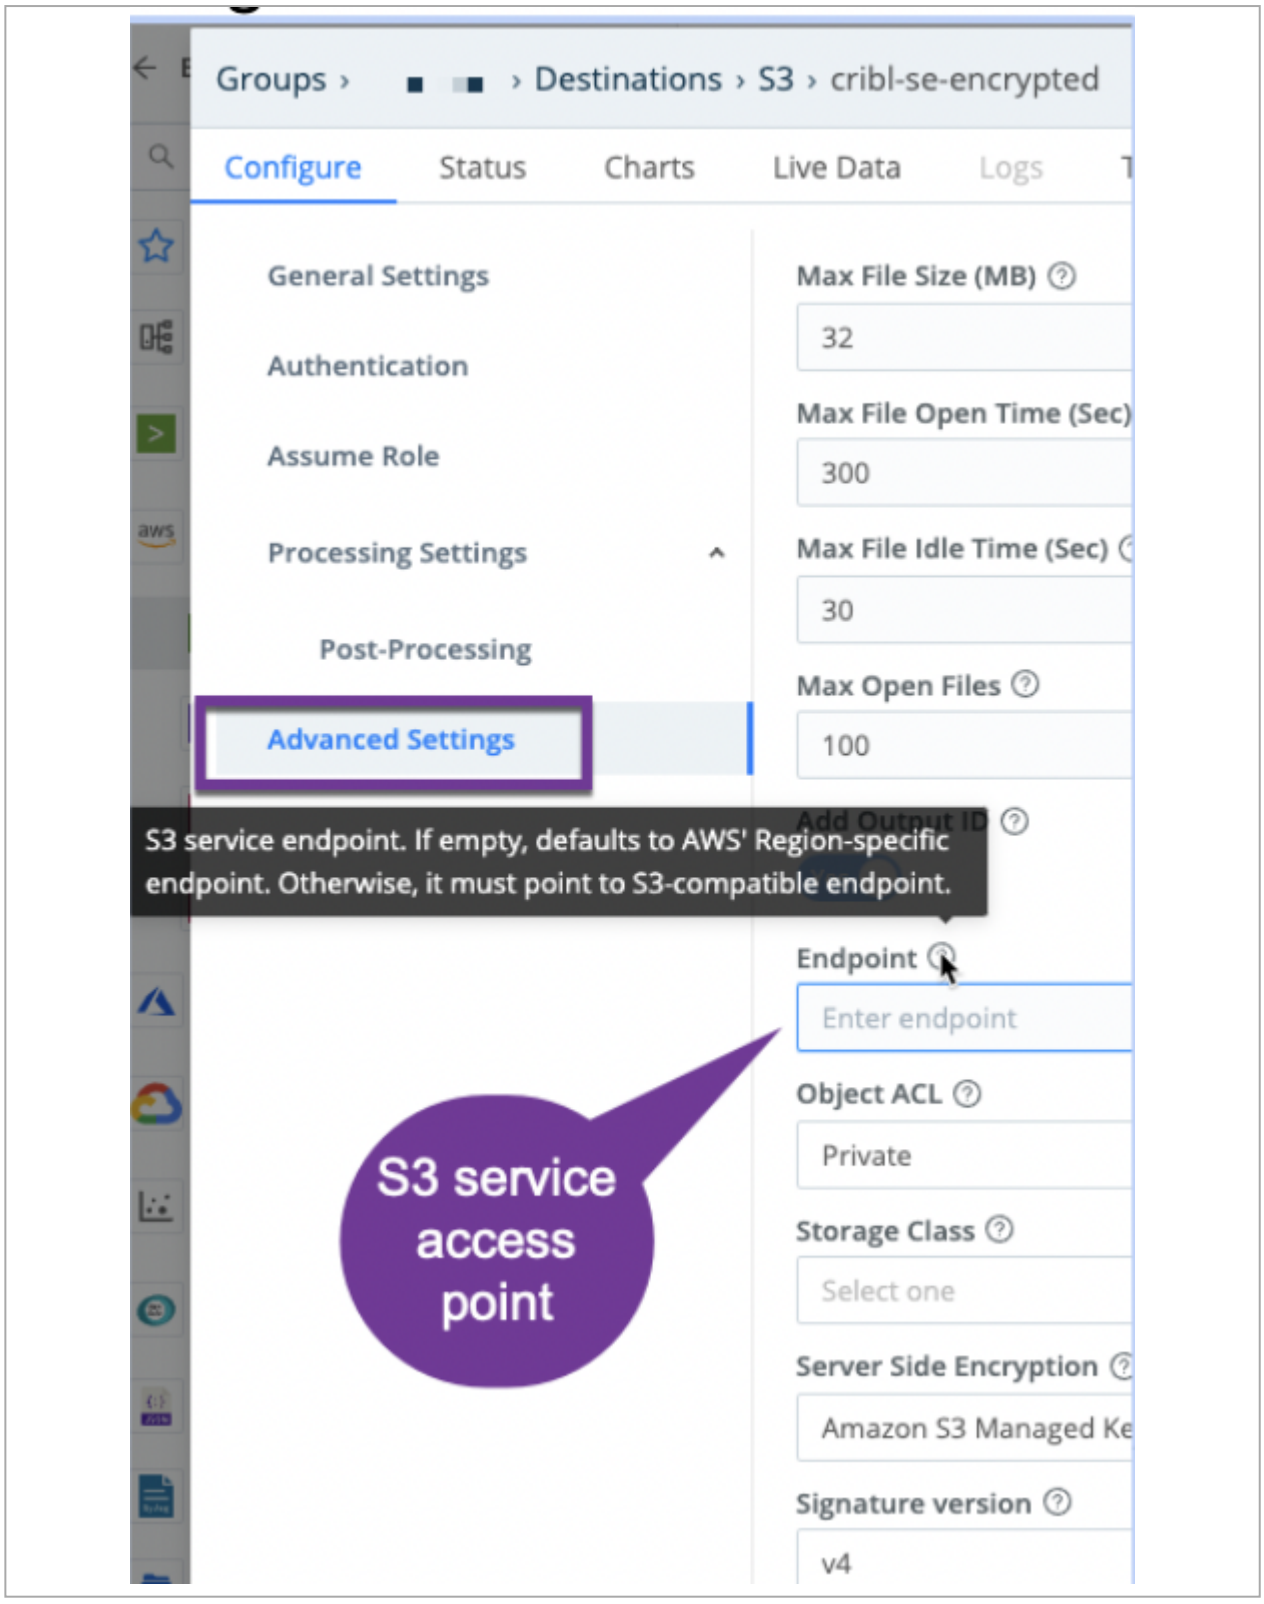

VPC Endpoint URL in the Cribl S3 Destination

Writing to S3's Intelligent storage class, or infrequent access tier, can reduce long-term costs. Intelligent storage automatically routes data to cheaper S3 tiers when it is not searched or touched for certain periods of time. Consult the AWS Cost Estimator to calculate the differences. Old data can also be rolled off to a much cheaper option such as Glacier Instant Retrieval or Glacier Deep Archive. Below are sample cost comparisons:

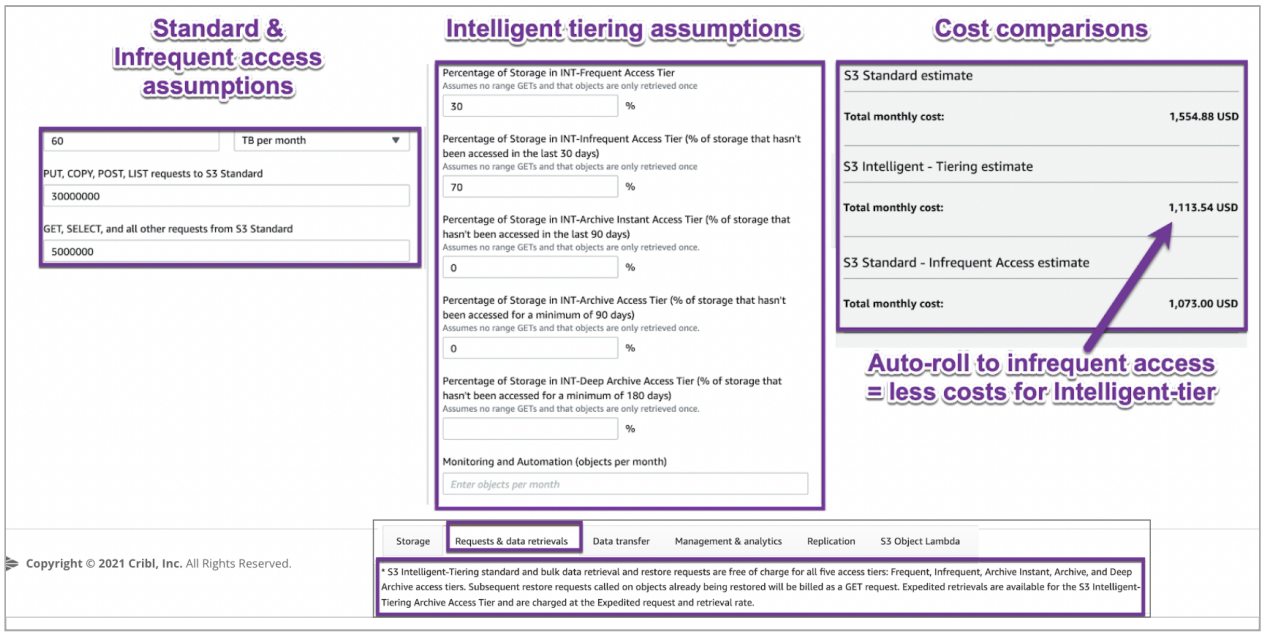

AWS Cost Comparison

> Cribl Stream Collectors and Replay features don't support S3 Glacier or S3 Deep Glacier due to long retrieval times for those storage classes.
>
> Collectors and Replay features do support S3 Glacier Instant Retrieval when you're using the S3 Intelligent-Tiering storage class.

Better Practice 8: Monitor Amazon S3 Buckets

AWS may limit S3 access if cumulative API writes are greater than 3,500 writes/second, or cumulative API reads are greater than 5,500 reads/second for a prefix (a.k.a., directory within S3). While it would be impossible to track every single AWS prefix's API requests, Cloudtrail offers "rate exceeded" events if you are ever over the API request limits.

Here's a Splunk search to report on all Cloudtrail events for S3. Filter or look for rate exceeded within the `errorMessage` field:

```
index=aws sourcetype=aws:cloudtrail errorCode=* "resources{}.ARN"=* | rename "resources{}.ARN" as ARN | stats count by eventName errorCode errorMessage ARN
```

20 Per Page ▾ Format Preview ▾ ‹ Prev 1 … 7 8 9 10 11 12 13 … Next ›

eventName	errorCode	errorMessage	ARN	count
GetLifecyclePolicy	LifecyclePolicyNotFoundException	Lifecycle policy does not exist for the repository with name 'cribl-cloud/tenant-terraform' in the registry with id '935705392901'	arn:aws:ecr:us-west-2:9	1
GetLifecyclePolicy	LifecyclePolicyNotFoundException	Lifecycle policy does not exist for the repository with name 'cribl-cloud/zeus' in the registry with id '595741502153'	arn:aws:ecr:us-west-2:9	1
GetLifecyclePolicy	LifecyclePolicyNotFoundException	Lifecycle policy does not exist for the repository with name 'cribl-cloud/zeus' in the registry with id '935705392901'	arn:aws:ecr:us-west-2:9	1
GetLifecyclePolicy	LifecyclePolicyNotFoundException	Lifecycle policy does not exist for the repository with name 'cribl-discourse' in the registry with id '630817940297'	arn:aws:ecr:us-west-2:6	1
GetLifecyclePolicy	LifecyclePolicyNotFoundException	Lifecycle policy does not exist for the repository with name 'cribl-logstream' in the registry with id '967222283187'	arn:aws:ecr:us-west-2:9	1
GetLifecyclePolicy	LifecyclePolicyNotFoundException	Lifecycle policy does not exist for the repository with name 'maestro' in the registry with id '935705392901'	arn:aws:ecr:us-west-2:9	1
GetLifecyclePolicy	LifecyclePolicyNotFoundException	Lifecycle policy does not exist for the repository with name 'zeus' in the registry with id '935705392901'	arn:aws:ecr:us-west-2:9	1
GetObject	AccessDenied	Access Denied	arn:aws:s3:::	1443
GetObject	AccessDenied	Access Denied	arn:aws:s3:::	309
GetObject	AccessDenied	Access Denied	arn:aws:s3:::	309
GetObject	AccessDenied	Access Denied	arn:aws:s3:::	106

Cloudtrail Logs Search

If there are `rate exceeded` messages from writing to Amazon S3, then a new strategy for partition and filename prefix expressions might be warranted. You will want to create fewer files, so consider one or more of the following options:

- Increasing timeouts.
- Eliminating file name expression prefixes.
- Updating partitioning expressions.

If there are rate exceeded messages on reading from Amazon S3, then you should likely apply better filtering. This might also warrant a new strategy for how files are written to S3.

For trending API calls, you'll need to focus on a specific prefix. This might be useful for specific AWS prefixes, as there will be hundreds of thousands or millions. API calls can be tracked via AWS Cloudwatch, but first need to be enabled for tracking within the S3 bucket. See AWS' Creating a Metrics Configuration that Filters by Prefix, Object Tag, or Access Point topic.

The screenshot below illustrates the locations to enable tracking API calls for a specific prefix:

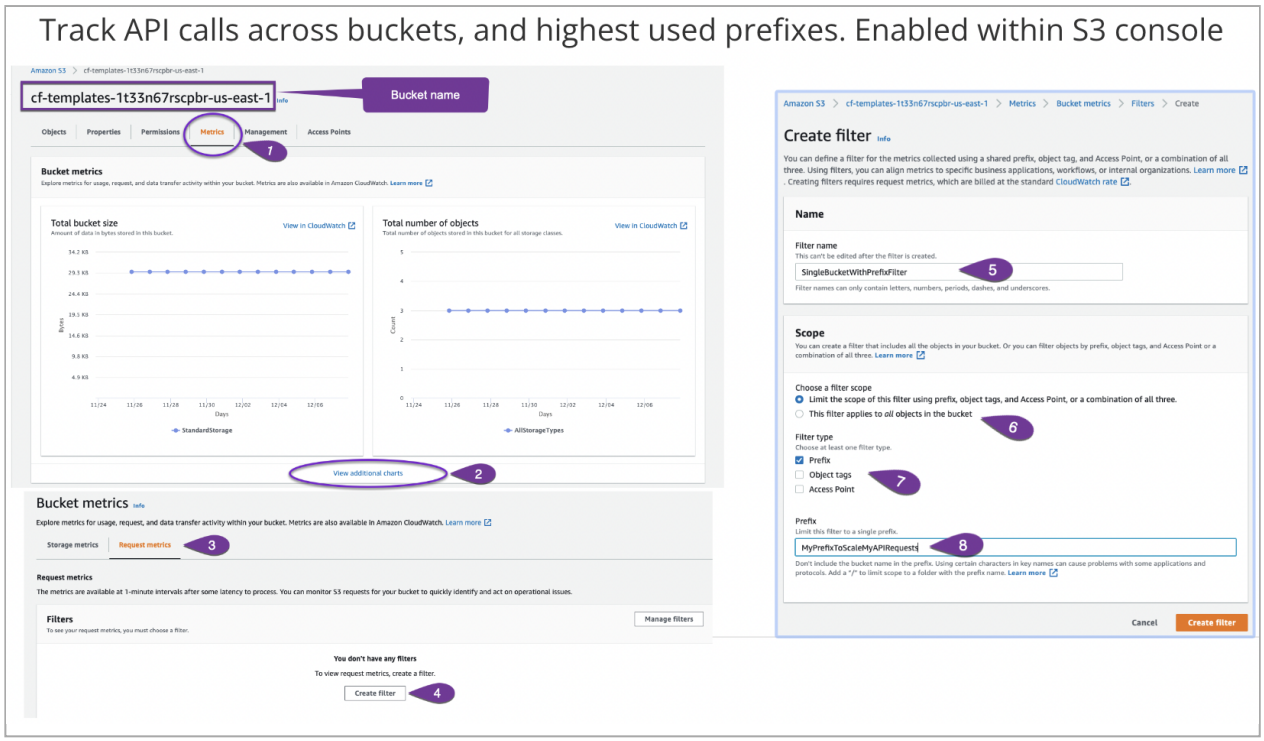

Enable Monitoring in S3

Here's a Cloudwatch chart trending all requests, and write requests, for an S3 prefix. This is granular to 1 minute. Because the API limits are per second, some extrapolations are necessary to estimate per-second values.

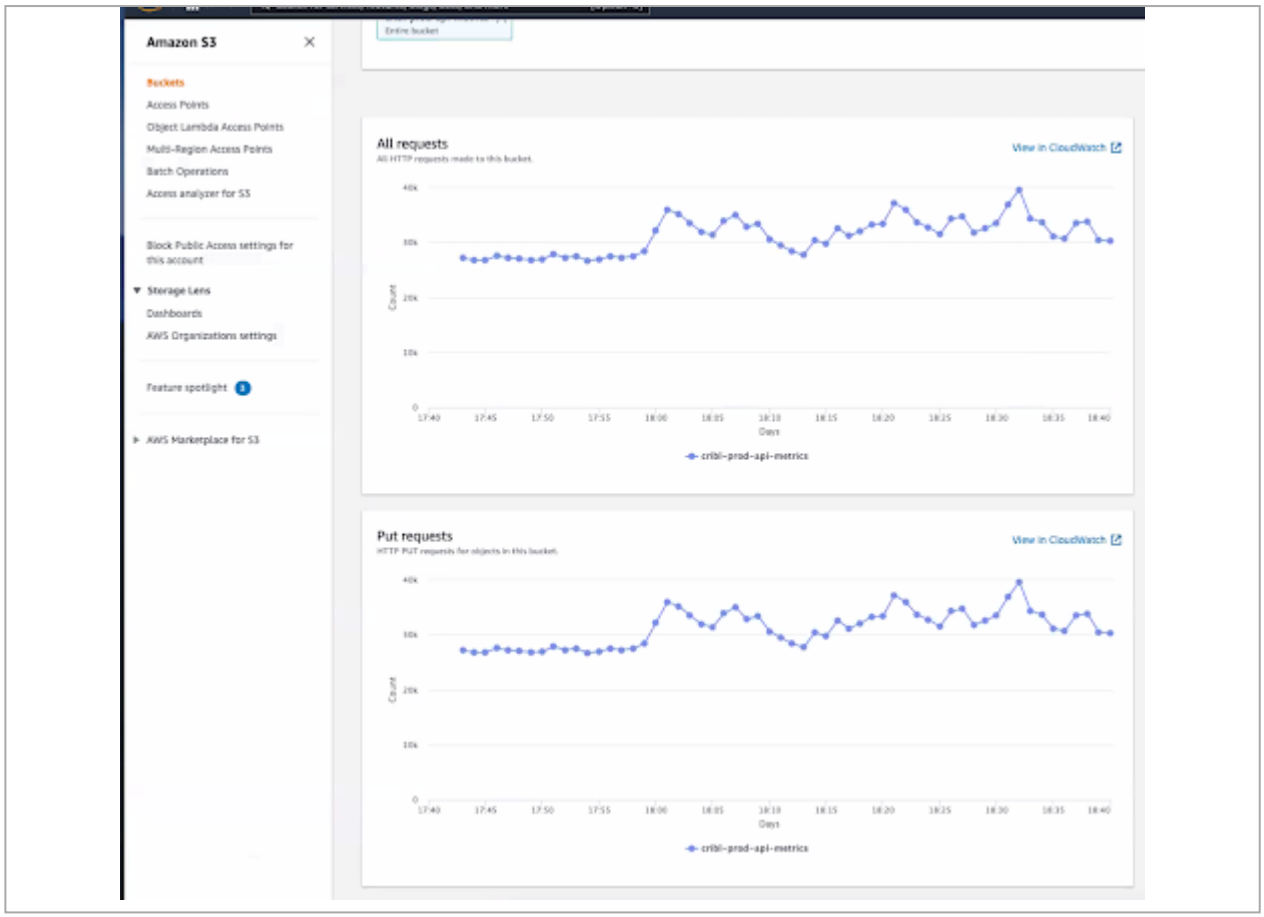

Cloudwatch Chart

Consider both the write and read behavior when designing your partitioning expressions and file name prefix expressions.

Better Practice 9: Monitor Worker Node Performance, and Enable Notifications

Aside from the standard CPU load, disk space, memory usage metrics, consider tracking some additional metrics. If the Worker Nodes are deployed as EC2 instances, track the Cloudwatch metrics for the EC2 instances and associated disks. Cribl Support will ask for these metrics to track Amazon S3 issues:

- `BurstBalance`
- `VolumeReadBytes`
- `VolumeWriteBytes`
- `VolumeReadOps`
- `VolumeWriteOps`
- `VolumeQueueLength`

On the Linux host, the following command allows you to track the number of open files. This would be another useful metric to track over time:

```
lsof | grep <common_upperlevel_staging_dir> | wc -l
```

You can also configure Notifications in Cribl Stream when the S3 Destination is unhealthy or triggering backpressure. Once the S3 Destination is enabled, and a Notification target is set, the screenshot below illustrates the workflow, which includes:

- Editing Cribl Stream's S3 Destination to configure Notifications.
- Adding Notifications for different conditions.

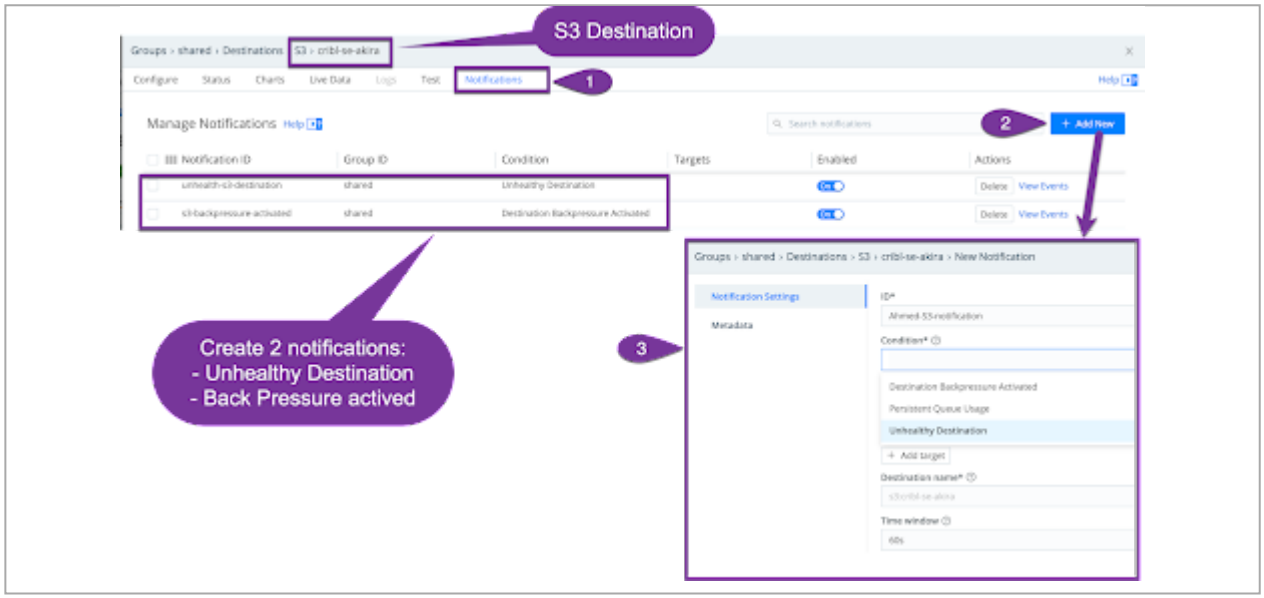

S3 Destination Notifications

Better Practice 10: Dedicate a Separate Worker Group for Replays

Execute Replays from a dedicated Worker Group. Streaming real-time data needs dedicated Worker Groups. You do not want CPU or memory conflicts on production systems that are streaming mission-critical, real-time machine data. Kubernetes or AWS spot instances are good options for on-demand Worker Processes that are needed only for infrequent replays.

Bonus Better Practice: Tune Amazon S3 Source Settings

For Cribl Stream's SQS-based Amazon S3 Source (as opposed to our S3 Collector), a few settings can speed up processing of new files added to an S3 bucket:

1. Under **General Settings**, apply a **Filename filter** if you want to pull only a subset of files from the S3 filter. The value is a regular expression (e.g., *suricata*)
2. Under **Advanced Settings**, set **Max messages** as high as 10 to fetch more queues at once.
3. Under **Advanced Settings**, set the **Num receivers** to vertically scale the number of simultaneous processes pulling SQS messages and downloading S3 files. For S3 buckets with centralized Cloudtrail logs, or VPC flows across multiple accounts, raise the setting to 5 or 10.

Better Partitioning Expressions

Creating partitioning expressions is an art. To get a sense of the possibilities and risks, let's consider both positive and negative examples.

Partitioning Expression 1: The Good

```
${C.Time.strftime(_time ? _time : Date.now(), '%Y/%m/%d/%H/%M')}
```

KEY QUESTIONS	ANSWERS
Potential cardinality every hour?	1
How many open files if there are 30 Worker Processes?	30 open files
How many files in the S3 prefix, if the timeout is the default 60 seconds (assuming no file size limit)?	30 * 1 = 30 files
What if there are 10 Nodes in the Worker Group? How many files in each S3 prefix?	30 * 10 = 300 files
What happens when a replay fetches data for this hour?	Under API limit of 5,500 reads/sec

Result

- A good partitioning expression.

Partitioning Expression 2: The Ambiguous

```
${C.Time.strftime(_time ? _time : Date.now(), '%Y/%m/%d/%H')}
/${index ? index : 'no_index'}
/${host ? host : 'no_host'}
/${sourcetype ? sourcetype : 'no_sourcetype'}
```

KEY QUESTIONS	ANSWERS
Potential cardinality every 3 minutes?	3,000
How many active subdirectories in the staging dir?	3,000
What is the excess cardinality?	30 * 1 = 30 files
What if there are 10 Nodes in the Worker Group? How many files in each S3 prefix?	3,000 - 2,000 = 1,000
What are maximum open files if there are 14 Worker Processes on a Worker ?	14 * 2,000 = 28,000 open files
What happens when maximum open files of 2,000 is reached for any one Worker Process? What happens if it happens too frequently?	All files closed & written to S3 at once = 2,000 writes. Potential for backpressure if Cribl Stream takes long enough to write the files.
What's the maximum number of files in any S3 prefix?	14 * 10 Worker Process * (60min/3min) = 2800 files max in any S3 prefix

Additional assumptions:

- Cardinality of 3,000 every 3 mins.
- File write timeout of 3 minutes.
- Max file size never reached.
- 10 Worker Process in group.

Result

- Proceed with caution.

Solution

- Track the occurrences of `max open files reached` messages
- If the `max open files reached` message occurs too frequently, consider reducing the cardinality. You might achieve this by lowering the timeout period to 2 minutes or 1 minute.

Partitioning Expression 3: The Bad

```
${C.Time.strftime(_time ? _time : Date.now(), '%Y/%m/%d/%H')}
```

KEY QUESTIONS	ANSWERS
Potential cardinality every hour?	1
How many open files if there are 30 Worker Processes?	30 open files.
How many files in the S3 prefix, if the timeout is the default 60 seconds (assuming no file size limit)?	(30 * 60) = 1800 files
What if there are 10 Nodes in the Worker Group? How many files in each S3 prefix?	(1,800 * 10) = 18,000 files
What happens when a replay fetches data for this hour?	Over API limit of 5,500 reads/sec.

Result

- A bad partitioning expression.

Solution

- Go down to the minute, to lower the number of files in any one AWS prefix.

```
${C.Time.strftime(_time ? _time : Date.now(), '%Y/%m/%d/%H/%M')}
```

Partitioning Expression 4: The Terrible

```
${C.Time.strftime(_time ? _time : Date.now() / 1000, '%Y/%m/%d')}
/${index ? index : 'no_index'}
/${host ? host : 'no_host'}
/${sourcetype ? sourcetype : 'no_sourcetype'}
```

Filename Prefix Expression:

```
${C.Time.strftime(_time ? _time : Date.now() / 1000, '%H%M')}
```

KEY QUESTIONS	ANSWERS
What are max open files on any one Worker Process?	Answer: `2,000` , because that is the lower of: `[(500 directories * 5 filename prefix files = 2,500 open files per process]` and `[2,000 open files]`
How many active subdirectories in the staging dir?	Around 400

KEY QUESTIONS	ANSWERS
What happens when max open files of 2,000 is reached for any one Worker Process?	All files closed and written to S3 at once (2,000 writes at once). Happens every 4 minutes. There's potential for backpressure if Cribl Stream takes long enough to write the files.
What's the max number of files in any S3 prefix?	14 processes * 1440 mins * 10 Worker Process = 202K files! API issues on read are likely.

Additional Assumptions

- Reduced cardinality of 200 every 2 minutes, and 500 every 5 minutes.
- Introduction of a file prefix partition.
- Max open files within Cribl Destination set to 2,000.
- Max file open time of 5 minutes.
- Assume max file size is never reached.
- 10 Worker Processes in Group.
- 14 Worker Processes/Worker.

Result

- A terrible partitioning expression.

Solution

- Don't use the file prefix expression; consider expanding the partitioning expression instead.
- Reduce timeout to 2 minutes, as cardinality will be lower over a 2-minute span.

14.2.2. Amazon Security Lake Integration

Cribl Stream supports sending data to Amazon Security Lake as Parquet files that adhere to the Open Cybersecurity Schema Framework (OCSF). The diagram below illustrates the all-AWS variant of this architecture.

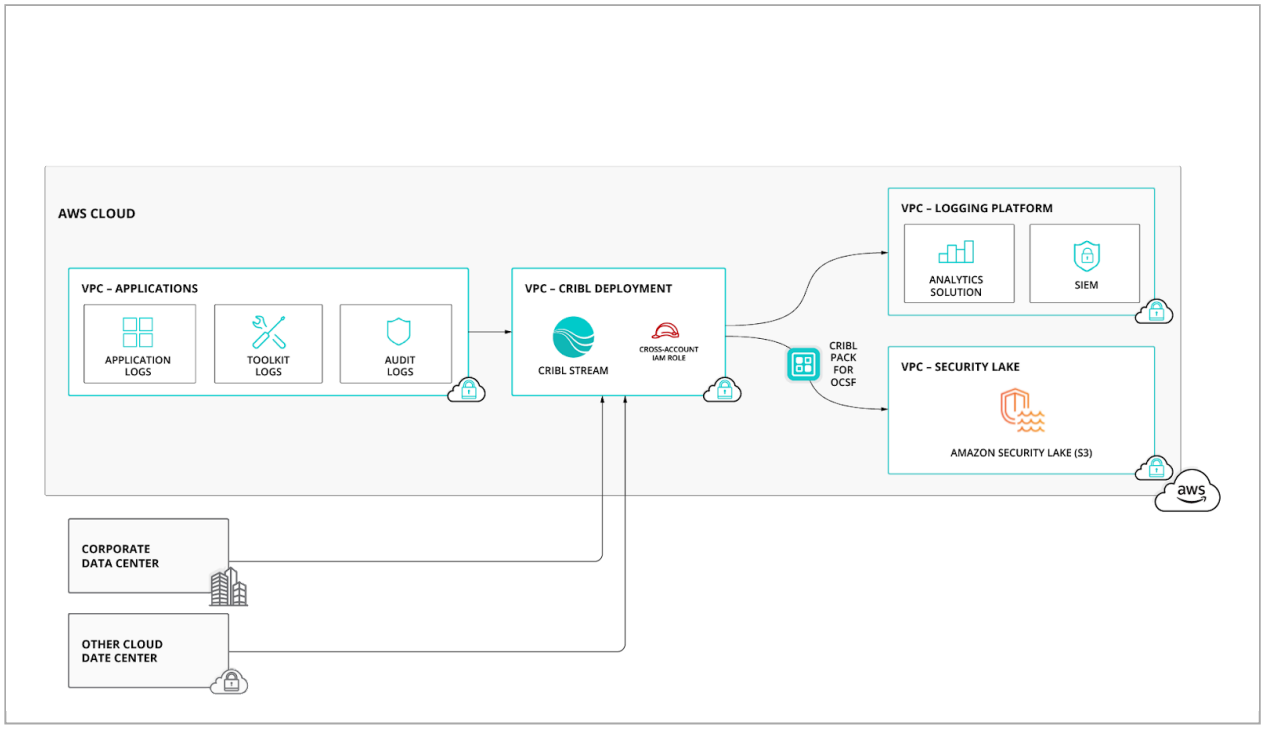

Integrating Cribl Stream with Amazon Security Lake

This guide walks you through an example where Cribl Stream, running in Cribl.Cloud, sends Palo Alto Networks logs to Amazon Security Lake. The workflow starts with a Cribl Stream Syslog Source, which ingests the Palo Alto data and routes it to a Cribl Stream Amazon Security Lake Destination, which then writes Parquet files to Amazon Security Lake. These Parquet files organize the data according to the OCSF schema for the appropriate OCSF Event Class, in this case Network Activity [4001].

You can work with other data sources besides Palo Alto Networks, and other OCSF Event Classes besides Network Activity [4001]. See Going Beyond This Example below.

If you want to use Amazon Security Lake with a Cribl Stream instance deployed on-prem or in your private cloud, the setup procedures will differ from those documented here. Please contact Cribl via the `#packs` channel of Cribl Community Slack.

Setting Up Amazon Security Lake

Complete the Amazon Security Lake Getting Started instructions, paying particular attention to the following actions:

1. Enable Amazon Security Lake for your AWS account.
2. Define the **collection objective** and **target objective**.
3. Select the regions where you want to create S3 buckets to store the data in OCSF format.

Note your Amazon Security Lake S3 bucket name for use later in the setup process.

Setting Up Cribl Stream

Complete the procedures in this section before doing anything else in Cribl Stream.

First, find and note the Amazon Resource Name (ARN) that enables AWS to locate your Cribl Stream instance.

1. Log in to Cribl.Cloud to open the Portal Page.
2. In the top nav, click **Network Settings** and open the **Trust** tab.
3. Click the copy icon next to the **Worker ARN**, and paste the ARN into a local text editor.
4. Copy the 12-digit number in the middle of the ARN. This is the AWS Account ID you'll need later in the setup process.

For example:

- If your ARN is `arn:aws:iam::222233334444:role/main-default`, then ...
- Your AWS Account ID will be `222233334444`.

Next, install the Cribl Pack that Cribl Stream will use to send data to Amazon Security Lake in the required OCSF format. (As the reference shows, the Palo Alto Networks data chosen for this example requires the **OCSF Post Processor Pack**.)

1. In the top nav, click **Cribl.Cloud** to return to the Portal Page.
2. Click **Manage Stream** or **Manage Edge** to open the **Worker Groups** page.
3. Click the name of the Worker Group whose Worker Nodes you want to send data to Amazon Security Lake. (For this example, we'll use the `default` Worker Group.) This takes you to the **Manage** > **Overview** page.
4. Navigate to **Processing** > **Packs** and click **Add Pack**. From the drop-down, select **Import from Git** to open the **Import** modal.
5. For the **URL**, enter:

```
https://github.com/asc-me-cribl/cribl_ocsf_postprocessing
```

6. For the **New Pack ID**, enter:

```
Cribl-OCSF_Post_Processor
```

7. Click **Import** to close the modal. Cribl Stream will take a little time to finish importing the Pack.

At the bottom of the list of Packs, you should now see your newly imported Pack, listed with the display name of **OCSF Post Processor**.

Finally, you will need the Parquet schema that supports the OCSF Event Class you're working with. In this example, that's OCSF Event Class 4001, so as shown in the reference below, you'll need the `OCSF 4001 Network Activity` Parquet schema.

- First, download the Parquet schema from this GitHub repo.
- Then, upload the schema to the Cribl Stream Parquet schema library as described here.

Once this is done, the Parquet schema you need should be available when you configure the **Parquet Settings** for your Cribl Stream Amazon Security Lake Destination.

Please post any questions you have about these procedures to the `#packs` channel of Cribl Community Slack.

Creating an Amazon Security Lake Custom Source

Because Cribl is not a native Amazon service, you'll configure what Amazon calls a **Security Lake custom source**, and the Cribl Stream Amazon Security Lake Destination will write to that.

Before you begin:

1. Have your Cribl.Cloud AWS account ID, which you identified earlier, handy.
2. Ensure that you have permissions in AWS Lake Formation to create AWS Glue databases and tables. For more information, see Granting and revoking permissions using the named resource method in the AWS docs.

Then complete the instructions here in the AWS docs. These docs will take you through the **Create custom data source** template show below.

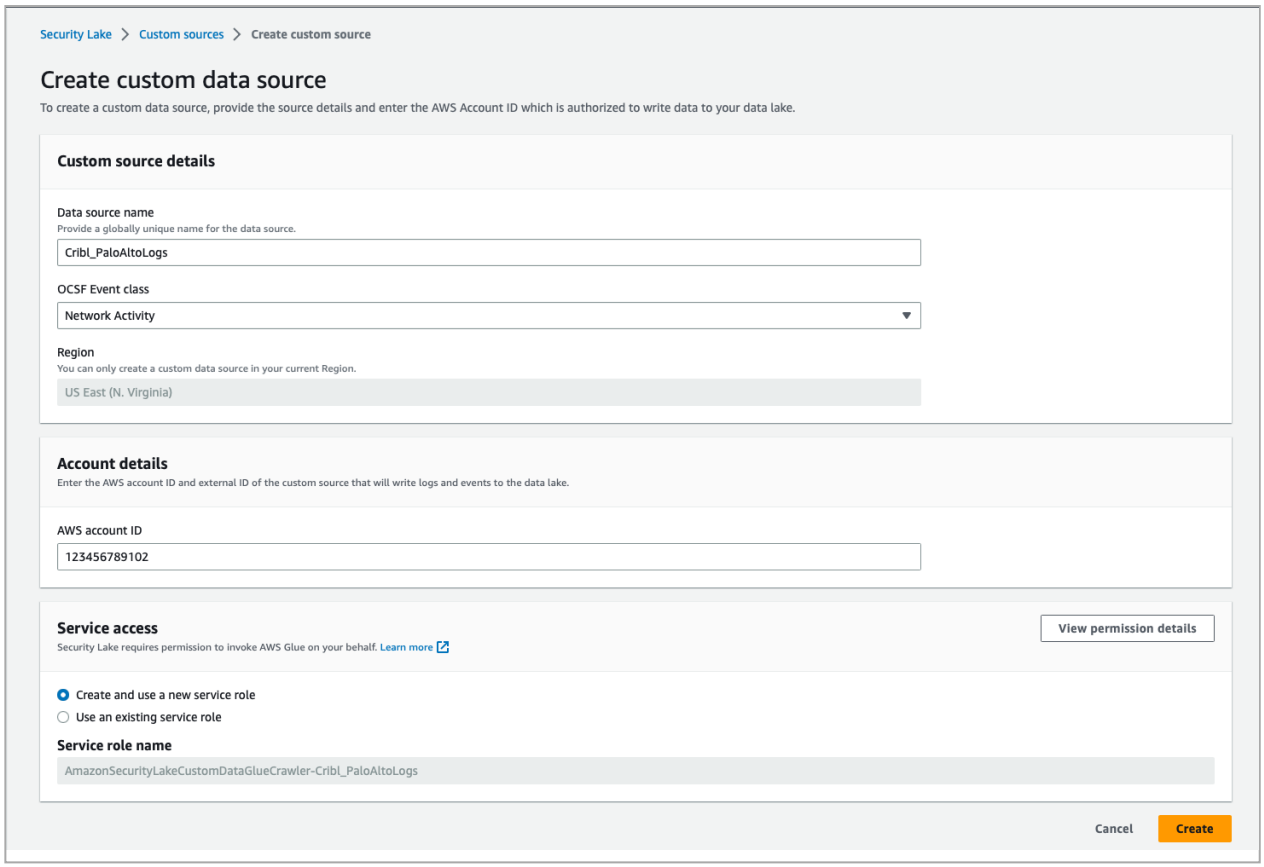

Creating an Amazon Security Lake custom source

Once the custom source has been created, still in AWS, navigate to **Security Lake** > **Custom sources** and you should see your new custom source in the list.

Now locate the **Provider role ARN**. This is the ARN that Cribl Stream will use to declare its role to AWS.

1. Click the copy icon next to the **Provider role ARN** to add it to your clipboard. Keep the ARN handy for use later in the setup process.
2. Navigate to the **Identity and Access Management (IAM)** screen.
3. From the left menu, select **Access management** > **Roles**.
4. In the **Roles** search box, paste the part of the ARN that begins `AmazonSecurityLake` and ends with the region.
5. When the role name appears below, click the link.
6. In the **Trust relationships** tab, view the `ExternalId` element in the JSON object that appears there.

This is the External ID for the trust relationship, which you created when went through the template. You will need this ID later in the setup process.

Creating a Cribl Amazon Security Lake Destination

Back in Cribl Stream, create a new Amazon Security Lake Destination in the Routing UI as described in the Destination topic. In the **New Destination** modal, configure the settings specified below. For all settings **not** mentioned in the following notes, you can keep the defaults.

General Settings

S3 Bucket name: The S3 bucket name you noted when setting Up Amazon Security Lake.

Region: Select the region where the S3 bucket is located.

Optional Settings

File name prefix expression: Keep the default (`CriblOut`) if it satisfies your requirements; otherwise, edit to suit your needs.

Authentication

Authentication method must be set to `Auto` (the default).

Assume Role

Cribl strongly recommends using the **Auto** authentication method in conjunction with the **Assume Role** settings as described below. Both Cribl and Amazon discourage the use of other approaches.

AssumeRole ARN: This is the **Provider role ARN** you copied after creating your custom source in Amazon Security Lake.

External ID: Enter the ID that you specified when creating your Amazon Security Lake custom source.

Processing Settings

Post-Processing

Pipeline: From the drop-down, select the Pack you installed earlier:

```
PACK Cribl-OCSF_Post_Processor (OCSF Post Processor)
```

System fields: Remove any fields specified here.

Parquet Settings

Parquet schema: From the drop-down select `OCSF 4001 Network Activity`, since OCSF Event Class 4001 describes the events coming from Palo Alto Networks in this example.

At this point, you can click **Save**; the defaults for **Advanced Settings** should work fine for this example. Then, **Commit** and **Deploy**.

> You must create one Cribl Stream Amazon Security Lake Destination for **each unique pairing** of a data source with an OCSF Event Class.
>
> - In this example, we're ingesting Palo Alto Networks Threat and Traffic data, which requires the OCSF Network Activity [4001] Event Class. That's one pairing.
> - If you also wanted to ingest CrowdStrike Network Activity data, that would be a new data source paired with the same OCSF Event Class – i.e., **that would be a second unique pairing**. You would need to create a **separate** Cribl Stream Amazon Security Lake Destination for that pairing.
>
> The reference below shows all the possible pairings of data sources and OCSF Event Classes.

Connecting a Cribl Source to the S3 Destination

We'll now configure a Cribl Stream Syslog Source to ingest Palo Alto Networks system logs, using the QuickConnect UI. (The reference below shows what Cribl Stream Source to use for each supported data source.)

Navigate to QuickConnect as described here. After clicking the Syslog Source tile, click **Select Existing**, then click the pre-configured `in_syslog` Source. When prompted to `Switch in_syslog to send to QuickConnect instead of Routes?`, click `Yes`.

Click **+** and drag the connection line to the S3 Destination you created above.

The connection between the Syslog Source and the S3 Destination should now be enabled.

Commit and **Deploy** the changes.

Sending Data to Amazon Security Lake

Return to your AWS Console. You should see Parquet files landing in the S3 bucket. These files should contain the Palo Alto Networks syslog data you sent through Cribl Stream.

Troubleshooting and Testing

Good things to double-check:

- Are you sending the events to your Amazon Security Lake in Parquet format?
- Are your permissions set properly for your IAM role to write to the S3 bucket?

If the answer to either question is "No," your data will not make it into Amazon Security Lake.

To send sample events from the GitHub repo, using netcat:

1. Download the `oYLbFU.json` sample file.
2. Run the following command, replacing `<cribl_org_id>` with your Cribl.Cloud Organization ID:

```
cat oYLbFU.json | nc in.main-default-<cribl_org_id>.cribl.cloud 10070
```

Going Beyond This Example

If you want to send data from sources other than Palo Alto Networks, you can adapt the above instructions to use the appropriate Source and Pack (and/or modifications to the OCSF Post Processor Pack) in Cribl Stream. This holds true as long as the OCSF Event Classes you want to work with are among those supported by Cribl Stream. For each unique pairing of a data source with an OCSF Event Class, you'll need to create a separate Amazon Security Lake Destination.

In the next section is a list of the supported data sources, what OCSF Event Classes they handle, and what Packs and Parquet schemas you need to work with them.

Reference: Supported Data Sources

DATA SOURCE	OCSF EVENT CLASSES HANDLED	CRIBL SOURCE	CRIBL PACK DISPLAY NAME	PARQUET SCHEMA(S)

Azure Audit Logs	3002, 3004	REST Collector against Microsoft Graph API	Azure Audit Logs to OCSF	`OCSF 3002 Authentication`
				
				`OCSF 3004 Entity Management`

Azure NSG Flow Logs	4001	Azure Blob Storage Source, run as scheduled jobs, not as a Pull Source	Azure NSG Flow Logs	`OCSF 4001 Network Activity`

DATA SOURCE	OCSF EVENT CLASSES HANDLED	CRIBL SOURCE	CRIBL PACK DISPLAY NAME	PARQUET SCHEMA(S)
Cisco ASA	4001	Syslog	Cisco ASA	`OCSF 4001 Network Activity`
Cisco FTD	4001	Syslog	Cisco FTD	`OCSF 4001 Network Activity`
CrowdStrike Account Change	3001	CrowdStrike FDR	Crowdstrike FDR Pack	`OCSF 3001 Account Change`
CrowdStrike Authentication	3002	CrowdStrike FDR	Crowdstrike FDR Pack	`OCSF 3002 Authentication`
CrowdStrike Network Activity	4001	CrowdStrike FDR	Crowdstrike FDR Pack	`OCSF 4001 Network Activity`
GCP Audit Logs Account Activity	3001	Google Cloud Pub/Sub	Google Cloud Audit Logs	`OCSF 3001 Account Change`
Palo Alto Networks (PAN) Threat and Traffic	4001	Syslog	OCSF Post Processor Pack	`OCSF 4001 Network Activity`

SentinelOne	1001, 2001, 3002, 4001	Amazon S3	SentinelOne Cloud Funnel	`OCSF 1001 File System Activity`
				`OCSF 2001 Security Finding`
				`OCSF 3002 Authentication`
				`OCSF 4001 Network Activity`

Windows Logon Activity	3002	Splunk TCP	Splunk Forwarder Windows Classic Events to OCSF	`OCSF 3002 Authentication`
ZScaler Firewall and Weblogs	4001	Syslog	OCSF Post Processor Pack	`OCSF 4001 Network Activity`

14.2.3. Cribl Edge as a Sidecar Container in AWS ECS

You can use Cribl Edge to collect logs from a service or task running in ECS. This is an alternative to forwarding logs to CloudWatch Logs.

> Currently, you can't configure Windows hosts as sidecar containers in AWS.

Container Definition

Add a secondary container to the task definition. To configure the container, you must first set the following environment variables:

NAME	VALUE
CRIBL_DIST_MASTER_URL	tcp://<token>@<leader>:4200
CRIBL_DIST_MODE	managed-edge
CRIBL_EDGE	1

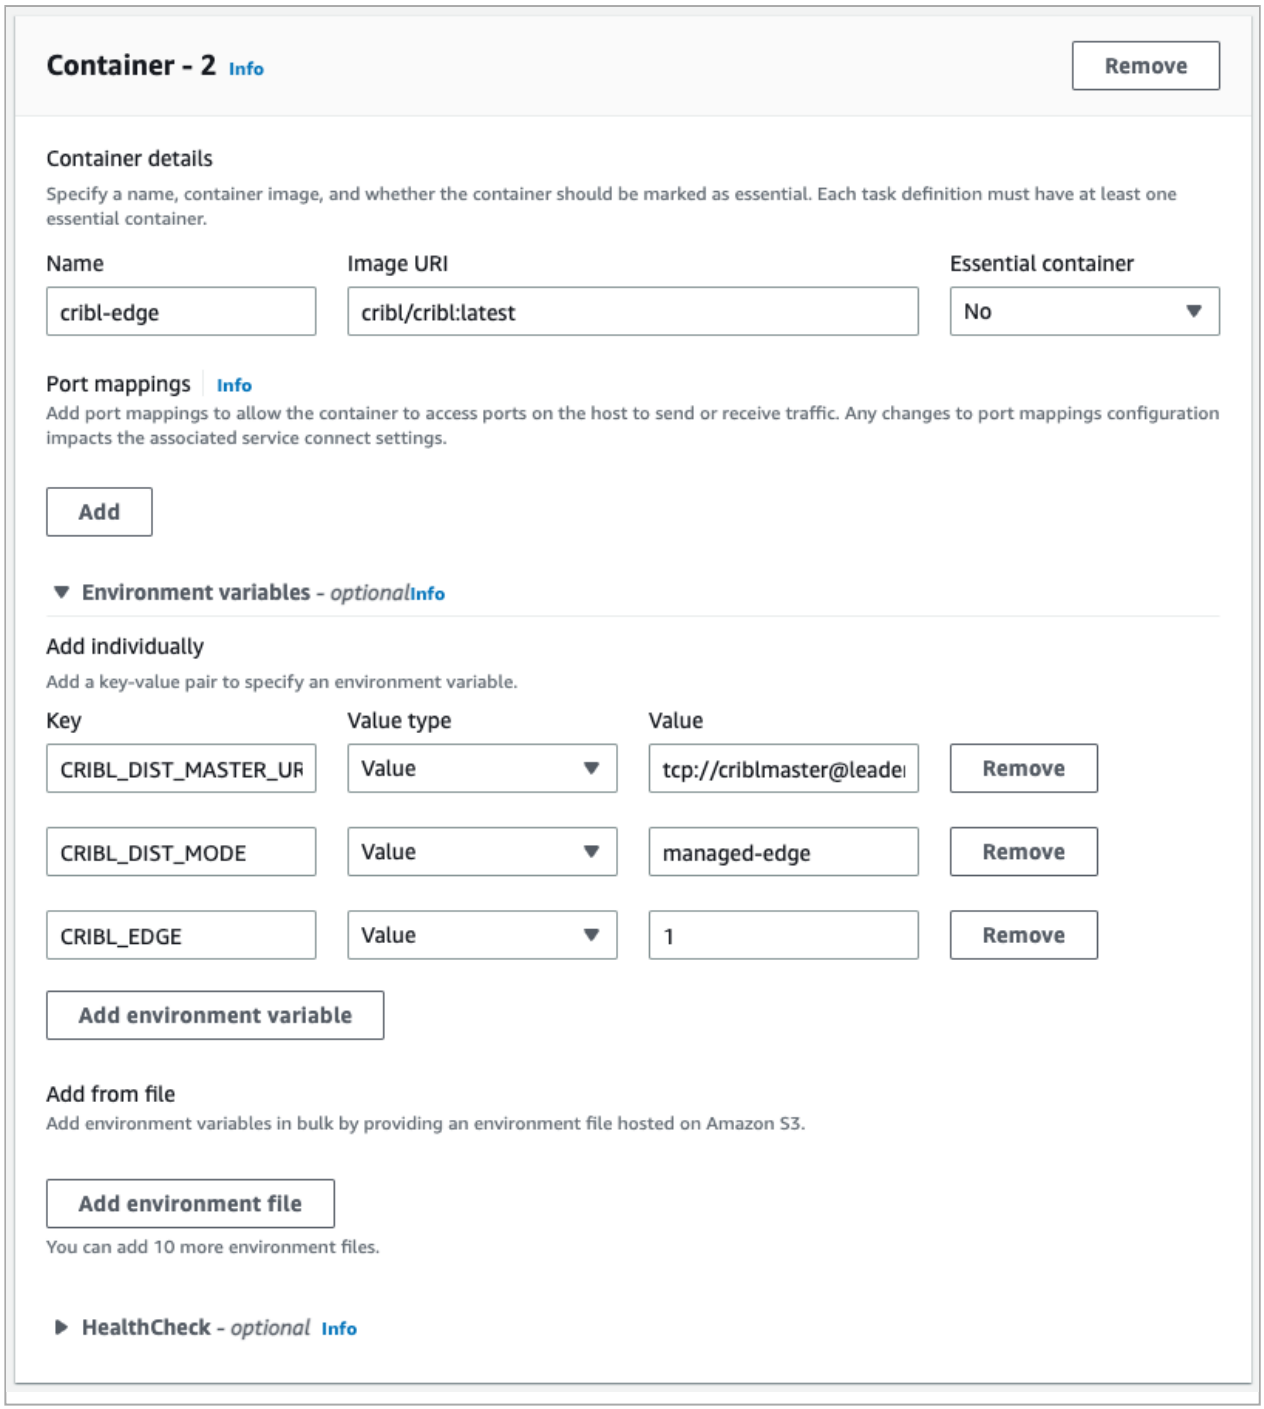

Add Environment Variables to Container Details

Configure Storage

To pass logs between containers, you can use a Bind Mount, which is a special folder mounted between containers. For details, see Using Data Volumes in Tasks.

Here's an example configuration from the ECS task definition:

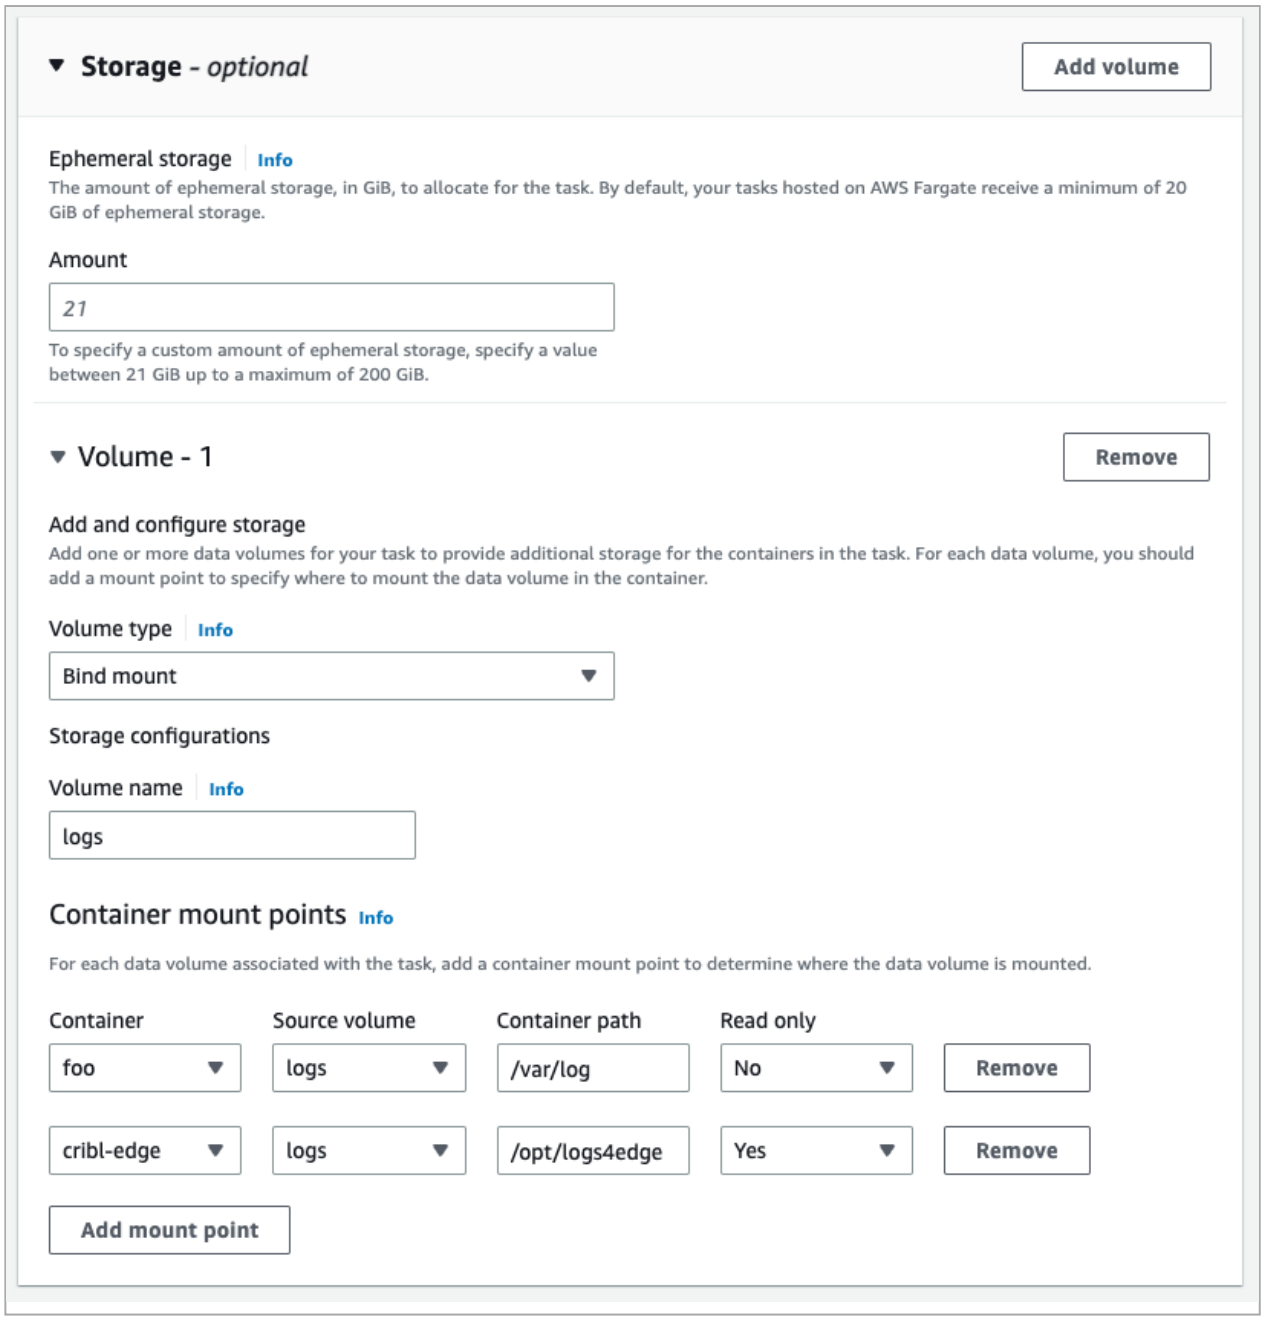

ECS Task Definition Example

Sample JSON Container Definitions

You can adapt the following sample JSON definitions for the container. Note, this is not a full ECS task definition.

```
{
    "containerDefinitions": [
        {
            "name": "whatever",
            "image": "foo/bar:latest",
            ...
            "mountPoints": [
                {
                    "sourceVolume": "logs4edge",
                    "containerPath": "/var/log",
                    "readOnly": false
                }
            ],
            "volumesFrom": [],
            "logConfiguration": {
                "logDriver": "awslogs",
                "options": {
                    "awslogs-create-group": "true",
                    "awslogs-group": "/ecs/cribl-leader-plus-edge",
                    "awslogs-region": "us-west-2",
                    "awslogs-stream-prefix": "ecs"
                }
            }
        },
        {
            "name": "cribl-edge",
            "image": "cribl/cribl:latest",
            "cpu": 0,
            "portMappings": [],
            "essential": true,
            "environment": [
                {
                    "name": "CRIBL_EDGE",
                    "value": "1"
                },
                {
                    "name": "CRIBL_DIST_MODE",
                    "value": "managed-edge"
                },
                {
                    "name": "CRIBL_DIST_MASTER_URL",
                    "value": "tcp://cribledge@localhost:4200"
                }
            ],
            "mountPoints": [
                {
                    "sourceVolume": "logs4edge",
                    "containerPath": "/opt/logs4edge",
                    "readOnly": true
                }
            ],
            "volumesFrom": [],
            "logConfiguration": {
                "logDriver": "awslogs",
                "options": {
                    "awslogs-create-group": "true",
                    "awslogs-group": "/ecs/cribl-leader-plus-edge",
                    "awslogs-region": "us-west-2",
                    "awslogs-stream-prefix": "ecs"
```

```
                }
            }
        }
    ],
    "volumes": [
        {
            "name": "logs4edge

            ",
            "host": {}
        }
    ],
   ... truncated ...
}
```

14.2.4. Moogsoft/Webhook Integration

> Written for Cribl by Douglas Bothwell, formerly of Moogsoft.

You can configure Cribl Stream to send Webhook notifications to Moogsoft, using custom integrations. A custom integration is a user-defined Moogsoft endpoint that ingests JSON payloads, and converts them to Moogsoft events or metrics.

Note these options:

- A Moogsoft custom integration can ingest either events or metrics. Each custom integration has its own separate API key, and its own Cribl-to-Moogsoft mappings.
- There is no limit to the number of custom integrations you can create.
- The examples below illustrate simple event and metric mappings. You can define your own mappings for each endpoint, based on the data types and payloads you want to send. For details, see Moogsoft's Create Your Own Integration documentation.

Create the Moogsoft Custom Integration

Log into your Moogsoft SaaS instance as an Owner or Administrator, and then:

1. Choose **Data Config** > **Ingestion Services** > **Create Your Own Integration**.
2. Click **Add New Integration**.
3. Specify an integration endpoint and description.
4. Specify the data type to send to the endpoint: **Events** or **Metrics**.

The integration setup screen appears, with the URL and the API key for the new endpoint.

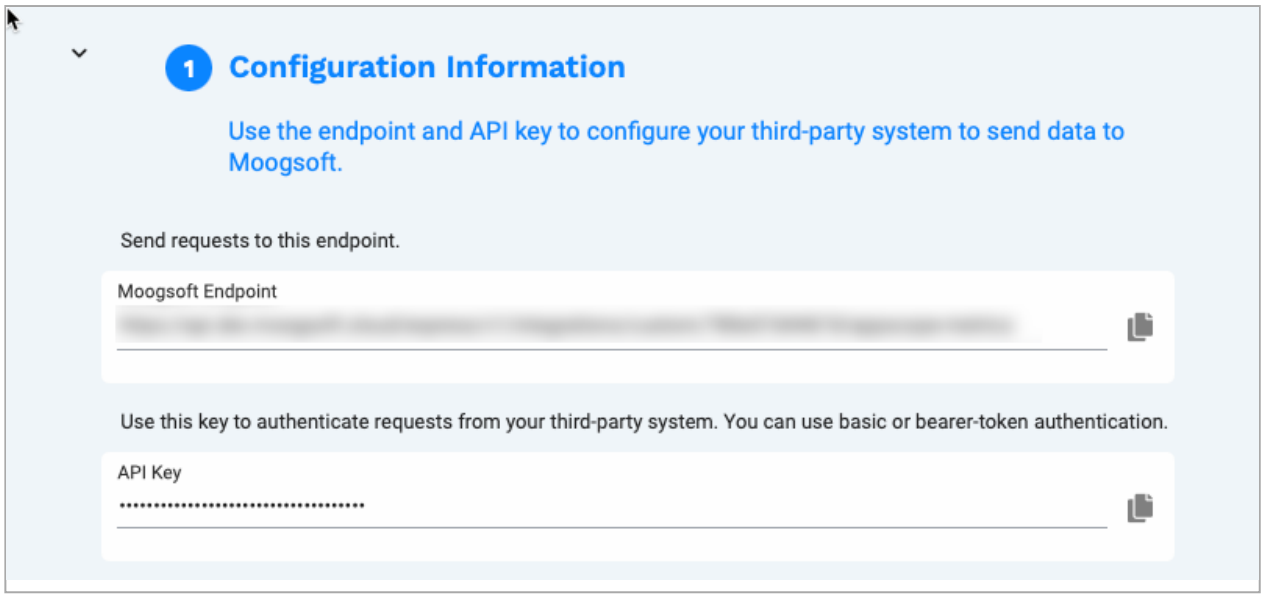

The Moogsoft integration setup screen

Configure the Webhook Destination

From a Cribl Stream instance's or Group's **Manage** submenu, select **Data** > **Destinations**, then select **Webhook** from the **Manage Destinations** page's tiles or left nav. Click **Add New** to open the **Webhook** > **New Destination** modal, and complete the following options and fields.

General Settings

URL: The URL for the new custom integration (copy this from the Moogsoft UI).

Method: `POST`.

Format: `Custom`.

Content type: `application/json`.

Advanced Settings

Extra HTTP Headers: Click **Add Header** to define this extra header:

NAME	VALUE
`apiKey`	The API key for the new custom integration (copy this from the Moogsoft UI).

Click **Save**, then **Commit** and **Deploy**. Now you are ready to map your events and/or metrics.

Mapping Cribl Data to Moogsoft

Your mappings will differ, depending on the data you want to send. However, the simple examples below, in which we map a Cribl Stream payload to a Moogsoft custom integration, illustrate principles that apply to all custom mappings:

- Moogsoft has a defined event schema and metric schema. Each schema includes a set of required fields. Your custom integration must include mappings for all required fields.
- You can define custom tags for Cribl Stream fields that do not have Moogsoft equivalents.
- You can also specify default values in case Cribl Stream sends an object with a missing field.
- The Moogsoft event schema includes a `severity` field. You can map Cribl Stream fields and values to Moogsoft severities, or define a default severity if a payload does not include this information.

Define and validate your mappings based on the type of data you plan to send to Moogsoft:

- Event Mapping
- Metric Mapping

Event Mapping

To illustrate how to map Cribl Stream payloads to Moogsoft events, we'll walk through an example with a payload of Cribl Stream syslog messages. You'll follow the same overall workflow for any events payload.

Send a Sample Payload to Moogsoft

In Cribl Stream, navigate to your Webhook Destination's configuration modal, click the **Test** tab, then:

1. In the **Test input** field, define one or more JSON payloads for the Cribl data you want to send. To map syslog events, set the **Select sample** drop-down to **syslog.log**.
2. Click **Test**.

Map the Event Fields

In Moogsoft, view the custom integration's config screen. Under **Map Your Data**, you should now see the payload you just sent.

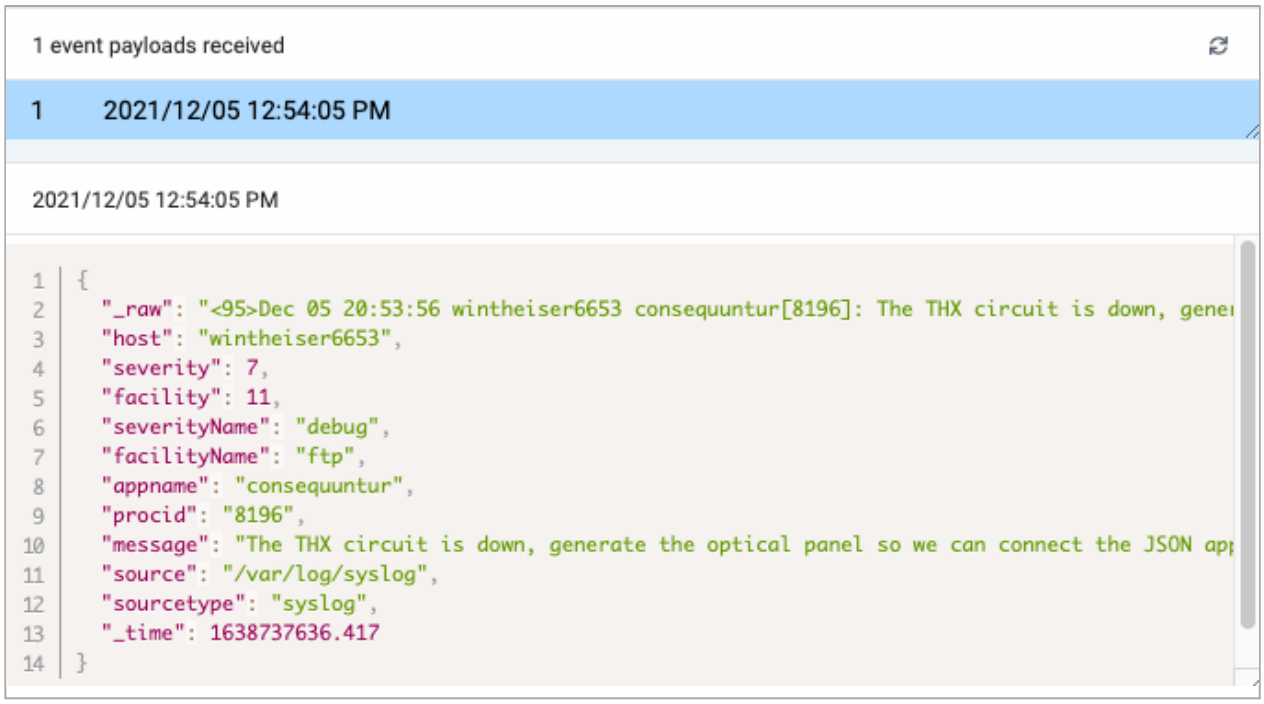

The event payload appears in Moogsoft

Select the payload, and then define your Cribl-to-Moogsoft mappings. Your Cribl Stream data will largely determine the mappings you want. See Events Object in the Moogsoft API docs.

Here are some reasonable mappings for the syslog payload in this example:

CRIBL SOURCE FIELD(S)	MOOGSOFT TARGET FIELD
`message`	`description`
`appname`	`service`
`facilityName`	`check`
`severity`, `severityName`	`severity`
`procid`	`tag.process-id`

Map the Severities

The Moogsoft event schema has a severity field. You can specify integers or strings, from `0`, meaning Clear, to `5`, meaning Critical. Here are some reasonable mappings.

SYSLOG SEVERITIES	MOOGSOFT SEVERITIES
Emergency (`0`), Alert (`1`), Critical (`2`)	Critical (`5`)

SYSLOG SEVERITIES	MOOGSOFT SEVERITIES
Error (3)	Major (4)
Warning (4)	Warning (2)
Informational (6), Debug (7)	Unknown (1)
Notice (5)	Clear (0)

Verify your Mappings

Once you save and apply your mappings in Moogsoft, do the following:

1. In Cribl Stream, return to the **Test** tab for the Webhook Destination. Click **Test** again to send another payload.
2. In Moogsoft, go to the **Alerts** screen. You should now see a new alert based on the payload you just sent.

Metric Mapping

To illustrate how to map Cribl Stream payloads to Moogsoft events, we'll walk through an example with a payload of Cribl Stream syslog messages. You'll follow the same overall workflow for any metrics payload.

Send a Sample Payload to Moogsoft

In Cribl Stream, navigate to your Webhook Destination's configuration modal, click the **Test** tab, then:

1. In the **Test input** field, define one or more JSON payloads for the Cribl data you want to send. To map syslog events, set the **Select sample** drop-down to **appscope-metrics.log**.
2. Click **Test**.

Map the Metrics Fields

In Moogsoft, view the custom integration's config screen. Under **Map Your Data**, you should now see the payload you just sent.

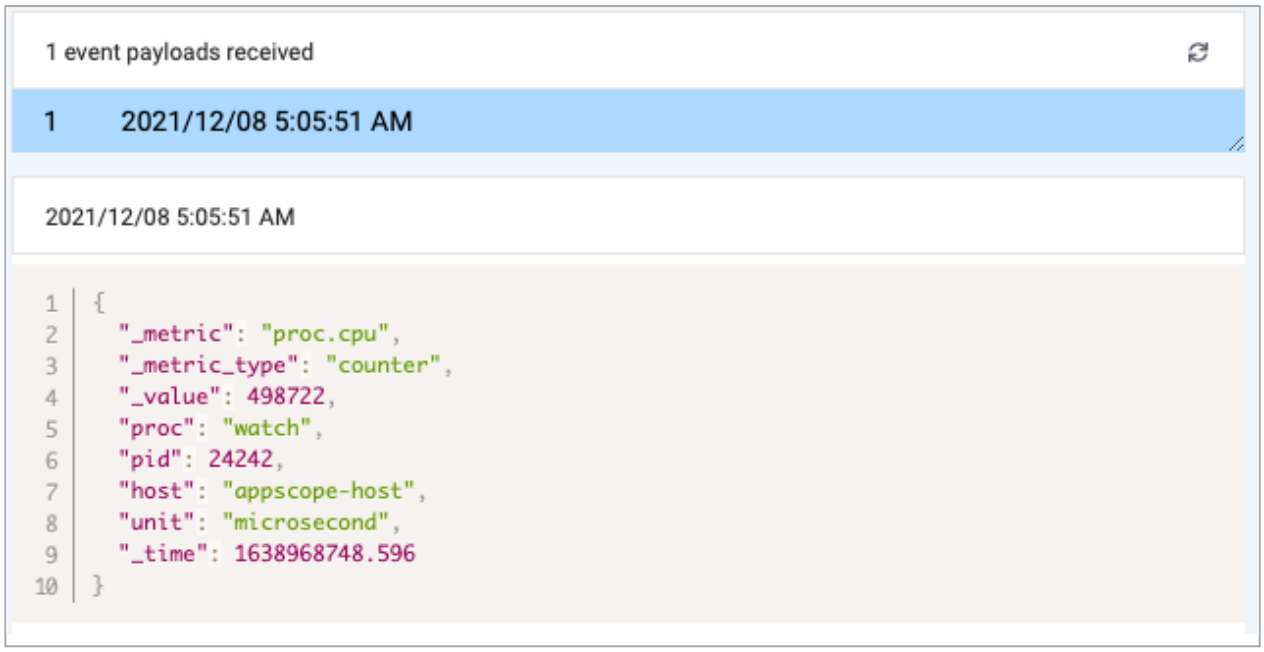

The metrics payload appears in Moogsoft

Select the payload and then define the Cribl-to-Moogsoft mappings you want. Your Cribl data will largely determine these mappings. See Metric Datum Object in the Moogsoft API docs.

Here are some reasonable mappings for the AppScope payload you just sent:

CRIBL SOURCE FIELDS	MOOGSOFT TARGET FIELD
`_metric`	`metric`
`_value`	`data`
`host`	`source`
`unit`	`tag.unit`
`pid`	`tag.pid`

Verify Your Mappings

After you save and apply your mappings in Moogsoft, test them like this:

1. In Cribl Stream, return to the Webhook Destination's **Test** tab. Click **Test** again to send another payload.
2. In Moogsoft, go to the **Metrics** screen. You should now see a new alert, based on the payload you just sent.

14.2.5. Nightfall Integration

> Thanks to Nightfall for contributing this page and the corresponding Nightfall Pack, which you can install in Cribl Stream and customize as described below.

The Nightfall Pack relies on Nightfall's Data Loss Prevention (DLP) engine, which uses machine learning to detect sensitive information in events streamed through Cribl. The Pack enables you to monitor your Pipelines in real time for PII, PHI, PCI, and other sensitive data. Nightfall discovers and automatically redacts the sensitive content before it can reach any Destination. Aside from redaction, you can use the Pack to automatically label problematic event data.

The risk of sensitive data spreading across data pipelines grows as organizations work with data from more sources. Nightfall can help ensure that sensitive data doesn't accumulate in the first place, facilitating compliance with data-security regulations. This is important for Cloud-first organizations that must scale observability while complying with regional or industry-specific compliance regimes.

Configuring the Detection Engine

1. Sign up for a free Nightfall Developer Platform account, if you have not already done so. This entitles you to scan up to 3GB of event data per month for free.

2. Log in to the Nightfall Dashboard.

3. Create an API Key.

4. Create the Detection Rules and/or Policy that you want Nightfall to scan with.

   Detection Rules enable you to specify which Detectors will scan each event. A Detection Rule simply redacts sensitive information from events.

   A **Policy** governs alerts, which Nightfall can send via email, Slack, or webhook. (Assuming that you want to send data to a Cribl Stream Destination and/or a SIEM, use a webhook.) A Policy can include up to 20 previously defined Detection Rules. It can also turn redaction off, if desired.

Installing the Nightfall Pack

1. From Cribl Stream's top nav, select **Processing** > **Packs**.

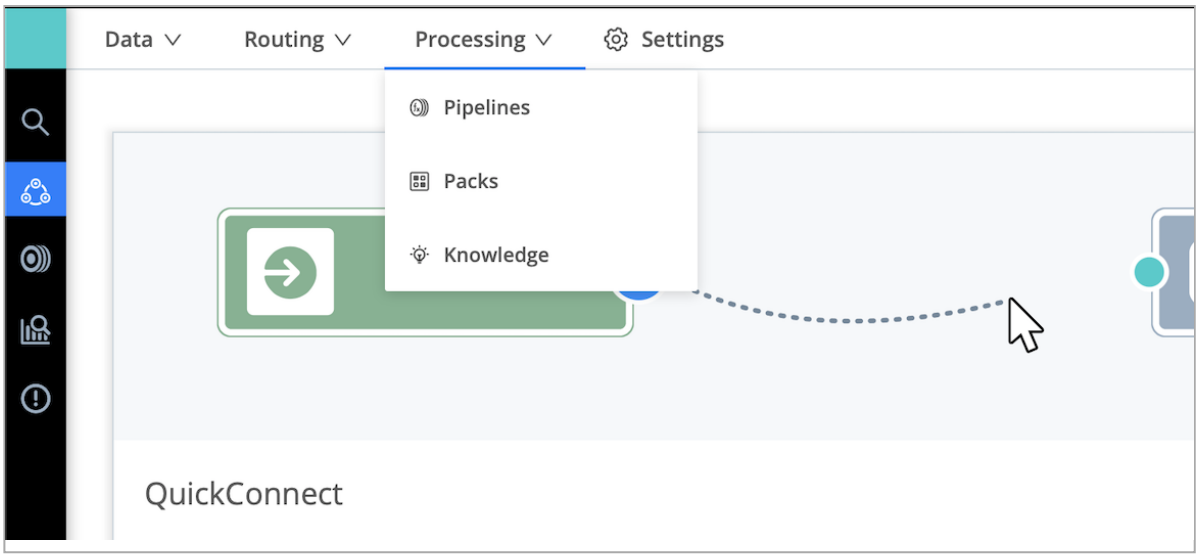

Selecting Packs

2. Click **Add Pack**, then select **Add from Dispensary** to open the Packs Dispensary drawer.

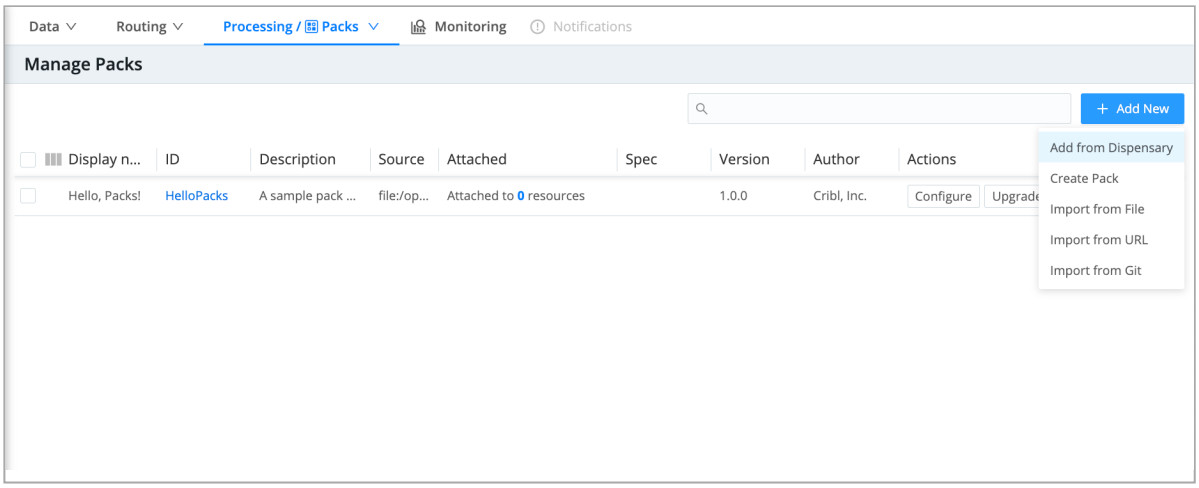

Adding a new Pack from the Dispensary

3. Navigate to the **DLP by Nighfall AI** Pack's tile.

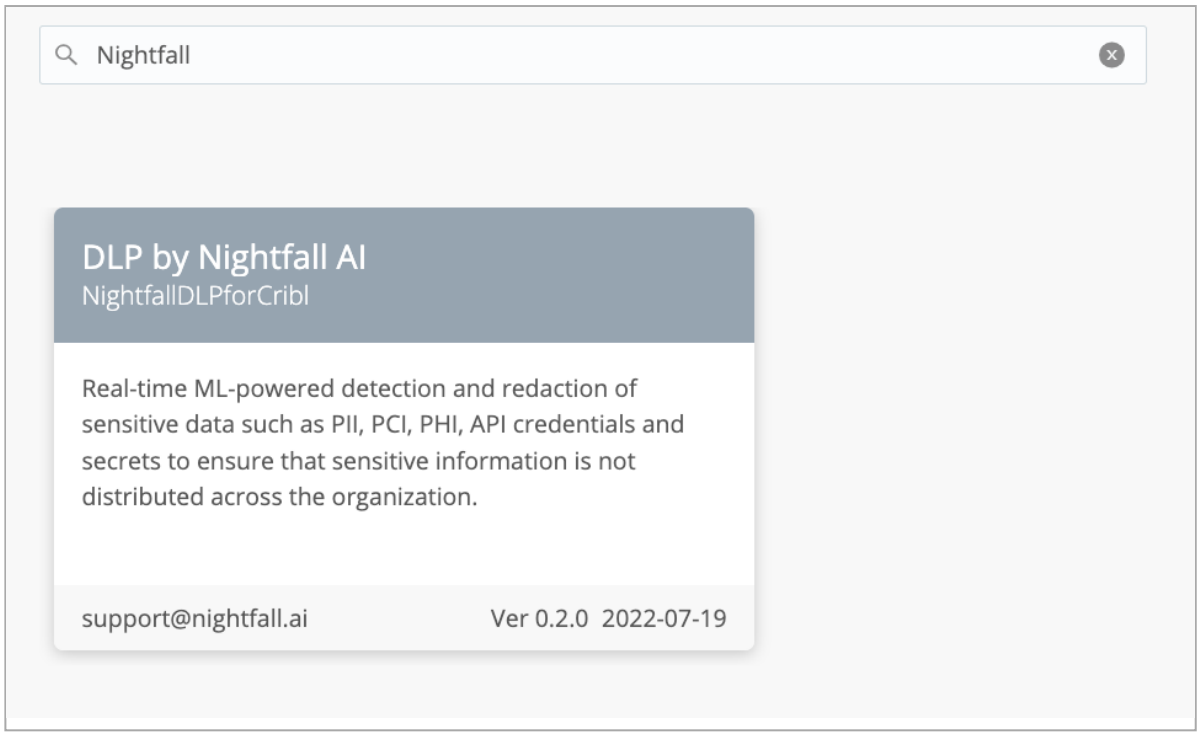

Locating the Nightfall Pack

4. Click the Nightfall Pack's tile to display its details page.

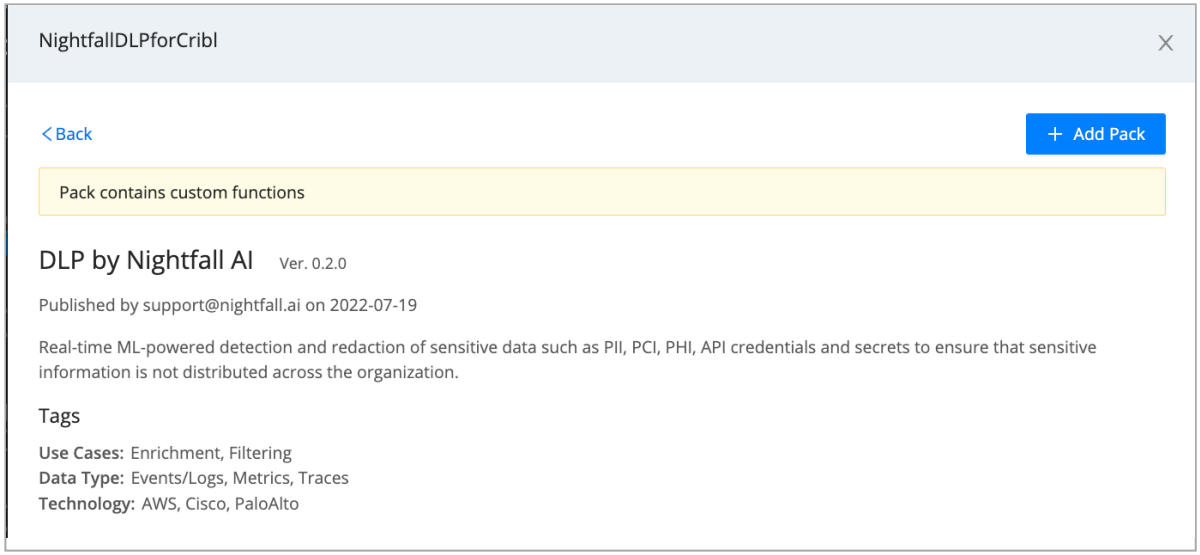

The Nightfall Pack details page

5. Click **Add Pack**. Shortly, you'll see a banner confirming that the Pack is installed.

Configuring the Nightfall Pack

1. From the **Manage Packs** page, click the new Pack. This opens the Pack's **Routes** tab.

2. In the **Pipeline** column, click `Nightfall`.

3. From the resulting Nightfall Pipeline configuration, expand the **DLP Scanner with Nightfall AI** Function.

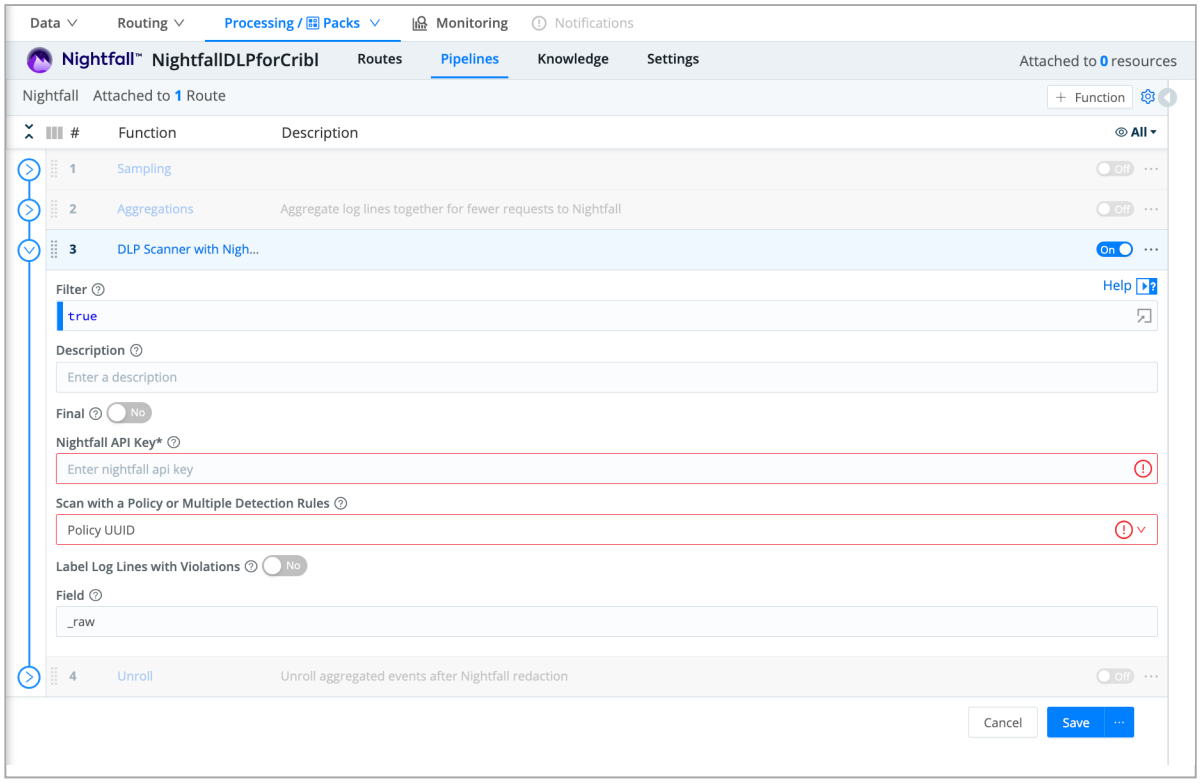

Selecting the Nightfall Pipeline

4. In the **Nightfall API Key** field, enter the API key you created in the Nightfall Dashboard.

5. Set the **Scan with a Policy or Multiple Detection Rules** drop-down to match your detection engine configuration.

   Selecting **Policy UUID** exposes a corresponding field to enter the single UUID.

   Selecting **Detection Rule UUID** exposes a **Add Rule**. Click this to enter as many Detection Rule UUIDs as you want to specify.

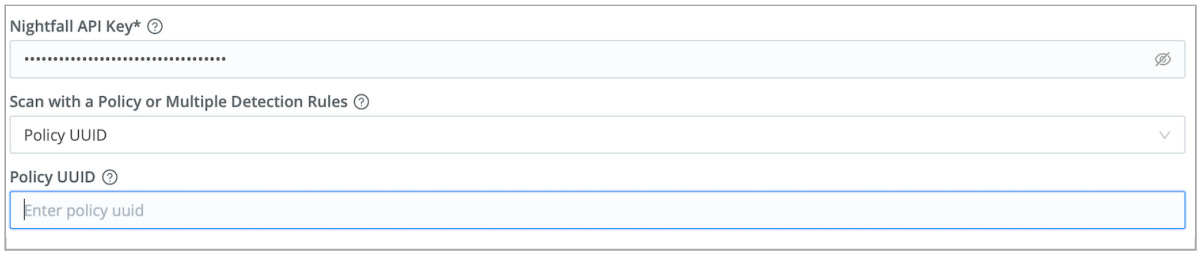

Scanning with a Policy

6. (Optionally:) Label sensitive events. If you toggle **Label Log Lines with nightfall_violations** to `Yes`, each event where Nightfall has detected sensitive information will have an added `nightfall_violations: true` field.

Advanced Features

The Nightfall Pipeline also includes three limiting Functions, described here. These are disabled by default, but you can enable them as needed.

Sampling

To reduce the data usage that's billed against your Nightfall plan, you can enable the Sampling Function. This way, Nightfall will scan only a subset of each streamed file, instead of every event.

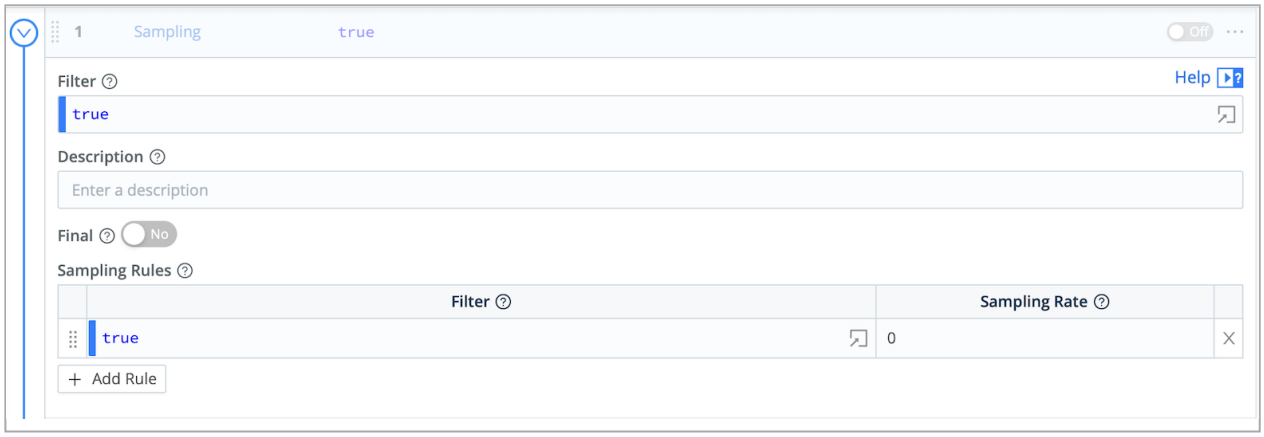

Disabled steps

Log Batching

To reduce the number of requests that Cribl Stream makes to the Nightfall API, you can enable log batching. To do so, enable both the Aggregations and Unroll Functions, then configure the Aggregation Function's **Time window**.

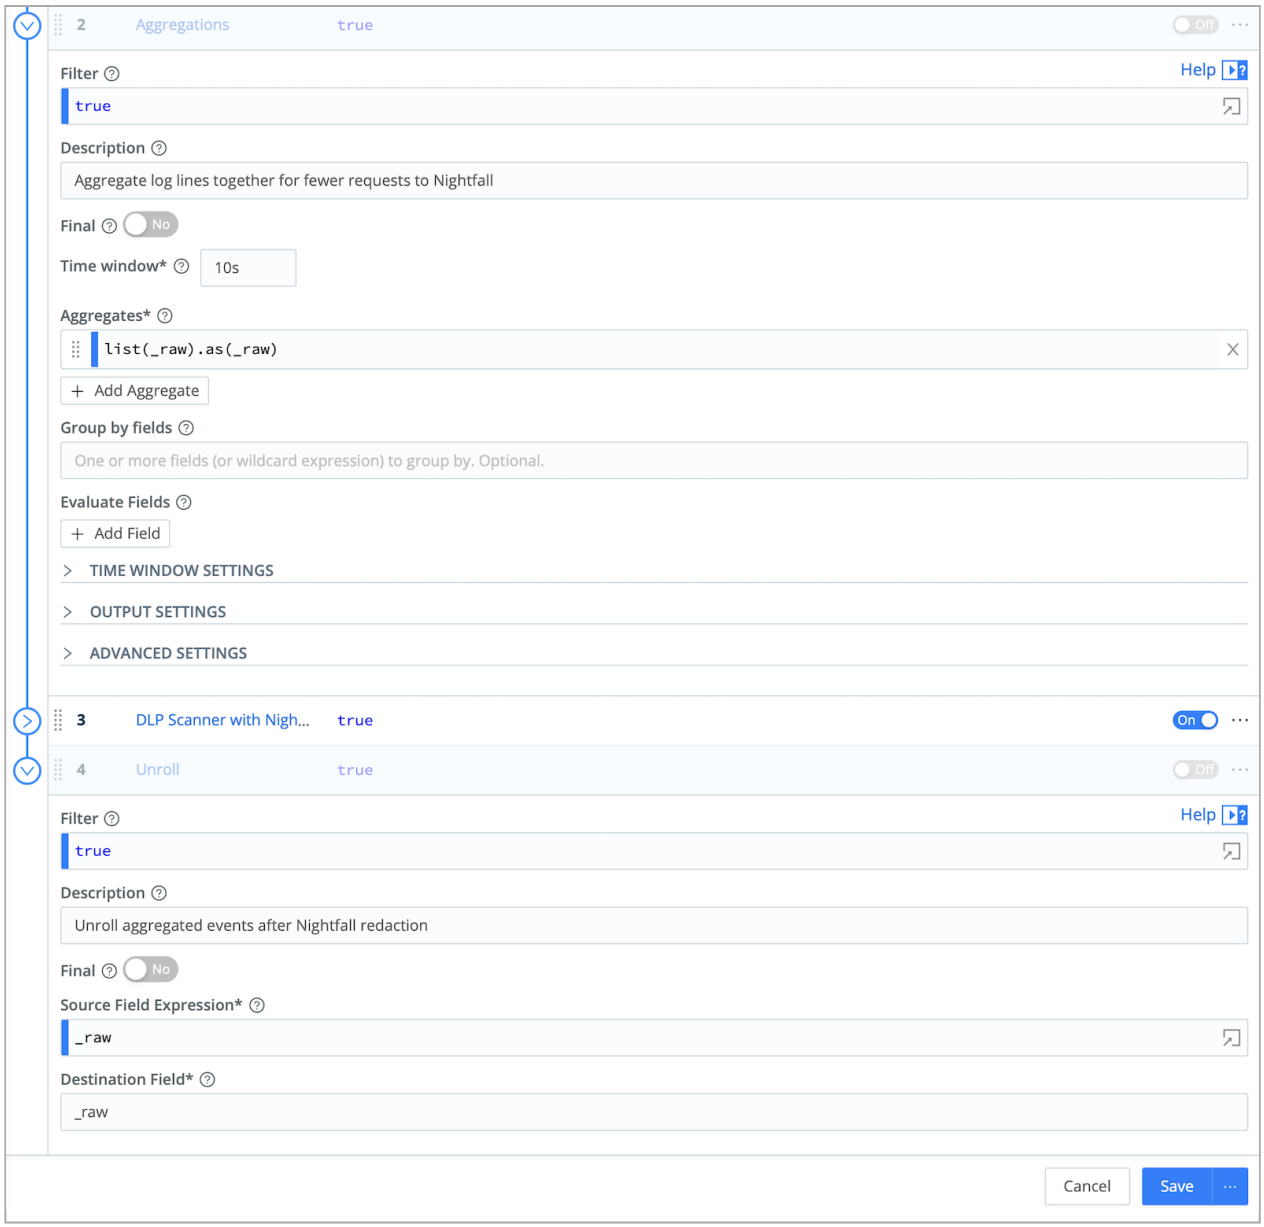

Enabling log batching

The Nightfall DLP plugin will automatically detect the aggregations, and unroll the batches, only after Cribl Stream sends them to the Detection Engine. Then, Nightfall will process each event separately, as it normally does.

14.2.6. Managing QRadar Licenses

If you're using a SIEM (security information and event management) system like QRadar that's subject to an events-per-second (EPS) licensing model, managing license costs can be an issue. Cribl Stream enables you to proactively manage your license by slowing EPS growth.

Cribl Stream does so by offering fine-grained control over what events to send to the QRadar Event Processor, without breaking the expected LEEF (Log Event Extended Format) data format. You can report on event codes, and make decisions about what to drop, based on the data in the events. Some of what we discuss here also applies to SIEMs generally, not just QRadar.

Confronting QRadar Constraints

QRadar imposes constraints on data through several of its components:

- QRadar Event Collectors can send data only to QRadar. Elastic and other systems of retention or analysis are not an option.
- QRadar Event Collectors can send data only in LEEF format. The pipeline cannot provide additional streams of data in different formats such as JSON or syslog.
- Incoming data must adhere to a predefined schema, based on IBM's LEEF format. You can't reformat events, nor reduce the size of an event, without breaking the correlation rules within the QRadar Event Processor.
- When incoming data exceeds the EPS license limits, QRadar will drop or stop ingesting data. Meanwhile, since the license is based on EPS event velocity, license costs increase linearly: the higher the EPS count, the higher the cost.

If your event velocity approaches the license limit, your options are unappealing:

- You can try to exclude some data, but the correlation rules and constraints on data formatting restrict your ability to be selective. You can drop only broad categories of data, such as an entire Windows Event ID, leaving you at a risk of missing something important.
- You can hope that you never actually exceed the EPS limit, but if you guess wrong, QRadar dropping or not ingesting data can be disruptive and compromise your enterprise security posture.

Cribl Stream enables you to surgically minimize these risks, and get the most out of your existing licenses.

Dropping Events Selectively

A common tactic to avoid exceeding an EPS license limit is to start dropping an entire class of events. This is a crude approach that carries its own risks. With Cribl Stream, you can analyze the data within the event, and decide what to keep based on your priorities.

Analyzing a Windows Event

Here's an example of how to analyze and selectively drop Windows Security Event ID 4674. This event documents operations attempted on a privileged object. While it's commonly discarded when admins are feeling pressed to drop events, 4674 is actually a critical ID that should be kept some, or most, of the time.

Event ID 4674 includes the logon types shown in the table below.

LOGON TYPE	LOGON TITLE	DESCRIPTION
2	`Interactive`	Activity on the system's keyboard and screen.
3	`Network`	Connection to a shared folder on this computer from elsewhere on the network.
4	`Batch`	Processes might be executing on behalf of a user without their direct intervention.
5	`Service`	Service startup by the Service Control Manager.
7	`Unlock`	An unattended workstation with password-protected screen saver.
8	`NetworkCleartext`	Logon with credentials sent in cleartext. Most often indicates a logon to IIS with “basic authentication”.
9	`RemoteInteractive`	Logon with RunAs, or mapping a network drive with alternate credentials.
10	`CachedInteractive`	Logon with cached domain credentials, such as when logging on to a laptop when away from the network.

Each logon type is assigned a different security value.

Let's suppose that your QRadar deployment is in an enterprise where inbound file sharing is disabled. In that case, you don't need logon type 3 events. So let's see how to use Cribl Stream to keep all ID 4674 events except logon type 3 events, which we'll' drop.

Dropping the Excess Baggage

> Use sample data to validate the reduction methods described below. Only when you are sure they

won't interfere with your system's usability should you apply these methods to your production SIEM.

1. Save your Windows Events to Cribl Stream using Live Capture.

2. Create a Pipeline and name it `Windows_Event_Reduction`.

3. Add the Regex Extract Function to your Pipeline to create fields for `EventCode` and `Logon Type`. These fields will be the foundation for a Filter that drops only Windows events of ID 4674, logon type 3.

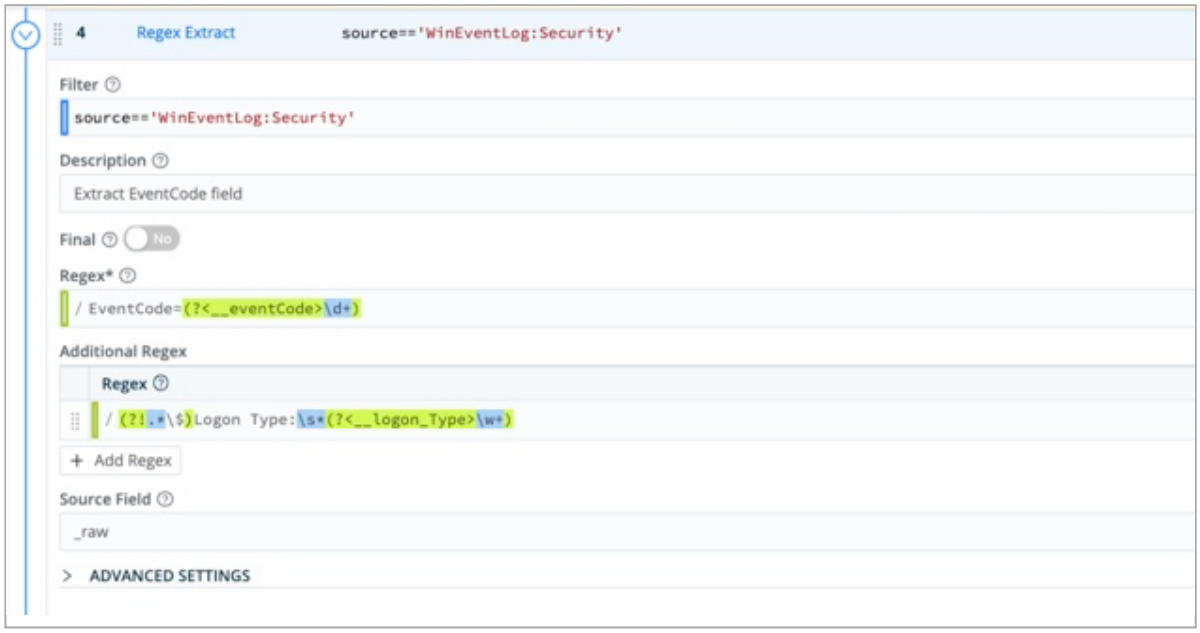

Regex Function on Pipeline

4. Add the Drop Function to your Pipeline using the Filter below.

```
index=='endpoint' && source=='WinEventLog:Security' && __eventCode=='4624' &&
__logon_Type=='3'
```

Drop Function

5. Apply the Pipeline to your Windows Sources. Cribl Stream will then start dropping the unneeded events.

Other Reduction Examples

> Apply the options in this section only after careful analysis of your own environment and priorities. Even if you choose to exclude these events from QRadar, you might want to send them to an object store for later auditing and/or replay.

WinEvents

- Event ID 4624: Look for Subtypes (Logon Type) that can be dropped.
- Event ID's 4634 and 4674: An account was logged off. Most security use cases don't require Logoff events.
- Event ID 4673: A privileged service was called. This event rarely contains actionable intel. It's a large-volume data source that can be dropped, in exchange for other, more-valuable event IDs.
- Event ID 4674: An operation was attempted on a privileged object. Similar to Event ID 4673, this event is largely considered "noise," providing little value. Consider dropping.
- Event ID 4689: A process was exited. This source, when paired with Event ID 4688, can tell you "how long a process was running." Typically, this is unimportant information, and can be omitted from your event collection.

Palo Alto

The following filters can be helpful to reduce the noise:

- All external-to-internal traffic AND `action=deny`: `Ingress traffic && action=deny`
- `PAN Traffic logs && application=ping|ibm-bigfix|outlook-web-online|google-base|traceroute|ms-teams|ic mp|outlook-web-online|ms-office365-base|crowdstrike`

Cisco ASA

- All external-to-internal traffic AND `action=deny`: `Ingress traffic && action=deny`
- Teardown UDP Connection && Event ID 302016
- Teardown TCP connection && Event ID 302014
- Teardown ICMP connection && Event ID 302021
- Teardown Translation && Event ID 305010|305012

14.2.7. Splunk to Elasticsearch

To route data from existing Splunk infrastructure to Elasticsearch services, you might face a daunting task: re-architecting your entire forwarding tier. This could require retooling lots of servers – up to hundreds, or thousands – to uninstall their Splunk forwarders, and swap in Elastic-compatible agents.

Cribl Stream can reduce this effort to just a few hours: Configure one Splunk `outputs.conf` stanza to output to Cribl Stream, and propagate that across all your Splunk servers. Done!

Next, you can easily configure Cribl Stream to listen for Splunk data on one port, and to route that data to all the Elasticsearch destinations you want to feed.

Transforming Data from Splunk to Elastic Format

Also, in Cribl Stream's core, you can easily design a Pipeline that modifies the original Splunk event into Elastic's Common Schema – making it look exactly like an event generated by an Elastic agent.
These transformations help you make the most of Elastic's offerings, like Filebeats, etc.

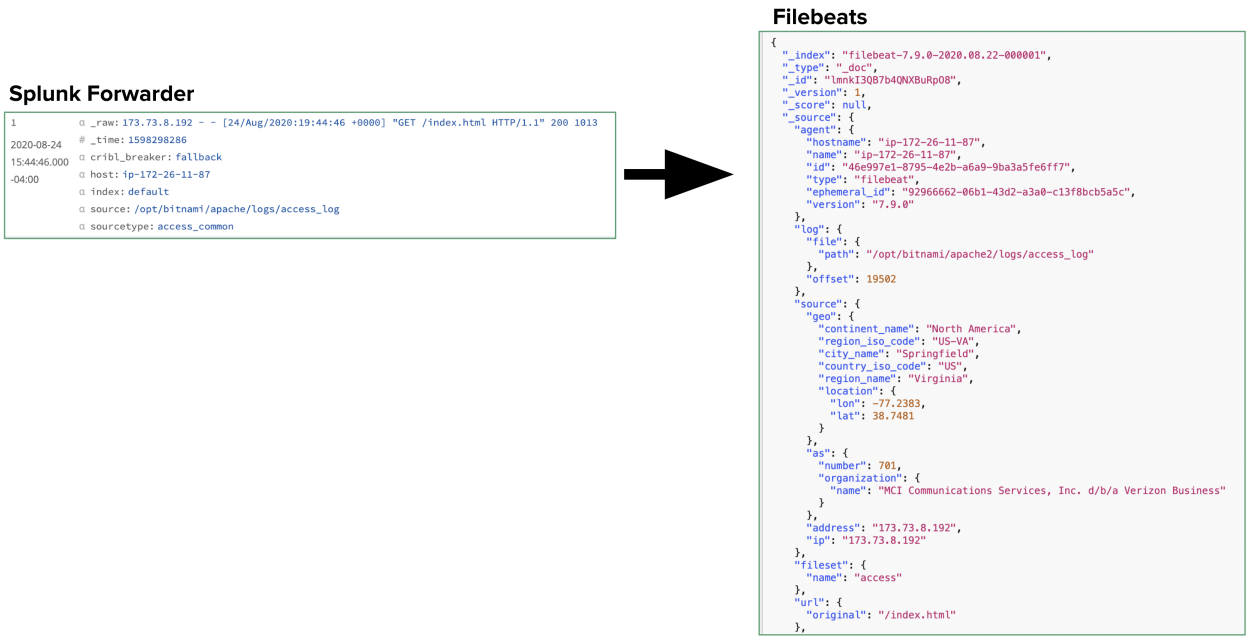

Transforming to Elastic Common Schema

Some of the Cribl Stream Functions useful in transforming Splunk-generated events into Elastic's format are:

- Regex Extract: Extract a portion of the raw event, and place it into a specified field.
- Lookup: key off the host IP to add fields like `hostname`, `name`, `id`, and `type`.

- Eval: Turn key-value pairs into nested JSON objects.
- GeoIP: Correlate source IP to a geographic database.

We'll show all four in our example Pipeline below, although you might need only a subset.

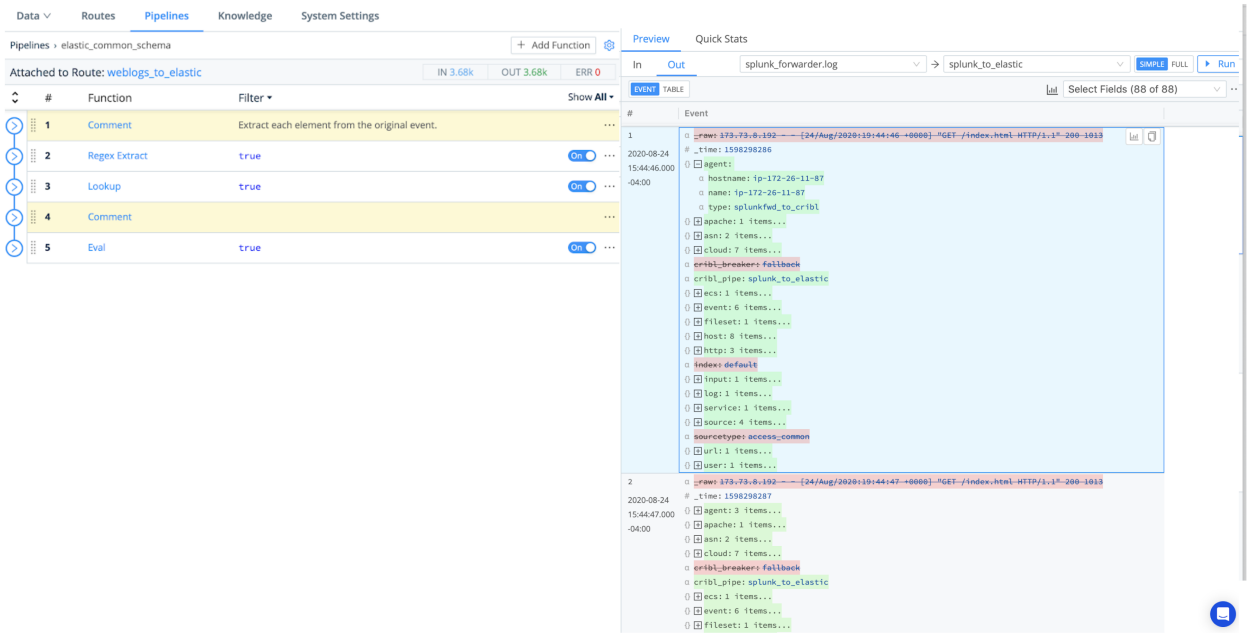

Cribl Stream Pipeline and Data Preview

Goat Rid of Some Guesswork

Cribl Stream will offer you further time savings as you configure the internal data transformation. Cribl Stream's Data Preview features enable you to test transformations' results as you build your Pipeline, before you commit or run it.

This eliminates blind guesswork in Splunk configuration files to specify source -> index transformations, check the results, and then start all over again. In particular, Cribl Stream's Regex Extract Function provides a regex101-like UI, to facilitate precisely designing and debugging your regex expressions.

Let's goat started on the example.

Configure Splunk Forwarder

First, in a Splunk App, configure a Splunk forwarder (UF or HF) to specify your Cribl Workers as destinations. Use outputs.conf stanzas of this form:

```
[tcpout]
disabled = false
defaultGroup = cribl, <optional_clone_target_group>,

[tcpout:cribl]
server = [<cribl_ip>|<cribl_host>]:<port>, [<cribl_ip>|<cribl_host>]:<port>, ...
sendCookedData=true
```

Push the app using the deployment server.

Configure Splunk Source in Cribl Stream

Next, in Cribl Stream, configure a Splunk Source. The key requirement here is to set the **Port** to listen on. (Optionally, you can also configure TLS, Event Breakers, metadata fields, and/or a pre-processing Pipeline.)

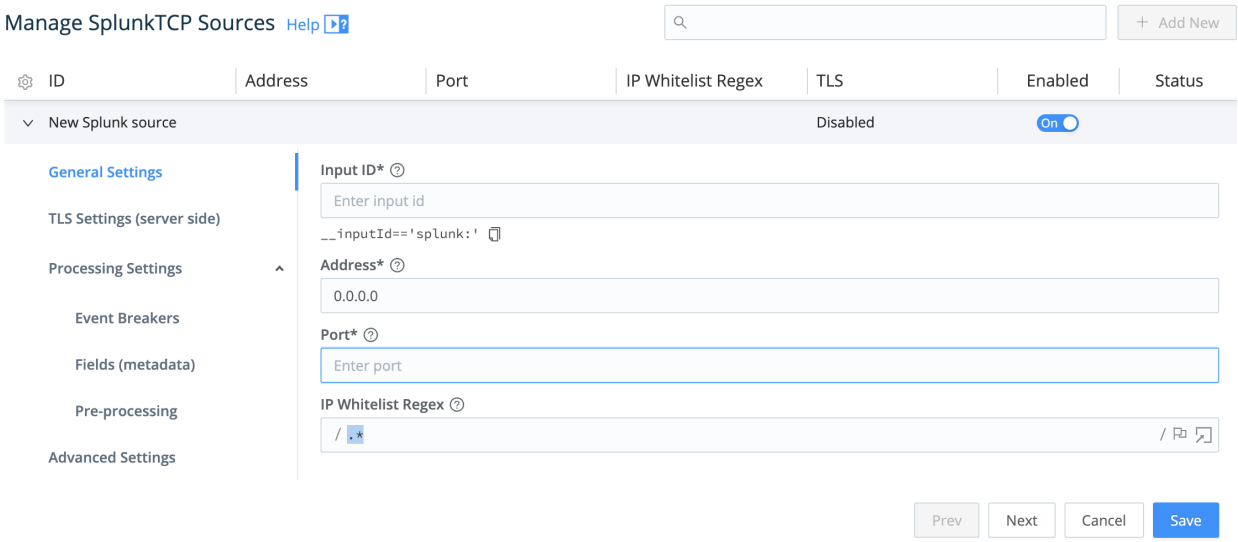

Splunk Source configuration

Configure Elasticsearch Destination

To configure Cribl Stream's output, set up an Elasticsearch Destination by specifying the **Bulk API URL** and **Index**.

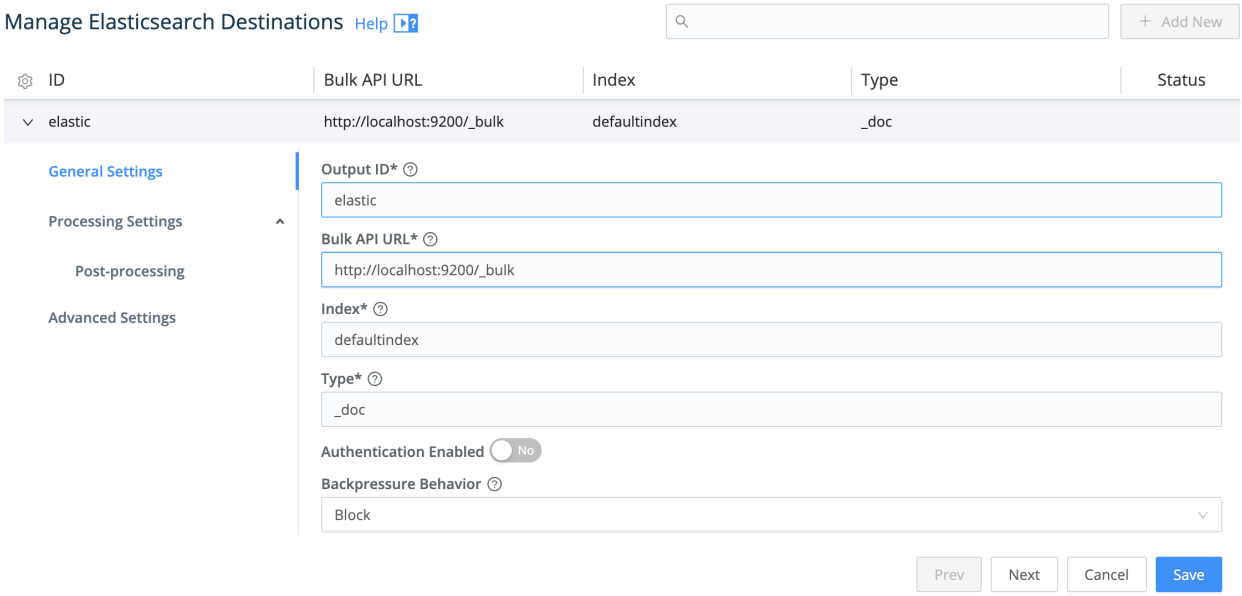

Elasticsearch Destination configuration

Configure Pipeline

Next, this section shows several Functions that you can assemble into a Pipeline to transform incoming Splunk events to match the Elastic Common Schema.

Regex Extract Function

First, use a Regex Extract Function to break the Splunk events into fields. Try the sample configuration shown below:

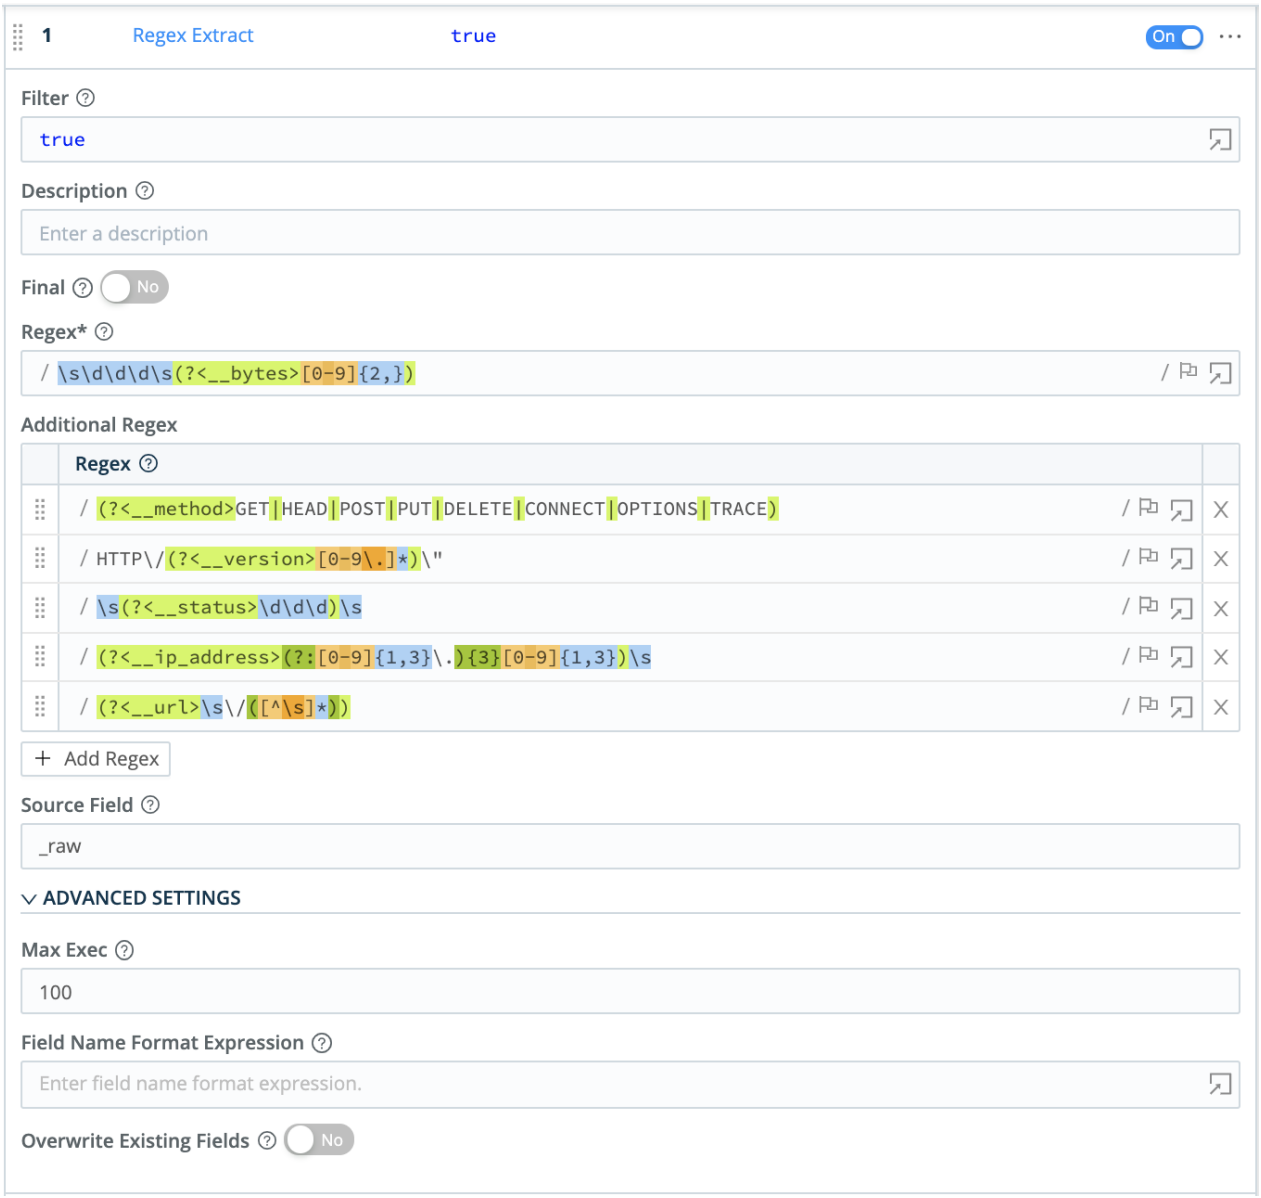

Regex Extract Function

Here are the six rows of regex in this example:

Regex; Additional Regex

`/\s\d\d\d\s(?<__bytes>[0-9]{2,})/`
`/(?<__method>GET|HEAD|POST|PUT|DELETE|CONNECT|OPTIONS|TRACE)/`
`/HTTP\/(?<__version>[0-9\.]*)\"/`
`/\s(?<__status>\d\d\d)\s/`
`/(?<__ip_address>(?:[0-9]{1,3}\.){3}[0-9]{1,3})\s/`
`/(?<__url>\s\/([^\s]*))/`

As you refine your expression, capture a sample of incoming Splunk data to test your regex's results in Cribl Stream's right Preview pane.

Lookup Function

In this example, we next add a Lookup Function, to translate HTTP error codes to readable text. Note this Function's optional **Reload Period** field, in which you can define a reload interval for a lookup file whose contents refresh frequently.

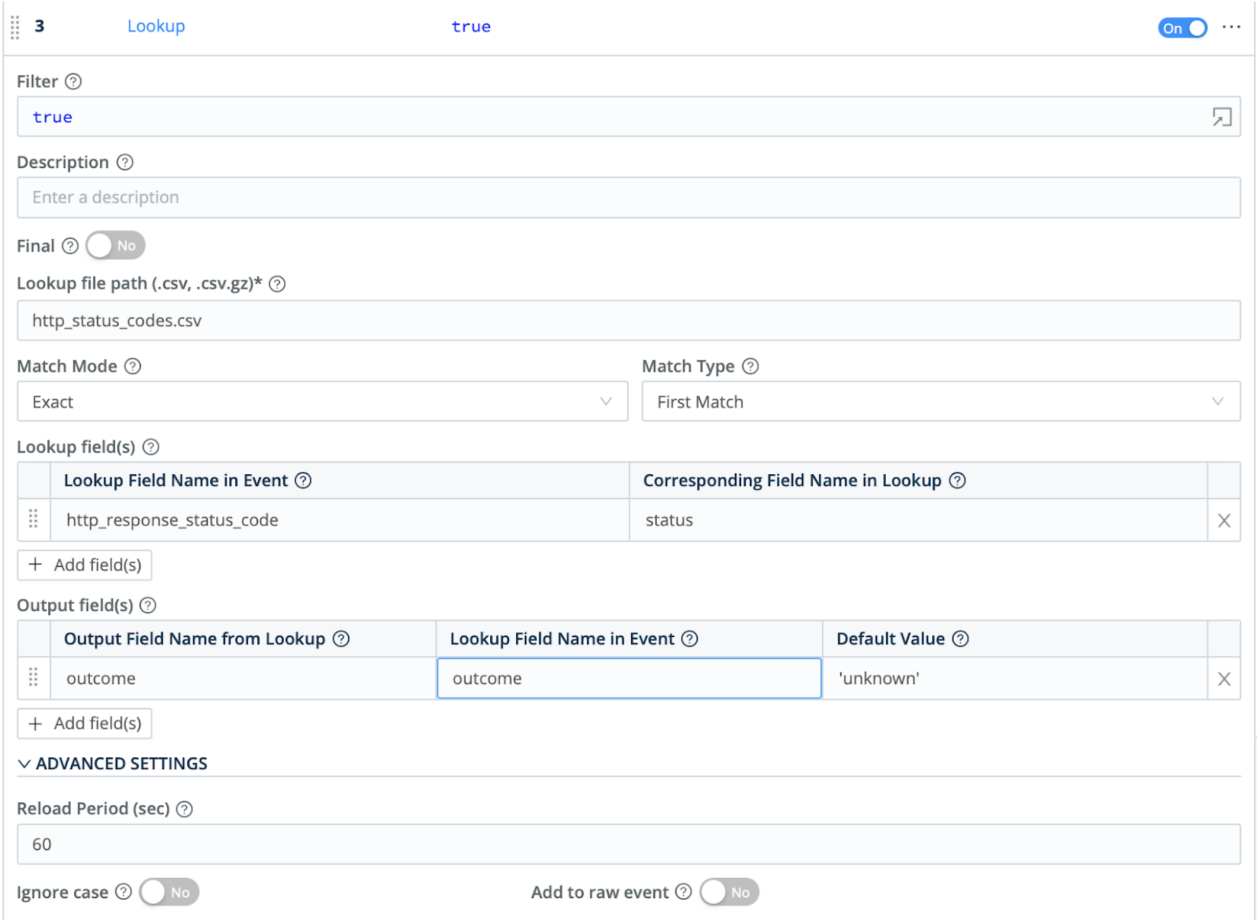

GeoIP Function

To enrich the Splunk data, we next use a GeoIP Function. This a specialized lookup against a database of IP addresses by geographic location. This Function's output can provide Elasticsearch with `location` fields like `lat` and `long`.

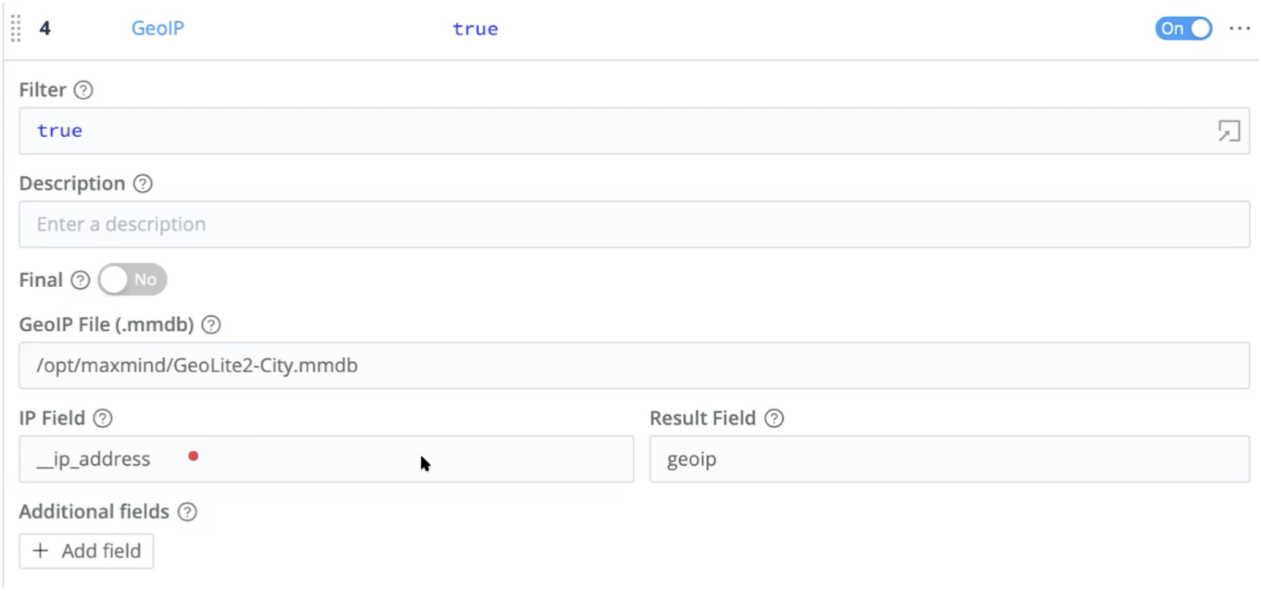

GeoIP specialized lookup

Eval Function

Finally, to further enrich the outbound events, the Pipeline uses an Eval Function. This adds multiple key-value pairs that define and populate fields conforming to the Elastic Common Schema.

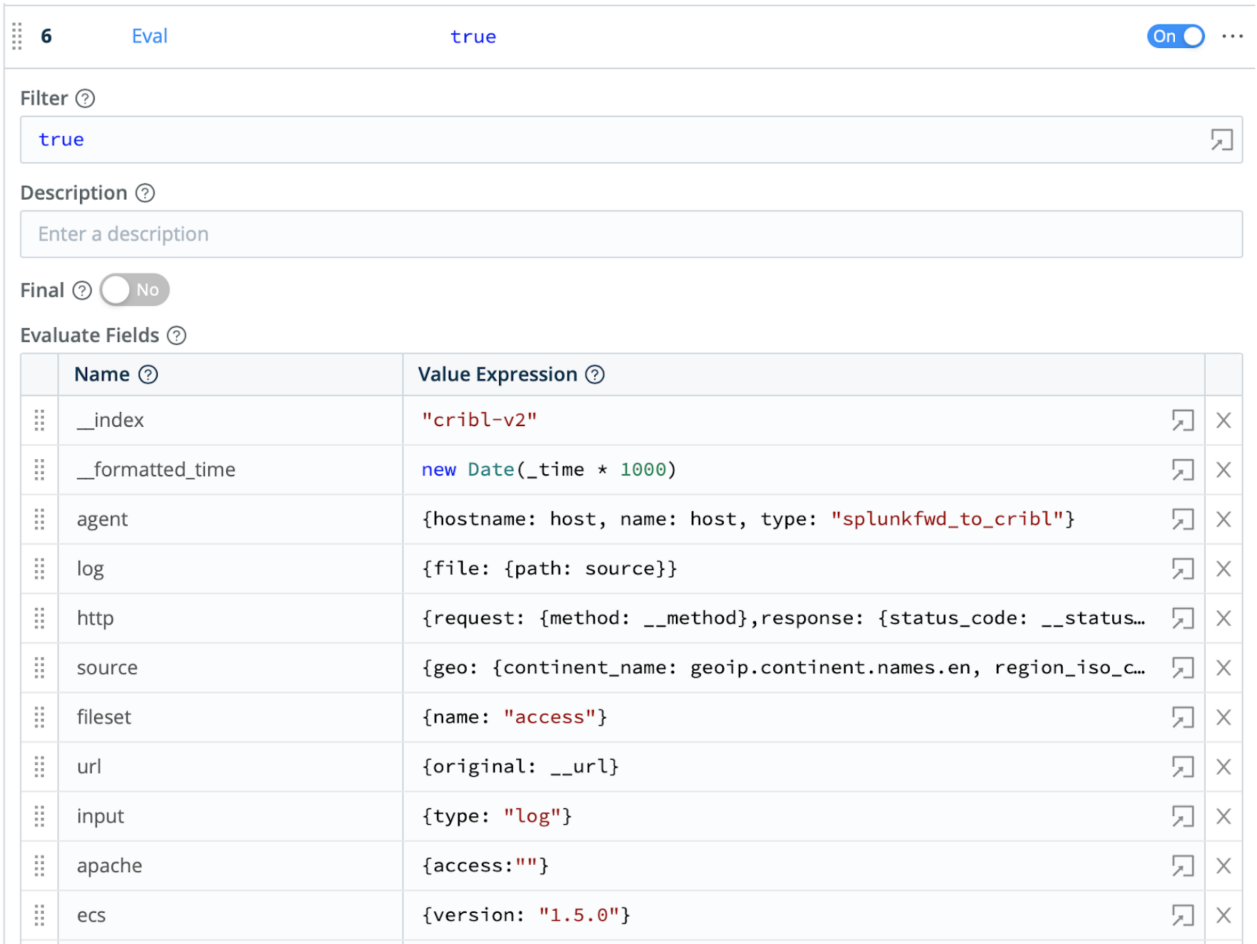

Results

After attaching your Pipeline to a Route, here's an an exported event, all happy in Elasticsearch with nested JSON.

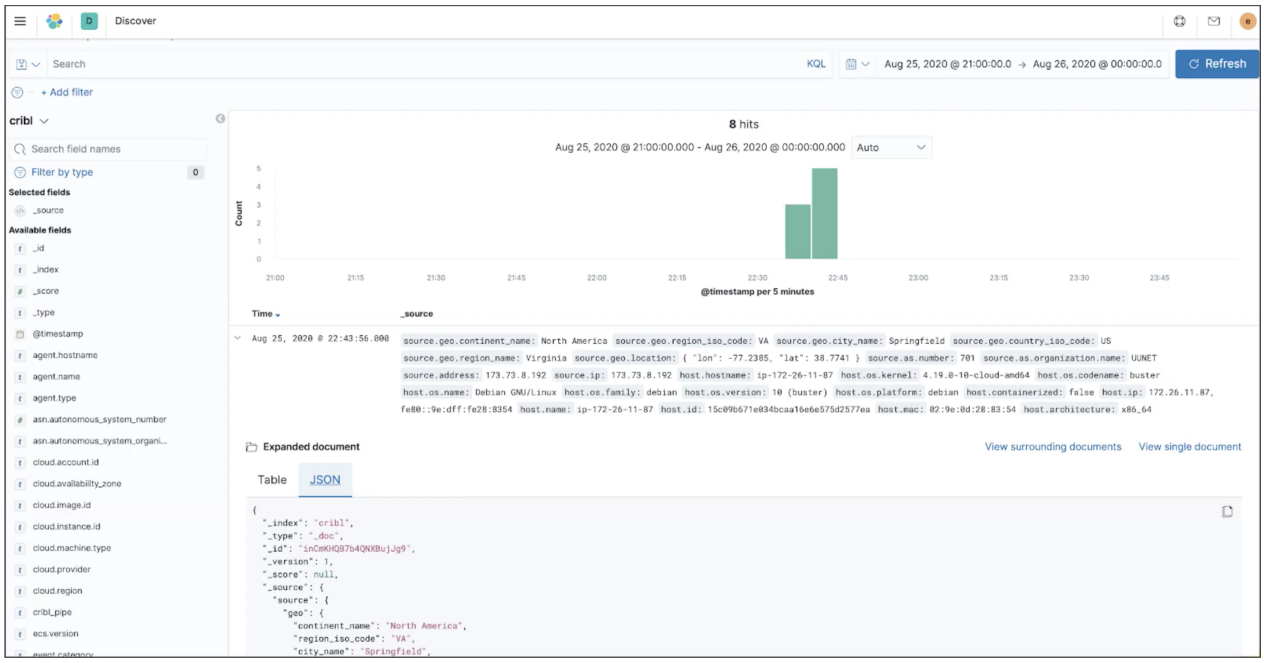

Event as exported to Elasticsearch

For More Info

For additional details on configuring Splunk forwarders for Cribl Stream, see this related documentation:

- Configuring a Splunk (TCP) Forwarder
- Configuring Cribl App for Splunk on an HF

14.2.8. Splunk to Exabeam

In many organizations, the IT department uses a tool like Splunk for operational logging, while the Security team relies on Exabeam to prevent insider threats. These tools use separate agents to access the same data, leading to some data-sharing conundrums:

- Installing the Exabeam agent in parallel with Splunk would duplicate the data.
- Some servers, like domain controllers, allow only a single agent. In this case, you can't feed two platforms with the same data.
- Querying Splunk for the data would introduce extra latency and overhead costs.
- Forwarding data directly from Splunk Universal Forwarders (UFs) is a nonstarter. Classic logs from Splunk UFs embed newlines and special characters, which break Exabeam's parser.

Cribl Stream can help you unblock these issues: Ingest data directly into Cribl Stream from Splunk UFs running on the domain controller, and transform the events in Stream before routing them to Exabeam.

> While this example is written around a Splunk-to-Exabeam scenario, you can use the same general techniques to connect and transform data between several other upstream and downstream services.

Transforming Data from Splunk to Exabeam's Format

In Cribl Stream's core, you can easily design a Pipeline that modifies the original Splunk event to fit the format that Exabeam expects. Some Cribl Stream Functions useful for this transformation are:

- Serialize: Remove all of the newlines and spaces, and then transform the data into `JSON` format.
- Mask: Remove the special characters, and replace them with space.
- Eval: Create a new field called `Message`, and remove everything else using the **Remove Fields** option.

In this guide, we'll show you how to:

1. Capture sample logs.
2. Apply the Functions (outlined above) to transform the sample log into Exabeam's expected format.
3. Validate your fields with Exabeam Parsers.
4. Stream your event to Exabeam to test the entire sequence.

Capture Sample Logs

Start with sample logs of the event data you plan to work with. In our example, we'll copy and paste the log sample straight into Cribl Stream.

Once you've pasted the log sample, enter a unique **File Name** on the modal's left side, then click **Save as Sample File** at right.

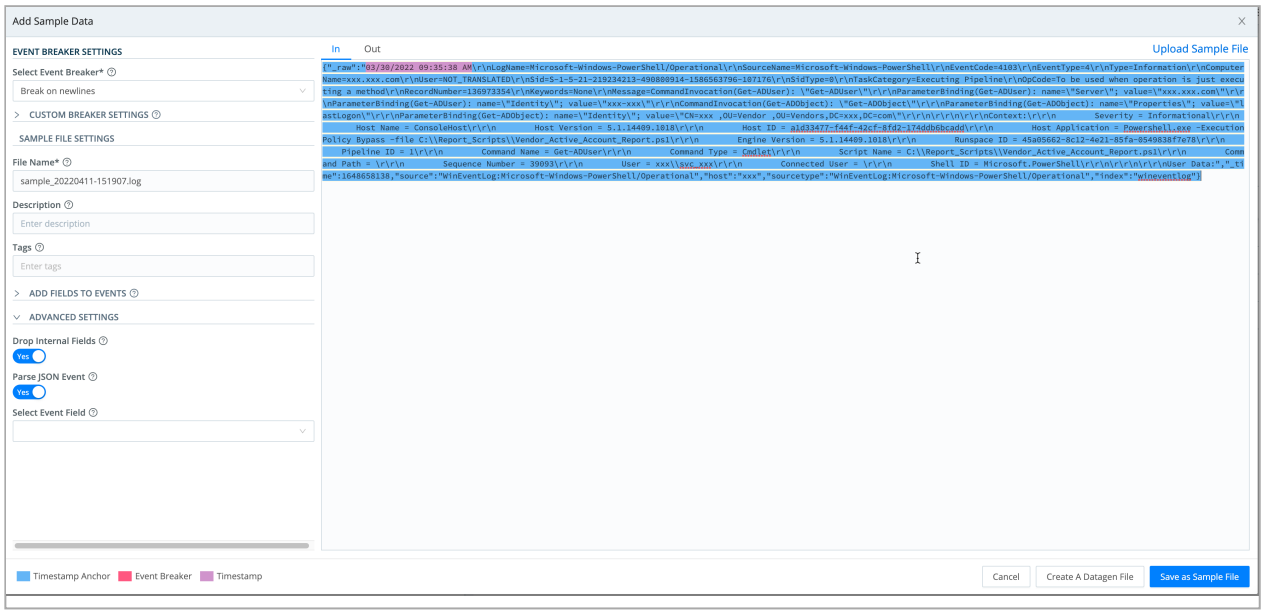

Saving captured data

In your production environment, you can filter incoming events in real time (e.g., using a filter expression like `Windows Security logging`) to identify your in-scope Exabeam data.

Configure Pipeline

Next, this section shows relevant Functions that you can assemble into a processing Pipeline to transform the sample log into Exabeam's expected format.

Serialize Function

First, use a Serialize Function to change the event's format into `JSON`. Then, remove the extra lines and spaces, because Exabeam treats each newline as a separate event.

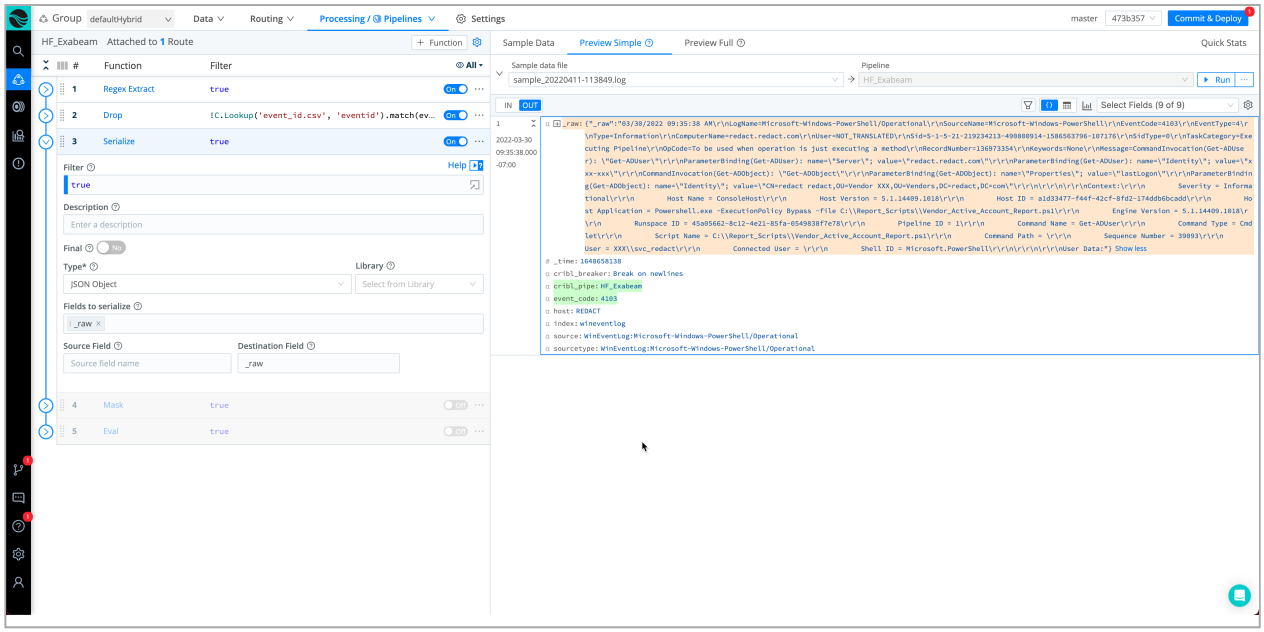

Reformatting the event

Mask Function

Next, use a Mask Function to remove extra `\n` and `\r` characters. (Otherwise, Exabeam's regex filter would reject the characters and drop whole fields that need to be matched and extracted.)

In this example, we are using a Mask Function to remove these special characters and replace them with spaces.

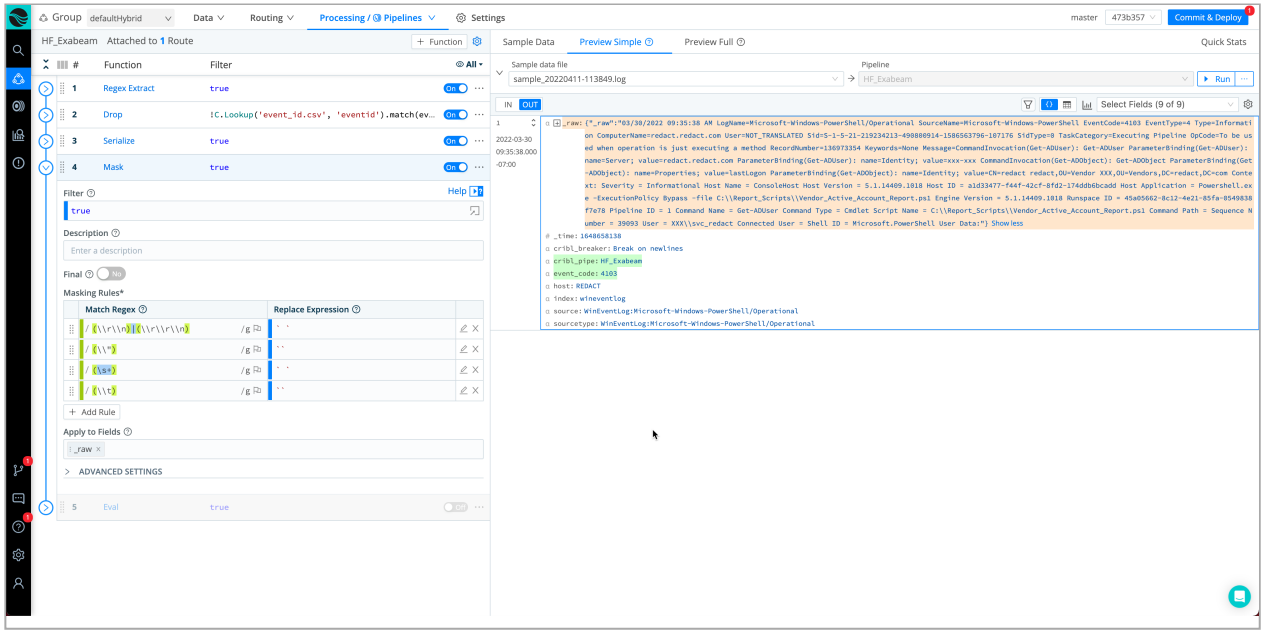

Extraneous newlines/returns to remove

Eval Function

As the last step in Cribl Stream, use an Eval Function to enrich the outbound events, by adding key-value pair that defines and populates a field conforming to the Exabeam schema. Name the new field `Message`. (The `Message` field will populate `Raw Message` in the Exabeam Data Lake.) Remove everything else using **Remove Fields**.

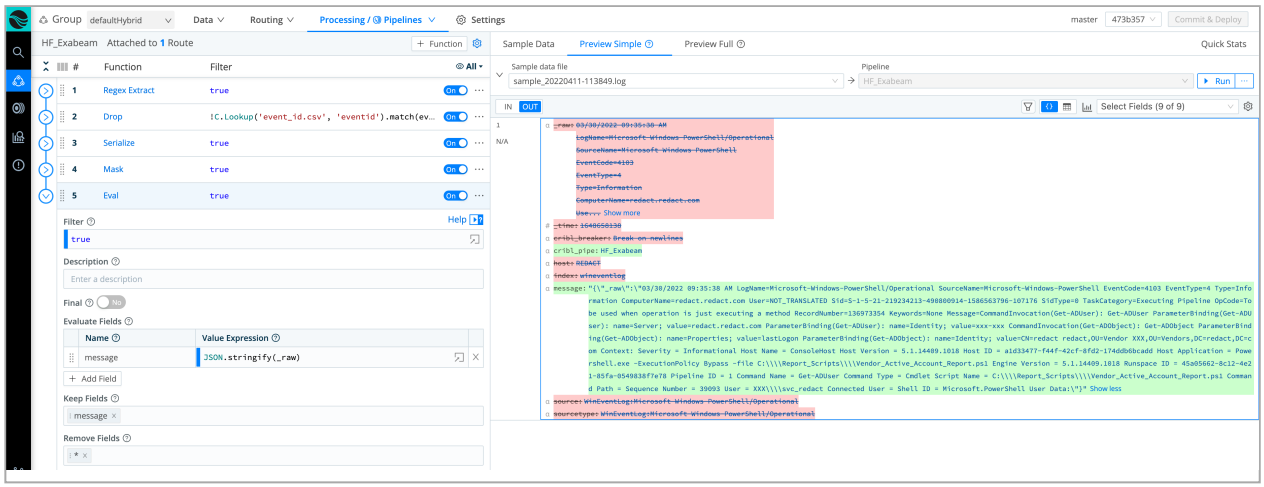

Eval Function to add an Exabeam-specific field

Goat the Fields?

Use Exabeam's Auto Parser Generator (APG) tool to validate your fields. If you don't have the APG tool, contact Exabeam support to request access via your ECP account. This tool validates matching parsers based on your event.

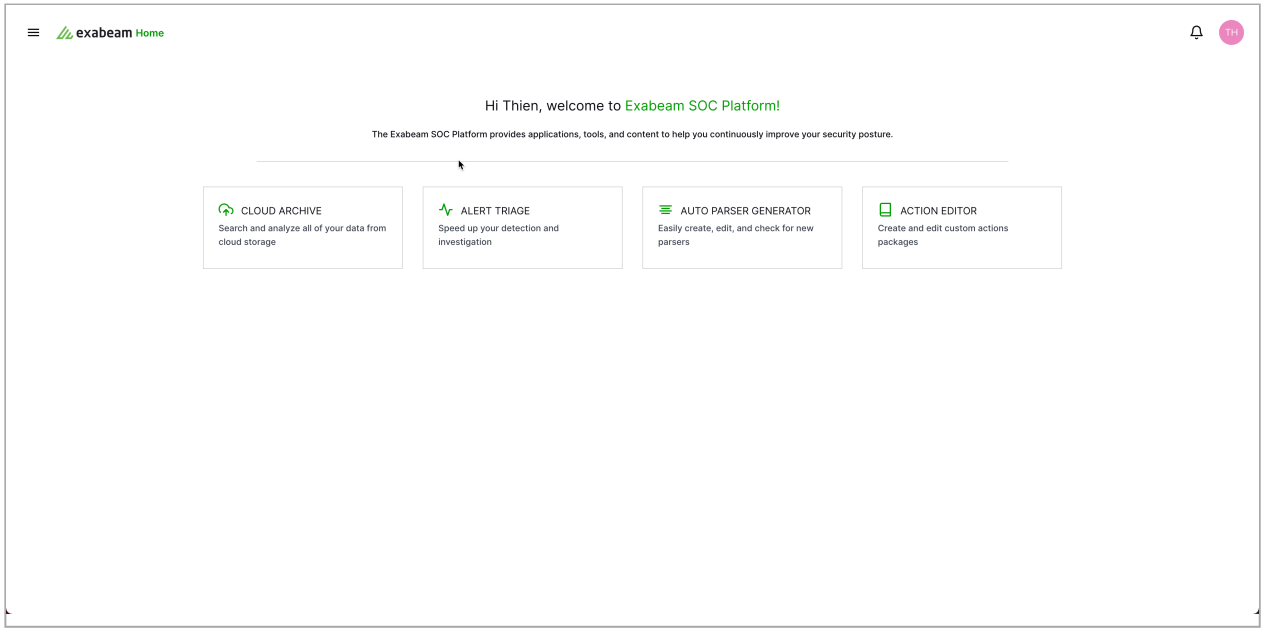

APG tool access in Exabeam

In the APG tool, click **New Parser**.

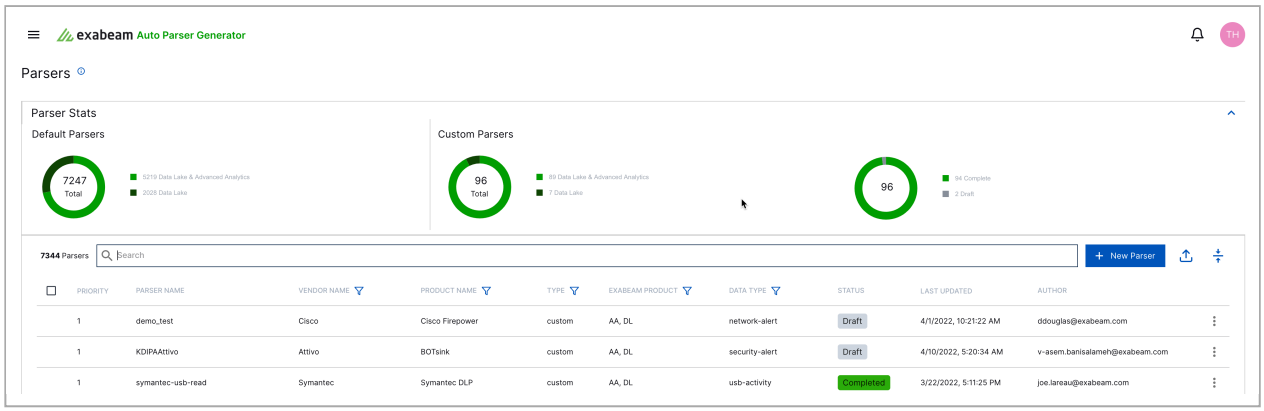

New Parser option

On the **Create Parser** page, click **Copy and paste raw log lines**.

In the text box, paste the **Message** field value from the your sample file and click **Upload Log Sample**.

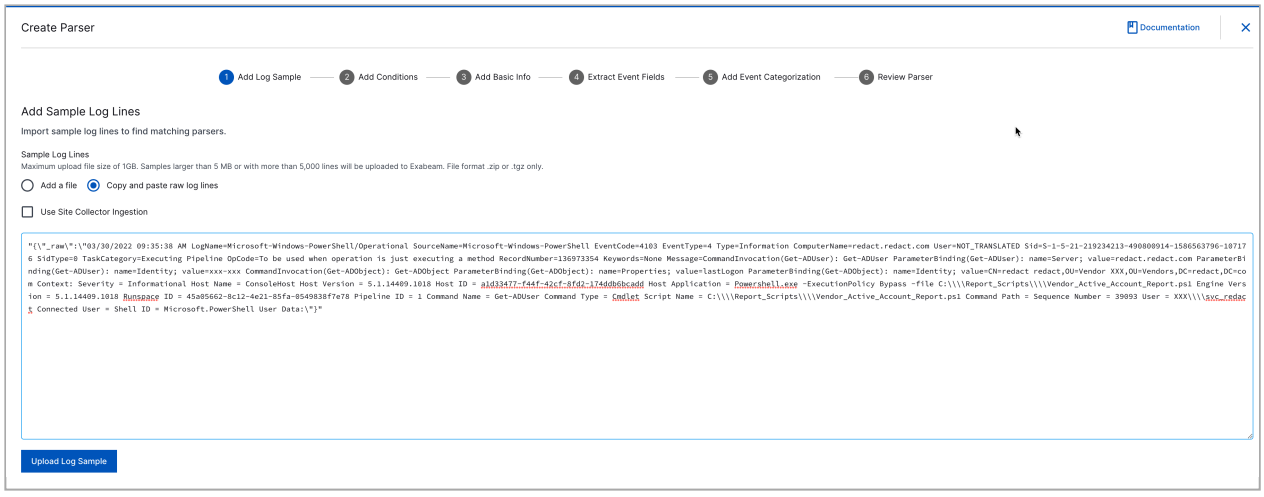

Paste Message Field

Copy the *Message** field value to your clipboard for a later step in Stream it to Exabeam.

Click **View Parsing Details** to view parsers matching this event type.

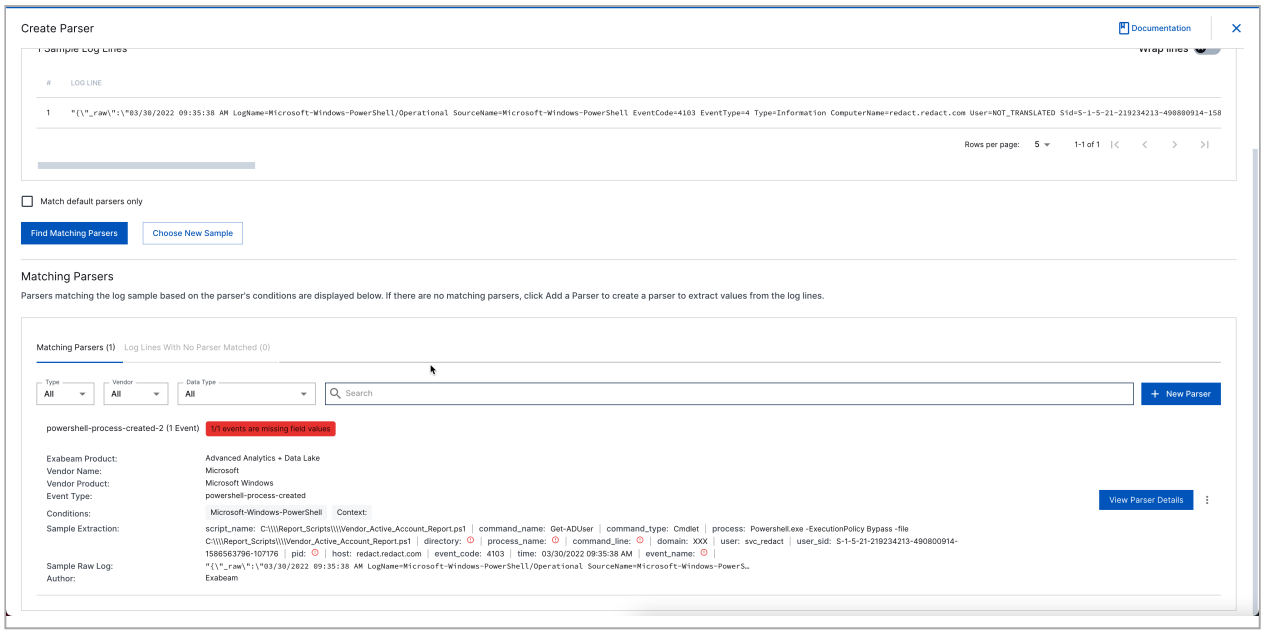

New Parser option

Validate that all the fields you need are populated: `src_ip`, `dest_host`, `user`, etc.

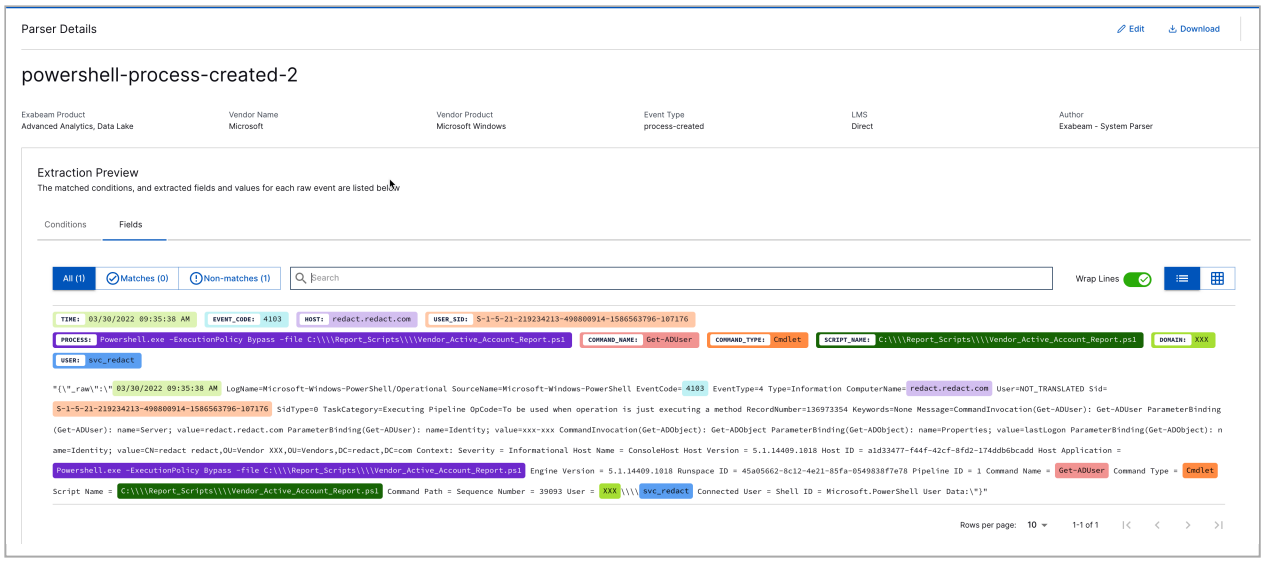

Paste Message Field

> Do not change Field Names in Exabeam (e.g., `src_ip` to `source_IP`). Exabeam has its own Field Name format that matches its Advanced Analytics template.

At the bottom of the **Extraction Preview** page, click **Configuration Files** to inspect the parsers. If required, you can download the parser to change the regex configurations.

Parser Details

Stream It to Exabeam

Our final test is to send a single event to Exabeam, and validate the results in Exabeam's Data Lake or Advanced Analytics.

> Before testing, configure your Exabeam implementation's `Asset Name` and `Username` to a dummy account. Exabeam's Advanced Analytics has hundreds of models out of the box, and you do not want to ruin these models while testing out your data.

1. From Cribl Stream's **Manage** submenu, select **Data** > **Destinations** > **Syslog**.

2. Click **Add Destination** to configure and save a new Syslog Destination to export data to Exabeam.

   Configure the **Address**, **Port**, **Message format**, **Timestamp format**, and other options to match your Exabeam implementation.

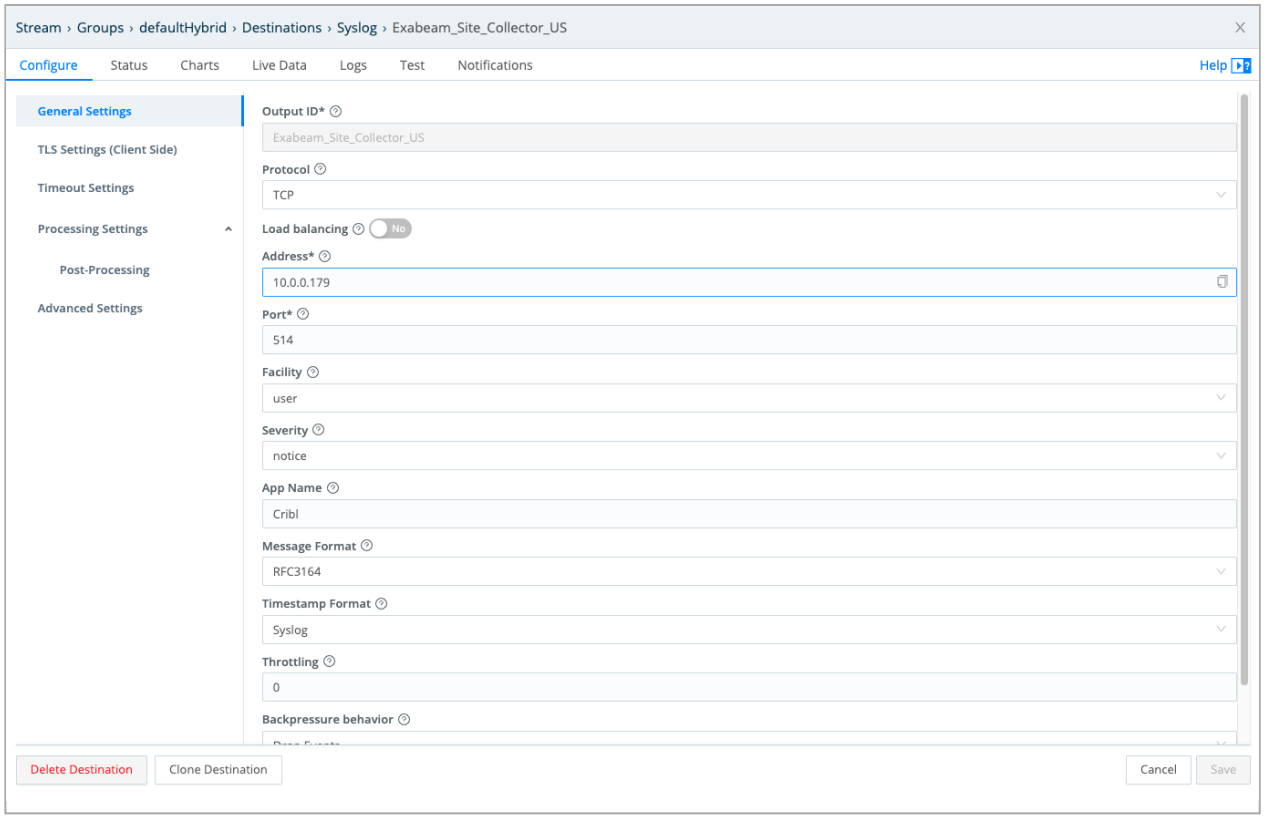

Configure Syslog

3. Reopen the Syslog Destination. On its **Test** tab, copy and paste the **Message** field's value you copied onto your clipboard above.

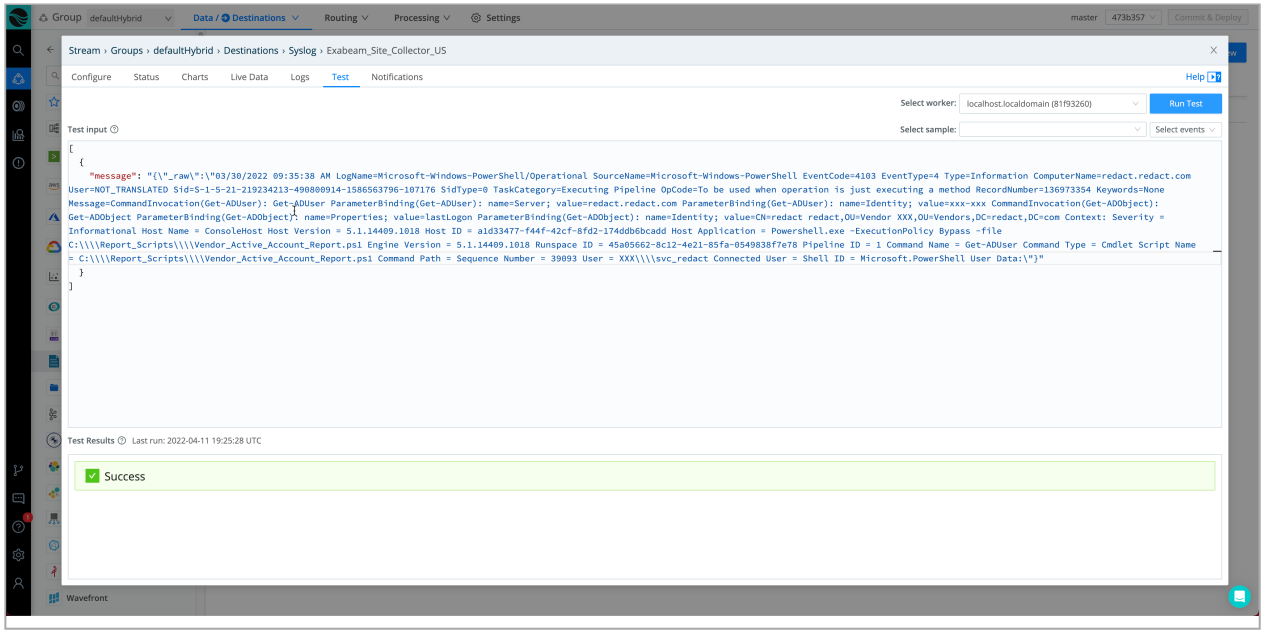

Syslog Test tab

4. Within a few seconds, you should see your event display in the Exabeam Data Lake. Search for your forwarder IP/Host (Example syntax: `Forwarder:"IP/host`).

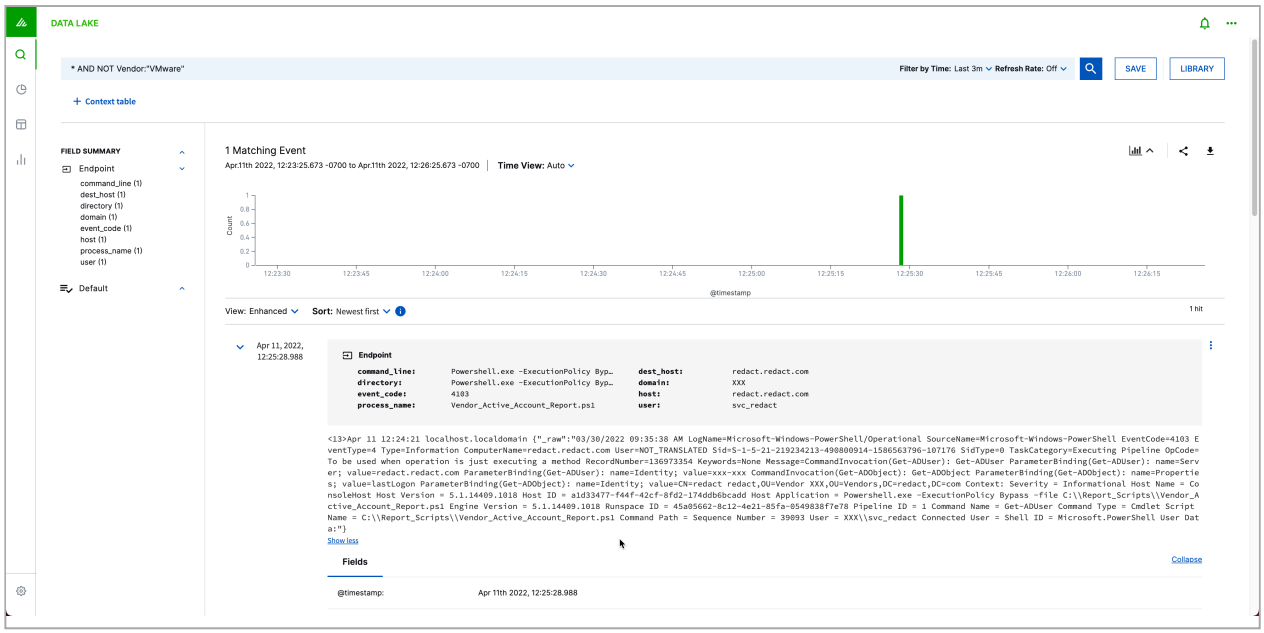

Validating event in Exabeam

5. You can validate that you have the right parser by matching the `exa_parser_name` with the parser in the Auto Parser Generator.

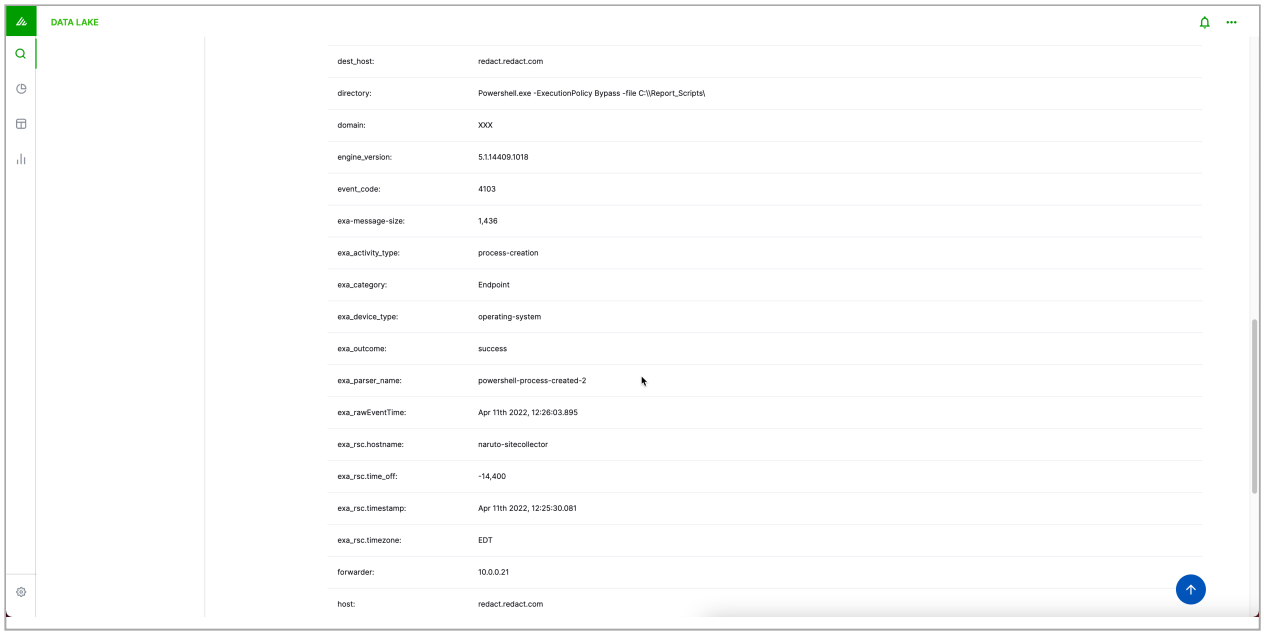

Validating parser in Exabeam

14.2.9. Splunk Stream to Cribl Stream

Splunk Stream is a set of three Splunk packages that, combined, enable you to capture and work with streams of network event data. This adds up to a collector for streaming data. You can deploy Splunk Stream in either of two forms:

- As part of a Splunk Universal Forwarder (we'll call this the forwarder-based config), sending data to a Cribl Stream Splunk TCP Source; or
- As an independent stream forwarder (we'll call this the ISF config), running on a compatible Linux machine, and sending data to a Cribl Stream Splunk HEC Source.

In either case, the collector process (not to be confused with a Cribl Stream Collector) will need to call home to a Splunk Enterprise process with the Splunk Stream app installed. You'll manage the collector's settings in Splunk Enterprise.

For the broader Splunk configuration story, see Splunk's documentation. Here, we'll explain one small part of the Splunk configuration process: how to configure Splunk Stream to send the data it captures to Cribl Stream. See the section below – either Forwarder-based or ISF – that corresponds to your use case.

Setting Up the Forwarder-Based Config

Install the Stream TA on the Universal Forwarder targets, either manually or via the deployment server. You'll need to add a new `inputs.conf` stanza pointing to your Splunk Stream App management instance. Adapt the example stanza below, replacing the placeholder with the hostname or IP address of your management host.

New stanza in config file

```
[streamfwd://streamfwd]
splunk_stream_app_location = https://<your_management_host>:8000/en-
us/custom/splunk_app_stream/
disabled = 0
```

The `outputs.conf` for the Universal Forwarder with Splunk Stream App is the same as for a Universal Forwarder with a non-streaming collector. See these examples.

To verify that your setup is working, run a Live Capture in your Cribl Stream Splunk TCP Source with appropriate filters. Once the Universal Forwarder is sending data to your Cribl Stream Workers, you're ready to begin working with sample captures, Routes, and Pipelines.

If no data seems to be coming through, check the logs located at `/opt/splunkforwarder/var/log/splunk/splunkd.log` on each machine where your Forwarder is running.

Setting Up the ISF Config

Splunk Stream as an independent stream forwarder (ISF) can run only on Ubuntu- or RHEL-based x64 Linux machines that have bzip2 installed.

To install Splunk Stream, begin in the Splunk UI:

- In the Stream App, navigate to **Configuration** > **Distributed Forwarder Management**.
- Click the **Install Stream Forwarders** button.
- In the resulting modal, under the text `To get data from other machines, run this command on your data source machine`, copy the `curl` command. E.g.:

  ```
  curl -sSL http://DellT20:8000/en-us/custom/splunk_app_stream/install_streamfwd | sudo bash
  ```

On each Linux machine where you want to install Splunk Stream, run the `curl` command that you copied. Installation will fail if the machine lacks `bzip2`.

Once installation is complete, return to the Splunk UI.

1. To update the HEC endpoint URL, navigate to **Actions** > **Edit Forwarder Group** for the desired group.
2. Toggle **HTTP Event Collector Autoconfig** to `Off`.
3. In the **Endpoint URLs** field, list your Cribl Stream Worker URLs, as shown here:

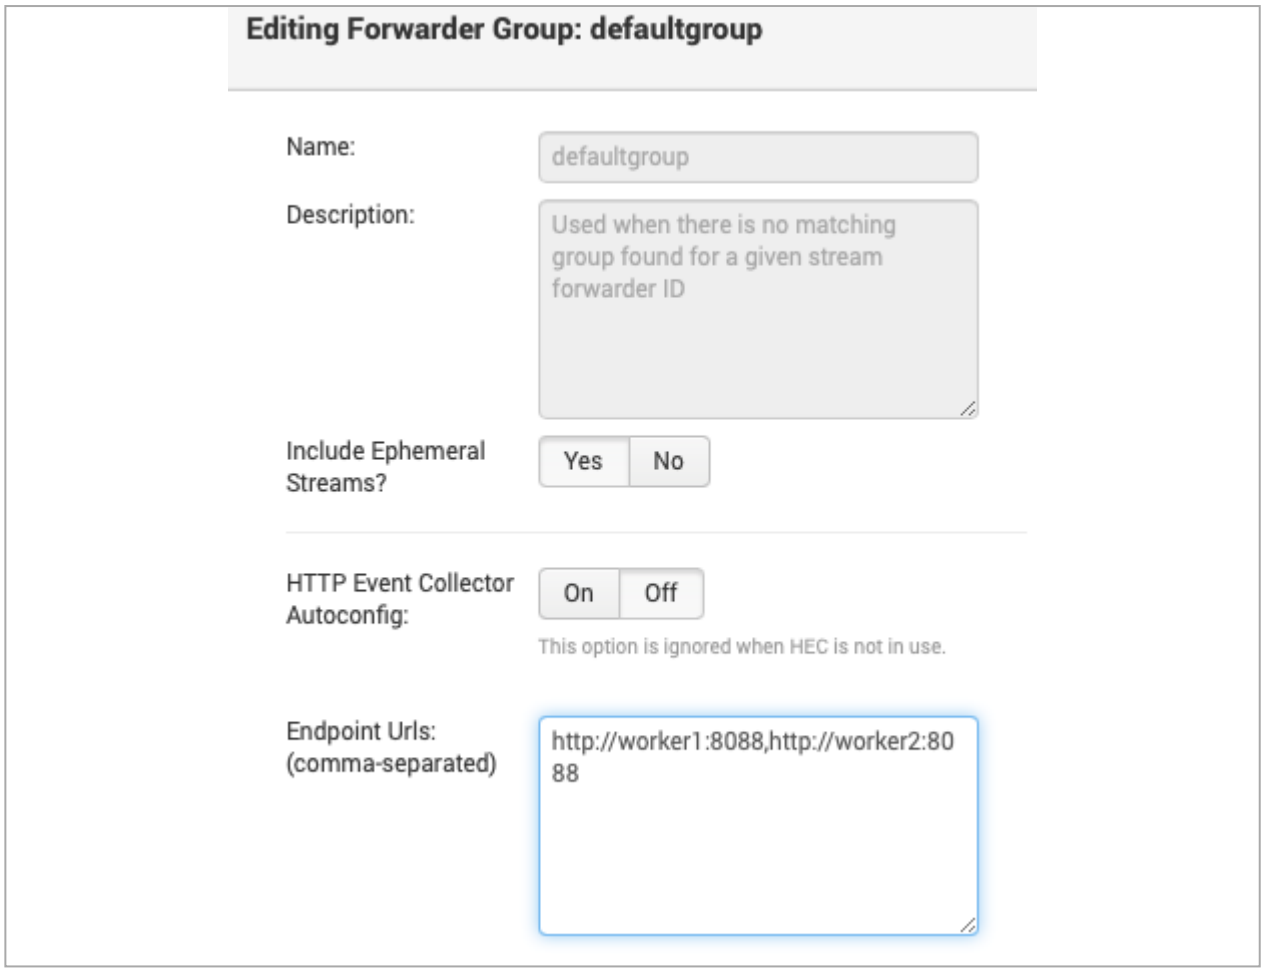

Editing forwarder group to specify Cribl Worker URLs

4. Click **OK**.

Finally, on each Linux machine where you're running Splunk Stream, update the ISF settings with the proper HEC token. (While it is technically possible to run without a token, Cribl strongly recommends against this practice.)

1. In Cribl Stream, copy the HEC token from your Cribl Stream Splunk HEC Source definition (the value of the `__hecToken` internal field).

2. On the desired Linux machines, open `/opt/streamfwd/local/streamfwd.conf` in a text editor.

3. Add the following stanza, substituting your HEC token for the placeholder:

```
[streamfwd]
httpEventCollectorToken = <HEC_token_from_your_Cribl_Stream_Source>
```

4. Run the following command to restart the ISF:

```
systemctl restart streamfwd
```

To verify that your setup is working, run a Live Capture in your Cribl Stream Splunk HEC Source with appropriate filters.

You can also check ISF status in Splunk. Navigate to **Apps** > **Splunk Stream** > **Admin Dashboards** > **Stream Forwarder Status**:

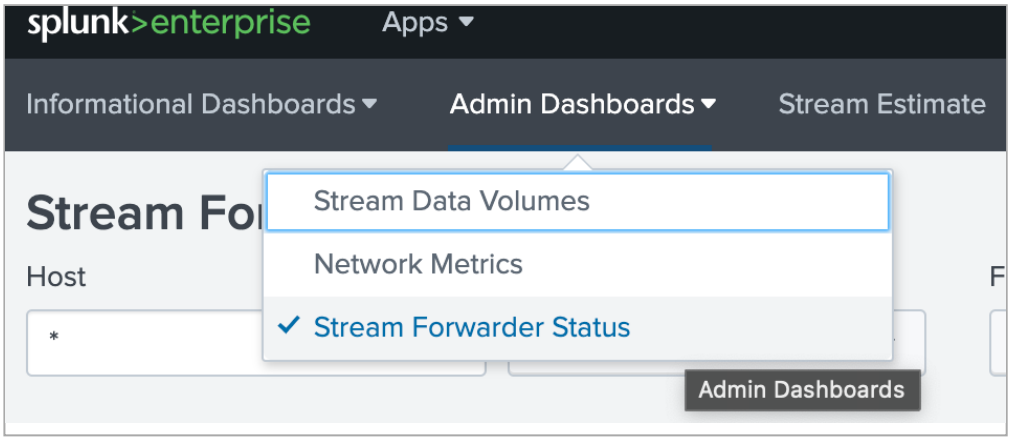

Verify ISF status in Splunk

If no data seems to be coming through, check the logs located at `/opt/streamfwd/var/log/streamfwd.log` on each machine where your ISF is running.

14.2.10. Syslog Best Practices

Cribl Stream can process a syslog stream directly. Moving to Cribl Stream from existing syslog-ng or rsyslog servers fully replaces those solutions with one that is fully supported and easily managed.

Processing syslog in Cribl Stream allows you to readily address these common challenges of ingesting data from syslog senders:

- **Architecture**: Cribl Stream routes the syslog stream directly, immediately, and securely to the destinations of your choice, reducing latency and management overhead.
- **Volume**: Removing redundant data and unnecessary fields in Cribl Stream typically reduces volume 20–30% overall. It also optimizes the data for downstream services like Splunk or Elasticsearch.
- **Timestamp handling**: Cribl Stream intelligently processes events sent from different time zones. It can embed a new, consistent timestamp, and can auto-correct timestamps that are off by an exact number of hours.
- **Severity/Facility accuracy**: Each syslog event begins with a bracketed integer that represents Facility and Severity, as defined in the Syslog Protocol. Cribl Stream translates this code (e.g., `<165>`, `<0>`) into the correct Facility and Severity values.
- **Metadata**: Cribl Stream can automatically set metadata fields, including `sourcetype` and `index`.

This tutorial outlines best practices for replacing your syslog server with Cribl Stream. To go even a bit deeper, check out this Cribl Office Hours video.

The Goal: Optimizing Syslog Events

By default, a Cribl Stream Syslog Source produces eight fields: `_time`, `appname`, `facility` (numeric), `facilityName` (text), `host`, `message`, `severity` (numeric), and `severityName` (text).

Default, parsed syslog event

While this default parsing makes the output much more readable, we haven't saved any volume – and we now have redundant pairs of fields (numeric versus text) that represent facility and severity.

Our next logical step is to streamline syslog events to something more like this:

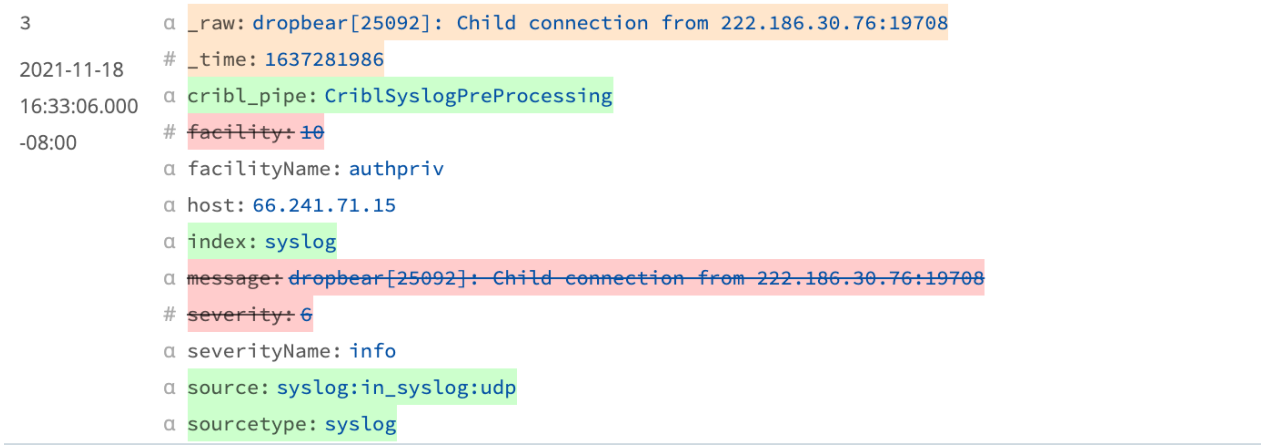

Default, parsed syslog event

This accomplishes all of the following:

- Extracts the essentials.
- Removes the redundancies.
- Adds a new field to identify the Cribl Stream Pipeline (which we're about to build).
- Adds metadata that the Destination needs.
- Shrinks the outbound `_raw` payload to just its `message` component.

Once we optimize syslog in this way, we can achieve still further efficiencies by dropping or downsampling frequent events, and by balancing high-volume syslog inputs across Cribl Stream worker processes.

Overall Architecture

Syslog data, especially when sent via UDP, is best collected as close to the source as possible. Ideally, you should capture syslog data **at its origin**. (This is true of syslog in general, not just syslog processed in Cribl Stream.)

Also, because syslog senders have no built-in load balancing, Cribl strongly recommends using a load balancer to distribute the load across multiple worker nodes.

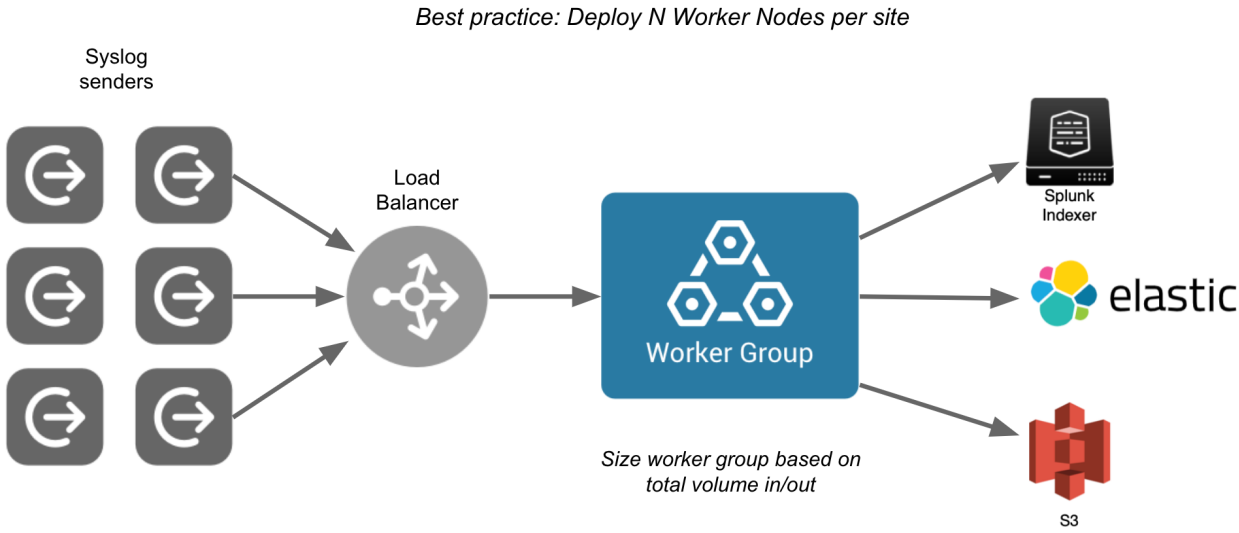

Example architecture for a single site or location

Load Balancing

When configuring a load balancer to be fed by syslog senders, start with these basic principles:

Avoid Stickiness

In this context, **stickiness** is when traffic from a given source is always sent to the same destination IP. The optimal configuration of the load balancer avoids "sticky" behavior, and instead spreads the workload across Cribl Stream Worker Nodes as evenly as possible.

Use API Calls to Do Health Checks

If UDP data is being sent, the load balancer has no way to automatically detect whether the destination is up. Configure the load balancer to use API calls to the Worker Nodes to check the health status of each Node (see Health Endpoint).

Listen on Port 514

If possible, configure the load balancer to listen on port 514, and then relay traffic to the Worker Nodes on port 9514. Here's why:

- Many syslog senders are hard-coded to send only to port 514, so you need to support them.
- Cribl Stream itself should not run as root, and therefore cannot listen on ports lower than 1024 without additional OS-level steps (like SETCAP).

A Port for Each Device Class

As explained above, for syslog devices that can send only to port 514, you can configure the load balancer to relay to destination port 9514. But what about the many syslog senders that **do** support sending to ports other than 514? It's a best practice among Cribl customers to use a dedicated receiving port for each class of device in their environment. While this takes a little more effort to set up, it enables you to hard-code metadata (and optionally, Pipelines) for the events from that data source. Examples include:

- 1517: VMware ESXi logs.
- 1521: Palo Alto Firewall.
- 1522: F5 load balancers.

We'll see how to set per-port metadata in the Adding Processing Pipelines section.

UDP Versus TCP

For any given syslog device, you might need to choose between using UDP or TCP. Which is best depends on the characteristics of the sender. Here are some basic guidelines:

- For single, high-volume senders (over 300GB/day), use UDP if possible. For both the sender and Cribl Stream, UDP imposes lower overhead than TCP. The stateless nature of UDP allows each log event to be directed to a different worker thread than the last. This ensures maximum utilization of the Worker Nodes. See Sizing and Scaling for more details.
- For lower-volume senders, use TCP if the sender supports it.
- For all other use cases, use UDP.

Pipeline Planning

In Cribl Stream, we speak of **pre-processing Pipelines**, **processing Pipelines** (or just plain **Pipelines**), and **post-processing Pipelines**. Cribl recommends combining the first two in an arrangement that we've found to be optimal for syslog.

Pre-Processing Syslog Sources

Attach a pre-processing Pipeline to most (or all) of your Syslog Sources. Use the pre-processing Pipeline to apply the same set of ingest-time processing that all syslog events will need, regardless of what subsequently happens on different subsets of the data.

Syslog data is a classic example of where a pre-processing Pipeline is useful: Unlike processing Pipelines, pre-processing Pipelines attach directly to a Source, enabling you to standardize or normalize what comes in. This way, you avoid having to implement that same functionality and logic separately in each processing Pipeline associated with a Syslog Source.

Pipeline for Selected Syslog Data Subsets

Configure dedicated Pipelines (and Routes!) for each distinct subset of data that arrives via syslog senders. These subsets might include DHCP logs from the router, traffic logs from the firewall, operational logs from load balancers, and virtualization logs from on-prem virtualization hypervisors.

Certain kinds of subset-specific processing have become Cribl Stream best practices. These include:

- For ESXi or other hypervisor logs, use the Drop Function to drop `debug`-level logs.
- For firewall logs, enrich with DNS names, GeoIP fields, and lookups from a threat list.
- For load balancer logs, use the Suppress Function to reduce volume.

Unless you're new to Cribl Stream, you've already created your own Pipelines, so we're not going to review that here. (If you are new to Cribl Stream, consider running through the free Cribl Stream Fundamentals sandbox course ASAP.)

Importing the Pre-Processing Pipeline

Even before setting up a Cribl Stream Syslog Source, you'll want to install the Cribl Pack for Syslog Input (a.k.a. `cribl-syslog-input` Pack), which provides the required pre-processing Pipeline.

If this is your first time installing from the Cribl Dispensary, see the full directions with screenshots. Otherwise:

1. Open the Cribl Pack Dispenary's Cribl Pack for Syslog Input page.
2. Under **Releases** at right, click the link for the latest release.
3. In the resulting **Assets** section, right-click the `.crbl` file to download it locally.
4. In Cribl Stream, select a Worker Group, then select **Processing** > **Packs**.
5. Click the **Add New** button, and select **Import from file**.
6. Select the Pack you downloaded, and follow the prompts from there. In most cases, when installing a Dispensary Pack, you should not enter an override value for **New Pack ID**.
7. Review the Pack's `README` file, available in the Pack's **Settings** link and also online.

Let's examine what this Syslog Input Pack provides, starting with the Routes page.

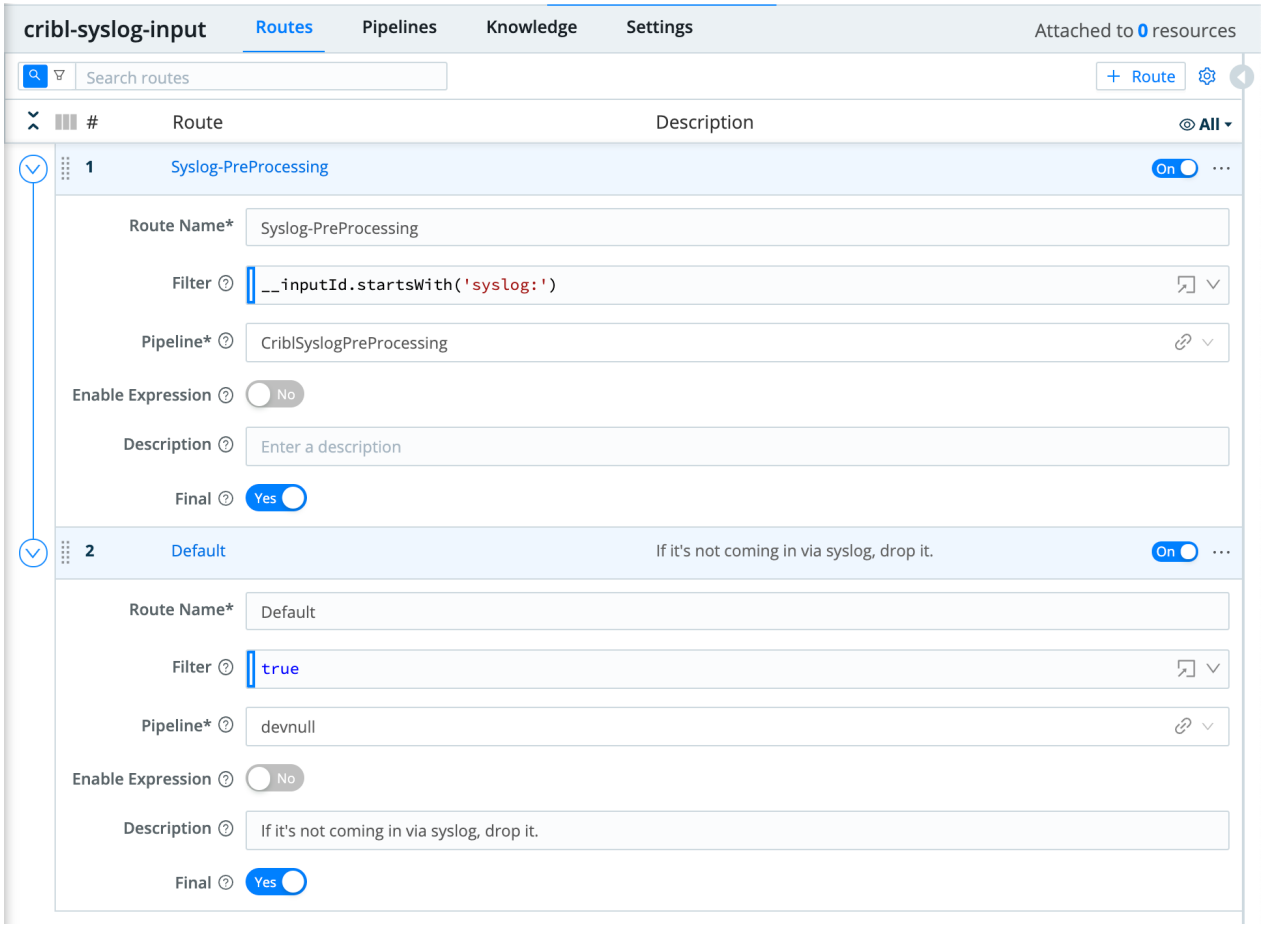

Routes page in the Cribl Pack for Syslog Input

The first Route matches based on `inputId`. Anything arriving via a Cribl Stream Syslog Source will match this filter, as long as you've configured the Source to use the Pack, as shown below.

On first installation of the Pack, the Pipeline defaults to commonly used configurations. Cribl **strongly** recommends reviewing the Pipeline's internal documentation to understand which features are enabled. This documentation consists of Comments for each section, and a Description for each Function to explain what's happening in that step.

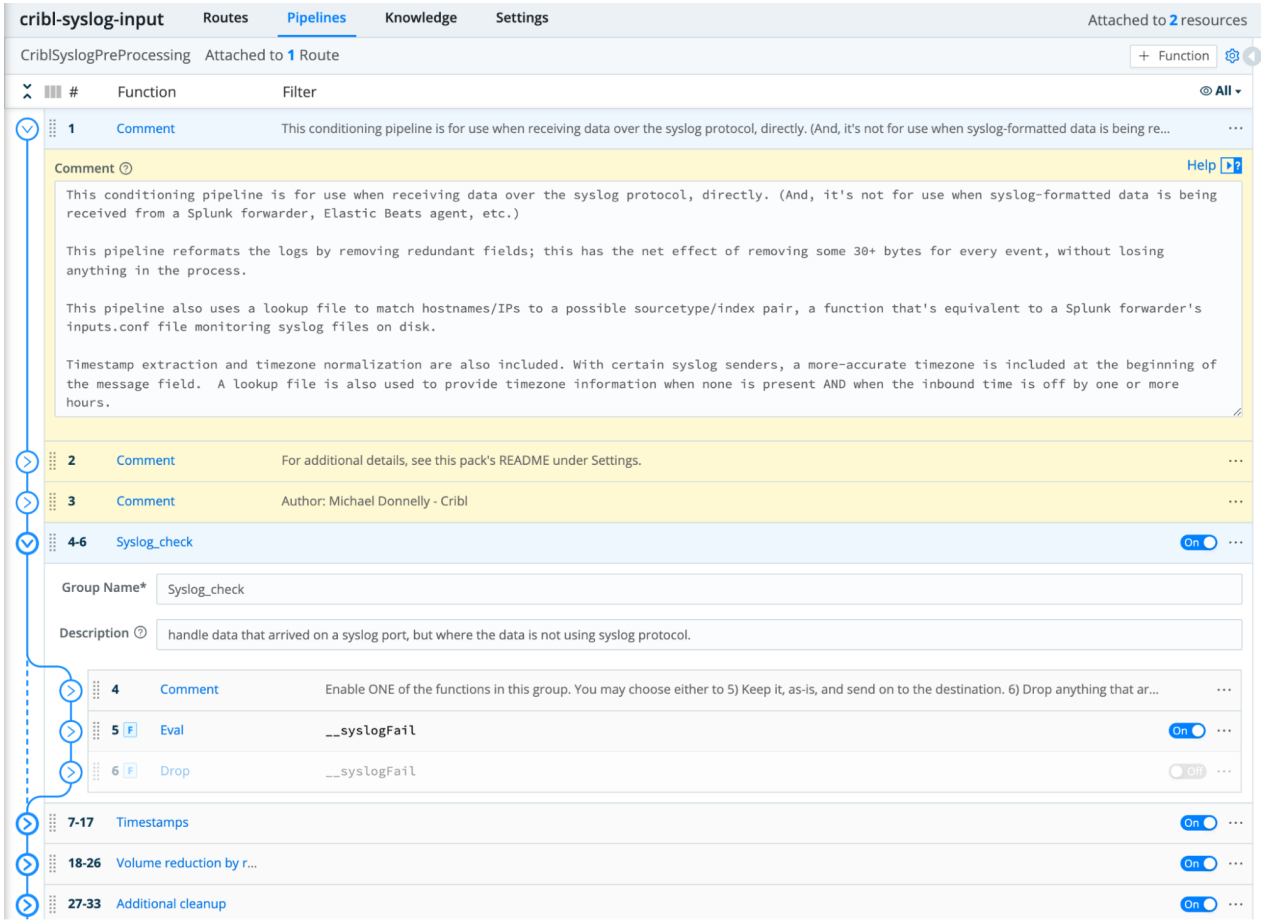

The Pipeline's internal documentation

Examining this documentation should make it clear what changes (if any) are needed to suit your deployment environment. Go ahead and make those changes now.

The Lookup File

The Pack ships with a lookup file called `SyslogLookup.csv`, whose contents you should replace as necessary. To access the file, navigate to **Processing** > **Packs**, select the `cribl-syslog-input` Pack, and click **Knowledge**.

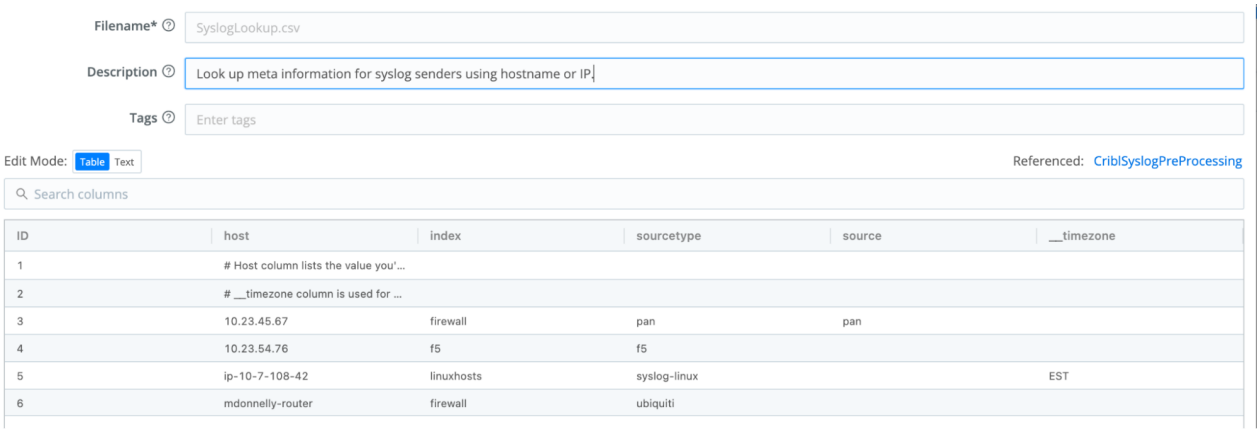

Stock `SyslogLookup.csv` file, to be filled with customer data

Creating Syslog Sources

Now that you've imported the pre-processing Pipeline, the next step is to ensure that you have the Syslog Sources you need.

Configure the `in_syslog` Source

> Cribl Stream ships with a Syslog Source named `in_syslog`, which is preconfigured to listen for both UDP and TCP traffic on Port 9514. You can clone or directly modify this Source to further configure it, and then enable it.

Use the `in_syslog` Source for syslog senders that are hard-coded to send to port 514, as described above. In the **QuickConnect** UI: Click **Add Source**. From the resulting drawer's tiles, select [**Push** >] **Syslog**. Click **Select Existing**, then `in_syslog`.

Or, in the **Data Routes** UI: From the top nav of a Cribl Stream instance or Group, select **Data** > **Sources**. From the resulting page's tiles or the **Sources** left nav, select [**Push** >] **Syslog**. In the **Manage Sources** page, click `in_syslog`.

Configure the fields and options as follows:

General Settings

- **Enabled**: Toggle to `Yes`.
- **UDP Port** and **TCP Port**: Assuming you're following the guidelines in this tutorial, you'll have a load balancer relaying incoming traffic from port 514 to port 9514. Therefore, leave the `in_syslog` Source configured to listen on its default port, 9514, for both TCP and UDP.

TLS Settings (TCP Only)

- Enabling TLS is strongly recommended if the Source will be receiving data across the Internet.

Processing Settings

- **Metadata**: There is no need to add fields here, because for generic senders coming in on 9514, the Pack will set the meta-information via the `SyslogLookup.csv` file. What you need to do is edit the lookup file

to add content appropriate to your deployment.

- **Pre-processing**: From the **Pipeline** drop-down, select `PACK: cribl-syslog-input (Syslog Preprocessing)`.

Create a Source for Each Device Class

As explained above, you should now create a Syslog Source for each vendor/class of syslog sender. Create each Syslog Source as follows:

In the QuickConnect UI: Click **Add Source**. From the resulting drawer's tiles, select [**Push** >] **Syslog**. Click **Add New**.

> If you use QuickConnect, remember that each Source/Destination pair will be parallel and independent.

Or, in the **Data Routes** UI: From the top nav of a Cribl Stream instance or Group, select **Data** > **Sources**. From the resulting page's tiles or the **Sources** left nav, select [**Push** >] **Syslog**. Click **New Source** to open a **New Source** modal.

Configure the fields and options as follows:

General Settings

- **Input ID**: This field specifies the name for the Source, which will appear in the `__inputId` field as well as on Monitoring pages that show Source information. Common examples include `in_syslog_cisco_switch` for Cisco switches, `in_syslog_f5` for F5 load balancers, and so on.
- **UDP Port** and **TCP Port**: Enter the dedicated port you have chosen for the device class, and use UDP or TCP according to the recommendations above.

TLS Settings (TCP Only)

- Enabling TLS is strongly recommended if the Source will be receiving data across the Internet.

Processing Settings

- **Metadata**: Select **Fields (Metadata)** and add the fields appropriate for the intended Destination(s), such as `sourcetype`, `index`, `__timezone`, and any other meta-information you want to tie to the sender's hostname or IP address.

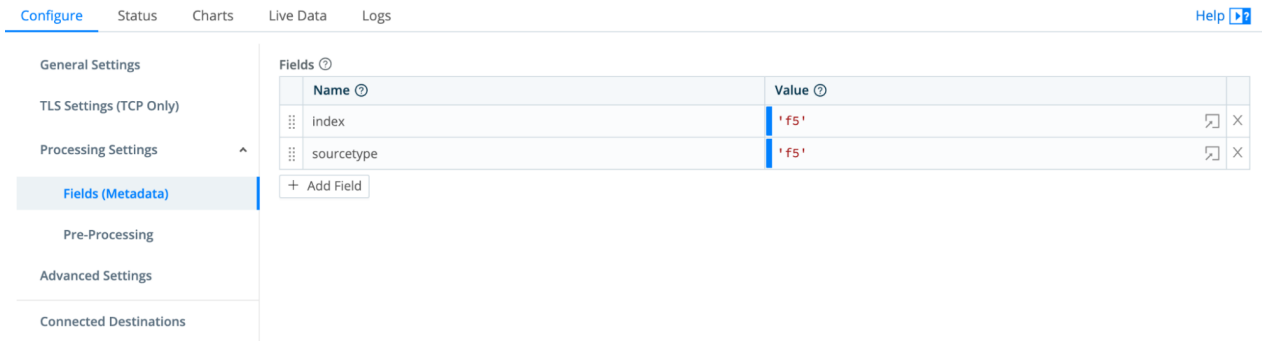

Metadata fields tied to a dedicated-port Syslog source

- **Pre-processing**: From the **Pipeline** drop-down, select `PACK: cribl-syslog-input (Syslog Preprocessing)`.

Adding Processing Pipelines

Congratulations! You've gotten a nice grounding in syslog processing, and you've seen methods with which you can:

- Properly architect the deployment environment, where syslog sender data travels through a load balancer, which then distributes it across a Cribl Stream Worker Group.
- Import a Pack from the Cribl Pack Dispensary.
- Create new Cribl Stream Syslog Sources which use the **Cribl Pack for Syslog Input**.
- Hard-code meta-information for specific ports, or use the lookup file to map meta-information for specific hosts.

Your logical next step: using Pipelines and Routes, transform syslog data in a way that makes sense for your particular syslog sender(s).

We'll look at two use cases:

- QuickConnect a Syslog Sender to a Source
- Route Multiple Syslog Senders to a Source

The point is to see how Cribl Stream offers different approaches for different scenarios. For configuring one dedicated Source to receive a given, single dataset, QuickConnect is ideal. But to accommodate a mix of data arriving on the same Source and port, and needing to be divided into subsets, and processed differently by different Pipelines – that is where we need Routes.

Use Case A: QuickConnect a Syslog Sender to a Source

Of the many possible examples, we'll focus on reducing the volume of VMware ESXi syslog data by dropping events of `debug` severity.

Data reduction will be significant, because `debug` severity events can make up 80-90% of syslog data sent from ESXi servers. Not only that: Reducing the data volume reduces the CPU load and storage used to process the data, and searches will respond faster. In a world where we're searching for needles in a haystack, dropping 80% of the hay makes everything better.

To set this up:

1. In your Worker Group, navigate to **Pipelines**, click **Add Pipeline**, then click **Add Pipeline**.
2. Name the new Pipeline `DropNoisySyslog` or something similar.
3. Click **Comment** and enter a good description of what you're doing. (This is an important best practice!)
4. Add a Drop Function with filter `severityName=='debug'`. (You could also use sampling, or dynamic sampling if you wanted to be fancy about this.)
5. Click **Save** and we're done.

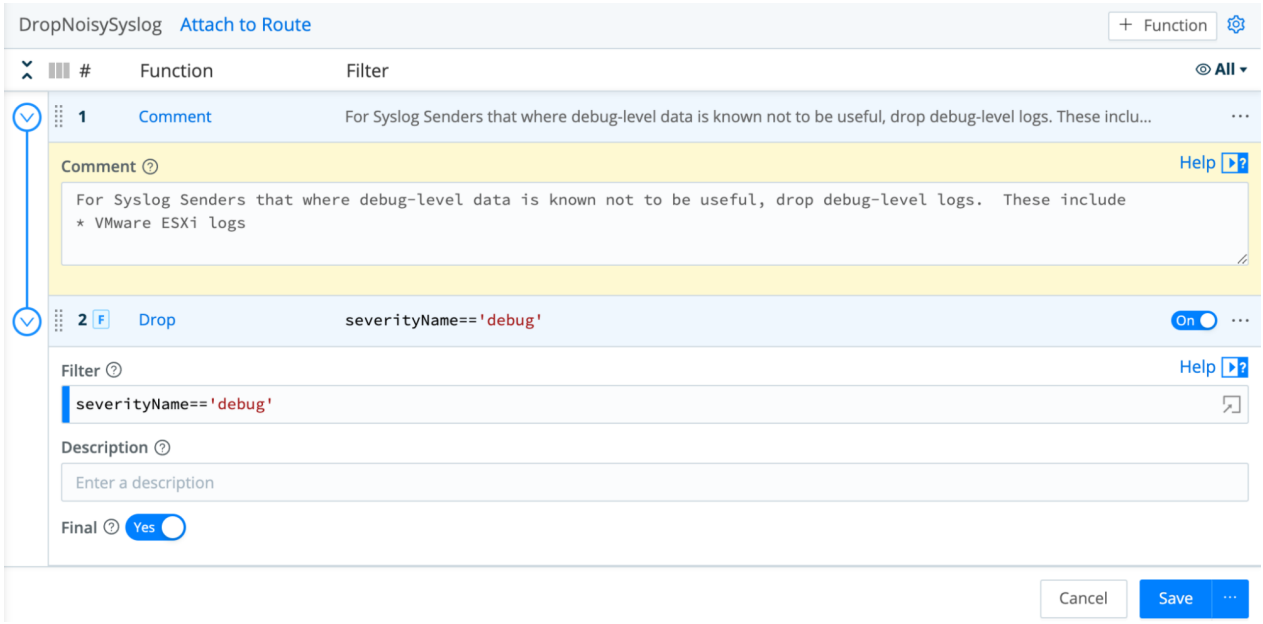

Pipeline to remove debug events

Next, we need to direct VMware ESXi data to our Pipeline. We'll do this using QuickConnect, which is the fastest way to configure a new Source, tie it to a Destination, and assign pre-processing and processing Pipelines to that Source. (We could also do this with Routes; that simply requires a few more configuration steps.)

In the **QuickConnect** UI:

1. Click **Add Source**.

2. From the resulting drawer's tiles, select [**Push** >] **Syslog**.
3. Click **Add New**.
4. Configure the fields and options as follows:
    - **Name**: `in_syslog_ESXi`.
    - **TCP**: `1517`. This is the TCP port on which ESXi servers send their logs.
    - **Pre-Processing** > **Pack**: Select `cribl-syslog-input`.
    - **Fields (metadata)**: Add a `sourcetype` field with value `esxilogs`, and an `index` field with value `vmware-esxi`.

Adding metadata appropriate for ESXi

5. Click **Save**.
6. On the main **QuickConnect** page, drag a connector from `in_syslog_ESXi` to each Destination you want to receive these events. When prompted, select **Pipeline**, select your `DropNoisySyslog`, and click **Save**.
7. Commit and deploy, and you're all set!

Use Case B: Route Multiple Syslog Senders to a Source

Let's imagine you have incoming data from a router. This data is tagged with `sourcetype=myrouter`, and it includes a mix of DHCP actions, login/authentication attempts, and firewall traffic logs.

Our goal is to send each of the three data subsets of data – DHCP, login, and firewall – to its own Pipeline.

We know that the **Cribl Pack for Syslog Input** has a Lookup Function that – for data arriving on the default port – should return meta-information such as `sourcetype` or `index`. We can combine this metadata with some matching of strings within the data, in Route filters that direct the right data to the right Pipeline.

> Although in reality, the `myrouter` firewall does not exist, the example that follows shows the art of the possible. We'll spell out the procedures as if the scenario were real. Perhaps one day you'll use it

> as a template for an actual deployment.

Create a Pipeline for Each Data Subset

- Create three Pipelines, naming each one for a data subset: `myrouter-dhcp`, `myrouter-auth`, and `myrouter-fw-traffic`.
- Leave the Pipelines empty for now; we'll add Functions later on.

Create a Route for Each Data Subset

1. Navigate to **Routing** > **Data Routes**.
2. Click **Add Route**.
3. Configure a Route as specified in the table below:

NAME	FILTER	PIPELINE
`myrouter-dhcp`	`sourcetype=='myrouter' && raw.match('dhcpd3:')`	`myrouter-dhcp`
`myrouter-auth`	`sourcetype=='myrouter' && raw.match('login')`	`myrouter-auth`
`myrouter-fw-traffic`	`sourcetype=='myrouter' && raw.match('TRAFFIC')`	`myrouter-fw-traffic`
`myrouter-other`	`sourcetype=='myrouter'`	`DropNoisySyslog`

4. Repeat the preceding steps until you have configured four new Routes – one for each of the three data subsets, plus a final Route to drop events that don't match our Filters (i.e., noise).

   All Routes should have the **Final** flag to `Yes`, and the output set to whatever Destination you think is appropriate for the given data subset.

5. Click the `myrouter-dhcp` Route's ••• (Options) menu, then select **Group Actions** > **Create Group**.

6. Name new Group `myrouter`.

7. Drag the Routes you created above into the new Group. (Be sure that `myrouter-other` is listed last.)

8. Drag the new Group to whichever vertical position makes the most sense for your deployment.

   Once you've completed all the above steps, then after collapsing your new Routes, you should see something like this:

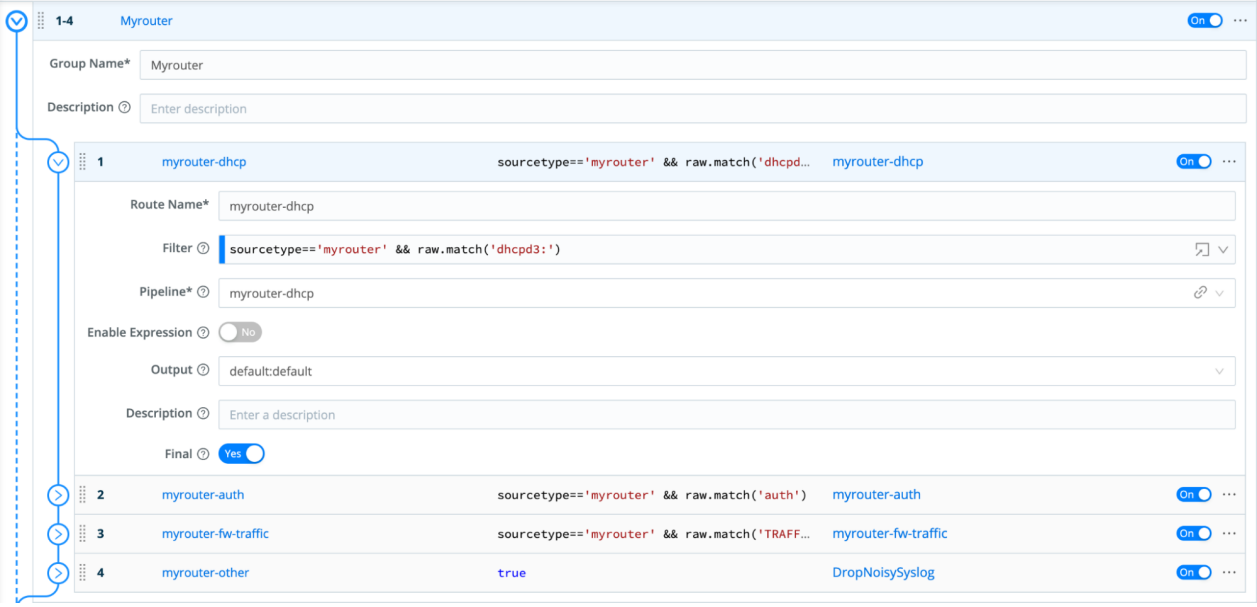

Example of Routes in a Group, each tied to the same sender

Next, edit each of the `myrouter-<data-subset>` pipelines:

- Use an Eval Function to modify the `sourcetype` (and perhaps other metadata.)
- Use appropriate Functions to accomplish the enrichment, suppression, volume reduction, and/or other transformations that the data needs.

Takeaways from This Routing / Pipeline Use Case

- Routing provides the flexibility needed when dealing with multiple datasets from a single sender, or when a single Source receives multiple datasets.
- Ensure that you have a dedicated Pipeline (and Route) for each discrete dataset that you want to manipulate in some way (e.g., `fw-traffic`).
- Ensure that you have a final Route that matches the general data from the overall sourcetype.
- Use the Routing page's Groups option to create logical containers for sets of Routes that belong together.

14.2.11. Palo Alto Syslog to Cribl.Cloud

Panorama management appliances give you insights into what is happening behind your Palo Alto Networks firewalls, including details about applications, URLs, threats, data files, and patterns. By forwarding logging data directly from Palo Alto firewalls or Panorama management appliances to your Cribl.Cloud instance, you can shape, process, search, and route the data to the analytics platform of your choice.

In this example, we will show you how to configure your devices so that you can connect to your Cribl.Cloud instance.

Obtain Cribl.Cloud CA Certificates

The first step is to obtain the CA chain from your Cribl.Cloud Organization. This script automates the process.

> The `HOST` domain in this example uses the `default` Worker Group. Modify this substring, as needed, to query other Cribl.Cloud-managed Worker Groups.

```
mkdir certs && cd certs
HOST=default.main.<OrganizationID>.cribl.cloud
PORT=6514
echo | openssl s_client -servername $HOST -showcerts -connect $HOST:$PORT 2>
/dev/null | awk '/BEGIN CERTIFICATE/,/END CERTIFICATE/{ if(/BEGIN CERTIFICATE/)
{a++}; out="cert"a".pem"; print >out}'

for cert in $(ls -1); do
  newname=$(openssl x509 -noout -subject -in $cert | sed -nE 's/.*CN ?= ?(.*)/\1/;
s/[ ,.*]/_/g; s/__/_/g; s/_-_/-/; s/^_//g;p' | tr '[:upper:]' '[:lower:]').pem
  echo "${newname}"; mv "${cert}" "${newname}"
done
```

Example output:

```
thegoat@in certs % ls -la
total 24
drwxr-xr-x   5 thegoat  staff   160 Sep 13 21:45 .
drwx------@ 44 thegoat  staff  1408 Sep 13 20:45 ..
-rw-r--r--   1 thegoat  staff  2472 Sep 13 21:44
logstream_<OrganizationID>_cribl_cloud.pem
-rw-r--r--   1 thegoat  staff  1968 Sep 13 21:44
usertrust_rsa_certification_authority.pem
-rw-r--r--   1 thegoat  staff  2431 Sep 13 21:44
zerossl_rsa_domain_secure_site_ca.pem
```

Import the `usertrust` and `zerossl` certs in the next section.

Import Trusted Roots into PAN

Next, you need to import the certificates into PAN. In the PAN OS:

- Go to **Device** > **Certificate Management** > **Certificates**.
- Click the **Import** button at the bottom.
- The **Import Certificate** configuration modal (below) appears. Import the two certificates obtained in the previous section.

> We configured the steps below on PAN OS `10.2.2`. The screenshots might vary depending on your software version, and on whether you are using PAN OS vs. Panorama.

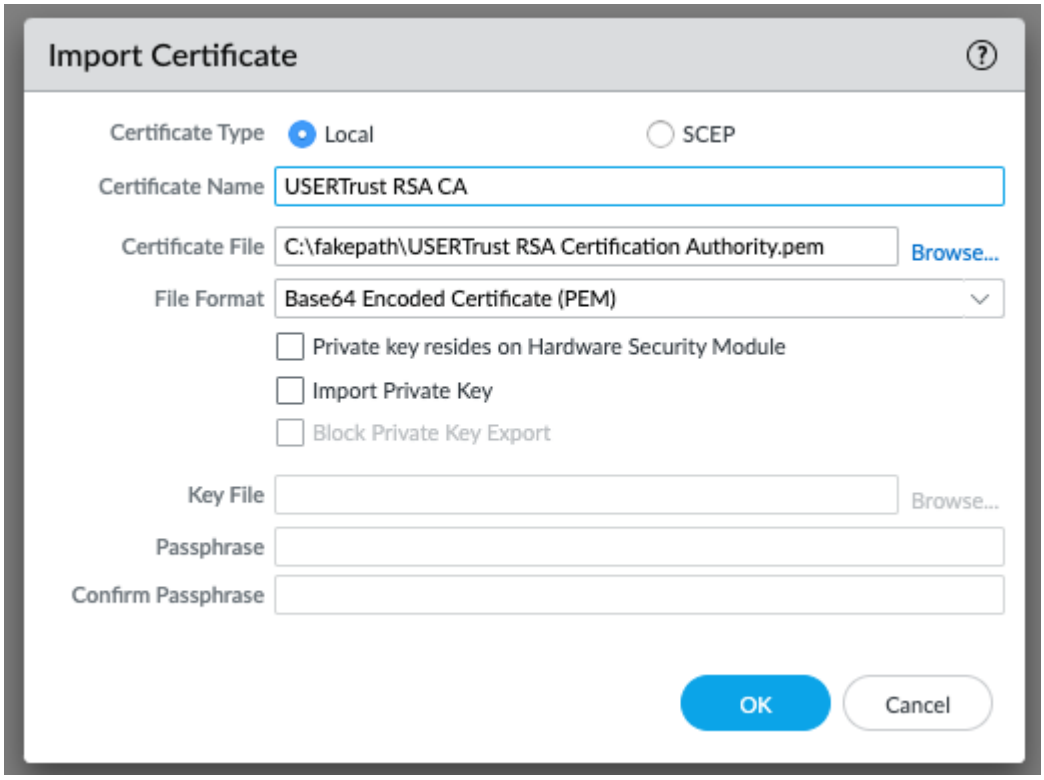

Import Certificate

- Once you have imported both certificates, go to the **Device Certificates** table and click on the blue link for each certificate you just imported.

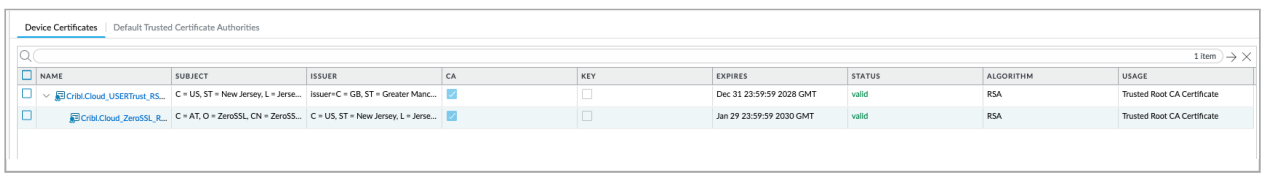

- Select the **Trusted Root CA** check box for each certificate.

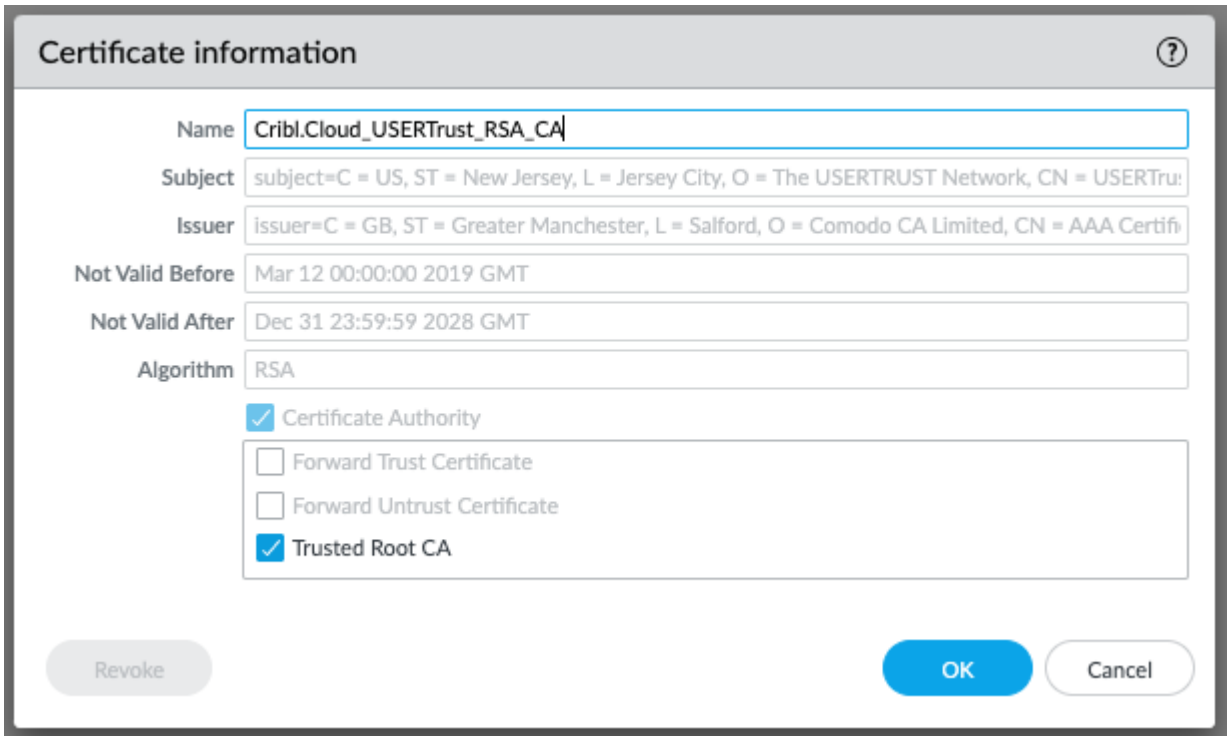

Certificate information

Configure the Syslog Server Profile

After importing the certs, create a new Syslog Server Profile in **Device** > **Server Profiles** > **Syslog**.

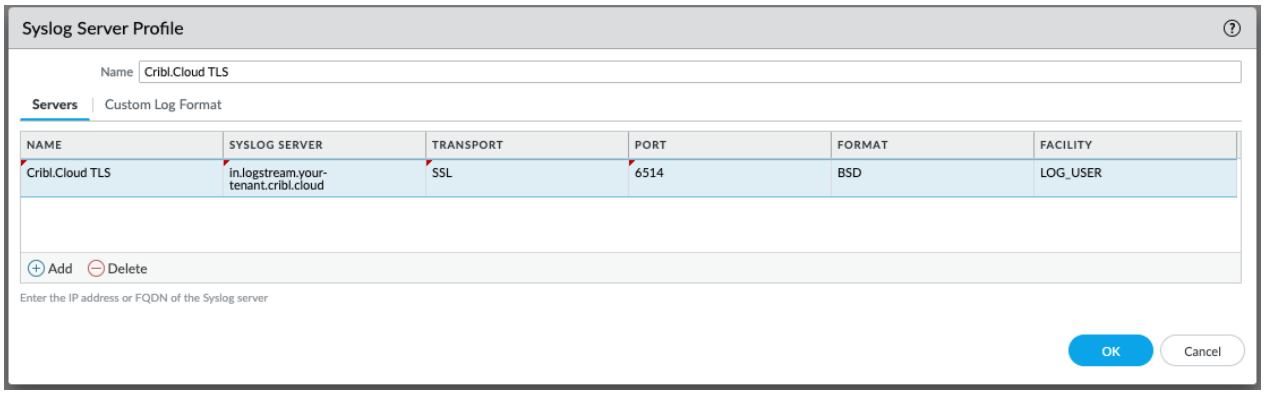

Syslog Server Profile

The Syslog server is the ingress to your Cribl.Cloud Organization. If this isn't displayed at the top of your Organization's portal, click **Network Settings** to locate it. It will be of this form:

```
in.main-default-<OrganizationID>.cribl.cloud
```

Configure Log Settings to Use the Syslog Profile

Next, configure your log settings to use the Syslog Profile.

Go to **Device > Log Settings** and configure each relevant section with the appropriate settings.

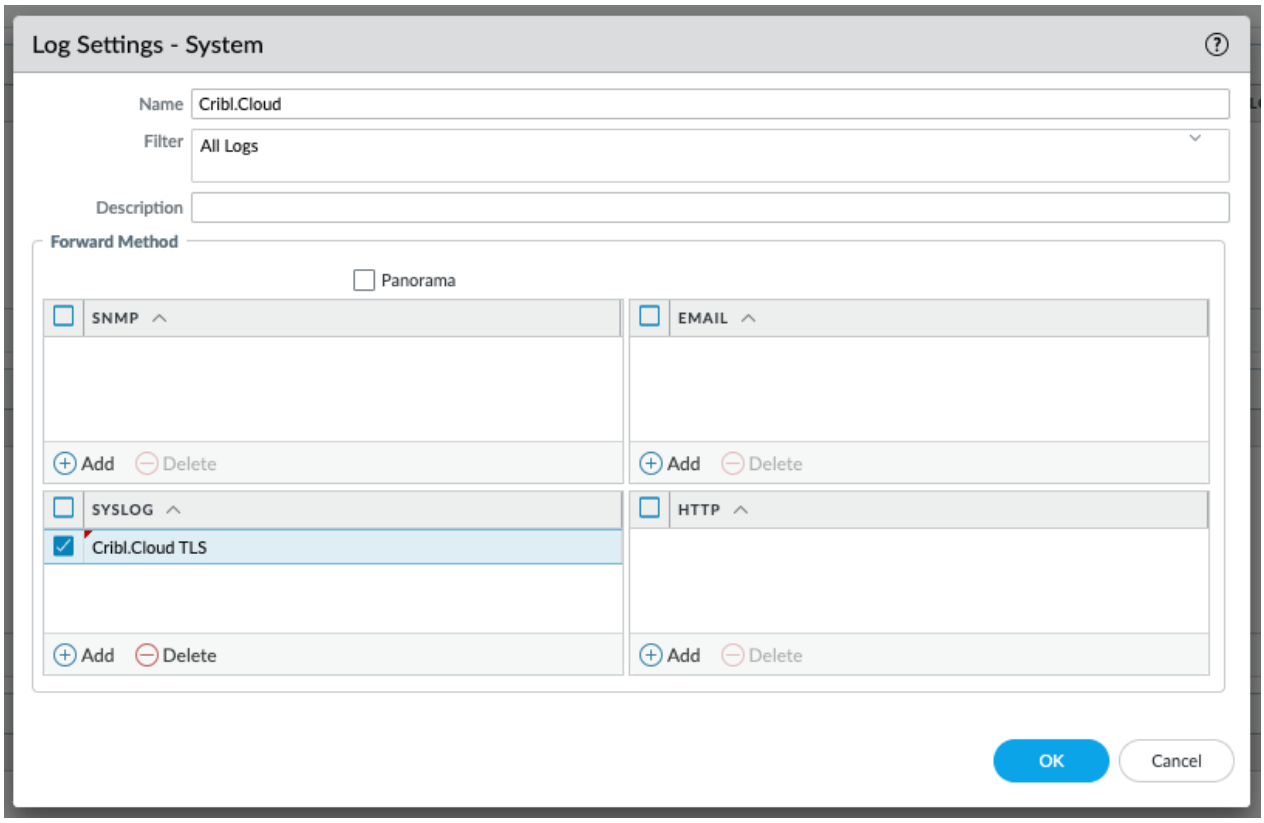

Log Settings

Configure Firewall Rule Log Forwarding

Use the **Log Forwarding Profile** to create a ruleset and configure the appropriate log types to be forwarded.

Go to **Objects > Log Forwarding** and configure each relevant section with the appropriate settings.

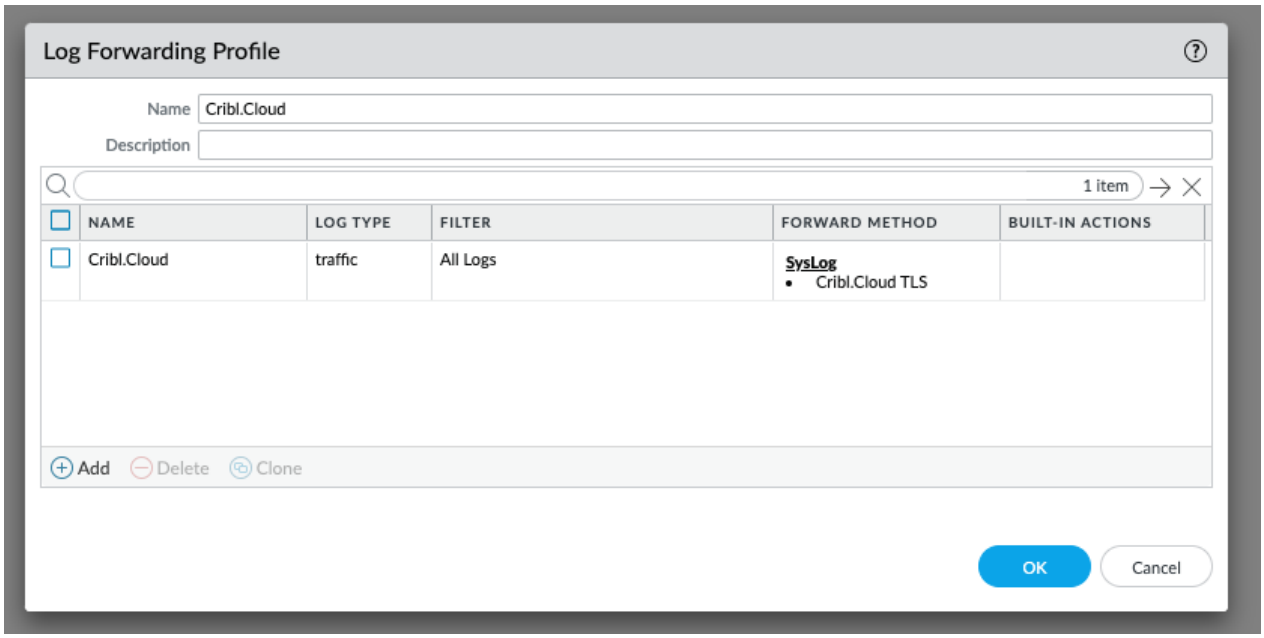

Log Forwarding Profile

Forward Admin Activity Logs

Admin activity logs can provide more context to your logs. To forward your admin activity logs:

Go to **Device > Setup > Management**, and click the gear icon in the **Logging and Reporting** settings.

Enable the **Debug and Operational Commands** and **UI Actions**, and choose the appropriate Syslog server.

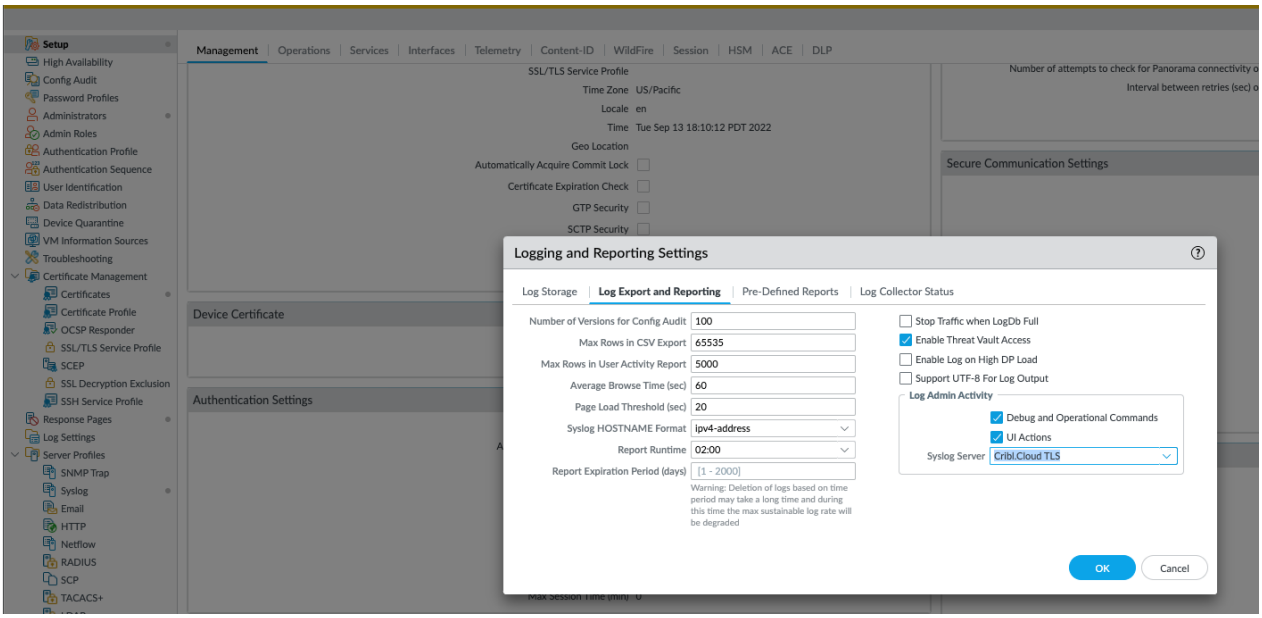

Forwarding admin activity logs

Customize OCSP Validation Settings for the `syslog-ng` Process

If the certificate validation fails, follow these steps to customize the validation settings for the `syslog-ng` process. You'll need to shell into the box to perform them.

These commands are for an individual PAN OS device, and might be different for Panorama:

```
set syslogng ssl-conn-validation all-conns skip
set syslogng ssl-conn-validation explicit OCSP skip CRL skip EKU skip
```

Validation

To validate whether you have successfully set up the TLS-encrypted Syslog, check the logs on your PAN OS.

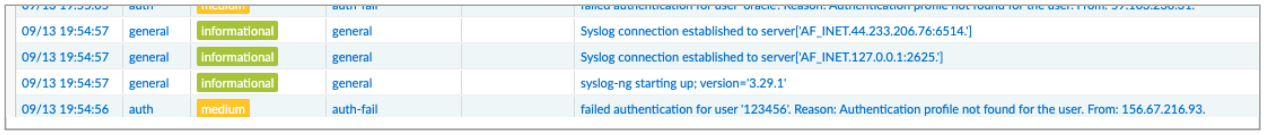

Validating syslog setup

Troubleshooting

If you run into issues not anticipated above, you can use some of the following commands to further diagnose them:

```
# restart the syslog-ng process
debug syslog-ng restart

# see syslog-ng process logs
tail follow yes mp-log syslog-ng.log

# get stats for processes
debug log-receiver statistics
debug syslog-ng stats

# tcpdump activity on the syslog port and view the results
# note: control-c to exit the tcpdump, it will not show anything on the cli when
running
tcpdump filter "port 6514" snaplen 0
view-pcap mgmt-pcap mgmt.pcap
```

14.2.12. System Metrics to Grafana

Cribl Stream can collect metrics from the host on which it is running, and can populate some standard metrics dashboards right out of the box. For metrics details, see Linux System Metrics Details. While, Grafana is a multi-platform open source analytics and interactive visualization web application. It provides charts, graphs, and alerts for the web when connected to supported data sources.

Cribl has configured a Prometheus dashboard to display Cribl Stream System Metrics, and shared the dashboard in the Grafana library, which is public. This is a relatively simple dashboard suitable for showing aggregate metrics.

Another useful dashboard is the one that's commonly used with Prometheus and their Node Exporter agent, found here. This dashboard can handle the highly detailed metrics.

In this guide, we will show you how to route system metrics to a Grafana dashboard for both basic and highly detailed metrics visualizations.

We will walk you through the following:

- Configure System Metrics Source on Cribl Stream to receive metrics from the host.
- Configure the Prometheus Destination to send data to Grafana Cloud.
- Access Grafana Cloud to see the metrics and visualizations.

Configure the System Metrics Source on Cribl Stream

In Cribl Stream, start by configuring and enabling a [System Metrics Source](sources-system-metrics. The key requirement here is to to decide on the level of details for the metrics you want to collect. In the **Host Metrics** and **Container Metrics** tabs:

- For the relatively simple dashboard showing aggregate metrics, choose the **Basic** mode for most of your metrics.
- For the highly detailed metrics visualizations dashboard, choose the **All** mode for all of your metrics.

In the **Pre-Processing** tab, select the `prometheus_metrics` **Pipeline**.

When done, **Commit** and **Deploy** your changes. Before moving on to the next step, check the **Live Data** tab to make sure the metrics are generated.

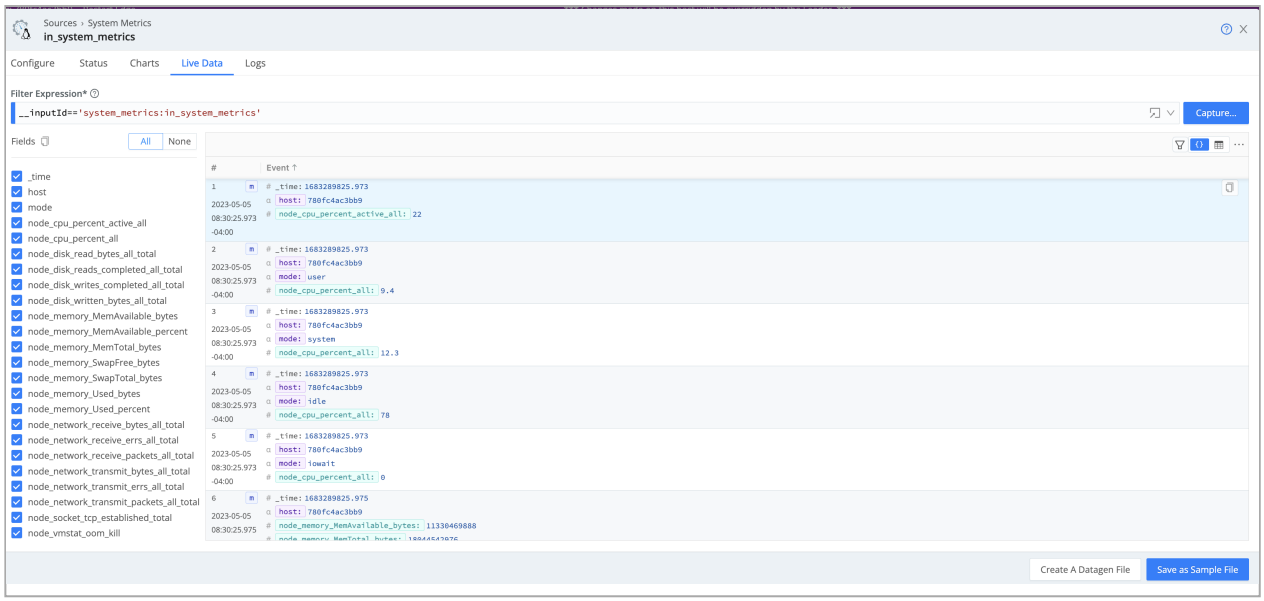

Basis System Metrics

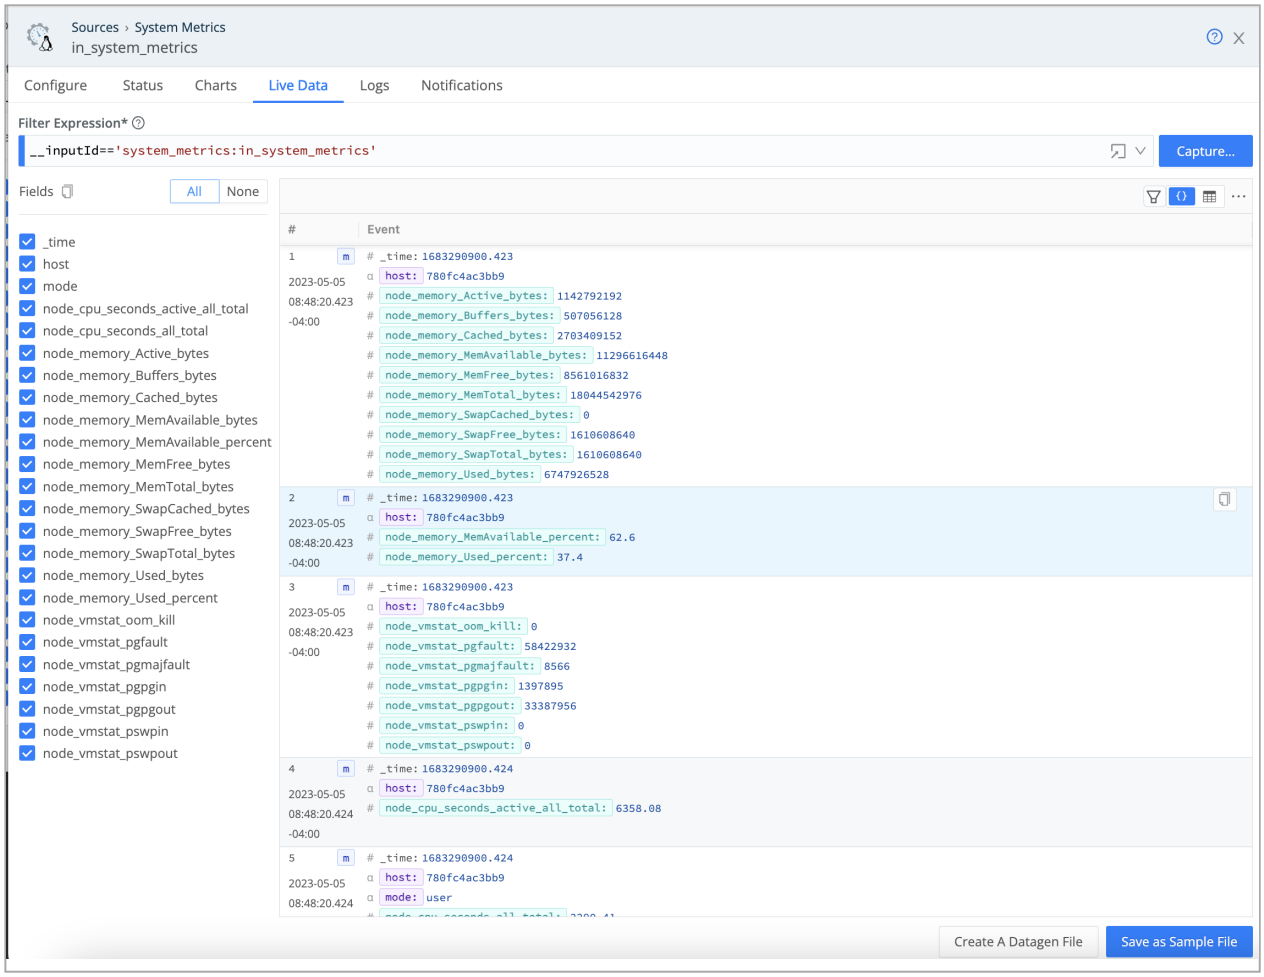

Detailed System Metrics

(Optional) Adjust the `prometheus_metrics` Pipeline

Optionally, you can adjust the `prometheus_metrics` Pipeline to include the `host` dimension or add/remove more dimensions.

Select **Manage** from the top nav, then select a **Fleet** to configure. From a Fleet's top nav, select **More** > **Pipelines**.

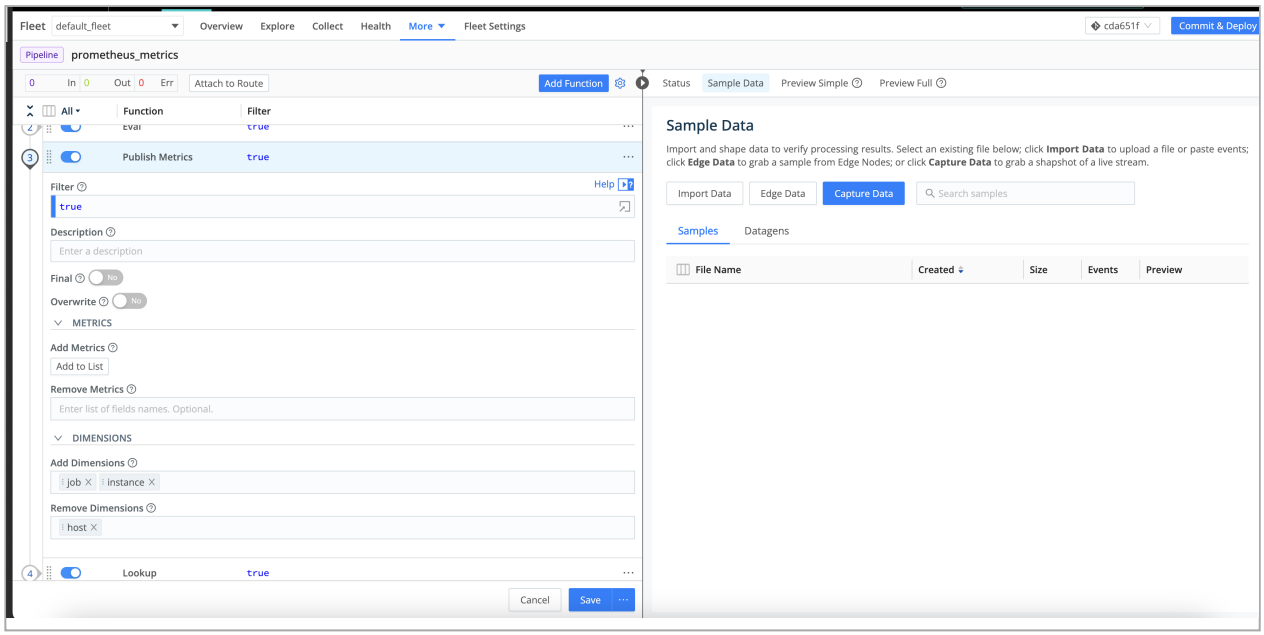

Adjust the Pipeline

Configure the Prometheus Destination

Next, we'll configure the Prometheus Destination to send data to Grafana Cloud.

Next, preview your data on the modal's **Live Data** tab.

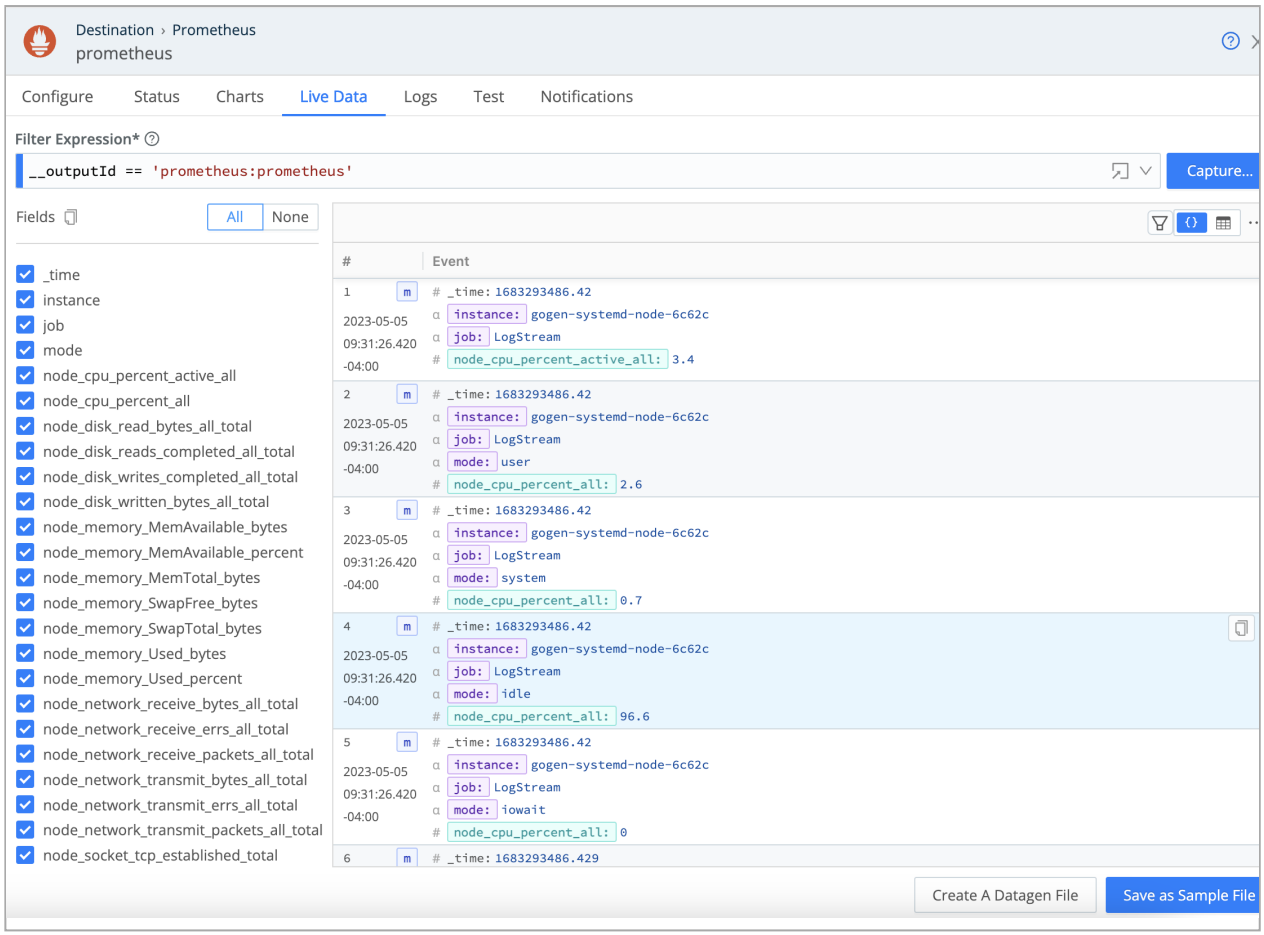

Preview Live Data

Visualize the Data in Grafana

Navigate to your Grafana Cloud instance, and select **Explore** on the left panel to review the node metrics. Selecting metrics and running the query will produce a chart and table of metric events that can be added to new or existing dashboards for analysis. If you are missing some expected metrics, you might need to adjust the variables in your Grafana Cloud instance. For details, see Variables.

Use the Grafana **Filter** option to browse the dashboards for your Prometheus data. Below are the Cribl dashboards with the basic and detailed metrics shown.

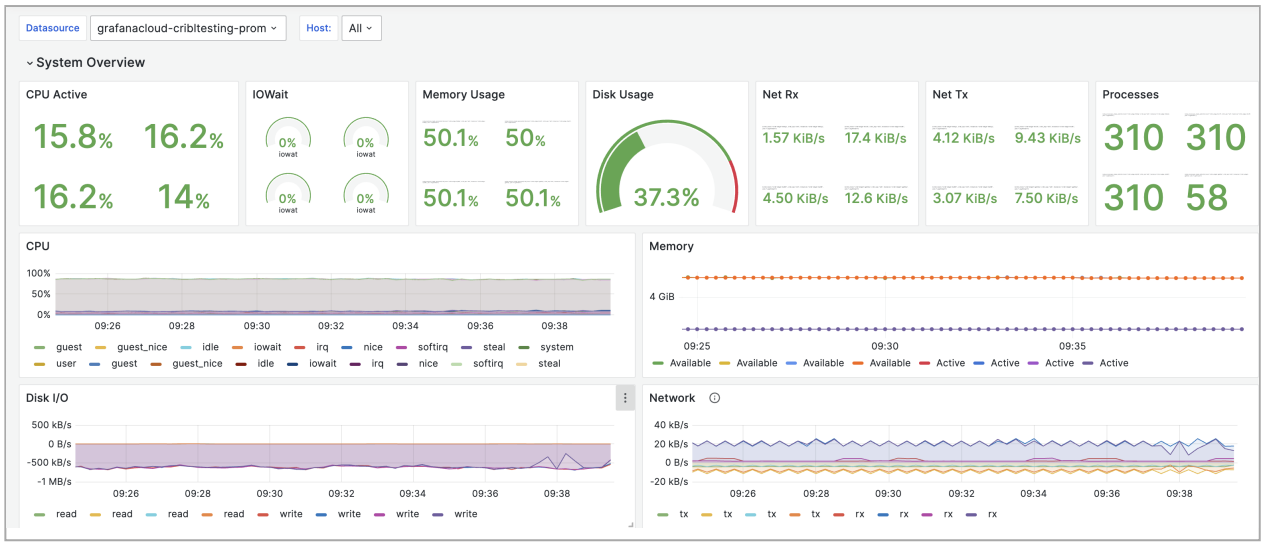

Cribl Node Observability

To view the detailed panels, select the arrow for each category:

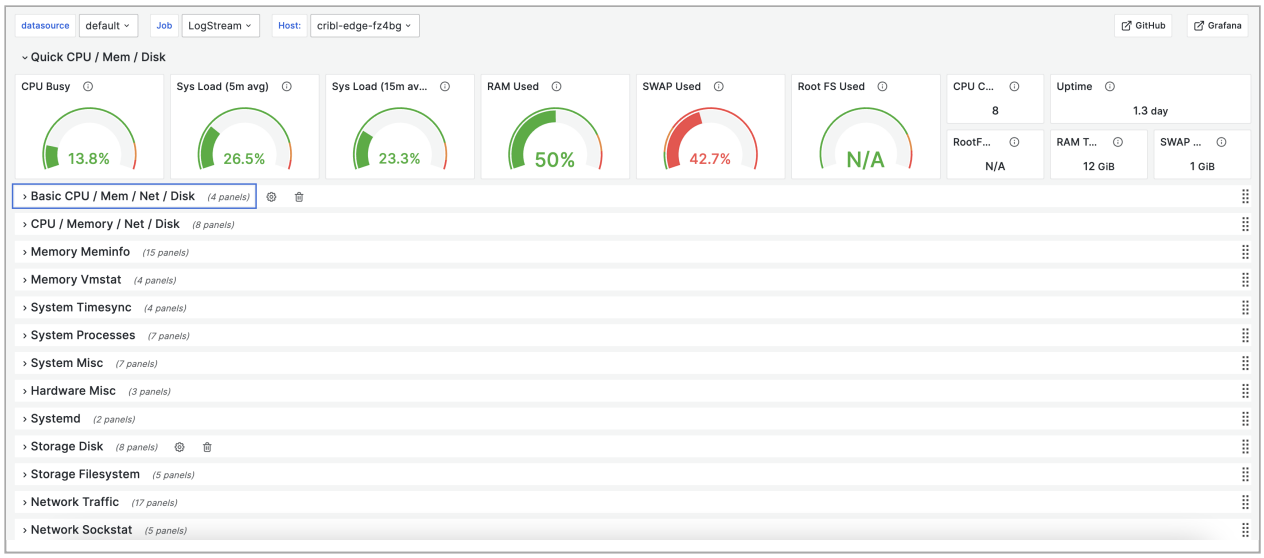

Node Exporter Full

14.2.13. Tanium to Cribl Stream

Tanium is a security platform that provides rapid searches across multiple endpoints. Tanium integrates with a finite number of tools using its Tanium Connect module, but this can still leave gaps in conforming Tanium output to the specific data formats required by unsupported tools and destinations.

Cribl Stream can help collect, reduce, enrich, transform, and route data from Tanium to any destination. This includes SIEM (Security Information and Event Management) tools, logging tools, or other analytics platforms. In this guide, we'll explain how to configure Tanium Connect to send Tanium-captured data to Cribl Stream. For further details, see Tanium's Configuring SIEM Destinations topic.

Configure Tanium Connect

A Tanium Connection is essentially a scheduled search/collection of data linked to a destination. Tanium translates queries into **Questions**. It formats the Questions into the Tanium Search Language for a search, providing near real-time results.

The first step in configuring Tanium Connect is to set up a Question. A Question can be a Saved Search, Question Log, Client Status, or an Event.

To configure a new connection, go to the **Tanium Module** page and click **Tanium Connect**. On the **Connect Overview** page, scroll to the **Connections** section, and click **Create Connection**.

Specify General Connection Information

Name: A unique name for your connection.

Description: An optional description for this connection.

Advanced Settings: Optionally, configure the following fields:

- **Log Level**: Defaults to **Information**. Change the **Log Level** to **Trace** or **Debug** if plan to debug the connection. Alternatively, set the **Log Level** to **Warning**, **Error**, or **Fatal** to reduce the amount of logging.
- **Minimum Pass Percentage**: Minimum percentage of the expected rows to process for the connection to succeed.
- **Memory Ceiling (GB)**: Maximum memory for the node process to run the connection.

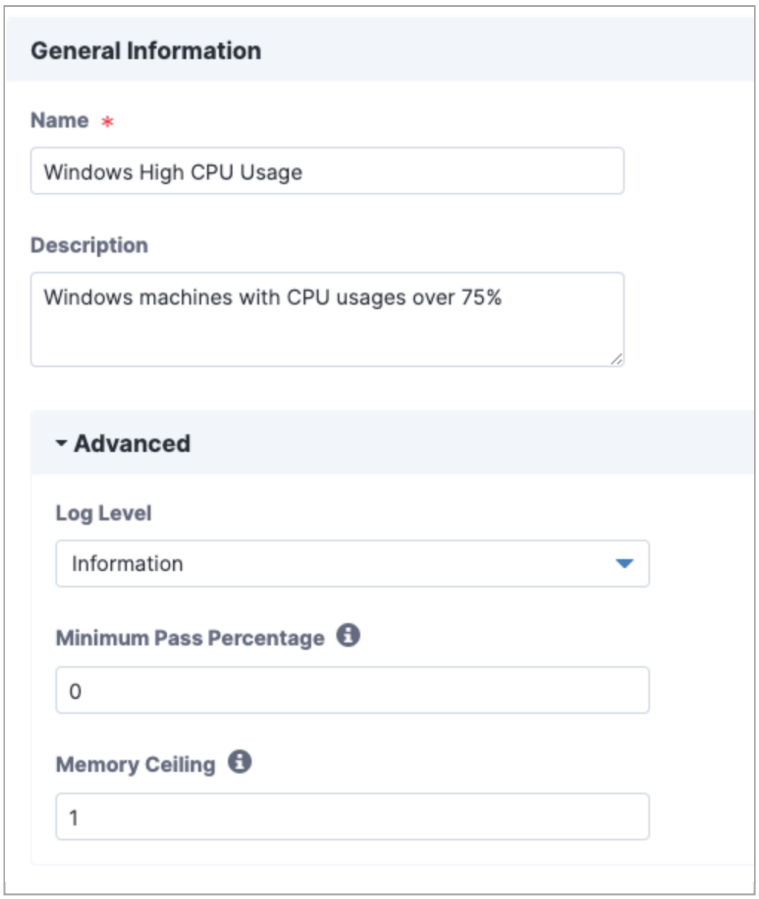

General Connection Information tab

Configure the Connection Source

This section enables you to specify the type of data you are sending to your destination. The data is usually information from Tanium, such as a Saved Question, Question Log, Client Status, or Event. The settings vary depending on the Source.

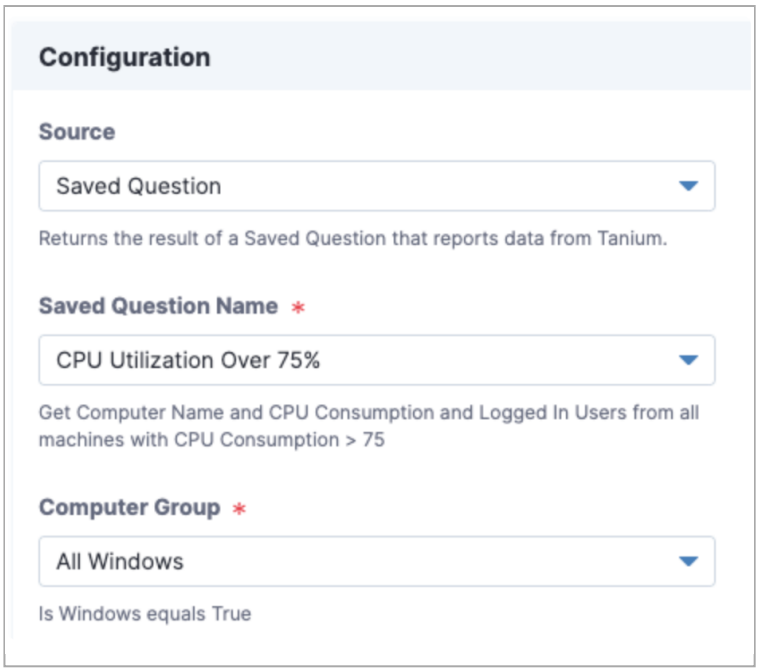

Connection Source Configuration

> When sending logs to Cribl Stream, you must create a network egress rule in Tanium for port 10060. See Tanium's Configure a new network egress rule topic.

Configure Your Destination

In this section, we'll configure Cribl Stream as the destination, using the following fields.

Destination: Select the destination type. For our example, we'll configure it as a `Socket Receiver`.

New: Configure a new destination.

Name: Specify a unique name for your new destination. (This field is displayed only when configuring a **new** destination.)

Existing: Update the settings on an existing destination. (Note that this will affect all the connections that use this destination.)

Destination Name: Drop-down list where you can specify a preconfigured destination. Displayed only when updating an **existing** destination.

Copy Settings: Copy settings from a preconfigured destination.

Host: Specify the destination'server host.

Network Protocol: Specify how to connect to the server (e.g., `TCP`).

Port: Enter the port number to listen on.

Secure: Select this option to use TLS encryption.

Trust on First Use: Select this option to accept the certificate presented from the server, and to trust **only** that certificate for future connection runs.

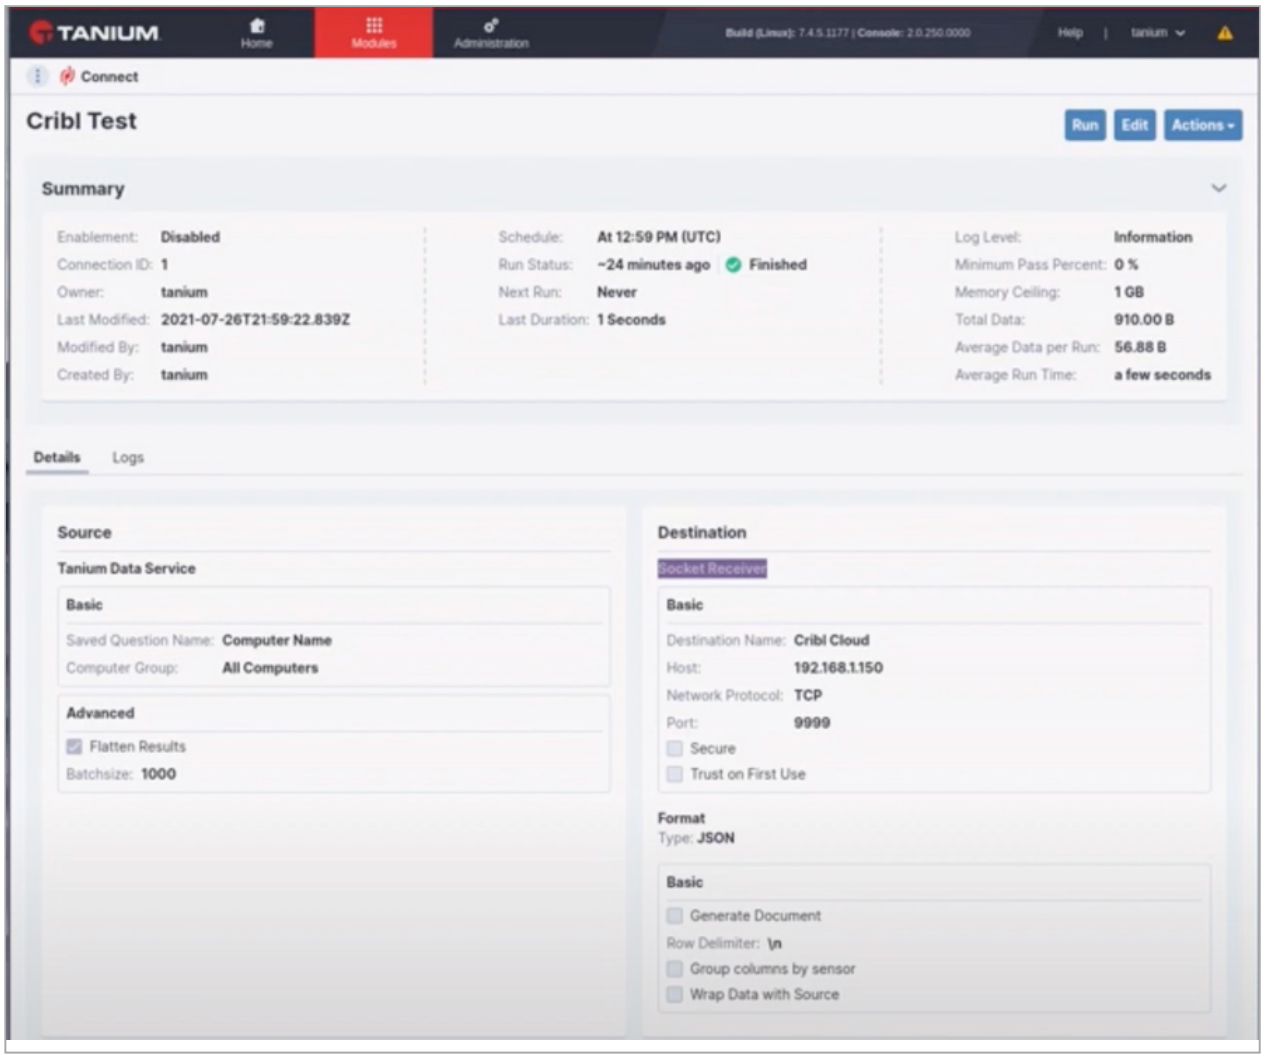

Sample Cribl Stream Configured Destination

Format the Data

When you select a destination, the expected data format is displayed by default. For example, if you select Splunk, the `Syslog RFC 5424` automatically pre-populates the **Format Type** field. However, you can customize the format as needed. (For details, see Tanium's Format Types topic.)

Format Type: When sending to Cribl Stream, select the `JSON` data format for best results.

In the **Columns** section, configure the columns that you want to pass on to your Destination. (For details, see Tanium's Column Customizations topic.)

- **Source**: Check the box next to each **Source** to include the columns in your Destination.
- **Destination Labels**: You can optionally assign a new column heading. Defaults to the **Source** name.
- **Value Types**: You can change the data type to `String`, `Numeric`, or `Data/Time` value.
  - If you select a `Numeric` value, you must specify a default value. It can be any integer.
  - If you select a `Data/Time` value, specify the format to apply for the column. R(For details, see Tanium's Time Stamp Variables topic.)

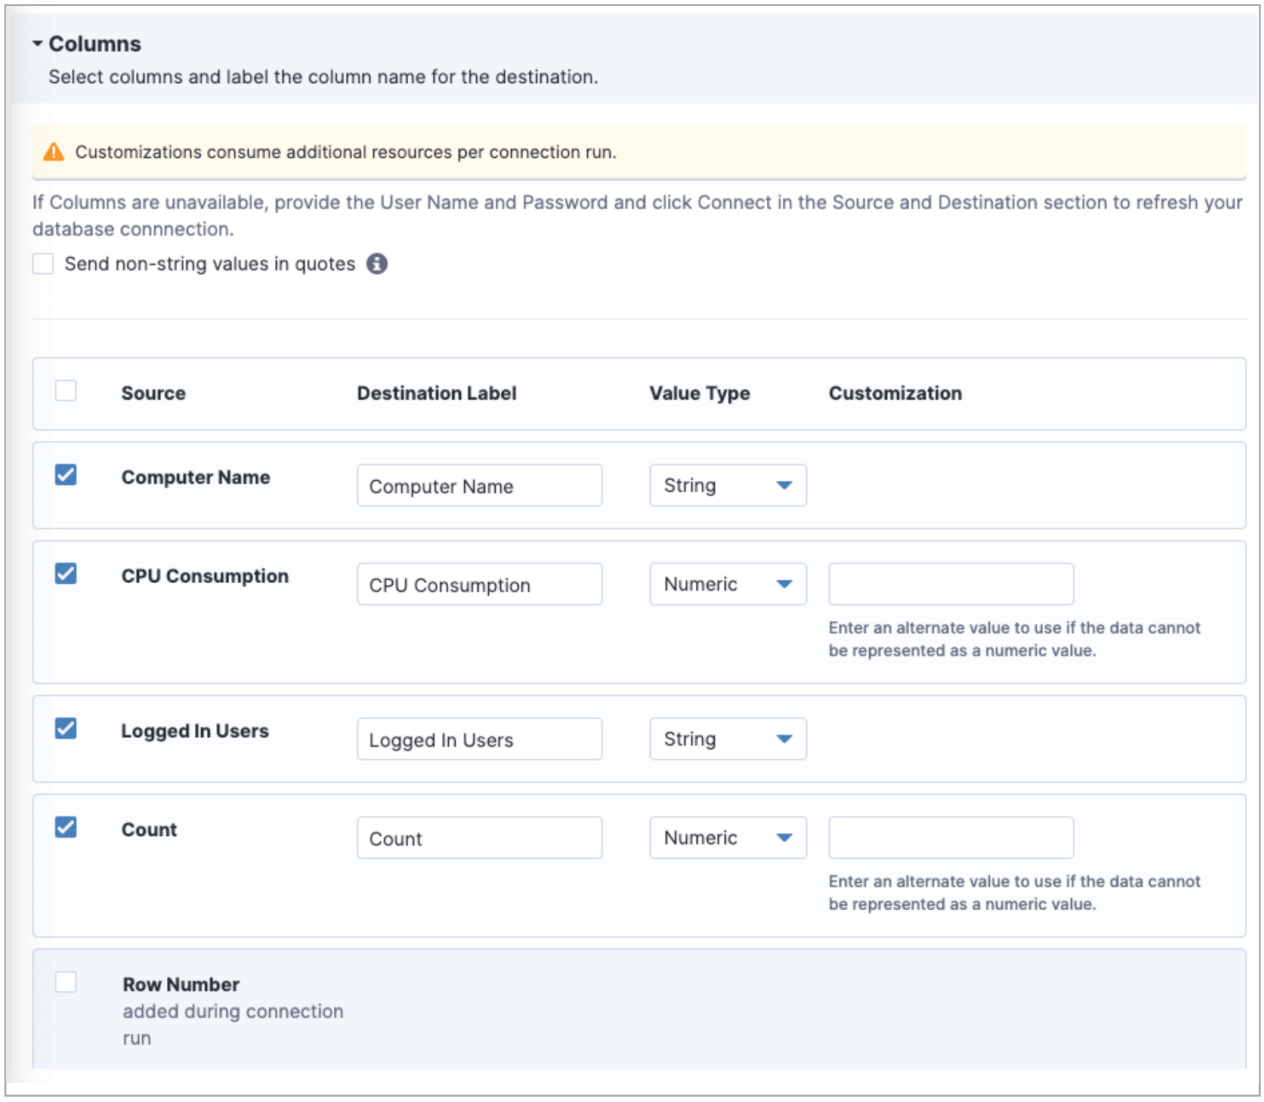

Configure your columns

Schedule the Connection

Connections can run at a highly configurable time interval – anywhere from multiple times per hour, to daily, weekly, or monthly intervals. The **Schedule** section allows you to enable and configure the scheduler.

Enable Schedule: If you do not enable the scheduler here, the connection will run only when you explicitly run it.

Schedule Type: Select **Basic** to build a schedule with the provided controls.

Advanced – Define as a Cron Expression: Select this field to view or edit the cron expression directly.

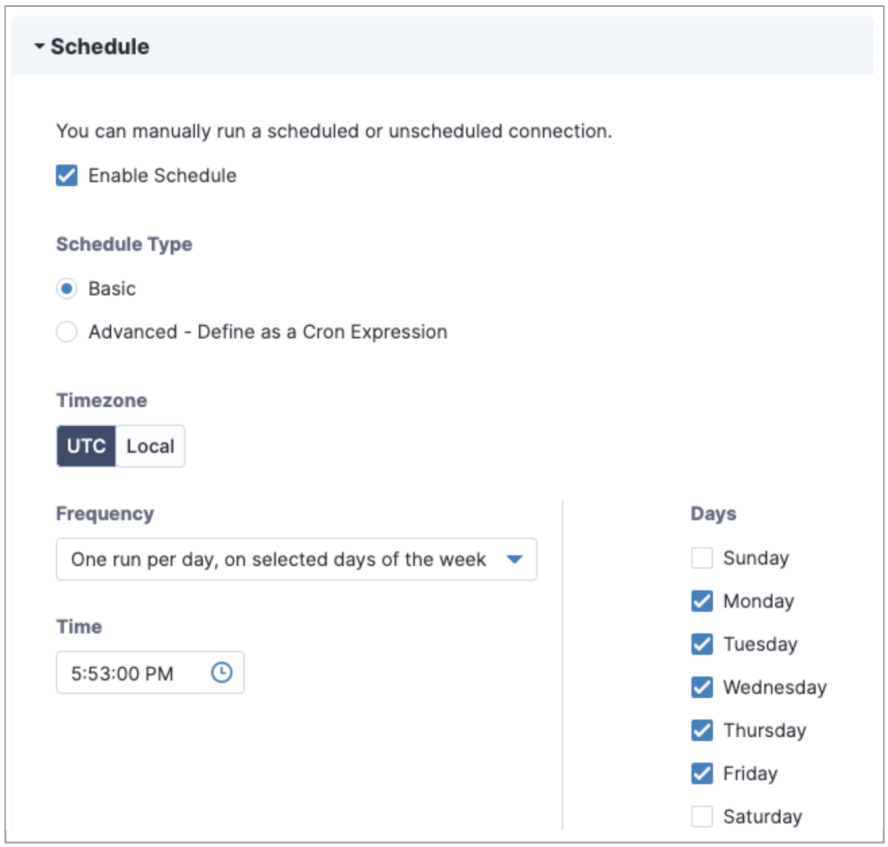

Configure your columns

> If the user who owns a connection is deactivated, future instances of a scheduled connection will not run. For details, see Tanium's Deleted User Troubleshooting topic.

Save and Verify the Connection

When you are done configuring your connection, click **Save**.

To view details when the connection runs, select the **Logs** tab. To inspect an individual run log, expand the row table.

For help on resolving errors, see Taniuum's Troubleshooting topic.

You can also click **Run and Save** to save and immediately run the connection. Connection details will be displayed for successful connections.

Configure Cribl Source

On your Cribl Stream instance, configure a TCP Source to receive the data from your configured Tanium connection. For a video demo of this step, see this Tanium blog post.

14.3. Lookup Applications

14.3.1. Ingest-Time Lookups

Enriching Data in Motion

To enrich events with new fields from external sources (such as `.csv` files), we use Cribl Stream's out-of-the-box Lookup Function. Ingestion-time lookups are not only great for normalizing field names and values, but also ideal for use cases where:

- Fast access via the looked-up value is required. For example, when you don't have a `datacenter` field in your events, but you do have a `host-to-datacenter` map, and you need to search by `datacenter`.
- Looked-up information must be temporally correct. For example, assume that you have a highly dynamic infrastructure, and you need to resolve a resource name (e.g., a container name) to its address. You can't afford to defer this to search time/runtime, as the resource and its records might no longer exist.

> To use large binary databases (like GeoIP `.mmdb` files) for Cribl Stream lookups, see Managing Large Lookups. To achieve faster lookups, use Cribl Stream's Redis Function.

Working with Lookups – Example 1

Let's assume we have the following lookup file. Given the field `conn_state` in an event, we would like to add a corresponding ingestion-time field called `action`.

```
action,"conn_state","conn_state_meaning"
dropped,S0,"Connection attempt seen, no reply."
allowed,S1,"Connection established, not terminated."
allowed,SF,"Normal establishment and termination."
blocked,REJ,"Connection attempt rejected."
allowed,S2,"Connection established and close attempt by originator seen (but no
reply from responder)."
allowed,S3,"Connection established and close attempt by responder seen (but no reply
from originator)."
allowed,RSTO,"Connection established, originator aborted (sent a RST)."
allowed,RSTR,"Established, responder aborted."
dropped,RSTOS0,"Originator sent a SYN followed by a RST, we never saw a SYN-ACK from
the responder."
dropped,RSTRH,"Responder sent a SYN ACK followed by a RST, we never saw a SYN from
the (purported) originator."
dropped,SH,"Originator sent a SYN followed by a FIN, we never saw a SYN ACK from the
responder (hence the connection was 'half' open)."
dropped,SHR,"Responder sent a SYN ACK followed by a FIN, we never saw a SYN from the
originator."
allowed,OTH,"No SYN seen, just midstream traffic (a 'partial connection' that was
not later closed)."
```

First, make sure you have a Route and Pipeline configured to match desired events.

Next, let's add a **Lookup** function to the Pipeline, with these settings:

- **Lookup file path**: `$SPLUNK_HOME/etc/apps/Splunk_TA_bro/lookups/bro_conn_state.csv` (note that Environment variables are allowed in the path).
- **Lookup Field Name in Event** set to `conn_state`.
- **Corresponding Field Name in Lookup** set to `conn_state`.
- **Output Field Name from Lookup** set to `action`.
- **Lookup Field Name in Event** set to `action`.

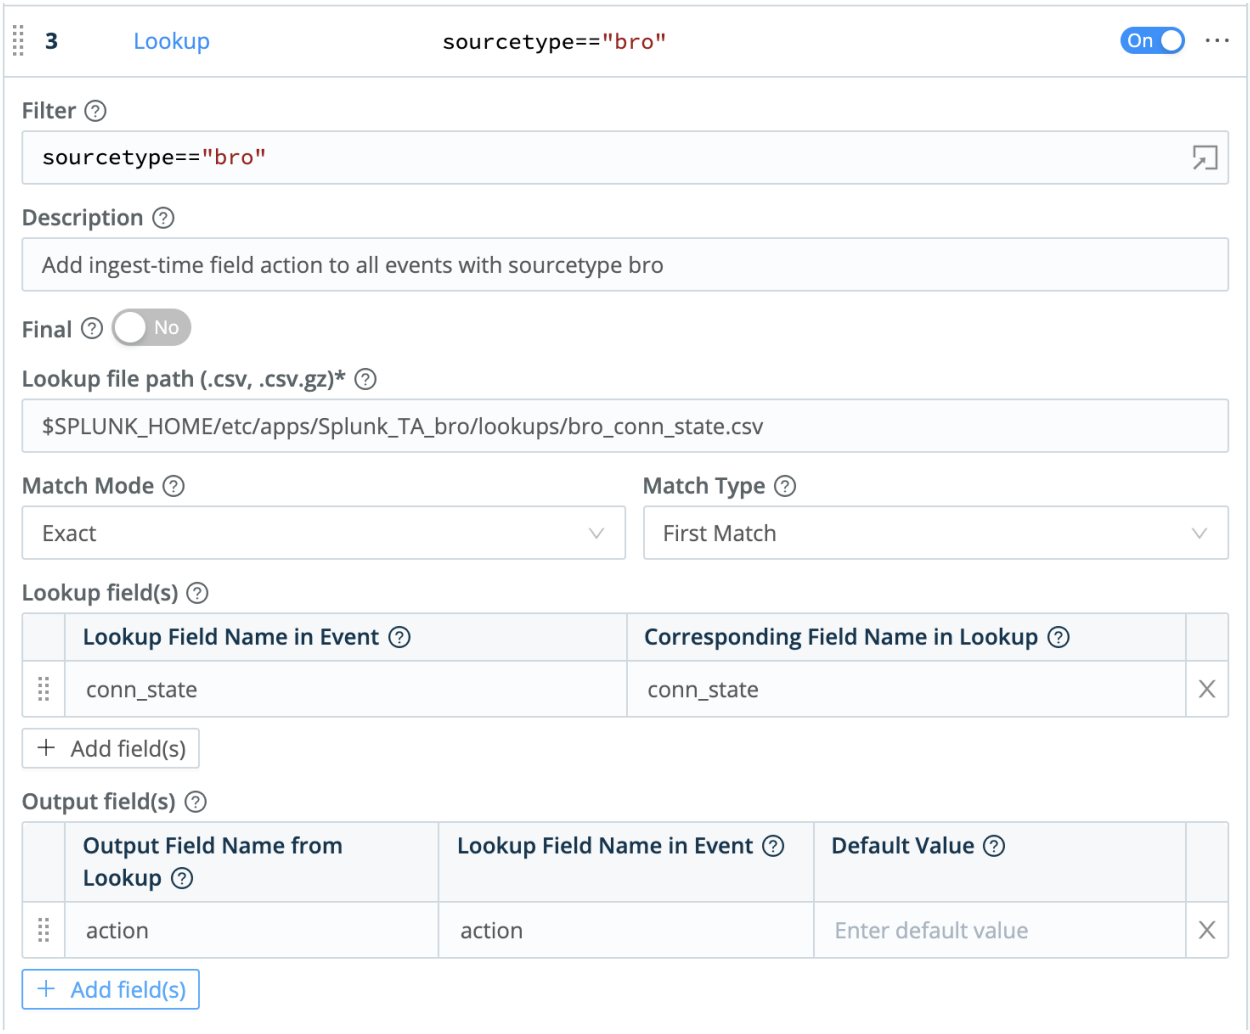

Lookup Function to add `action` field

To confirm success, verify that this search returns expected results: `sourcetype="bro" action::allowed`. Change the `action` value as necessary.

Working with Lookups – Example 2

Let's assume we have the following lookup file, and given **both** the fields `impact` and `priority` in an event, we would like to add a corresponding ingestion-time field called `severity`.

```
impact,priority,severity
1,high,critical
2,high,critical
3,high,high
4,high,high
0,high,high
"*",high,high
.....
"*",medium,medium
1,low,medium
2,low,medium
3,low,low
4,low,low
0,low,low
"*",low,low
1,none,low
2,none,low
3,none,informational
4,none,informational
0,none,informational
"*",none,informational
```

First, make sure you have a Route and Pipeline configured to match desired events.

Next, let's add a **Lookup** function to the Pipeline, with these settings:

- **Lookup file path**: `$SPLUNK_HOME/etc/apps/Splunk_TA_sourcefire/lookups/cisco_sourcefire_severity.csv` (note that Environment variables are allowed in the path).
- **Lookup Field Name(s) in Event** set to `impact` and `priority`.
- **Corresponding Field Name(s) in Lookup** set to `impact` and `priority`.
- **Output Field Name from Lookup** set to `severity`.
- **Lookup Field Name in Event** set to `severity`.

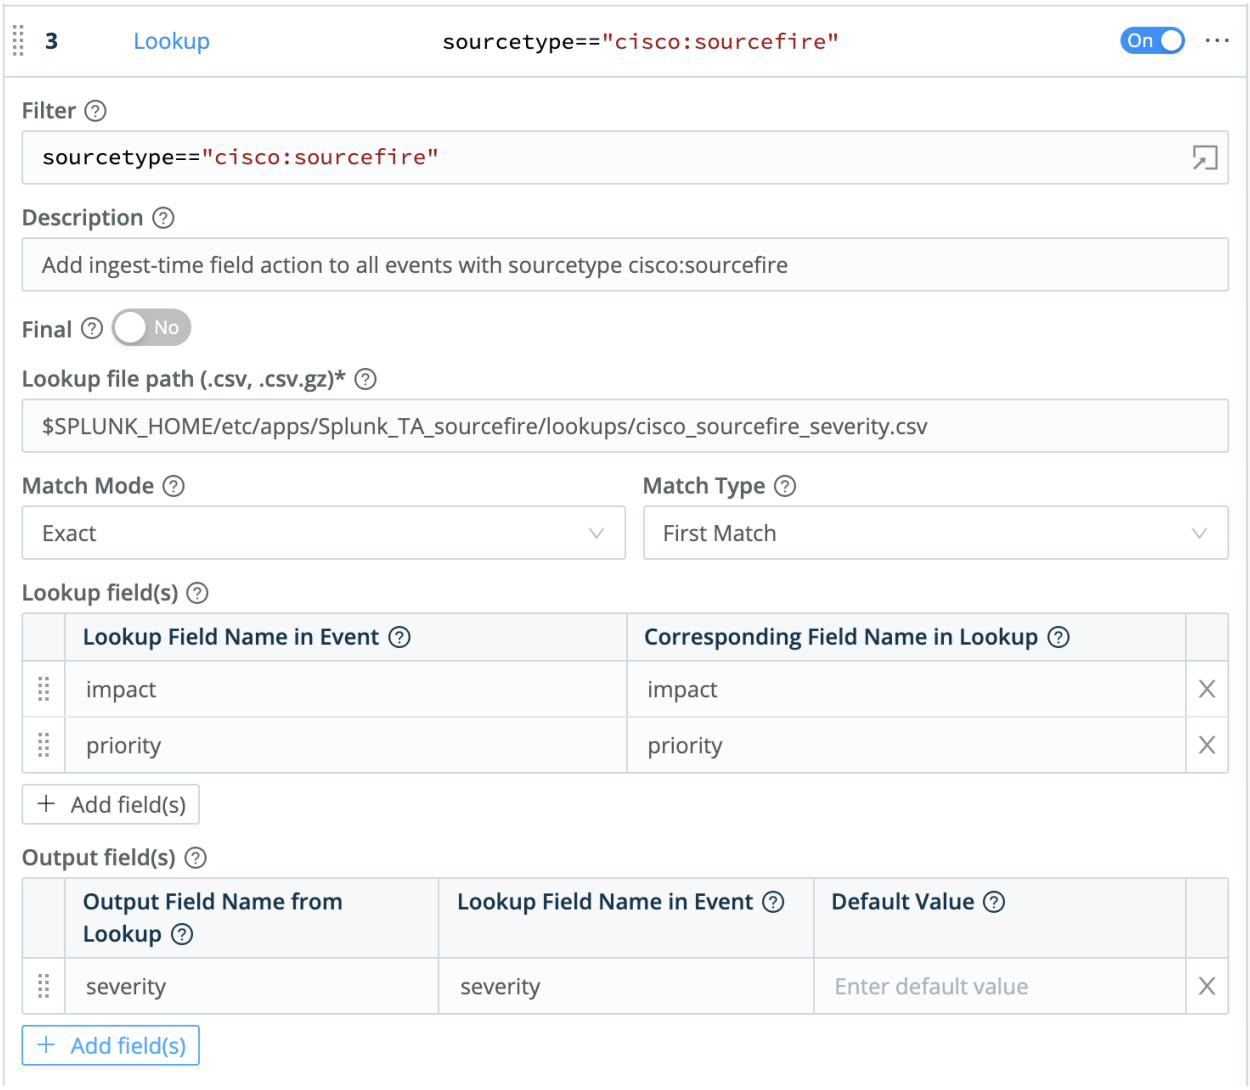

Lookup Function to add `severity` field

To confirm success, verify that this search returns expected results: `sourcetype="cisco:sourcefire" severity::medium`. Change the `severity` value as necessary.

14.3.2. Managing Large Lookups

This page offers a general approach to managing large lookup files. While Cribl Stream's Git integration normally helps manage configuration changes, large lookups are exceptions. In many cases, you might want to exclude these files from Git, to reduce excessive deploy traffic. This approach can also prevent Git Push commands from encountering large file errors.

Good scenarios for this approach are:

- Large binary files – like databases – which don't benefit from Git's typical efficient storage of only the deltas between versions. (With binary files, Git must replace the whole file for each new version.)
- Files updated frequently and/or files updated independent of Cribl Stream.
- Files replicated on many Worker Nodes.

> The steps below assume access to a command line and (more importantly) to your OS' filesystem. Where you lack such access – for example, in a Cribl Cloud deployment – load lookup files of all sizes via Cribl Stream's UI, as outlined in Lookups Library.

About the MaxMind GeoLite Example

We'll illustrate this with an example that often combines all three conditions: setting up the free, popular MaxMind GeoLite2 City database to support Cribl Stream's GeoIP lookup Function. This example anticipates a Cribl Stream production distributed deployment, where the GeoLite database is updated nightly across multiple Workers.

This example includes complete instructions for this particular setup. However, you can generalize the example to other MaxMind databases, and to other large lookup files – including large `.csv`'s that similarly receive frequent updates.

Reducing Deploy Traffic

The general approach for handling large lookups is:

- Do not place these files in the standard `$CRIBL_HOME/data/lookups`.

- Instead, place them in a `$CRIBL_HOME` subdirectory that's excluded from Git version control, through inclusion in the `$CRIBL_HOME/.gitignore` file. Deploying the files to the Leader Node and all desired Workers will require a manual procedure and will be required for the initial deployment as well as subsequent updates.

The example below uses `$CRIBL_HOME/state` subdirectory, which is already listed in the default `.gitignore` file that ships with Cribl Stream.

> If you prefer, you can use a different path, which might be a path outside `$CRIBL_HOME`. If you choose this alternative, be sure to add that path to `.gitignore`.
>
> However, Cribl recommends using a `$CRIBL_HOME` subdirectory like `$CRIBL_HOME/state`, because this inherits appropriate permissions and simplifies backup/restore operations.

Let's move on to the MaxMind GeoLite specifics.

Download and Extract the Database

To enable the GeoIP Function using the MaxMind GeoLite 2 City database, your first steps are:

1. Create a free MaxMind account, at the page linked above.
2. Log in to your MaxMind account portal and select **Download Databases**.
3. On the Download page, look for the database you want. (In this example, you'd locate the **GeoLite2 City** section.) Note the **Format: GeoIP2 Binary**, and select **Download GZIP**.

GeoLite2 City	**Edition ID:** GeoLite2-City **Format:** GeoIP2 Binary (.mmdb) (APIs) **Updated:** 2020-10-06	• Download GZIP • Download SHA256 • Get Permalinks

GeoLite2 City database: Download binary GZIP

4. Extract the archive to your local system.

5. Change to the directory created when you extracted the archive. This directory's name will correspond to the date you downloaded the file, so in the above `2020-10-06` example, you would use:
   `$ cd GeoLite2-City_20201006`

Copy the Database File to the Leader and Worker Nodes (Recommended)

In distributed deployments, Cribl recommends copying the MaxMind database separately to the Leader and all Worker Nodes, e.g.. placing it in the `$CRIBL_HOME/state` path. This will minimize the Git commit/deploy overhead around nightly updates to the binary database file.

Once in the database's directory, execute commands of this form:

```
$ scp *.mmdb <user>@<master-node>:
$ scp *.mmdb <user>@<worker-node>:
```

> Copy the file to each Worker in the Worker Group where you intend to use Cribl Stream's GeoIP Function.

The above commands copy the `.mmdb` database file into your user's home directory on each Node. Next, we'll move it to `$CRIBL_HOME/state` on each Node. Execute these commands on both the Leader and Worker Nodes:

```
$ sudo mv ~/*.mmdb <$CRIBL_HOME>/state/
$ sudo chown -R cribl:cribl <$CRIBL_HOME>/state/
```

Now that the database is in place, your Pipelines can use the GeoIP Function to enrich data. In the Function's **GeoIP file (.mmdb)** field, insert the complete `$CRIBL_HOME/state/<filename>.mmdb` file path.

Copy the Database File Only to the Leader (Alternative)

In smaller deployments, you might choose to copy this MaxMind database only to the Leader Node, and to let Workers receive updates via Git commit/deploy. In this case, the final commands above might look like this:

Shell

```
$ sudo cp ~/*.mmdb /opt/cribl/groups/<group-name>/data/lookups/
$ cd /opt/cribl/groups/<group-name>/data/lookups/
$ sudo chown cribl:cribl *.mmdb
```

Automatic Updates to the MaxMind Database

To set up automatic updates, see MaxMind's Automatic Updates for GeoIP2 and GeoIP Legacy Databases documentation. You'll need two modifications specific to Cribl Stream:

- This must be set up on the Leader, and on each Worker in any Group that uses GeoIP lookups.
- The default setting in `GeoIP.conf` writes output to `/usr/local/share/GeoIP`. You must change this setting to the path where your databases actually reside. If you're using the recommended architecture above, you'd set: `DatabaseDirectory <$CRIBL_HOME>/state/`.

Memory Considerations

Storage aside, large lookup files can also require additional RAM on each Worker Node that processes the lookups. For details, see Memory Sizing for Large Lookups.

14.3.3. Lookups as Filters for Masks

Overview

You can make your data architecture more maintainable by using Lookups to route and transform events within Cribl Stream. This use case demonstrates an unusual solution, but one that served one Cribl customer's particular goals (which might overlap with yours):

- Ingest many – hundreds of – different `sourcetype` / `index` field combinations.
- Send all this data through a common Pipeline.
- Stack four Mask Functions in the Pipeline.
- Evaluate and process each `sourcetype` / `index` field combination **only** within its applicable Mask Functions – either two or three Masks per combination.

> This last restriction reduces latency, by preventing Mask Functions from evaluating non-applicable events, simply to ignore them.
>
> Just to reiterate, this use case outlined here responded to this customer's requirements – one Pipeline combining multiple Mask Functions, for many `sourcetype` / `index` combinations. More typically, you'd use multiple Pipelines to process different `sourcetype` / `index` combinations.

To enable this approach, the example below centralizes masking logic for multiple conditions in a Lookup table and corresponding Lookup Functions. The Lookup's output filters events to the applicable Mask Functions. Specifically, we'll show how to instruct Cribl Stream to:

- Check for a particular `index` / `sourcetype` combination in each event, and
- Based on that combination, determine which Masks to apply to that event.

Design the Lookup

To use a lookup as a filter, you'd start by creating a comma-separated lookup table in this format, and adding it to Cribl Stream:

```
index,sourcetype,masks
apache_common, sourcetypec, ssn|credit_card|auth_token
syslog,sourcetypeb,ssn|auth_token
weblog,sourcetypea,auth_token|bearer_token
```

Below the header, each row specifies an index, a sourcetype, and (in the third column) a pipe-delimited list of applicable masks.

To make this example work, the table must have only **one** row for each index/sourcetype combination. (This unusual restriction is particular to this scenario.) So, as you build out the lookup table, you cannot add new masks for **existing** index/sourcetype combinations by appending new rows. Instead, you must modify the third column of the existing rows.

Configure the Pipeline

Create a Cribl Stream Pipeline with a Lookup Function configured like this, pointing to your lookup table:

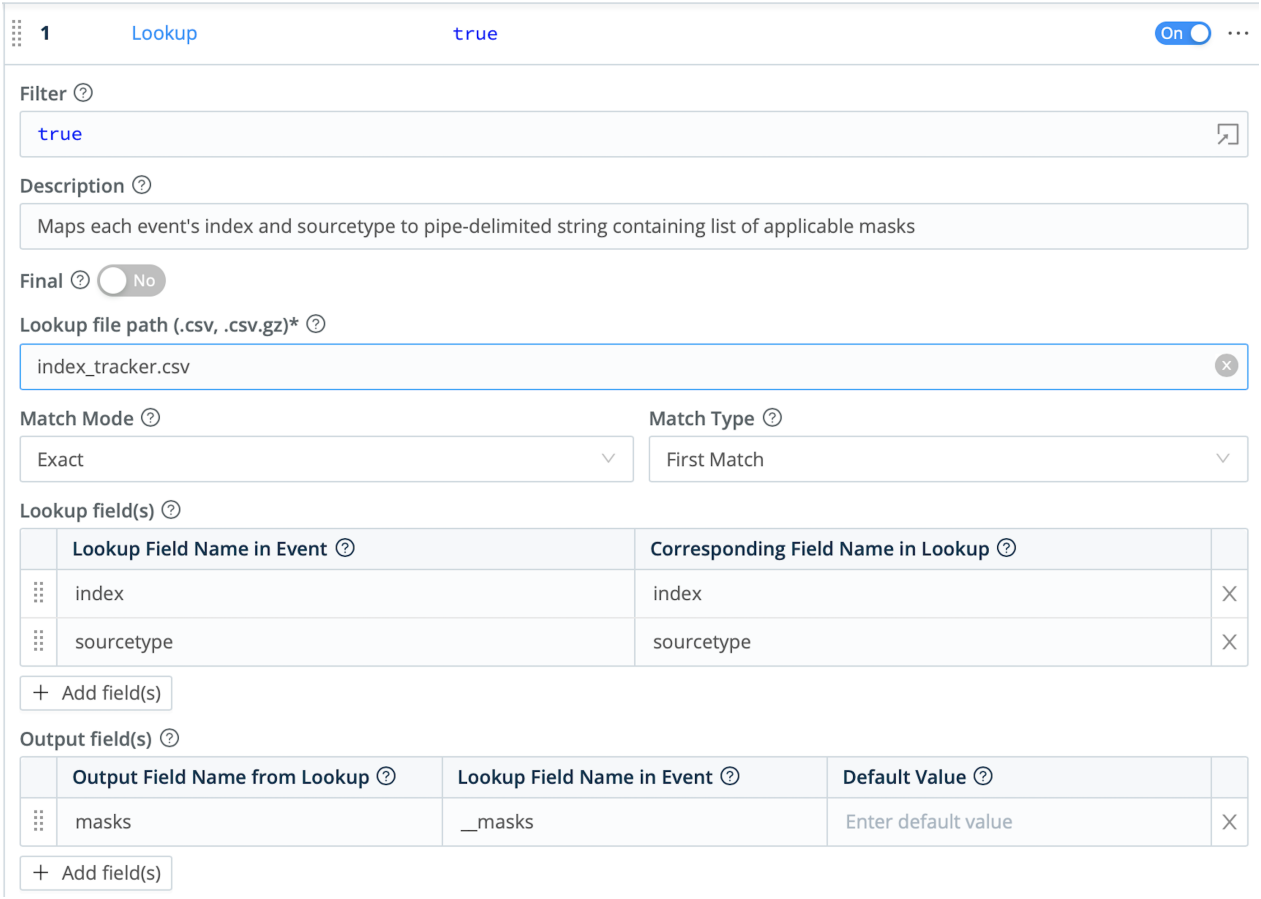

Lookup Function's configuration

This Function keys against both the `index` and `sourcetype` fields. When it finds a matching combination, it adds a new key-value pair to your event for future filtering.

The key of that key-value pair (namely, `__masks`) starts with a double underscore, to make it a Cribl Stream internal field. This convention ensures that the key-value pair will **not** get passed along to the Destination.

However, you might prefer to export the key-value pair. For example, you might want a Splunk Destination to index the list of masks applied to a given event, alongside that event. (This approach applies to many forensic use cases.) If so, remove the double underscore from the above Function's **Lookup Field Name in Event** value, and from the subsequent Filter expressions for each Mask Function.

Each Mask Function has a JavasScript Filter that breaks the pipe-delimited string into an array, and determines whether the tag for that type of mask (e.g., `bearer_auth`) is in the `__masks` key-value pair. If so, it applies the mask processing. If not, the event moves on to the Pipeline's next Mask Function.

Here are the four Mask Functions below the Lookup Function:

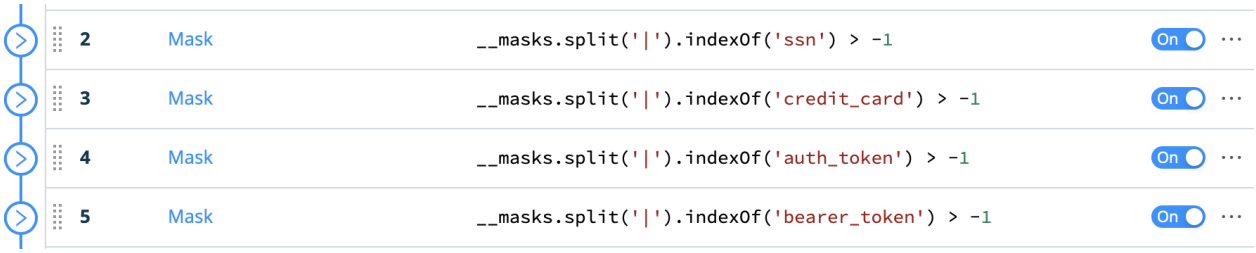

Mask Functions

In this particular example, the pipe-delimited mask tags in the lookup table's third column match the Mask Functions' names, as well as matching their **Filter** conditions. This is just for simplicity – the Functions could have any names, as long as the **Filter** expressions match the tags.

14.3.4. Lookups and Regex Magic

Regular expressions are not just for field extractions – they can also be used inside lookup tables, and in Functions, to replace and manipulate values within fields. Let's walk through a Pipeline that demonstrates four different ways to leverage regular expressions in Cribl Stream.

Why Lookup Tables Matter

When organizations use host naming standards, it is easy to understand things like regions, availability zones (AZs), IP addresses, and more. For example, consider an Amazon host called:

`ec2-35-162-133-145.us-west1-a.compute.amazonaws.com`

This is an EC2 host with a (dashed) IP address `35-162-133-145`, in the `us-west1` region, in Availability Zone `a`. You can also see the domain: `compute.amazonaws.com`.

While we can understand the enriched host names, we don't know which indexes to route the data to, nor which sourcetypes to assign to the events, without looking up this information from another source. Doing so is often a huge challenge for organizations. To solve this challenge, let's combine Regex Extract, Lookup, and Eval Functions with some sample events to demonstrate the power of Cribl Stream.

Sample Events

The events below have timestamps broken out, but no indexes, sourcetypes, or other details have been assigned yet:

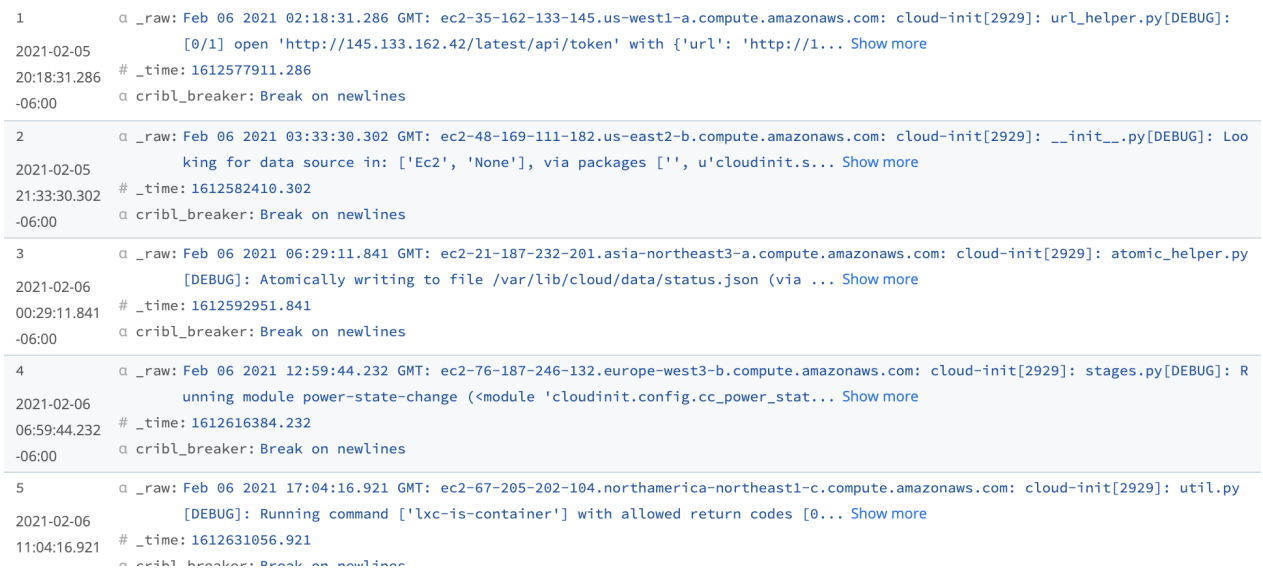

The Regex Extract Function

Before we can assign an index or sourcetype, we need to extract the `host`, `region`, `az`, and `domain` fields from the events. We can use a Regex Extract Function with this regular expression to extract all four fields:

```
GMT:\s+(?<host>[^.]+)\.(?<region>\w+-\w+\d+)-(?<az>[^.]+)\.(?<domain>[^:]+):
```

Here's that Regex Extract in a Cribl Stream Pipeline:

Results of the Regex Extract Function

On the **OUT** tab of Cribl Stream's Preview pane, the extracted fields of `az`, `domain`, `host`, and `region` now appear below the `_raw` event. You can use these extracted fields for searching in your preferred search solution.

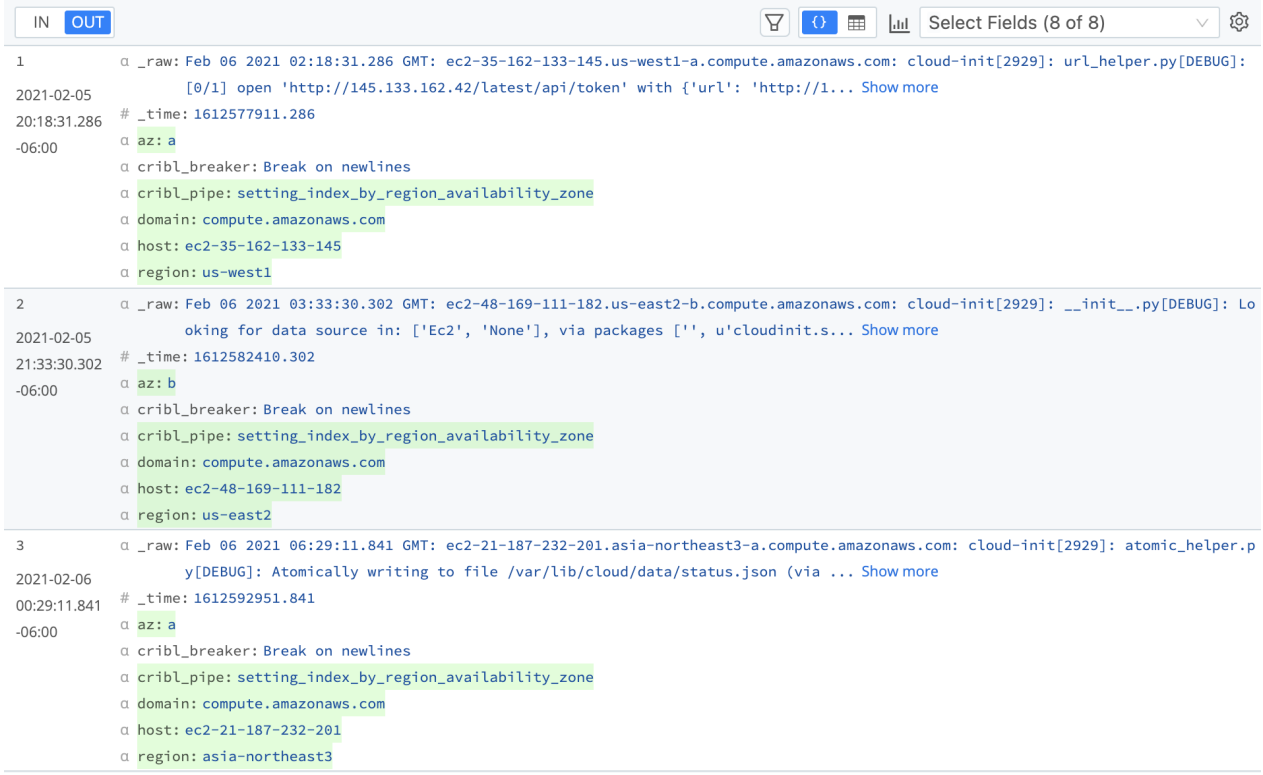

Lookups

We still need to determine the index and sourcetype. Cribl Stream's Lookup Function enriches events with external fields. We'll use it with the newly extracted `region` field to assign an `index` and `sourcetype` to these events.

Lookup File

First, we need to create a lookup table for the Function to reference. For this, we'll use regex again.

In the table below, five simple regular expressions map the extracted `region` field to the appropriate `index` and `sourcetype`. For example, the region `us-west1-a` starts with `us`, so it matches the first regular expression: `us.+`

We use this lookup table's first row to assign an index of `usa_index_tier`, and a sourcetype of `cloud-init`, to each matching event. The region patterns in the table's four remaining rows work the same way.

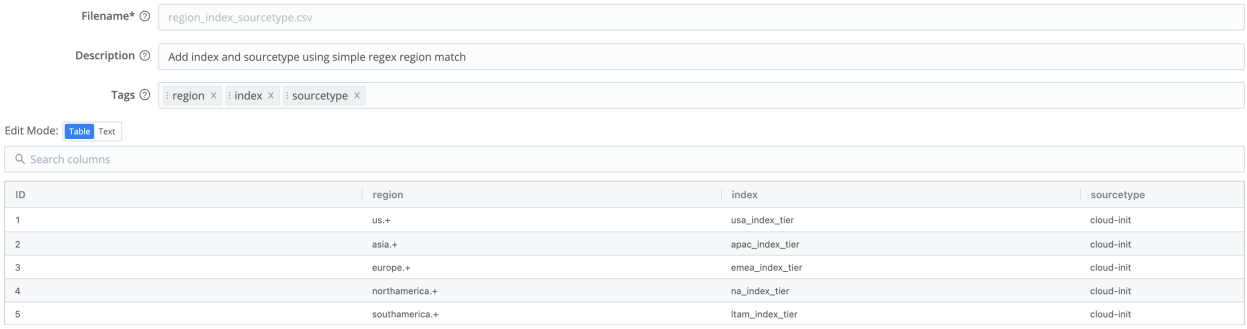

Lookup Function

With the lookup table saved as `region_index_sourcetype.csv`, the Lookup Function below matches the events' extracted `region` field against the regular expressions, and returns the matching `index` and `sourcetype`.

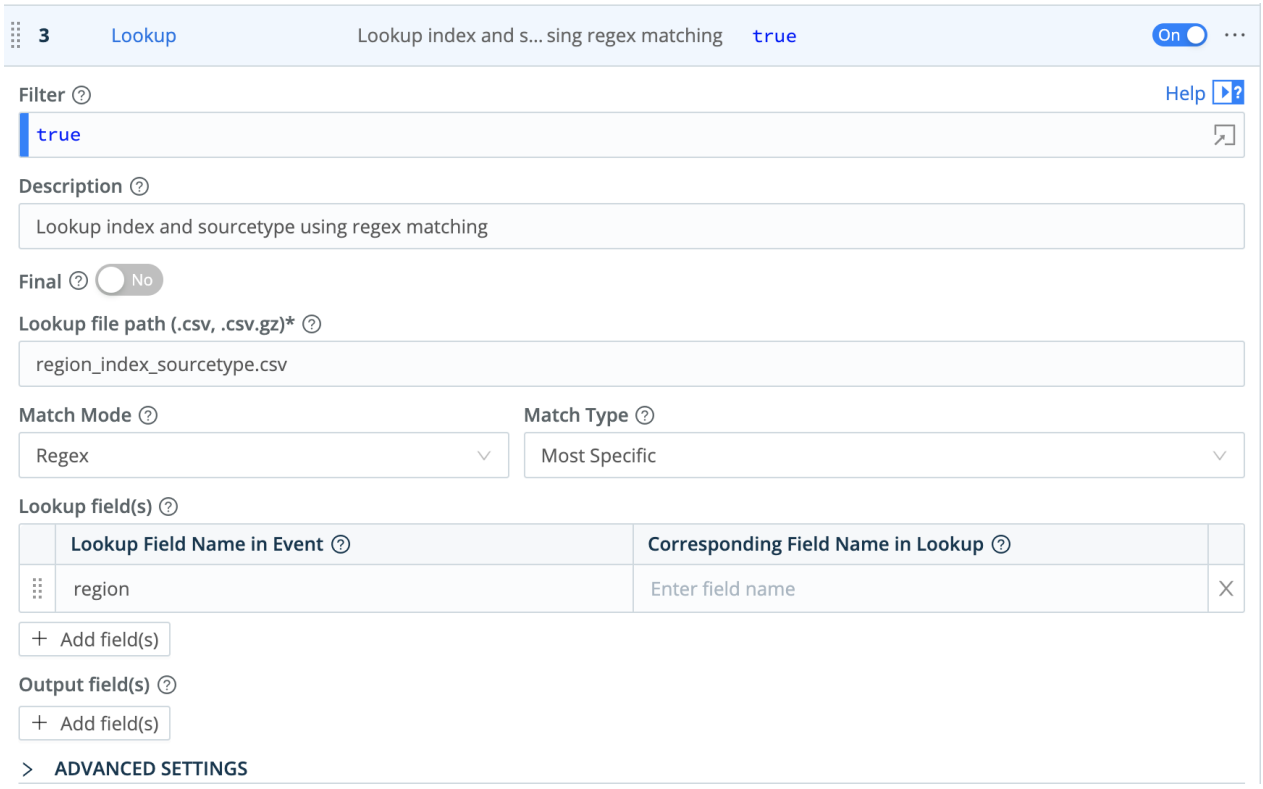

There's actually more here than meets the eye. Note that we've specified no **Output Fields**. From the Lookup Function's documentation, we know this means that the Function will default to outputting **all** fields in the lookup table. So we get the contents of both remaining columns in the table we saw above: `index` and `sourcetype`.

Results of the Lookup Function

With the Lookup Function added to our Pipeline, the Preview pane's **OUT** tab shows that the `index` and `sourcetype` are now added to each event.

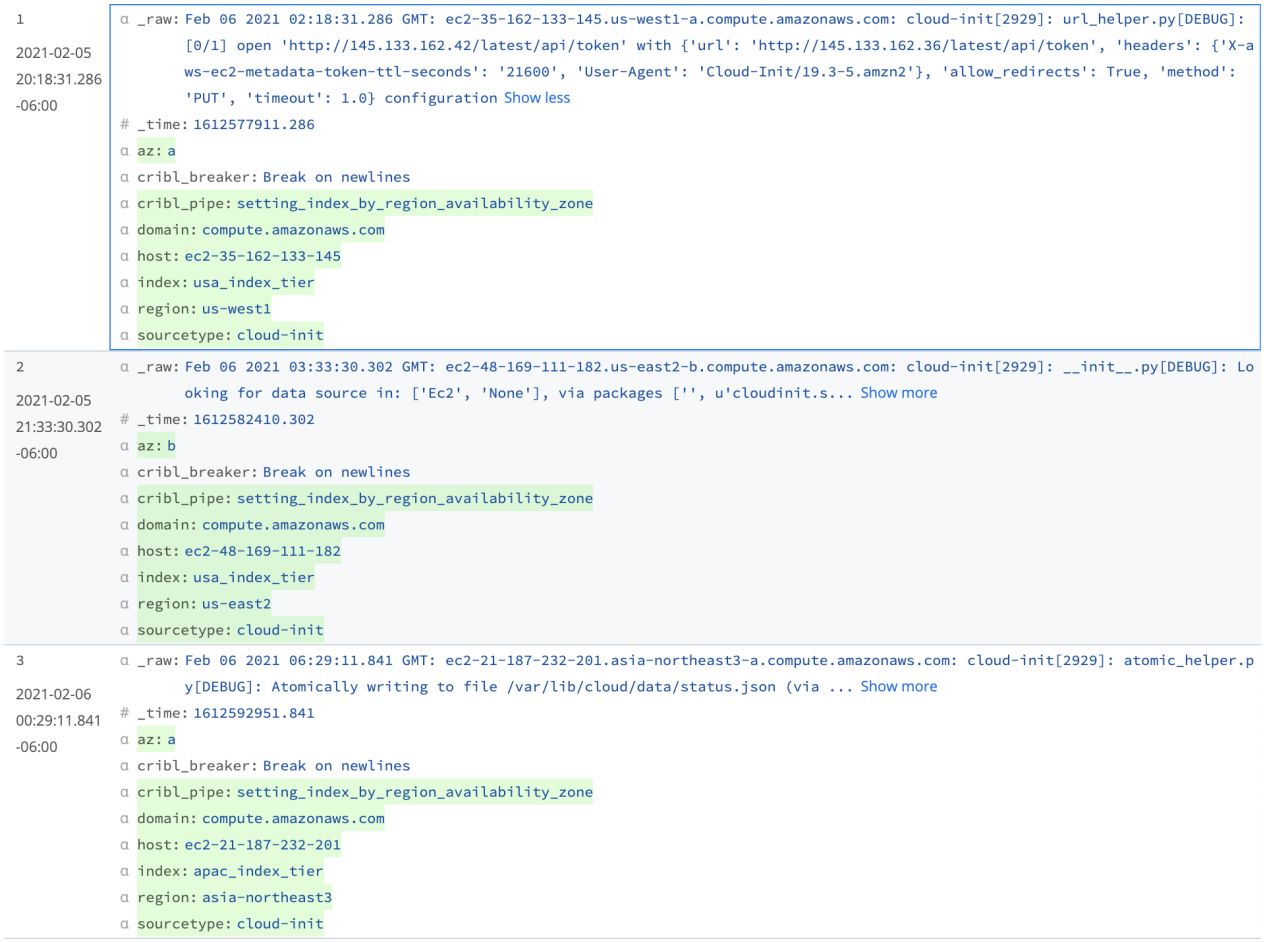

Getting Host IP Address from Host Name

Since the IP address is present in the `host` field, we can create the `host_ip` field using an Eval Function with this replace method:

```
host.replace(/\w+-(\d+)-(\d+)-(\d+)-(\d+)/,'$1.$2.$3.$4')
```

This regular expression uses capture groups and pulls the four IP octets present in the hostname to build the `host_ip`. These four capture groups are noted as `$1.$2.$3.$4`, respectively. This method is very fast, and removes the need to perform a DNS lookup from the `host` field to get the host's IP address. Magic!

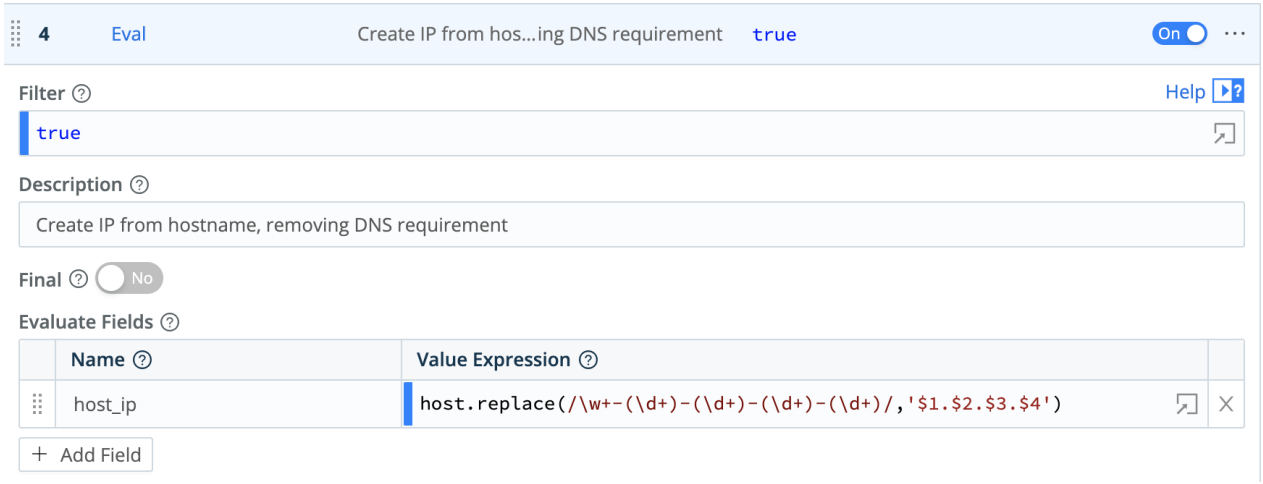

Results of the Eval Function and Replace Method

The `host_ip` field is now added to the events, displayed below `host`:

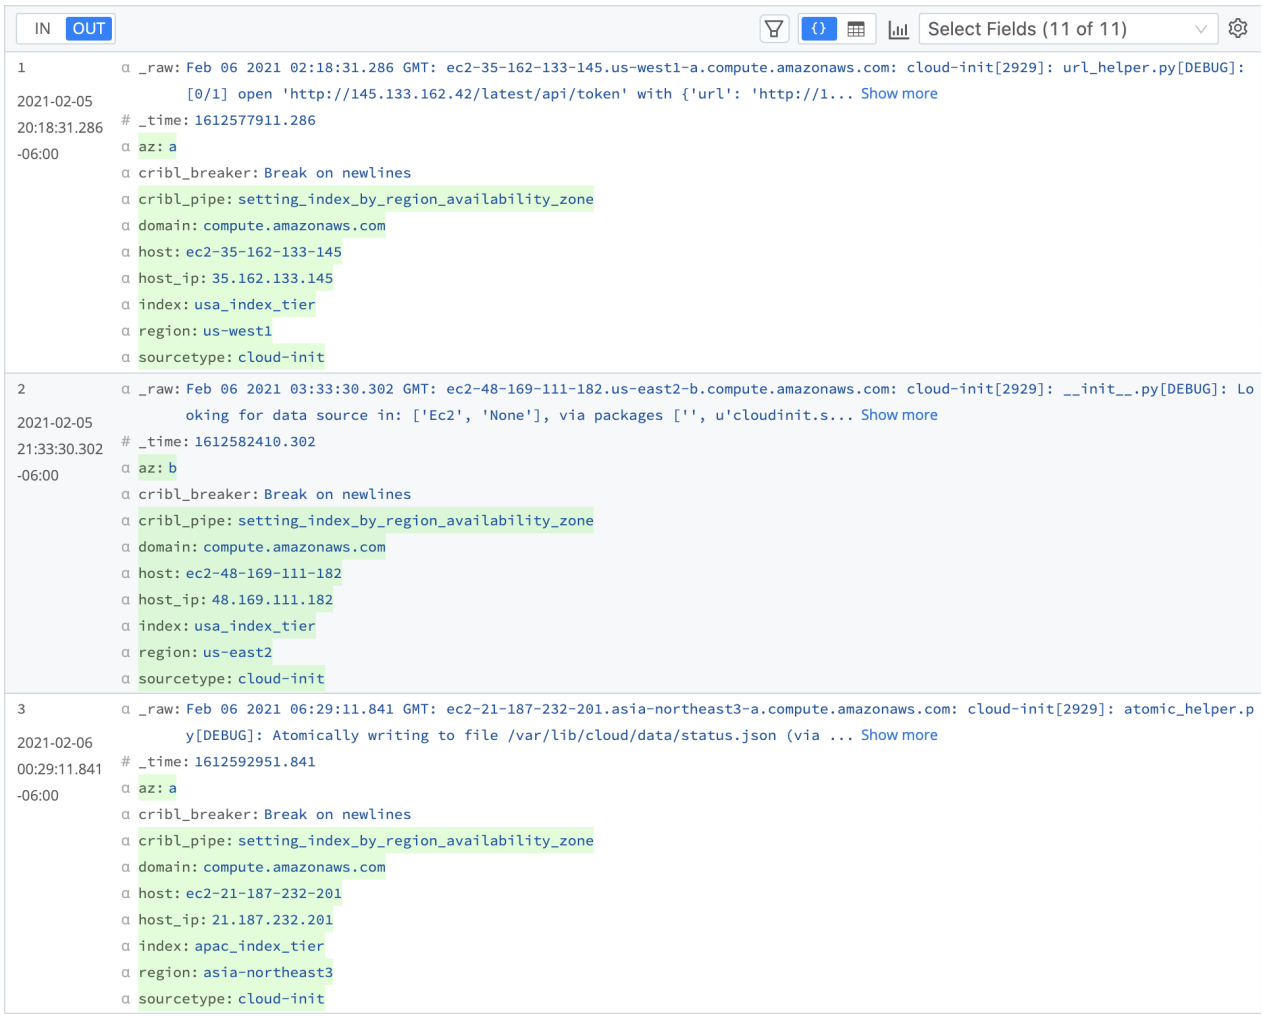

Customizing the Sourcetype

Finally, let's put some sense into the `sourcetype` field, using another Eval Function. By combining the values of the `${sourcetype}_${region}_${az}`, the sourcetype becomes `cloud-init_us-west1_a` – so now you can understand much more about the sourcetype at a glance.

Examine this Eval Function's value expression, taking careful note of the backticks (` `) and braces ({ }) that surround the field names, and the underscore (_) that separates them.

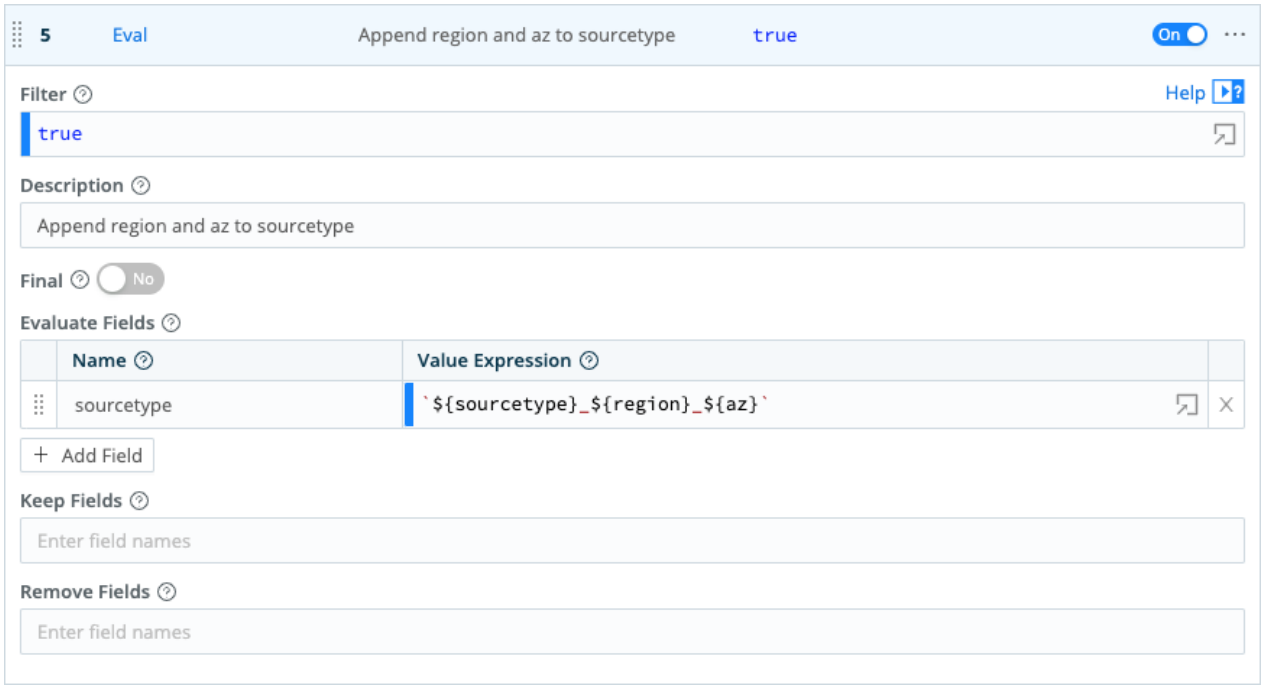

Results of the Eval Function to Combine Values

Take a look at the updated sourcetypes, and enjoy exploring Cribl Stream with your new knowledge!

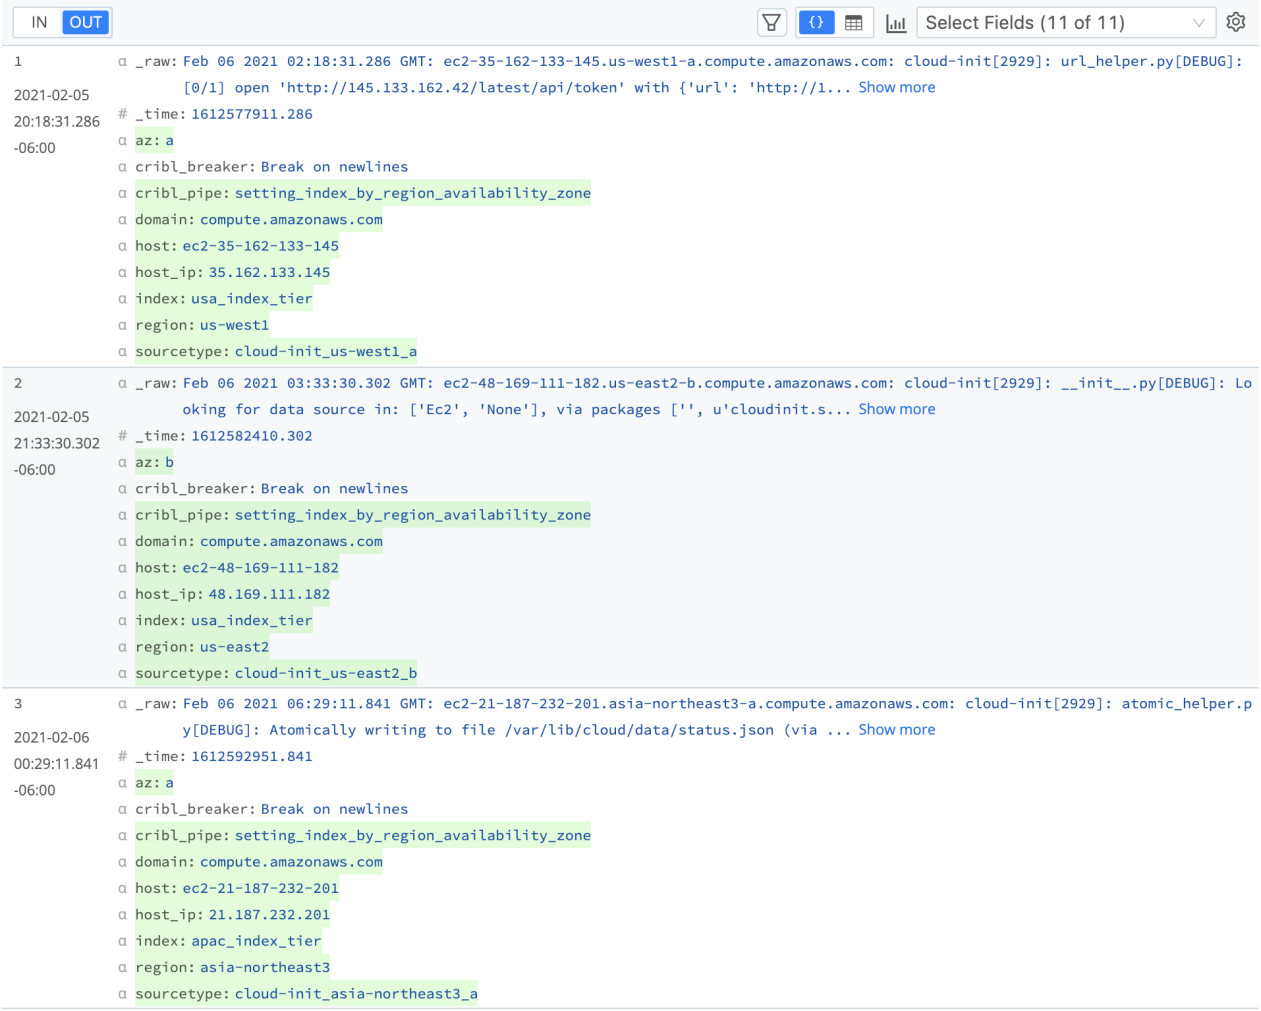

Try This at Home

Below you'll find the lookup table, Pipeline, and sample events demonstrated in this use case. Create the lookup file first, and then import the Pipeline. (The order matters, because the Pipeline import depends on the lookup table's presence.)

Lookup Table

To create the lookup table in Cribl Stream's UI, select **Knowledge > Lookups**, then click **New Lookup File** and select **Create with Text Editor**.

Copy and paste in the header and rows listed below, then save the result as: `region_index_sourcetype.csv`.

```
region,index,sourcetype
us.+,usa_index_tier,cloud-init
asia.+,apac_index_tier,cloud-init
europe.+,emea_index_tier,cloud-init
northamerica.+,na_index_tier,cloud-init
southamerica.+,ltam_index_tier,cloud-init
```

Pipeline

Below is an export of the whole Cribl Stream Pipeline presented here. Import this JSON to get a Pipeline named: `setting_index_by_region_availability_zone.json`.

Magic Pipeline

```
{
  "id": "setting_index_by_region_availability_zone",
  "conf": {
    "output": "default",
    "groups": {},
    "asyncFuncTimeout": 1000,
    "functions": [
      {
        "filter": "true",
        "conf": {
          "comment": "This pipeline demonstrates four different ways to leverage
regular expressions in a Cribl Stream Pipeline including field extraction, lookup,
replace, and field value manipulation."
        },
        "id": "comment"
      },
      {
        "filter": "true",
        "conf": {
          "source": "_raw",
          "iterations": 100,
          "overwrite": false,
          "regex": "/GMT:\\s+(?<host>[^.]+)\\.(?<region>\\w+-\\w+\\d+)-(?<az>
[^.]+)\\.(?<domain>[^:]+):/"
        },
        "id": "regex_extract",
        "disabled": false,
        "description": "Extract host, region, availability_zone, and domain"
      },
      {
        "filter": "true",
        "conf": {
          "matchMode": "regex",
          "matchType": "specific",
          "reloadPeriodSec": 60,
          "addToEvent": false,
          "inFields": [
            {
              "eventField": "region"
            }
          ],
          "ignoreCase": false,
          "file": "region_index_sourcetype.csv"
        },
        "id": "lookup",
        "disabled": false,
        "description": "Lookup index and sourcetype using regex matching"
      },
      {
        "filter": "true",
        "conf": {
          "add": [
            {
              "name": "host_ip",
              "value": "host.replace(/\\w+-(\\d+)-(\\d+)-(\\d+)-
(\\d+)/,'$1.$2.$3.$4')"
            }
          ]
        },
```

```
        "id": "eval",
        "description": "Create IP from hostname, removing DNS requirement",
        "disabled": false
      },
      {
        "filter": "true",
        "conf": {
          "add": [
            {
              "name": "sourcetype",
              "value": "`${sourcetype}_${region}_${az}`"
            }
          ]
        },
        "id": "eval",
        "description": "Append region and az to sourcetype",
        "disabled": false
      }
    ]
  }
}
```

Sample Events

And here's a sample of raw events that you can upload or copy/paste into Cribl Stream's Preview pane to test the Pipeline's Functions:

```
Feb 06 2021 02:18:31.286 GMT: ec2-35-162-133-145.us-west1-a.compute.amazonaws.com:
cloud-init[2929]: url_helper.py[DEBUG]: [0/1] open
'http://145.133.162.42/latest/api/token' with {'url':
'http://145.133.162.36/latest/api/token', 'headers': {'X-aws-ec2-metadata-token-ttl-
seconds': '21600', 'User-Agent': 'Cloud-Init/19.3-5.amzn2'}, 'allow_redirects':
True, 'method': 'PUT', 'timeout': 1.0} configuration
Feb 06 2021 03:33:30.302 GMT: ec2-48-169-111-182.us-east2-b.compute.amazonaws.com:
cloud-init[2929]: __init__.py[DEBUG]: Looking for data source in: ['Ec2', 'None'],
via packages ['', u'cloudinit.sources'] that matches dependencies ['FILESYSTEM']
Feb 06 2021 06:29:11.841 GMT: ec2-21-187-232-201.asia-northeast3-
a.compute.amazonaws.com: cloud-init[2929]: atomic_helper.py[DEBUG]: Atomically
writing to file /var/lib/cloud/data/status.json (via temporary file
/var/lib/cloud/data/tmpS7ibzJ) - w:[644] 489 bytes/chars
Feb 06 2021 12:59:44.232 GMT: ec2-76-187-246-132.europe-west3-
b.compute.amazonaws.com: cloud-init[2929]: stages.py[DEBUG]: Running module power-
state-change (<module 'cloudinit.config.cc_power_state_change' from
'/usr/lib/python2.7/site-packages/cloudinit/config/cc_power_state_change.pyc'>) with
frequency once-per-instance
Feb 06 2021 17:04:16.921 GMT: ec2-67-205-202-104.northamerica-northeast1-
c.compute.amazonaws.com: cloud-init[2929]: util.py[DEBUG]: Running command ['lxc-is-
container'] with allowed return codes [0] (shell=False, capture=True)
Feb 06 2021 19:45:47.687 GMT: ec2-87-209-176-201.southamerica-east1-
a.compute.amazonaws.com: DataSourceEc2.py[DEBUG]: Removed the following from
metadata urls: ['http://instance-data.:8773']
```

From here, modify the sample data, lookup table, and Functions to adapt this approach to your own needs!

14.3.5. Updating Lookups in Multiple Packs

Lookups provide a flexible way to enrich events en route to their Destinations. You can use Lookups in multiple Packs to share complex configurations and workflows across multiple Worker Groups, or across organizations.

Here, we will be walking you through a particularly challenging setup: What happens if you have a very large Lookup that requires frequent updates? To make it more interesting, what happens if the same Lookup is being used in multiple Packs? In the first part, we will discuss how to update a Lookup file in multiple Packs and the second, we will address the best way to set up a large Lookup file that needs frequent updates.

Updating Lookups in Multiple Packs

Manually updating multiple Packs with an ever-evolving Lookup table is a non-starter, so let's examine a better alternative.

Create the Lookup File in the Worker Group

The first step is to create a Lookup file in the Worker Group. For ease of sharing and use, make sure the Lookup file is not located in the Pack.

Our example Lookup file is `host_destination_test.csv`.

Validate that the Lookup File Is on the Worker Node

After you **Commit** and **Deploy** to propagate the Lookup table to the Workers, validate that you can view the Lookup.

In our example, the path is: `$CRIBL_HOME/data/lookups/host_destination_test.csv`.

Point the Pack(s) to the Lookup File

In your Pack(s), add a Lookup Function and point it to the Worker Node Lookup file location. In our example, the path is: `$CRIBL_HOME/data/lookups/host_destination_test.csv`.

> Do not use point the Pack to the Leader Lookup File location, such as:
> `$CRIBL_HOME/groups/<your group>/data/lookups/host_destination_test.csv`.

> Also, do not point it directly to the Pack Lookup file, such as `host_destination_test.csv`.

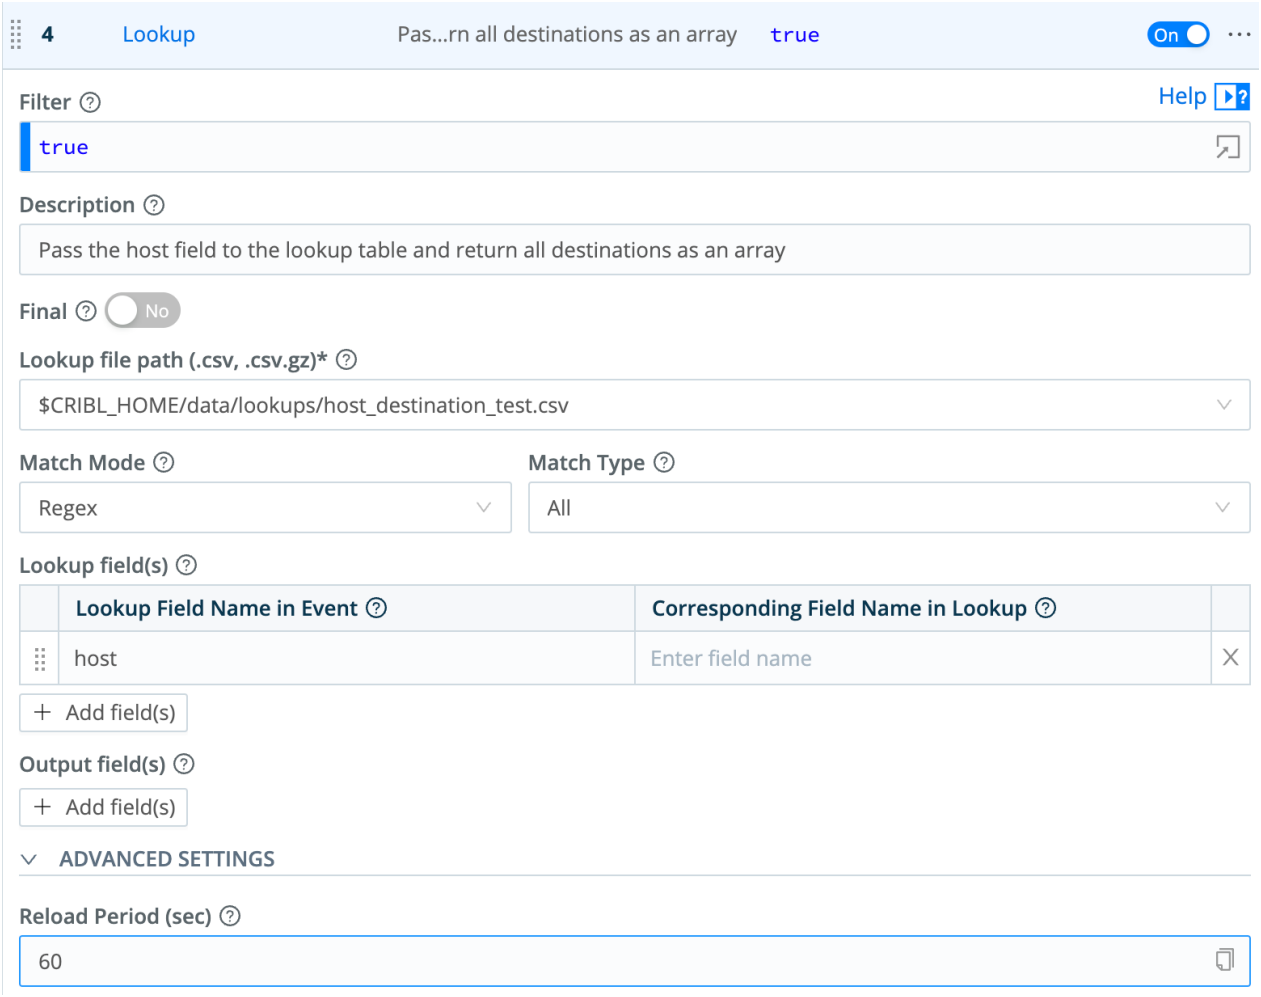

Lookup Function's configuration

Setting up a Lookup File with Dynamic Updates

In this part, we will walk through the best way to set up a large Lookup file that requires frequent updates.

We will use the Cribl Lookups APIs to:

Update a Lookup file → Load it to the Leader Node's `$CRIBL_HOME/groups/<Group-Name>/data/lookups` subdirectory → Commit and Deploy → The changes in the Lookup file will propagate to the Worker Nodes that belong to this Worker Group.

The advantage of this approach, compared to updating the Lookup files on the Worker Nodes direcly, is that you do not need to know all the `IP` address and `hostnames` of the Worker Nodes. It's also more efficient to update in one location.

The sequence of the API calls are as follows:

- `PUT` the Lookup into the Leader Node's `$CRIBL_HOME/groups/<Group-Name>/data/lookups` subdirectory.
- `PATCH` the Lookup (with updates) into Leader Node's `$CRIBL_HOME/groups/<Group-Name>/data/lookups` subdirectory.
- `POST` to commit and push the new Lookup table to the Worker Nodes in the Worker Group.
- `PATCH` to deploy the changes.

Store the Lookup Table on the Leader Node

To set up a Lookup table that can be updated dynamically, upload it and store it on the Leader Node. In our example, we stored the file in: `/opt/host_destinations.csv`.

PUT the Lookup into the Worker Group

In this step, we use the Cribl Lookup API to `PUT` the Lookup into the Worker Group. Run the following in your terminal:

```
curl -X PUT "http://192.168.56.254:9000/api/v1/m/default/system/lookups?
filename=host_destination.csv"
-H "Authorization: Bearer <your token>" -H 'Content-Type: text/csv'
--data-binary '@/opt/host_destination.csv'
```

Response:

```
filename":"host_destination.csv.kmtVCQs.tmp","rows":11,"size":245
```

PATCH the Lookup

Using the Cribl Lookup API, we use the temporary file `host_destination.csv.kmtVCQs.tmp` from the prior step as the input to our `PATCH` command:

```
curl -X PATCH
"http://192.168.56.254:9000/api/v1/m/default/system/lookups/host_destination.csv"
-H "accept: application/json" -H "Authorization: Bearer <your token>"
-H "Content-Type: application/json"
-d '{"id":"host_destination.csv","fileInfo":
{"filename":"host_destination.csv.kmtVCQs.tmp"}}'
```

Response:

{"items":[{"id":"host_destination.csv","size":245}],"count":1}

Commit the Lookup to the Worker Group

In our example, we are using the `default` Worker Group. We are also using the API selectively to commit only the Lookup table to the `default` Worker Group. For details, see Selectively Commit Changes.

```
curl -X POST "http://192.168.56.254:9000/api/v1/version/commit"
-H "accept: application/json" -H "Authorization: Bearer <your token>"
-H "Content-Type: application/json"
-d '{"message":"automation@cribl:commit","group":"default","files":
["groups/default/data/lookups/host_destination.csv","groups/default/data/lookups/host_d
```

Response:

{"items":
[{"branch":"master","commit":"8377ec8bbd21f460d9554f671dc79d217d991afd","root":false,"summary":{"changes":2,"insertions":2,"deletions":0},"files":{"modified":
["groups/default/data/lookups/host_destination.csv","groups/default/data/lookups/host_destination.yml"]}}],"count":1}

Save the commit number in the response payload for the next step:
`8377ec8bbd21f460d9554f671dc79d217d991afd`

Deploy the Lookup to the Worker Nodes

In this final step, we use `PATCH` to deploy the commit to the Worker Nodes. Note the value of the commit from the previous step.

```
curl -X PATCH "http://192.168.56.254:9000/api/v1/master/groups/default/deploy"
-H "accept: application/json" -H "Authorization: Bearer <your token>"
-H "Content-Type: application/json"
-d '{"version":"8377ec8bbd21f460d9554f671dc79d217d991afd"}'
```

Response:

{"items":[{"description":"Default Worker
Group","tags":"default","configVersion":"8377ec8bbd21f460d9554f671dc79d217d991afd","workerRemoteAccess":true,"id":"default"}],"count":1}

14.3.6. Updating Lookups with a REST API

This page documents a technique for uploading, committing, and deploying Lookup files with a REST API. In this use case, an external team modifies the Lookup file nightly. Our procedure describes a method for deploying the modified file to the Worker Groups.

As an alternate method, you can also use the Cribl API to upload a Lookup file.

1. Create the Lookup table.

Create a Lookup table and store it on the Leader Node. In this example, the path and filename are `/opt/host_destinations.csv`.

2. Send the PUT command to upload the modified Lookup file.

Note the location of the external updated CSV file: `@/opt/host_destination.csv`. Then send the following command:

```
curl -X PUT "http://192.168.56.254:9000/api/v1/m/default/system/lookups?
filename=host_destination.csv"
-H "Authorization: Bearer <token> -H 'Content-Type: text/csv'
--data-binary '@/opt/host_destination.csv'
```

You'll receive a JSON object response like this:

```
{"filename":"host_destination.csv.kmtVCQs.tmp","rows":11,"size":245}
```

> **Bearer Tokens**
>
> See bearer token for information on incorporating your bearer token into the cURL command.

3. Send the PATCH command to update the Lookup file on the Worker Group.

We use the temporary file (`host_destination.csv.kmtVCQs.tmp`) from the `PUT` command as input to the `PATCH` command.

```
curl -X PATCH
"http://192.168.56.254:9000/api/v1/m/default/system/lookups/host_destination.csv"
-H "accept: application/json" -H "Authorization: Bearer <token> -H "Content-Type:
application/json"
-d '{"id":"host_destination.csv","fileInfo":
{"filename":"host_destination.csv.kmtVCQs.tmp"}}'
```

You'll receive a JSON object response like this:

```
{"items":[{"id":"host_destination.csv","size":245}],"count":1}
```

4. Send the POST command to commit the modified Lookup file.

In the following example, we use `default` as the Worker Group name.

Note the second value from the commit: `8377ec8bbd21f460d9554f671dc79d217d991afd`. We'll need it for the `deploy` command.

Note that the following command only commits the Lookup table in the `default` Worker Group. See our version control documentation for more information on selectively committing changes.

```
curl -X POST "http://192.168.56.254:9000/api/v1/version/commit"
-H "accept: application/json" -H "Authorization: Bearer <token> -H "Content-Type: appli
-d '{"message":"automation@cribl:commit","group":"default","files":
["groups/default/data/lookups/host_destination.csv","groups/default/data/lookups/host_d
```

Response:

```
{"items":
[{"branch":"master","commit":"8377ec8bbd21f460d9554f671dc79d217d991afd","root":false,"su
mmary":{"changes":2,"insertions":2,"deletions":0},"files":{"modified":
["groups/default/data/lookups/host_destination.csv","groups/default/data/lookups/host_de
stination.yml"]}}],"count":1}
```

5. Send the PATCH command to deploy the modified Lookup file.

Once again, we use `default` as the Worker Group name.

Note the second value from the commit in the deploy version:
`8377ec8bbd21f460d9554f671dc79d217d991afd`.

```
curl -X PATCH "http://192.168.56.254:9000/api/v1/master/groups/default/deploy"
-H "accept: application/json" -H "Authorization: Bearer <token> -H "Content-Type:
application/json"
-d '{"version":"8377ec8bbd21f460d9554f671dc79d217d991afd"}'
```

Response:


```
{"items":[{"description":"Default Worker
Group","tags":"default","configVersion":"8377ec8bbd21f460d9554f671dc79d217d991afd","work
erRemoteAccess":true,"id":"default"}],"count":1}
```

14.4. Sampling Applications

14.4.1. Sampling

Sampling at Ingest-Time

Let's say that you wanted to analyze and troubleshoot with **highly verbose/voluminous** data – for example, CDN logs, ELB Access Logs, or VPC Flows – but you were concerned about storage requirements and search performance. With Sampling, you can bring in enough samples that your analysis remains statistically significant, and also do all the necessary troubleshooting.

See the example below, or see more details in Access Logs and Firewall Logs.

Sampling Example

Let's use the out-of-the-box **Sampling** function to sample all events from `sourcetype=='access_combined'` where `status` is `'200'`. We'll sample these at 5:1 (and all other events at 1:1). This should lower the volume of all verbose successes (`200`s), but still bring in **all** potentially erroneous events (`400`s, `500`s, etc.) that can be used for troubleshooting.

- First, make sure you have a Route and Pipeline configured to match desired events.
- Next, let's add a **Regex Extract** Function to extract the status field from `_raw`, and let's call the resulting field `__status`. Remember, fields that start with `__` are special fields in Cribl Stream, and can be used anywhere in a Pipeline.



Extracting the `__status` field

Next, let's add a **Sampling** function, and scope it to all events where `sourcetype=='access_combined'`. Let's apply a filter condition of `__status == 200`, and a Sample Rate of `5`.

Sampling success responses

To confirm that sampling works, compare the event count of all `200`s before and after.

> Each time an event goes through the **Sampling** function, an index-time `sampled::<rate>` field is added to it. You can use this field in your statistical functions, as necessary.

14.4.2. Sample Logs

Collecting samples of the event data you plan to work with in Cribl Stream can make your Cribl Stream onboarding experience even quicker and more efficient than if you don't.

When you set out to collect sample data, first decide whether to collect before or after the sending agent processes it.

- If you can, collect the data **after** the agent processes it. Then you can set up Cribl Stream Pipelines more accurately the first time. The best option is live capture with Cribl Stream. Next best is gathering files.
- If the only practical option is to collect data **before** it reaches the agent, that works, too. (This will usually be a matter of gathering files.) Since setting up Pipelines is an iterative process, you can still arrive at an optimal setup even if it takes a bit longer.

Regardless of what sending agent you're using, either the Capturing Data with Cribl Stream or the Gathering Original Files section will apply.

Beyond that, there are two supplemental sections: one about how to export data from Elasticsearch, and the other about exporting from Splunk. Of course, these are only two possibilities in a long list of sending agents. If you are using a sending agent that's not covered here, please join us on Cribl's Community Slack at https://cribl-community.slack.com/ and share your questions about collecting sample logs.

Describing Sample Data

For every group of sample files, create a `README` file which includes:

- Sourcetype (e.g., the type of log you're collecting samples from).
- Originating app or appliance.
- Delivery mechanism (e.g., syslog, Filebeat, Splunk UF, or something else).
- Whether the was data collected before or after processing by the agent.
- A brief description of the data.

Capturing Data with Cribl Stream

Though not always the easiest, this is the best option, because samples are captured exactly as they will look when handed off to Cribl Stream in production. You'll set Cribl Stream up as a passthrough which gets samples “right off the wire” and dumps them to DevNull.

Configuring Sources

In Cribl Cloud:

Check the landing page to see whether the pre-defined Sources (Elastic, syslog, and Splunk, among others) are sufficient for your needs. If you need others, configure them using ports in the range 20000-20010.

Or, if your deployment is on-prem or in a private cloud:

Download and install Cribl Stream.

```
$ mkdir /opt; cd /opt
$ curl -Lso - $(curl https://cdn.cribl.io/dl/latest-x64) | tar zxvf -
$ cribl/bin/cribl start
```

Open `localhost:9000` in a browser.

Configure the Source you need. For simplicity, use port 1024 or higher. (If you must use lower ports you'll need to follow a different installation procedure.)

Directing Data to Cribl Stream

Point your sending agent at the Cribl Stream Source you created above. How you do this depends on what sending agent you use. See this Cribl blog for a how-to that focuses on Cribl Cloud but also applies to on-prem deployments.

Live-capturing Data

Once data has begun flowing, click the **Live** button for your chosen Source.

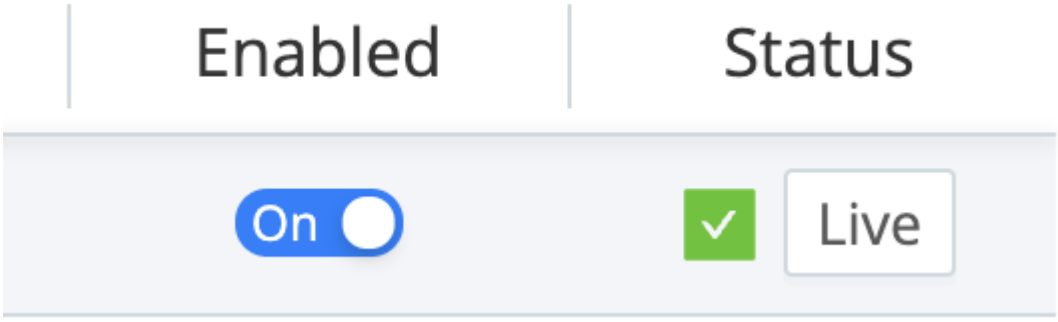

The **Live** button initiates capture

Grab 100 to 500 events, at a minimum. Try to capture as much variety as possible, even if that requires multiple captures.

When finished, click **Save as Sample File**. Note the file name (and rename if you like). Close the sample window.

In the **Routing** > **Data Routes** tab, select the Route you are using.

Your sample file(s) should appear in the **Sample Data** pane on the right. If the **Sample Data** pane does not appear, type] (right square bracket) key to unhide it.

For each file you want to download:

- Click the file name.
- Click the (gear icon) for **Advanced Settings**:

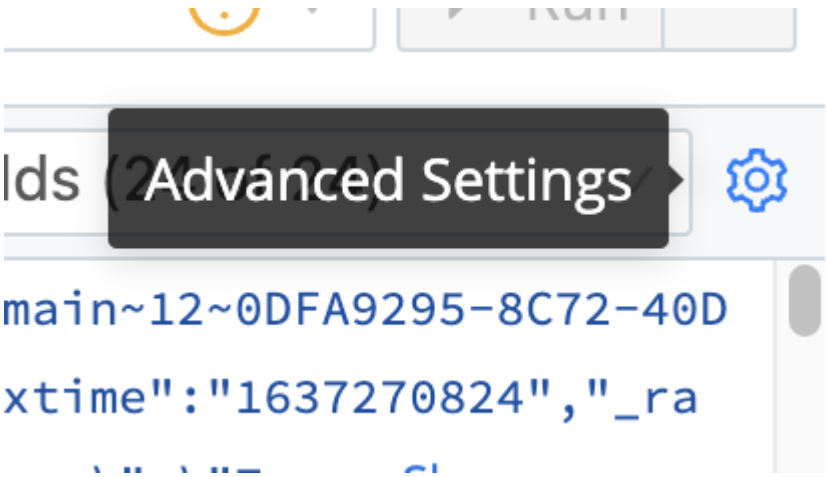

The **Advanced Settings** icon

- In the resulting pop-up, select **Save** > **NDJSON**.
- Once the file finishes downloading:
  - Move the file into the directory you've created for that set of sample files - which should also include a `README` as described above.

- When all files have been moved into the directory, compress the directory as a `.tgz` archive.

Gathering Original Sample Files

If live-capturing data with Cribl Stream is impractical for you, gather sample files that the sending agent has not yet processed, using the following general workflow:

- Create a directory in which to store samples.
- Copy a sample file into the new directory.
- Repeat until all desired sample files have been copied.
- Add a `README` file to the directory, as described above.
- Redact sensitive content in the data, if required.
- Archive the directory (e.g., with a command like `tar -czf samples.tgz samples`) for portability; send it to your Cribl representative, if you are working with one.

Exporting Data from a Platform

If your data is in Elastic or Splunk, and you can neither capture live nor obtain original samples, use one of the following export procedures. Then complete the workflow above, using the exported files instead of original sample files.

> If Splunk uses props and/or transforms to modify the `_raw` data of your logs, you **must** obtain your sample data from the source, because the exported data will **not** include events in their original form.

Exporting Data from Elastic

1. Elastic often transforms the data it stores. To the extent possible, note any particulars about the shape and content of the original data before it reached Elastic. Take special care to record the effects of any Logstash pipeline configs on the sample data. Record all this information in the `README` you create. This will make it easier to create the most effective filters in Cribl Stream.

2. Install the Logstash plugins logstash-input-elasticsearch and logstash-output-csv:

```
$ cd /opt/logstash
$ bin/logstash-plugin install logstash-input-csv
$ bin/logstash-plugin install logstash-output-csv
```

3. Compose a query to retrieve the data you want. Be sure to include the `message` field, whose value should be the original event.

4. Substitute your query for the placeholder in the following config snippet, and save the snippet as `output-csv.conf`:

```
input {
 elasticsearch {
    hosts => "elastic-host:9200"
    index => "target-index"
    query => '
  {"query": {
    # your ES query here
        }
      }
    }
}}'
  }
}
output {
  csv {
    fields => ["message", "field1", "field2"]
path => "/home/user/ES-sourcetype-export.csv"
  }
}
```

5. Run your export operation:

```
/opt/logstash/bin/logstash -f output-csv.conf
```

Exporting Data from Splunk

You can export logs from Splunk using the GUI or command line.

In the Splunk GUI:

1. Run a search that returns the appropriate sample of target logs. Adjust the number of samples by appending `| head <number_of_samples_desired>` to your search. For example, to grab 100 samples of Cisco ASA firewall data:

```
index=firewall sourcetype=cisco:asa | head 100
```

2. Adjust the search as needed to exclude or include the events you want to send.

3. When your search is collecting the desired samples, export the search results:

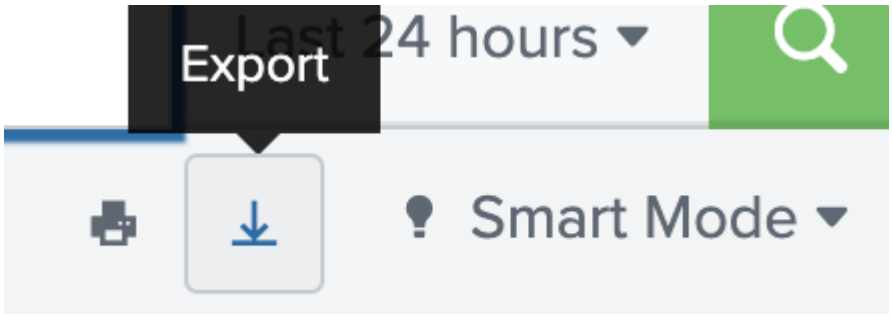

Exporting search results

4. Then select **Raw Events**, name the file after the source or sourcetype, and save.

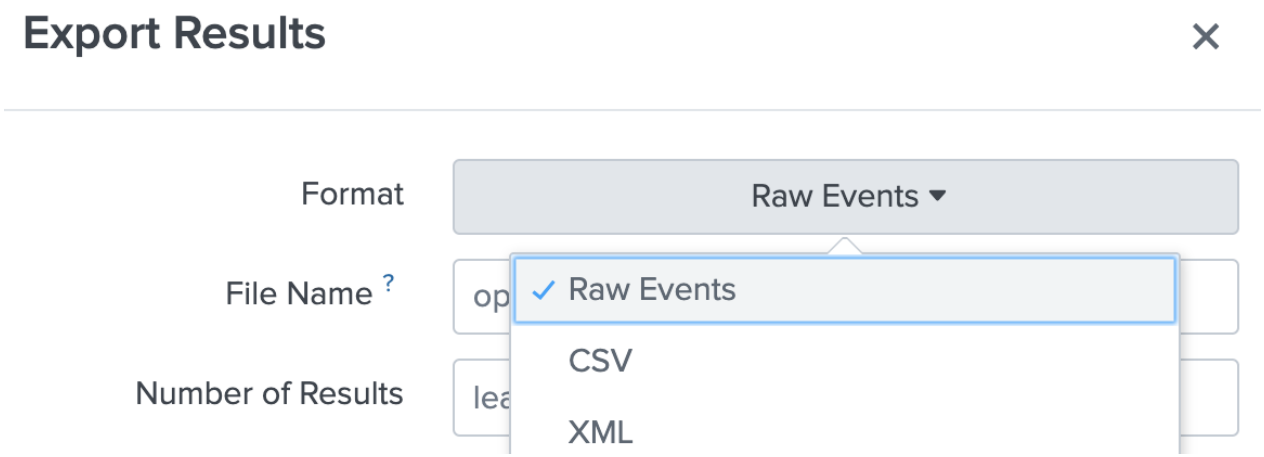

Exporting raw events

Or, in the Splunk CLI:

You can obtain the same results as described in the previous section using commands like the following.

```
% $SPLUNK_HOME/bin/splunk search "index=firewall sourcetype=cisco:asa | head 100" -
output rawdata > cisco_asa_sample.txt
```

14.4.3. Access Logs: Apache, ELB, CDN, S3, etc.

Recipe for Sampling Access Logs

Access logs are extremely common. They're often emitted by web servers or similar/related technologies (proxies, loadbalancers, etc.), and tend to be highly voluminous. Typical examples include Apache access logs, and CDN logs such as those from Amazon Cloudfront, Amazon S3 Server Access Logs, AWS ELB Access Logs, etc.

For large installations, bringing everything into an analytics tool is often so cost-prohibitive (storage, resources, license, etc.) that most users don't even bother. However, some of the logs contain relevant information when looked at individually (e.g., errors). The much larger majority contains relevant information when looked at in the aggregate (e.g., successes to determine traffic patterns, etc.).

It would be great if we could find a middle ground. With the Sampling Function, you can! Specifically, you can:

- Ingest enough sample events from the majority category that your aggregate analysis remains statistically significant.
- Ingest *all* events from the minority categories, and perform troubleshooting and introspection with full-fidelity data.

Using `status` as the Sampling Condition

Most of the access logs (including the ones mentioned above) have very similar formats. One quick way to sample is to look at the value of the `status` field. `2XX`s indicate success and tend to be, by far, the most common ones – with `200` being the top. **Therefore, `200` is the perfect candidate for sampling**. All other statuses occur much less frequently, indicate conditions that often need to be looked at, and can be brought in with full fidelity.

Sample Status 200 at 5:1

1. Add a **Regex Extract** Function that looks at these sourcetypes: `sourcetype=='access_combined' || sourcetype=='aws:s3:accesslogs'`

2. Configure that Function to extract a field called `__status` with this regex: `/HTTP\/\d\.\d"\s(?<__status>\d+)/`

Defining the Regex Extract Function

3. Add a Sampling Function to sample `5:1` when `__status==200`.

4. Save.

Sampling success reponses

Note About Sampling

Each time an event goes through the **Sampling** Function, an index-time `sampled::<rate>` field is added to it. Use this field in your statistical Functions, as necessary.

Other Sourcetypes

Examples of other sourcetypes that will benefit from sampling, but might need a different `__status` extraction regex:

SOURCETYPE	FILTER EXPRESSION
Amazon Cloudfront Access Logs	`sourcetype=='aws:cloudfront:accesslogs'`
Amazon ELB Access Logs	`sourcetype=='aws:elb:accesslogs'`

14.4.4. Firewall Logs: VPC Flow Logs, Cisco ASA, Etc.

Recipe for Sampling Firewall Logs

Firewall logs are another source of important operational (and security) data. Typical examples include Amazon VPC Flow Logs, Cisco ASA Logs, and other technologies such as Juniper, Checkpoint, pfSense, etc.

As with Access Logs, bringing in **everything** for operational analysis might be cost-prohibitive. But sampling with Cribl Stream can help you:

- Ingest enough sample events from the majority category that your aggregate analysis remains statistically significant. E.g., sample all `ACCEPT`s at `5:1`.
- Ingest **all** events from the minority categories, and perform troubleshooting and introspection with full-fidelity data. E.g., bring in all `REJECT`s.

Sampling VPC Flow Logs

AWS' VPC Flow Logs feature enables you to capture information about the IP traffic going to and from network interfaces in your VPC. Flow Log data can be published to Amazon CloudWatch Logs and Amazon S3.

Typical VPC Flow Logs look like this:

```
2 123456789010 eni-abc123de 172.31.16.139 172.31.16.21 20641 22 6 20 4249 1418530010
1418530070 ACCEPT OK
2 123456789010 eni-abc123de 172.31.9.69 172.31.9.12 49761 3389 6 20 4249 1418530010
1418530070 REJECT OK
```

Let's use a **very simple** Filter condition and only look for `ACCEPT` events:

1. Add a **Regex Extract** Function that looks at: `sourcetype=='aws:cloudwatchlogs:vpcflow'`
2. Configure that Function to extract a field called `__action` with this regex: `/(?<__action>ACCEPT)/`

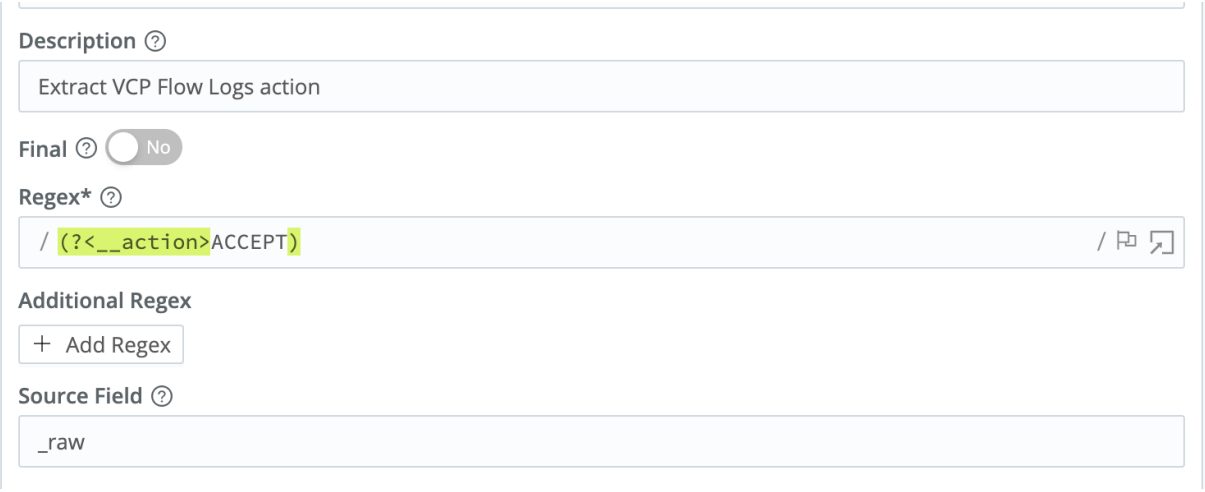

Extracting the `__action` field

3. Add a **Sampling** Function to sample `5:1` when `__action=="ACCEPT"`.
4. Save.

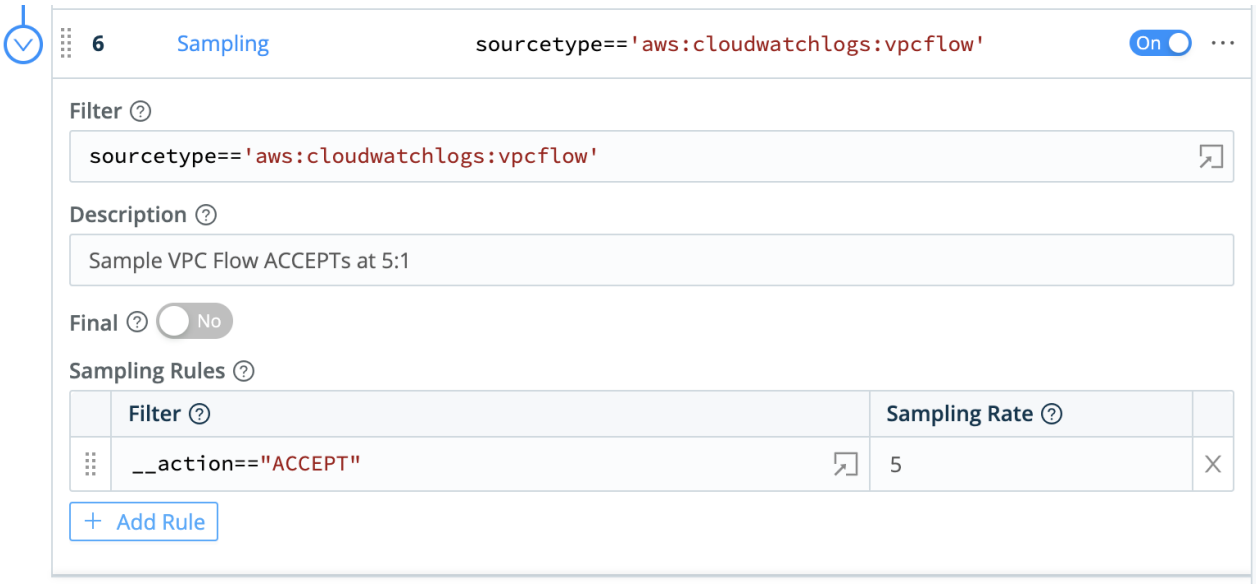

Sampling `ACCEPT` events

Note About Sampling

Each time an event goes through the Sampling Function, an index-time field is added to it: `sampled: <rate>`. It's advisable that you use that in your statistical functions, as necessary.

Other Sourcetypes

Other sourcetypes that will benefit from sampling, but might need a different `__action` extraction regex:

SOURCETYPE	FILTER EXPRESSION
Cisco ASA Logs	`sourcetype=='cisco:asa'`
Related sourcetypes to consider sampling:	`sourcetype=='cisco:fwsm'` `sourcetype=='cisco:pix'`

14.5. Using Other Functions

14.5.1. Code Function Examples

The Code Function introduced in Cribl Stream version 3.1 is a powerful way to transform events without needing to write a custom function. Using JavaScript methods such as `map`, `reduce`, `forEach`, `some`, and `every` is possible.

Cribl still recommends that you use Cribl Stream's basic, built-in Functions, like Eval, as much as possible. But these use cases demonstrate some basic ways to use the new Code Function to solve questions asked in the Cribl's Slack Community.

Basic Examples

Example Event Data

The first several examples below use the following JSON object as a sample event. You can copy and paste this event into Cribl Stream's **Sample Data** pane. Add the `Do Not Break` Ruleset to your Source, select the `noBreak1MB` Event Breaker, and under your Source's **Advanced Settings**, enable `Parse JSON Event`.

```
{
  "cpus": [
    {"number": 1, "name": "CPU1", "value": 2.3},
    {"number": 2, "name": "CPU2", "value": 3.1},
    {"number": 3, "name": "CPU3", "value": 5.1},
    {"number": 4, "name": "CPU4", "value": 1.3}
  ],
  "arch": "Intel x64"
}
```

Accessing Fields in an Event

To access a field inside an event, you can use the `__e` special variable. The `__e` prefix allows for access to the `(context)` event inside a JavaScript expression. For example, if you want to access the extracted field `field-name`, use the following syntax:

```
__e['field-name']
```

In other words, think of your code executing in a context like this:

```
function(__e: Event) {
 // your code here
}
```

Eval a Field

To create a new field, it is as simple as assigning the field to a value. For example, if you want to create a field `test` with the value `Hello, Goats!`, use the following syntax:

```
__e['test'] = 'Hello, Goats!'
```

JSON Filter

To filter the `cpus` array inside the event, you can use the `filter` function to keep only certain values, based on a logic condition. In the example below, only entries where the value is greater than or equal to `3` are kept, and placed into a new field called `cpus_filtered`.

```
__e['cpus_filtered'] = __e['cpus'].filter(entry => entry.value >= 3)
```

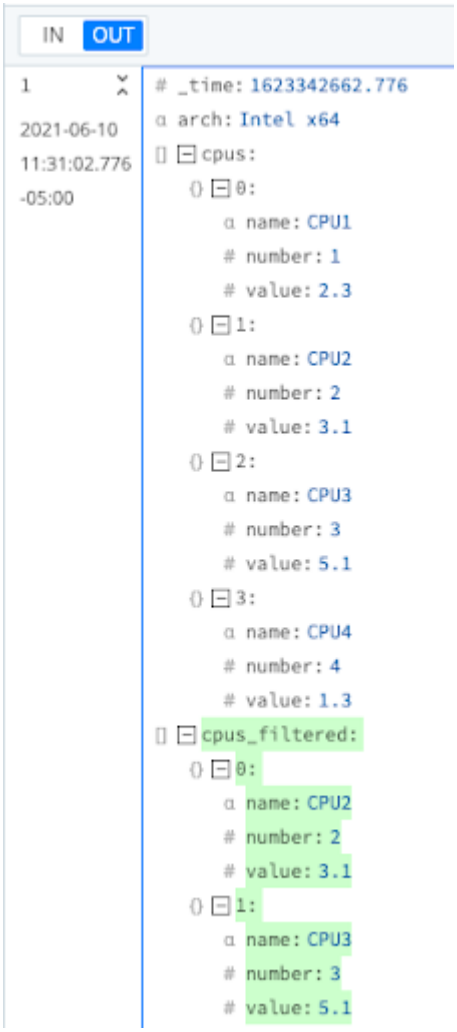

Code Function example: JSON Filter

Reduce

The `reduce` method allows you to summarize data across an array, with a returned accumulator value. In the example below, a new field, `cpus_reduce`, will be created with a value of `11.8`.

```
__e['cpus_reduce'] = __e['cpus'].reduce((accumulator, entry) => accumulator +
entry.value, 0)
```

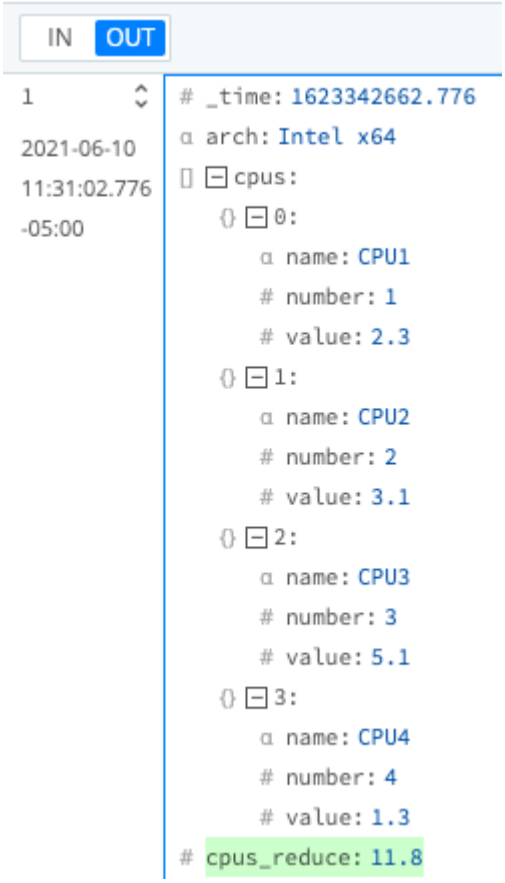

Code Function example: Reduce

Some/Every

The `some` and `every` methods return a boolean result (`true` / `false`).

The `some` method checks that there is at least one logic validation that returns `true`. In the example below, `cpus_some` would be set to `true` because there is at least one object with a value greater than or equal to `3`.

```
__e['cpus_some'] = __e['cpus'].some(entry => entry.value >= 3)
```

The `every` method checks that every entry in the array returns `true`. If so, the result is `true`; otherwise, this returns `false`. In the example below, the value for `cpus_every` would be `false`, because not all values in the event are greater than or equal to `10`.

```
__e['cpus_every'] = __e['cpus'].every(entry => entry.value >= 10)
```

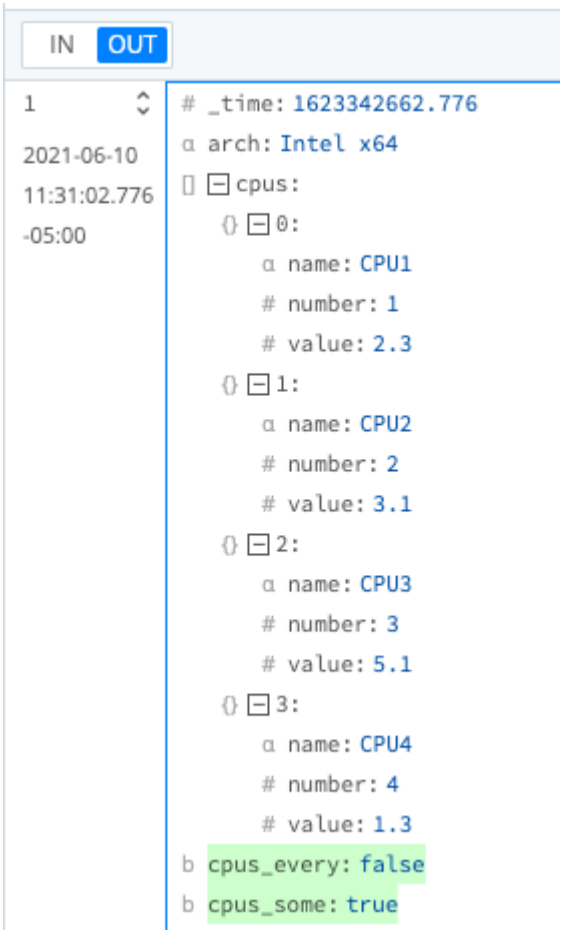

Code Function example: Some/Every

Advanced Examples

Transform a Specific Field

In this example, each `cpus` member will have its `name` field transformed to lowercase. Object.assign is used to keep the original object, while assigning the `name` field to the desired value.

```
__e['cpus'] = __e['cpus'].map(entry => Object.assign(entry, {'name':
entry.name.toLowerCase()}))
```

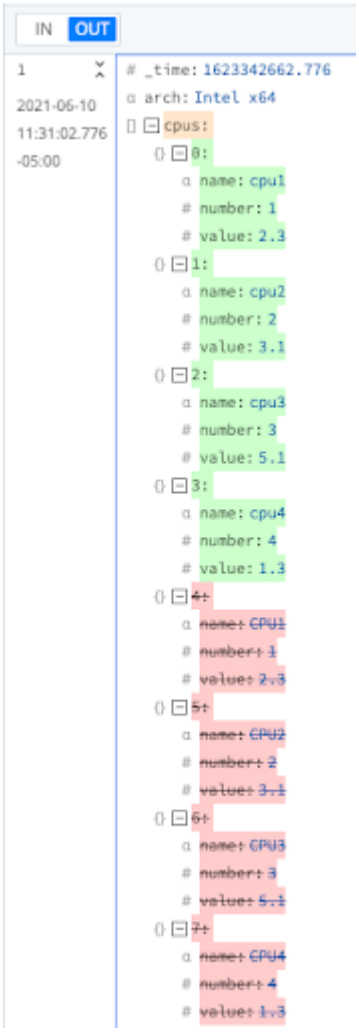

Code Function example: Transform a Field

forEach

The `forEach` method loops over each element of an array. However, unlike the `map` method, it does not return the value, and it requires a separate temporary variable for result collection.

```
let test = {};
__e['cpus'].forEach((entry, index) => test[entry.name] = entry.value);
__e['cpus_foreach'] = test;
```

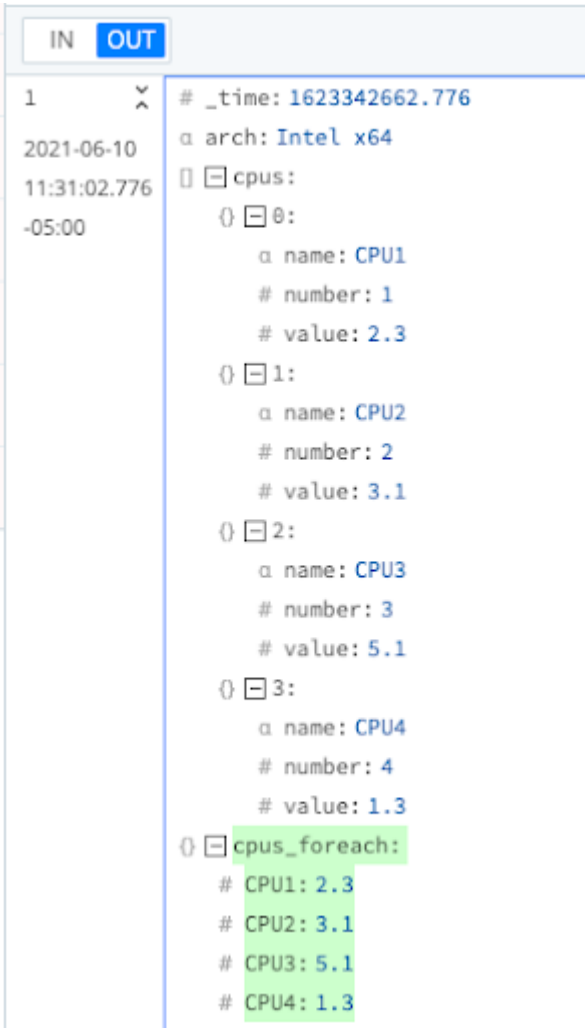

Code Function example: forEach

You could also accomplish the same result by replacing the middle line above with the `map` method below:

```
__e['cpus'].map(item => test[item.name] = item.value);
```

Building a New Array

In this example, we create a new array to include some of the original values from each object in the `cpus` array, but we also dynamically inject a new field containing the `arch` field (CPU architecture) from the original event's top level.

```
__e['cpus_new'] = __e['cpus'].map(entry => {
    const container = {};

   for (const [key, value] of Object.entries(entry)) {
        container[key] = value;
    }

   container['arch'] = __e['arch'];

   delete container.name;
    return container;
})
```

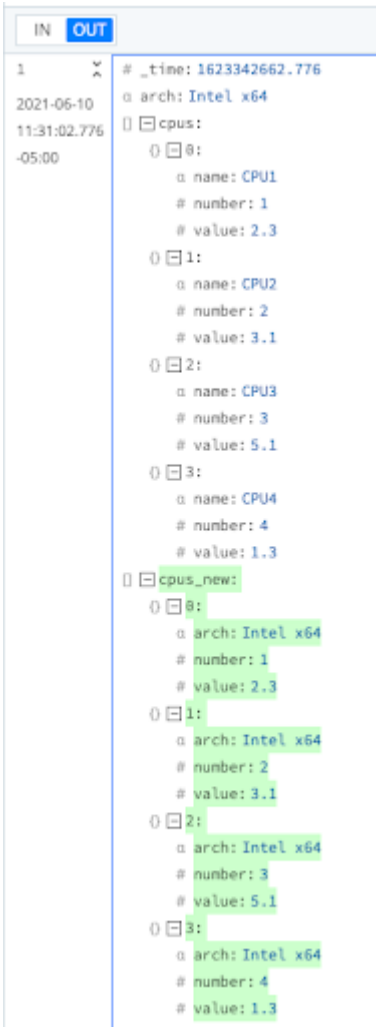

Code Function example: Build a new array

Managing and Troubleshooting Code Execution

Cribl Stream provides the following options for tuning the logic you build with the Code Function.

Logging

Users can access the log messages generated by their Function from the **Preview Log**.

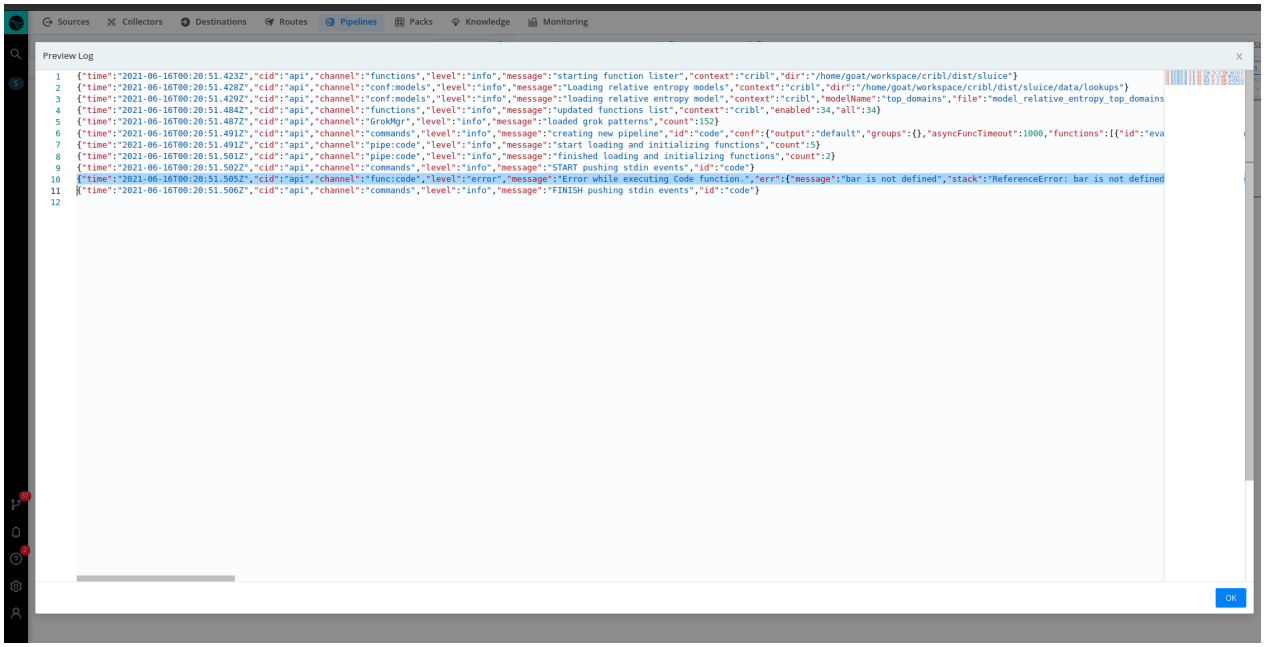

Log messages from a Code Function

Debugging

The Code Function's execution context defines a helper function called `debug` that can be used for debugging purposes.

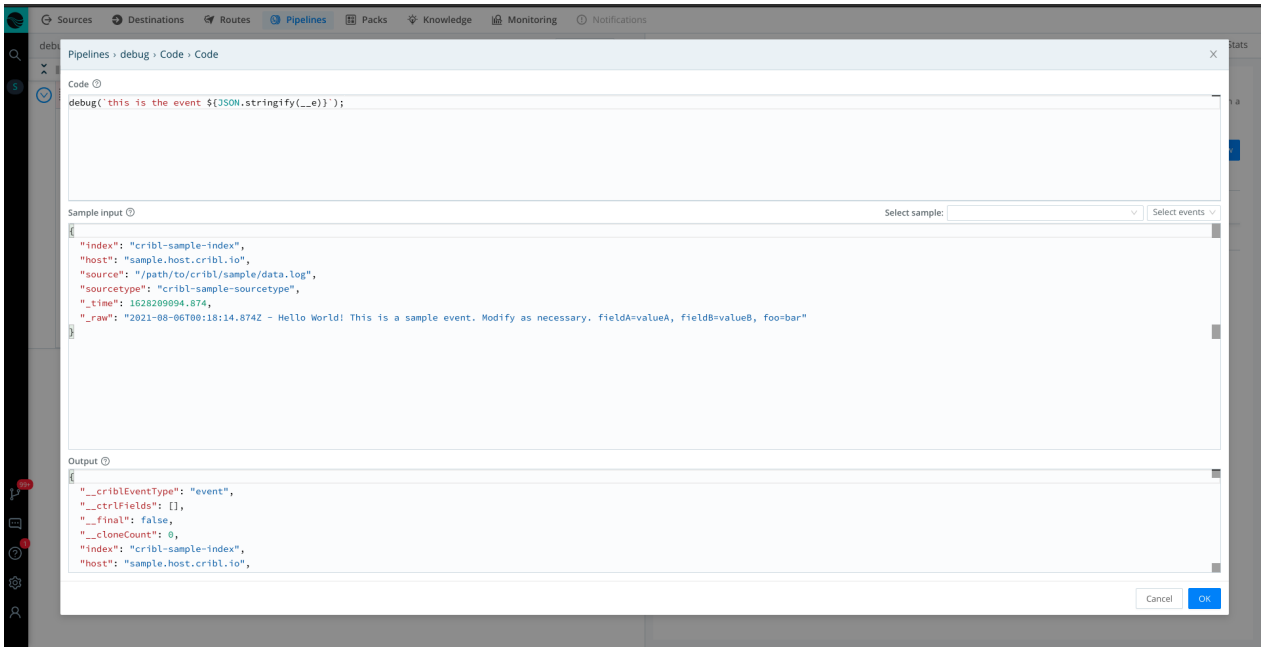

Debugging a Code Function

Messages logged by this `debug` helper function are shown in the Preview Log by default.

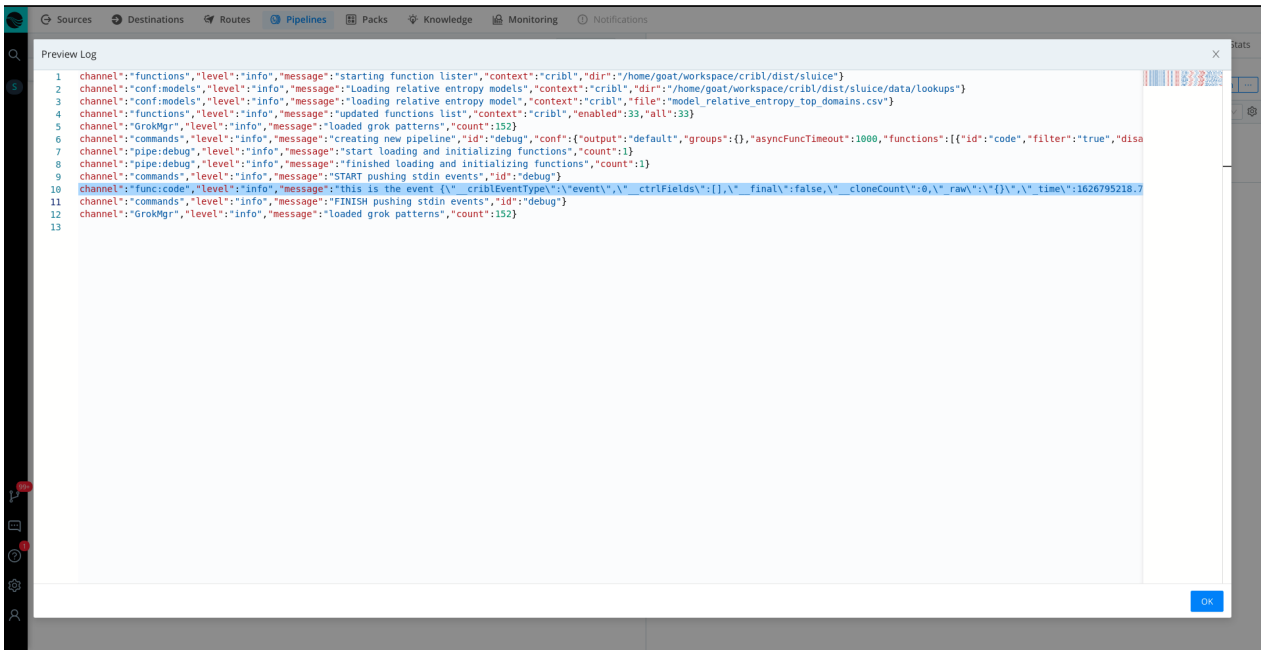

Debugging a Code Function with the Preview Log

You can also route these messages to regular logs, although this requires setting the Function's log level (`func:code`) to `debug`.

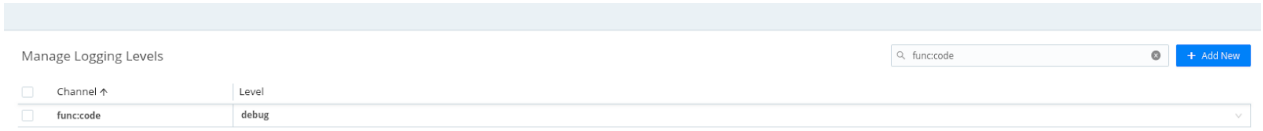

Debugging a Code Function with regular logs

Previewing

By using the expanded editor, users can run the expression against a sample event, and can preview the transformation:

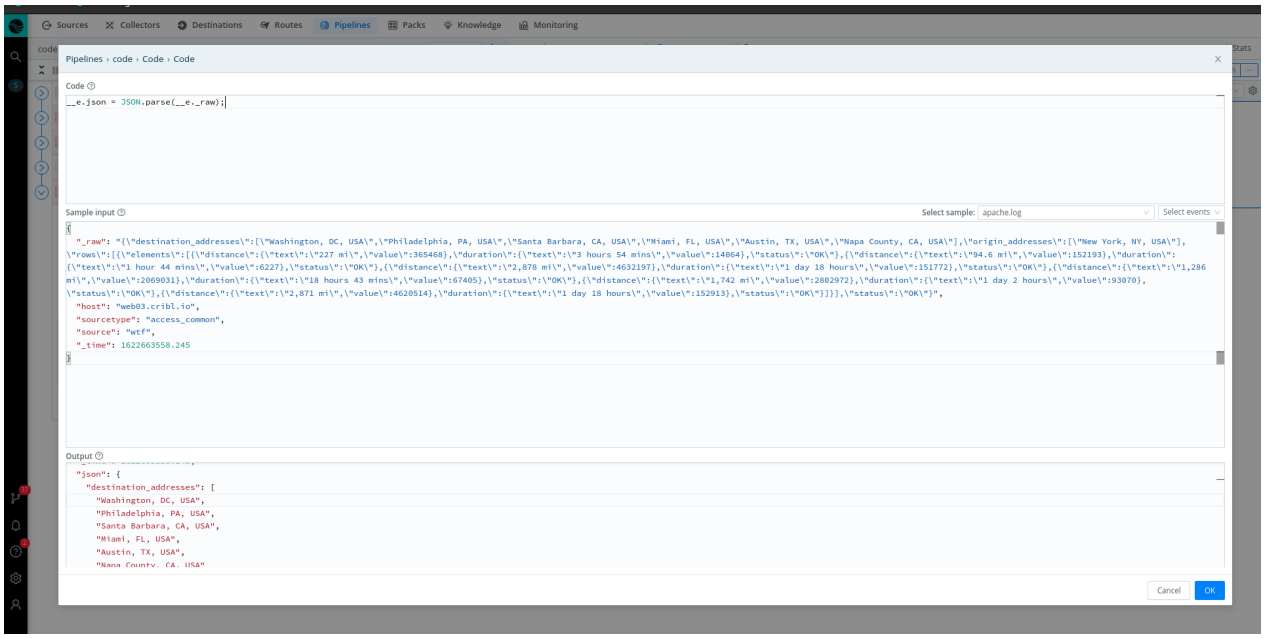

Previewing a Code Function's transformation of an event

Infinite-Loop Protection

The Code Function keeps watching user-defined functions to detect infinite loops that would cause processing to hang. To limit the number of iterations allowed per instance of your Code Function, adjust the **Advanced Settings > Maximum number of iterations** option. This defaults to `5,000`; the maximum number allowed is `10,000`. Once the limit is reached, the Code Function will stop processing whatever is after the statement that exhausted the allowed maximum.



Infinite-Loop protection in a Code Function

Loops

All JavaScript loops and statements are allowed: `for`, `for-of`, `while`, `do-while`, `switch`, etc.

Functions

Users can define their own functions to better organize their code. Both traditional and arrow functions are allowed.

Access to `C.*` Global Object

From the Code's Function body, you can access Cribl Stream's global `C.*` object and its methods/expressions.

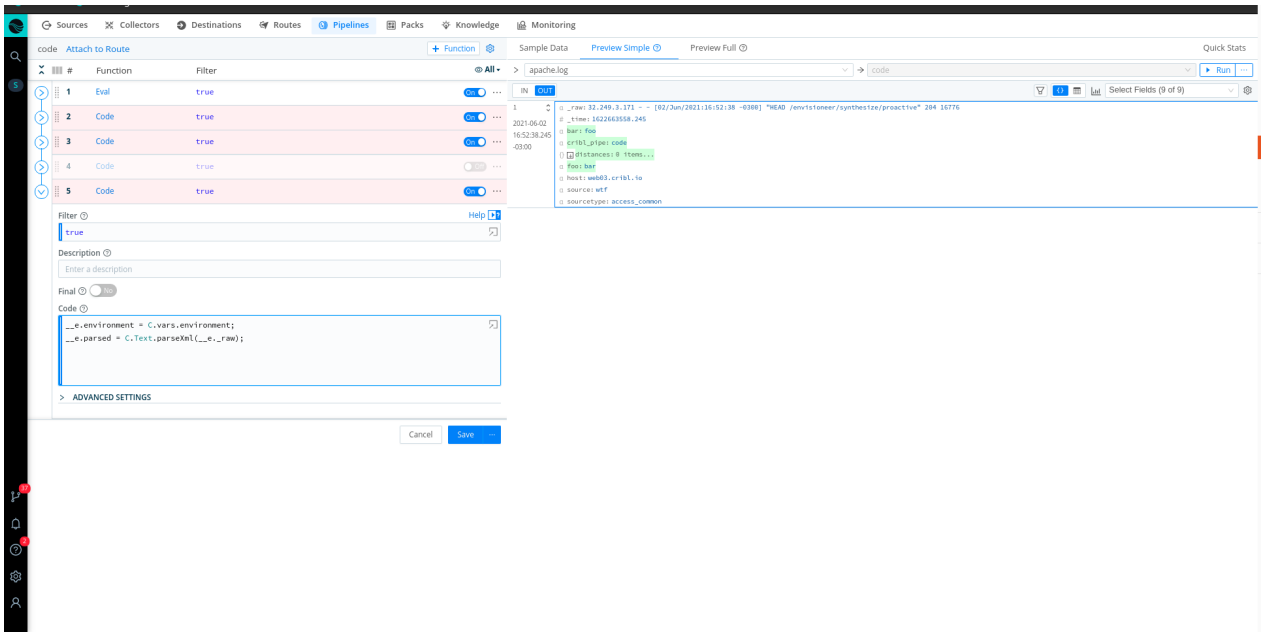

The global `C.*` object of a Code Function

14.5.2. Ingest-time Fields

Adding Fields to Data in Motion

To add new fields to any event, we use the out-of-the-box **Eval** Function. We can either apply a Filter to select the events, or we can use the default `true` Filter expression to apply the Function to all incoming events.

Adding Fields Example

Let's see how we add `dc::nyc-42` to all events with `sourcetype=='access_combined'`:

- First make sure you have a Route and Pipeline configured to match desired events.
- Next, let's add a **Eval** function to it:

Defining the Eval Function's filter expression

- Next, let's click on **Add Field**, add our `dc` field, and click **Save**.

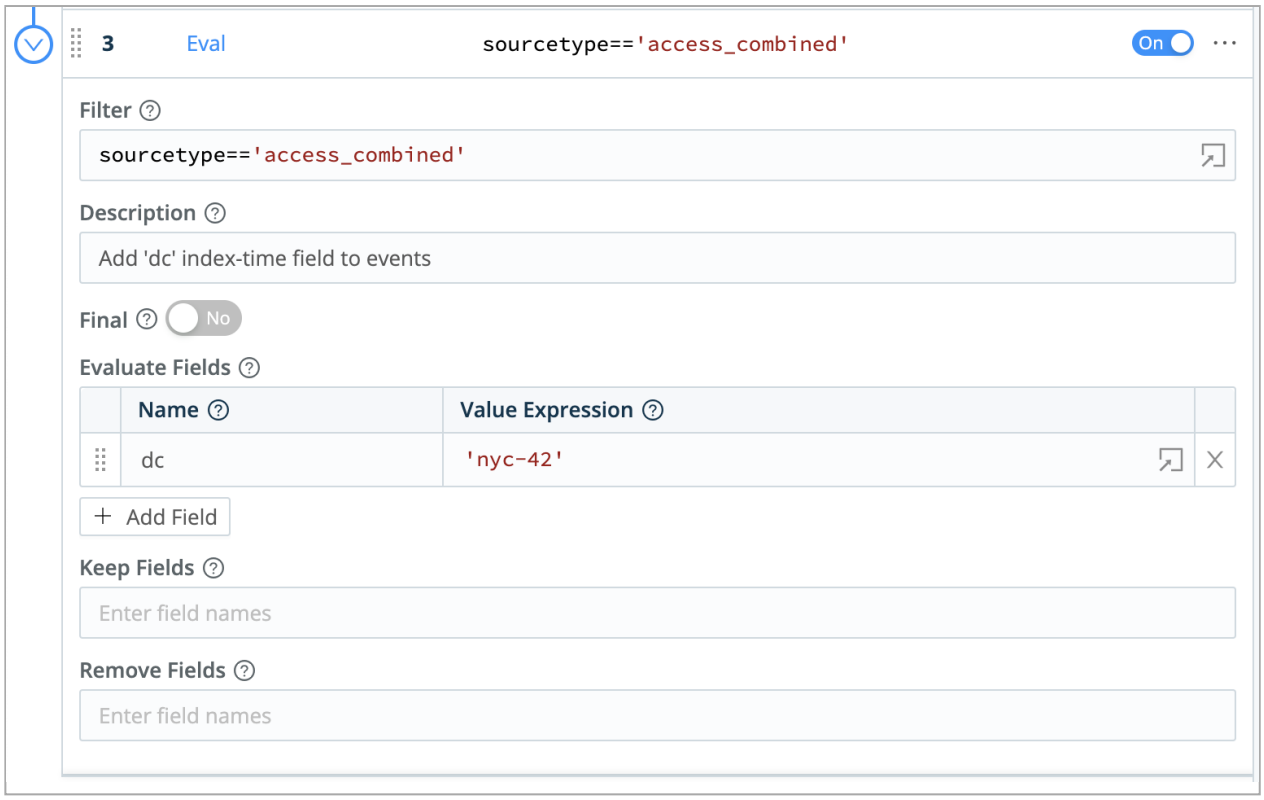

Adding the `dc` field

To confirm, verify that this search returns results: `sourcetype="access_combined" dc::nyc-42`

- You can add more conditions to the filter, if you'd like. For example, to limit the field to only events from hosts that start with `web-01`, we can change the filter input as below:

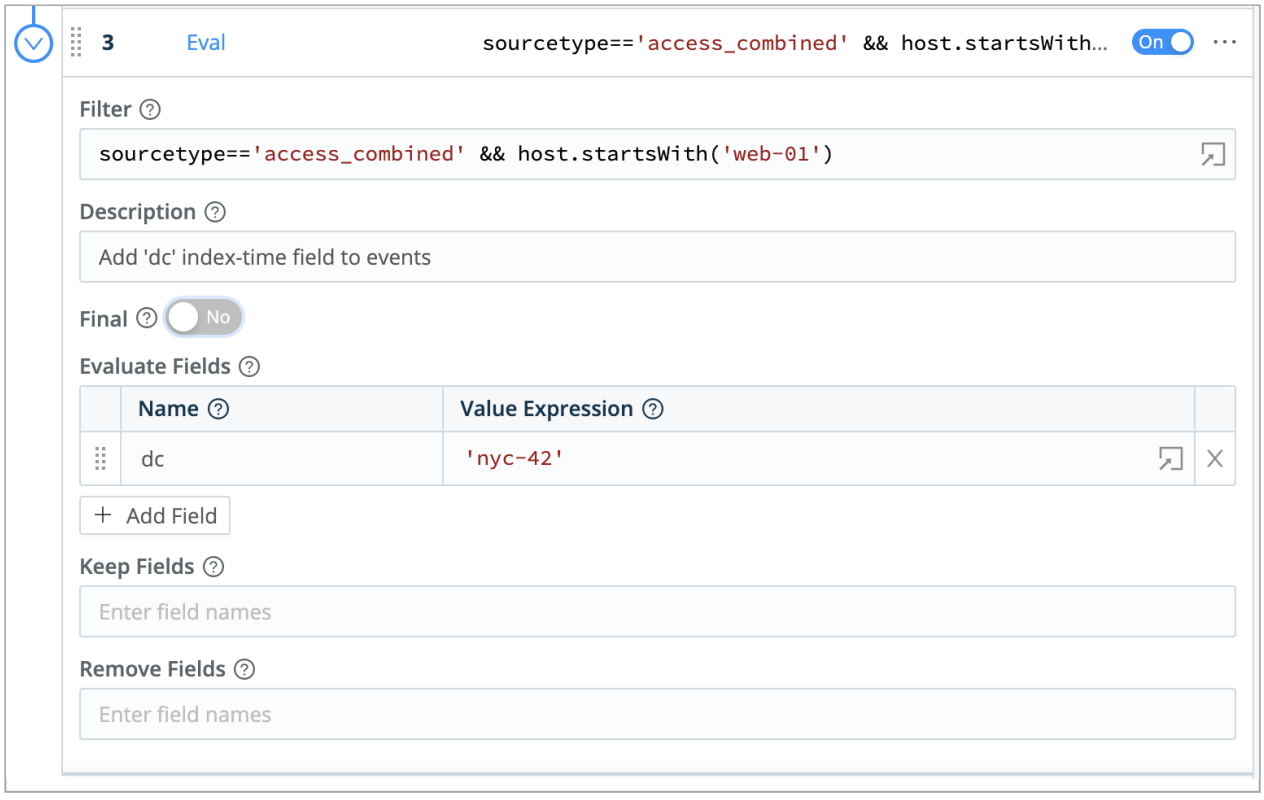

This is a **very** powerful method to change incoming events in real time. In addition to providing the right context at the right time, users can further benefit substantially by using `tstats` for **faster** analytics.

Removing Fields

You can remove fields by listing and/or wildcarding field names. Let's see how we can remove all fields that start with `date_`.:

- First, make sure you have a Route and Pipeline configured to match desired events.
- Next, let's add a **Eval** function to it (as above).
- Next, in **Remove Fields**, add `date_*` and hit Save.

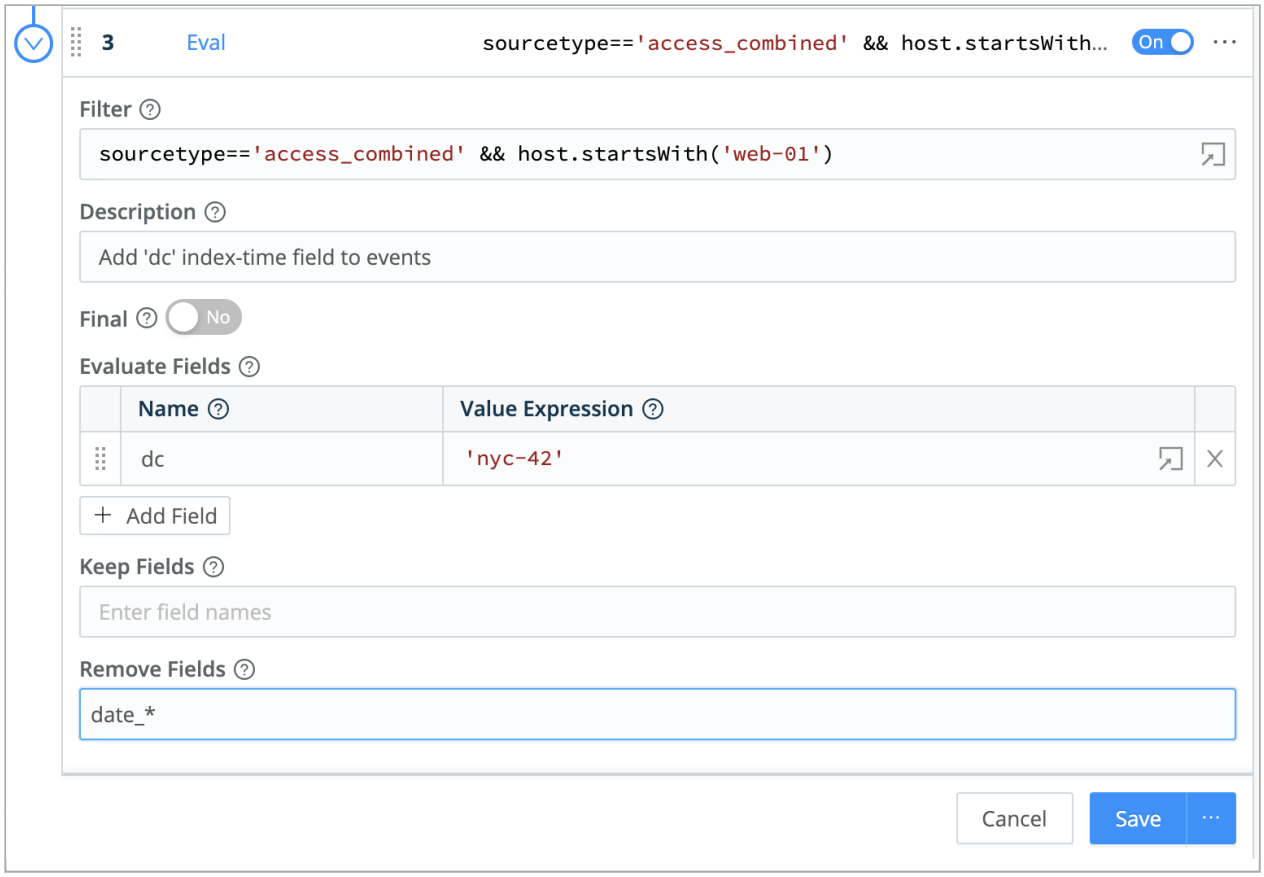

Goodbye `date_` field

To confirm, verify that this search: `sourcetype="access_combined" date_minute=*` will soon stop returning results. Enjoy a more efficient Splunk!

14.5.3. Masking and Obfuscation

Masking and Anonymization of Data in Motion

To mask patterns in real time, we use the out-of-the-box Mask Function . This is similar to `sed` , but with much more powerful functionality.

Masking Capabilities

The Mask Function accepts multiple replacement rules, and accepts multiple fields to apply them to.

Match Regex is a JS regex pattern that describes the content to be replaced. It can optionally contain matching groups. By default, it will stop after the first match, but using `/g` will make the Function replace all matches.

Replace Expression is a JS expression or literal to replace matched content.

Matching groups can be referenced in the **Replace Expression** as `g1` , `g2` ... `gN` , and the entire match as `g0` .

There are several masking methods that are available under `C.Mask.` :

`C.Mask.random` : Generates a random alphanumeric string `C.Mask.repeat` : Generates a repeating char/string pattern, e.g., `XXXX` `C.Mask.REDACTED` : The literal 'REDACTED' `C.Mask.md5` : Generates a MD5 hash of given value `C.Mask.sha1` : Generates a SHA1 hash of given value `C.Mask.sha256` : Generates a SHA256 hash of given value

Almost all methods have an optional `len` parameter which can be used to control the length of the replacement. `len` can be either a number or string. If it's a string, its length will be used. For example:

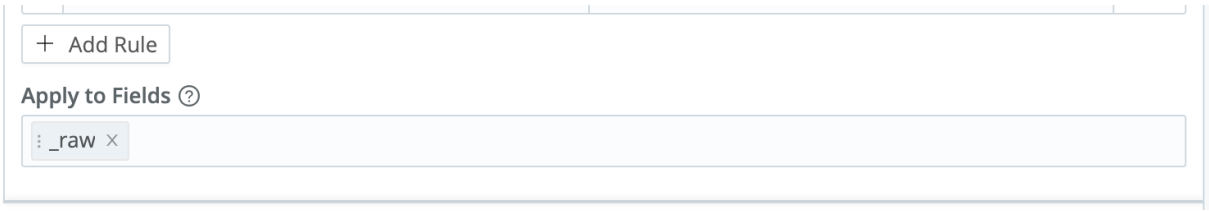

Defining the replacement length

Masking Examples

Let's look at the various ways that we can mask a string like this one: `cardNumber=214992458870391`. The **Regex Match** we'll use is: `/(cardNumber=)(\d+)/g`. In this example:

- `g0 = cardNumber=214992458870391`
- `g1 = cardNumber=`
- `g2 = 214992458870391`

Random Masking with default character length (4):

- **Replace Expression**: `` `${g1}${C.Mask.random()}` ``
- **Result**: `cardNumber=HRhc`

Random Masking with defined character length:

- **Replace Expression:** `` `${g1}${C.Mask.random(7)}` ``
- **Result**: `cardNumber=neNSm8r`

Random Masking with length preserving replacement:

- **Replace Expression**: `` `${g1}${C.Mask.random(g2)}` ``
- **Result**: `cardNumber=DroJ73qmyaro51u3`

Repeat Masking with default character length (4):

- **Replace Expression**: `` `${g1}${C.Mask.repeat()}` ``
- **Result**: **Result**: `cardNumber=XXXX`

Repeat Masking with defined character choice and length:

- **Replace Expression**: `` `${g1}${C.Mask.repeat(6, 'Y')}` ``
- **Result**: `cardNumber=YYYYYY`

Repeat Masking with length preserving replacement:

- **Replace Expression**: `` `${g1}${C.Mask.repeat(g2)}` ``
- **Result**: `cardNumber=XXXXXXXXXXXXXX`

Literal REDACTED masking:

- **Replace Expression**: `` `${g1}${C.Mask.REDACTED}` ``
- **Result**: `cardNumber=REDACTED`

Hash Masking (applies to: md5, sha1 and sha256):

- **Replace Expression**: `` `${g1}${C.Mask.md5(g2)}` ``
- **Result**: `cardNumber=f5952ec7e6da54579e6d76feb7b0d01f`

Hash Masking with left N-length* substring (applies to: md5, sha1 and sha256):

- **Replace Expression**: `` `${g1}${C.Mask.md5(g2, 12)}` ``
- **Result**: `cardNumber=d65a3ddb2749` *Replacement length will **not** exceed that of the hash algorithm output; MD5: 32 chars, SHA1: 40 chars, SHA256: 64 chars.

Hash Masking with right N-length* substring (applies to: md5, sha1 and sha256):

- **Replace Expression**: `` `${g1}${C.Mask.md5(g2, -12)}` ``
- **Result**: `cardNumber= 933bfcebf992` *Replacement length will **not** exceed that of the hash algorithm output; MD5: 32 chars, SHA1: 40 chars, SHA256: 64 chars.

Hash Masking with length* preserving replacement (applies to: md5, sha1 and sha256):

- **Replace Expression**: `` `${g1}${C.Mask.md5(g2, g2)}` ``

- **Result**: `cardNumber= d65a3ddb27493f5 *`Replacement length will **not** exceed that of the hash algorithm output; MD5: 32 chars, SHA1: 40 chars, SHA256: 64 chars.

14.5.4. Reducing Windows XML Events

Here, we demonstrate how to use just a few Cribl Stream Functions to parse WindowsXML events and reduce their volume by 34–70%, dramatically reducing your downstream infrastructure requirements.

Using Eval and C.Text.parseWinEvent

Cribl Stream's internal C.Text.parseWinEvent method parses Windows XML strings and returns a prettified JSON object. You can use this function within an Eval Function to parse an event or an ad hoc XML string. It works like C.Text.parseXml, but with Windows events, it produces more-compact output.

As you can see from its signature, `C.Text.parseWinEvent` accepts an optional `nonValues` parameter that can further reduce an event's size by discarding characters that you specify as redundant.

> (method) `C.Text.parseWinEvent(xml: string, nonValues?: string[]): any`
>
> @param – `xml` – an XML string; or an event field containing the XML.
>
> @param – `nonValues` – array of string values. Elements whose value equals any of the values in this array will be omitted from the returned object. Defaults to `['-']`, meaning that elements whose value equals `-` will be discarded.
>
> @returns – an object representing the parsed Windows Event; or `undefined` if the input could not be parsed.

XML: Threat or Menace?

When working with XML, an anonymous Reddit user's quote sums up the challenge: "Some languages can be read by humans, but not by machines, while others can be read by machines but not by humans. XML solves this problem by being readable to neither." An example of a Windows XML event only reinforces this quote:

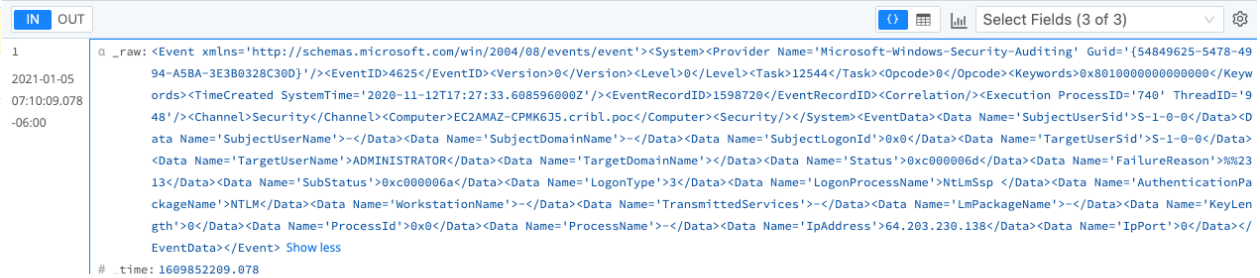

This Windows XML `_raw` event is 1.36KB in size:

	_raw Length	Full Event Length	Number of Fields	Number of Events
IN	1.36KB	1.43KB	3	1
OUT	1.36KB	1.47KB	4	1
DIFF	0.00%	↑ 2.73%	↑ 33.33%	0.00%

Eval to the Rescue

In our initial Eval Function below, the **Value Expression** uses `C.Text.parseWinEvent` to simply parse the `_raw` Windows XML event and turn it into a prettified JSON object:

The resulting JSON event is now down to 921.00B in size, a 34.07% reduction of the event:

	_raw Length	Full Event Length	Number of Fields	Number of Events
IN	1.36KB	1.43KB	3	1
OUT	921.00B	1.00KB	4	1
DIFF	↓ -34.07%	↓ -29.76%	↑ 33.33%	0.00%

> The `C.Text.parseWinEvent(_raw,[])` call yields verbose output that includes XML attributes. If you want flatter output, you can substitute `C.Text.parseXml(_raw, false)`.

Removing Unnecessary Fields with a Better Eval

But we can do better. The fields containing essentially null values (`'0'`,`'0x0'`, or `'-'`) bloat events, demanding extra infrastructure and storage:

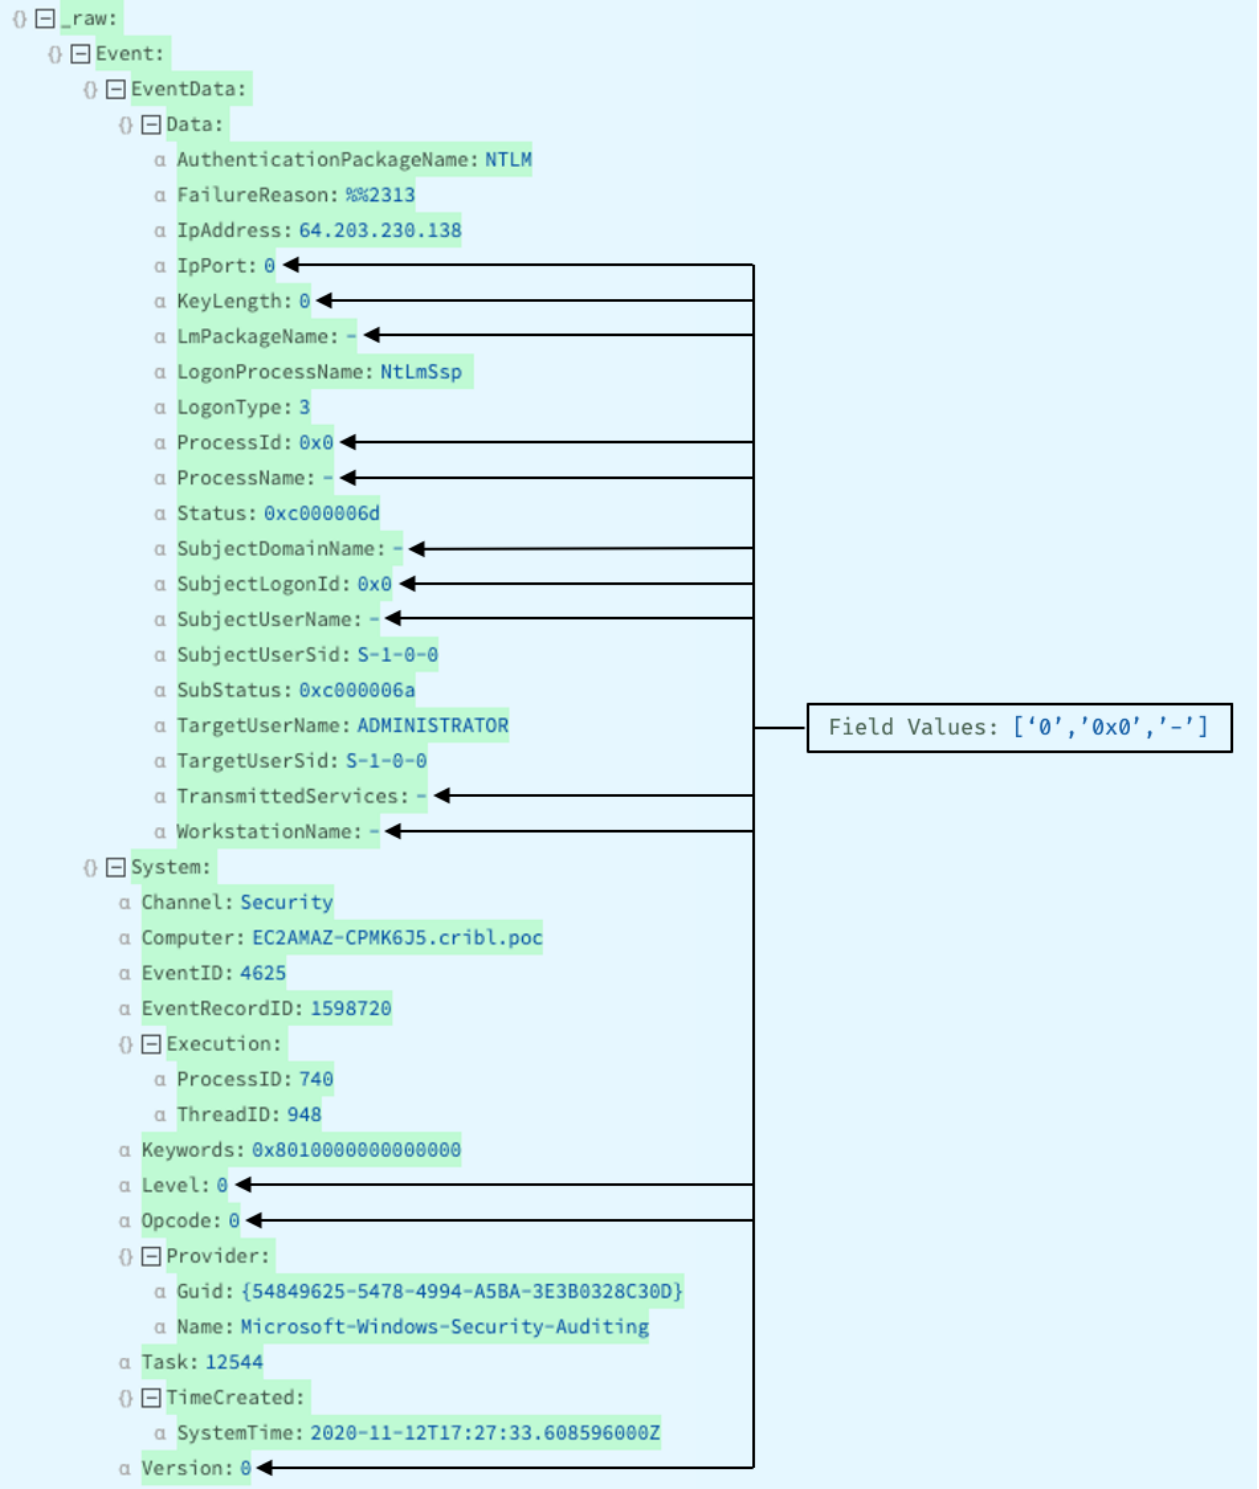

Let's amplify the reduction by removing all of the fields whose values are in the set: `['0','0x0','-']`. This improved version of our Eval Function parses the Windows XML event, and discards `['0','0x0','-']` values. (Its preceding row also tidies up events by removing tabs and curly braces, and replacing newlines and returns with commas.) The result is an even **smaller** prettified JSON object:

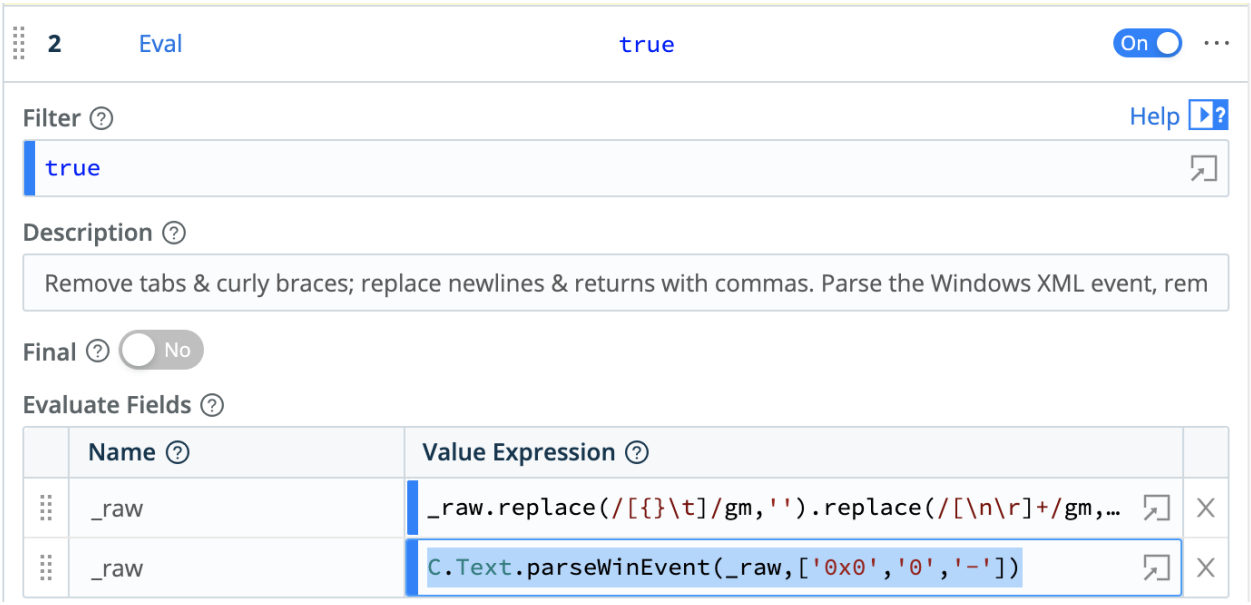

If you compare this Preview-pane screenshot to the Preview screenshot above, you can confirm that the fields with values matching `['0','0x0','-']` are removed:

The event is now down to 678.00B in size, translating to a 51.47% reduction from the original event:

	_raw Length ⓘ	Full Event Length ⓘ	Number of Fields ⓘ	Number of Events ⓘ
IN	1.36KB	1.43KB	3	1
OUT	678.00B	785.00B	4	1
DIFF	↓ -51.47%	↓ -46.42%	↑ 33.33%	0.00%

Flatten Function

Cribl Stream's Flatten Function is designed to flatten fields out of a nested structure. Let's flatten the JSON object within `_raw`, to see if we can further reduce the event's size before we send it to our preferred destinations:

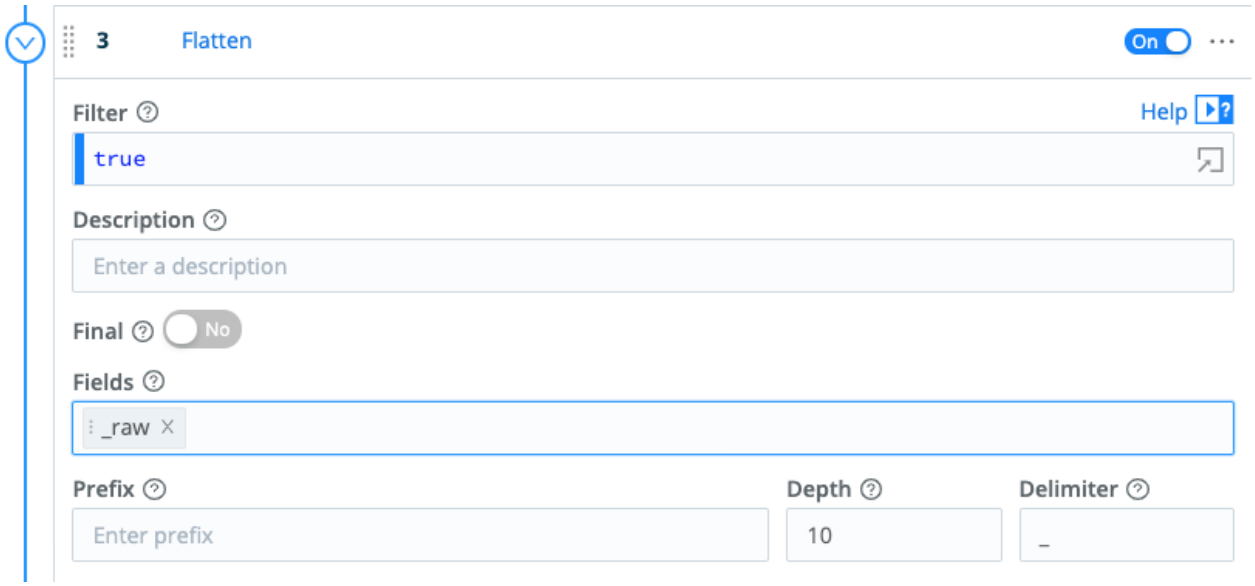

Using Flatten, we've successfully created top-level fields from the nested JSON structure:

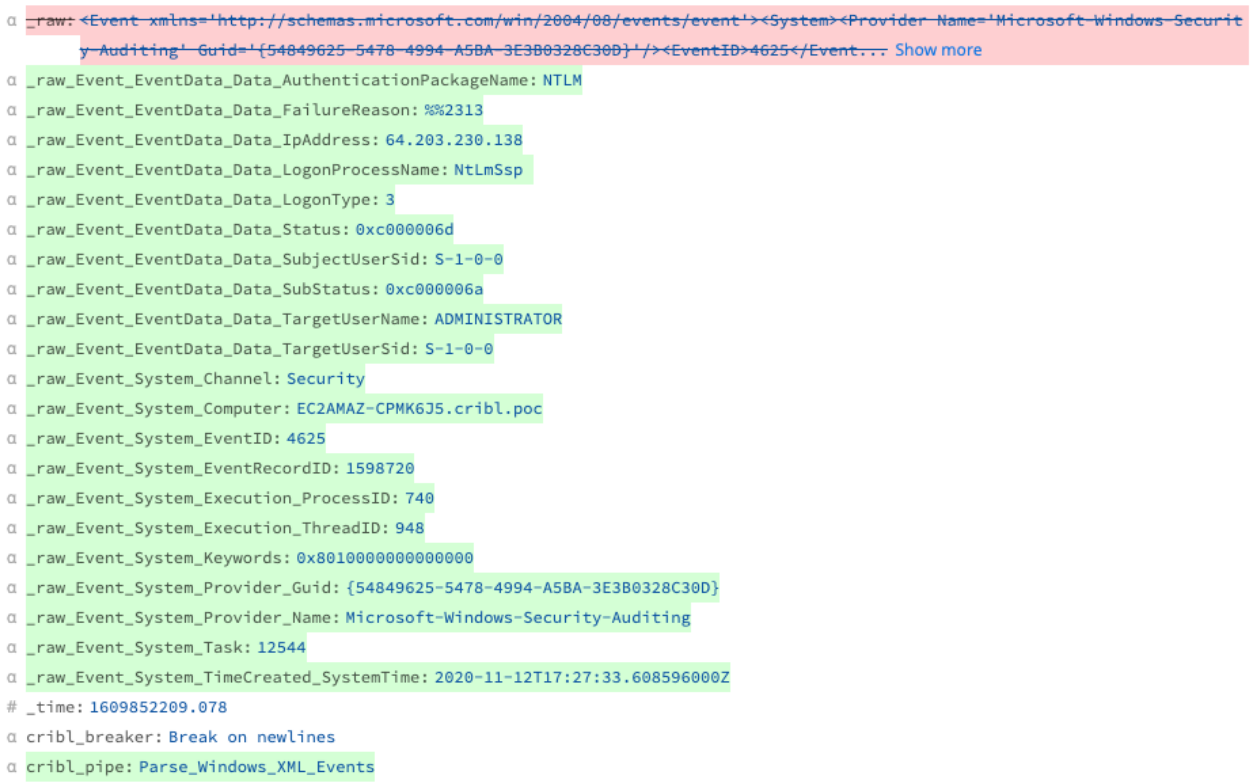

> Don't worry about the `_raw` field's deletion (red strikeout). This is the Flatten Function's default behavior. We'll restore `_raw` after we clean and reduce the event even more.

The flattened field names are extracted from `_raw` and delimited with `_`. These field names are quite long. We can optimize them using the Rename Function.

Rename Function

Rename is designed to change fields' names, or to reformat their names (e.g., to normalize names to camelcase). You can use Rename to change specified fields (much like Eval), or to accomplish bulk renaming based on a JavaScript expression (much like the Parser Function). But Rename offers a streamlined way to alter only field names, without other effects.

Let's use Rename to remove any unnecessary prefixes from the field names, to further shrink our events. In the **Renaming Expression**, we build a JavaScript expression to match the field names' prefixes (up to the underscore):

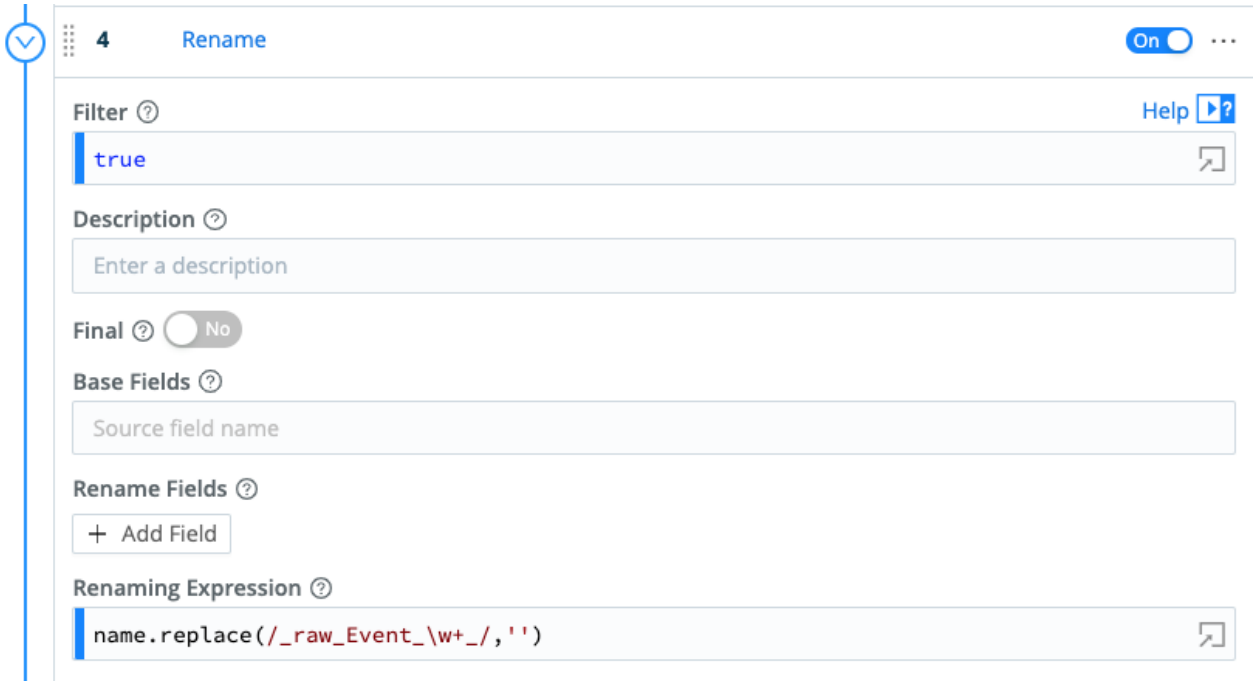

The resulting field names are now much more compact, and easier to work with and manage:

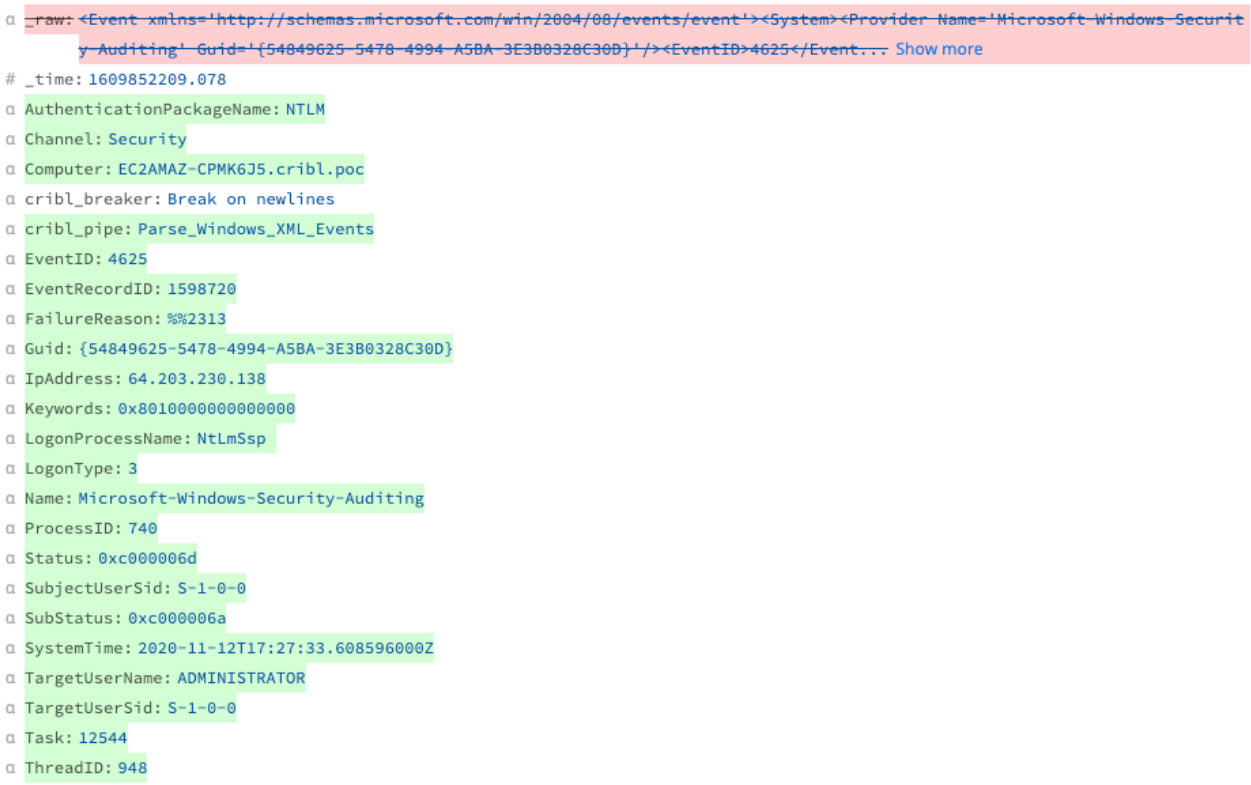

Serialize Function

We started with bloated Windows XML data, and we've parsed and prettified it into JSON. Next, we'll extract key-value pairs. We'll use the Serialize Function, which serializes an event's content into a predefined format.

We set Serialize to change the **Type** to key-value pairs. (The Function's other supported target Types include JSON Object and CSV.) Here, Serialize takes the extracted fields and puts them back into `_raw`:

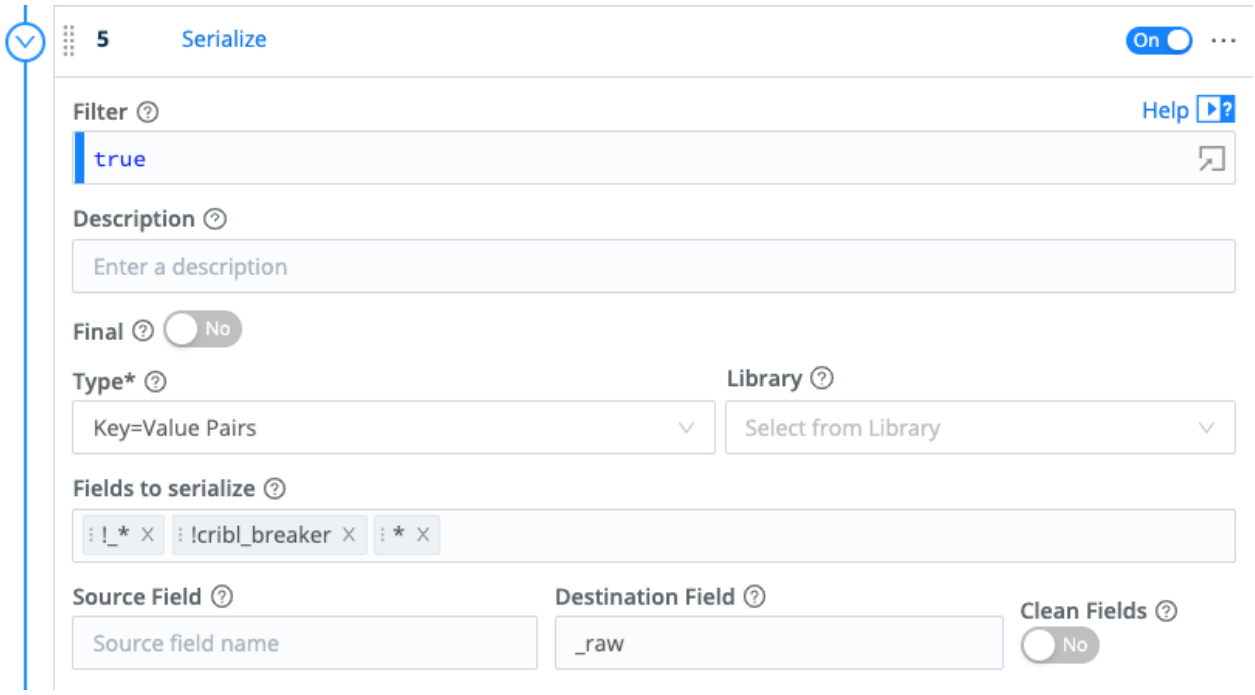

In the Preview pane, the `_raw` field is now back, serialized into compact, tidy key-value pairs:

The last step is to remove any of the extracted fields you don't need before sending events to your destinations. We'll again call on the Eval Function, which adds or removes fields in events. (For a Splunk

destination, these are index-time fields.) This final Eval Function looks like this:

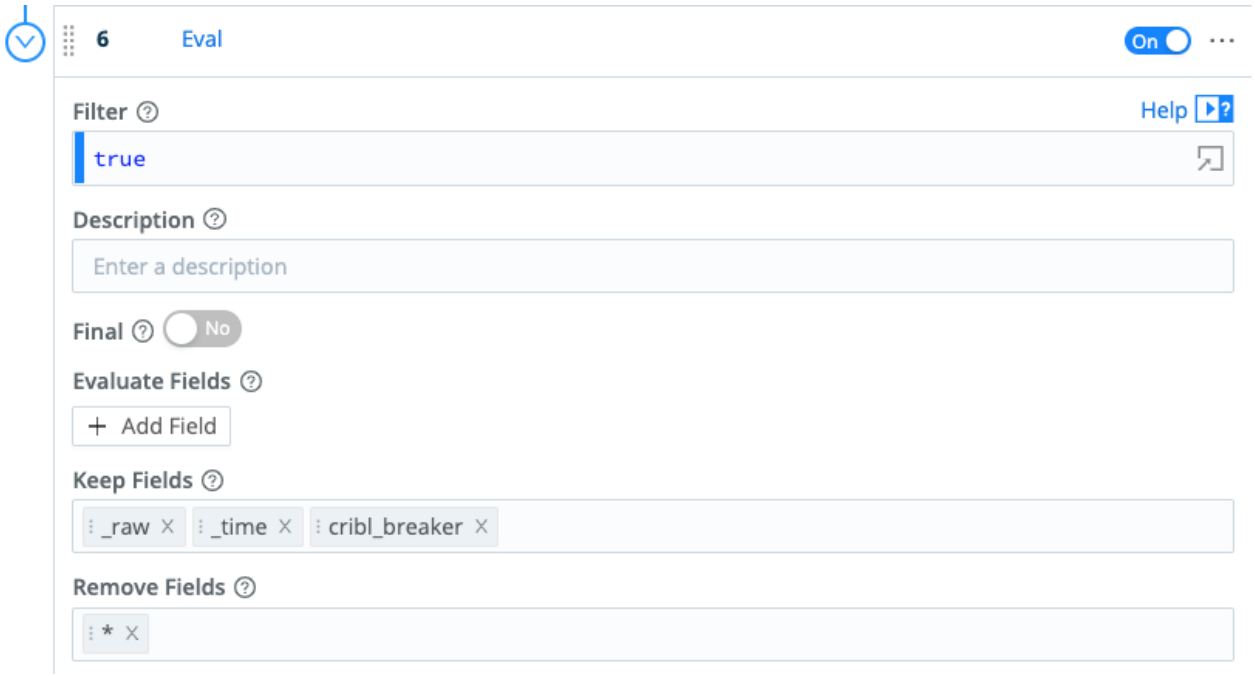

To sum up, we've successfully transformed the original Windows XML event into key-value pairs:

And we've dramatically reduced the event's size, while retaining all of the necessary fields. The event is now down to 513.00B in size, translating to a 63.28% reduction from the original Windows XML:

	_raw Length	Full Event Length	Number of Fields	Number of Events
IN	1.36KB	1.43KB	3	1
OUT	513.00B	621.00B	4	1
DIFF	↓ -63.28%	↓ -57.61%	↑ 33.33%	0.00%

Try This at Home

Below is an export of the whole Cribl Stream Pipeline presented here. Import this JSON to experiment with it and modify it to match your own needs:

Win XML Pipeline

```
{
  "id": "Windows_Security_Events",
  "conf": {
    "output": "default",
    "groups": {},
    "asyncFuncTimeout": 1000,
    "functions": [
      {
        "filter": "true",
        "conf": {
          "comment": "This Cribl Stream Pipeline reduces Microsoft Windows XML
events, retains full fidelity of the data, and dramatically reduces license and
storage costs by up to 70%.\n\nAuthor: David Maislin - (david@cribl.io) - Find me on
our Community Slack"
        },
        "id": "comment"
      },
      {
        "filter": "true",
        "conf": {
          "add": [
            {
              "name": "_raw",
              "value": "_raw.replace(/[{}\\t]/gm,'').replace(/[\\n\\r]+/gm,',')"
            },
            {
              "name": "_raw",
              "value": "C.Text.parseWinEvent(_raw,['0x0','0','-'])"
            }
          ]
        },
        "id": "eval",
        "disabled": false,
        "description": "Remove tabs & curly braces; replace newlines & returns with
commas. Parse the Windows XML event, removing null or unnecessary fields &
whitespace."
      },
      {
        "filter": "true",
        "conf": {
          "fields": [
            "_raw"
          ],
          "prefix": "",
          "depth": 5,
          "delimiter": "_"
        },
        "id": "flatten",
        "disabled": false,
        "description": "Flatten the object into key value fields"
      },
      {
        "filter": "true",
        "conf": {
          "baseFields": [],
          "renameExpr": "name.replace(/_raw_Event_\\w+_/,'')",
          "rename": []
        },
        "id": "rename",
```

```
        "disabled": false,
        "description": "Rename the top level fields and remove the log suffix"
      },
      {
        "filter": "true",
        "conf": {
          "type": "kvp",
          "fields": [
            "!_*",
            "!cribl_*",
            "!index",
            "!host",
            "!source",
            "!sourcetype",
            "*"
          ],
          "dstField": "_raw",
          "cleanFields": false
        },
        "id": "serialize",
        "disabled": false,
        "description": "Serialize top level events back into _raw in the desired
type."
      },
      {
        "filter": "true",
        "conf": {
          "keep": [
            "_time",
            "_raw"
          ],
          "remove": [
            "*"
          ]
        },
        "id": "eval",
        "disabled": false,
        "description": "Drop unnecessary fields."
      }
    ]
  }
}
```

Finally, here's a sample of Windows XML events that you can upload to Cribl Stream's Preview pane to try this out:

Sample data

<Event xmlns='http://schemas.microsoft.com/win/2004/08/events/event'><System>
<Provider Name='Microsoft-Windows-Security-Auditing' Guid='{54849625-5478-4994-A5BA-
3E3B0328C30D}'/><EventID>4625</EventID><Version>0</Version><Level>0</Level>
<Task>12544</Task><Opcode>0</Opcode><Keywords>0x8010000000000000</Keywords>
<TimeCreated SystemTime='2020-11-12T17:27:33.608596000Z'/>
<EventRecordID>1598720</EventRecordID><Correlation/><Execution ProcessID='740'
ThreadID='948'/><Channel>Security</Channel><Computer>EC2AMAZ-
CPMK6J5.cribl.poc</Computer><Security/></System><EventData><Data
Name='SubjectUserSid'>S-1-0-0</Data><Data Name='SubjectUserName'>-</Data><Data
Name='SubjectDomainName'>-</Data><Data Name='SubjectLogonId'>0x0</Data><Data
Name='TargetUserSid'>S-1-0-0</Data><Data Name='TargetUserName'>ADMINISTRATOR</Data>
<Data Name='TargetDomainName'></Data><Data Name='Status'>0xc000006d</Data><Data
Name='FailureReason'>%%2313</Data><Data Name='SubStatus'>0xc000006a</Data><Data
Name='LogonType'>3</Data><Data Name='LogonProcessName'>NtLmSsp </Data><Data
Name='AuthenticationPackageName'>NTLM</Data><Data Name='WorkstationName'>-</Data>
<Data Name='TransmittedServices'>-</Data><Data Name='LmPackageName'>-</Data><Data
Name='KeyLength'>0</Data><Data Name='ProcessId'>0x0</Data><Data Name='ProcessName'>-
</Data><Data Name='IpAddress'>64.203.230.138</Data><Data Name='IpPort'>0</Data>
</EventData></Event>
<Event xmlns='http://schemas.microsoft.com/win/2004/08/events/event'><System>
<Provider Name='Microsoft-Windows-Security-Auditing' Guid='{54849625-5478-4994-A5BA-
3E3B0328C30D}'/><EventID>4672</EventID><Version>0</Version><Level>0</Level>
<Task>12548</Task><Opcode>0</Opcode><Keywords>0x8020000000000000</Keywords>
<TimeCreated SystemTime='2020-11-12T17:27:33.622556400Z'/>
<EventRecordID>1598721</EventRecordID><Correlation/><Execution ProcessID='740'
ThreadID='2508'/><Channel>Security</Channel><Computer>EC2AMAZ-
CPMK6J5.cribl.poc</Computer><Security/></System><EventData><Data
Name='SubjectUserSid'>S-1-5-18</Data><Data Name='SubjectUserName'>EC2AMAZ-
CPMK6J5$</Data><Data Name='SubjectDomainName'>CRIBL</Data><Data
Name='SubjectLogonId'>0xa58ba5</Data><Data Name='PrivilegeList'>SeSecurityPrivilege
            SeBackupPrivilege
            SeRestorePrivilege
            SeTakeOwnershipPrivilege
            SeDebugPrivilege
            SeSystemEnvironmentPrivilege
            SeLoadDriverPrivilege
            SeImpersonatePrivilege
            SeDelegateSessionUserImpersonatePrivilege
            SeEnableDelegationPrivilege</Data></EventData></Event>
<Event xmlns='http://schemas.microsoft.com/win/2004/08/events/event'><System>
<Provider Name='Microsoft-Windows-Security-Auditing' Guid='{54849625-5478-4994-A5BA-
3E3B0328C30D}'/><EventID>4624</EventID><Version>2</Version><Level>0</Level>
<Task>12544</Task><Opcode>0</Opcode><Keywords>0x8020000000000000</Keywords>
<TimeCreated SystemTime='2020-11-12T17:27:33.622676800Z'/>
<EventRecordID>1598722</EventRecordID><Correlation/><Execution ProcessID='740'
ThreadID='2508'/><Channel>Security</Channel><Computer>EC2AMAZ-
CPMK6J5.cribl.poc</Computer><Security/></System><EventData><Data
Name='SubjectUserSid'>S-1-0-0</Data><Data Name='SubjectUserName'>-</Data><Data
Name='SubjectDomainName'>-</Data><Data Name='SubjectLogonId'>0x0</Data><Data
Name='TargetUserSid'>S-1-5-18</Data><Data Name='TargetUserName'>EC2AMAZ-
CPMK6J5$</Data><Data Name='TargetDomainName'>CRIBL.POC</Data><Data
Name='TargetLogonId'>0xa58ba5</Data><Data Name='LogonType'>3</Data><Data
Name='LogonProcessName'>Kerberos</Data><Data
Name='AuthenticationPackageName'>Kerberos</Data><Data Name='WorkstationName'>-
</Data><Data Name='LogonGuid'>{A9F7AB8C-F5DA-B736-AF84-F1A02DFA3FA4}</Data><Data
Name='TransmittedServices'>-</Data><Data Name='LmPackageName'>-</Data><Data
Name='KeyLength'>0</Data><Data Name='ProcessId'>0x0</Data><Data Name='ProcessName'>-
</Data><Data Name='IpAddress'>::1</Data><Data Name='IpPort'>51932</Data><Data
Name='ImpersonationLevel'>%%1833</Data><Data Name='RestrictedAdminMode'>-</Data>

<Data Name='TargetOutboundUserName'>-</Data><Data Name='TargetOutboundDomainName'>-
</Data><Data Name='VirtualAccount'>%%1843</Data><Data
Name='TargetLinkedLogonId'>0x0</Data><Data Name='ElevatedToken'>%%1842</Data>
</EventData></Event>
<Event xmlns='http://schemas.microsoft.com/win/2004/08/events/event'><System>
<Provider Name='Microsoft-Windows-Security-Auditing' Guid='{54849625-5478-4994-A5BA-
3E3B0328C30D}'/><EventID>4634</EventID><Version>0</Version><Level>0</Level>
<Task>12545</Task><Opcode>0</Opcode><Keywords>0x8020000000000000</Keywords>
<TimeCreated SystemTime='2020-11-12T17:27:33.624089200Z'/>
<EventRecordID>1598723</EventRecordID><Correlation/><Execution ProcessID='740'
ThreadID='780'/><Channel>Security</Channel><Computer>EC2AMAZ-
CPMK6J5.cribl.poc</Computer><Security/></System><EventData><Data
Name='TargetUserSid'>S-1-5-18</Data><Data Name='TargetUserName'>EC2AMAZ-
CPMK6J5$</Data><Data Name='TargetDomainName'>CRIBL</Data><Data
Name='TargetLogonId'>0xa58ba5</Data><Data Name='LogonType'>3</Data></EventData>
</Event>
<Event xmlns='http://schemas.microsoft.com/win/2004/08/events/event'><System>
<Provider Name='Microsoft-Windows-Security-Auditing' Guid='{54849625-5478-4994-A5BA-
3E3B0328C30D}'/><EventID>4625</EventID><Version>0</Version><Level>0</Level>
<Task>12544</Task><Opcode>0</Opcode><Keywords>0x8010000000000000</Keywords>
<TimeCreated SystemTime='2020-11-12T17:27:36.185955600Z'/>
<EventRecordID>1598724</EventRecordID><Correlation/><Execution ProcessID='740'
ThreadID='948'/><Channel>Security</Channel><Computer>EC2AMAZ-
CPMK6J5.cribl.poc</Computer><Security/></System><EventData><Data
Name='SubjectUserSid'>S-1-0-0</Data><Data Name='SubjectUserName'>-</Data><Data
Name='SubjectDomainName'>-</Data><Data Name='SubjectLogonId'>0x0</Data><Data
Name='TargetUserSid'>S-1-0-0</Data><Data Name='TargetUserName'>SCAN</Data><Data
Name='TargetDomainName'></Data><Data Name='Status'>0xc000006d</Data><Data
Name='FailureReason'>%%2313</Data><Data Name='SubStatus'>0xc0000064</Data><Data
Name='LogonType'>3</Data><Data Name='LogonProcessName'>NtLmSsp </Data><Data
Name='AuthenticationPackageName'>NTLM</Data><Data Name='WorkstationName'>-</Data>
<Data Name='TransmittedServices'>-</Data><Data Name='LmPackageName'>-</Data><Data
Name='KeyLength'>0</Data><Data Name='ProcessId'>0x0</Data><Data Name='ProcessName'>-
</Data><Data Name='IpAddress'>163.172.105.54</Data><Data Name='IpPort'>0</Data>
</EventData></Event>

14.5.5. Regex Filtering

To filter events in real time (data in motion), we use the out-of-the-box **Regex Filter** Function. This is similar to nullqueueing with TRANSFORMS in Splunk, but the matching condition is way more flexible.

Regex Filtering Example

Let's see how we can filter out any `sourcetype=='access_combined'` events whose `_raw` field contains the pattern `Opera`:

First, make sure you have a Route and Pipeline configured to match desired events.

Next, let's add a **Regex Filter** Function to it:

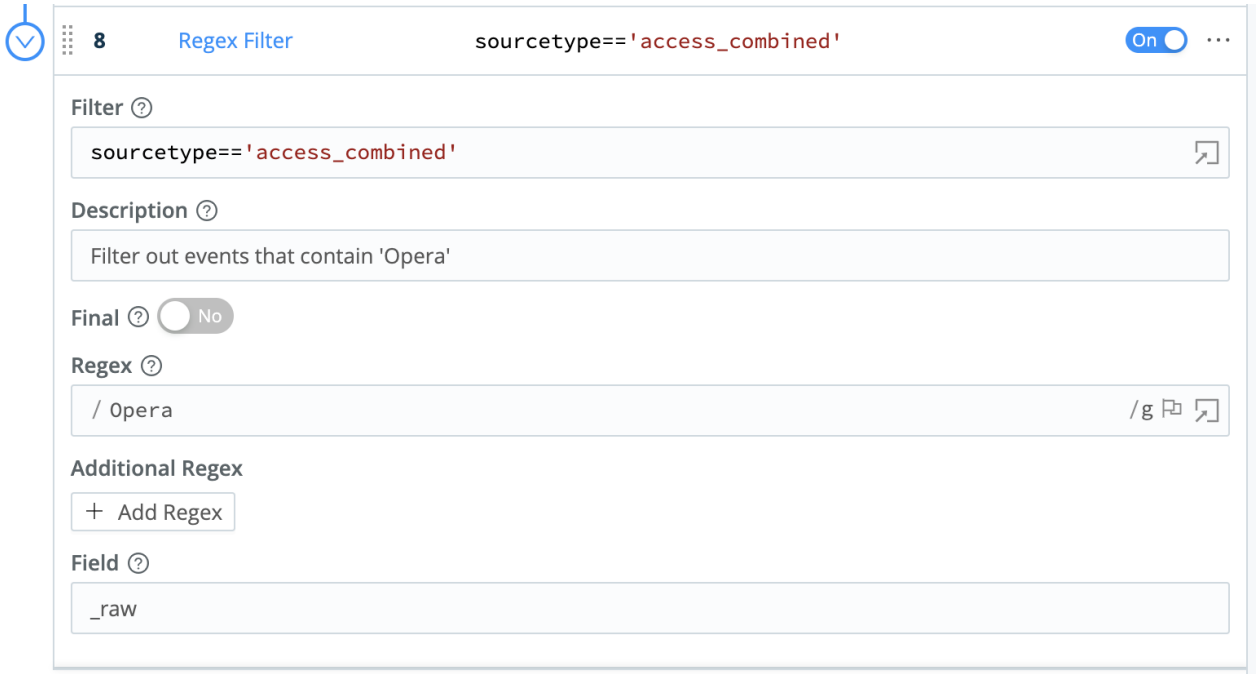

Defining the Regex Filter Function

Next, verify that this search does **not** return any results: `sourcetype="access_combined" Opera`

You can add more conditions to the Filter input field. For example, to further limit the filtering to only events from hosts with domain `dnto.ca`, change the filter input as shown below:

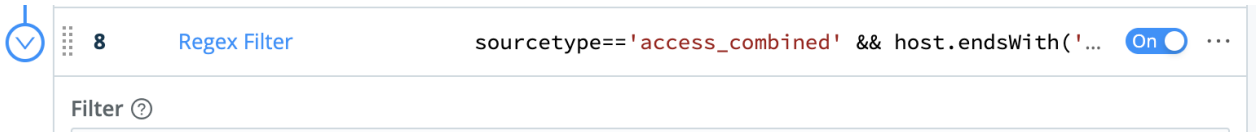

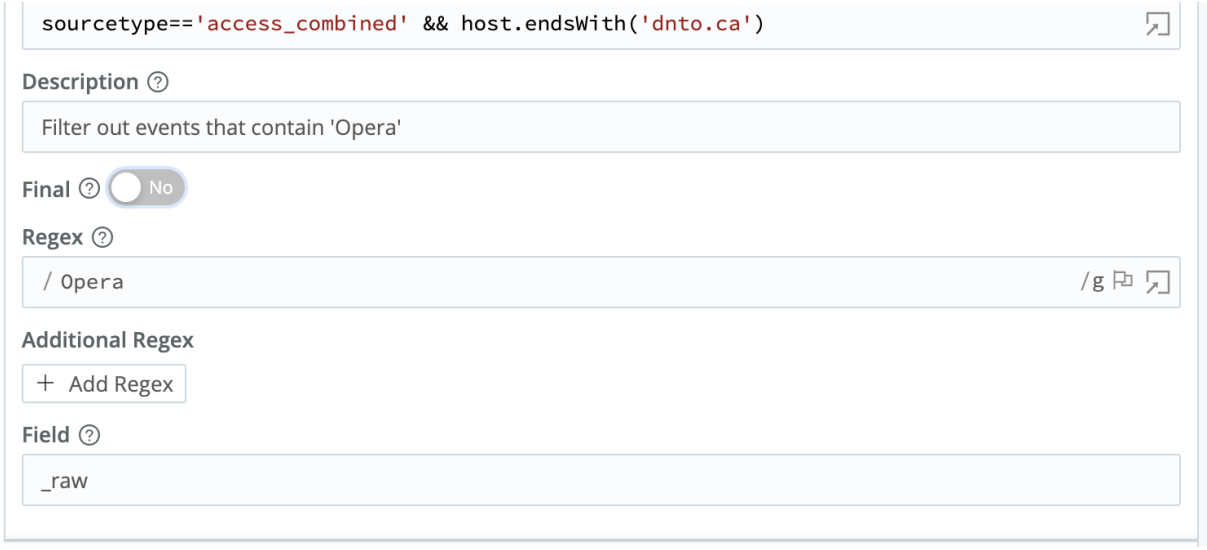

Filtering by host

This is a very flexible method for filtering incoming events in real time, on virtually any arbitrary conditions.

14.6. Using Collectors

14.6.1. Using S3 Storage and Replay

Cribl Stream's Replay options offer organizations fundamentally new ways to manage data, by providing an easy way to selectively ingest, **and re-ingest**, data into systems of analysis. Let's walk through how to use this feature, step by step.

For simplicity, we'll treat the storage destination here as Amazon S3, although it could just as easily be MinIO, or any of several other options.

Choosing JSON vs. Raw Format

You can write data out of Cribl Stream in either of two formats – JSON or raw.

JSON

With this option, the parsed event, with all metadata and modifications it contains at the time it reaches the Destination step, will be wrapped in a JSON object. Each event is one line. This is newline-delimited JSON (abbreviated NDJSON). For example, here is syslog data using the JSON format option:

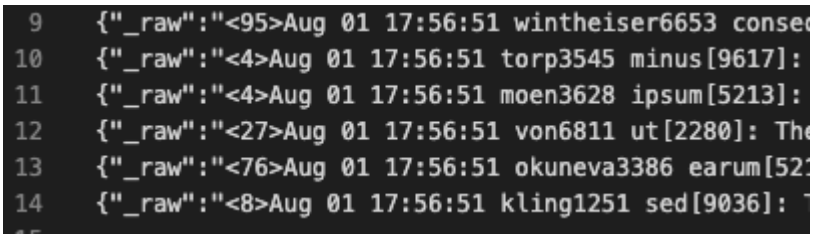

JSON-formatted event

Raw

With this option, the contents of the event's `_raw` field – unparsed, at the time it reaches the Destination step – are written out in plaintext. Each event is one line. For example, here's the same syslog data, except unmodified and unparsed, as written out with the raw option:

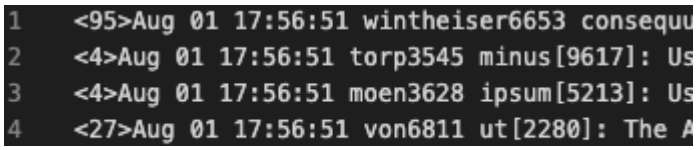

Raw-formatted

Which Format?

Cribl recommends using the default JSON format. Here, we expect that timestamp extractions and other vital enhancements have already been performed. Reusing that information makes sense, and will make your replay simpler.

Notice that in the screen capture above, the **raw** format simply contains the original data. There might be cases where you want this; but usually, exporting the preprocessed event is more desirable.

> You cannot replay data that has been exported as Parquet. The S3 Collector does not support ingesting data in the Parquet format.

Writing the Data Out

The Worker Nodes stage files until certain limits are reached: Time open, idle time, size, or number of files. These settings are available on the Destination configuration modal's **Advanced Settings** tab (see S3 details here).

Once any of the configured limits is reached, the Worker gzips the file and drops it into the object store. If you reach the open-file limit, the oldest file will be targeted.

The S3 Destination's settings also allow you to define how the uploaded files are partitioned. Host, time, sourcetype, source – all the metadata is available to you for this purpose. When you're replaying data from the store, these partitions will be handy, to make your replay searches faster.

We can map segments of the path back to variables (including `time`) that you can use to zero in on the exact logs you need to replay, without requiring checking `_raw`.

> For examples of the expressions Cribl recommends, see the example Destination definition below.

Retrieving the Events

With events stored in an object store, we can now point Cribl Stream to that store to Replay selected events back through the system. We want to use data in the file path as an initial level of filtering, to exclude as much data as we can from download. Object retrieval and unpacking imposes a big resource hit in the Replay process, so minimize your impact radius. Searching against `_raw` data is also possible, but should be secondary to `_time`, `sourcetype`, `index`, `host`, etc.

Retrieval details: The Leader picks one Node to do the discovery exploration, to find the potential objects that are in play. That list of targets is then doled out to the Worker Group to actually pull down the objects, and to examine them for content matches, before executing final delivery. All Worker Nodes share the workload of retrieving and re-injecting the data.

Finally, we need to process the data coming back to extract each event. As with any incoming data stream on a compatible Source, Cribl Stream can use default, or custom, Event Breaker definitions. In this case, we recommended above to use JSON as the format of the events when we write to disk, so we'll use the **Cribl** Event Breaker ruleset on this Source. This Event Breaker contains a newline-delimited-JSON definition.

Setting Up and Running Replay

With the above concepts established, let's put them to work. We'll round-trip data through our Destination and replay it in Cribl Stream.

The Store

Object storage, or any shared storage, will work. As long as all the Cribl Stream Nodes can see it, we're ready to go. For the purposes of this post, let's stick with an S3-compatible store.

You'll need all the credentials, keys, secret keys, endpoints, etc., required to access the bucket that you intend to use in your object store. (For details on cross-account access, see this blog post.) Obviously, the bucket should be able to grow to the size intended for your long-term archival needs.

Storage Class Compatbility

Cribl Stream Collectors and Replay features don't support S3 Glacier, S3 Deep Glacier, or Azure's archive tier, due to long retrieval times for those storage classes.

Collectors and Replay features do support S3 Glacier Instant Retrieval when you're using the S3 Intelligent-Tiering storage class.

:::

The Destination Definition

In your Cribl Stream Worker Group config, create a new S3 Destination. The screenshot below is an example built for this demo.

Use the Destination's **Advanced Settings** tab to adjust the limits, if needed. The defaults are fine for most situations, but depending on your partitioning scheme, we could be talking about 100+ files. So **make sure your staging area has enough space**.

In particular, set the **Max open files** option appropriately. It overrides the size and time limits.
We recommend that the staging area be its own volume, so that you don’t fill up a more-vital volume by mistake.

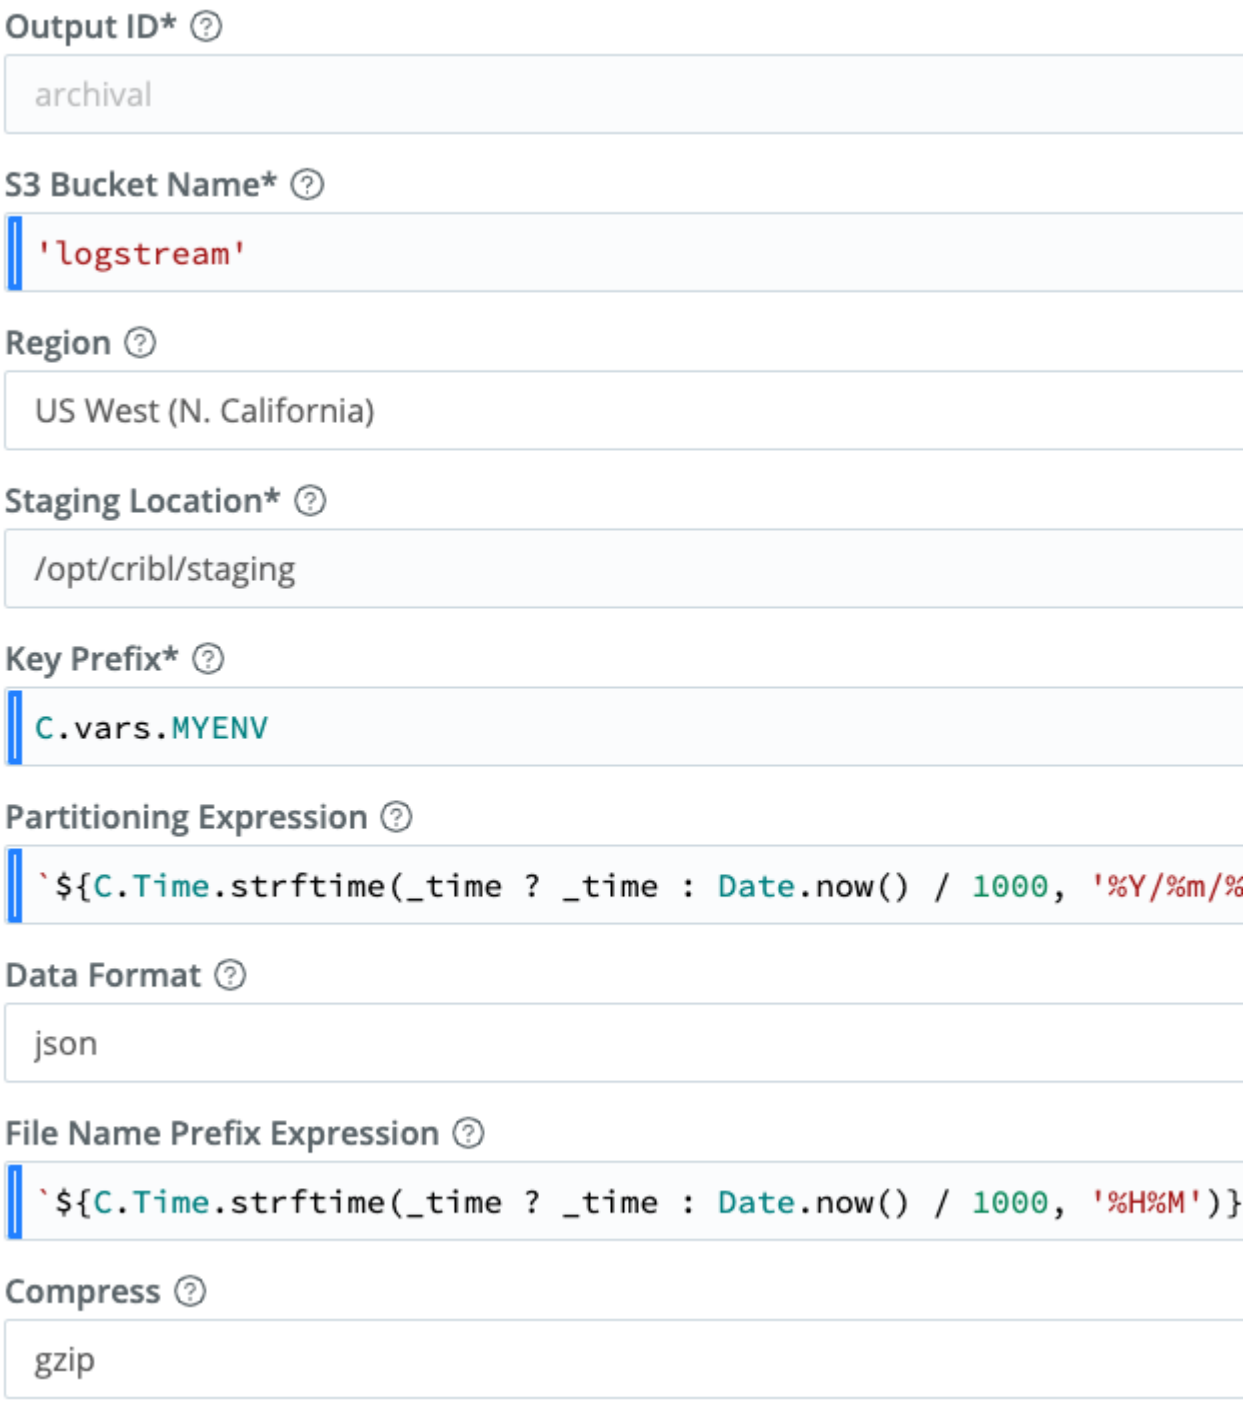

Partitioning and filename expressions

The screen capture above includes the partitioning and filename prefix expressions. Below is the full text of each expression. In a nutshell, we're using time and other metadata to construct a path in the object store, which will be useful to us at replay time:

```
Year/Month/Day/index/host/sourcetype/HHMM-foobar.gz
```

Partitioning (one line):

```
`${C.Time.strftime(_time ? _time : Date.now() / 1000, '%Y/%m/%d')}/${index ? index :
'no_index'}/${host ? host : 'no_host'}/${sourcetype ? sourcetype : 'no_sourcetype'}`
```

Filename:

```
`${C.Time.strftime(_time ? _time : Date.now() / 1000, '%H%M')}`
```

We've also included a Key Prefix from Cribl Stream's **Processing** > **Knowledge** > **Global Variables**. You could use this to partition your logs by environment, or any other qualifier. But this is optional, not a required field.

The Archival Route

Create a new Cribl Stream Route called `Archival` that matches everything you want to archive. In this case, we've set it to `!__replayed`, and set this internal field in the Source (see the next step). Any event that is **not** coming from the defined Replay process will be archived.

Select the `passthru` Pipeline, or create an empty Pipeline and use that. Select the S3 Destination you created above. And finally, make sure **Final** is **not set**. We want data to flow through this Route, not stop at it. So, position the `Archival` Route at or near the top of the Routing table. Save your work, commit, and deploy.

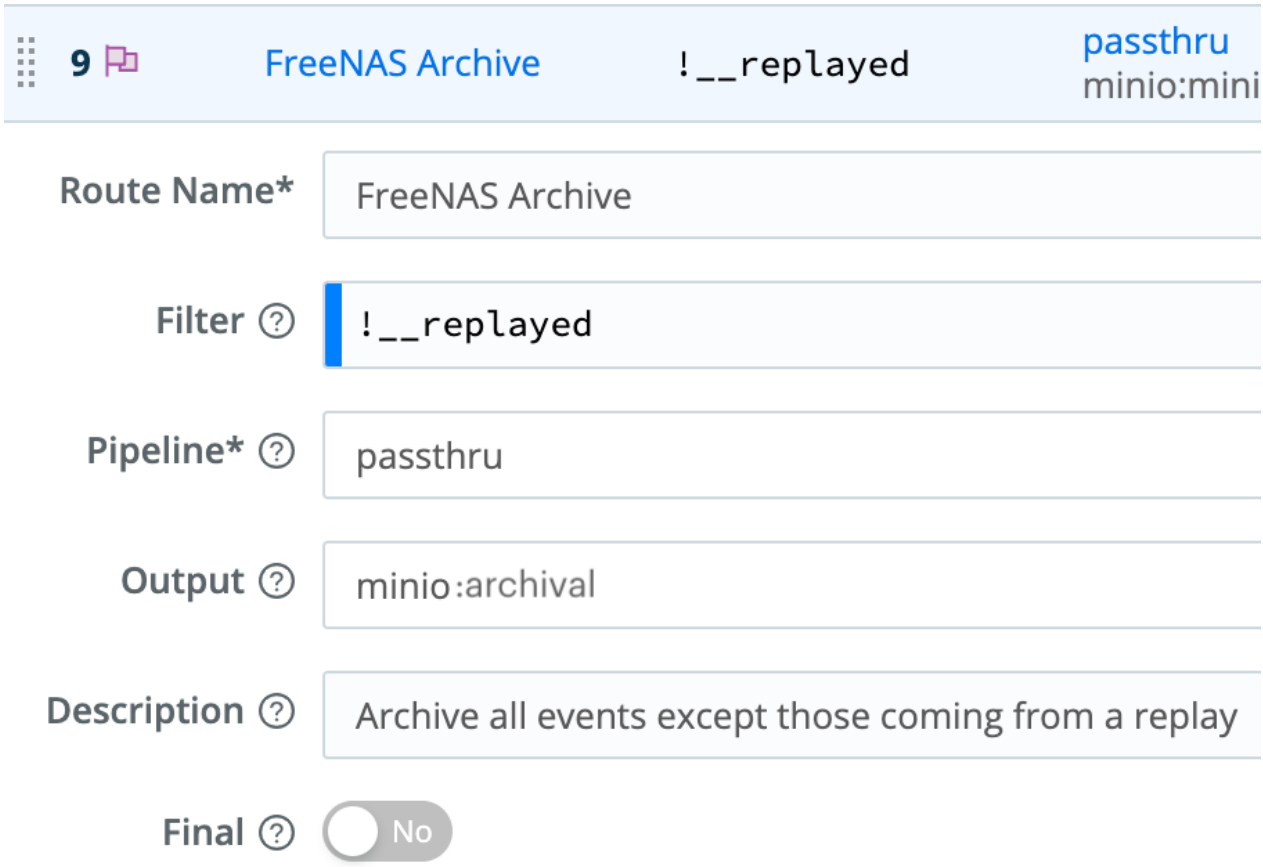

Pipeline configuration

Once saved and deployed, data should be flowing to your object store. Check your work: Go to the Monitoring dashboard and select **Data** > **Destinations** at the top. You want to see a green checkmark on the right side for your S3 Destination. If it's not green, find out why.

> You can also use an S3-capable browser, like Cyberduck, to check the files more manually. (Specific troubleshooting steps are outside the scope of this doc.)



A green (healthy) destination

The Replay Collector

From the top nav of your Cribl Stream Worker Group or single instance, select **Data** > **Sources** > **Collectors** > **S3**, and create a new S3 Collector with the ID `Replay`. Use the **Auto-populate from** option to pull in the configs from your S3 Destination.

In the **Path** field, we need to establish the tokens to extract from the path on the S3 store. If you used the recommended partitioning scheme in the above example Destination definition, we recommend specifying these tokens here:

```
/${MYENV}/${_time:%Y}/${_time:%m}/${_time:%d}/${index}/${host}/${sourcetype}/${_time:%H
```

If you chose to leave out `C.Vars.MYENV`, exclude the first segment. It is **vital** that this scheme match your partitioning scheme in the Destination definition.

With these tokens defined, you can now define filters that exclude and include relevant files before Cribl Stream is required to download and open them. This cuts down on the work required, by orders of magnitude.

> This is a core concept. We want to avoid having to open files to check for matches, by instead relying on key data in the path. Cribl Stream can immediately exclude, without downloading, the files that have no chance of matching our target events.

> Using `_time`, `sourcetype`, `host`, and `index`, it can accurately zero in on the target files. After this high-level filtering, Cribl Stream will download and interrogate the contents of what's left, and will send the matches along to the Routing table.

Finally, under **Result Settings** > **Event Breakers**, select the `Cribl` Ruleset. This Ruleset understands how to parse the JSON packaged events stored by the Archive Destination.

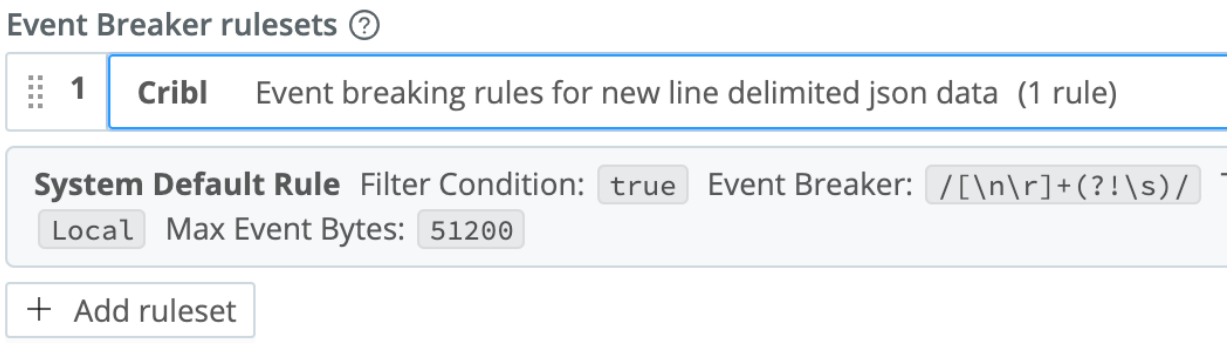

Cribl Event Breaker Ruleset

To make it easier to identify events that have been replayed, create a field (**Result Settings** > **Fields**) named `__replayed` and set it to `true`. You could filter on this field in Routes and Pipelines later. Because it's a double-underscore field, it's internal-only, and won't be passed on to your final destinations. In a previous step, we used it to prevent replayed events from being re-archived:

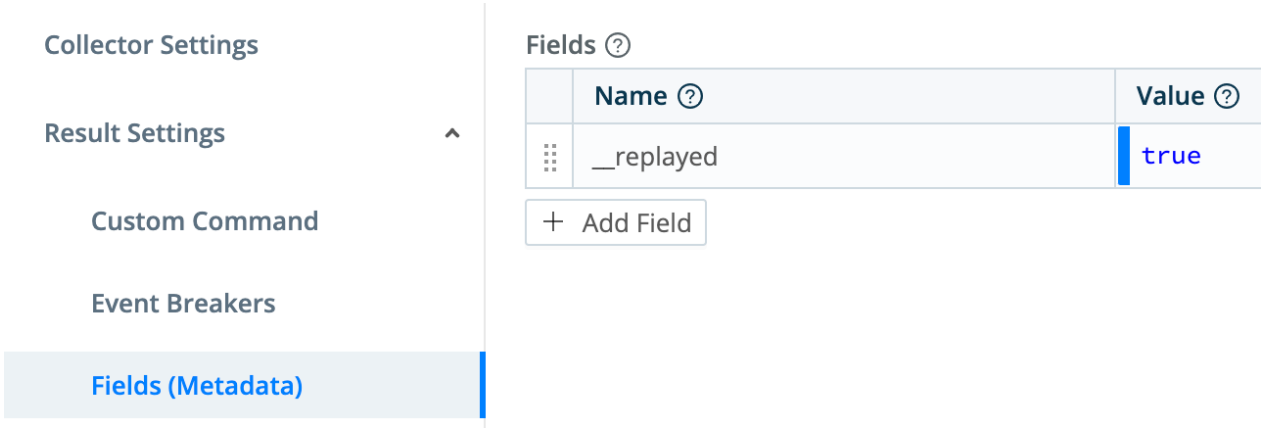

__replayed field

Now save your Collector, and commit and deploy.

Testing Replay

After you've accumulated some data in your S3 store, head over to Pipelines and start a capture. For the filter, use `__replayed`, and run it for 300 seconds, 10 max events.

Once it's running, in a new browser window, navigate back to Collectors, and run your Replay Collector. Filter on `true`, and set the **Earliest** time to `-1h` and the **Latest** to `now`.

You can run it in Preview mode to make sure you get results, and then come back and do a full run. (Or you can just do a full run right off the bat if you're confident.)

With a running job, you can click on the job ID to follow its progress. You can also pop back over to the Capture browser window or tab, and you should see events there.

In a full run, the events will proceed through your Routes as normal, and will land wherever your original Routes and Pipelines dictate. In this case, they landed in Splunk, and we could easily see duplicate events – that is, **exact** duplicate events – in the 1-hour timeframe that the Collector job defined.

Once defined, this Collector can be controlled via scheduling, manual runs, or API calls. And in production use, when configuring the job's **Run configuration** or **Schedule configuration** modal, you'd want to fill in the **Filter** expression to meet your needs.

14.6.2. Using REST/API Collectors

The REST/API Endpoint Collector is powerful, but complex. This use case demonstrates several examples of building and running REST Collectors to pull data from public and simulated REST endpoints.

1. Basic HTTP GET

This example performs an HTTP GET operation against an external Joke API. This API uses a license key header to authenticate the user.

Discover type: None

Collect URL: 'https://matchilling-chuck-norris-jokes-v1.p.rapidapi.com/jokes/random'

Collect parameters: None

Collect headers:

```
accept: 'application/json'

x-rapidapi-key: 'e4068647ffmsh65536596798f49dp17e998jsn342bac862377'

x-rapidapi-host: 'matchilling-chuck-norris-jokes-v1.p.rapidapi.com'

useQueryString: true
```

Pagination: None

Authentication: None

Event Breaker: JSON Newline Delimited – use Cribl Stream's built-in **Cribl > ndjson** rule, and associate it with the Collector to parse the JSON document.

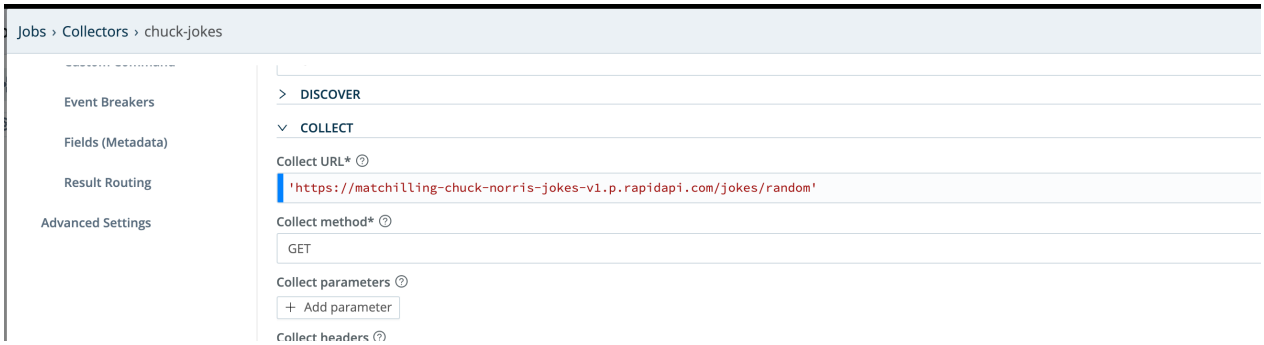

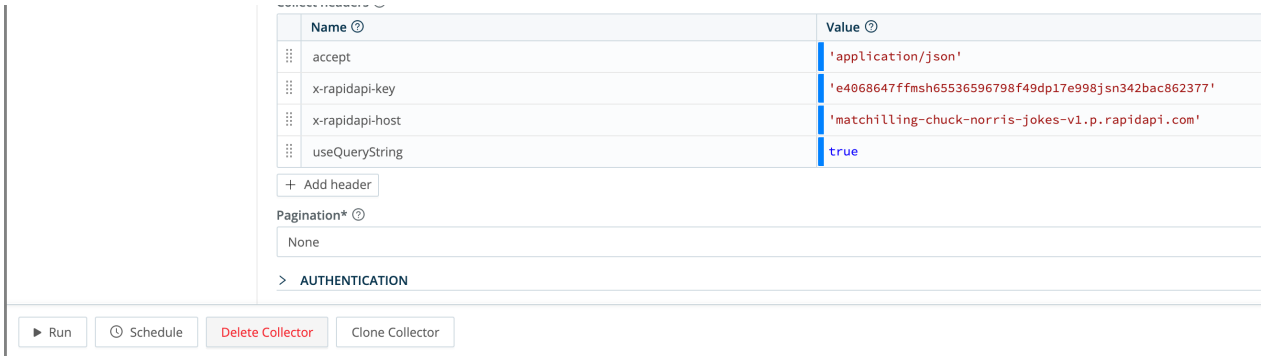

Collector configuration for basic HTTP GET

Results

When run (in preview mode), the Collector should return a single JSON record. If the Collector is set up with an NDJSON event breaker, it will look like this:

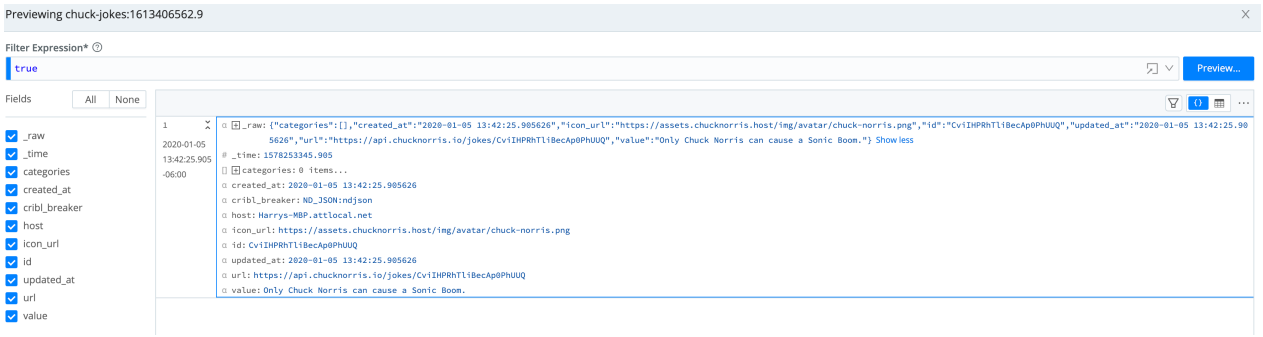

Returned event

2. HTTP GET with Pagination via URL Attribute

The REST Collector's Pagination feature (available in Cribl Stream 2.4.3 and above) allows collection to retrieve 1–*N* pages of data, using attributes returned in either the response body or response header. The returned attribute can either be a URL (referencing the next page), or a token that can be added to subsequent request headers or parameters.

In this example, a returned response-body attribute contains a URL that references the next page. Pagination will continue until either the Collector's **Max Pages** setting is reached, or no more pages are present (i.e., the returned attribute is not present in the response body).

This example's API retrieves near-Earth asteroid data from NASA. The example uses a JSON Array Event Breaker to extract individual records from an array attribute in the response.

Discover type: None

Collect URL: 'http://www.neowsapp.com/rest/v1/neo/browse?api_key=oDa6w0fjsKEb1N3bMA5dMLhatMJ4WC5XtOBTrLrk'

Collect parameters: None – Parameters in this example are added to the header. Static parameters (i.e., parameters that don't reference variables) can safely be added to the URL. Any parameters that do reference variables should always be added in the **Collect parameters** section, to allow filtering of values that evaluate as undefined.

Collect headers: None

Pagination: Response Body Attribute

Response attribute: `next`

Authentication: None

Event Breaker: JSON Array

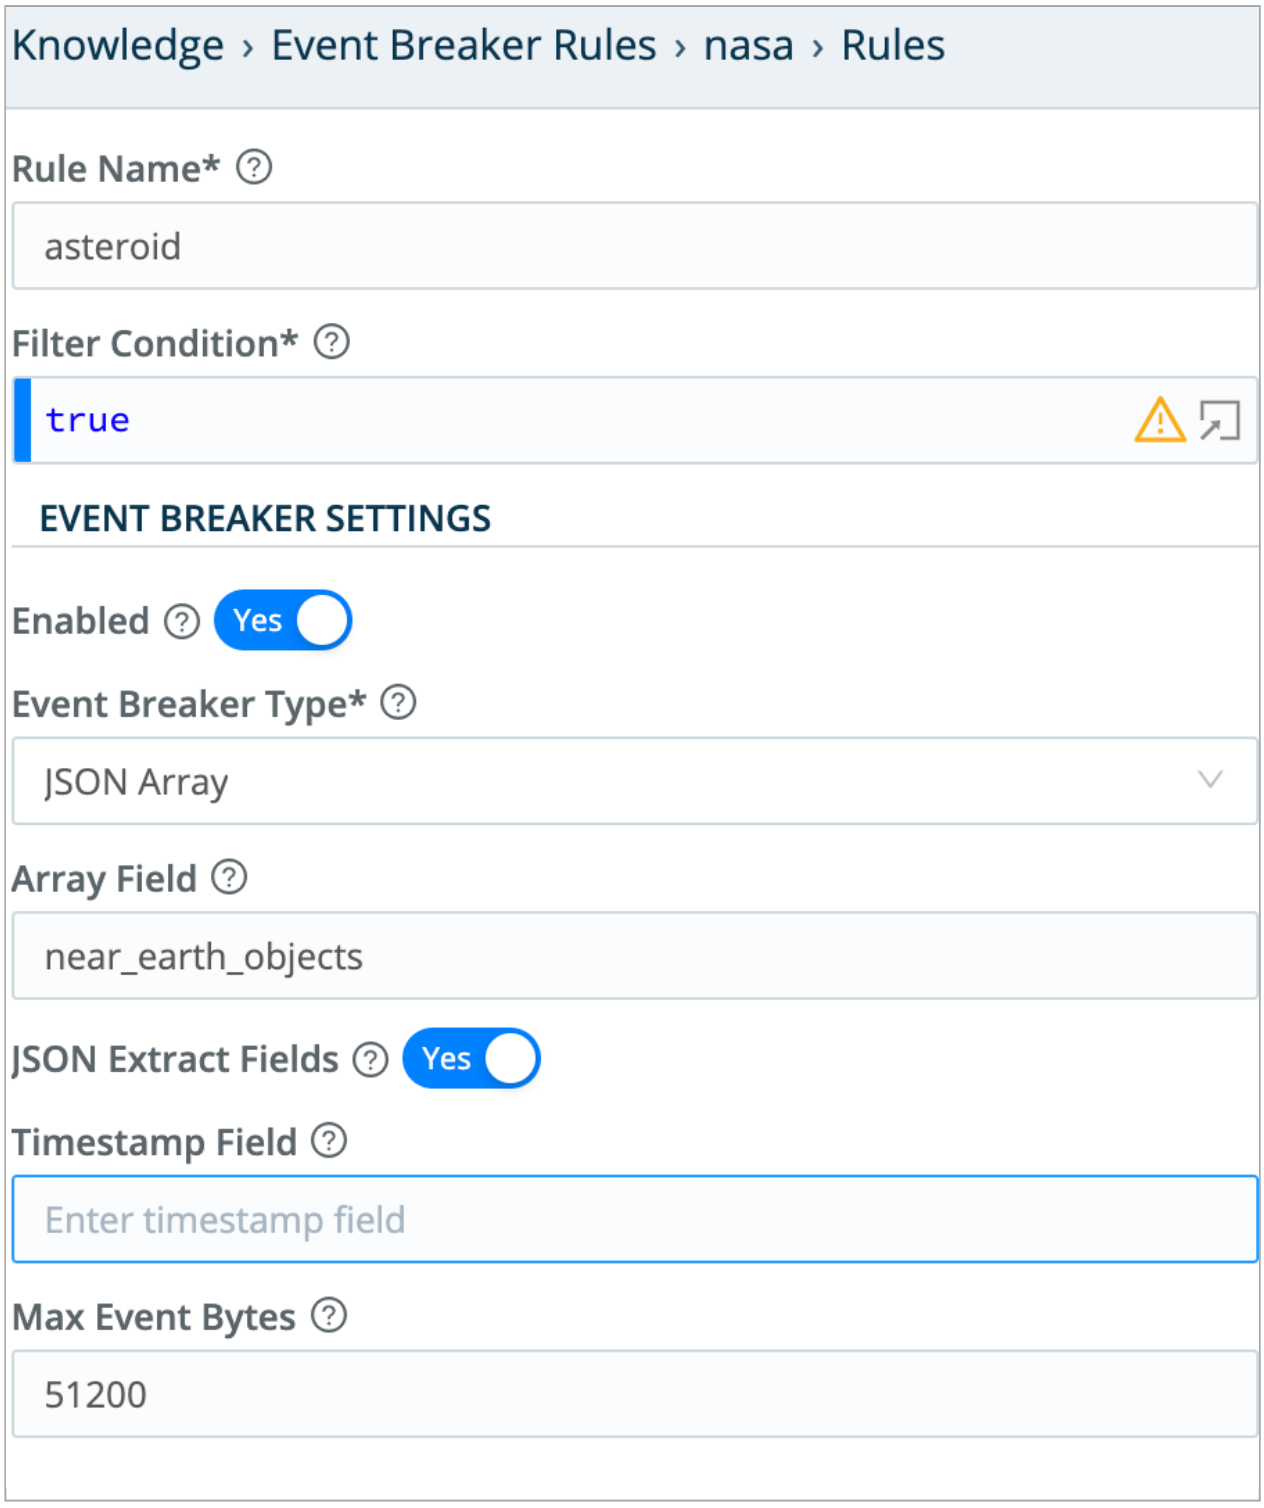

Event Breaker configuration

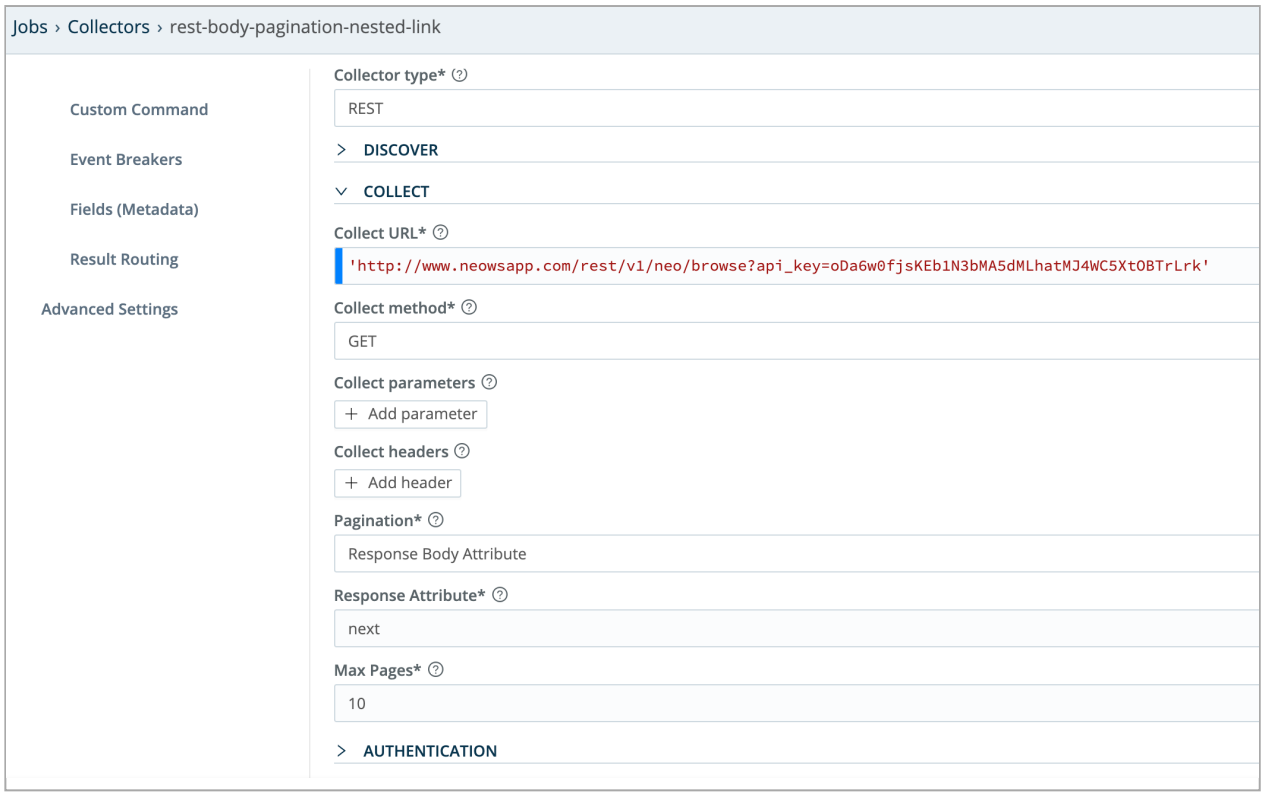

Collector configuration for HTTP GET, paginated via URL Attribute

When run (in Preview mode), the collector should return multiple records extracted from the Event Breaker. In this example, we limited output to 10 pages of data. This particular dataset has over 1,000 total pages, so it's a good idea to limit output to avoid a job that runs too long.

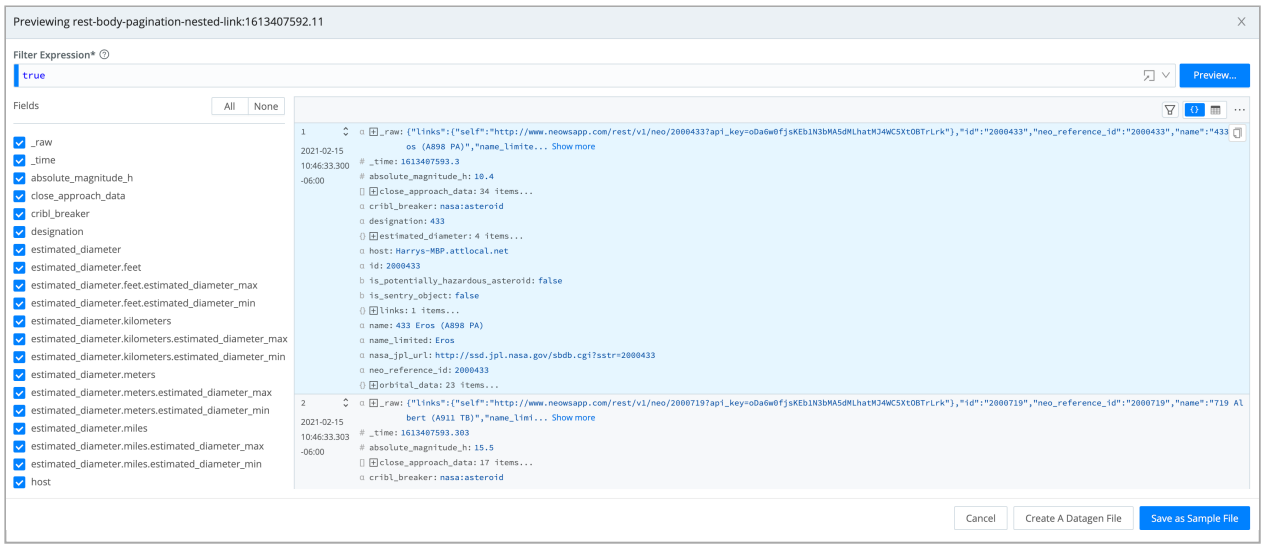

Paginated events

> This API allows a certain number of calls/month. Cribl recommends that you not schedule this Collector – run it ad-hoc, for testing only.

3. HTTP GET with Pagination via Response Body Attribute

This example uses Response Body Attribute pagination, which returns a token that is passed as a request parameter to retrieve subsequent pages of data. The only difference between this example and Example 2 is how the Response Body Attribute is used.

> To authenticate against the GreyNoise endpoint used in this example, set up a trial account according to GreyNoise's Setting Up a Trial Account documentation.

Discover type: None

Collect URL: `'https://api.greynoise.io/v2/experimental/gnql'`

Collect method: `GET`

Collect parameters:

```
query: 'last_seen:1d'
```

```
scroll: `${scroll}`
```

Collect headers:

```
accept: 'application/json'
```

```
key: '<your-GreyNoise-API-key-here>'
```

Pagination: Response Body Attribute

Response attribute: `scroll`

Max pages: `10` (or `0` to pull all data)

Authentication: None

Event Breaker: JSON Array – use the configuration shown here:

greynoise

Filter Condition* ⓘ

true

EVENT BREAKER SETTINGS

Enabled ⓘ Yes

Event Breaker Type* ⓘ

JSON Array

Array Field ⓘ

data

JSON Extract Fields ⓘ Yes

Timestamp Field ⓘ

Enter timestamp field

Max Event Bytes ⓘ

51200

TIMESTAMP SETTINGS

Timestamp Anchor* ⓘ

/ ^ /

Timestamp Format* ⓘ

- Autotimestamp Scan Depth ⓘ
- Manual Format ⓘ
- Current Time ⓘ

Default Timezone ⓘ

Event Breaker configuration

In this example, the response body returns an attribute named `scroll`, which is a token that references the next page of data to fetch. We reference the attribute in **Collect parameters** using the JavaScript expression: `` `${scroll}` ``. If present, this will be passed to retrieve subsequent pages of data, until either the Collector's **Max Pages** setting is reached, or no more pages are present.

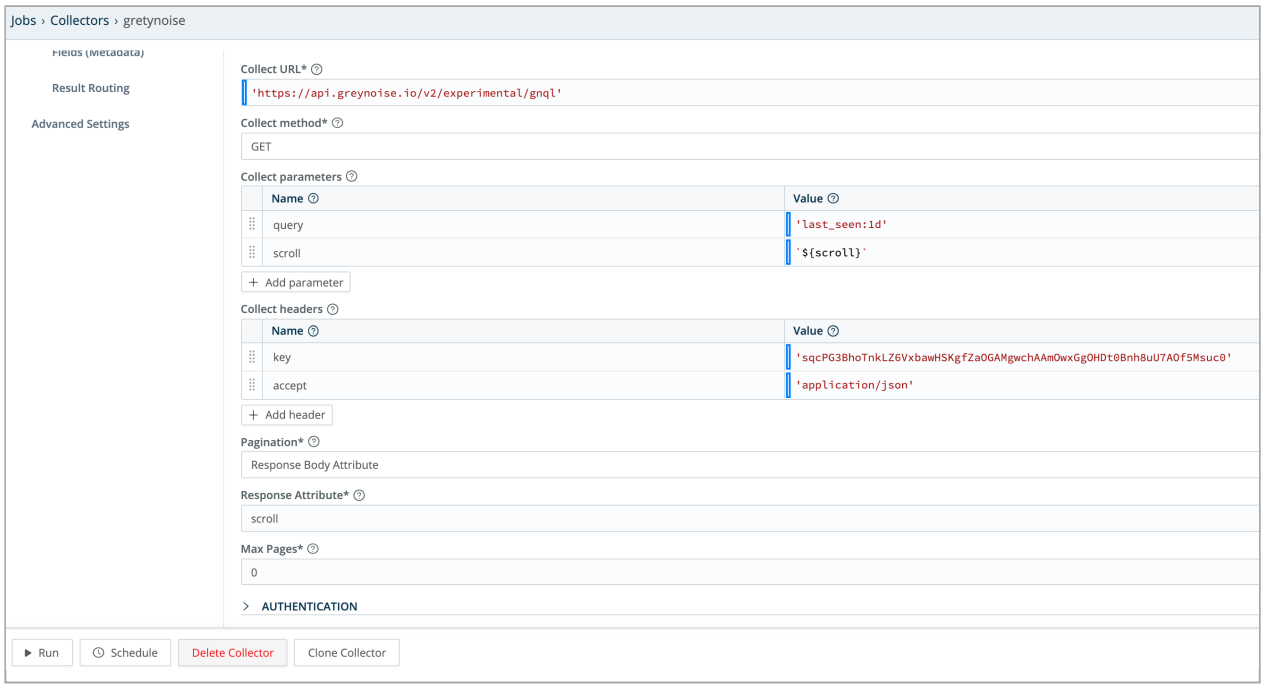

Collector configuration for HTTP GET, paginated via Response Body Attribute

Collector Output

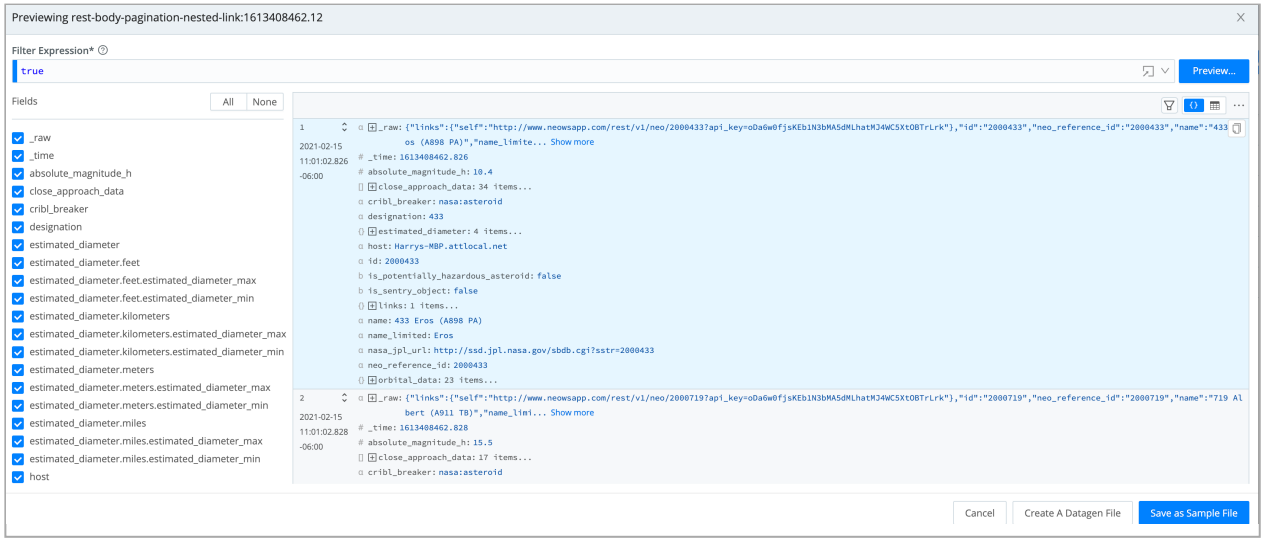

> This API allows a certain number of calls/month. Cribl recommends that you not schedule this Collector – run it ad-hoc, for testing only.

For a more detailed use case around this particular API, see Cribl's Enrichment at Scale! blog post.

4. HTTP GET with Pagination via Response Header URL

This example leverages pagination using a Response Header Attribute value. The value returned can be either a URL (of the next page) or a token value (a request attribute that is passed to retrieve the next page of data).

This example is based around a local Web server on port 3001. The server returns a response header when another page of data is available, and the header contains the URL of the next page. Here's how the header looks in developer tools:

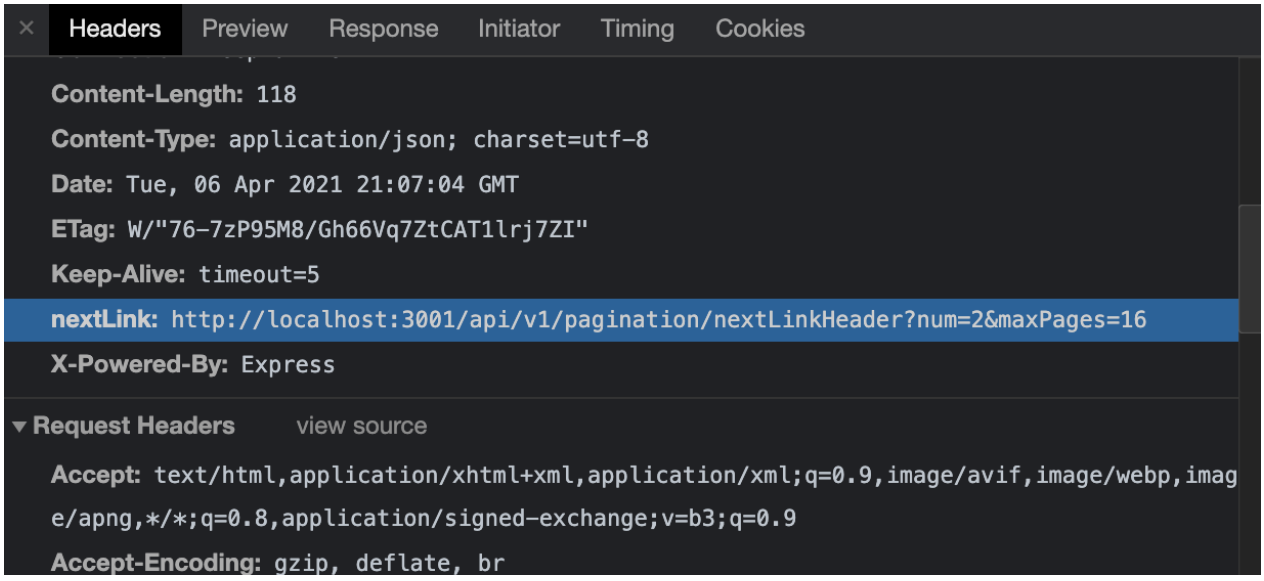

Next-page URL passed as Response Header Attribute

Collector Configuration

Discover type: None

Collect URL: 'http://localhost:3001/api/v1/pagination/nextLinkHeader?num=1&maxPages=16'

Collect parameters: None

Collect headers: None

Pagination: Response Header Attribute

Response attribute: `nextLink`

Authentication: None

Event Breaker: None

> You can modify the `maxPages` URL parameter to control how many pages this call returns.

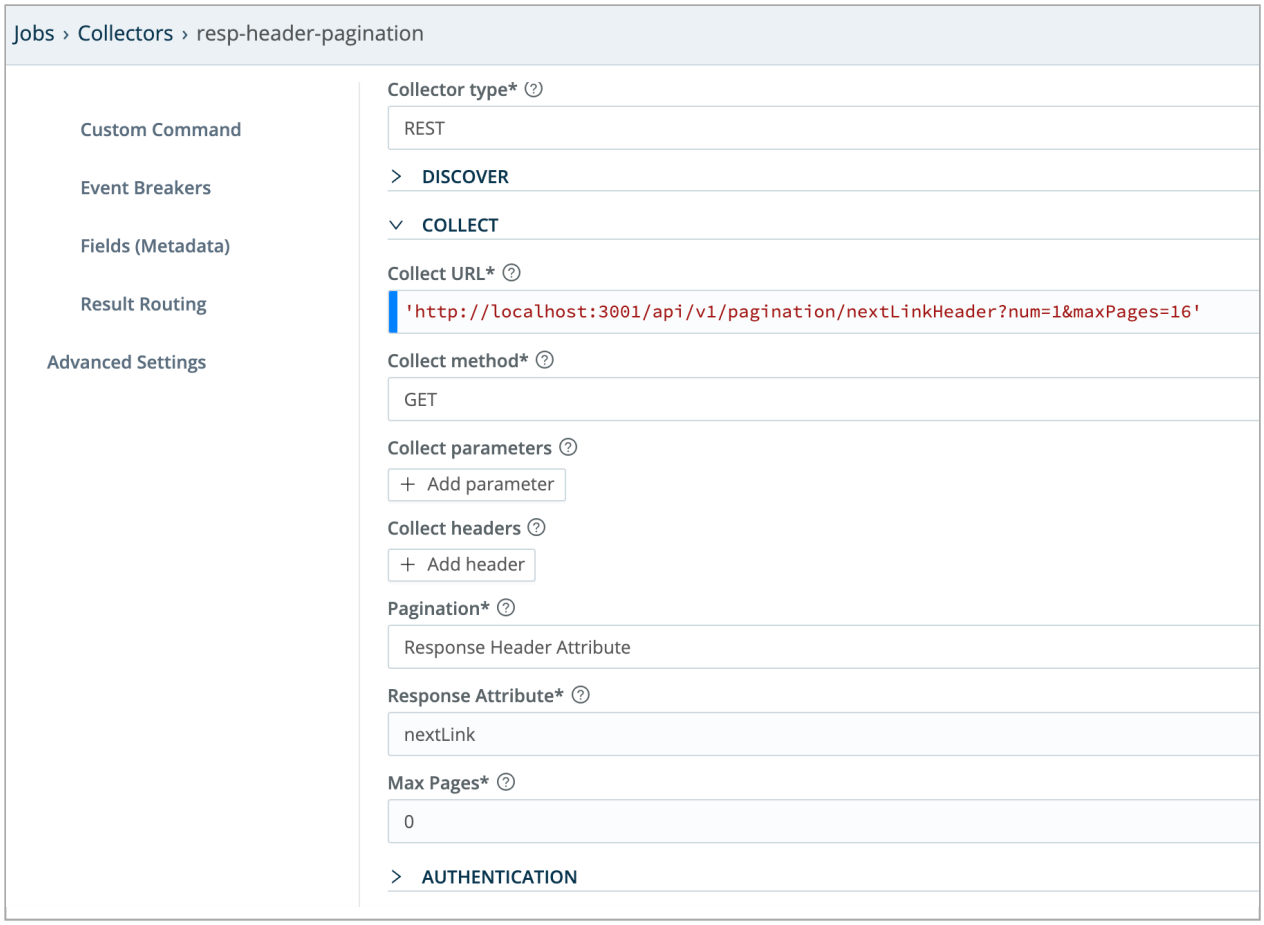

Collector configuration for HTTP GET, paginated via Response Header URL

Collector Output

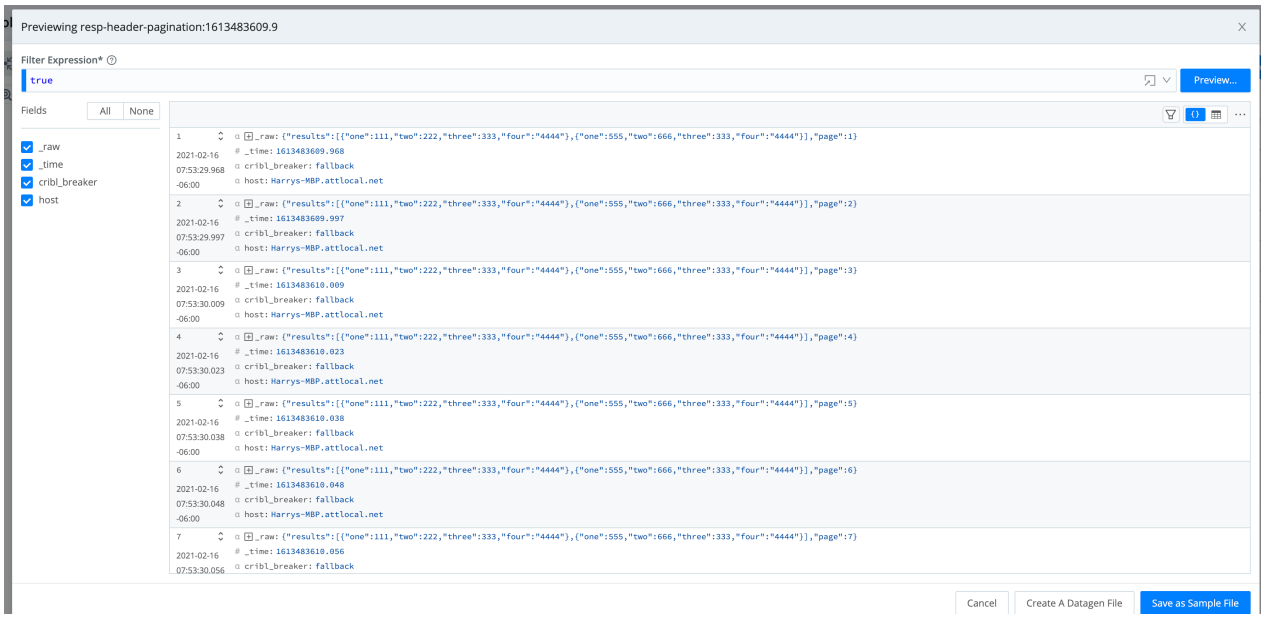

Paginated events

5. HTTP Discover and Collect with Login Authentication

In some cases, you must run an HTTP Request discovery to identify the items to collect. This example will do the following:

1. Perform a Login (POST with body containing the login credentials), to obtain an auth token that will passed in the Authorization header in all subsequent REST calls.
2. Run a REST call to discover items to be collected – in this case, log files.
3. For each log file discovered, collect the contents of that file.
4. We'll also demonstrate URL-encoding of a path element. You'd need to manually encode part of the URL in cases where unsafe ASCII characters might be present in the path element (e.g., space, `$`, `/`, or `=`).

Discover type: `HTTP Request`

Discover URL: 'http://localhost:9000/api/v1/system/logs'

Discover method: GET

Discover parameters: None

Discover headers: None

Discover data field: `items`

Collect URL: `'http://localhost:9000/api/v1/system/logs/' + C.Encode.uri(`${id}`)`

Collect method: GET

Collect parameters: None

Collect headers: None

Pagination: None

Authentication: Login

Login URL: `http://localhost:9000/api/v1/auth/login`

Username: `admin` (or other user)

Password: `admin` (or other user's corresponding password)

[Authentication] POST Body: `` `{ "username": "${username}", "password": "${password}" }` ``

Token Attribute: `token`

Authorize Expression: `` `Bearer ${token}` ``

Event Breaker: JSON Array

- **Array Field:** `items.events`

Knowledge › Event Breaker Rules › Rules

Rule Name* ⓘ

logs-items

Filter Condition* ⓘ

```
true
```

EVENT BREAKER SETTINGS

Enabled ⓘ Yes

Event Breaker Type* ⓘ

JSON Array

Array Field ⓘ

items

JSON Extract Fields ⓘ Yes

Timestamp Field ⓘ

Enter timestamp field

Max Event Bytes ⓘ

51200

TIMESTAMP SETTINGS

Timestamp Anchor* ⓘ

/ ^ /

Timestamp Format* ⓘ

Autotimestamp Scan Depth ⓘ 150

Event Breaker configuration

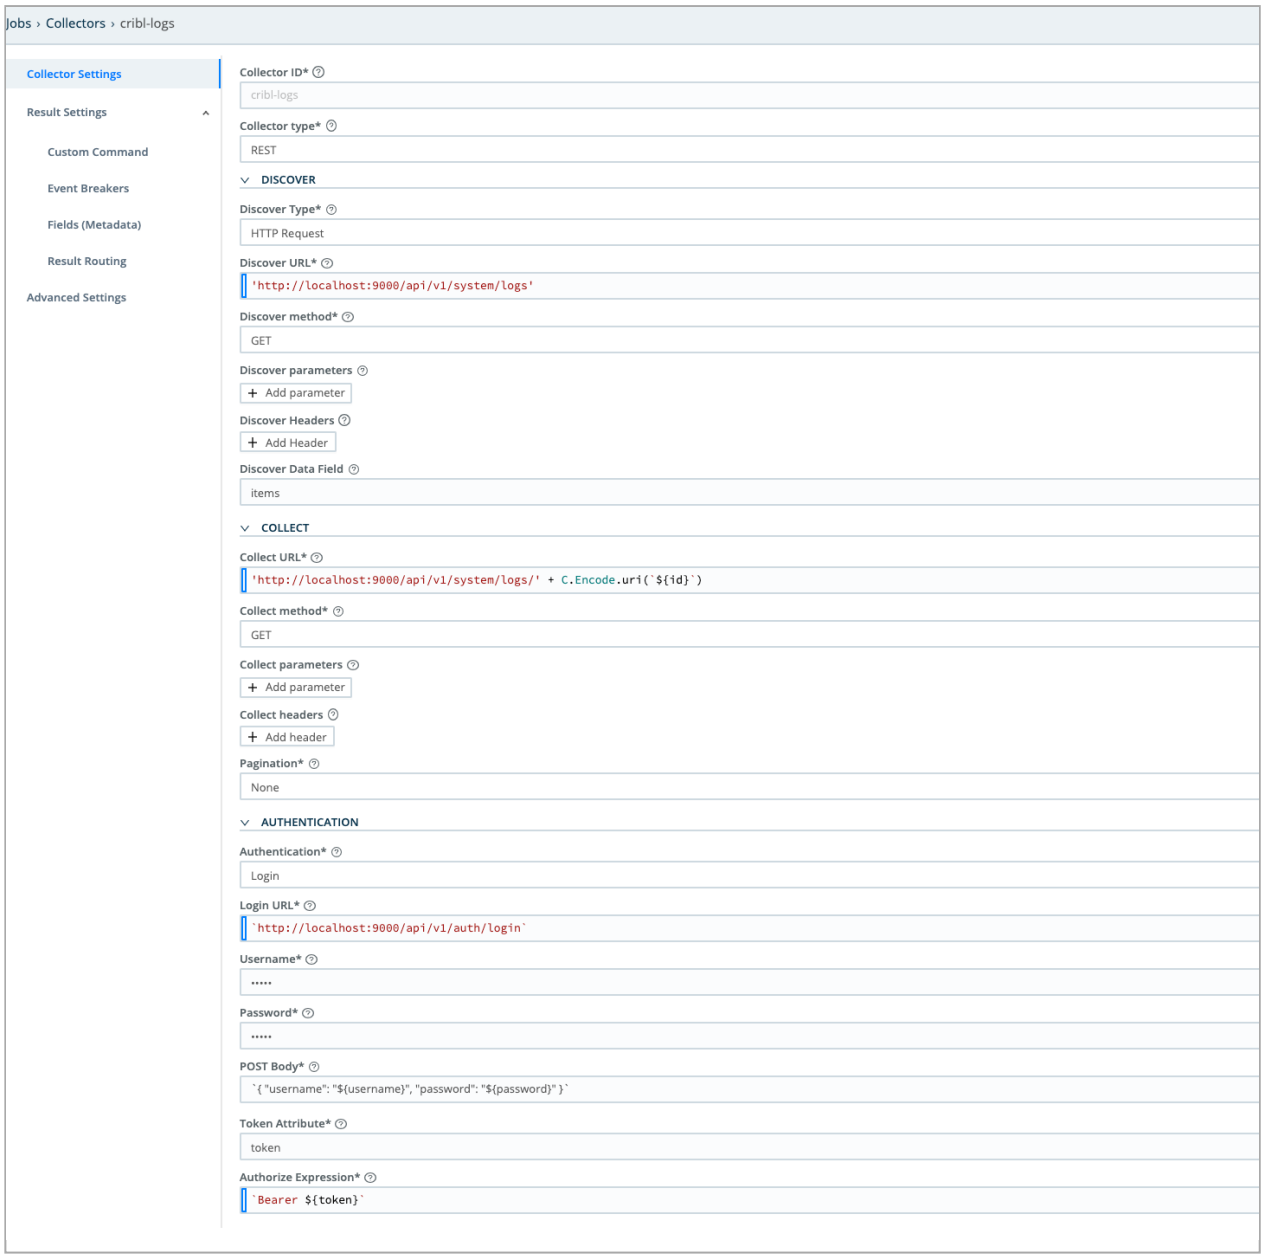

Collector configuration for HTTP Discover and Collect with Login authentication

Login

The login call sends a POST to the login URL, passing the string derived from the POST Body JavaScript expression. Note that the variables `${username}` and `${password}` are available to this call, and are taken from the `username` and `password` text fields.

Upon successful login (`200` response code), the login token will be extracted from the response body's token attributes, as specified by the **Token Attribute** field.

Finally, the value derived from the **Authorize Expression** field will be added to the Authorization header for all subsequent calls (here, Discover and Collect). The variable name used in the **Authorize Expression** should be the same name specified in the **Token Attribute** call.

Discover

The Discover call here is used to discover the list of log files that can be collected. The data returned by this call has this format:

```
{
  "count": 0,
  "items": [
    {
    "id": "logFileName",
    "path": "pathToFile"
    }
  ]
}
```

The **Discover Data Field** is used to define the array in Discover results that contains the list of items to discover. Here, each item is an object, with an attribute ID that is referenced in the Collect calls. So the Discover call generates a list of items for which Collect tasks will be created.

Collect

From the Discover task's returned list of items, each item will cause one Collect task to be created and run. An object containing the Discover item (along with some internal variables) will be passed to the Collect task.

You can reference this object's attributes as variables in the Collect task's URL, request parameters, and request headers. When running a preview, you can see the object's contents in the `__collectible` internal variable. (Enable **Show Internal Fields**, and expand `__collectible` to view the variables available).

For example, here's one of the events returned by this example's Collect operation. The `__collectible` attribute contains details identifying the page number and the URL used to obtain the data:

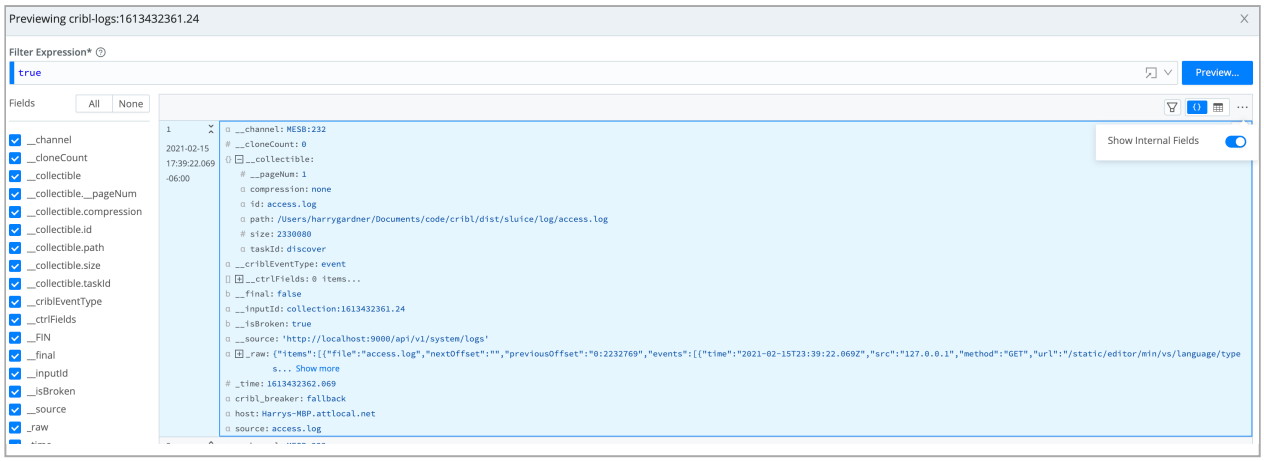

__collectible internal variable, expanded to show its contents

As you can see, `__collectible` contains a `__pageNum` variable, which shows which page of data the event was received in. Also, `__collectible` contains an `id` variable, available for use in the Collect operation. Here's how this variable is referenced in the Collect operation's URL:

```
'http://localhost:9000/api/v1/system/logs/' + C.Encode.uri(`${id}`)
```

Because the variable is used in the path, and it might contain unsafe ASCII characters (specifically, space), we need to URL-encode the variable. This is the only case where the REST Collector requires URI encoding – variables that are defined directly as part of the URL. (Request parameters, not contained directly in the URL, are automatically encoded.)

The data returned by the Collect call has the following format:

```
{
  "items": [
    {
    "file": "access.log",
    "nextOffset": "",
    "previousOffset": "0:2236637",
    "events": [
        {
        "time": "2021-02-15T23:39:23.043Z",
        "src": "127.0.0.1",
        "user": "admin",
        "method": "GET",
        "url": "/api/v1/jobs/1613432361.24",
        "status": 200,
        "message": "GET /api/v1/jobs/1613432361.24",
        "response_time": 2
        },
        {
        "time": "2021-02-15T23:39:22.366Z",
        "src": "127.0.0.1",
        "user": "admin",
        "method": "GET",
        "url": "/api/v1/system/logs/worker%2F7%2Fcribl.log",
        "status": 200,
        "message": "GET /api/v1/system/logs/worker%2F7%2Fcribl.log",
        "response
...
```


The real data that we want to access is located at `items.events`. We can use a JSON Array event breaker to convert data from `events.items` into individual events that will be sent to Routes and processed by Cribl Stream. The output looks like this in Preview:

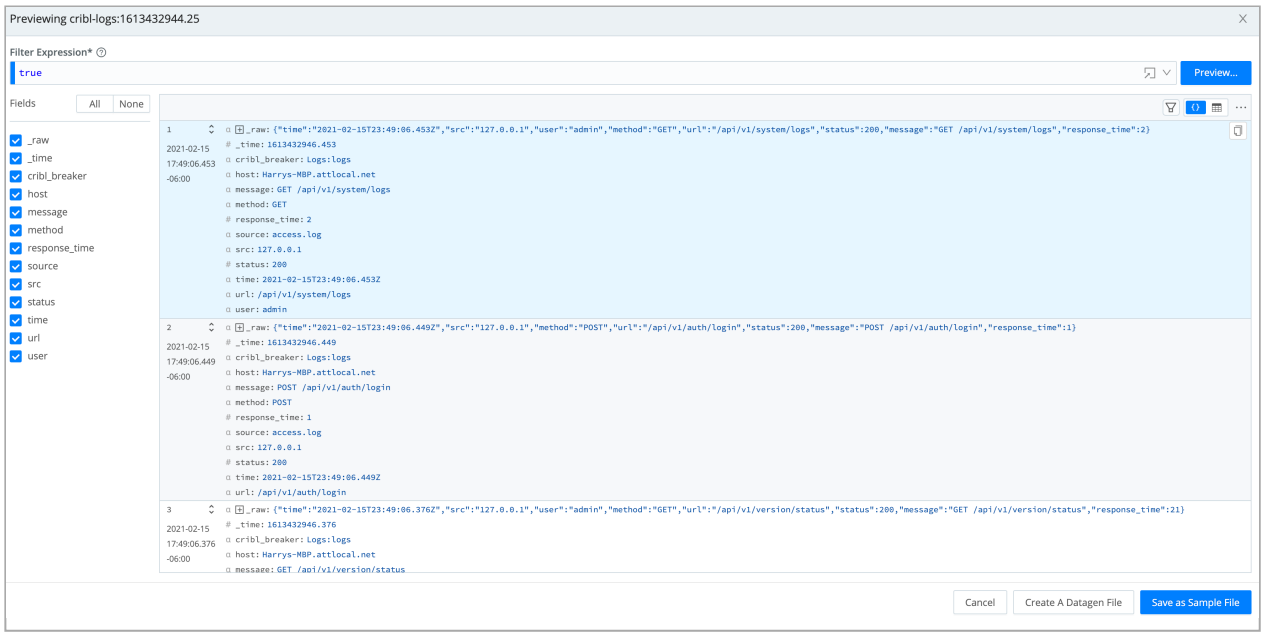

Collected data

> If this example fails with errors of the form `statusCode: 429...Too many requests` – see Common Errors and Warnings to resolve this by relaxing the login rate limit.

6. Item List Discovery

This example demonstrates situations where the Item List discovery mechanism is useful: enabling collection based on a predefined list of items. Here, we want to collect weather information for a static list of states – each returned from Discover results as a single collection task.

Let's assume we are interested in weather for the following U.S. locations: Nashville, Dallas, and Denver. When the Discover operation runs, it will return a collectible object for each location (each representing its own collection task): `{ id: ''}, {id: 'TX'}, {id: 'TN'}`.

Discover type: `Item List`

Discover items: `Nashville, Dallas, Denver`

Collect URL: 'https://community-open-weather-map.p.rapidapi.com/find'

Collect parameters:

```
type: 'link'
```

```
units: 'imperial'
```

```
q: `${id}`
```

Collect headers:

```
x-rapidapi-host: 'community-open-weather-map.p.rapidapi.com'
```

```
x-rapidapi-key: '78934c846cmsh70cb53f75a8a54bp119d21jsn29df549b4fd6'
```

```
useQueryString: true
```

Pagination: None

Authentication: None

Event Breaker: JSON Newline Delimited – Use a rule like **Cribl > ndjson** to parse each event and extract fields.

Fields (Metadata):

```
job: weather-${__collectible.id}
```

```
city: ${__collectible.id}
```

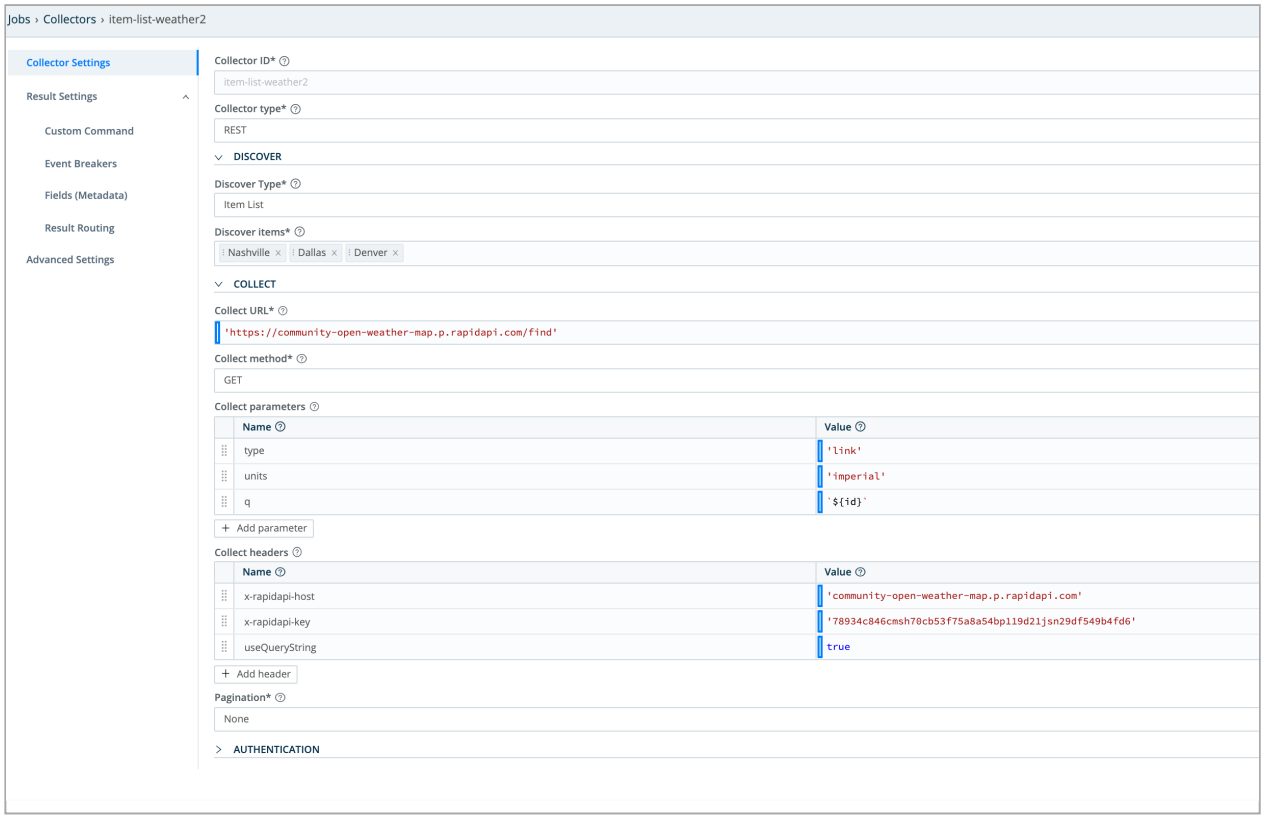

Collector configuration for Discovery via Item List

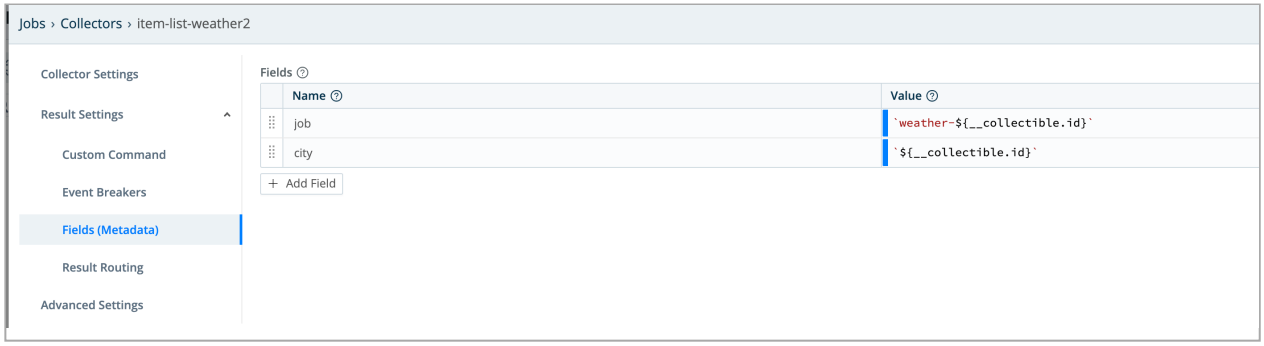

Fields (Metadata) configuration

Collector Output

One interesting thing about this example is the addition of **Fields (Metadata)** to each event, using content from the internal `__collectible` attribute. This `__collectible` attribute contains results from the Discover operation, and is available in each event collected.

This demonstrates how information from the Discover operation can be transferred to events generated during the Collect operation. Note the attributes `__collectible`, `city`, and `job` in the Collector output below:

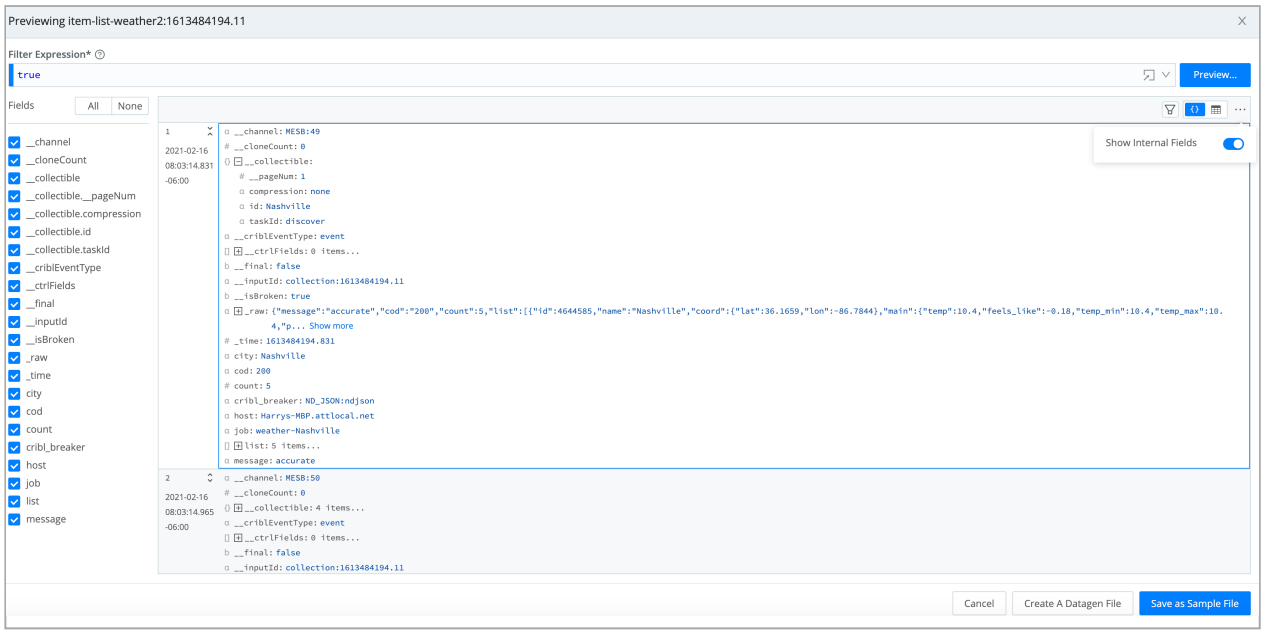

Collected events

> This API allows a certain number of calls/month. Cribl recommends that you not schedule this Collector – run it ad-hoc, for testing only.

7. JSON Response Discovery

Like Item List discovery, **Discover type: JSON Response** allows you to discover a predefined, static list of items. JSON Response's advantage is its ability to return an object containing more than one attribute that the Collect operation can use.

Sticking with our weather example above, imagine that we needed to use both longitude and latitude (instead of just city or state) when performing collection. This is the perfect use case for JSON Response discovery.

Discover type: `JSON Response`

Discover result: `{"items": [{"city": "Nashville", "lat": 36.174465, "lon": 86.767960}, {"city": "Dallas", "lat": 32.779167, "lon": -96.808891}, {"city": "Denver", "lat": 39.742043, "lon": -104.991531}] }`

Discover data field: `items`

Collect URL: ''http://api.openweathermap.org/data/2.5/weather''

Collect headers: None

Collect parameters:

```
lat: `${lat}`
```

```
lon: `${lon}`
```

```
appid: '438d61a1db9e713240b30140e9ddfea2'
```

Pagination: None

Authentication: None

Event Breaker: JSON Newline Delimited – Use a rule like **Cribl > ndjson** to parse each event and extract fields.

Fields (Metadata):

```
job: `weather-${__collectible.city}`
```

```
city: `${__collectible.city}`
```

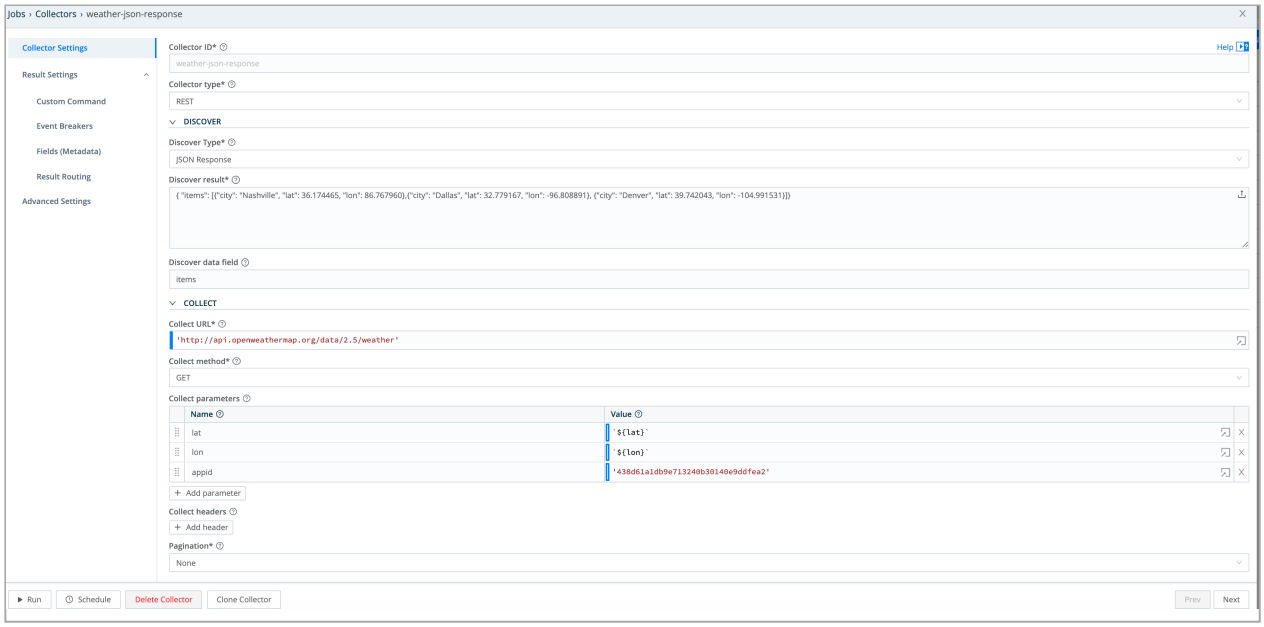

Collector configuration for JSON Response Discovery

Notice how attributes present in the **Discover Result** JSON object's `items` array (`` `${lat}` ``, `` `${lon}` ``, `` `city` ``) are used in **Collect Request Parameters**, and in metadata **Fields**. Any other attribute present in the `items` array can similarly be referenced in the URL, request parameters, or request headers.

Collector Output

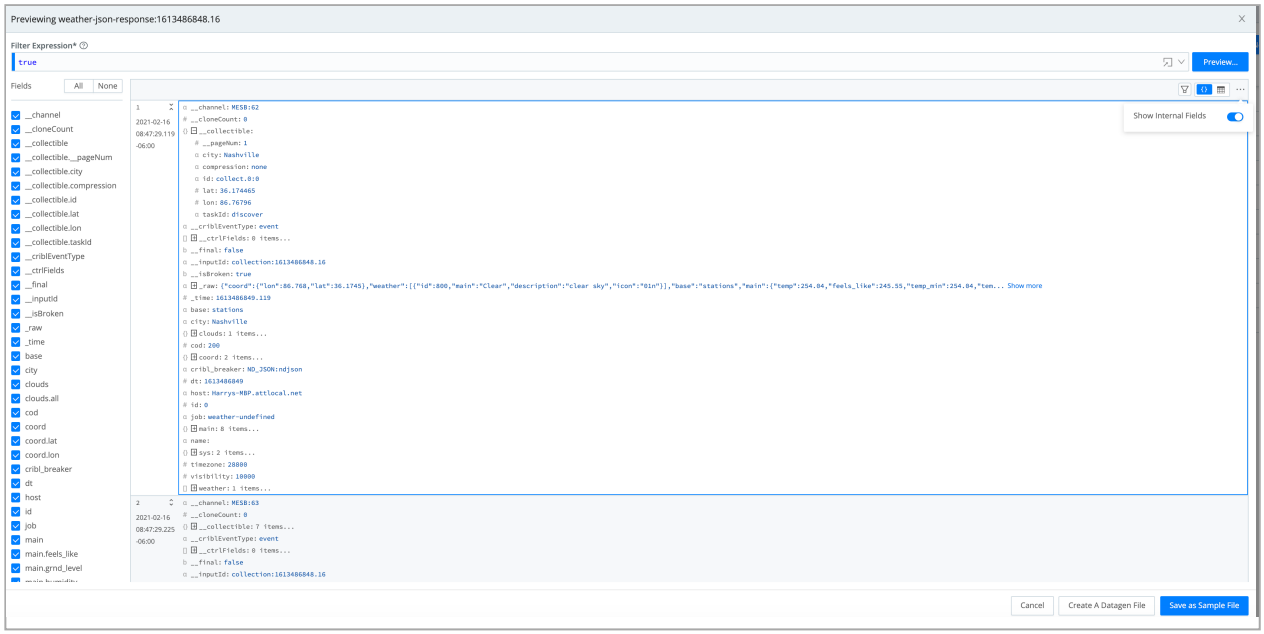

Item List preview

> This API allows a certain number of calls/month. Cribl recommends that you not schedule this Collector – run it ad-hoc, for testing only.

14.6.3. Lacework API Collection

You can configure the Lacework v2 API within Stream. This enables you to collect data from the Lacework API without introducing custom scripts or add-ons into your Lacework environment.

Your workflow will be based on the Discover and Collect pattern that's standard for REST/API Collectors. In the Lacework API variation described here, the Discover job will generate the access token that the collection job uses in requests to the API. As an example, we'll configure Cribl Stream to collect Host Vulnerability data, using optional filters available in the Lacework API.

Before you begin, make sure you have a Lacework API `KeyID` and `secretKey`, or create them as described in the Lacework docs.

Configuring the REST Collector

> Collector Sources currently cannot be selected or enabled in the QuickConnect UI.
>
> For additional details about all the configuration options specified here, see our REST/API Endpoint and Scheduling and Running topics.

From the top nav of a Cribl Stream instance or Group, select **Data** > **Sources**, then select **Collectors** > **REST** from the **Data Sources** page's tiles or the **Sources** left nav. Click **Add Collector** to open the **REST** > **New Collector** modal. Enter a **Collector ID**, then complete the following options and fields.

Discover Settings

From the **Discover type** drop-down, select `HTTP Request`. Then complete the **Discover** settings as follows.

Discover URL: Enter the URL at which Cribl Stream should access the Lacework `v2/access/tokens` endpoint.

Discover method: From the drop-down, select `POST with Body`.

Discover POST Body: Enter `` `{"keyId":"<keyID>", "expiryTime":3600}` ``, substituting your Lacework API `KeyID` for the placeholder.

Discover headers: Create the two headers specified in the table below, substituting your Lacework API `secretKey` for the placeholder.

NAME	VALUE
U-LW-UAKS	'<secretKey>'
Content-Type	'application/json'

Your Collector configuration should look similar to this:

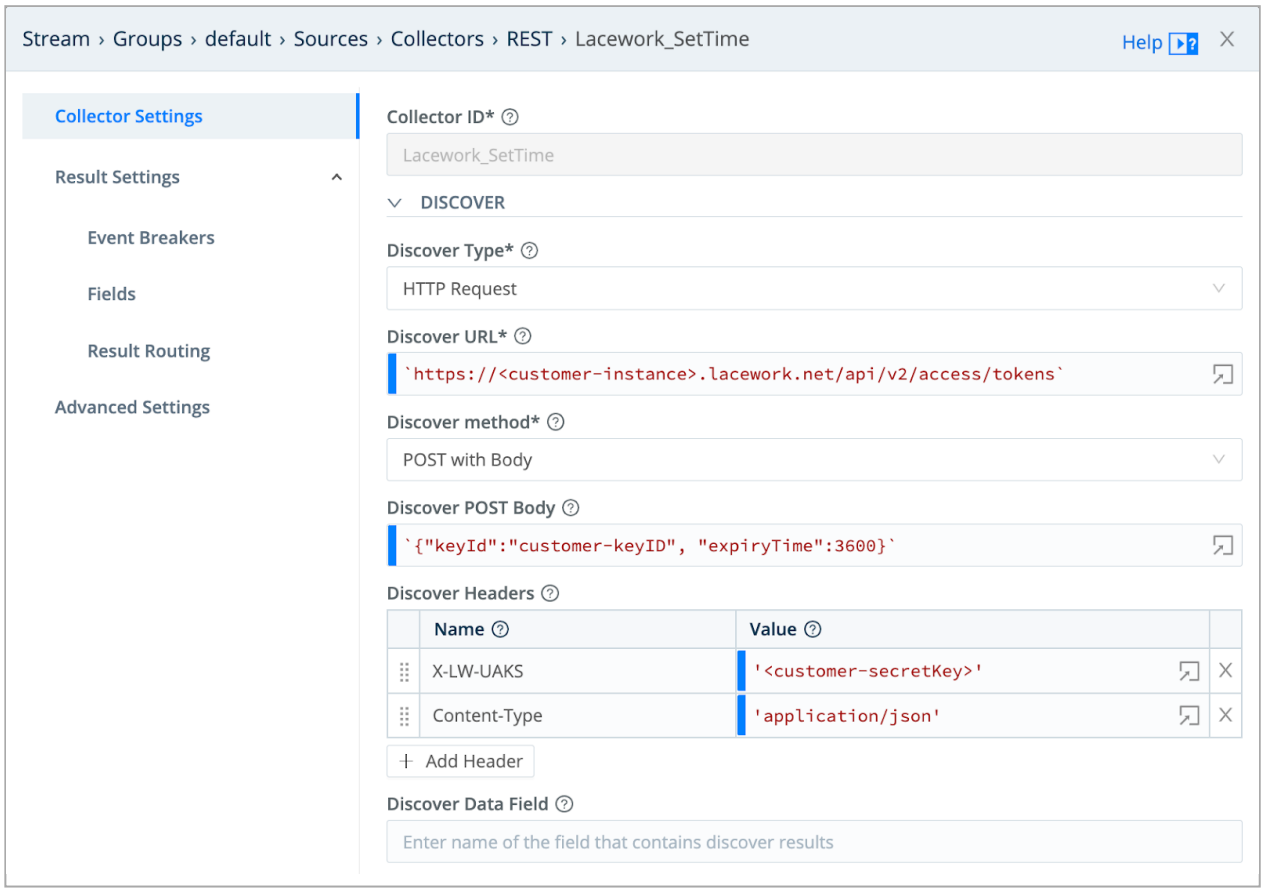

Discover Settings

Collect Settings

Collect URL: Enter the URL at which Cribl Stream should access the Lacework `v2/Vulnerabilities/Hosts/search` endpoint.

Collect method: From the drop-down, select `POST with Body`.

Collect POST body: Enter the following request body.

```
 `{"timeFilter": { "startTime": "${C.Time.strftime(earliest || new
Date().getTime()/1000-(24*60*60), '%Y-%m-%dT%H:%M:%SZ')}", "endTime":
"${C.Time.strftime(latest || new Date().getTime()/1000, '%Y-%m-
%dT%H:%M:%SZ')}"},"filters": [ { "expression":"eq","field":"vulnId", "value": "CVE-
2018-11233" } ] }`
```

Here's what's happening in the request body example:

In our example, we've chosen to collect data only about hosts where one particular vulnerability, `CVE-2018-11233`, was detected. To accomplish this, we've added a `filters` element that specifies that the value of the `vulnId` field must equal `CVE-2018-11233`.

Note the `earliest` and `latest` variables. Later, in the **Run Collector** modal, you'll set **Time Range** values that will populate these variables when the Collector runs. Both variables are formatted as UNIX epoch time, in seconds units. (When using them in contexts that require milliseconds resolution, multiply them by 1,000 to convert to ms.) If you omit these variables, jobs will run for a period of 24 hours.

Collect Headers

We know that the Discover job, which we will run before the Collect job, will make a request to the Lacework API `v2/access/tokens` endpoint, and that the Lacework API's response body will include an access token. That means that the access token will be available to the Collect job, to pass in a Collect header.

Create the two **Collect header**s specified in the table below. The first will convey the access token.

NAME	VALUE
`Authorization`	`` `Bearer ${token}` ``
`Content-Type`	`'application/json'`

Your **Collect** settings should look similar to this:

Adding a Collect header

Pagination

From the **Pagination** drop-down, select `Response Header Attribute`. In the **Response Attribute** field, enter `nextPage`. This configures your Collector to work with the Lacework API response body, which includes nested fields of pagination metadata, such that `urls` contains `nextPage`, whose value is the Next Page URL.

You should see something like this:

Configuring pagination

> The Lacework API authentication mechanism requires HTTP header parameters. Since Cribl Stream does not (currently) support header parameters for authentication, we cannot use that

> authentication method, and you should skip the **Authentication** settings. This is why we use the Discover job to obtain an access token, and then include that token in the Collect job.

Additional Settings

Tags: Optionally, add tags that you can use for filtering and grouping in Cribl Stream. Use a tab or hard return between (arbitrary) tag names.

Result Settings

Every call to the Lacework API `v2/Vulnerabilities/Hosts/search` endpoint returns data formatted as a single event. Every event contains multiple nested JSON arrays, where each array is a `data` element. We'll now create an Event Breaker that parses the larger structure into individual events – one for each `data` element.

1. From Cribl Stream's top nav, select **Processing** > **Knowledge**.
2. Click the **Event Breaker Rules** left tab. From the resulting **Event Breaker Rulesets** form, click **New Ruleset** to open the **New Ruleset** modal.
3. Enter an **ID** for the new ruleset, and optionally add a **Description** and **Tags**.
4. Click **Add Rule**.

In the resulting **Rules** modal, name the Rule, and configure it as follows:

- **Filter Condition**: Enter `true`.
- **Enabled**: Toggle to `Yes`.
- **Event Breaker Type**: Select `JSON Array`.
- **Array Field**: Enter `data`.

Optionally, you can use the **Timestamp Settings** to return events whose timestamp (`_time`) matches the **startTime** or **endTime** field defined in the Lacework data.

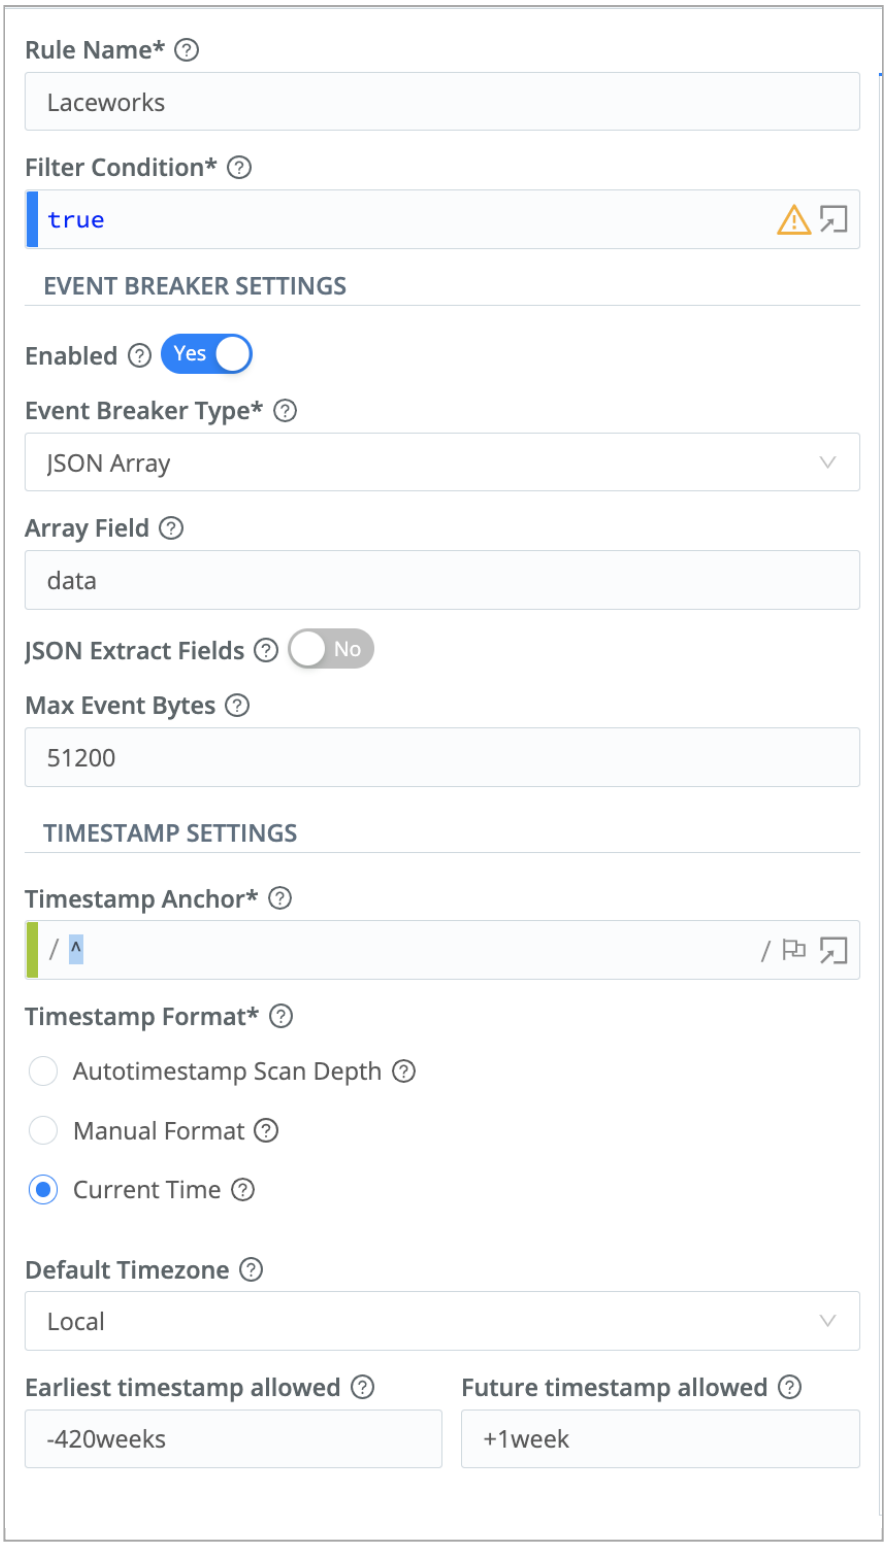

Creating a ruleset

Click **OK** to return to the previous **New Ruleset** modal, then click **Save**.

Then return to your REST Collector's configuration modal, and:

1. Select the **Result Settings** > **Event Breakers** left tab.
2. Under **Event Breaker rulesets**, click * Add ruleset**.

3. From the drop-down that now appears above the **System Default Rule**, select your new ruleset.
4. Click **Save**.

Discovering and Collecting

We'll start with the Discovery run:

1. On the **Manage REST Collectors** page, click **Run** beside your new Collector.
2. In the resulting **Run Collector** modal, select **Mode** > **Discovery**.
3. Configure a **Time range**, if desired.
4. Click **Run** to retrieve Discovery results.

After inspecting these results, launch the Collector run:

1. Back on the **Manage REST Collectors** page, again click **Run** beside your new Collector.
2. In the resulting **Run Collector** modal, this time select **Mode** > **Full Run**.
3. Configure a **Time range**, if desired.
4. Click **Run**.

Once the Lacework API responds, you should see data similar to this:

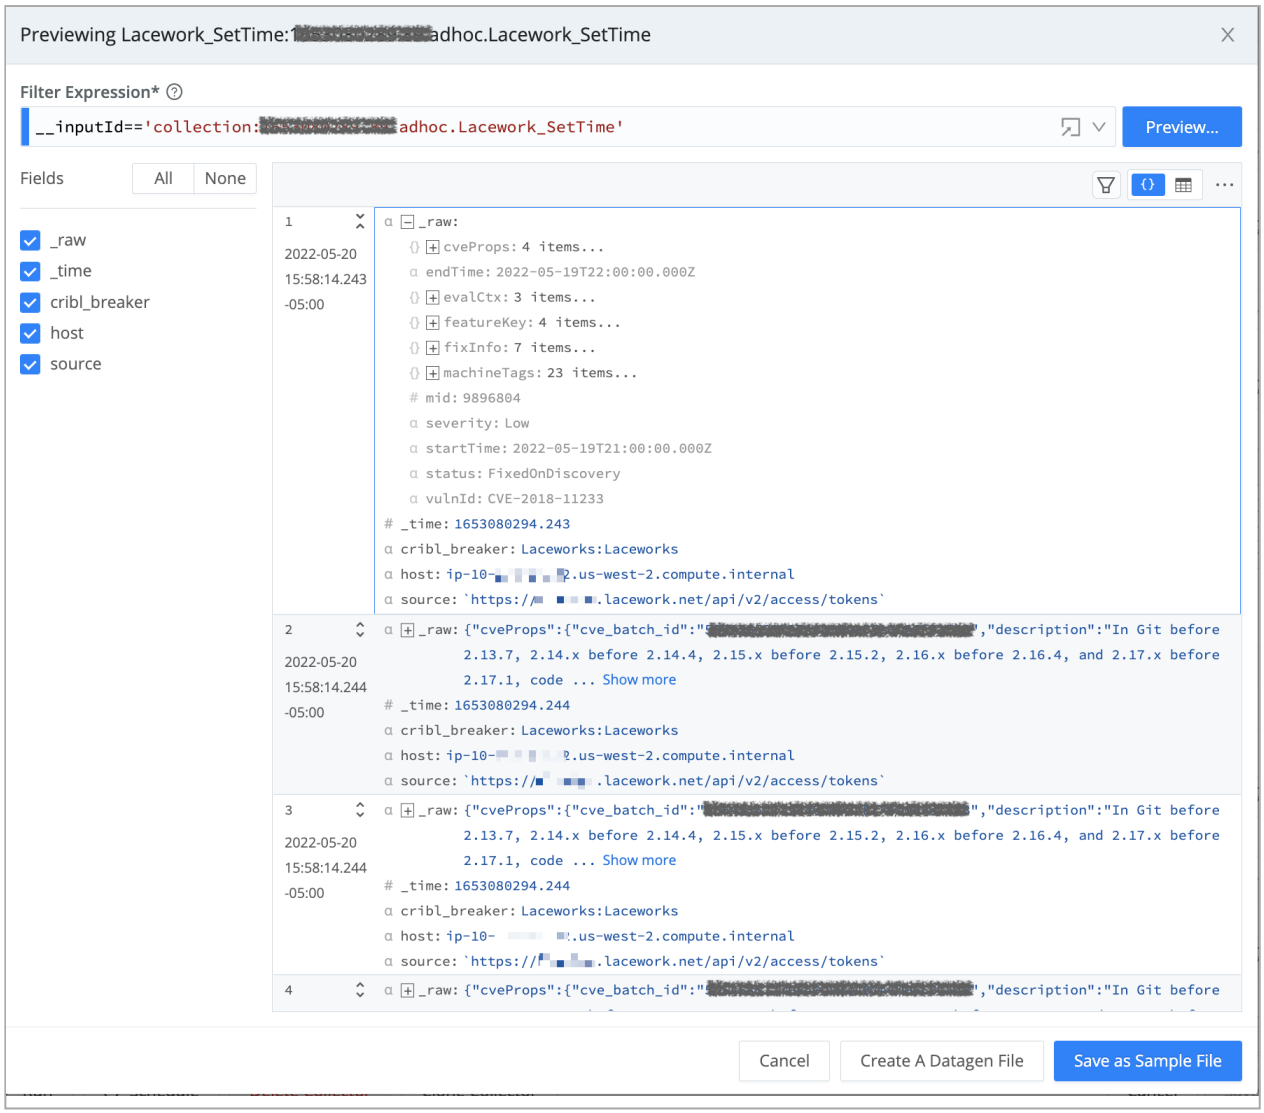

Data from the Lacework API

14.6.4. Microsoft Graph API Collection

The Microsoft Graph API provides access to data in the Microsoft Cloud. This page explains how to configure a Cribl Stream REST/API Collector to ingest data using the Microsoft Graph API.

Before you start, you'll need to do the following in the Azure portal:

- Register the app you'll use to interact with Graph API.
- Generate a **Client Secret** for the app.
- Write down the **Application ID**, **Tenant ID**, and **Secret Value** defined for the app.
- Decide which API calls you expect to use, then, for each of those API calls:
  - Configure the corresponding API permissions for your app.
  - Examine how the Graph API structures events, and decide whether you want to change that structure using an Event Breaker.

For example, if you plan to call the Audit Logs API (as demonstrated in this walkthrough), do the following:

- Configure your app with `AuditLog.Read.All` API permissions, which Audit Logs API calls require.
- Notice that the API structures Azure Active Directory (AD) Audit Logs data as a single JSON object with events nested under the `value` field. With an Event Breaker, you can split this into individual events for each AD Audit Log activity.

How the REST Collector Interacts with Microsoft APIs

To retrieve data using the Microsoft Graph API, your Collector first obtains a Bearer token by sending an HTTP `POST` request to the Microsoft identity platform. Once it has the Bearer token, your Collector can send an HTTP `GET` request to the Graph API, which responds with the data you requested. Configuring your Collector will be more intuitive if you keep this pattern in mind.

Configuring a Graph API REST Collector

From a Cribl Stream instance's or Group's **Manage** submenu, select **Data** > **Sources**, then select **Collectors** > **REST** from the **Manage Sources** page's tiles or left nav. Click **New Collector** to open the **REST** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs. Click the tab links at left to navigate among tabs. Click **Save** when you've configured your Collector.

Collector Settings

These settings determine how data is collected before processing.

Collector ID: Unique ID for this Collector. E.g., `ms_graph_42`.

Collect Settings

Collect URL: An expression that produces a URL for the collect operation. The URL can be any of the Graph API endpoints. In this example, we want to retrieve Azure AD Audit logs, so we use the Audit Logs endpoint:

```
'https://graph.microsoft.com/v1.0/auditLogs/directoryAudits'
```

Collect method: `GET`.

Collect headers: Add the following header.

- **Name**: `content-type`.
- **Value**: `application/x-www-form-urlencoded`

To authenticate against the Microsoft Graph API, the REST Collector uses a POST call whose body is a template. The `content-type` header tells the Graph API that the template is a URL-encoded (not JSON-encoded) form. See **Authentication Settings** > **POST Body** below.

Authentication Settings

Use the **Authentication method** buttons to select **Login**, then enter the following information:

- **Username**: The **Application (Client) ID** listed on your app's **Overview** page in Azure.
- **Password**: The **Secret Value** listed on your app's **Certificate & Secret** page in Azure.
- **Login URL**: The token API endpoint for the Microsoft identity platform. Use the string: `'https://login.microsoftonline.com/<tenant_id>/oauth2/v2.0/token'`, substituting your Azure AD tenant ID for `<tenant_id>`.
- A **POST body** template for the token request that the Collector sends to the Microsoft identity platform. Use the string:

`client_secret=${password}&scope=https://graph.microsoft.com/.default&client_id=${username}&grant_type=client_credentials`. When the Collector sends the request, it will populate the template with the **Username** and **Password** that you entered above.

- The **Token attribute**: The field that contains the Bearer token, within the Microsoft identity platform's response to the token request. Use `access_token`.
- The **Authorize expression**, a JavaScript expression that computes the `Authorization` header the Collector uses in calls to the Graph API. Use `` `Bearer ${token}` ``. The Collector will populate the `${token}` variable with the token obtained from the Microsoft identity platform.

Result Settings

As explained above, the Microsoft Graph API delivers Azure Active Directory Audit Logs data as a single JSON object, with events nested under the `value` field. Cribl recommends using an Event Breaker to split this into separate name/value pairs.

You'll create the Event Breaker in the **Result Settings** > **Event Breakers** tab. But first, you must save a sample file, and create a ruleset for the Event Breaker to use.

Saving a Sample File

On the **Manage REST Collectors** page, click **Run** beside the REST Collector you configured. This opens the **Run configuration** modal, in **Preview** mode. Click **Run** to open the **Capture Sample Data** modal.

When data appears, notice that it's a large JSON object with multiple events nested under the `value` field:

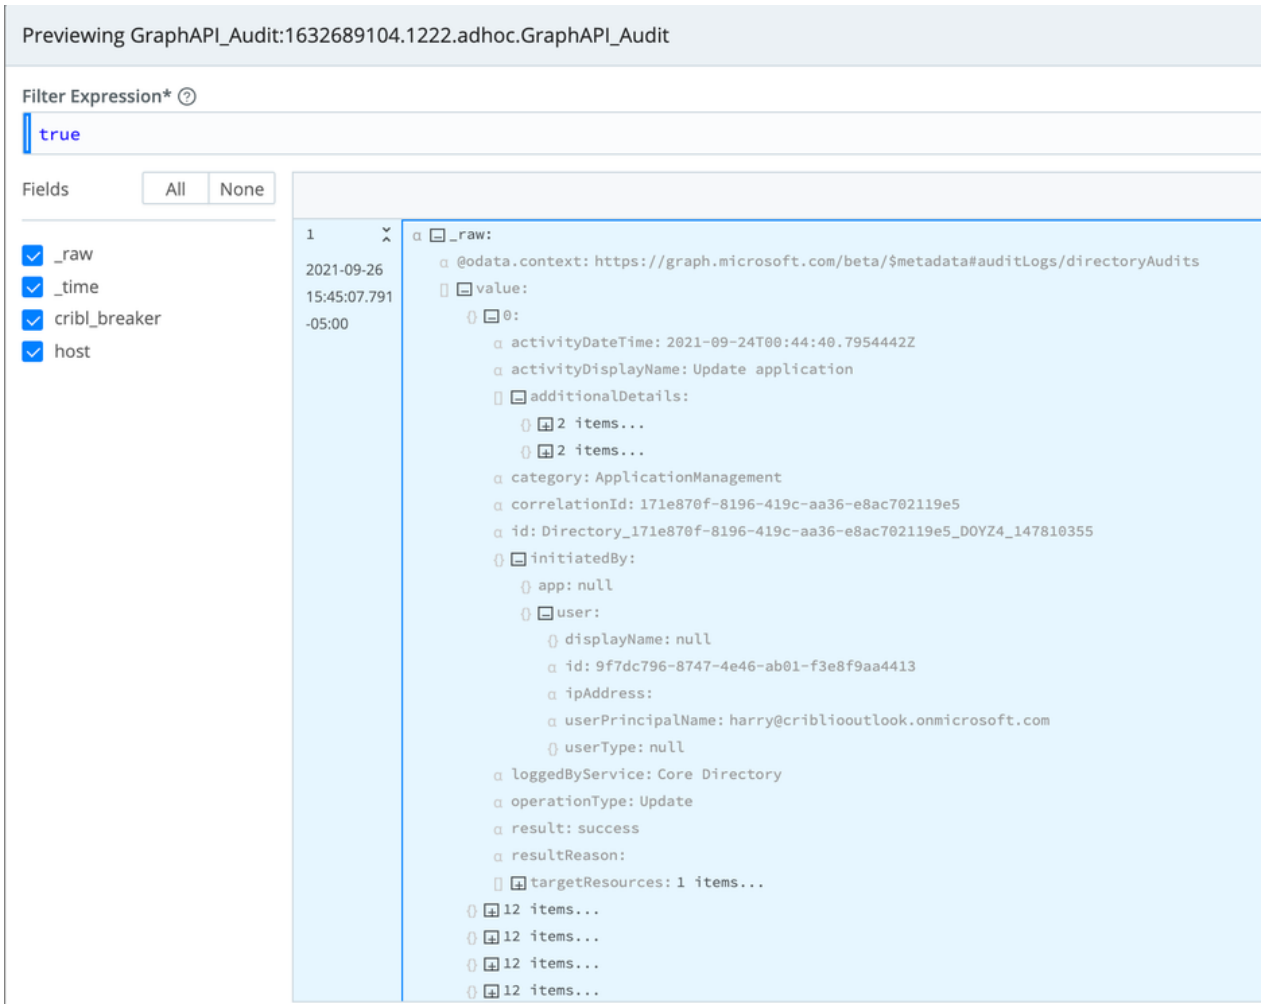

Audit Logs data in original form

Click **Save as Sample File** and note the file name and location.

Creating an Event Breaker Ruleset

From the top menu, open **Processing** > **Knowledge** > **Event Breaker Rules**, then click **New Ruleset** to open the **New Ruleset** modal. Enter an ID and a Description for the ruleset, then click **Rules** > **Add Rule** to open the **Rules** modal.

Here's what we want the ruleset to do:

1. Remove the leading `@odata.context` statement. For this example, we'll assume that OData is not important for your use case.
2. Structure each of the fields nested within the `value` element as a separate event, where the value of the `activityDateTime` field becomes the value of the `_timestamp` field.

Name the ruleset, then:

- From the **Event Breaker Type** drop-down, choose **JSON Array**. This detects that the `value` element is a JSON array, and breaks it into key-value pairs. It also discards the `@odata.context` element, because that falls outside the detected JSON array.
- In the **Timestamp Anchor** field, enter `activityDateTime` between the slashes.
- Upload your sample file.
- Compare the **In** and **Out** panes. You should see output similar to this:

Audit Logs data broken into individual events

- Click **OK** to return to the **New Ruleset** modal.
- You should see a result similar the screenshot below. Click **Save**.

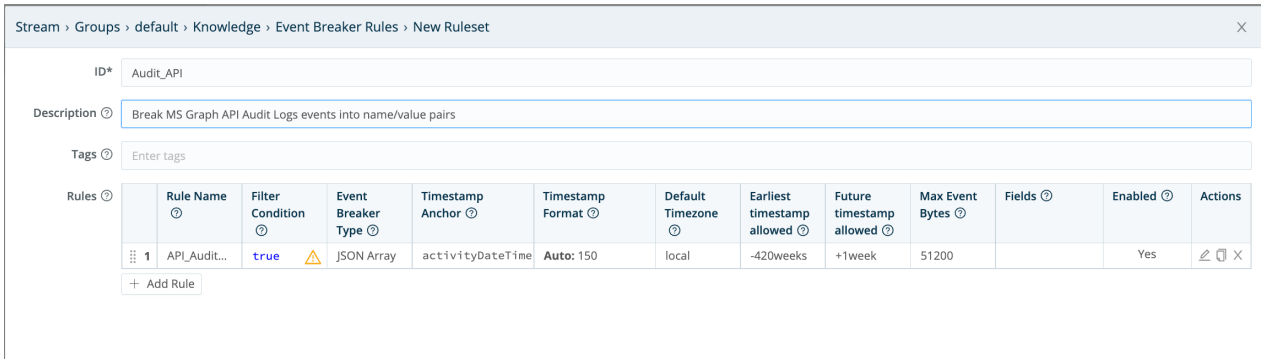

Creating an Event Breaker ruleset for Audit Logs data

Event Breakers

In the Collector's **Result Settings** > **Event Breakers** tab:

- From the **Event Breakers** drop-down, select the ruleset that you created and saved.
- Click **Save**.

Run the Collector again. Now you should see an individual JSON-formatted event for each AD Audit Log activity.

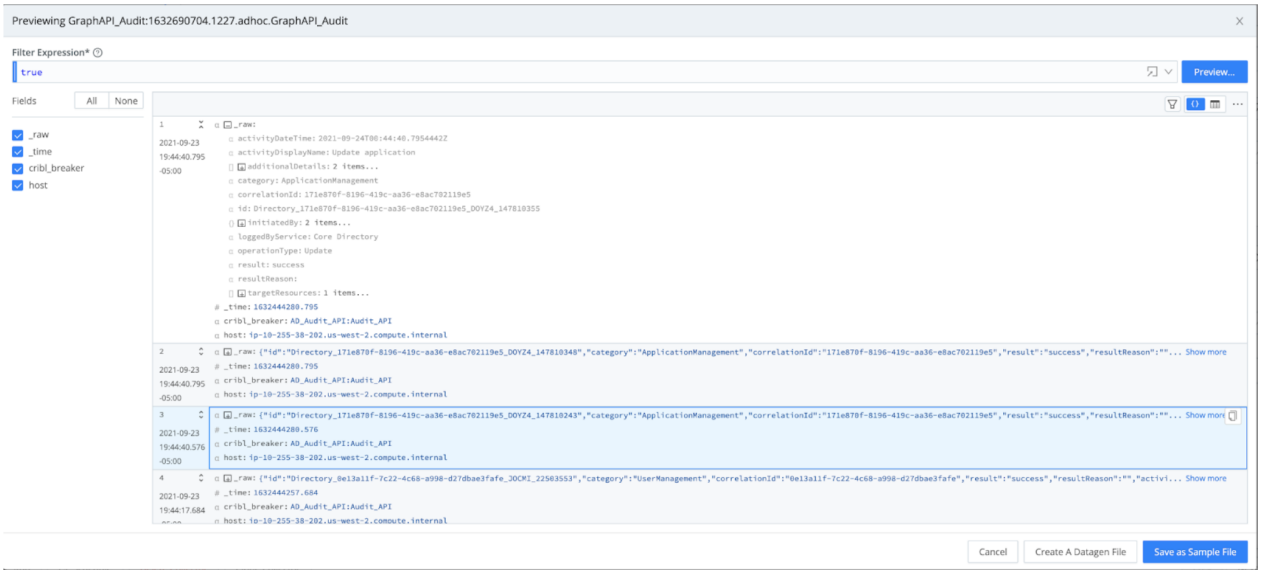

Audit Logs data from the finished Collector

14.6.5. Wiz API Collection

This topic covers how to configure Cribl Stream REST Collectors and Event Breakers to gather data from the Wiz cloud security platform. To do this, the REST Collectors will communicate with APIs that your organization's Wiz portal exposes. You'll create and configure four REST Collectors, one for each of these Wiz APIs: Audit Logs, Configuration Findings (sometimes called Cloud Configuration), Issues, and Vulnerabilities.

Throughout this topic, instead of configuring setting-by-setting, you'll open a JSON editor and paste in configurations provided in the Appendices. When creating REST Collectors, you'll replace a few values in the configuration with values from your Wiz portal. This **Manage as JSON** approach is faster and less error-prone than clicking your way through the relevant UIs, especially since the configurations required to interact with the Wiz APIs are quite complicated.

Prerequisites From Wiz

This topic assumes that when you became a Wiz customer, Wiz sent the following items:

ITEM	VALUE
Client ID	53-character string
Client secret	64-character string
Auth URL	`https://auth.app.wiz.io/oauth/token` or similar
API endpoint	`https://api.us17.app.wiz.io/graphql` or similar

These items should be the same across all Wiz APIs. The Wiz platform differentiates requests to one API from requests to another by inspecting the request body. (The configurations supplied later in this topic include an appropriate request body for each API.)

Note the values that Wiz sent you, and keep them handy for when you configure the REST Collectors later on.

Configuring the Event Breaker

Although you will create four REST Collectors, you only need to add the single Event Breaker provided below, whose ruleset contains one rule per API. All four REST Collectors will use that Event Breaker. We'll configure each REST Collector to use the rule that corresponds with the appropriate API.

The Event Breaker strips headers from events, leaving only the records of interest; and, it captures timestamps in the proper way.

1. Navigate to **Manage** > **Processing** > **Knowledge** > **Event Breaker Rules**.
2. Click **Add Ruleset**.
3. Click **Manage as JSON** at lower left.
4. Copy the Event Breaker from the Appendix below.
5. Paste the Event Breaker into the editor (replacing the default object that the editor opens with).
6. Click **Save**.

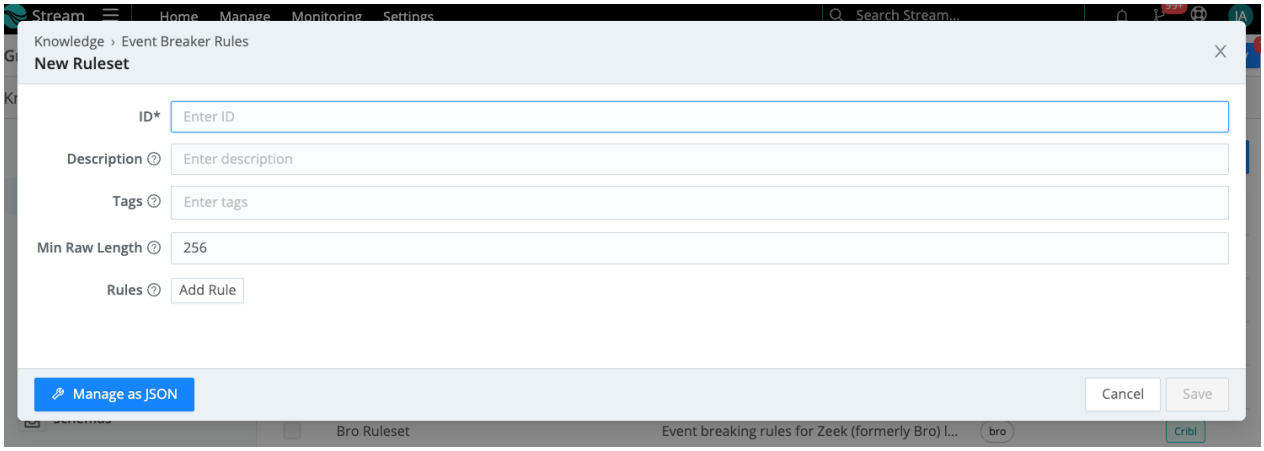

The Event Breaker UI before you add the ruleset

When you have finished adding the Event Breaker, you should see that it contains four rules:

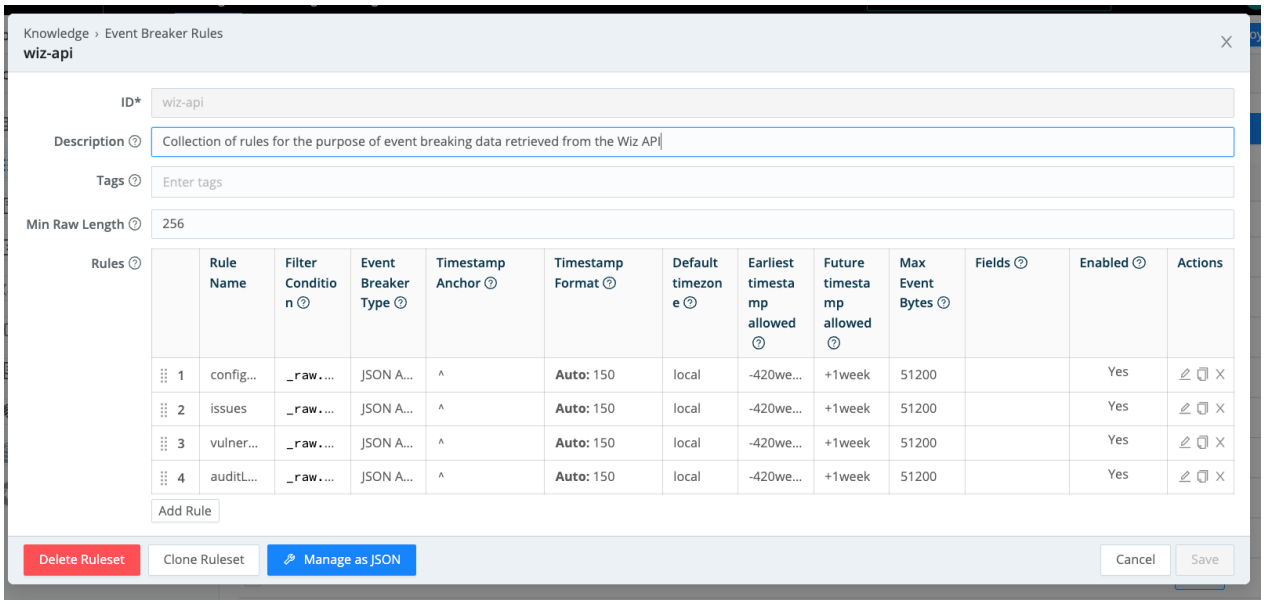

The complete Event Breaker ruleset

Configuring the REST Collectors

> You'll need to complete the procedure in this section four times. Each time, you'll create one REST Collector to handle a particular Wiz API.
>
> To learn more about REST Collectors, see our REST/API Endpoint and Scheduling and Running topics.

From the top nav of a Cribl Stream instance or Group, select **Data** > **Sources**, then select **Collectors** > **REST** from the **Data Sources** page's tiles or the **Sources** left nav. Click **Add Collector** to open the **REST** > **New Collector** modal.

1. Click **Manage as JSON** to open the configuration editor.
2. Copy the config for the desired API, from the Appendix below: Audit Logs, Configuration Findings, Issues, or Vulnerabilities.
3. Paste the config into the editor (replacing the default object that the editor opens with).
4. Locate the `collector` element, and within that, the `conf` element.
5. In the `conf` element, replace the values of the following keys with the values you noted earlier. To make this easier, the values to be replaced all have the same placeholder value of `<insert_value_here>`.
    - Replace the value of `loginUrl` with the value of **Auth URL**. Enclose this value in single quotation marks within the double-quotes required by JSON, for example: `"'https://auth.app.wiz.io/oauth/token'"`.
    - Replace the value of `clientSecretParamValue` with the value of **Client secret**.
    - In the `authRequestParams` array, find the object where `name` has the value `client_id`, and replace the value of `value` with the value of **Client ID**.
    - Replace the value of `collectUrl` with the value of **API endpoint**. Enclose this value in single quotation marks within the double-quotes required by JSON, for example: `"'https://api.us17.app.wiz.io/graphql'"`.
6. Click **OK**.

Once you've created all four REST Collectors, you'll be ready to start collecting from the Wiz APIs.

Discovering and Collecting

You can perform the following procedures with any of the four REST Collectors you've created.

We'll start with the Discovery run:

1. On the **Manage REST Collectors** page, click **Run** beside your new Collector.
2. In the resulting **Run Collector** modal, select **Mode** > **Discovery**.
3. Configure a **Time range**, if desired.
4. Click **Run** to retrieve Discovery results.

After inspecting these results, launch the Collector run:

1. Back on the **Manage REST Collectors** page, again click **Run** beside your new Collector.
2. In the resulting **Run Collector** modal, this time select **Mode** > **Full Run**.
3. Configure a **Time range**, if desired.
4. Click **Run**.

Beware of Wiz API Results Limits

To avoid degrading the performance of your Wiz environment, follow the principles described in this section.

- Do not exceed three API requests per second. Cribl Stream is generally not used in a manner that would approach this limit but if you do, the Wiz API will likely respond with `HTTP 429 Too Many Request` errors.
- Use filters in the query string to ensure that your queries pull only the relevant information.
- If you choose to capture historical data during your initial integration, keep each API's results limits in mind when running ad-hoc API collections.
- For ongoing collection, use incremental collections. To do this, schedule the REST collector to run over a timeframe that suits the task. For example, the Wiz Vulnerabilities Report API is for incremental use only and is best scheduled to run daily, pulling results only from the previous day.

The table below shows the results limits for each Wiz API.

API	LIMIT (RESULTS)
Audit Logs	10,000
Cloud Configuration	10,000
Issues	no limit
Vulnerability	no limit

Once your query hits the limit of results for a given Wiz API, the API will send no further results.

Troubleshooting

The REST Collector treats all non-`200` responses from configured URL endpoints as errors. On Discover, Preview, and most Collect jobs, it interprets these as fatal errors. On Collect jobs, a few exceptions are treated as non-fatal:

- Where a Collect job launches multiple tasks, and only a subset of those tasks fail, Cribl Stream places the job in failed status, but treats the error as non-fatal. (Note that Cribl Stream does not retry the failed tasks.)
- Where a Collect job receives a 3xx redirection error code, it follows the error's treatment by the underlying library, and does not necessarily treat the error as fatal.

Detailed logging is available for each Collector run to help troubleshoot issues or explore the results of each collector run. To view the jobs, click Monitoring->System->Job Inspector as shown below.

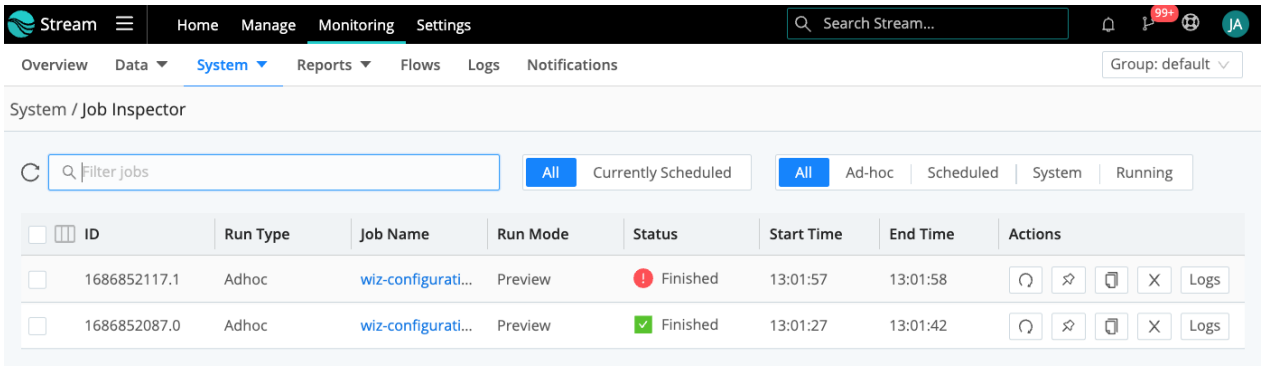

The Job Inspector

Appendix: Event Breaker

Event Breaker for Wiz APIs

```
{
  "lib": "custom",
  "minRawLength": 256,
  "id": "wiz-api",
  "rules": [
    {
      "condition": "_raw.startsWith('{\"data\":{\"configurationFindings\":
{\"nodes\":')",
      "type": "json_array",
      "timestampAnchorRegex": "/^/",
      "timestamp": {
        "type": "auto",
        "length": 150
      },
      "timestampTimezone": "local",
      "timestampEarliest": "-420weeks",
      "timestampLatest": "+1week",
      "maxEventBytes": 51200,
      "disabled": false,
      "jsonExtractAll": true,
      "eventBreakerRegex": "/[\\n\\r]+(?!\\s)/",
      "jsonArrayField": "data.configurationFindings.nodes",
      "name": "configurationFindings",
      "jsonTimeField": "createdAt"
    },
    {
      "condition": "_raw.startsWith('{\"data\":{\"issues\":{\"nodes\":')",
      "type": "json_array",
      "timestampAnchorRegex": "/^/",
      "timestamp": {
        "type": "auto",
        "length": 150
      },
      "timestampTimezone": "local",
      "timestampEarliest": "-420weeks",
      "timestampLatest": "+1week",
      "maxEventBytes": 51200,
      "disabled": false,
      "jsonExtractAll": true,
      "eventBreakerRegex": "/[\\n\\r]+(?!\\s)/",
      "jsonArrayField": "data.issues.nodes",
      "jsonTimeField": "createdAt",
      "name": "issues"
    },
    {
      "condition": "_raw.startsWith('{\"data\":{\"vulnerabilityFindings\":
{\"nodes\":')",
      "type": "json_array",
      "timestampAnchorRegex": "/^/",
      "timestamp": {
        "type": "auto",
        "length": 150
      },
      "timestampTimezone": "local",
      "timestampEarliest": "-420weeks",
      "timestampLatest": "+1week",
      "maxEventBytes": 51200,
      "disabled": false,
      "jsonExtractAll": true,
```

```
      "eventBreakerRegex": "/[\\n\\r]+(?!\\s)/",
      "jsonArrayField": "data.vulnerabilityFindings.nodes",
      "jsonTimeField": "createdAt",
      "name": "vulnerabilities"
    },
    {
      "condition": "_raw.startsWith('{\"data\":{\"auditLogEntries\":{\"nodes\":')",
      "type": "json_array",
      "timestampAnchorRegex": "/^/",
      "timestamp": {
        "type": "auto",
        "length": 150
      },
      "timestampTimezone": "local",
      "timestampEarliest": "-420weeks",
      "timestampLatest": "+1week",
      "maxEventBytes": 51200,
      "disabled": false,
      "jsonExtractAll": true,
      "eventBreakerRegex": "/[\\n\\r]+(?!\\s)/",
      "jsonArrayField": "data.auditLogEntries.nodes",
      "jsonTimeField": "timestamp",
      "name": "auditLogEntries"
    }
  ],
  "description": "Collection of rules for the purpose of event breaking data
retrieved from the Wiz API"
}
```

Appendix: REST Collector Configs

Each JSON object below is a configuration that you can copy and paste into the JSON editor when configuring a REST Collector. There's one for each Wiz API covered in this topic.

Config for Wiz Audit Logs API

Config for Wiz Audit Logs API

```
{
  "type": "collection",
  "ttl": "4h",
  "removeFields": [],
  "resumeOnBoot": false,
  "schedule": {},
  "streamtags": [],
  "workerAffinity": false,
  "collector": {
    "conf": {
      "discovery": {
        "discoverType": "none"
      },
      "collectMethod": "post_with_body",
      "pagination": {
        "type": "response_body",
        "maxPages": 20,
        "attribute": [
          "endCursor"
        ]
      },
      "authentication": "oauth",
      "timeout": 0,
      "useRoundRobinDns": false,
      "disableTimeFilter": false,
      "safeHeaders": [],
      "loginUrl": "<insert_value_here>",
      "tokenRespAttribute": "access_token",
      "authHeaderKey": "Authorization",
      "authHeaderExpr": "`Bearer ${token}`",
      "clientSecretParamName": "client_secret",
      "authRequestParams": [
        {
          "name": "client_id",
          "value": "<insert_value_here>"
        },
        {
          "name": "audience",
          "value": "wiz-api"
        },
        {
          "name": "grant_type",
          "value": "client_credentials"
        }
      ],
      "clientSecretParamValue": "<insert_value_here>",
      "collectUrl": "<insert_value_here>",
      "collectRequestParams": [
        {
          "name": "body",
          "value": "'{\"query\":\"query CloudConfigurationFindingsPage($filterBy:
ConfigurationFindingFilters $first: Int $after: String $orderBy:
ConfigurationFindingOrder ) {     configurationFindings(filterBy: $filterBy first:
$first after: $after orderBy: $orderBy) {       nodes {         id
firstSeenAt         severity         result         remediation         resource {
id         name         type         subscription {           id           name
externalId           cloudProvider         }         projects {           id
name           riskProfile {             businessImpact           }         }
```

```
}       rule {         id         graphId         name         description
remediationInstructions       }     }     pageInfo {       hasNextPage
endCursor     }   } }\",\"variables\":{\"first\":5}}'"
        }
      ],
      "collectRequestHeaders": [
        {
          "value": "'application/json'",
          "name": " accept"
        },
        {
          "value": "'application/json'",
          "name": "content-type"
        }
      ],
      "collectBody": "'{\"query\": \"query AuditLogTable($first: Int $after: String
$filterBy: AuditLogEntryFilters){ auditLogEntries(first: $first after: $after
filterBy: $filterBy) { nodes { id action requestId status timestamp actionParameters
userAgent sourceIP serviceAccount { id name } user { id name } } pageInfo {
hasNextPage endCursor } } }\",\"variables\": {\"first\": 50}}'"
    },
    "destructive": false,
    "type": "rest"
  },
  "input": {
    "type": "collection",
    "staleChannelFlushMs": 10000,
    "sendToRoutes": true,
    "preprocess": {
      "disabled": true
    },
    "throttleRatePerSec": "0",
    "metadata": [],
    "breakerRulesets": [
      "wiz-api"
    ]
  },
  "id": "wiz-auditLogEntries"
}
```


Config for Wiz Configuration Findings API

Config for Wiz Configuration Findings API

```
{
  "type": "collection",
  "ttl": "4h",
  "removeFields": [],
  "resumeOnBoot": false,
  "schedule": {},
  "streamtags": [],
  "workerAffinity": false,
  "collector": {
    "conf": {
      "discovery": {
        "discoverType": "none"
      },
      "collectMethod": "post_with_body",
      "pagination": {
        "type": "response_body",
        "maxPages": 10,
        "attribute": [
          "endCursor"
        ]
      },
      "authentication": "oauth",
      "timeout": 0,
      "useRoundRobinDns": false,
      "disableTimeFilter": false,
      "safeHeaders": [],
      "loginUrl": "<insert_value_here>",
      "tokenRespAttribute": "access_token",
      "authHeaderKey": "Authorization",
      "authHeaderExpr": "`Bearer ${token}`",
      "clientSecretParamName": "client_secret",
      "authRequestParams": [
        {
          "name": "client_id",
          "value": "<insert_value_here>"
        },
        {
          "name": "audience",
          "value": "wiz-api"
        },
        {
          "name": "grant_type",
          "value": "client_credentials"
        }
      ],
      "clientSecretParamValue": "<insert_value_here> ",
      "collectUrl": "<insert_value_here>",
      "collectRequestParams": [
        {
          "name": "body",
          "value": "'{\"query\":\"query CloudConfigurationFindingsPage($filterBy:
ConfigurationFindingFilters $first: Int $after: String $orderBy:
ConfigurationFindingOrder ) {     configurationFindings(filterBy: $filterBy first:
$first after: $after orderBy: $orderBy) {       nodes {         id
firstSeenAt         severity         result         remediation         resource {
id         name         type         subscription {           id           name
externalId           cloudProvider         }         projects {           id
name           riskProfile {             businessImpact           }         }
```

```
} rule { id graphId name description
remediationInstructions } } pageInfo { hasNextPage
endCursor } } }\",\"variables\":{\"first\":5}}'"
        }
      ],
      "collectRequestHeaders": [
        {
          "value": "'application/json'",
          "name": " accept"
        },
        {
          "value": "'application/json'",
          "name": "content-type"
        }
      ],
      "collectBody": "'{\"query\": \"query CloudConfigurationFindingsPage($filterBy:
ConfigurationFindingFilters $first: Int $after: String $orderBy:
ConfigurationFindingOrder ) { configurationFindings(filterBy: $filterBy first:
$first after: $after orderBy: $orderBy) { nodes { id firstSeenAt severity result
remediation resource { id name type subscription { id name externalId cloudProvider
} projects { id name riskProfile { businessImpact } } } rule { id graphId name
description remediationInstructions } } pageInfo { hasNextPage endCursor } }
}\",\"variables\": {\"first\": 5}}'"
    },
    "destructive": false,
    "type": "rest"
  },
  "input": {
    "type": "collection",
    "staleChannelFlushMs": 10000,
    "sendToRoutes": true,
    "preprocess": {
      "disabled": true
    },
    "throttleRatePerSec": "0",
    "metadata": [],
    "breakerRulesets": [
      "wiz-api"
    ]
  },
  "id": "wiz-configurationFindings"
}
```

Config for Wiz Issues API

Config for Wiz Issues API

```
{
  "type": "collection",
  "ttl": "4h",
  "removeFields": [],
  "resumeOnBoot": false,
  "schedule": {},
  "streamtags": [],
  "workerAffinity": false,
  "collector": {
    "conf": {
      "discovery": {
        "discoverType": "none"
      },
      "collectMethod": "post_with_body",
      "pagination": {
        "type": "response_body",
        "maxPages": 10,
        "attribute": [
          "endCursor"
        ]
      },
      "authentication": "oauth",
      "timeout": 0,
      "useRoundRobinDns": false,
      "disableTimeFilter": false,
      "safeHeaders": [],
      "loginUrl": "<insert_value_here>",
      "tokenRespAttribute": "access_token",
      "authHeaderKey": "Authorization",
      "authHeaderExpr": "`Bearer ${token}`",
      "clientSecretParamName": "client_secret",
      "authRequestParams": [
        {
          "name": "client_id",
          "value": "<insert_value_here>"
        },
        {
          "name": "audience",
          "value": "wiz-api"
        },
        {
          "name": "grant_type",
          "value": "client_credentials"
        }
      ],
      "clientSecretParamValue": "<insert_value_here>",
      "collectUrl": "<insert_value_here>",
      "collectRequestParams": [
        {
          "name": "body",
          "value": "'{\"query\":\"query CloudConfigurationFindingsPage($filterBy:
ConfigurationFindingFilters $first: Int $after: String $orderBy:
ConfigurationFindingOrder ) {     configurationFindings(filterBy: $filterBy first:
$first after: $after orderBy: $orderBy) {       nodes {         id
firstSeenAt         severity         result         remediation         resource {
id         name         type         subscription {           id           name
externalId           cloudProvider         }         projects {           id
name           riskProfile {             businessImpact           }         }
```

```
}       rule {         id         graphId         name         description
remediationInstructions       }     }     pageInfo {       hasNextPage
endCursor     }   } }\",\"variables\":{\"first\":5}}'"
        }
      ],
      "collectRequestHeaders": [
        {
          "value": "'application/json'",
          "name": " accept"
        },
        {
          "value": "'application/json'",
          "name": "content-type"
        }
      ],
      "collectBody": "'{\"query\": \"query IssuesTable($filterBy: IssueFilters
$first: Int $after: String $orderBy: IssueOrder) { issues(filterBy: $filterBy first:
$first after: $after orderBy: $orderBy) { nodes { id control { id name description
resolutionRecommendation } createdAt updatedAt dueAt project { id name slug
businessUnit riskProfile { businessImpact } } status severity entitySnapshot { id
type nativeType name status cloudPlatform cloudProviderURL providerId region
resourceGroupExternalId subscriptionExternalId subscriptionName subscriptionTags
tags externalId } note serviceTickets { externalId name url } } pageInfo {
hasNextPage endCursor } } }\", \"variables\": {\"first\": 5}}'"
    },
    "destructive": false,
    "type": "rest"
  },
  "input": {
    "type": "collection",
    "staleChannelFlushMs": 10000,
    "sendToRoutes": true,
    "preprocess": {
      "disabled": true
    },
    "throttleRatePerSec": "0",
    "metadata": [],
    "breakerRulesets": [
      "wiz-api"
    ]
  },
  "id": "wiz-issues"
}
```


Config for Wiz Vulnerabilities API

Config for Wiz Vulnerabilities API

```
{
  "type": "collection",
  "ttl": "4h",
  "removeFields": [],
  "resumeOnBoot": false,
  "schedule": {},
  "streamtags": [],
  "workerAffinity": false,
  "collector": {
    "conf": {
      "discovery": {
        "discoverType": "none"
      },
      "collectMethod": "post_with_body",
      "pagination": {
        "type": "response_body",
        "maxPages": 10,
        "attribute": [
          "endCursor"
        ]
      },
      "authentication": "oauth",
      "timeout": 0,
      "useRoundRobinDns": false,
      "disableTimeFilter": false,
      "safeHeaders": [],
      "loginUrl": "<insert_value_here>",
      "tokenRespAttribute": "access_token",
      "authHeaderKey": "Authorization",
      "authHeaderExpr": "`Bearer ${token}`",
      "clientSecretParamName": "client_secret",
      "authRequestParams": [
        {
          "name": "client_id",
          "value": "<insert_value_here>"
        },
        {
          "name": "audience",
          "value": "wiz-api"
        },
        {
          "name": "grant_type",
          "value": "client_credentials"
        }
      ],
      "clientSecretParamValue": "<insert_value_here>",
      "collectUrl": "<insert_value_here>",
      "collectRequestParams": [
        {
          "name": "body",
          "value": "'{\"query\":\"query CloudConfigurationFindingsPage($filterBy:
ConfigurationFindingFilters $first: Int $after: String $orderBy:
ConfigurationFindingOrder ) {     configurationFindings(filterBy: $filterBy first:
$first after: $after orderBy: $orderBy) {       nodes {         id
firstSeenAt         severity         result         remediation         resource {
id         name         type         subscription {           id           name
externalId           cloudProvider         }         projects {           id
name           riskProfile {             businessImpact           }         }
```

```
}       rule {         id         graphId         name         description
remediationInstructions       }     }     pageInfo {       hasNextPage
endCursor     }   } }\",\"variables\":{\"first\":5}}'"
        }
      ],
      "collectRequestHeaders": [
        {
          "value": "'application/json'",
          "name": " accept"
        },
        {
          "value": "'application/json'",
          "name": "content-type"
        }
      ],
      "collectBody": "'{\"query\": \"query VulnerabilityFindingsPage($filterBy:
VulnerabilityFindingFilters, $first: Int, $after: String, $orderBy:
VulnerabilityFindingOrder) { vulnerabilityFindings( filterBy: $filterBy first:
$first after: $after orderBy: $orderBy ) { nodes { id portalUrl name CVEDescription
CVSSSeverity score exploitabilityScore impactScore hasExploit hasCisaKevExploit
status vendorSeverity firstDetectedAt lastDetectedAt resolvedAt description
remediation detailedName version fixedVersion detectionMethod link locationPath
resolutionReason vulnerableAsset { ... on VulnerableAssetBase { id type name region
providerUniqueId cloudProviderURL cloudPlatform status subscriptionName
subscriptionExternalId subscriptionId tags } ... on VulnerableAssetVirtualMachine {
operatingSystem ipAddresses } ... on VulnerableAssetServerless { runtime } ... on
VulnerableAssetContainerImage { imageId } ... on VulnerableAssetContainer {
ImageExternalId VmExternalId ServerlessContainer PodNamespace PodName NodeName } } }
pageInfo { hasNextPage endCursor }}}\",\"variables\": {\"first\": 5}}'"
    },
    "destructive": false,
    "type": "rest"
  },
  "input": {
    "type": "collection",
    "staleChannelFlushMs": 10000,
    "sendToRoutes": true,
    "preprocess": {
      "disabled": true
    },
    "throttleRatePerSec": "0",
    "metadata": [],
    "breakerRulesets": [
      "wiz-api"
    ]
  },
  "id": "wiz-vulnerabilities"
}
```

14.6.6. ServiceNow API Collection

This topic covers how to configure Cribl Stream REST Collectors to gather data via ServiceNow (SNOW) REST APIs and then enrich the data using Pipelines and the Redis Function.

From among the 100-or-so SNOW REST APIs, we've chosen the CMDB Instance for this tutorial. You can adapt this material for use with other SNOW REST APIs. You'll need to create a separate Collector for each SNOW API you connect to.

The prerequisites for this setup are a ServiceNow instance, which you can obtain here, and the URL for the Redis store you wish to use.

Using the Discover and Collect Pattern

A common pattern in REST APIs is to expose two related endpoints:

- One endpoint takes a category identifier as a URL parameter, and returns a list of instances of the category, with an individual identifier for each item in the list.
- A second endpoint takes the instance identifier as a URL parameter, and returns full details about the instance.

The SNOW CMDB Instance REST API follows this pattern. The API is called "CMDB" because it exposes a Configuration Management Database which contains records that describe how pieces of hardware are configured. The categories for different kinds of hardware are specified by "classnames," and the description of an individual piece of hardware is called a Configuration Item (CI) record. The relevant API calls look like this:

- The `GET /now/cmdb/instance/{classname}` call takes a `classname` (e.g., `cmdb_ci_appl`, `cmdb_ci_linux_server`, `cmdb_ci_apache_web_server`) as a URL parameter, and returns a list of instances of the classname. Each instance has a `sys_id` and a `name`.
- The `GET /now/cmdb/instance/{classname}/{sys_id}` call takes a `sys_id` as a URL parameter, and returns the detailed CI record for the instance that the `sys_id` refers to.

In this tutorial, you'll create a Collector that uses the first API call to **discover** the systems for a given classname. Then you'll iterate the second API call over the list of `sys_id`s we discovered, to **collect** the CI records of interest. This **discover and collect** pattern works for any Cribl Stream Collector.

You'll have the Collector store the CI data in Redis. Then whatever Source you choose that has events to enrich, can do that by pulling the collected CI record data from Redis. That's the goal: enriching data.

How might this be useful? Here's one scenario: Suppose you have log data in which server names appear. Assuming that the servers in question have records in your CMDB, you can enrich the events with data about the server, such as its `sys_id` or the name of the user who updated it last.

Preparing Pipelines

Before creating the SNOW Collector itself, you'll set up the two Pipelines that the Collector needs. Both pipelines use the Cribl Stream Redis Function.

- The **process** pipeline attaches to the Collector and performs a `set` to add events to Redis.
- The **enrichment** pipeline performs a Redis `get` to retrieve the values with which we'll enrich events in the Collector.

Create the Process Pipeline

Create a pipeline called `SNOW_Instance_Process` with the following Functions and values:

Parser Function

- **Operation Mode**: `Extract`
- **Type**: `JSON Object`
- **Source Field**: `_raw`

Note that each event this Function will parse is the reponse body from a `GET /now/cmdb/instance/{classname}/{sys_id}` call—i.e., a `result` object. That object has an attribute called `attributes` whose value is itself an object containing dozens of key-value pairs. To enrich our data, we'll treat one of those (`name`, meaning server name) as a key whose value will be two more (`sys_id` and `sys_updated_by`), comma-separated. We'll specify all three as **Evaluate Fields** in the next Function.

Eval Function

Evaluate Fields:

NAME	VALUE EXPRESSION
`name`	`result.attributes.name`

NAME	VALUE EXPRESSION
sys_id	result.attributes.sys_id
sys_updated_by	result.attributes.sys_updated_by

Redis Function

The Redis function stores our fields in the key/value relationship described earlier.

- **Command**: `set`.
- **Key**: `` `${name}` ``.
- **Args**: `` `${sys_updated_by},${sys_id}` ``.
- **Redis URL**: The URL for your Redis store, e.g., `redis://10.0.0.1:6379`.

Create the Enrichment Pipeline

Create a pipeline called `SNOW_Instance_Enrich` with the following Functions and values:

Redis Function

- **Command**: `get`.
- **Result field**: `Args`.
- **Key**: `` `${name}` ``.
- **Args**: Leave blank.
- **Redis URL**: The URL for your Redis store, e.g., `redis://10.0.0.1:6379`.

Parser Function

- **Operation Mode**: `Extract`.
- **Type**: `CSV`.
- **Source Field**: `Args`.
- **List of Fields**: `sys_updated_by sys_id`.

Eval Function

- **Remove Fields**: `Args`.

Configuring a SNOW Collector

From a Cribl Stream instance's or Group's **Manage** submenu, select **Data** > **Sources**, then select **Collectors** > **REST** from the **Manage Sources** page's tiles or left nav. Click **New Collector** to open the **REST** > **New Collector** modal, which provides the following options and fields.

> The sections described below are spread across several tabs. Click the tab links at left, or the **Next** and **Prev** buttons, to navigate among tabs. Click **Save** when you've configured your Collector.

Collector Settings

These settings determine how data is discovered and collected before processing. You'll see the power of the **discover and collect** pattern here: from the results of a single Discover API call, we will generate an entire set of Collect API calls. There is more about this pattern in the REST Collector documentation.

Collector ID: Unique ID for this Collector. E.g., `snow_42-a`.

Discover Settings

Discover Type: `HTTP Request`

Discover URL: An expression that produces a URL for the discover operation. We can enter this URL as a constant, e.g.:

```
'https://dev111111.service-now.com/api/now/cmdb/instance/cmdb_ci_appl'
```

Discover method: `GET`

Discover Data Field: `result`

We specify `result` for the **Discover Data Field** because that is the key of the JSON array that our Discover call retrieves. For example:

```
"result": [
  {
    "sys_id": "3a290cc60a0a0bb400000bdb386af1cf",
    "name": "PS LinuxApp01"
  },
  {
    "sys_id": "3a5dd3dbc0a8ce0100655f1ec66ed42c",
    "name": "PS LinuxApp02"
  }
]
```

This array becomes the list of items for which Collect tasks will be created. We'll reference one of its attributes, namely `sys_id`, as a variable in the Collect task's URL.

Collect Settings

Collect URL: An expression that produces a URL for the collect operation. We enter the first part of the URL as a constant, then for the final URL parameter, we use an expression to reference the `sys_id` returned by the Discover call:

```
'https://dev111111.service-now.com/api/now/cmdb/instance/cmdb_ci_appl'+
C.Encode.uri(`${sys_id}`)
```

We use the C.Encode.uri Cribl expression to encode the `sys_id` in case any `sys_id` contains unsafe characters.

Collect method: `GET`.

Authentication

Use the **Authentication method** buttons to select one of these options:

- **None**: Don't use authentication.
- **Basic**: Use HTTP token authentication.
- **Basic (credentials secret)**: Select a stored text secret in the resulting drop-down, or click **Create** to configure a new secret.
- **Login**: This option requires you to provide:
  - The **Username** and **Password** fields for your HTTP Basic authentication credentials.
  - The **Login URL** that SNOW should use to connect to Cribl Stream.

    - A **POST Body** template for the request SNOW uses when logging in. You must edit this if your credentials' location differs from that specified by default.
    - The **Token Attribute**, which is the path to the token attribute in login response body. Nested attributes are OK.
    - The **Authorize Expression**, a JavaScript expression that computes the `Authorization` header to pass in Discover and Collect calls. The value `${token}` references the token obtained from login.

- **Login (credentials secret)**: Provide username and password credentials referenced by a secret. Select a stored text secret in the resulting **Credentials secret** drop-down, or click **Create** to configure a new secret. You must also provide the **Login URL**, **POST Body**, **Token Attribute**, and **Authorize Expression**, as in the plain **Login** option.

Result Settings

These settings enable the Collector you've been configuring to use your **process** Pipeline.

Result Routing

Toggle **Send to Routes** to `No`.

Choose the `SNOW_Instance_Process` pipeline from the dropdown.

Choose whatever **Destination** suits your purposes; a DevNull Destination would make sense given that the purpose of this Collector is simply to get data into Redis.

Adding a Source with Data to Enrich

At this point, you have a Collector which stores CI record data in Redis. Assuming that you have a Source with events you want to enrich, you should now configure that Source to use the **enrich** Pipeline you created earlier.

In **Processing Settings** > **Pre-Processing**, choose `SNOW_Instance_Enrich` from the **Pipeline** drop-down.

Verifying the Enrichment of Events

This procedure should demonstrate that your setup is working, or help you troubleshoot.

1. Send a request to the SNOW Instance API to verify that it returns data.

    - Try the query builder.
2. Run the Collector once. Since you have attached the **process** Pipeline to the Collector, it should update Redis with `set` calls.

    - When you're ready to move towards production, you can run the Collector on a schedule, to update Redis periodically.

3. Run a `get` command on the Redis command line, using the key for your chosen API, to verify that Redis was updated as expected.

4. Check the Source whose data you are enriching, to verify that the fields you added are showing up.

14.6.7. Creating a Custom Collector

Cribl's flagship product introduced Collectors in Logstream 2.2, and they have since evolved to become a critical part of the platform. You can think of Collectors as jobs that retrieve data from an external service. You can also schedule them to run periodically, like a Linux cron job.

We built the Collection framework to be extensible like Cribl Stream Functions. This means that you can create new Collectors on the fly. This page covers the Collection process, schema files, and their implementation – to give you some context – before walking you though the steps of creating your own Collector.

Collection Process

At its simplest, collection is a two-step process: Discover, and Collect.

Discover

This step identifies the items to collect. The Discover call generates a list of items, and Collect tasks will be created for those items. Note that:

- The Discover call can return zero to many items. The Collection phase will run only if Discover returned at least one item.
- Your Collector's purpose (and definition) determines the actual data that Discover will return.
- If the Collector pulls data from files on disk, the Discover call lists the files in the directory to determine how many items match the criteria (matching by filter and/or date range). Assuming that there are 100 files to collect from, the Discover call will return 100 items (each specifying a file path and size).

Collect

Each item, from the Discover phase's returned list of items, will trigger one Collect task for Cribl Stream to create and run. More on Collect:

- Generally, there is a single Collect task per item returned by Discover.
- In distributed deployments, you configure Collectors at the Worker Group level, and Worker Nodes execute the tasks. However, the Leader Node oversees the task distribution, and tries to maintain a fair balance across jobs.

Collector Schema Files

The Collector schema files, `conf.schema.json` and `conf.ui-schema.json`, describe the structure of the UI for configuring a new or existing Collector. As an example, here's a Script Collector's Configuration modal:

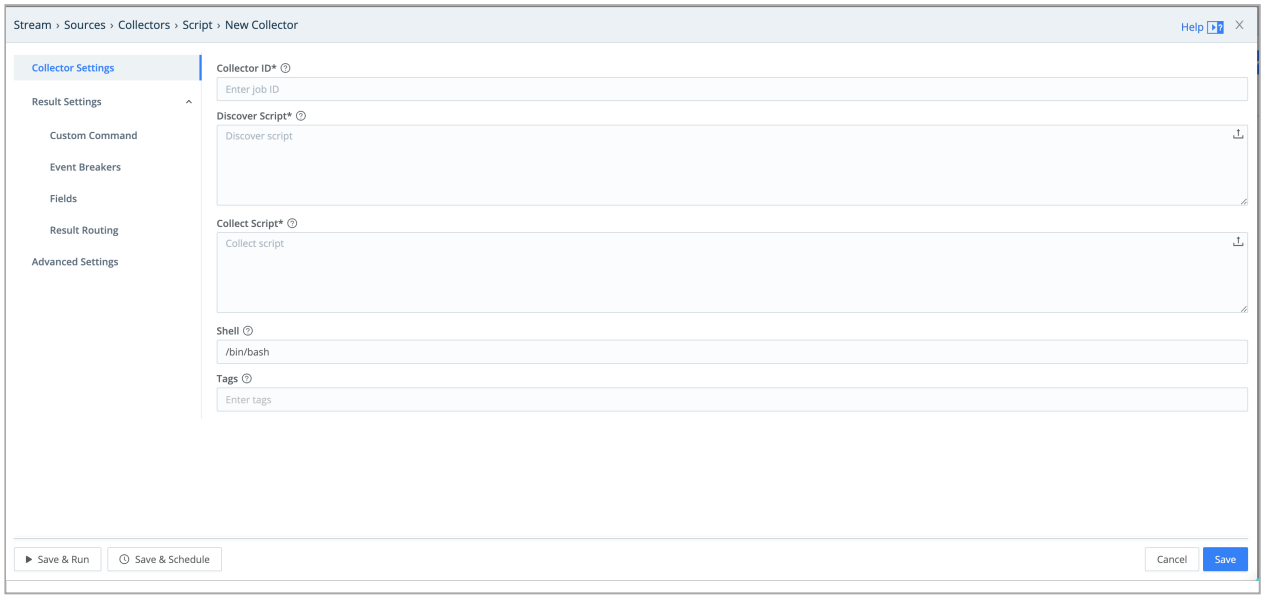

Script Collector Configuration Screen

The `conf.schema.json` below defines all the fields displayed on that **Collector Settings** form:

```
{
  "type": "object",
  "title": "",
  "required": ["discoverScript", "collectScript"],
  "properties": {
    "discoverScript": {
      "type": "string",
      "title": "Discover Script",
      "minLength": 1,
      "description": "Script to discover what to collect. Should output one task per
line in stdout."
    },
    "collectScript": {
      "type": "string",
      "title": "Collect Script",
      "minLength": 1,
      "description": "Script to run to perform data collections. Task passed in as
$CRIBL_COLLECT_ARG. Should output results to stdout."
    },
    "shell": {
      "type":"string",
      "title": "Shell",
      "description": "Shell to use to execute scripts.",
      "default": "/bin/bash"
    }
  }
}
```

The `conf-ui-schema.json` file further refines the field specifications in `conf.schema.json`. In the example below, it specifies that the `discoverScript` and `collectScript` fields should use the `TextareaUpload` widget with 5 rows. This file also gives each text field some placeholder (ghost) text, to display when no data is present in the field.

```
{
  "discoverScript": {
    "ui:widget": "TextareaUpload",
    "ui:options": {
      "rows": 5
    },
    "ui:placeholder": "Discover script"
  },
  "collectScript": {
    "ui:widget": "TextareaUpload",
    "ui:options": {
      "rows": 5
    },
    "ui:placeholder": "Collect script"
  }
```

Schemas can be simple, like the Script Collector, or complex like the REST Collector. This guide doesn't cover all the possibilities of working with schemas, which do get complex. However, you can check out other existing Collectors as examples of how to apply schemas for your own use case.

Collector Implementation

The Collector's implementation logic is part of `index.js`, and resides in the same directory as the Collector schema files. You must define the following attributes and methods for the Collector:

```
// Jobs can import anything from the C object, to see what's available use the
// Stream UI and an Eval Function to discover options.
const { Expression, PartialEvalRewrite } = C.expr;
const { httpSearch, isHttp200, RestVerb, HttpError, wrapExpr, DEFAULT_TIMEOUT_SECS }
= C.internal.HttpUtils;

exports.name = 'Weather';
exports.version = '0.1';
exports.disabled = false; // true to disable the collector
exports.destroyable = false;
exports.hidden = false; // true to hide collector in the UI

// Define Collector instance variables here: i.e.:
// let myVar; // Initialize in init, discover, or collect.

// init is called before the collection job starts. Gives the Collector a chance
// to validate configs and initialize internal state.
exports.init = async (opts) => {
  // validate configs, throw Error if a problem is found.
  // Initialize internal attributes here
}

// The Discover task's main job is to determine 'what' to collect. Each item
// to collect (i.e. a file, an API call, etc) is reported via the job object
// and will execute a collection task.
// Note that different instances of the Collector will be used for the Discover
// and Collect operations. Do not set internal Collector state in Discover
// and expect it to be present in Collect. The _init method will be called
// prior to Discover orCcollect.
exports.discover = async (job) => {
  // Job is an object that the collector can interact with, for example
  // we can use the job to access a logger.
  job.logger().info('Discover called');

  // In this case, reporting 2 hard coded items to be collected. Normally,
  // collectors dynamically report items to collect based on input from
  // an API or library call.
  await job.addResults([{"city": "San Francisco"},{"city": "Denver"}]);
  // Can also add results one at a time using await job.addResult("city": "San
Francisco"})
}

// One invocation of the Collect method is made for each item reported by the
// discover method. The collectible object contains the data reported by discover.
// In our example collect will be called twice, once for each item returned
// by discover's addResults call:
// Invocation 1: {"city": "San Francisco"}
// Invocation 2: {"city": "Denver"}
exports.collect = async (collectible, job) => {
   job.logger().info('In collect', { collectible });
   try {
     // Do actual data collection here. In this case we might make a REST API call
     // to retrieve current weather conditions for the city in collectible.
     const myReadableStream = doGetWeather(collectible.city);
   } catch (error) {
     // If the collector encounters a fatal error, pass the error to the job. This
     // will make the error visible in the Job inspector UI.
     job.reportError(error)
     return;
```

```
    }
    // Return result of the collect operation should be Promise<Readable>
    // which will be piped to routes or to the configured pipeline and destination.
    return Promise.resolve(myReadableStream)
}
```

Set Up a New Collector

Now to the exciting part. Here's an overview of how to add a Collector:

1. Create a directory where Collector files will reside. All files associated with the Collector should be in this directory.
2. Create the schema files and add them to the directory. The following schema files describe the structure of the UI for configuring a new or existing Collector:
   - `schema.json`
   - `ui-schema.json`
3. Create a JavaScript file named `index.js`, with naming attributes and required methods.
4. Test and validate the Collector.
5. Install the Collector in Cribl Stream.

Before You Start

A few things to note before we start the process of adding a custom Collector:

1. For a standalone install of a running Cribl Stream instance, add new directories and files to the `$CRIBL_HOME/local/cribl/collectors` directory (e.g., `/opt/cribl`).

2. The Collector will show up in the UI only if all schema files and the `index.js` file successfully compile. If the Collector is not showing up in the UI, check whether there was a problem compiling one of the files. You can check the errors through the API Server Logs.

3. Develop your Collector in a local test environment, as a best practice. After making changes to the Collector, you might need to restart/and or deploy your system.

4. Collectors can access all Node.js built-in modules, using the `require` directive to import each module.

5. You can include third-party Node.js modules into a custom Collector by installing them in the Collector's home directory.

6. Cribl Stream ships with out-of-the-box Collectors which reside in the `$CRIBL_HOME/default/cribl/collectors` directory. Feel free to copy contents from one of the existing Collectors to your `$CRIBL_HOME/local/cribl/collectors` (local directory) as a starting point/example of how to build more-complex schemas.

> Never modify a Collector in the default directory (`$CRIBL_HOME/default/cribl/collectors/*`). Because:
>
> 1. Doing so changes the behavior of a Collector in your installed system.
> 2. Contents of the default directory will be overwritten during upgrades.
>
> When creating your own Collector, always make a copy to a directory in the local `$CRIBL_HOME/local/cribl/collector/<yourCollector>`

Sample Collector Requirements

For this example, our sample Collector's goal is to generate events – containing a random quote obtained from an internal list – for a list of users. Here is a breakdown of this Collector's requirements:

1. Provide a random quote to a predefined or random list of usernames.
2. Accept the names of users for whom to generate quotes.
3. Accept randomly generated usernames, by specifying the number of usernames to generate.
4. Generate a single event containing a random quote for each user.
5. Pick the random quotes from a hard-coded list, or optionally, use a REST API instead.

For this sample Collector, we'll reference a third-party Node module to generate random usernames, and to give you a basic understanding of how to reference external code packages.

Set Up Your Environment

For this guide, we'll build a custom Collector in a standalone Cribl Stream install running in Docker. To adapt the steps for a distributed environment:

1. Build the Collector on the Leader Node.

2. The Collector directory will reside in the filesystem at: `$CRIBL_HOME/groups/<workerGroup>/local/cribl/collectors/quote_generator`. For example, to build in the default Worker Group, work in the directory: `$CRIBL_HOME/groups/default/local/cribl/collectors/quote_generator`.

3. Before running the Collector, commit and deploy changes for the parent Worker Group.

Deploy a Single Instance of Cribl Stream in Docker

1. Start the Docker instance by running the following command:
   `docker run -d -p 19000:9000 cribl/cribl:latest`

2. List Docker containers by running `docker ps`, as shown here:

```
$ docker ps
CONTAINER ID   IMAGE                  COMMAND                  CREATED
STATUS         PORTS                    NAMES
544370698fb5   cribl/cribl:3.4.1-RC1  "/sbin/entrypoint.sh…"   4 minutes ago
Up 4 minutes   0.0.0.0:19000->9000/tcp  nervous_wozniak
```

3. Access the Cribl Stream UI at port: `http://localhost:19000`

4. Connect to the container:
   `docker exec -it <Container ID> bash`

   (e.g., `docker exec -it 544370698fb5 bash`)

5. Update the apt installer:
   `apt update`

6. Install Vim (or an editor of your choice):

   - vim: `apt install vim`
   - nano: `apt install nano`

After this, remain connected to the Docker container, and follow the steps below to create the Collector.

> Remember to leave the Docker container running while you work on the Collector. Also, remember to explicitly back up your files before stopping the Docker container.

Build a Collector (Single-Instance Environment)

In your terminal, type the following commands:

1. `cd /opt/cribl/local/cribl`

2. `mkdir collectors`
3. `cd collectors`
4. `mkdir quote_generator`
5. `cd quote_generator`
6. `cp ../../../../default/cribl/collectors/script/* .`
7. `chmod +w index.js *.json`
8. Edit `index.js` to change the following, to assign a unique name to the Collector:

```
exports.name = 'Quote Generator';
```

9. Next, restart Cribl Stream with the following command:

```
$ /opt/cribl/bin/cribl restart
```

10. After Cribl Stream restarts, you must log out and log back in for the new Collector tile to display under Sources.

Configure the Collector in Cribl Stream

1. From your Cribl Stream UI's top nav, select **Data > Sources**, then select **Collectors > Quote Generator** from the **Data Sources** page's tiles or the **Sources** left nav.

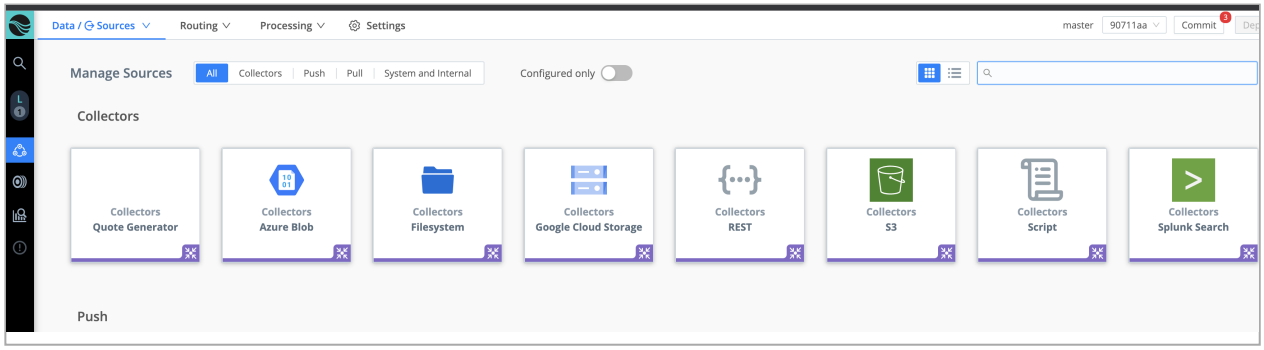

Quote Generator Collector (Missing an Icon)

2. Click **Add Collector** to open the **Quote Generator > New Collector** modal.
3. Enter the following in the **Collector Settings** tab, then click **Save**:

- **Collector ID**: `Hello_World`
- **Discover Script**: `echo "hello world"`
- **Collect Script**: `echo "{ message: \"$CRIBL_COLLECT_ARG\" }"`

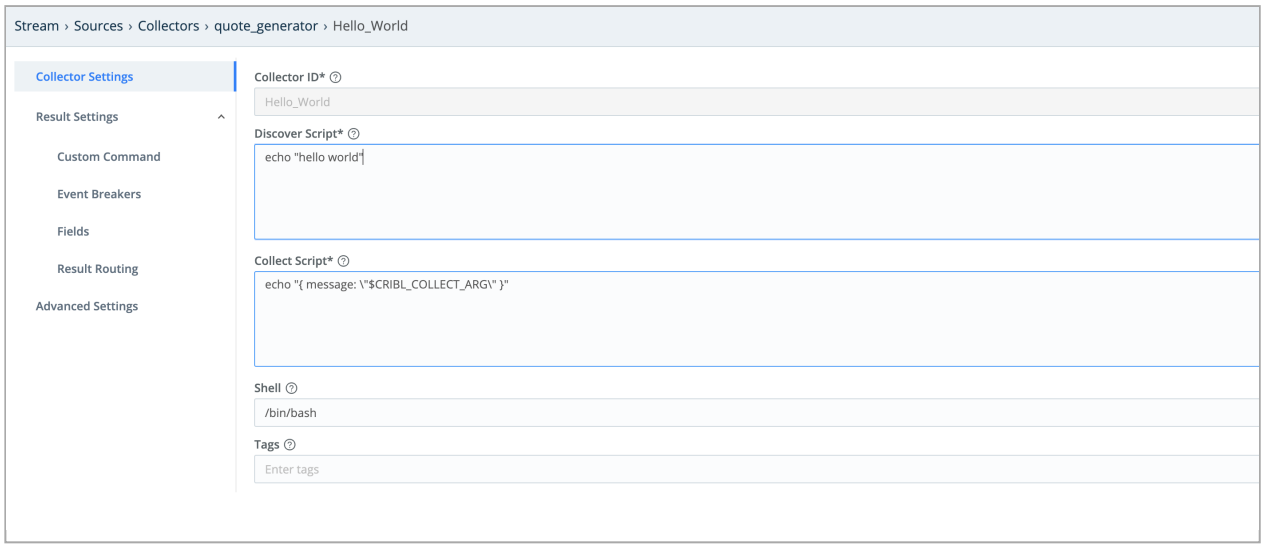

Collector Settings Tab

4. On the **Manage Quote Generator Collectors** page, click **Run** next to the Collector.

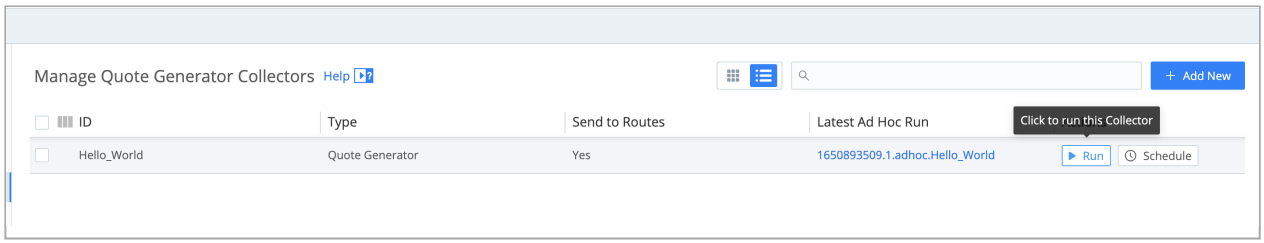

Run the Collector

5. In the **Run configuration** modal, click **Run** again. Note that you can set the Collector's debug level in the modal's **Advanced Options** section. For details, see Run Configurations and Shared Settings.

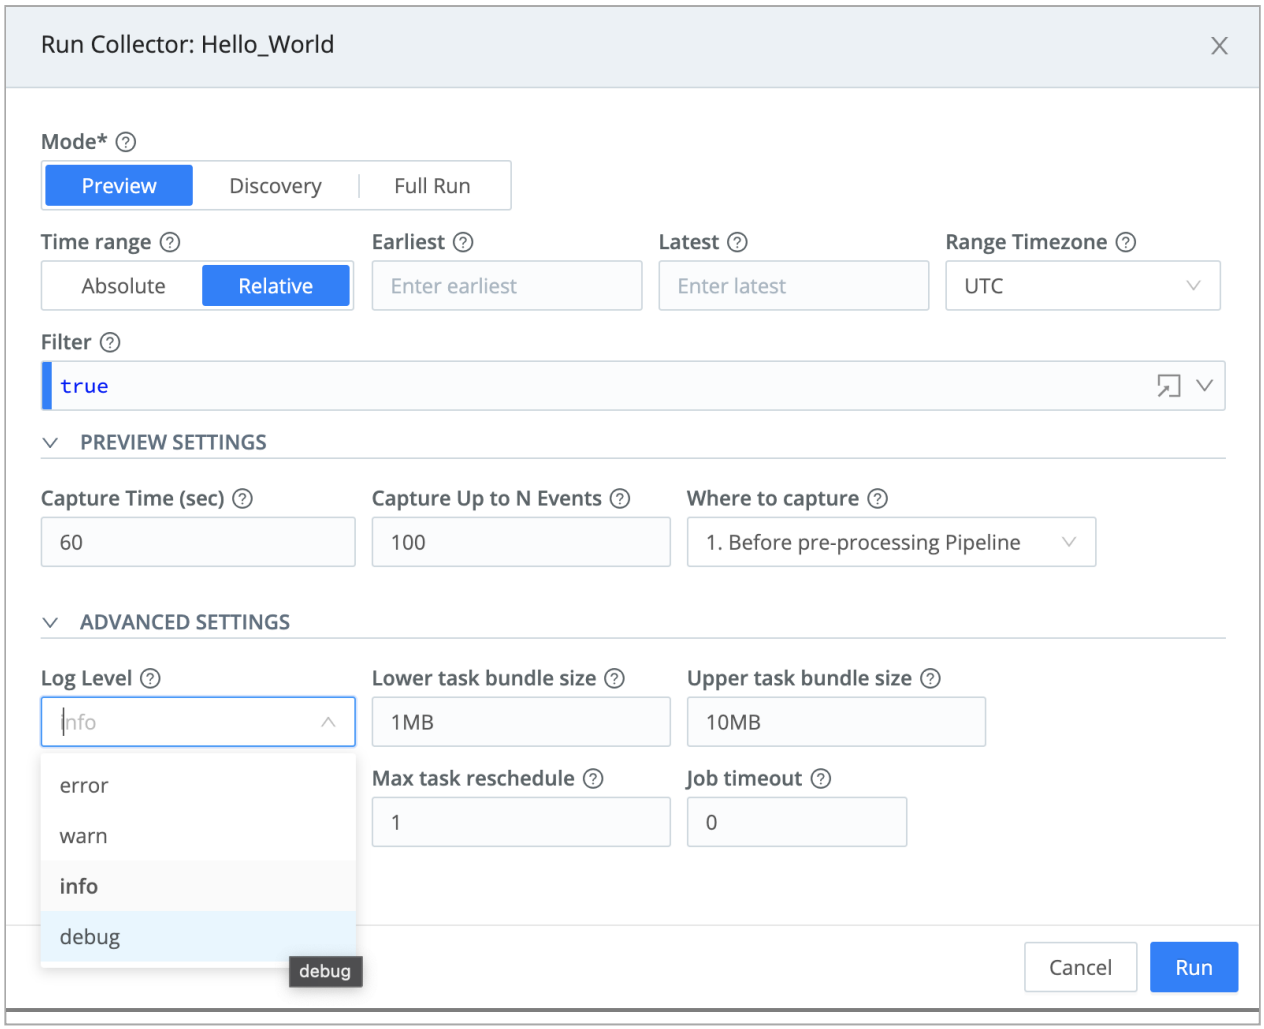

Run the Collector

6. After the Collector runs, the following event will be generated:

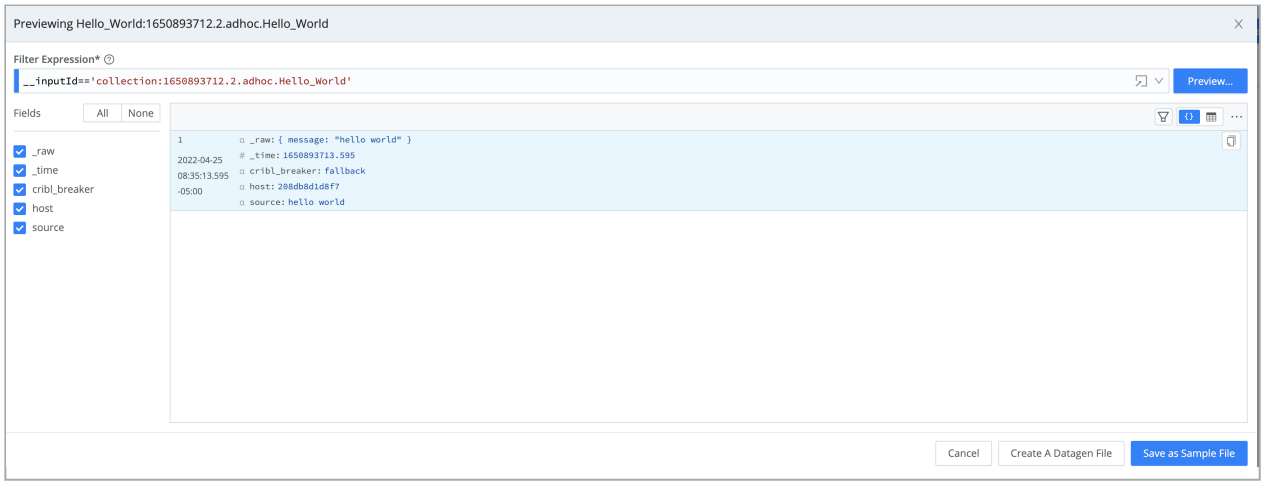

Run the Collector

Now that we have a basic shell for our Collector, let's change the UI and `index.js` to add our custom Collector logic. Before making any additional changes, delete the Collector we just created.

7. On the **Manage Quote Generator Collectors** page, click the check box next to your Collector, then click **Delete selected Collectors**.

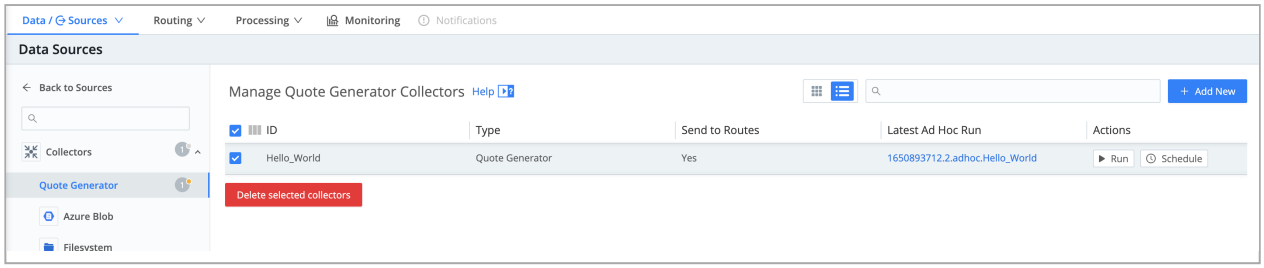

Delete the Collector

Edit the Schema Files

1. Replace the contents of `conf.schema.json` with the following:

```
    {
      "type": "object",
      "title": "",
      "required": ["autoGenerateNames"],
      "properties": {
        "autoGenerateNames": {
          "type": "boolean",
          "title": "Auto generate names",
          "description": "Turn on to autogenerate names, use num names to specify
how many names to generate. Turn off to specify a static list of names",
          "default": false
        }
      },
      "dependencies": {
        "autoGenerateNames": {
          "oneOf": [
            {
              "required": ["numNames"],
              "properties": {
                "autoGenerateNames": { "enum": [true] },
                "numNames": {
                  "type": "number",
                  "title": "Num names",
                  "minimum": 1,
                  "maximum": 1000,
                  "description": "The number of names to auto generate, each name
will turn into a collection task."
                }
              }
            },
            {
              "required": ["names"],
              "properties": {
                "autoGenerateNames": { "enum": [false] },
                "names": {
                  "type": "array",
                  "title": "Names",
                  "minLength": 1,
                  "description": "List of user names to retrieve quotes for.",
                  "items": {"type": "string"}
                }
              }
            }
          ]
        }
      }
    }
```

Two interesting things to note in the `conf.schema.json` file:

- When you disable – set to `false` – the boolean toggle `autoGenerateNames`, the UI displays a **Names** field requesting a list of user names for which to retrieve quotes.
- When you enable – set to `true` – the boolean toggle `autoGenerateNames`, the UI displays a **Number of names to enter** field requesting the number of names to auto-generate.

The dependency allows dynamic onscreen behavior based on the field's value.

2. Replace the contents of `conf.ui-schema.json` with the following:

```
{
  "names": {
    "ui:field": "Tags",
    "ui:placeholder": "Enter names",
    "ui:options": {
      "separator": ","
    }
  }
}
```

   The UI schema, in this case, further refines the widget (“Tags”) used for the Names field. We will see this in action a bit later.

3. Finally, replace the contents of `index.js` with the following:

```
exports.name = 'Quote Generator';
exports.version = '0.1';
exports.disabled = false;
exports.destroyable = false;

const Readable = require('stream').Readable;
const os = require('os');
const host = os.hostname();
const logger = C.util.getLogger('myCollector'); // For use in debugging init,
search worker logs for channel 'myCollector'

let conf;
let batchSize;
let filter;
let autoGenerate = false;
let numNames = 0;
let names;

exports.init = async (opts) => {
  conf = opts.conf;
  //logger.info('INIT conf', { conf });
  batchSize = conf.maxBatchSize || 10;
  filter = conf.filter || 'true';
  autoGenerate = conf.autoGenerateNames
  names = conf.names || [];
  numNames = conf.numNames ?? 3;
  //logger.info('INIT VALUES', { autoGenerate, names, numNames });
  return Promise.resolve();
};

exports.discover = async (job) => {
  for (let i = 0; i < names.length; i++) {
    job.addResult({"name": names[i]});
  }
}

exports.collect = async (collectible, job) => {
  job.logger().debug('Enter collect', { collectible });
  const quote = "Carpe Diem!"; // Hard coded quote for now.

  // Must return a readable stream from the collect method. Here we are
returning
  // the result string wrapped in a Readable.
  const s = new Readable();
  s.push(JSON.stringify({ host, name: collectible.name, quote }));
  s.push(null);

  // Return readable to stream collected data
  return Promise.resolve(s)
};
```

4. Next, restart Cribl Stream with the following command:

```
$ /opt/cribl/bin/cribl restart
```

5. After Cribl Stream restarts, you must log out and log back in for the new Collector tile to display under Sources.

Configure a New Collector Instance

1. In the Cribl Stream UI, navigate to the Quote Generator Collector and click **Add New** to open the **Quote Generator > New Collector** modal.

2. Type the following into the **Collector Settings** tab, then click **Save**:

   - **Collector ID**: `firstCollector`
   - **Auto generate names**: `No`
   - **Names**: `Jane, John, Rover`

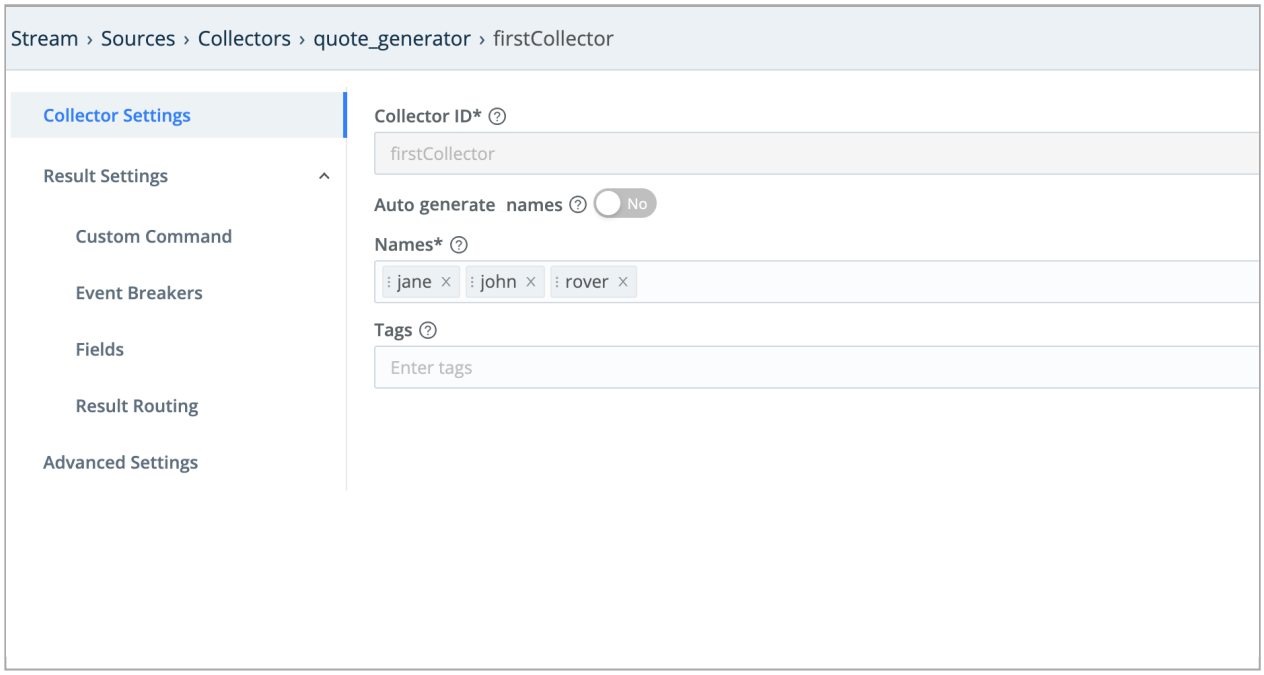

New Collector Settings

3. On the **Manage Quote Generator Collectors** page click **Run** next to the Collector.

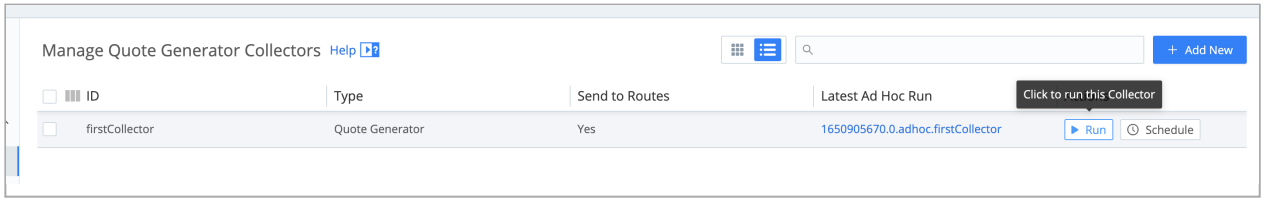

Run the Collector

4. In the **Run configuration** modal:

   - For **Mode**, click **Preview**.
   - For **Log Level**, select **debug**.

- Click **Run** again.

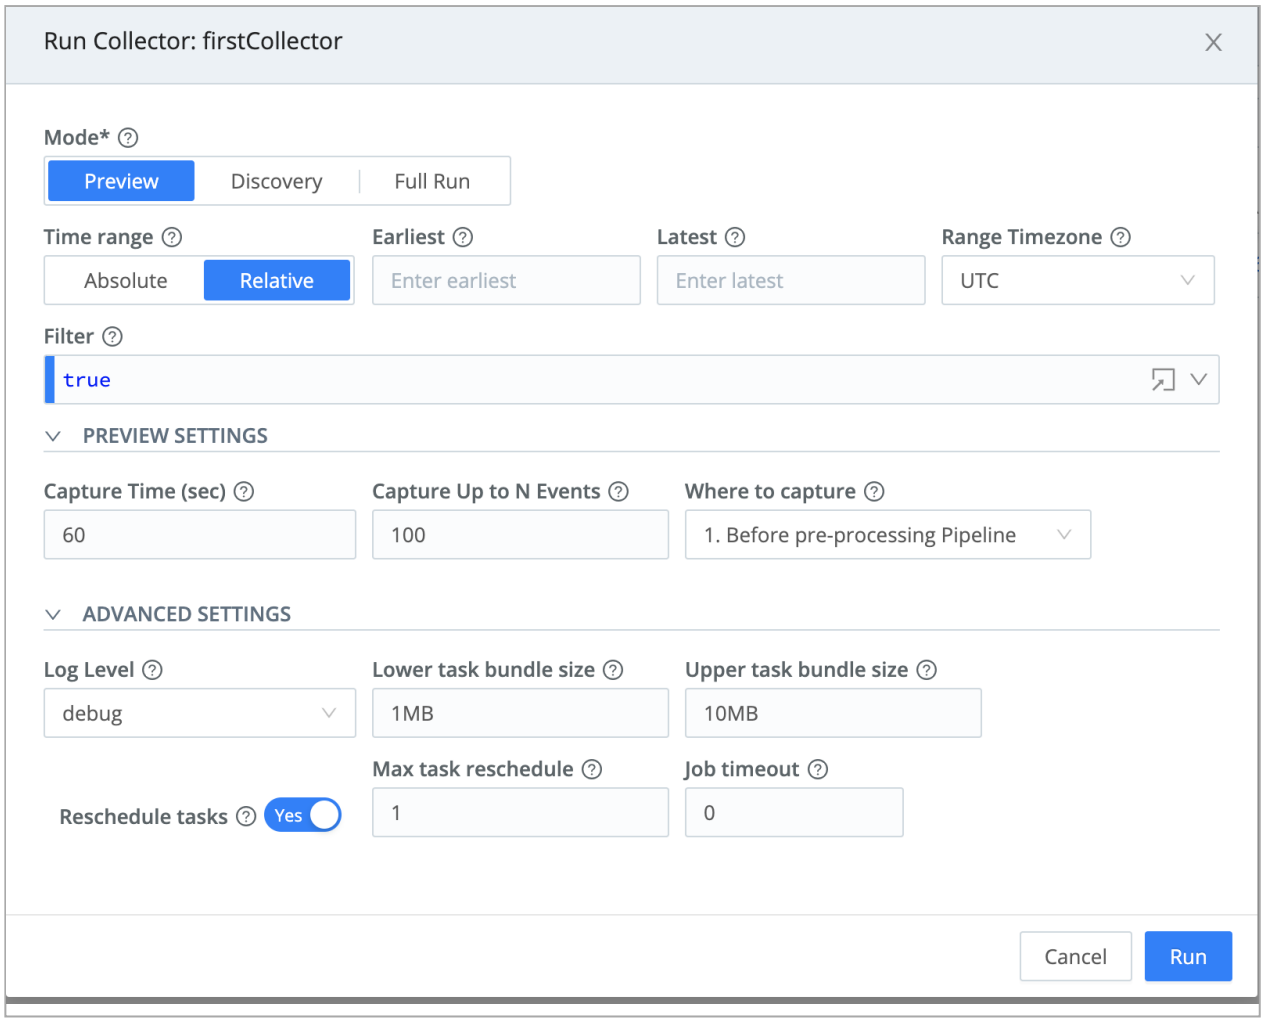

Run Collector Settings

4. If the Collector works, a successful run displays a results dialog, including an event for each name that was added.

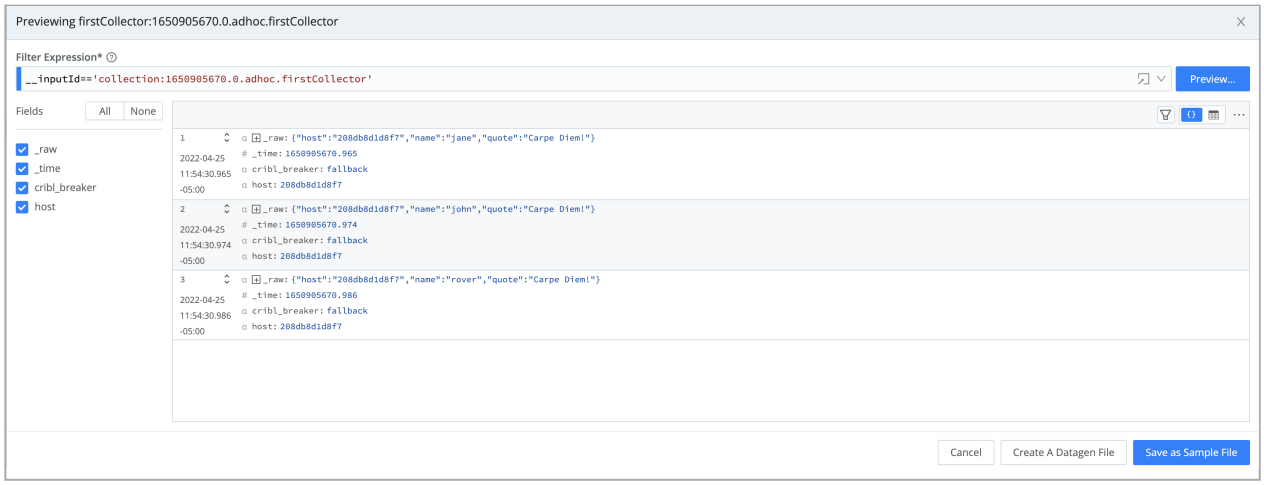

Collector Events

5. Close the **Preview** dialog.

6. On the **Manage Quote Generator Collectors** page, click **Latest ad hoc run**.

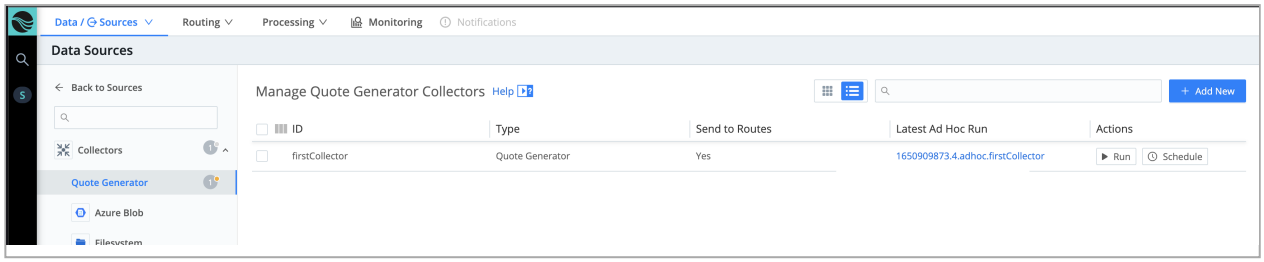

Latest Ad Hoc Run column

7. This will open a dialog from the Job Inspector with information about the run, including job status, items returned by the Discover call, and logs. Click the **Discover Results** tab to see data returned from the Collector's Discover call:

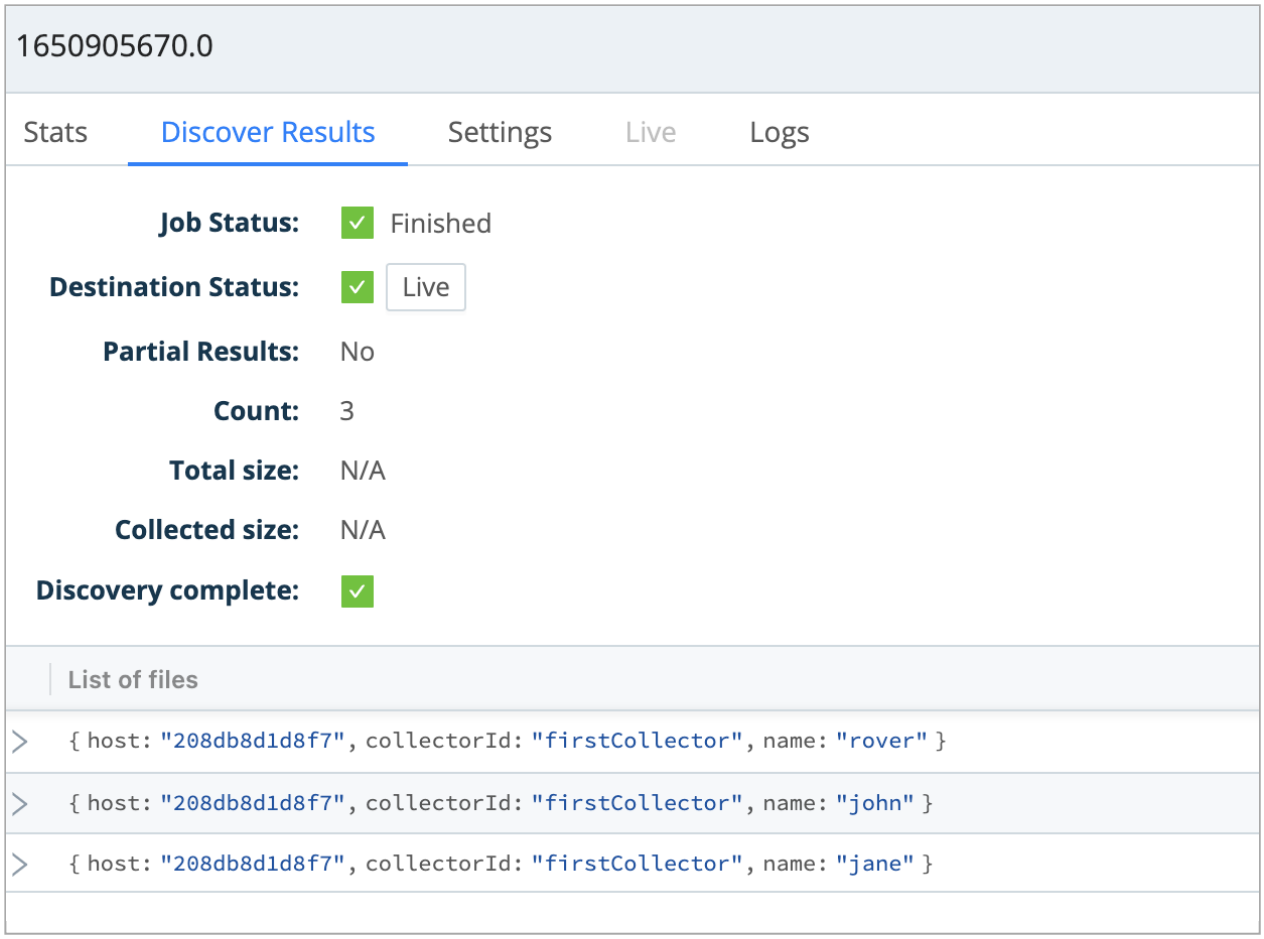

Discover Results

The Collector method separately. invokes each item returned The Collector argument is the content from each row in the table.

8. Click the **Logs** tab to view logs from the run. This is where you can locate anything logged by `job.logger`.

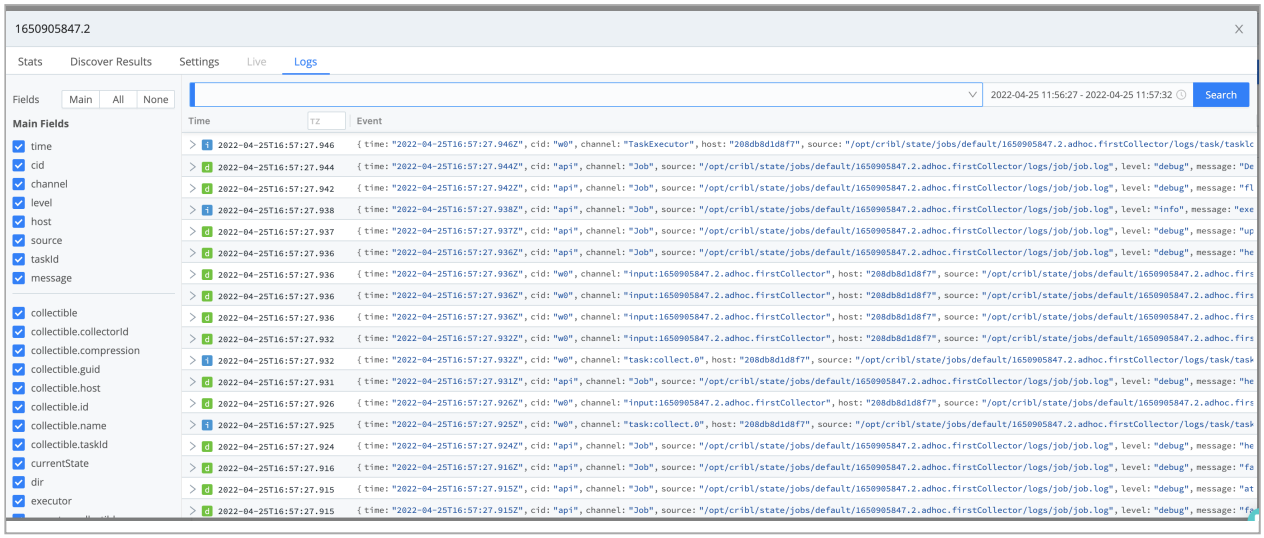

View Logs

The exceptions are anything logged by our Collector in `init`. Notice that `index.js` defined another logger to use when debugging `init`:

```
const logger = C.util.getLogger('myCollector');
```

You can view the relevant Worker Process' logs on the Monitoring page.

Integrate a Third-Party Package

Next, we'll integrate a third-party package to randomly generate names in the Discover method.

1. In your terminal, follow these steps to install npm (Node Package Manager) into the virtual machine running Cribl Stream:
    - `apt update`
    - `apt install npm`
    - When prompted, select a `Region`.
    - When prompted, select a `Timezone`.
2. Run the following commands in your Collector directory:
    - cd `/opt/cribl/local/cribl/collectors/quote_generator`
    - `npm init`: Answer all questions with default answers. The values are not important for our purposes.

- `npm install username-generator --save`

This will install the third-party username-generator package in `/opt/cribl/local/cribl/collectors/quote_generator/node_modules`.

3. Next, update the Collector's `index.js` with the following content, to use this new package to auto-generate names:

```
exports.name = 'Quote Generator';
exports.version = '0.1';
exports.disabled = false;
exports.destroyable = false;

const UsernameGenerator = require('username-generator');
const Readable = require('stream').Readable;
const os = require('os');
const host = os.hostname();
const logger = C.util.getLogger('myCollector'); // For use in debugging init,
search worker logs for channel 'myCollector'

let conf;
let batchSize;
let filter;
let autoGenerate = false;
let numNames = 0;
let names;

exports.init = async (opts) => {
  conf = opts.conf;
  //logger.info('INIT conf', { conf });
  batchSize = conf.maxBatchSize || 10;
  filter = conf.filter || 'true';
  autoGenerate = conf.autoGenerateNames
  names = conf.names || [];
  numNames = conf.numNames ?? 3;
  //logger.info('INIT VALUES', { autoGenerate, names, numNames });
  return Promise.resolve();
};

exports.discover = async (job) => {
  if (autoGenerate) {
    // Auto generate usernames using 3rd party package.
    names = [];
    for (let i = 0; i < numNames; i++) {
      names.push(UsernameGenerator.generateUsername('_'));
    }
    job.logger().info('Successfully generated usernames', { numGenerated:
names.length });
  }
  for (let i = 0; i < names.length; i++) {
    job.addResult({"name": names[i]});
  }
}

exports.collect = async (collectible, job) => {
  job.logger().info('Enter collect', { collectible });
  const quote = "Carpe Diem!"; // Hard coded quote for now.

  // Must return a readable stream from the collect method. Here we are
returning
  // the result string wrapped in a Readable.
  const s = new Readable();
  s.push(JSON.stringify({ host, name: collectible.name, quote }));
  s.push(null);

  // Return readable to stream collected data
```

```
  return Promise.resolve(s)
};
```

4. Now, in Cribl Stream's UI, update the existing Collector to use the auto-generate feature. Add these settings, then click **Save**:

   - **Auto generate names**: `Yes`
   - **Num names:** `10`

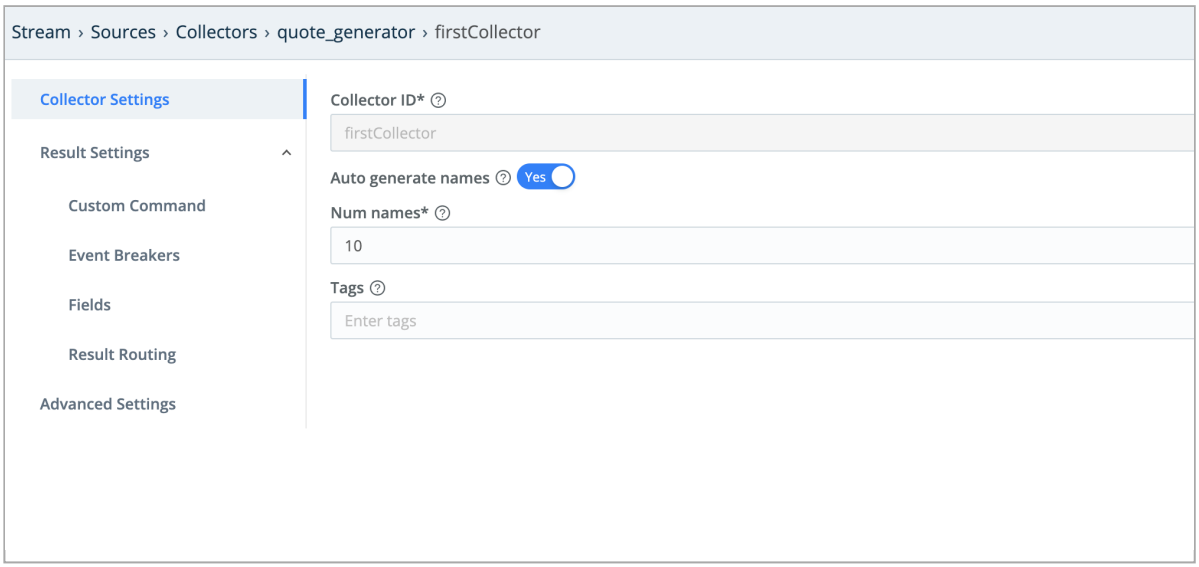

Update Existing Collector

5. Run the Collector, notice that 10 Events are now displayed and each username is randomized:

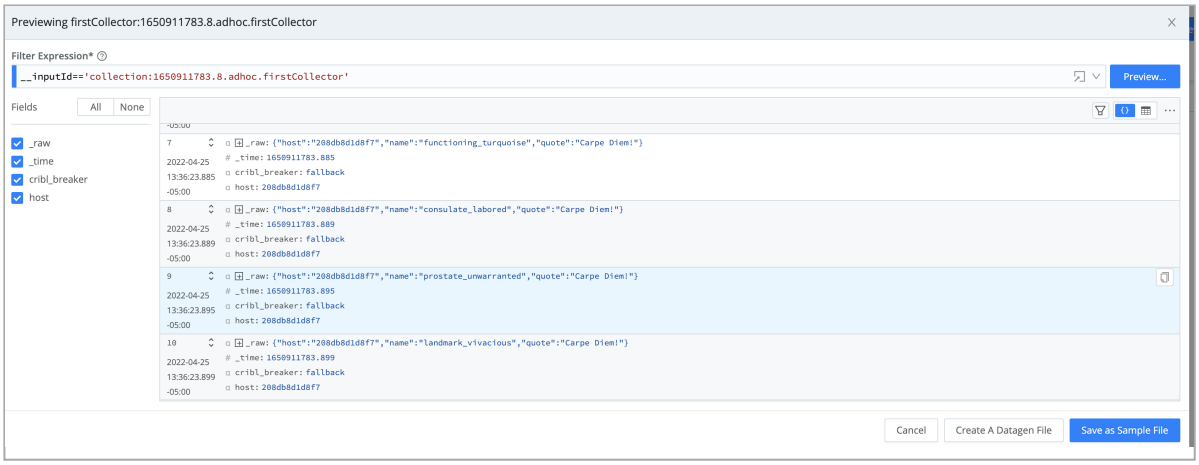

Update Existing Collector

6. Next, update the Collector's `index.js` with the following content to create a static list of random quotes in the Collect method. You can optionally retrieve a random quote from a REST API instead.

```
exports.name = 'Quote Generator';
exports.version = '0.1';
exports.disabled = false;
exports.destroyable = false;

const UsernameGenerator = require('username-generator');
const Readable = require('stream').Readable;
const os = require('os');
const host = os.hostname();
const { httpSearch, isHttp200, RestVerb } = C.internal.HttpUtils;

const logger = C.util.getLogger('myCollector'); // For use in debugging init,
search worker logs for channel 'myCollector'

// Quotes to randomize
const quotes = [
  "Spread love everywhere you go. Let no one ever come to you without leaving
happier. -Mother Teresa",
  "When you reach the end of your rope, tie a knot in it and hang on. -Franklin
D. Roosevelt",
  "Always remember that you are absolutely unique. Just like everyone else. -
Margaret Mead",
  "Don't judge each day by the harvest you reap but by the seeds that you plant.
-Robert Louis Stevenson",
  "The future belongs to those who believe in the beauty of their dreams. -
Eleanor Roosevelt",
  "Tell me and I forget. Teach me and I remember. Involve me and I learn. -
Benjamin Franklin",
  "The best and most beautiful things in the world cannot be seen or even
touched - they must be felt with the heart. -Helen Keller",
  "It is during our darkest moments that we must focus to see the light. -
Aristotle",
  "Whoever is happy will make others happy too. -Anne Frank",
  "Do not go where the path may lead, go instead where there is no path and
leave a trail. -Ralph Waldo Emerson",
  "You will face many defeats in life, but never let yourself be defeated. -Maya
Angelou",
  "The greatest glory in living lies not in never falling, but in rising every
time we fall. -Nelson Mandela",
  "In the end, it's not the years in your life that count. It's the life in your
years. -Abraham Lincoln",
  "Never let the fear of striking out keep you from playing the game. -Babe
Ruth",
  "Life is either a daring adventure or nothing at all. -Helen Keller",
  "Many of life's failures are people who did not realize how close they were to
success when they gave up. -Thomas A. Edison",
  "You have brains in your head. You have feet in your shoes. You can steer
yourself any direction you choose. -Dr. Seuss",
  "If life were predictable it would cease to be life and be without flavor. -
Eleanor Roosevelt",
  "In the end, it's not the years in your life that count. It's the life in your
years. -Abraham Lincoln",
  "Life is a succession of lessons which must be lived to be understood. -Ralph
Waldo Emerson",
  "You will face many defeats in life, but never let yourself be defeated. -Maya
Angelou",
]

let conf;
```

```
let batchSize;
let filter;
let autoGenerate = false;
let numNames = 0;
let names;

exports.init = async (opts) => {
  conf = opts.conf;
  //logger.info('INIT conf', { conf });
  batchSize = conf.maxBatchSize || 10;
  filter = conf.filter || 'true';
  autoGenerate = conf.autoGenerateNames
  names = conf.names || [];
  numNames = conf.numNames ?? 3;
  //logger.info('INIT VALUES', { autoGenerate, names, numNames });
  return Promise.resolve();
};

exports.discover = async (job) => {
  if (autoGenerate) {
    // Auto generate usernames using 3rd party package.
    names = [];
    for (let i = 0; i < numNames; i++) {
      names.push(UsernameGenerator.generateUsername('_'));
    }
    job.logger().info('Successfully generated usernames', { numGenerated:
names.length });
  }
  for (let i = 0; i < names.length; i++) {
    await job.addResult({"name": names[i]});
  }
}

exports.collect = async (collectible, job) => {
  const quote = quotes[Math.trunc(Math.random()*100)%quotes.length];
  // Must return a readable stream from the collect method. Here we are
returning
  // the result string wrapped in a Readable.
  const result = { host, name: collectible.name, quote };
  job.logger().info('collect returning quote', { collectible, quote });
  const s = new Readable();
  s.push(JSON.stringify(result));
  s.push(null);

  // Return readable to stream collected data
  return Promise.resolve(s)
};
```

7. Run the Collector to randomly retrieve the quotes from the list:

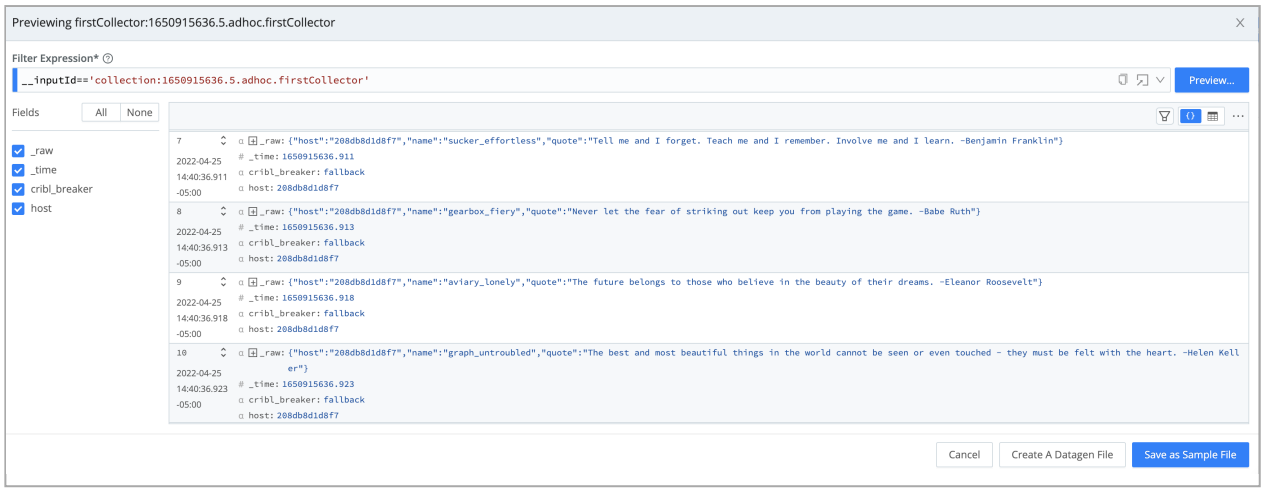

Run the Collector

8. In the next few steps, you'll back up the files, by opening a shell window on your local machine and running the indicated commands.

9. List Docker containers by running `docker ps`, as shown here:

```
$ docker ps
CONTAINER ID   IMAGE                  COMMAND                  CREATED
STATUS         PORTS                    NAMES
208db8d1d8f7   cribl/cribl:latest   "/sbin/entrypoint.sh…"   6 hours ago   Up 6
hours   0.0.0.0:19000->9000/tcp   serene_galileo
```

   In this example, the **Container ID** is 208db8d1d8f7. You'd paste this into the next commands.

10. Run: `docker exec -it 208db8d1d8f7 tar cvzf /tmp/container_source.tgz /opt/cribl/local/cribl/collectors/quote_generator`

11. Run: `docker cp 208db8d1d8f7:/tmp/container_source.tgz`

    You can locate the archive file containing the source code in the current directory. After you back up the source code, it is safe to shut down the Docker container.

Building a Collector (Distributed Environment)

When you create a Collector in a distributed environment, the directory path is slightly different from the single–instance example above. E.g., for the `default group`, you should create Collectors on the Leader Node in the directory: `opt/cribl/groups/default/local/cribl/collectors`.

The format of the path is: `/opt/cribl/groups/<workerGroup>/local/cribl/collectors`

For example, assuming you want to create a new Collector in group is `myGroup`, the path would be: `/opt/cribl/groups/myGroup/local/cribl/collectors`.

You'd proceed as follows:

1. Connect to the Leader Node.
2. `cd $CRIBL_INSTALL/groups/default/local/cribl`

   `$CRIBL_INSTALL` refers to the directory where Stream is running, e.g.: `/opt/cribl`
3. `mkdir collectors`
4. `cd collectors`
5. `mkdir quote_generator`
6. `cd quote_generator`
7. `cp ../../../../default/cribl/collectors/script/* .`

Building the Collector in a distributed environment works the same as in single-instance environment with exception of a few differences:

1. You must add the files to a Worker–Group directory, as described above.
2. You must commit and deploy changes to the Workers.

Given the extra steps, we recommend that you first build the Collector in a standalone environment, before deploying it to a distributed environment.

14.7. Securing Cribl Stream

14.7.1. AWS Cross-Account Data Collection

Cribl uses multiple AWS accounts for different purposes, including our public Cribl Cloud service (deployment details here). We built our account strategy from the ground up using the AWS Control Tower framework, as summarized in our Logging in a Multi-Account AWS Environment blog post.

However, some organizations use a legacy account structure that doesn't consolidate logs to a single account. This creates a challenge in collecting data or logs from peer accounts, as permission boundaries now need to be crossed. Whether you need to collect data from, or write data to, another account, the `AssumeRole` permission allows for cross-account access without the need to generate static IAM keys.

AssumeRole Example

A usage example is a central logging account that has access to other organization accounts to consume logs, but not to perform other actions. Let's say we have two AWS accounts, A and B. We want account A to be able to access resources in account B. We can build a policy inside account B that allows permissions to access the target resources. We can then specify, in account B, that we trust account A to be allowed to use this role. The diagram below illustrates how the `AssumeRole` action permits the Trusted Account (A) access to resources in the Trusting Account (B).

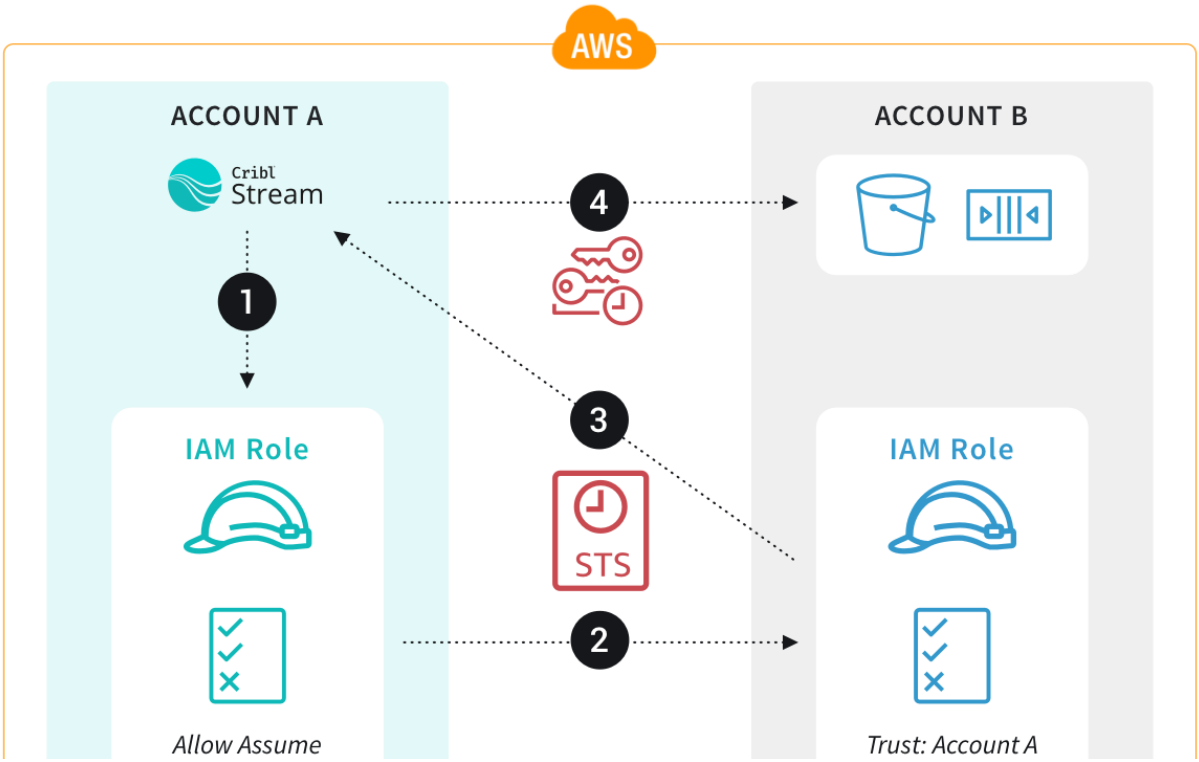

Using STS and temporary credentials to access an S3 bucket and SQS queue across accounts

Here's how Cribl Stream would work with `AssumeRole` permissions inside AWS:

1. The Cribl Stream Worker has an EC2 instance role attached.
2. The IAM role in Account A permits the EC2 instance to assume the role in Account B (and Account B trusts Account A).
3. Temporary IAM credentials are returned to the EC2 instance.
4. Cribl Stream uses the temporary IAM credentials to access the resources in Account B.

> Since this guide's original publication, we've updated `logstream` to `cribl-stream` in example ARNs below, to match our renamed product.

Configure IAM AssumeRole Permissions

First, in account A, we build a policy that allows only the ability to assume the role inside account B. This policy restricts users from being able to access any resources that they don't need to see. We can also revoke this trust relationship at any time, without having to worry about an account still having keys and (therefore) access to the data.

In our example, we want to access VPC Flow logs inside an S3 bucket in account B (ID 222222222222) from account A (ID 111111111111). We'll start building the two policies in account B, and then move to account A.

Account B Configuration

In account B, we build a policy to enable access to the S3 bucket (`vpc-flow-logs-for-cribl`) with the least privileges required for Cribl Stream. This policy is the one that changes depending on what you need to accomplish – e.g., reading from an S3 bucket, writing to Kinesis Streams, etc.

```
{
 "Version": "2012-10-17",
 "Statement": [
   {
     "Effect": "Allow",
     "Action": "s3:GetObject",
     "Resource": "arn:aws:s3:::vpc-flow-logs-for-cribl/*"
   },
   {
     "Effect": "Allow",
     "Action": "s3:ListBucket",
     "Resource": "arn:aws:s3:::vpc-flow-logs-for-cribl"
   }
 ]
}
```

Next, we need to attach a Trust Relationship to Account B's IAM role to permit the `AssumeRole` action from account A:

```
{
 "Version": "2012-10-17",
 "Statement": [
   {
     "Effect": "Allow",
     "Principal": {
       "AWS": "arn:aws:iam::111111111111:role/account-a-cribl-stream-assumerole-
role"
     },
     "Action": "sts:AssumeRole",
     "Condition": {
       "StringEquals": {
         "sts:ExternalId": "cribl-s3cre3t"
       }
     }
   }
 ]
}
```

If you are creating a Trust Relationship for a Cribl Cloud Worker managed by Cribl, you would instead paste the AWS Worker's role ARN in the format shown below. This option applies only to Cribl-managed Workers, not to hybrid Workers on customer-managed Cribl Stream instances:

```
{
 "Version": "2012-10-17",
 "Statement": [
   {
     "Effect": "Allow",
     "Principal": {
       "AWS": "arn:aws:iam::111111111111:role/main-default"
     },
     "Action": "sts:AssumeRole",
     "Condition": {
       "StringEquals": {
         "sts:ExternalId": "cribl-s3cre3t"
       }
     }
   }
 ]
}
```

Why an External ID Condition in the Trust Policy?

It is important to configure an AWS External ID, especially if you have third parties accessing your AWS accounts. The External ID protects from the confused deputy problem, where a third party obtains access through an intermediary. The External ID is not a password or secret, but it should still be protected from accidental sharing.

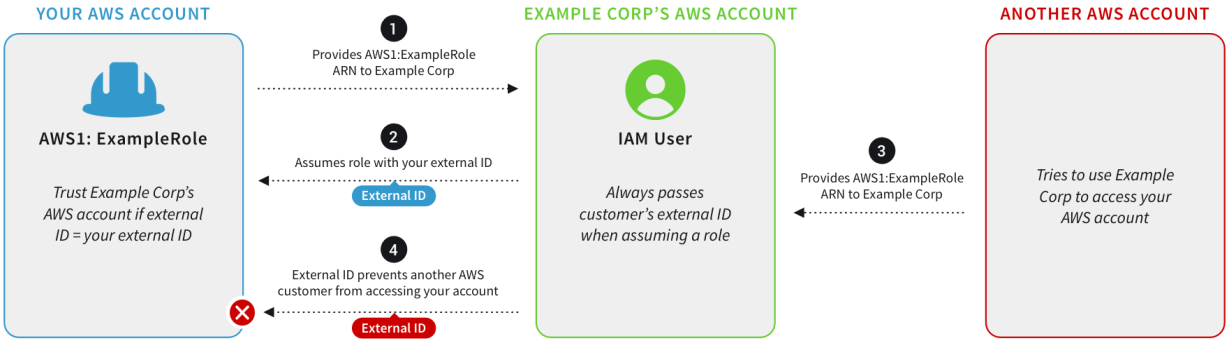

Mitigating the confused deputy vulnerability

Account A Configuration

In account A, we next configure a new IAM role with the following policy.

> If you are creating a Trust Relationship for a Cribl-managed Cribl Cloud Worker, skp this section. Cribl has implicitly preconfigured Account A for you.

For our example, we only want the role to be able to use the `AssumeRole` action, but you can add additional statements to meet your needs:

```
{
 "Version": "2012-10-17",
 "Statement": {
   "Effect": "Allow",
   "Action": "sts:AssumeRole",
   "Resource": "arn:aws:iam::222222222222:role/account-b-cribl-stream-role-to-
assume"
 }
}
```

Since we need our EC2 instance to be able to assume this role, we will configure the Trust Relationship as follows:

```
{
 "Version": "2012-10-17",
 "Statement": [
   {
     "Effect": "Allow",
     "Principal": {
       "Service": "ec2.amazonaws.com"
     },
     "Action": "sts:AssumeRole"
   }
 ]
}
```

Configure Cribl Stream

Now that our `AssumeRole` policies have been built, we can configure Cribl Stream to assume the correct role to access the resources we need. Configure your Source, Collector, or Destination with the appropriate `AssumeRole` ARN and External ID. While this screenshot shows an S3 collector specifically, all AWS sources and destinations support Assume Role functionality.

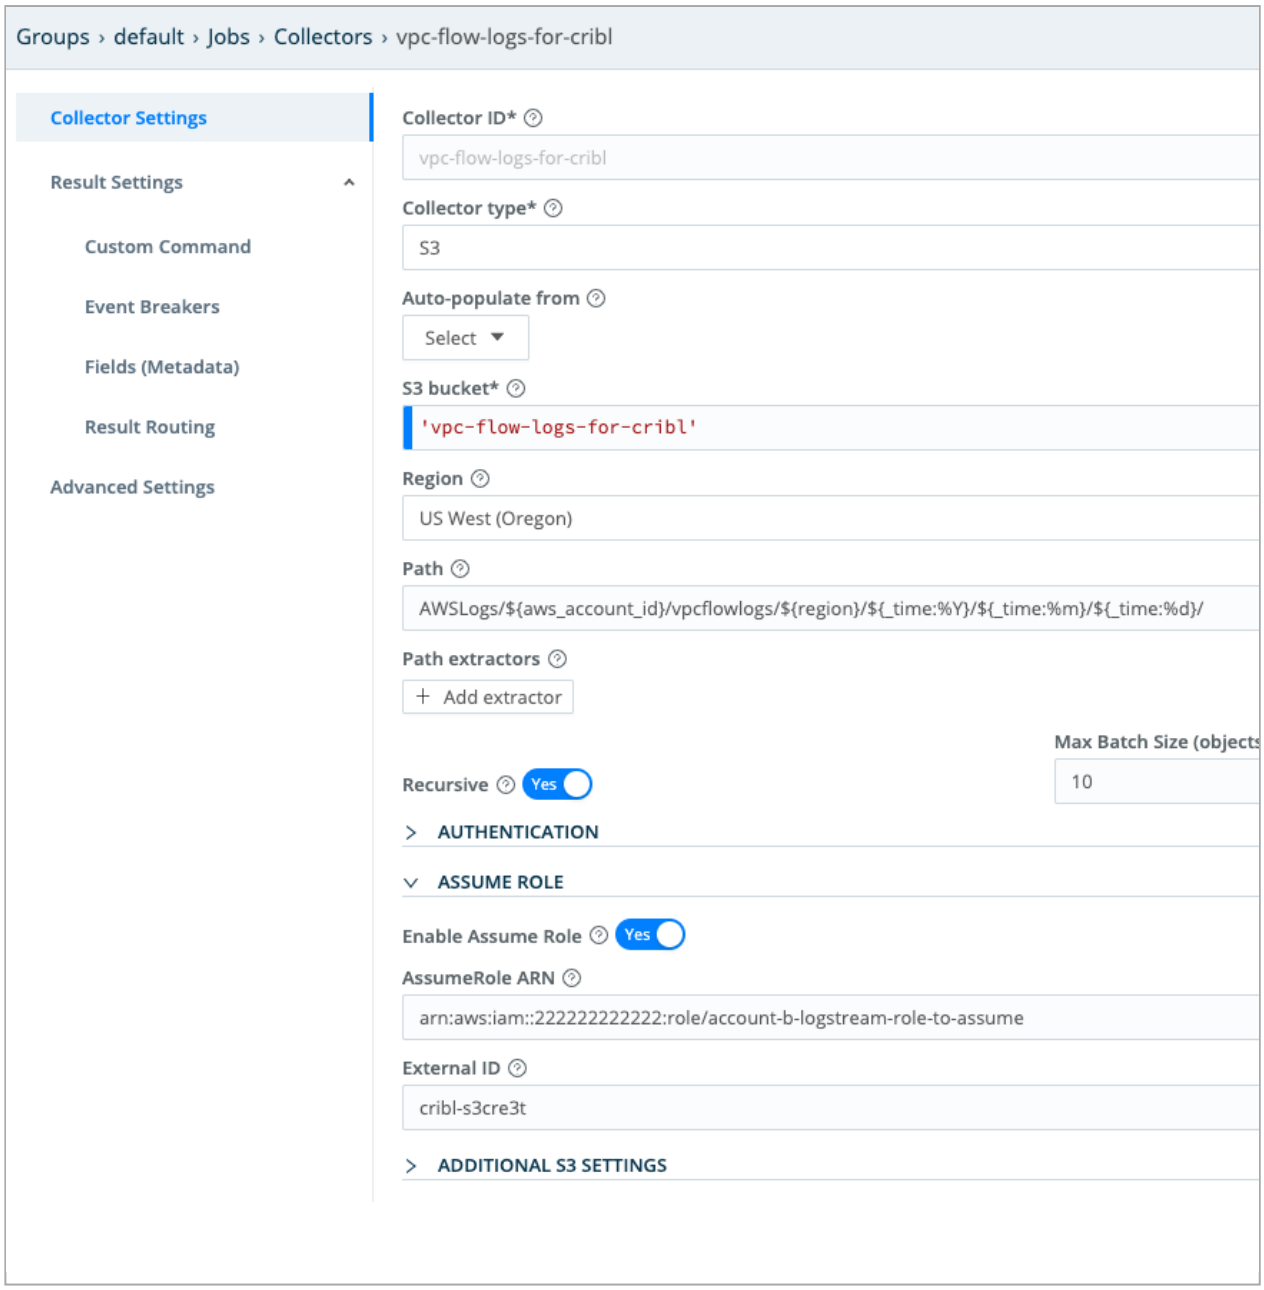

Cribl Stream Assume Role configuration

14.7.2. Encrypting Sensitive Data

Encryption at Ingest-Time and Decryption in Splunk

With Cribl Stream, you can encrypt your sensitive data in real time before it's forwarded to and stored at a destination. Using the out-of-the-box Mask function, you can define patterns to encrypt with specific key IDs or key classes. To decrypt in Splunk, you will need to install Cribl App for Splunk on your search head. (The app will default to `mode-searchhead`.)

Keys and Key Classes

Symmetric encryption keys can be configured through the CLI or the UI. They're used to encrypt the patterns, and users are free to define as many keys as required.

Key classes are collections of keys that can be used to implement multiple levels of access control. Users (or groups of users) that have access to data with encrypted patterns can be associated with key classes. You can use these classes to provide more-granular access rights, such as read versus decryption permissions on a dataset.

Encrypting in Cribl Stream and Decrypting in Splunk

1. Define one or more keys and key classes on Cribl Stream. (See UI- and CLI-based instructions.)
2. Sync `auth` with the decryption side (Splunk Search Head). (The Splunk-side directory is `$SPLUNK_HOME/etc/apps/cribl/local/cribl/auth/`.)
3. Apply the Mask function to patterns of interest, using C.Crypto.encrypt().
4. Decrypt on the Splunk search head, using Role-Based Access Control on the `decrypt` command.

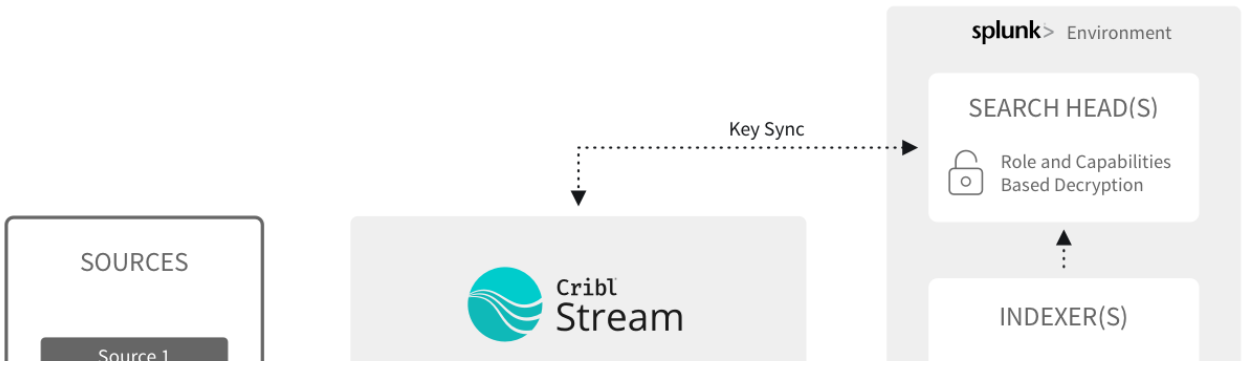

Encrypting in Cribl Stream, decrypting in Splunk

Example

Encryption Side

- Generate keys via the UI, in **Settings** > **Global Settings** > **Security > Encryption Keys**:

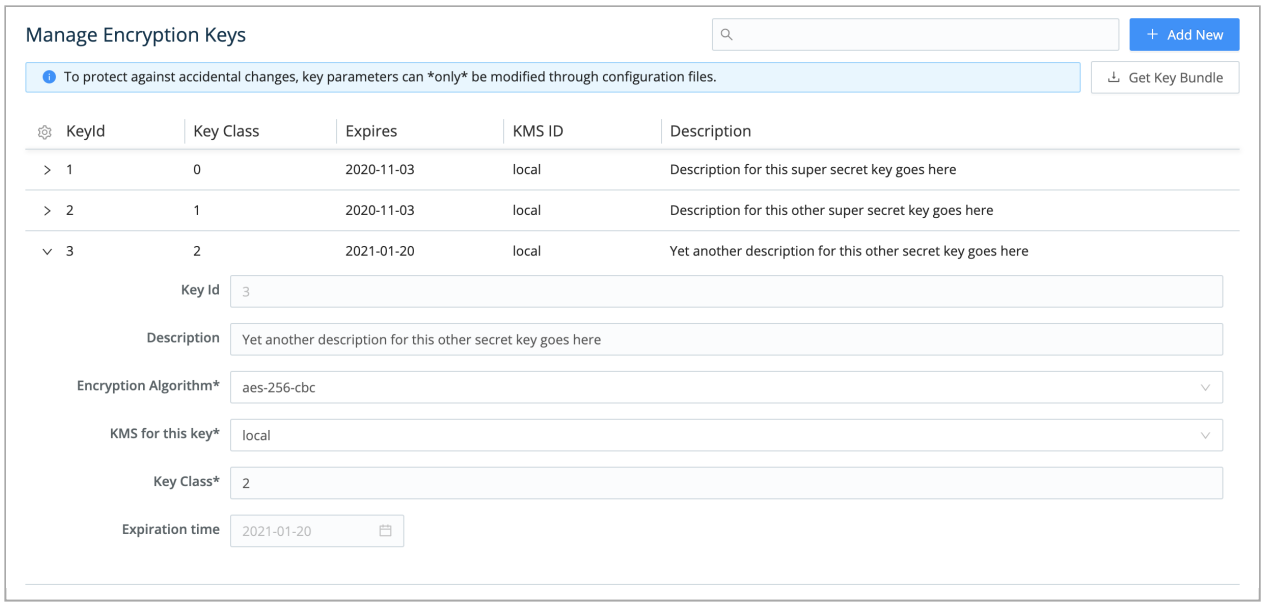

Adding a new encryption key

- Or generate one or more keys via the CLI. In a single-instance deployment:

```
$CRIBL_HOME/bin/cribl keys add -c 1 -i ... $CRIBL_HOME/bin/cribl keys add -c <N> -i
```

In a distributed deployment, to generate keys on a Worker Group named `uk`:

```
$CRIBL_HOME/bin/cribl keys add -c 1 -i -g uk ... $CRIBL_HOME/bin/cribl keys add -c <N> -i -g uk
```

Add `-e <epoch>` to the above commands if you'd like to set expiration for your keys.

For all command/syntax options, see Adding Keys.

Decryption Side

- Download the Cribl Stream App for Splunk from Cribl's Download Cribl Stream page: In the **On Prem** section, select the Splunk app from the drop-down list, as shown. Clicking the orange button downloads a file named: `cribl-splunk-app-<version-#>-<hash-#>-linux-x64.tgz`.

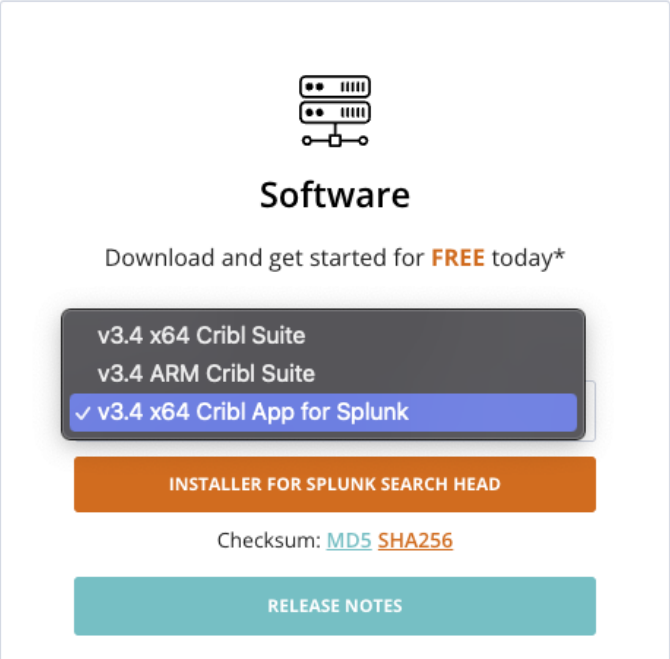

Downloading Cribl's Splunk app

- To install the Cribl Stream App for Splunk on your search head, untar the package into your `$SPLUNK_HOME/etc/apps` directory. The app will default to `mode-searchhead`.
- Assign permissions to the `decrypt` command, per your requirements.
- Assign capabilities to your Roles, per your requirements. Capability names should follow the format `cribl_keyclass_N`, where `N` is the Cribl Key Class. For example, a role with capability `cribl_keyclass_1` has access to all key IDs associated with key class `1`. You can use more capabilities, as long as they follow this naming convention.

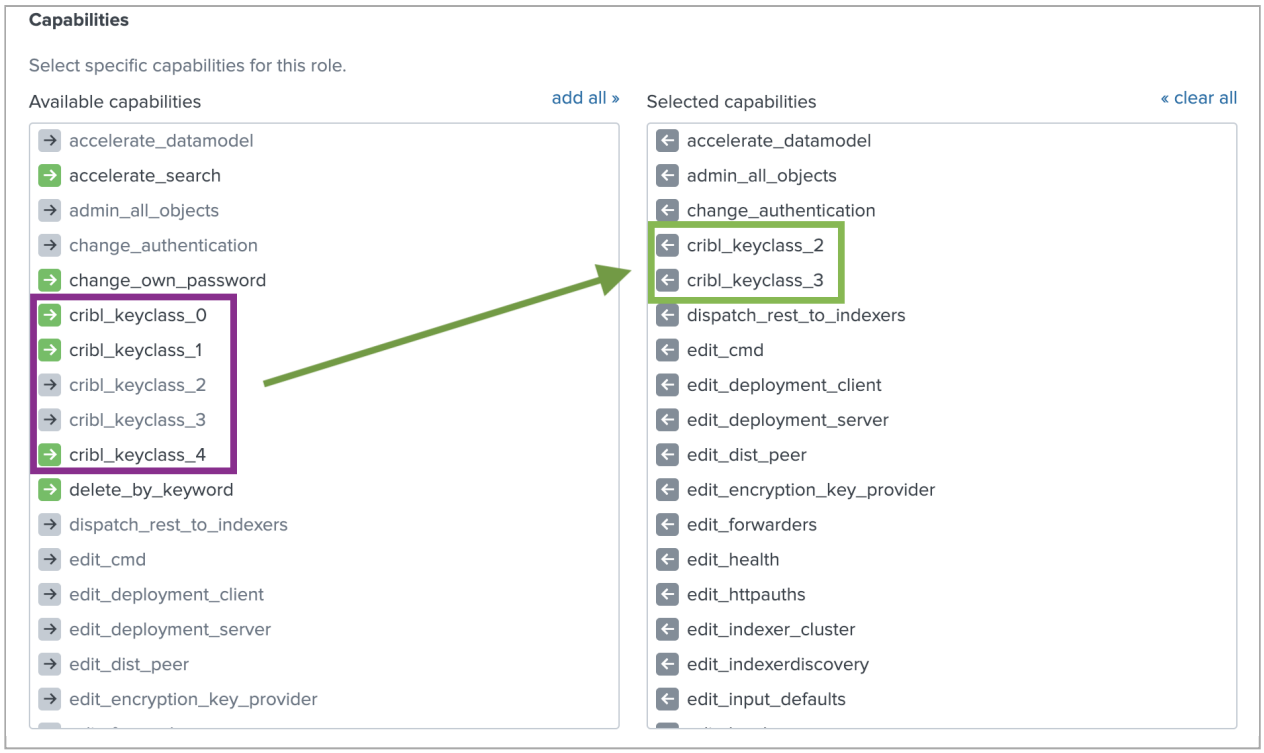

Selecting capabiities

- In the `$SPLUNK_HOME/etc/apps/cribl/local/cribl/auth/` directory, sync `cribl.secret` | `keys.json`. (To successfully decrypt data, the `decrypt` command will need access to the same keys that were used to encrypt, **in the Cribl instance where encryption happened**.)
    - In a single-instance deployment, the `cribl.secret` and `keys.json` files reside in: `$CRIBL_HOME/local/cribl/auth/`.
    - In a distributed deployment, these files reside on the Leader Node in: `$CRIBL_HOME/groups/<group-name>/local/cribl/auth/`.
    - When using Cribl Stream's UI, you can download these files by clicking the **Get Key Bundle** button.

  Sync/copy these files over to their counterparts on the search head (decryption side). In a non-Splunk integration, you would copy these assets to wherever decryption will take place.

> **Modifying Keys**
>
> When you update keys by editing the `keys.json` file, you must add them back to the directories above (respectively, on a single instance or on a distributed deployment's Leader Node).

Usage

Before Encryption: Sample un-encrypted events. Notice the values of `fieldA` and `fieldB`.

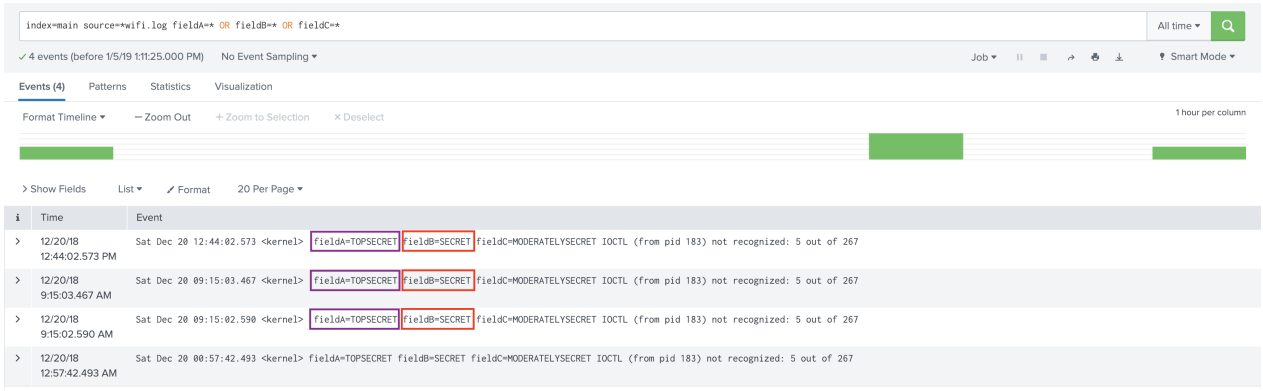

Events before encryption

Next, encrypt `fieldA` values with key class `1`, and `fieldB` with key class `2`.

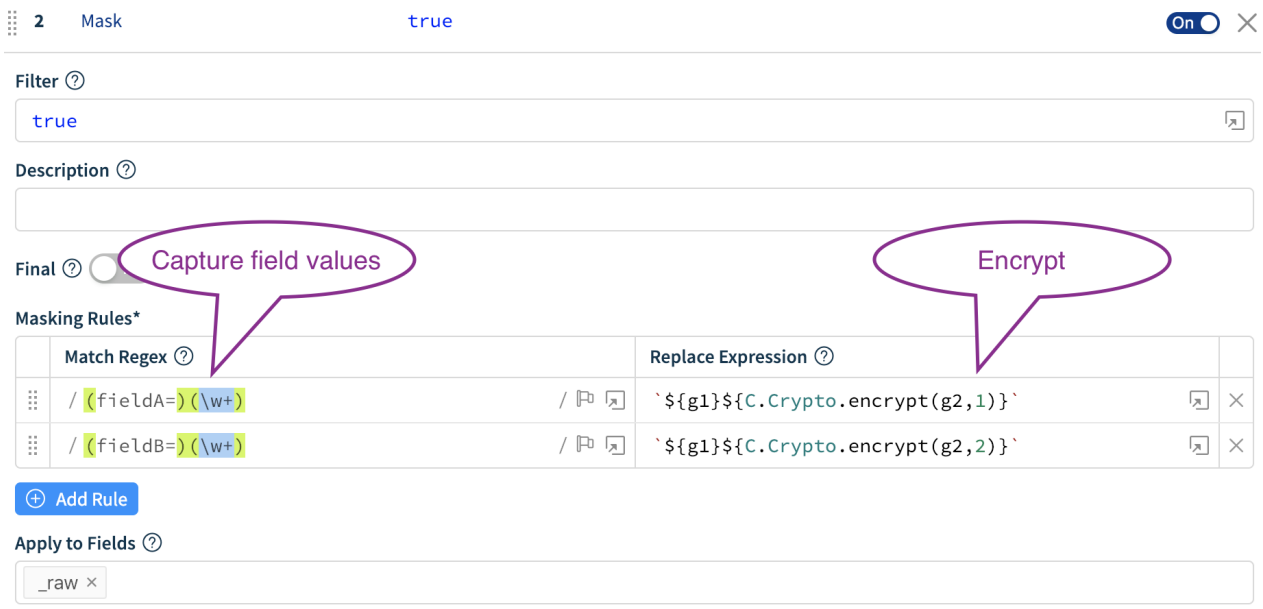

Encrypting two fields with separate key classes

After Encryption: again, notice the values of `fieldA` and `fieldB`.

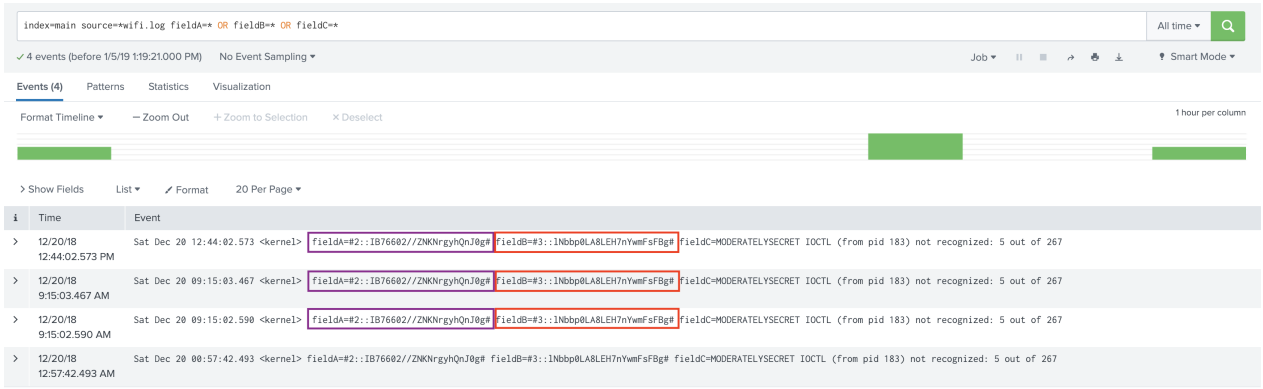

Both fields encrypted

Here, we've decrypted `fieldB` but not `fieldA`. This is because the logged-in user has been assigned the capability `cribl_keyclass_2`, but not `cribl_keyclass_1`.

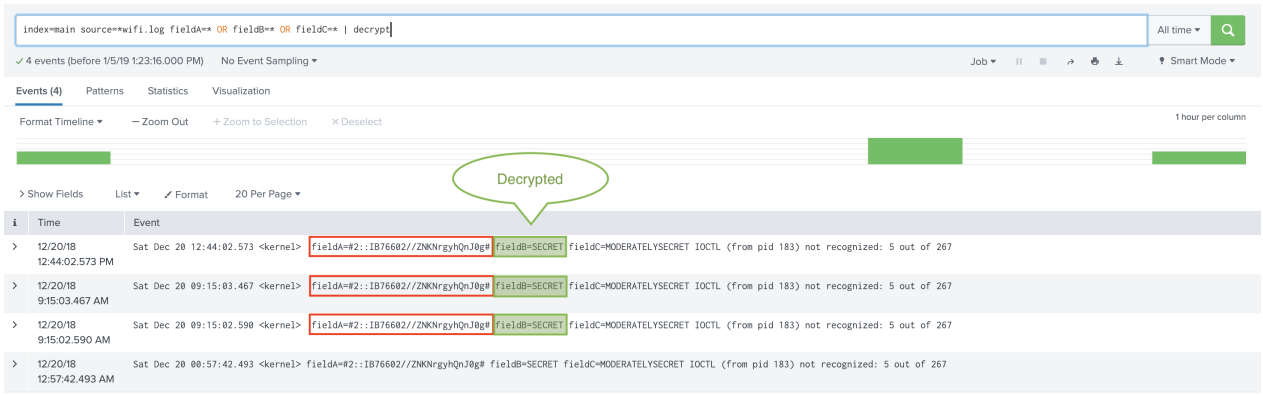

One field decrypted

14.7.3. SELinux Configuration

This page explains how to make Cribl Stream work correctly with SELinux in **enforcing mode**.

If you're unsure about SELinux and its modes, here's some background:

- Security-Enhanced Linux (SELinux) is a mandatory access control (MAC) security mechanism implemented in the kernel. (Source: CentOS Wiki.)
- SELinux defines access controls for the applications, processes, and files on a system. It uses security policies, which are a set of rules that tell SELinux what can or can't be accessed, to enforce the access allowed by a policy. (Source: Red Hat.)
- Processes and files are labeled with an **SELinux context** that contains additional information, such as an SELinux user, role, type, and, optionally, a level. When running SELinux, all of this information is used to make access control decisions. (Source: Red Hat.)
- SELinux has two modes, **enforcing** and **permissive**. When running in enforcing mode, SELinux enforces the SELinux policy and denies access based on SELinux policy rules. (Source: Red Hat.)

SELinux and Cribl Stream

Cribl Stream is typically used for in-stream processing, where the processes and files that Cribl Stream Workers need to access are known beforehand. This makes it easy to write an SELinux policy that's relatively restrictive of processes and files.

For network ports, though, the policy should be more permissive, because users can configure those within the UI.

SELinux Troubleshooting

SELinux problems usually surface when you try to start the Cribl Stream service. Users immediately receive an error like the following:

Cribl Stream fails to start

```
Job for cribl.service failed because the control process exited with error code.
See "systemctl status cribl.service" and "journalctl -xe" for details.
```

One indication that the problem is in SELinux configuration, not in the Cribl Stream service itself, is when (1) nothing has been logged in `$CRIBL_HOME/log/cribl.log`, and (2), when you run `journalctl -xe` you see errors like the following:

Errors from journalctl -xe

```
cribl.service: Failed to execute command: Permission denied
cribl.service: Failed at step EXEC spawning /opt/cribl/bin/cribl: Permission denied

cribl.service: Control process exited, code=exited status=203
cribl.service: Failed to execute command: No such file or directory
cribl.service: Failed at step EXEC spawning /bin/rm -f /opt/cribl/pid/cribl.pid:
Permission denied
```

You can confirm that SELinux configuration is the issue by verifying that the Cribl Stream service is able to start up on its own. To do this, run the `cribl start` command.

Here are three commands that you can think of as a basic SELinux troubleshooting toolkit:

- `getenforce` verifies that SELinux is enabled and enforcing policy.
- `sestatus -v` shows details of the SELinux policy that's in effect.
- `ls` with the `-Z` or `--context` option shows the SELinux tags on files and/or folders. In the output, the fifth column reports the SELinux context in the form `user:role:type:level`.

Example Problem

Suppose you run `ls -lZ /opt/cribl` to see the SElinux context for `/opt/cribl`.

If the output looks like the following, there is a problem: the presence of "home" among the `type` part of the Linux context. In this case, `user_home_t` is the offending type. When the type is `user_home_t` or `admin_home_t`, SELinux will not permit the service to read, write, or execute files.

Problematic SELinux context output

```
$ ls -laZ /opt/cribl
total 0
drwxr-xr-x. 6 cribl cribl unconfined_u:object_r:user_home_t:s0  62 Feb 16 08:31 .
drwxr-xr-x. 3 root  root  system_u:object_r:usr_t:s0            19 Feb 16 19:54 ..
drwxr-xr-x. 2 cribl cribl unconfined_u:object_r:user_home_t:s0 202 Feb 16 08:31 bin
drwxr-xr-x. 5 cribl cribl unconfined_u:object_r:user_home_t:s0  49 Feb 16 08:20 data
drwxr-xr-x. 6 cribl cribl unconfined_u:object_r:user_home_t:s0  59 Feb 16 08:31
default
drwxr-xr-x. 3 cribl cribl unconfined_u:object_r:user_home_t:s0  22 Feb 16 08:31
thirdparty
```

Example Solution

To fix the labeling, download Cribl Stream again directly to `/opt`. **Do not** download Cribl Stream to a user's home directory, or to root (`/`), and then move it to `/opt` - that was what caused our example problem.

Downloading Cribl Stream to /opt

```
curl -Lso - $(curl -s https://cdn.cribl.io/dl/latest) | sudo tar zxvf - -C /opt
```

A simpler option is to revert the labels using restorecon, an SELinux policy utility that's in the `policycoreutils-python-utils` package.

Reverting labels with restorecon

```
restorecon -R -v /opt/cribl
systemctl restart cribl
```

Once you correct the problem, the output will look like the following. Instead of `*home_t` listings in the `type` field, this SELinux context has `usr_t`, a type that will satisfy SELinux's criteria for allowing the service to read, write, and execute files.

Corrected SELinux context output

```
# ls -laZ /opt/cribl
total 0
drwxr-xr-x. 6 cribl cribl unconfined_u:object_r:usr_t:s0  62 Feb 16 08:31 .
drwxr-xr-x. 3 root  root  system_u:object_r:usr_t:s0      19 Feb 16 20:05 ..
drwxr-xr-x. 2 cribl cribl unconfined_u:object_r:usr_t:s0 202 Feb 16 08:31 bin
drwxr-xr-x. 5 cribl cribl unconfined_u:object_r:usr_t:s0  49 Feb 16 08:20 data
drwxr-xr-x. 6 cribl cribl unconfined_u:object_r:usr_t:s0  59 Feb 16 08:31 default
drwxr-xr-x. 3 cribl cribl unconfined_u:object_r:usr_t:s0  22 Feb 16 08:31 thirdparty
```

15. Setup Guides

The following topics provide expanded configuration options for selected Cribl Stream integrations (Collectors, Sources, Destinations, and Notifications):

- Cribl Edge to Cribl Stream
- Configuring Upstream Logging Agents
- Azure AD + OpenID Configuration
- Azure Sentinel Integration
- Azure Event Hubs Integrations
- Azure Sentinel Integration
- BigPanda/Webhook Integration
- Splunk Cloud and BYOL Integrations
- Sumo Logic/Webhook Integration
- Configuring WEF for Cribl Stream
- Zscaler NSS Integration

15.1. Cribl Edge to Cribl Stream

Cribl Edge automatically discovers logs, metrics, application data, etc. – in real time – from your configured endpoints, and delivers them to Cribl Stream or any supported destination. Meanwhile, Cribl Stream can help collect, reduce, enrich, transform, and route data from Cribl Edge to any destination. And using a Cribl TCP Source, you can collect and route data from Edge Nodes to Stream Worker Nodes connected to the same Leader, without incurring additional cost.

This guide outlines how to route data from an Edge Node (or an entire Fleet) to an existing Stream Worker Group for additional processing. We will walk you through the following:

- Configure Cribl TCP Source on Cribl Stream to receive data from the Edge Node.
- Configure the Exec Source on Cribl Edge to collect data on the Edge Node.
- Configure the Cribl TCP Destination on Cribl Edge to send data to Cribl Stream.
- Configure a Route to Send the Data.

And finally, we will confirm the data flow.

> While this use case connects Edge Nodes to Workers through the Cribl TCP Source and Destination, you can also use the Cribl HTTP Source and Destination in certain circumstances – such as when a firewall or proxy blocks raw TCP egress.

Configure the Cribl TCP Source on Cribl Stream

In Cribl Stream, start by configuring and enabling a Cribl TCP Source. The key requirement here is to set the Port to listen on. By default, the Cribl TCP Destinations listen on Port `10300`. To simplify our scenario, we will set the Cribl TCP Source to listen on the same Port. (Optionally, you can also configure TLS, Event Breakers, metadata fields, and/or a pre-processing Pipeline.)

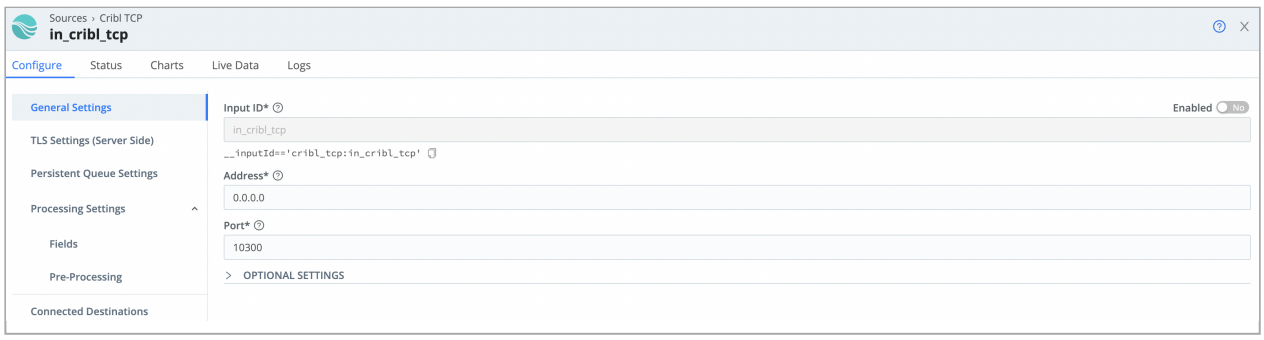

When done, **Commit** and **Deploy** your changes. Before moving on to the next step, confirm that your Source is healthy.

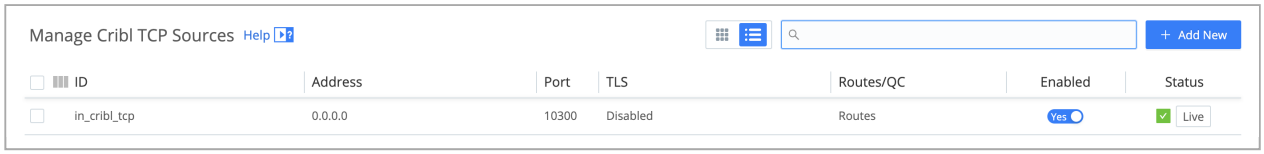

Status of the Cribl TCP Source

> On Cribl-managed Cribl.Cloud Worker/Edge Nodes, make sure that TLS is either disabled on both the Cribl TCP Source and the Cribl TCP Destination it's receiving data from, or enabled on both. Otherwise, no data will flow. In the Source, TLS is enabled by default.

Configure the Exec Source on Cribl Edge

Next, we'll configure the Exec Source on your Edge Node. This Source will break the incoming streams of data into discrete events, and send them to Cribl Stream.

> In this step, you can swap out the Exec Source by instead configuring a System Metrics or File Monitor Source. Or, configure multiple Sources to connect to the same Destination.

The Exec Source enables you to periodically execute a command and collect its `stdout` output. In the Exec Source's configuration modal, specify:

- Which command to execute.
- The number of times to attempt running the command.
- The interval between attempts.

In our example, we are running the `ps` command to list and retrieve running processes every `10` seconds.

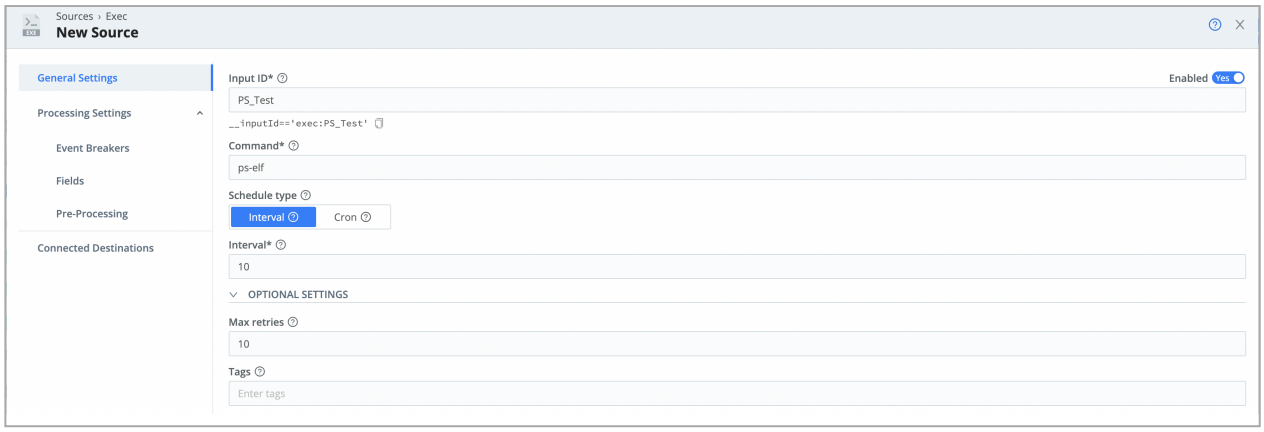

Configuring an Exec Source

If we don't configure an Event Breaker, then with each capture we run on the dataset, each process will be ingested as its own event, without the header information. So to structure the data, we'll add an Event Breaker.

On the Exec Source configuration modal's left tab, select **Event Breaker**. In the **Event Breaker rulesets** drop-down, select `Cribl – Do Not Break Ruleset.`

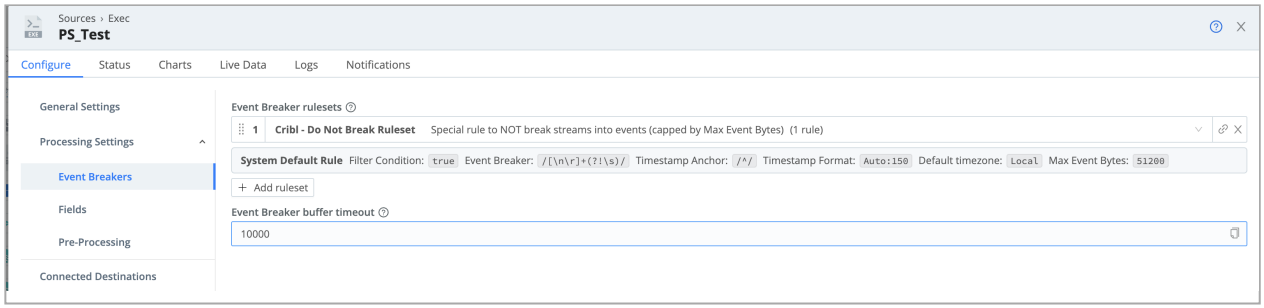

Apply an Event Breaker

Next, preview your data on the modal's **Live Data** tab.

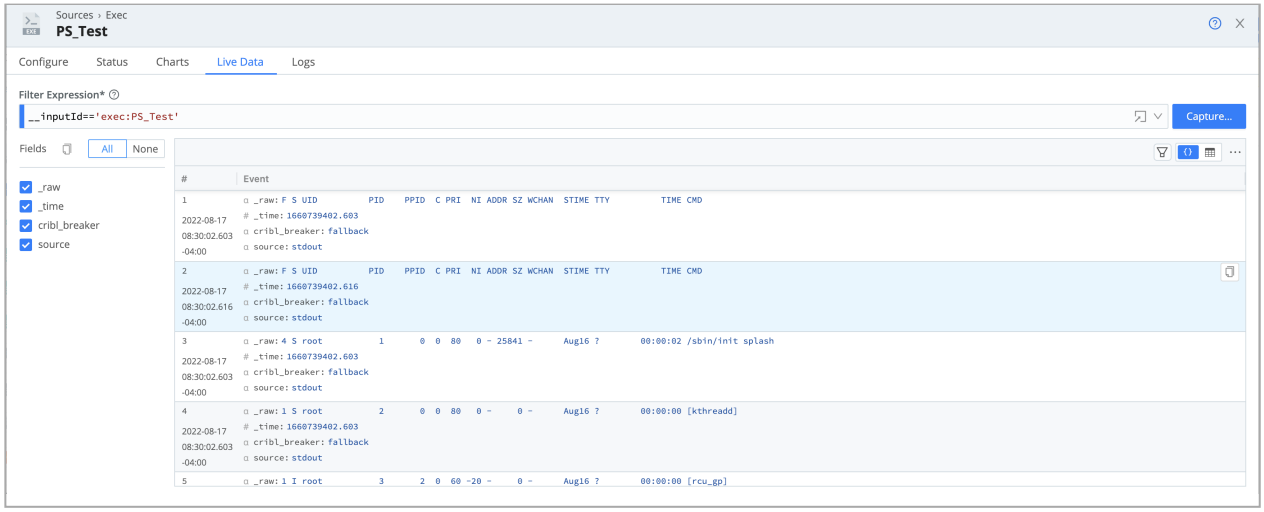

Configure the Cribl TCP Destination on Cribl Edge

To get the data flowing, we'll configure the Cribl TCP Destination on your Edge Node. A few things to note when configuring this Destination:

- Set the Port to listen on. For this example, we'll use the default `10300`. If you configure a different Port, make sure the Source points to the same Address and Port.
- If you don't have a load balancer in front of your Workers, you can configure load balancing directly on this Destination.
- Optionally, define your **Compression**, **Throttling**, and **Backpressure behavior** requirements.
- On Cribl-managed Cribl.Cloud Worker/Edge Nodes, make sure that TLS is either disabled on both the Cribl TCP Destination and the Cribl TCP Source it's sending data to, or enabled on both. Otherwise, no data will flow. In the Destination, TLS is disabled by default.

Once you've configured your Destination, test it to verify that your Edge Node can communicate with the Stream Worker Group.

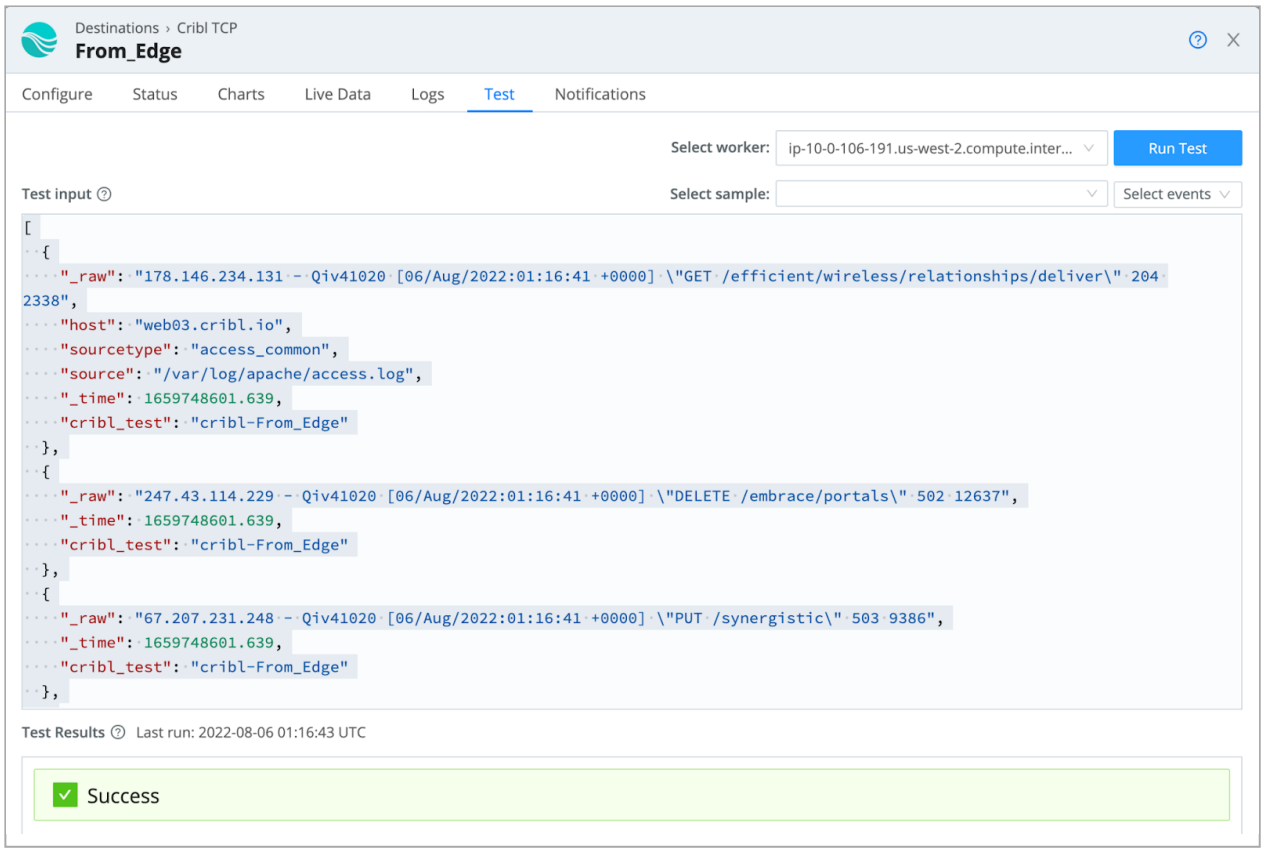

Testing your Destination

Configure a Route to Send the Data

Finally, configure a Route to send your data to Cribl Stream. In this example, we are using the `passthru` Pipeline.

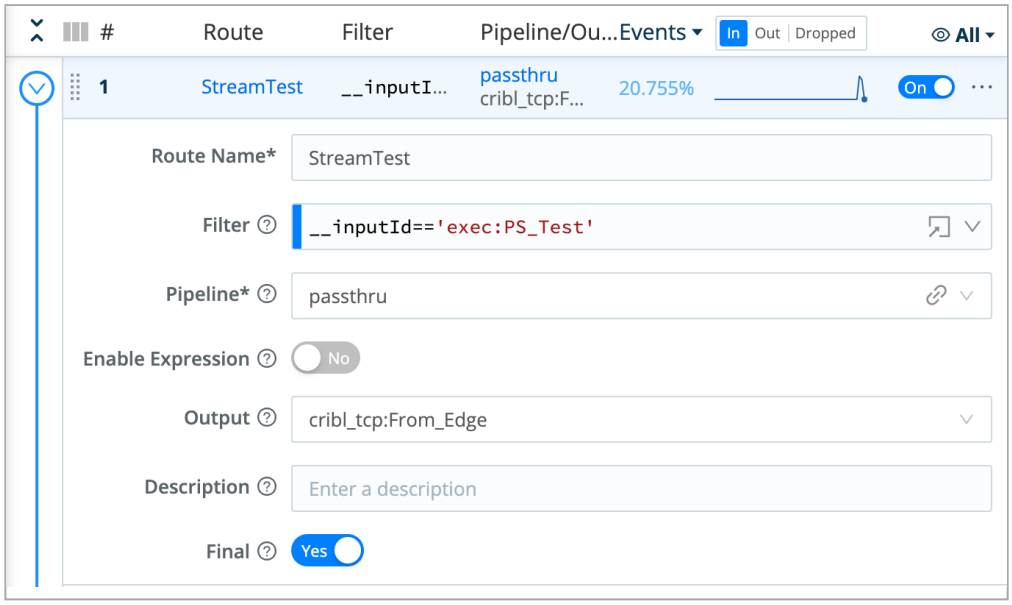

Routing your data

Confirm the Data Flow

To confirm that your data is flowing, navigate back to Cribl Stream's Cribl TCP Source. Run a **Live Data** capture on the Source.

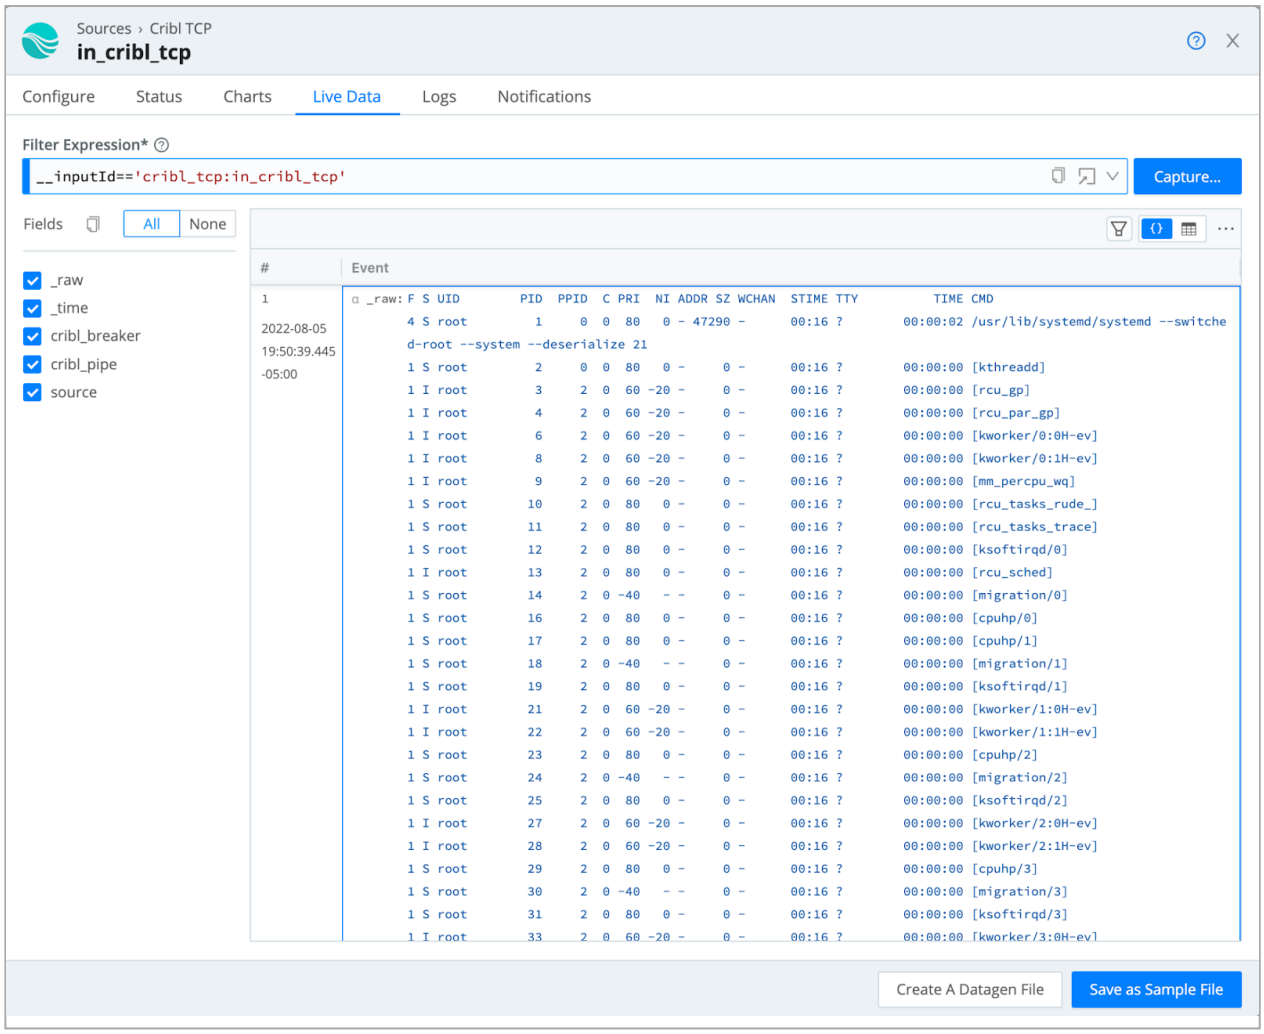

Data flow in the Source

You can also check the Monitoring page's **Data** submenu, to isolate the throughput on your Source.



Monitoring the Source throughput

15.2. Configuring Upstream Logging Agents

This page explains how to quickly connect a wide selection of common logging agents and other log sources to Cribl Stream. The examples below are equally valid for Cribl.Cloud and customer-managed Cribl Stream instances.

Whichever source you choose, start by doing a live capture on the corresponding Source in Cribl Stream. Verify that data is coming in. Then save your capture to a sample file, which will help you build your Pipelines.

Fluent Bit and Fluentd

Both Fluent Bit (written in C) and fluentd (written in Ruby) are open-source log collectors, processors, and aggregators.

Fluent Bit to HEC

Of Fluent Bit's many output options, several work with Cribl Stream. Here's how to connect a Cribl Stream Splunk HEC Source to Fluent Bit with the Splunk HEC formatting option.

You'll need to copy and paste the following:

- From the Cribl.Cloud **Network Settings** > **Data Sources** tab, the `in_splunk_hec` **Ingest Address**.
- From Cribl Stream's **Sources** > **Splunk HEC** > `<source_name>` > **Auth Tokens** tab, the HEC token.

Decide how to adjust the `match` parameter for your use case. For example, an asterisk (wildcard) value will send **all** events to Cribl Stream.

Edit the Fluent Bit settings accordingly. They're usually in `/etc/td-agent-bit/td-agent-bit.conf`, in a form similar to this:

```
[OUTPUT]
    name          splunk
    match         *
    host          in.main-default-<organization>.cribl.cloud
    port          8088
    splunk_token <HEC_token>
    tls           on
    # optional
```

Save the changes and restart the `td-agent-bit` service.

Fluent Bit to Elastic Sources

You can also connect Cribl Stream to Fluent Bit, using an Elastic Source.

```
[OUTPUT]
    name          es
    match         *
    host          10.0.21.134
    port          9200
    index         my_index
    type          my_type
```

Fluentd to HEC

If you don't already have it, install the `splunk_hec` fluentd mod:

```
sudo gem install fluent-plugin-splunk-hec
```

You'll need to copy and paste the following:

- From the Cribl.Cloud **Network Settings** > **Data Sources** tab, the `in_splunk_hec` **Ingest Address**.
- From Cribl Stream's **Sources** > **Splunk HEC** > <source_name> > **Auth Tokens** tab, the HEC token.

Decide how to adjust the `match` parameter for your use case. Use an asterisk (wildcard) if you want to send **all** events to Cribl Stream.

Edit the `<match` section of the fluentd settings accordingly. They could be in `/etc/fluent/fluent.conf` or another location, as described in the fluentd docs.

```
<match **>
  @type splunk_hec
  @log_level info
  hec_host in.main-default-<organization>.cribl.cloud
  hec_port 8088
  hec_token <HEC_token>
  index <index_name>
  source_key <file_path>
  <format>
    @type json
  </format>
</match>
```

Save the changes and restart fluentd.

Splunk

Cribl Stream can directly ingest the native Splunk2Splunk (S2S) protocol. As a result, both Splunk universal and heavy forwarders can send log data to Cribl Stream.

Splunk Forwarder (Universal or Heavy) to Splunk TCP

In Cribl Stream, create a Splunk TCP Source.

Cribl recommends setting an authorization token so that your receiver will accept only your traffic. Define this setting on your Splunk TCP Source config's **Auth Tokens** tab.

If you're using a Splunk heavy forwarder, you'll also want to decide whether to create filters in Splunk, or to let all of your traffic through to Cribl Stream. In the snippet below, we assume that you want all traffic delivered.

Adapt the following snippet to your use case and add it to `$splunk/etc/system/local/outputs.conf`.

```
[tcpout]
disabled       = false
defaultGroup   = criblcloud

[tcpout:criblcloud]
server         = in.main-default-<organization>.cribl.cloud:9997
sslRootCAPath  = $SPLUNK_HOME/etc/auth/cacert.pem
useSSL         = true
sendCookedData = true
token          = <optional-but-recommended>
```

Save the changes and restart the Splunk service.

Elastic

In the Elastic ecosystem, Elastic Filebeat is an agent that functions as a lightweight shipper for forwarding and centralizing log data.

Elastic Filebeat

Cribl Stream can ingest the native Elasticsearch streaming protocol directly.

Cribl recommends setting an authorization token so that your receiver will accept only your traffic. This setting is in the **Auth Tokens** field of Cribl Stream's **Sources** > **Elasticsearch API** > **General Settings** tab.

If you want to enable Basic authentication:

- Concatenate your username and password with a colon in between, like this: `username:password`.
- Encode the `username:password` string using base64.
- Prepend the string `Basic ` (including the trailing space) to the encoded string.
- Enter the resulting string in the **Auth tokens** field as described above.

You'll see something like this:

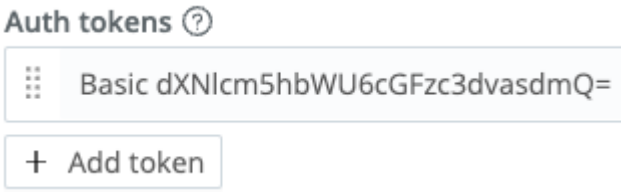

Basic auth in the Cribl Stream Elasticsearch API Source

```
output.elasticsearch:
  hosts: ["in.main-default-<organization>.cribl.cloud:9200/search"]
  protocol: "https"
  ssl.verification_mode: "full"
  username: <some_username>
  password: <some_password>
```

syslog

To receive syslog data in Cribl Stream, create a native Syslog Source. See Cribl's best practices for working with syslog data.

> Cribl recommends not using UDP over the public internet. UDP examples are included here for test purposes only.
>
> UDP, by definition, does not guarantee delivery. While TCP mitigates this problem, using either UDP or TCP without TLS over the public internet exposes unencrypted data.

syslog-ng (TLS over TCP)

Cribl recommends using TLS over TCP to send data from syslog-ng to Cribl Stream.

Here's an example of `syslog-ng.conf` edited such that all event data will be encrypted on the way to Cribl Cloud. Adapt the snippet to your use case and edit `syslog-ng.conf` accordingly.

```
destination d_syslog {
    syslog("in.main-default-<organization>.cribl.cloud"
        transport("tls")
        port(6514)
        tls(
            peer-verify(required-trusted)
            ca-dir("/etc/syslog-ng/ca.d")
        )
    );
};

log {
    source(s_network);
    destination(d_syslog);
};
```

Save the changes and restart the syslog-ng service.

syslog-ng (UDP or TCP)

Here's an example of `syslog-ng.conf` – for test purposes only, because it does not use TLS.

Adapt the snippet to your use case, and edit `syslog-ng.conf` accordingly. You can change `tcp` to `udp` to switch protocols.

```
destination d_syslog {
    syslog("in.main-default-<organization>.cribl.cloud"
        transport("tcp")
        port(9514)
    );
};

log {
    source(s_network);
    destination(d_syslog);
};
```

Save the changes and restart the syslog-ng service.

syslog-ng with Load-Balanced Outputs

You can forward logs from syslog-ng to multiple Cribl Stream Workers through a redundant, load-balanced output by using the syslog-ng `elasticsearch-http` output module. With this arrangement, syslog-ng

receives syslog messages over TCP and/or UDP and outputs events over the Elasticsearch HTTP Bulk API to Cribl Stream Workers.

> Forwarding to Cribl Stream from the syslog-ng `elasticsearch-http` output module requires syslog-ng version 3.19 or higher.
>
> To check your syslog-ng version, run the following command:
>
> ```
> syslog-ng -V
> ```

Adapt the snippet to your use case, and edit `syslog-ng.conf` accordingly. To learn more about syslog-ng destination flags, see the syslog-ng Administration Guide.

```
@version: 3.33
@include "scl.conf"

# Inputs
source s_network {
    # flags(no-parse) disables syslog-ng parsing of syslog messages (raw passthru)
    network(transport("tcp") port("9514") flags(no-parse));
    network(transport("udp") port("9514") flags(no-parse));
};

destination d_elasticsearch_tls {
    # https://www.syslog-ng.com/technical-documents/doc/syslog-ng-open-source-
edition/3.33/administration-guide/34
    elasticsearch-http(url("https://worker1:9200/_bulk" "https://worker2:9200/_bulk"
"https://worker3:9200/_bulk")
        batch-lines(100)
        batch-bytes(512Kb)
        batch-timeout(2500)
        persist-name("d_elasticsearch-http-load-balance")
        type("")
        index("syslog")
        # Auth token
        #headers("Authorization: <token from Stream>")
        # or Basic Auth
        #user("username")
        #password("password")
    );
};

log {
    source(s_network);
    destination(d_elasticsearch_tls);
};
```

Save the changes and restart the syslog-ng service.

rsyslog (TLS over TCP)

You'll need to install the `rsyslog-gnutls` package if it's not already on your system. E.g.:

```
apt install rsyslog-gnutls
```

If the `rsyslog-gnutls package` is not already on your system, run the following command (or equivalent) to install it:

```
apt install rsyslog-gnutls
```

Cribl recommends using TLS over TCP to send data from rsyslog to Cribl Stream.

Here's an example of `rsyslog.conf`, edited such that all event data will be encrypted on the way to Cribl Cloud. Adapt the snippet to your use case, and edit `rsyslog.conf` accordingly:

```
# path to the crt file.
# You will need a valid ca cert file. Most linux distros come with this
$DefaultNetstreamDriverCAFile /etc/ssl/certs/ca-certificates.crt

*.* action(
         type="omfwd"
         target="in.main-default-<organization>.cribl.cloud"
         port="6514"
         protocol="tcp"
         action.resumeRetryCount="100"
         queue.type="linkedList"
         queue.size="10000"
         StreamDriver="gtls"
         StreamDriverMode="1" # run driver in TLS-only mode
)
```

Save the changes and restart the rsyslog service.

rsyslog (UDP or TCP)

Here's an example of `rsyslog.conf` – for test purposes only, because it does not use TLS.

Adapt the snippet to your use case, and edit `rsyslog.conf` accordingly. You can change `tcp` to `udp` to switch protocols.

```
*.* action(
          type="omfwd"
          target="in.main-default-<organization>.cribl.cloud"
          port="9514"
          protocol="tcp"
          action.resumeRetryCount="100"
          queue.type="linkedList"
          queue.size="10000"
)
```

Save the changes and restart the rsyslog service.

Appliances that Send syslog

Many appliances emit syslog data. At a minimum, configure your appliance(s) to send syslog over TCP with TLS enabled, if possible.

Even better, stand up a Cribl Stream instance close to the appliances in your network topology. Have the appliances send syslog to the nearby Cribl Stream, which can optionally transform, filter, and/or enhance the data, and then send it to a more centralized Cribl Stream cluster in Cribl.Cloud or a customer-managed location.

The Cribl Stream worker that's closest to the appliance will use TCP JSON, with TLS enabled, to send syslog to the second Cribl Stream instance:

Sending syslog from an appliance to Cribl Cloud

The benefits of placing the first Cribl Stream instance close to the log producer include:

- Since there are fewer network hops, UDP becomes a more viable option, if you want it.
- If you're using TCP, that can be more performant here than it would be across the internet.
- The first Cribl Stream instance can do data reduction and/or compression. These operations reduce the volume of the data hitting the wire on the way to the next hop.
- This can help keep data egress costs under control.

Vector

Vector is Datadog's tool for building observability pipelines.

Vector to HEC

Vector supports Splunk's HTTP Event Collector (HEC). Here's how to connect a Cribl Stream Splunk HEC Source to Vector.

For Cribl Cloud especially, Cribl recommends setting an authorization token so that your receiver will accept only your traffic. This setting is in Cribl Stream's **Sources** > **Splunk HEC** > **Auth Tokens** tab.

The snippet below references a random syslog generator called `dummy_logs` for testing purposes. Adapt the snippet to your use case and edit `vector.toml` (or `vector.yaml` or `vector.json`) accordingly.

```
[sinks.my_sink_id]
type           = "splunk_hec"
inputs         = [ "dummy_logs" ]
endpoint       = "https://in.main-default-<organization>.cribl.cloud:8088"
compression    = "gzip"
token          = "<optional-but-recommended>"
encoding.codec = "json"
```

Vector to Elasticsearch

Vector supports Elasticsearch API. Here's how to connect a Cribl Stream Elasticsearch API Source to Vector.

The snippet below references a random syslog generator called `dummy_logs` for testing purposes. The snippet also specifies Basic authentication. Follow the procedure for enabling Basic authentication described in the Elastic Filebeat example above.

Adapt the snippet to your use case and edit `vector.toml` (or `vector.yaml` or `vector.json`) accordingly.

```
[sinks.elastic_test]
type          = "elasticsearch"
inputs        = [ "dummy_logs" ]
endpoint      = "https://in.main-default-<organization>.cribl.cloud:9200/search"
compression   = "gzip"
index         = "my_es_index"
auth.user     = "<some_username>"
auth.password = "<some_password>"
auth.strategy = "basic"
```

Pull-based Sources

All the above data sources **push** data into Cribl Stream. Here are brief notes on configuring some popular Cribl Stream-native Pull Sources:

Amazon Kinesis

You can create an Amazon Kinesis Source in Cribl Stream. This is straightforward for customer-managed Cribl Stream instances.

Cribl Cloud sits behind an network load balancer, which Kinesis Firehose does not support. For this reason, the best option for connecting Amazon Kinesis to Cribl Cloud is to (1) have Kinesis Firehose write to an Amazon S3 bucket, and (2) set up a Cribl Stream Amazon S3 Source to pull data from there, as described in the next section.

Amazon S3

Configuring an S3 Source is virtually the same for Cribl Cloud as it is for customer-managed Cribl Stream instances.

See this in-depth article about the Cribl Stream S3 Source, whose content also applies to Cribl Cloud. Here's an overview of the process:

- Configure an S3 bucket to send `s3:ObjectCreated:*` events to an SQS queue.
- Configure a Cribl Stream S3 (Pull) Source (not Collector) to subscribe to the SQS feed from step 1.
  - Be sure to properly configure permissions for the Secret/Access keys you use for authentication.
- Set up Event Breaker rules as required based on the contents of your log files.

Office 365 Service, Activity, or Message Trace

Configuring an Office 365 Services, Activity, or Message Trace Source is virtually the same for Cribl Cloud as it is for customer-managed Cribl Stream instances. Note that you need to start your Office 365 Content subscription from within Office 365, or there will be no data available to pull.

AppScope

Integrating AppScope with Cribl Stream is simple and fast. The easiest way is to just set the `$SCOPE_CRIBL` environment variable to define a connection between Cribl Stream and AppScope.

For example, you could "scope" the `nginx` command, and send the captured data using TLS over TCP:

```
SCOPE_CRIBL=tcp://in.main-default-<organization>.cribl.cloud:10091 scope nginx
```

15.3. Azure AD + OpenID Configuration

This page outlines how to integrate Azure Active Directory with Cribl Stream's SSO/OpenID Connect authentication.

Configure Azure AD App

Start at the Azure portal to configure an OpenID Connect provider: https://portal.azure.com/.

Register Your Azure AD App

1. Open the **Azure Active Directory** Service.

2. In the left nav's **Manage** section, select **App registrations**.

3. Add a new registration. For details, see Microsoft's Quickstart: Register an Application topic.
   In the example below, substitute the appropriate callback URL for your own Cribl Stream Leader instance: `https://leader.cribl.io:9000/api/v1/auth/authorization-code/callback`

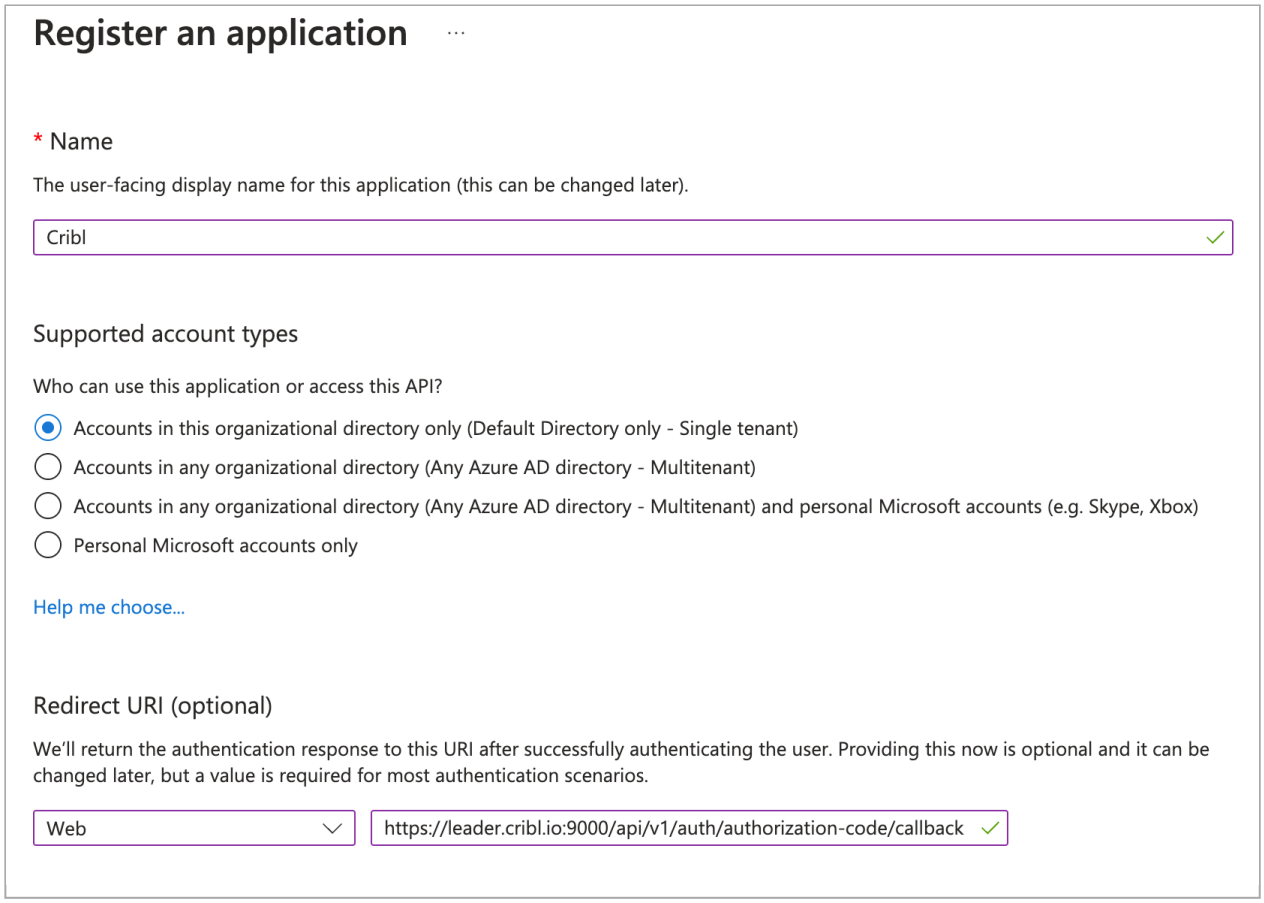

Get the Azure AD App's Basic Credentials

You'll need to copy and paste these credentials into Cribl Stream's **Authentication** page below.

1. You can find the OIDC Client ID on the new app's **Overview** page, as the **Application (client) ID**.

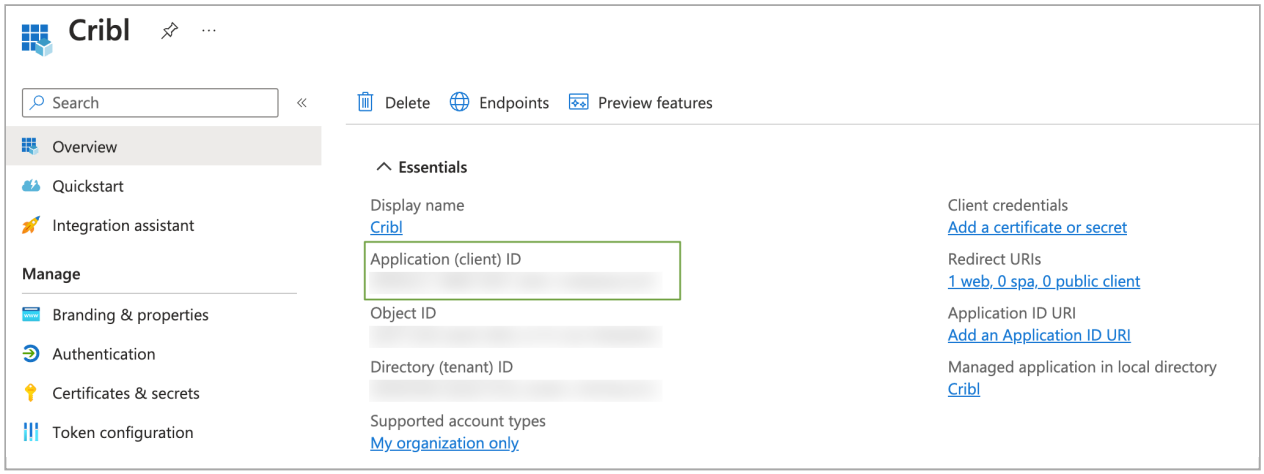

Finding the OIDC Client ID

2. Click the **Endpoints** button at the page top to display the OAuth endpoints. You can use either the v2 or the v1 endpoints.

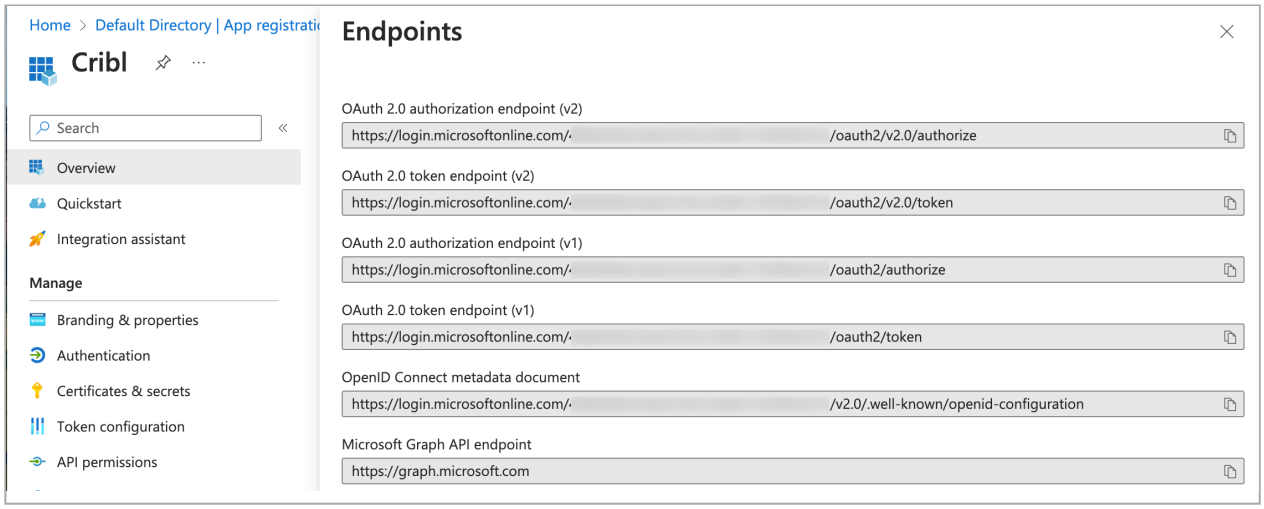

Copying OAuth 2 v2 endpoints

Create and Copy a Client Secret

1. To create a client secret: From the Azure portal's left nav, select **Certificate & secrets**. Then select **New client secret**.

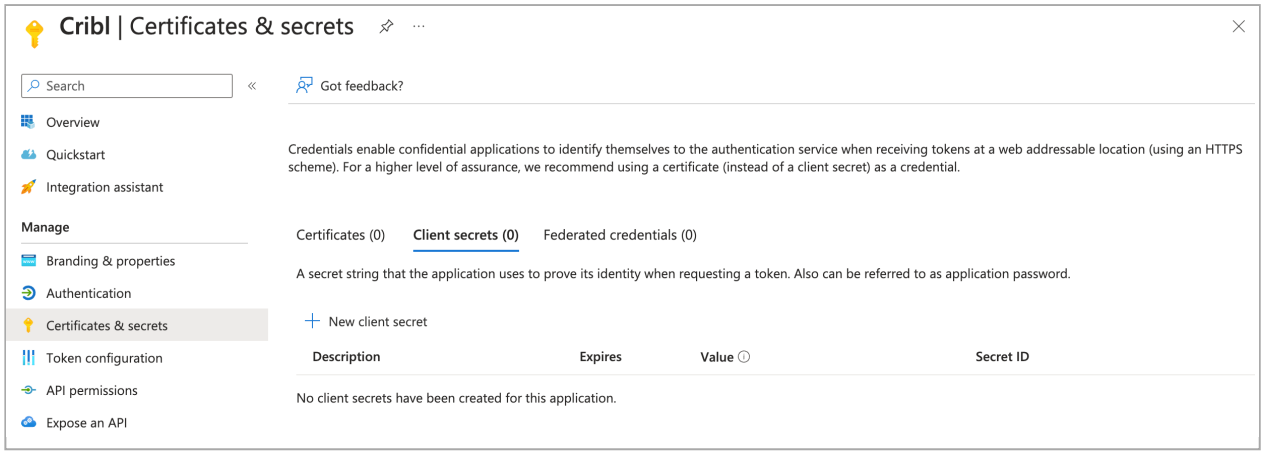

Accessing client secrets

2. Add a new client secret with a descriptive name, and an expiration timeframe.

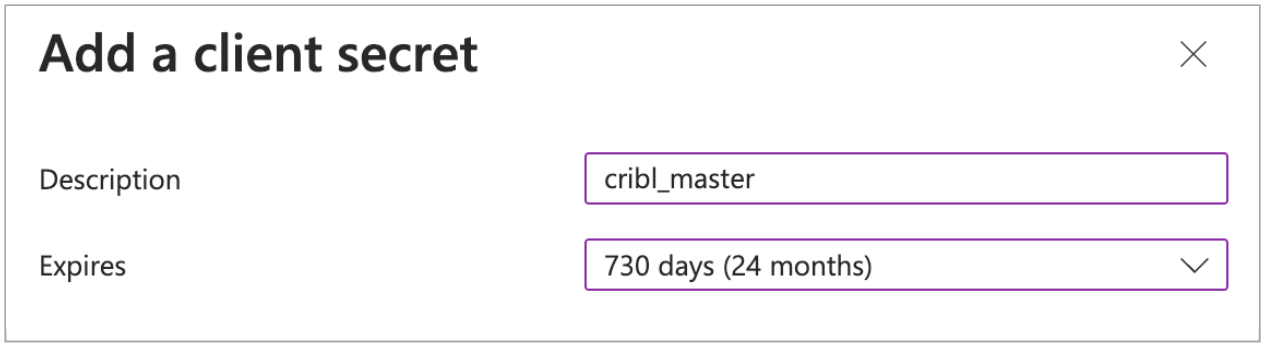

Adding a client secret

3. Click **Add**.

4. Immediately copy the **Value** and **Secret ID** from the resulting page. You'll need to paste the **Value** into Cribl Stream's **Authentication** > **Client secret** field below.

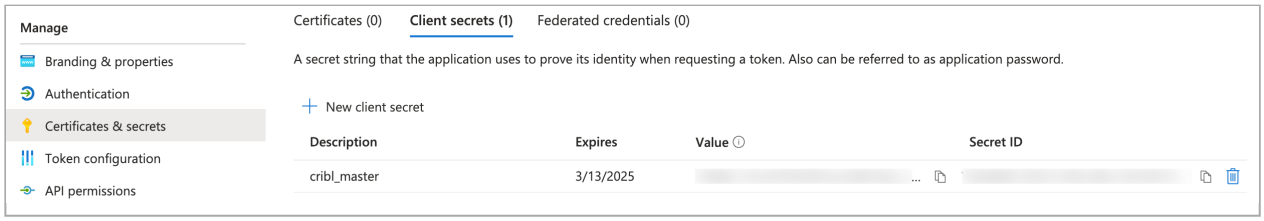

Copy that secret!

> This is the only time the secret is shown! Make sure you copy it while it's visible. (If you missed your chance, you can start over by creating a new secret.)

Configure Token and Claims

Here, you'll add the groups claim to the OIDC ID token.

1. From the Azure portal's left nav, select **Token configuration**, then select **Add groups claim**.

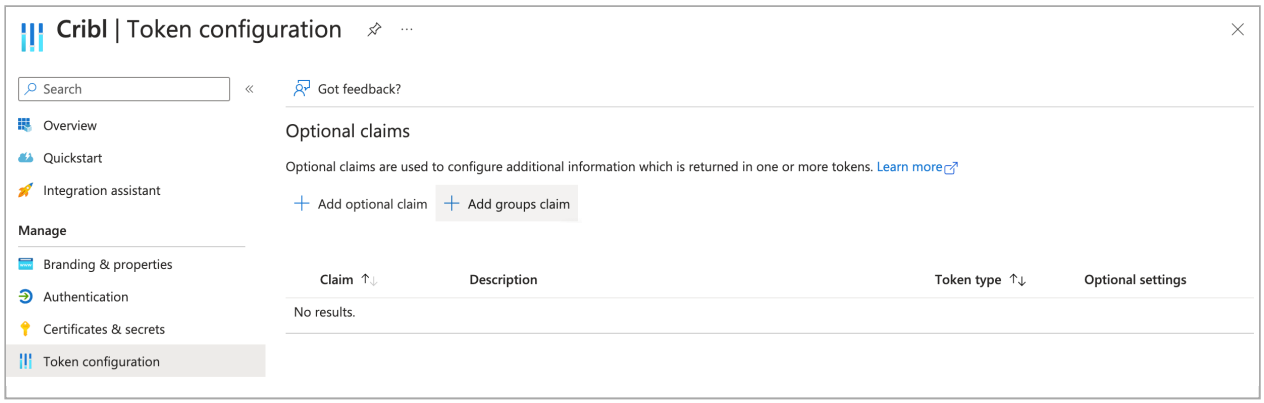

Configuring a token

2. Configure the groups claim as necessary, then click **Add**.

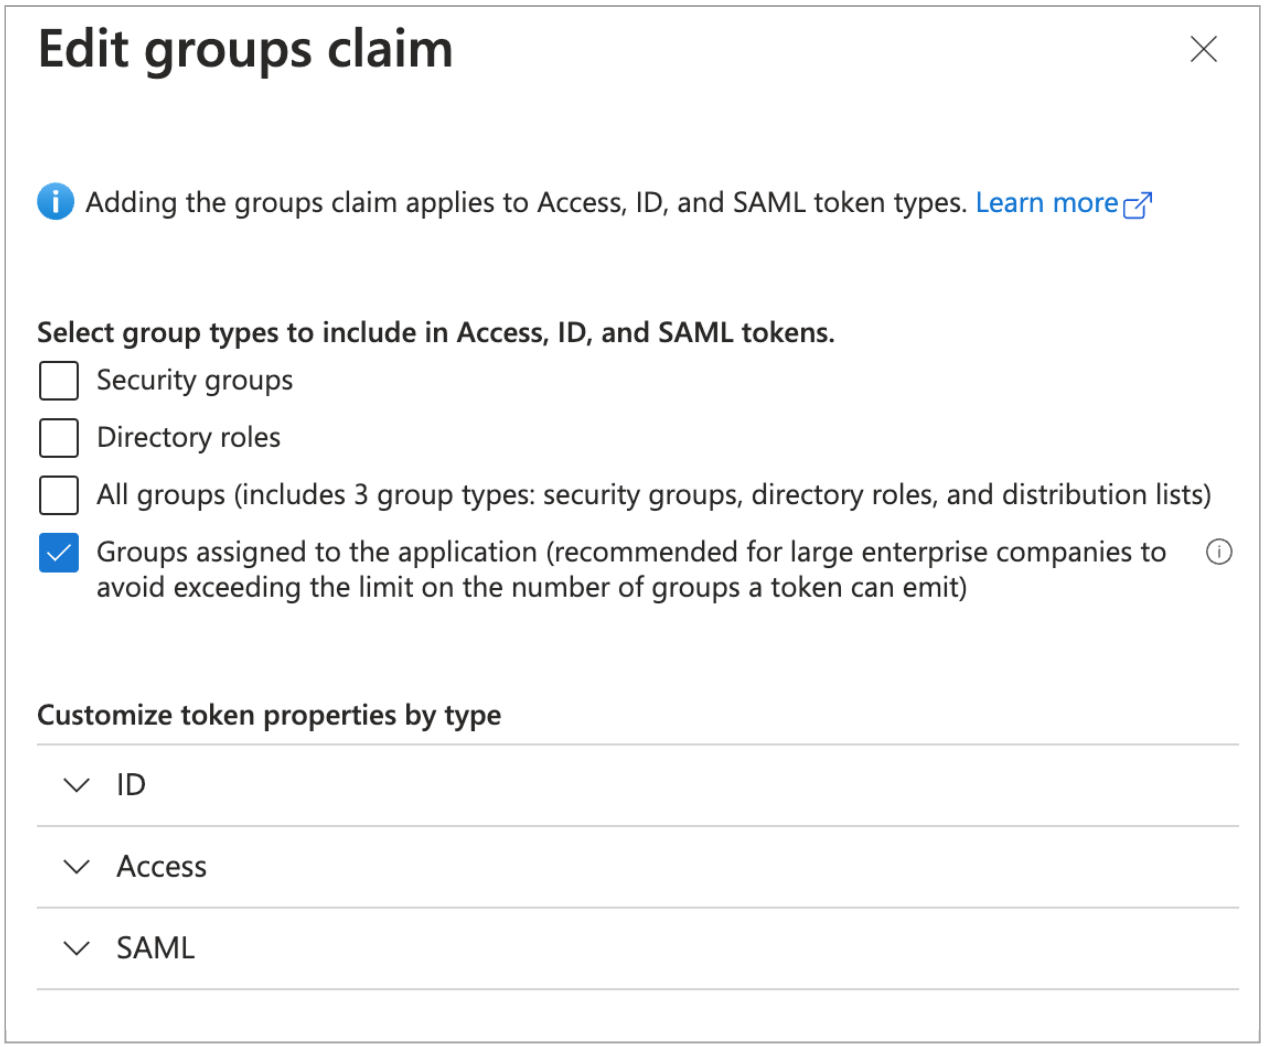

Editing the groups claim

> Unless you synchronize Azure AD with your on-premises Active Directory, AD will return only GUIDs for your group names. If you've synchronized, you'll then be able to configure returning the `sAMAccountName` instead.

3. Your token is now configured, and you're all done on the Azure side.

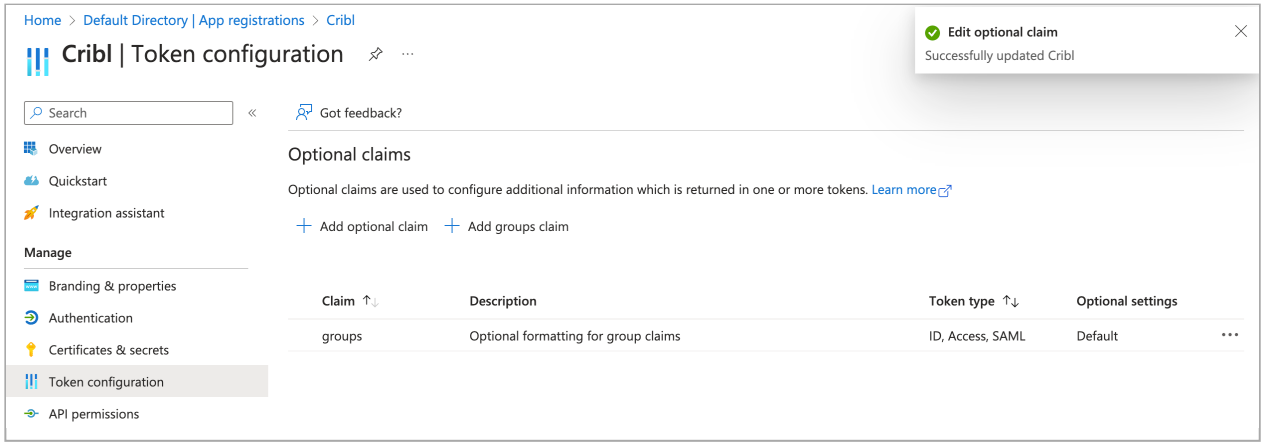

Configure Cribl Stream Authentication

Switch to Cribl Stream, and navigate to its **Settings** > [**Global Settings** >] **Access Management** > **Authentication** page. Configure this as indicated below (with reactions):

- **Type**: **OpenID Connect**. This will expose relevant fields, setting several default values and placeholders.
- **Provider name**: Enter an arbitrary identifier for this Azure AD integration.
- **Audience**: Enter your Cribl Stream Leader instance's base URL. Use the format: `https://<your-domain.ext>:9000` (do not use a trailing slash).
- **Client ID**: Enter your Azure AD **Application (client) ID**. (In the Azure portal, see above to copy this from your app's **Overview** page.)
- **Client secret**: Enter the **Client secret** > **Value** that you earlier generated and copied from the Azure app's **Certificates & secrets** page.
- **Scope**: Accept the default `openid profile email` scopes.
- **Authentication URL**: Paste the **OAuth 2.0 authorization endpoint** that you copied above from the Azure app's **Overview** > **Endpoints** drawer.
- **Token URL**: Paste the **OAuth 2.0 token endpoint** that you copied above from the Azure app's **Overview** > **Endpoints** drawer.
- **User Info URL**, **Logout URL**: Leave both fields blank.
- **User identifier**: Adjust this based on the endpoint you choose (v1 or v2) above. In v2, the `preferred_username`, `name`, and `email` fields are set, matching this field's default values. In v1, only the `name` field is included in the token by default, so an acceptable entry here might be: `` `${unique_name || upn || username || name}` ``. You can check the token fields returned by enabling debug-level logging on Cribl Stream's `auth:sso` channel.
- Change the **Filter type** to `User info filter`.
- Optionally, enable **Allow local auth** as a fallback login method.

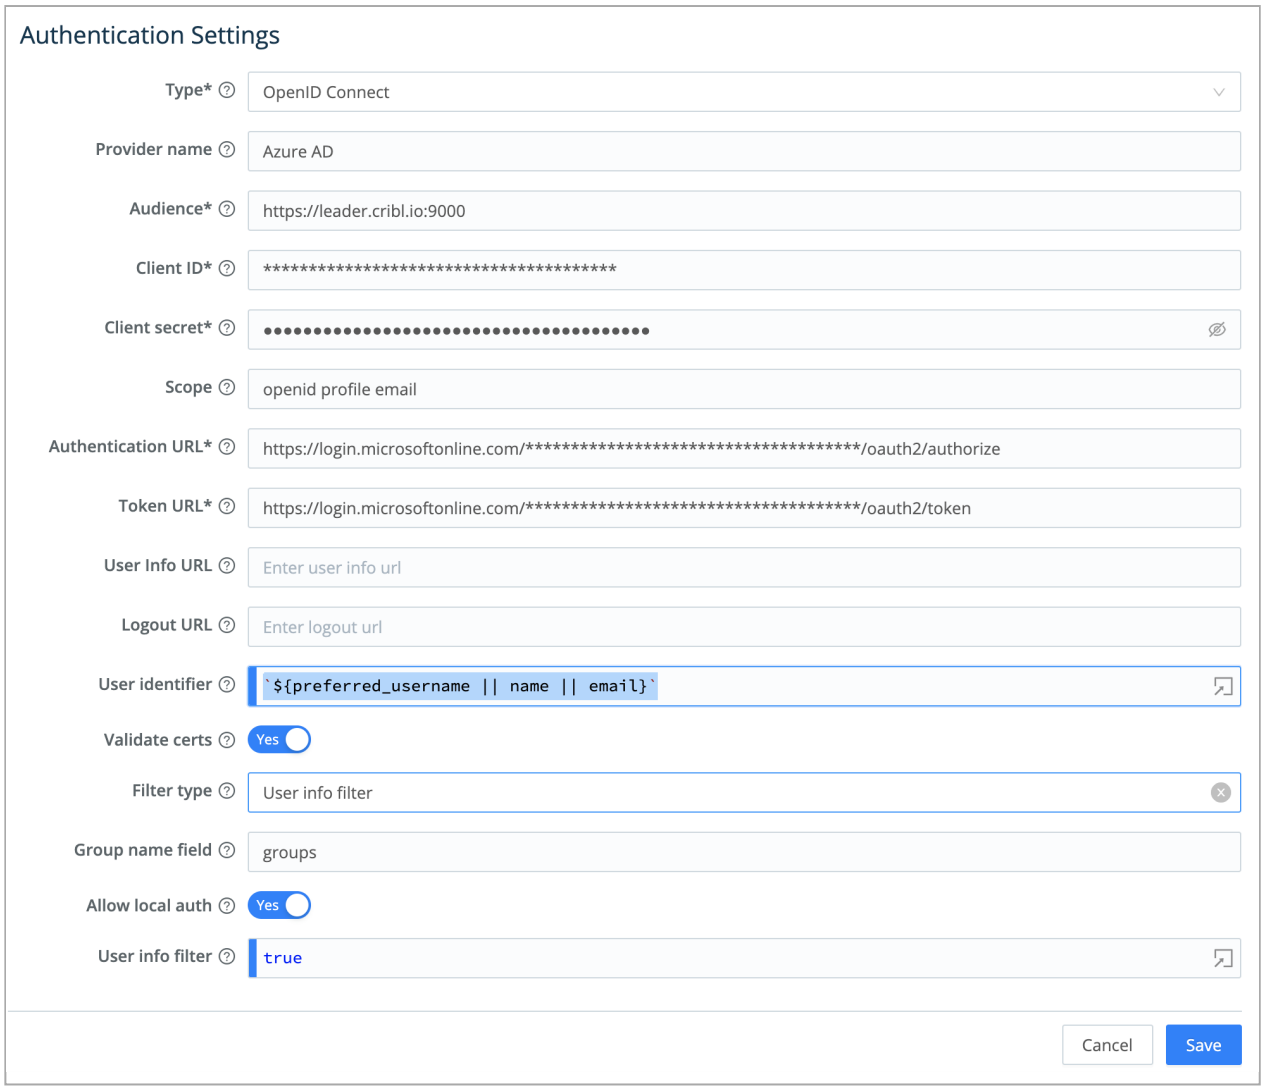

Sample Cribl Stream Authentication Settings for Azure AD (v2 endpoints)

Sample User identifier entry for v1 endpoints

Map Azure AD Groups to Cribl Stream Roles

Next, map your Azure AD groups to Cribl Stream Roles. The group names might appear as GUIDs. You can translate these on the Azure AD **Groups** page.

Unless you synchronize Azure AD with your on-premises Active Directory, you will need to obtain the Group GUIDs from the Azure AD **Groups** page. Place these GUIDs in the mappings box and then choose the appropriate Cribl Stream Role. Here is a simple example.

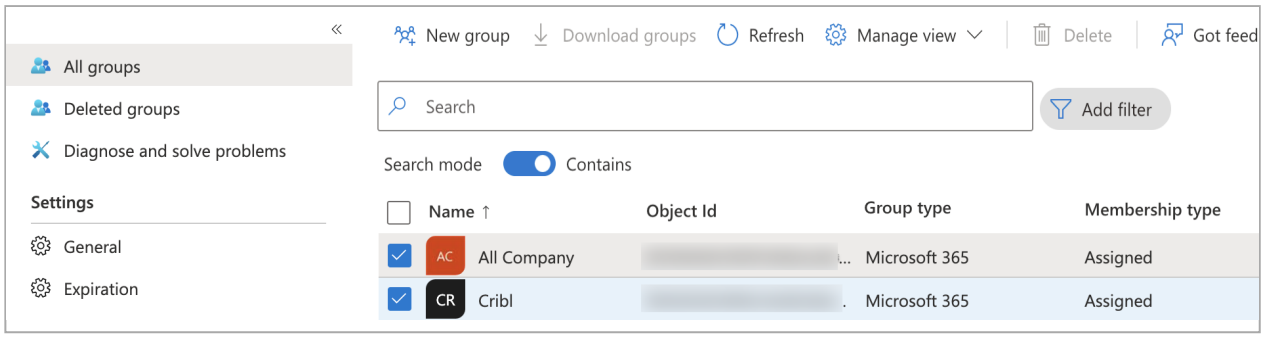

Azure AD groups...

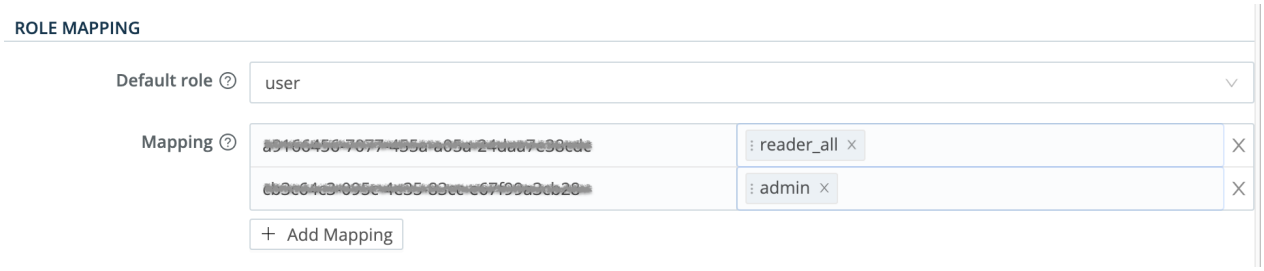

...mapped to Cribl Stream Roles

15.4. Azure Sentinel SIEM Integration

You can send events through Cribl Stream Azure Sentinel Destinations to the Microsoft Sentinel SIEM in Azure.

> These docs use the terms "Azure Sentinel" and "Microsoft Sentinel" interchangeably.

Of the many event types (also called "tables") present in the Microsoft ecosystem, this topic provides what you need to get started quickly with any or all of the following four:

- CommonSecurityLog
- SecurityEvent
- Syslog
- WindowsEvent

We'll also explain how you can bring additional event types into your deployment.

This topic explains the overall workflow for getting data from Cribl Stream into Microsoft Sentinel, with an emphasis on the "Azure-y" steps in the process. We'll also cover key points about the Cribl Stream Azure Sentinel Destination, whose complete Destination UI details are here.

Before You Begin

Ensure that you have prepared your Azure Workspace.

If you do not yet have Microsoft Sentinel up and running, please join us on Cribl's Community Slack at https://cribl-community.slack.com/ and let us know; very likely, a wise goat will offer time-saving suggestions.

To plan your Cribl/Sentinel integration, start by deciding which event types (a.k.a. tables) you want to send to Sentinel.

If the answer is "more than one," you should use an Output Router and multiple Destinations. You'll configure one Destination per table, but a single URL will ingest all the data. The Output Router can then route a given event type to the correct Destination.

Creating Data Collection Rules

The Sentinel SIEM can have multiple ingestion endpoints, called Data Collection Endpoints (DCEs). In turn, each DCE can have multiple Data Collection Rules (DCRs). Each DCR dictates the structure of the data flowing into one table.

Consider the Syslog table, as documented by Microsoft here. In the DCR, the `outputStream` element specifies what table the data should populate (here, `Microsoft-Syslog`). The `transformKql` element is a query that translates incoming fields into values in the table's columns (e.g., the `TimeGenerated` column).

Use Cribl's template to create a custom DCR that includes each type of data you plan to send to the Sentinel SIEM. The template already includes the four event types cited above, and you can add onto it to support additional event types, as described in Microsoft's documentation.

Here's an example of how you might have one table that's populated by multiple DCRs, each sending a different kind of data:

- The table could be Syslog (i.e., `Microsoft-Syslog`).
- One DCR could handle Windows system logs; another could handle Linux system logs; and a third could handle Mac system logs.

It's also possible for a single DCR to send data to multiple tables.

Obtaining Your URL

To configure your Cribl Stream Azure Sentinel Destination, you must know the ingestion URL to send data to. This is in **General Settings** > **Endpoint configuration**, where you choose between the **URL** and **ID** options. The **ID** option is just a somewhat roundabout method for generating the URL – in this section, we'll ignore **ID** in favor of an easier way to obtain the URL.

In your Azure portal:

1. Navigate to the Azure Resource Graph Explorer. The Resource Graph Explorer queries across your whole Azure cloud.

2. Run the following query in the Explorer to list all your Data Collection Endpoints (DCEs) and Data Collection Rules (DCRs).

```
Resources
| where type =~ 'microsoft.insights/datacollectionrules'
| mv-expand Streams= properties['dataFlows']
| project name, id, DCE = tostring(properties['dataCollectionEndpointId']),
ImmutableId = properties['immutableId'], StreamName = Streams['streams'][0]
 | join kind=leftouter (Resources
| where type =~ 'microsoft.insights/datacollectionendpoints'
| project name,  DCE = tostring(id), endpoint = properties['logsIngestion']
['endpoint']) on DCE
| project name, StreamName, Endpoint = strcat(endpoint,
'/dataCollectionRules/',ImmutableId,'/streams/',StreamName,'?api-version=2021-
11-01-preview')
```

3. If you are using all four of the tables mentioned above, the output should look something like this:

name	StreamName	Endpoint
AndyMultiDCR	Custom-WindowsEvent	https://[redacted].ingest.monitor.azure.com/dataCollectionRules/dcr-[redacted]/streams/Custom-WindowsEvent?api-version=2021-11-01-preview
AndyMultiDCR	Custom-Syslog	https://[redacted].ingest.monitor.azure.com/dataCollectionRules/dcr-[redacted]/streams/Custom-Syslog?api-version=2021-11-01-preview
AndyMultiDCR	Custom-CommonSecurityLog	https://[redacted].ingest.monitor.azure.com/dataCollectionRules/dcr-[redacted]/streams/Custom-CommonSecurityLog?api-version=2021-11-01-preview
AndyMultiDCR	Custom-SecurityEvent	https://[redacted].ingest.monitor.azure.com/dataCollectionRules/dcr-[redacted]/streams/Custom-SecurityEvent?api-version=2021-11-01-preview

Azure Resource Graph Explorer query output

4. Click a DCE of interest to open its **Details** drawer.

5. Find the **Endpoint** field and click its **Copy to clipboard** icon.

   - Microsoft defines the Endpoint URI as follows:

     ```
     {Data Collection Endpoint URI}/dataCollectionRules/{DCR Immutable
     ID}/streams/{Stream Name}?api-version=2021-11-01-preview
     ```

6. In your Cribl Stream Azure Sentinel Destination, paste the copied Endpoint URI into the **URL** field.

Configuring Your Destinations, Continued

In most respects, Cribl Stream's Azure Sentinel and Webhook Destinations are alike. This section notes the few differences, while highlighting key points about configuring Azure Sentinel Destinations.

In Azure Sentinel Destination, **General Settings** > **Authentication** offers fewer options than the Webhook Destination. This is because OAuth is Cribl Stream's only supported option for Microsoft Sentinel, for now. Some fields that present in other Destinations always have the same values for Microsoft Sentinel, and Cribl Stream fills those out for you without exposing them in the UI.

The Azure Sentinel Destination does not support client-side TLS.

The value for **Advanced Settings** > **Max body size (KB)** value defaults to `1000`. The intent here is to keep request bodies from exceeding Microsoft Sentinel's limit of 1 MB, meaning 1024 KB including headers. If necessary, you can lower **Max body size (KB)** even further.

15.4.1. DCR Template with Stream Values

DCR Template

```
{
    "$schema": "https://schema.management.azure.com/schemas/2019-04-
01/deploymentTemplate.json#",
    "contentVersion": "1.0.0.0",
    "parameters": {
        "dataCollectionRuleName": {
            "type": "string",
            "metadata": {
                "description": "Specifies the name of the Data Collection Rule to
create."
            }
        },
        "location": {
            "defaultValue": "[resourceGroup().location]",
            "type": "string",
            "metadata": {
                "description": "Specifies the location in which to create the Data
Collection Rule."
            }
        },
        "workspaceResourceId": {
            "type": "string",
            "metadata": {
                "description": "Specifies the Azure resource ID of the Log Analytics
workspace to use."
            }
        },
        "endpointResourceId": {
            "type": "string",
            "metadata": {
                "description": "Specifies the Azure resource ID of the Data
Collection Endpoint to use."
            }
        }
    },
    "resources": [{
        "type": "Microsoft.Insights/dataCollectionRules",
        "apiVersion": "2021-09-01-preview",
        "name": "[parameters('dataCollectionRuleName')]",
        "location": "[parameters('location')]",
        "properties": {
            "dataCollectionEndpointId": "[parameters('endpointResourceId')]",
            "streamDeclarations": {
                "Custom-CommonSecurityLog": {
                    "columns": [{
                            "name": "Activity",
                            "type": "string"
                        },
                        {
                            "name": "AdditionalExtensions",
                            "type": "string"
                        },
                        {
                            "name": "ApplicationProtocol",
                            "type": "string"
                        },
                        {
                            "name": "CommunicationDirectionCommunicationDirection",
                            "type": "string"
```

```
        },
        {
            "name": "Computer",
            "type": "string"
        },
        {
            "name": "DestinationDnsDomain",
            "type": "string"
        },
        {
            "name": "DestinationHostName",
            "type": "string"
        },
        {
            "name": "DestinationIP",
            "type": "string"
        },
        {
            "name": "DestinationMACAddress",
            "type": "string"
        },
        {
            "name": "DestinationNTDomain",
            "type": "string"
        },
        {
            "name": "DestinationPort",
            "type": "int"
        },
        {
            "name": "DestinationProcessId",
            "type": "int"
        },
        {
            "name": "DestinationProcessName",
            "type": "string"
        },
        {
            "name": "DestinationServiceName",
            "type": "string"
        },
        {
            "name": "DestinationTranslatedAddress",
            "type": "string"
        },
        {
            "name": "DestinationTranslatedPort",
            "type": "int"
        },
        {
            "name": "DestinationUserID",
            "type": "string"
        },
        {
            "name": "DestinationUserName",
            "type": "string"
        },
        {
            "name": "DestinationUserPrivileges",
            "type": "string"
```

```
        },
        {
            "name": "DeviceAction",
            "type": "string"
        },
        {
            "name": "DeviceAddress",
            "type": "string"
        },
        {
            "name": "DeviceCustomDate1",
            "type": "string"
        },
        {
            "name": "DeviceCustomDate1Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomDate2",
            "type": "string"
        },
        {
            "name": "DeviceCustomDate2Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomFloatingPoint1",
            "type": "real"
        },
        {
            "name": "DeviceCustomFloatingPoint1Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomFloatingPoint2",
            "type": "real"
        },
        {
            "name": "DeviceCustomFloatingPoint2Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomFloatingPoint3",
            "type": "real"
        },
        {
            "name": "DeviceCustomFloatingPoint3Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomFloatingPoint4",
            "type": "real"
        },
        {
            "name": "DeviceCustomFloatingPoint4Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomIPv6Address1",
            "type": "string"
```

```
        },
        {
            "name": "DeviceCustomIPv6Address1Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomIPv6Address2",
            "type": "string"
        },
        {
            "name": "DeviceCustomIPv6Address2Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomIPv6Address3",
            "type": "string"
        },
        {
            "name": "DeviceCustomIPv6Address3Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomIPv6Address4",
            "type": "string"
        },
        {
            "name": "DeviceCustomIPv6Address4Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomNumber1",
            "type": "int"
        },
        {
            "name": "DeviceCustomNumber1Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomNumber2",
            "type": "int"
        },
        {
            "name": "DeviceCustomNumber2Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomNumber3",
            "type": "int"
        },
        {
            "name": "DeviceCustomNumber3Label",
            "type": "string"
        },
        {
            "name": "DeviceCustomString1",
            "type": "string"
        },
        {
            "name": "DeviceCustomString1Label",
            "type": "string"
```

```
    },
    {
        "name": "DeviceCustomString2",
        "type": "string"
    },
    {
        "name": "DeviceCustomString2Label",
        "type": "string"
    },
    {
        "name": "DeviceCustomString3",
        "type": "string"
    },
    {
        "name": "DeviceCustomString3Label",
        "type": "string"
    },
    {
        "name": "DeviceCustomString4",
        "type": "string"
    },
    {
        "name": "DeviceCustomString4Label",
        "type": "string"
    },
    {
        "name": "DeviceCustomString5",
        "type": "string"
    },
    {
        "name": "DeviceCustomString5Label",
        "type": "string"
    },
    {
        "name": "DeviceCustomString6",
        "type": "string"
    },
    {
        "name": "DeviceCustomString6Label",
        "type": "string"
    },
    {
        "name": "DeviceDnsDomain",
        "type": "string"
    },
    {
        "name": "DeviceEventCategory",
        "type": "string"
    },
    {
        "name": "DeviceEventClassID",
        "type": "string"
    },
    {
        "name": "DeviceExternalID",
        "type": "string"
    },
    {
        "name": "DeviceFacility",
        "type": "string"
```

```
    },
    {
        "name": "DeviceInboundInterface",
        "type": "string"
    },
    {
        "name": "DeviceMacAddress",
        "type": "string"
    },
    {
        "name": "DeviceName",
        "type": "string"
    },
    {
        "name": "DeviceNtDomain",
        "type": "string"
    },
    {
        "name": "DeviceOutboundInterface",
        "type": "string"
    },
    {
        "name": "DevicePayloadId",
        "type": "string"
    },
    {
        "name": "DeviceProduct",
        "type": "string"
    },
    {
        "name": "DeviceTimeZone",
        "type": "string"
    },
    {
        "name": "DeviceTranslatedAddress",
        "type": "string"
    },
    {
        "name": "DeviceVendor",
        "type": "string"
    },
    {
        "name": "DeviceVersion",
        "type": "string"
    },
    {
        "name": "EndTime",
        "type": "datetime"
    },
    {
        "name": "EventCount",
        "type": "int"
    },
    {
        "name": "EventOutcome",
        "type": "string"
    },
    {
        "name": "EventType",
        "type": "int"
```

```
    },
    {
        "name": "ExternalID",
        "type": "int"
    },
    {
        "name": "ExtID",
        "type": "string"
    },
    {
        "name": "FieldDeviceCustomNumber1",
        "type": "long"
    },
    {
        "name": "FieldDeviceCustomNumber2",
        "type": "long"
    },
    {
        "name": "FieldDeviceCustomNumber3",
        "type": "long"
    },
    {
        "name": "FileCreateTime",
        "type": "string"
    },
    {
        "name": "FileHash",
        "type": "string"
    },
    {
        "name": "FileID",
        "type": "string"
    },
    {
        "name": "FileModificationTime",
        "type": "string"
    },
    {
        "name": "FileName",
        "type": "string"
    },
    {
        "name": "FilePath",
        "type": "string"
    },
    {
        "name": "FilePermission",
        "type": "string"
    },
    {
        "name": "FileSize",
        "type": "int"
    },
    {
        "name": "FileType",
        "type": "string"
    },
    {
        "name": "FlexDate1",
        "type": "string"
```

```
    },
    {
        "name": "FlexDate1Label",
        "type": "string"
    },
    {
        "name": "FlexNumber1",
        "type": "int"
    },
    {
        "name": "FlexNumber1Label",
        "type": "string"
    },
    {
        "name": "FlexNumber2",
        "type": "int"
    },
    {
        "name": "FlexNumber2Label",
        "type": "string"
    },
    {
        "name": "FlexString1",
        "type": "string"
    },
    {
        "name": "FlexString1Label",
        "type": "string"
    },
    {
        "name": "FlexString2",
        "type": "string"
    },
    {
        "name": "FlexString2Label",
        "type": "string"
    },
    {
        "name": "IndicatorThreatType",
        "type": "string"
    },
    {
        "name": "LogSeverity",
        "type": "string"
    },
    {
        "name": "MaliciousIP",
        "type": "string"
    },
    {
        "name": "MaliciousIPCountry",
        "type": "string"
    },
    {
        "name": "MaliciousIPLatitude",
        "type": "real"
    },
    {
        "name": "MaliciousIPLongitude",
        "type": "real"
```

```
    },
    {
        "name": "Message",
        "type": "string"
    },
    {
        "name": "OldFileCreateTime",
        "type": "string"
    },
    {
        "name": "OldFileHash",
        "type": "string"
    },
    {
        "name": "OldFileID",
        "type": "string"
    },
    {
        "name": "OldFileModificationTime",
        "type": "string"
    },
    {
        "name": "OldFileName",
        "type": "string"
    },
    {
        "name": "OldFilePath",
        "type": "string"
    },
    {
        "name": "OldFilePermission",
        "type": "string"
    },
    {
        "name": "OldFileSize",
        "type": "int"
    },
    {
        "name": "OldFileType",
        "type": "string"
    },
    {
        "name": "OriginalLogSeverity",
        "type": "string"
    },
    {
        "name": "ProcessID",
        "type": "int"
    },
    {
        "name": "ProcessName",
        "type": "string"
    },
    {
        "name": "Protocol",
        "type": "string"
    },
    {
        "name": "Reason",
        "type": "string"
```

```
    },
    {
        "name": "ReceiptTime",
        "type": "string"
    },
    {
        "name": "ReceivedBytes",
        "type": "long"
    },
    {
        "name": "RemoteIP",
        "type": "string"
    },
    {
        "name": "RemotePort",
        "type": "string"
    },
    {
        "name": "ReportReferenceLink",
        "type": "string"
    },
    {
        "name": "RequestClientApplication",
        "type": "string"
    },
    {
        "name": "RequestContext",
        "type": "string"
    },
    {
        "name": "RequestCookies",
        "type": "string"
    },
    {
        "name": "RequestMethod",
        "type": "string"
    },
    {
        "name": "RequestURL",
        "type": "string"
    },
    {
        "name": "SentBytes",
        "type": "long"
    },
    {
        "name": "SimplifiedDeviceAction",
        "type": "string"
    },
    {
        "name": "SourceDnsDomain",
        "type": "string"
    },
    {
        "name": "SourceHostName",
        "type": "string"
    },
    {
        "name": "SourceIP",
        "type": "string"
```

```
        },
        {
            "name": "SourceMACAddress",
            "type": "string"
        },
        {
            "name": "SourceNTDomain",
            "type": "string"
        },
        {
            "name": "SourcePort",
            "type": "int"
        },
        {
            "name": "SourceProcessId",
            "type": "int"
        },
        {
            "name": "SourceProcessName",
            "type": "string"
        },
        {
            "name": "SourceServiceName",
            "type": "string"
        },
        {
            "name": "SourceSystem",
            "type": "string"
        },
        {
            "name": "SourceTranslatedAddress",
            "type": "string"
        },
        {
            "name": "SourceTranslatedPort",
            "type": "int"
        },
        {
            "name": "SourceUserID",
            "type": "string"
        },
        {
            "name": "SourceUserName",
            "type": "string"
        },
        {
            "name": "SourceUserPrivileges",
            "type": "string"
        },
        {
            "name": "StartTime",
            "type": "datetime"
        },
        {
            "name": "ThreatConfidence",
            "type": "string"
        },
        {
            "name": "ThreatDescription",
            "type": "string"
```

```
            },
            {
                "name": "ThreatSeverity",
                "type": "int"
            },
            {
                "name": "TimeGenerated",
                "type": "datetime"
            }
        ]
    },
    "Custom-SecurityEvent": {
        "columns": [{
                "name": "AccessList",
                "type": "string"
            },
            {
                "name": "AccessMask",
                "type": "string"
            },
            {
                "name": "AccessReason",
                "type": "string"
            },
            {
                "name": "Account",
                "type": "string"
            },
            {
                "name": "AccountDomain",
                "type": "string"
            },
            {
                "name": "AccountExpires",
                "type": "string"
            },
            {
                "name": "AccountName",
                "type": "string"
            },
            {
                "name": "AccountSessionIdentifier",
                "type": "string"
            },
            {
                "name": "AccountType",
                "type": "string"
            },
            {
                "name": "Activity",
                "type": "string"
            },
            {
                "name": "AdditionalInfo",
                "type": "string"
            },
            {
                "name": "AdditionalInfo2",
                "type": "string"
            },
```

```
        {
            "name": "AllowedToDelegateTo",
            "type": "string"
        },
        {
            "name": "Attributes",
            "type": "string"
        },
        {
            "name": "AuditPolicyChanges",
            "type": "string"
        },
        {
            "name": "AuditsDiscarded",
            "type": "int"
        },
        {
            "name": "AuthenticationLevel",
            "type": "int"
        },
        {
            "name": "AuthenticationPackageName",
            "type": "string"
        },
        {
            "name": "AuthenticationProvider",
            "type": "string"
        },
        {
            "name": "AuthenticationServer",
            "type": "string"
        },
        {
            "name": "AuthenticationService",
            "type": "int"
        },
        {
            "name": "AuthenticationType",
            "type": "string"
        },
        {
            "name": "AzureDeploymentID",
            "type": "string"
        },
        {
            "name": "CACertificateHash",
            "type": "string"
        },
        {
            "name": "CallerProcessId",
            "type": "string"
        },
        {
            "name": "CalledStationID",
            "type": "string"
        },
        {
            "name": "CallerProcessName",
            "type": "string"
        },
```

```
            {
                "name": "CallingStationID",
                "type": "string"
            },
            {
                "name": "CAPublicKeyHash",
                "type": "string"
            },
            {
                "name": "CategoryId",
                "type": "string"
            },
            {
                "name": "CertificateDatabaseHash",
                "type": "string"
            },
            {
                "name": "Channel",
                "type": "string"
            },
            {
                "name": "ClassId",
                "type": "string"
            },
            {
                "name": "ClassName",
                "type": "string"
            },
            {
                "name": "ClientAddress",
                "type": "string"
            },
            {
                "name": "ClientIPAddress",
                "type": "string"
            },
            {
                "name": "ClientName",
                "type": "string"
            },
            {
                "name": "CommandLine",
                "type": "string"
            },
            {
                "name": "CompatibleIds",
                "type": "string"
            },
            {
                "name": "Computer",
                "type": "string"
            },
            {
                "name": "DCDNSName",
                "type": "string"
            },
            {
                "name": "DeviceId",
                "type": "string"
            },
```

```
        {
            "name": "DisplayName",
            "type": "string"
        },
        {
            "name": "Disposition",
            "type": "string"
        },
        {
            "name": "DomainBehaviorVersion",
            "type": "string"
        },
        {
            "name": "DomainName",
            "type": "string"
        },
        {
            "name": "DomainPolicyChanged",
            "type": "string"
        },
        {
            "name": "DomainSid",
            "type": "string"
        },
        {
            "name": "EAPType",
            "type": "string"
        },
        {
            "name": "ErrorCode",
            "type": "int"
        },
        {
            "name": "ElevatedToken",
            "type": "string"
        },
        {
            "name": "EventID",
            "type": "int"
        },
        {
            "name": "EventData",
            "type": "string"
        },
        {
            "name": "EventSourceName",
            "type": "string"
        },
        {
            "name": "ExtendedQuarantineState",
            "type": "string"
        },
        {
            "name": "FailureReason",
            "type": "string"
        },
        {
            "name": "FileHash",
            "type": "string"
        },
```

```
{
    "name": "FilePath",
    "type": "string"
},
{
    "name": "FilePathNoUser",
    "type": "string"
},
{
    "name": "Filter",
    "type": "string"
},
{
    "name": "ForceLogoff",
    "type": "string"
},
{
    "name": "Fqbn",
    "type": "string"
},
{
    "name": "FullyQualifiedSubjectMachineName",
    "type": "string"
},
{
    "name": "FullyQualifiedSubjectUserName",
    "type": "string"
},
{
    "name": "GroupMembership",
    "type": "string"
},
{
    "name": "HandleId",
    "type": "string"
},
{
    "name": "HardwareIds",
    "type": "string"
},
{
    "name": "HomeDirectory",
    "type": "string"
},
{
    "name": "HomePath",
    "type": "string"
},
{
    "name": "ImpersonationLevel",
    "type": "string"
},
{
    "name": "IpAddress",
    "type": "string"
},
{
    "name": "IpPort",
    "type": "string"
},
```

```
{
    "name": "KeyLength",
    "type": "int"
},
{
    "name": "Level",
    "type": "string"
},
{
    "name": "LmPackageName",
    "type": "string"
},
{
    "name": "LocationInformation",
    "type": "string"
},
{
    "name": "LockoutDuration",
    "type": "string"
},
{
    "name": "LockoutObservationWindow",
    "type": "string"
},
{
    "name": "LockoutThreshold",
    "type": "string"
},
{
    "name": "LoggingResult",
    "type": "string"
},

{
    "name": "LogonHours",
    "type": "string"
},
{
    "name": "LogonID",
    "type": "string"
},
{
    "name": "LogonProcessName",
    "type": "string"
},
{
    "name": "LogonType",
    "type": "int"
},
{
    "name": "LogonTypeName",
    "type": "string"
},
{
    "name": "MachineAccountQuota",
    "type": "string"
},
{
    "name": "MachineInventory",
    "type": "string"
```

```
        },
        {
            "name": "MachineLogon",
            "type": "string"
        },
        {
            "name": "ManagementGroupName",
            "type": "string"
        },
        {
            "name": "MandatoryLabel",
            "type": "string"
        },
        {
            "name": "MaxPasswordAge",
            "type": "string"
        },
        {
            "name": "MemberName",
            "type": "string"
        },
        {
            "name": "MemberSid",
            "type": "string"
        },
        {
            "name": "MinPasswordAge",
            "type": "string"
        },
        {
            "name": "MinPasswordLength",
            "type": "string"
        },
        {
            "name": "MixedDomainMode",
            "type": "string"
        },
        {
            "name": "NASIdentifier",
            "type": "string"
        },
        {
            "name": "NASIPv4Address",
            "type": "string"
        },
        {
            "name": "NASIPv6Address",
            "type": "string"
        },
        {
            "name": "NASPort",
            "type": "string"
        },
        {
            "name": "NASPortType",
            "type": "string"
        },
        {
            "name": "NetworkPolicyName",
            "type": "string"
```

```
        },
        {
            "name": "NewDate",
            "type": "string"
        },
        {
            "name": "NewMaxUsers",
            "type": "string"
        },
        {
            "name": "NewProcessId",
            "type": "string"
        },
        {
            "name": "NewProcessName",
            "type": "string"
        },
        {
            "name": "NewRemark",
            "type": "string"
        },
        {
            "name": "NewShareFlags",
            "type": "string"
        },
        {
            "name": "NewTime",
            "type": "string"
        },
        {
            "name": "NewUacValue",
            "type": "string"
        },
        {
            "name": "NewValue",
            "type": "string"
        },
        {
            "name": "NewValueType",
            "type": "string"
        },
        {
            "name": "ObjectName",
            "type": "string"
        },
        {
            "name": "ObjectServer",
            "type": "string"
        },
        {
            "name": "ObjectType",
            "type": "string"
        },
        {
            "name": "ObjectValueName",
            "type": "string"
        },
        {
            "name": "OemInformation",
            "type": "string"
```

```
        },
        {
            "name": "OldMaxUsers",
            "type": "string"
        },
        {
            "name": "OldRemark",
            "type": "string"
        },
        {
            "name": "OldShareFlags",
            "type": "string"
        },
        {
            "name": "OldUacValue",
            "type": "string"
        },
        {
            "name": "OldValue",
            "type": "string"
        },
        {
            "name": "OldValueType",
            "type": "string"
        },
        {
            "name": "OperationType",
            "type": "string"
        },
        {
            "name": "PackageName",
            "type": "string"
        },
        {
            "name": "ParentProcessName",
            "type": "string"
        },
        {
            "name": "PartitionKey",
            "type": "string"
        },
        {
            "name": "PasswordHistoryLength",
            "type": "string"
        },
        {
            "name": "PasswordLastSet",
            "type": "string"
        },
        {
            "name": "PasswordProperties",
            "type": "string"
        },
        {
            "name": "PreviousDate",
            "type": "string"
        },
        {
            "name": "PreviousTime",
            "type": "string"
```

```
    },
    {
        "name": "PrimaryGroupId",
        "type": "string"
    },
    {
        "name": "PrivateKeyUsageCount",
        "type": "string"
    },
    {
        "name": "PrivilegeList",
        "type": "string"
    },
    {
        "name": "Process",
        "type": "string"
    },
    {
        "name": "ProcessId",
        "type": "string"
    },
    {
        "name": "ProcessName",
        "type": "string"
    },
    {
        "name": "ProfilePath",
        "type": "string"
    },
    {
        "name": "Properties",
        "type": "string"
    },
    {
        "name": "ProtocolSequence",
        "type": "string"
    },
    {
        "name": "ProxyPolicyName",
        "type": "string"
    },
    {
        "name": "QuarantineHelpURL",
        "type": "string"
    },
    {
        "name": "QuarantineSessionID",
        "type": "string"
    },
    {
        "name": "QuarantineSessionIdentifier",
        "type": "string"
    },
    {
        "name": "QuarantineState",
        "type": "string"
    },
    {
        "name": "QuarantineSystemHealthResult",
        "type": "string"
```

```
        },
        {
            "name": "RelativeTargetName",
            "type": "string"
        },
        {
            "name": "RemoteIpAddress",
            "type": "string"
        },
        {
            "name": "RemotePort",
            "type": "string"
        },
        {
            "name": "Requester",
            "type": "string"
        },
        {
            "name": "RequestId",
            "type": "string"
        },
        {
            "name": "RestrictedAdminMode",
            "type": "string"
        },
        {
            "name": "RowKey",
            "type": "string"
        },
        {
            "name": "RowsDeleted",
            "type": "string"
        },
        {
            "name": "SamAccountName",
            "type": "string"
        },
        {
            "name": "ScriptPath",
            "type": "string"
        },
        {
            "name": "SecurityDescriptor",
            "type": "string"
        },
        {
            "name": "ServiceAccount",
            "type": "string"
        },
        {
            "name": "ServiceFileName",
            "type": "string"
        },
        {
            "name": "ServiceName",
            "type": "string"
        },
        {
            "name": "ServiceStartType",
            "type": "int"
```

```
    },
    {
        "name": "ServiceType",
        "type": "string"
    },
    {
        "name": "SessionName",
        "type": "string"
    },
    {
        "name": "ShareLocalPath",
        "type": "string"
    },
    {
        "name": "ShareName",
        "type": "string"
    },
    {
        "name": "SidHistory",
        "type": "string"
    },

    {
        "name": "SourceSystem",
        "type": "string"
    },
    {
        "name": "Status",
        "type": "string"
    },
    {
        "name": "StorageAccount",
        "type": "string"
    },
    {
        "name": "SubcategoryId",
        "type": "string"
    },

    {
        "name": "Subject",
        "type": "string"
    },
    {
        "name": "SubjectAccount",
        "type": "string"
    },
    {
        "name": "SubjectDomainName",
        "type": "string"
    },
    {
        "name": "SubjectKeyIdentifier",
        "type": "string"
    },
    {
        "name": "SubjectLogonId",
        "type": "string"
    },
    {
```

```
            "name": "SubjectMachineName",
            "type": "string"
        },
        {
            "name": "SubjectMachineSID",
            "type": "string"
        },
        {
            "name": "SubjectUserName",
            "type": "string"
        },
        {
            "name": "SubjectUserSid",
            "type": "string"
        },
        {
            "name": "SubStatus",
            "type": "string"
        },
        {
            "name": "TableId",
            "type": "string"
        },
        {
            "name": "TargetDomainName",
            "type": "string"
        },
        {
            "name": "TargetInfo",
            "type": "string"
        },
        {
            "name": "TargetAccount",
            "type": "string"
        },
        {
            "name": "TargetLinkedLogonId",
            "type": "string"
        },
        {
            "name": "TargetLogonId",
            "type": "string"
        },
        {
            "name": "TargetOutboundDomainName",
            "type": "string"
        },
        {
            "name": "TargetOutboundUserName",
            "type": "string"
        },
        {
            "name": "TargetServerName",
            "type": "string"
        },
        {
            "name": "TargetSid",
            "type": "string"
        },
        {
```

```
            "name": "TargetUser",
            "type": "string"
        },
        {
            "name": "TargetUserName",
            "type": "string"
        },
        {
            "name": "TargetUserSid",
            "type": "string"
        },
        {
            "name": "Task",
            "type": "int"
        },
        {
            "name": "TemplateContent",
            "type": "string"
        },
        {
            "name": "TemplateDSObjectFQDN",
            "type": "string"
        },
        {
            "name": "TemplateInternalName",
            "type": "string"
        },
        {
            "name": "TemplateOID",
            "type": "string"
        },
        {
            "name": "TemplateSchemaVersion",
            "type": "string"
        },
        {
            "name": "TemplateVersion",
            "type": "string"
        },
        {
            "name": "TimeCollected",
            "type": "datetime"
        },
        {
            "name": "TimeGenerated",
            "type": "datetime"
        },
        {
            "name": "TokenElevationType",
            "type": "string"
        },
        {
            "name": "TransmittedServices",
            "type": "string"
        },
        {
            "name": "UserAccountControl",
            "type": "string"
        },
        {
```

```
                "name": "UserParametersUserParameters",
                "type": "string"
            },
            {
                "name": "UserPrincipalName",
                "type": "string"
            },
            {
                "name": "UserWorkstationsUserWorkstations",
                "type": "string"
            },
            {
                "name": "VendorIds",
                "type": "string"
            },
            {
                "name": "VirtualAccount",
                "type": "string"
            },
            {
                "name": "Workstation",
                "type": "string"
            },
            {
                "name": "WorkstationName",
                "type": "string"
            }
        ]
    },
    "Custom-Syslog": {
        "columns": [{
                "name": "Computer",
                "type": "string"
            },
            {
                "name": "EventTime",
                "type": "datetime"
            },
            {
                "name": "Facility",
                "type": "string"
            },
            {
                "name": "HostIP",
                "type": "string"
            },
            {
                "name": "HostName",
                "type": "string"
            },
            {
                "name": "ManagementGroupName",
                "type": "string"
            },
            {
                "name": "ProcessID",
                "type": "int"
            },
            {
                "name": "ProcessName",
```

```
                "type": "string"
            },
            {
                "name": "SeverityLevel",
                "type": "string"
            },
            {
                "name": "SourceSystem",
                "type": "string"
            },
            {
                "name": "SyslogMessage",
                "type": "string"
            },
            {
                "name": "TimeCollected",
                "type": "datetime"
            },
            {
                "name": "TimeGenerated",
                "type": "datetime"
            }
        ]
    },
    "Custom-WindowsEvent": {
        "columns": [{
                "name": "Channel",
                "type": "string"
            },
            {
                "name": "Computer",
                "type": "string"
            },
            {
                "name": "EventData",
                "type": "string"
            },
            {
                "name": "EventID",
                "type": "int"
            },
            {
                "name": "EventLevel",
                "type": "int"
            },
            {
                "name": "EventLevelName",
                "type": "string"
            },
            {
                "name": "EventOriginId",
                "type": "string"
            },
            {
                "name": "ManagementGroupName",
                "type": "string"
            },
            {
                "name": "Provider",
                "type": "string"
```

```
                },
                {
                    "name": "RawEventData",
                    "type": "string"
                },
                {
                    "name": "SourceSystem",
                    "type": "string"
                },
                {
                    "name": "Task",
                    "type": "int"
                },
                {
                    "name": "TimeGenerated",
                    "type": "datetime"
                }
            ]
        }
    },
    "destinations": {
        "logAnalytics": [{
            "workspaceResourceId": "[parameters('workspaceResourceId')]",
            "name": "logAnalyticsWorkspace"
        }]
    },
    "dataFlows": [{
            "streams": [
                "Custom-CommonSecurityLog"
            ],
            "destinations": [
                "logAnalyticsWorkspace"
            ],
            "transformKql": "source",
            "outputStream": "Microsoft-CommonSecurityLog"
        },
        {
            "streams": [
                "Custom-SecurityEvent"
            ],
            "destinations": [
                "logAnalyticsWorkspace"
            ],
            "transformKql": "source",
            "outputStream": "Microsoft-SecurityEvent"
        },
        {
            "streams": [
                "Custom-Syslog"
            ],
            "destinations": [
                "logAnalyticsWorkspace"
            ],
            "transformKql": "source",
            "outputStream": "Microsoft-Syslog"
        },
        {
            "streams": [
                "Custom-WindowsEvent"
            ],
```

```
                    "destinations": [
                        "logAnalyticsWorkspace"
                    ],
                    "transformKql": "source",
                    "outputStream": "Microsoft-WindowsEvent"
                }
            ]
        }
    }],
    "outputs": {
        "dataCollectionRuleId": {
            "type": "string",
            "value": "[resourceId('Microsoft.Insights/dataCollectionRules',
parameters('dataCollectionRuleName'))]"
        }
    }
}
```

15.5. Azure Event Hubs Integrations

To ingest data from an Azure Event Hub, you can create an Event Hub and a Cribl Stream Azure Event Hubs Source configured to consume data from the Event Hub. This page documents that integration.

Your Azure Event Hubs account must be at the Standard (or a higher) pricing tier, because the Basic pricing tier does not support the PLAIN authentication method Cribl Stream uses for Event Hubs.

Prepare Azure Event Hubs to Send Data to Cribl Stream

First, create an Azure Event Hub as described in the Azure documentation.

In this tutorial, we use `CriblTest` as the **Namespace name**. You can use any **Namespace name** you like, as long as it is unique across Azure.

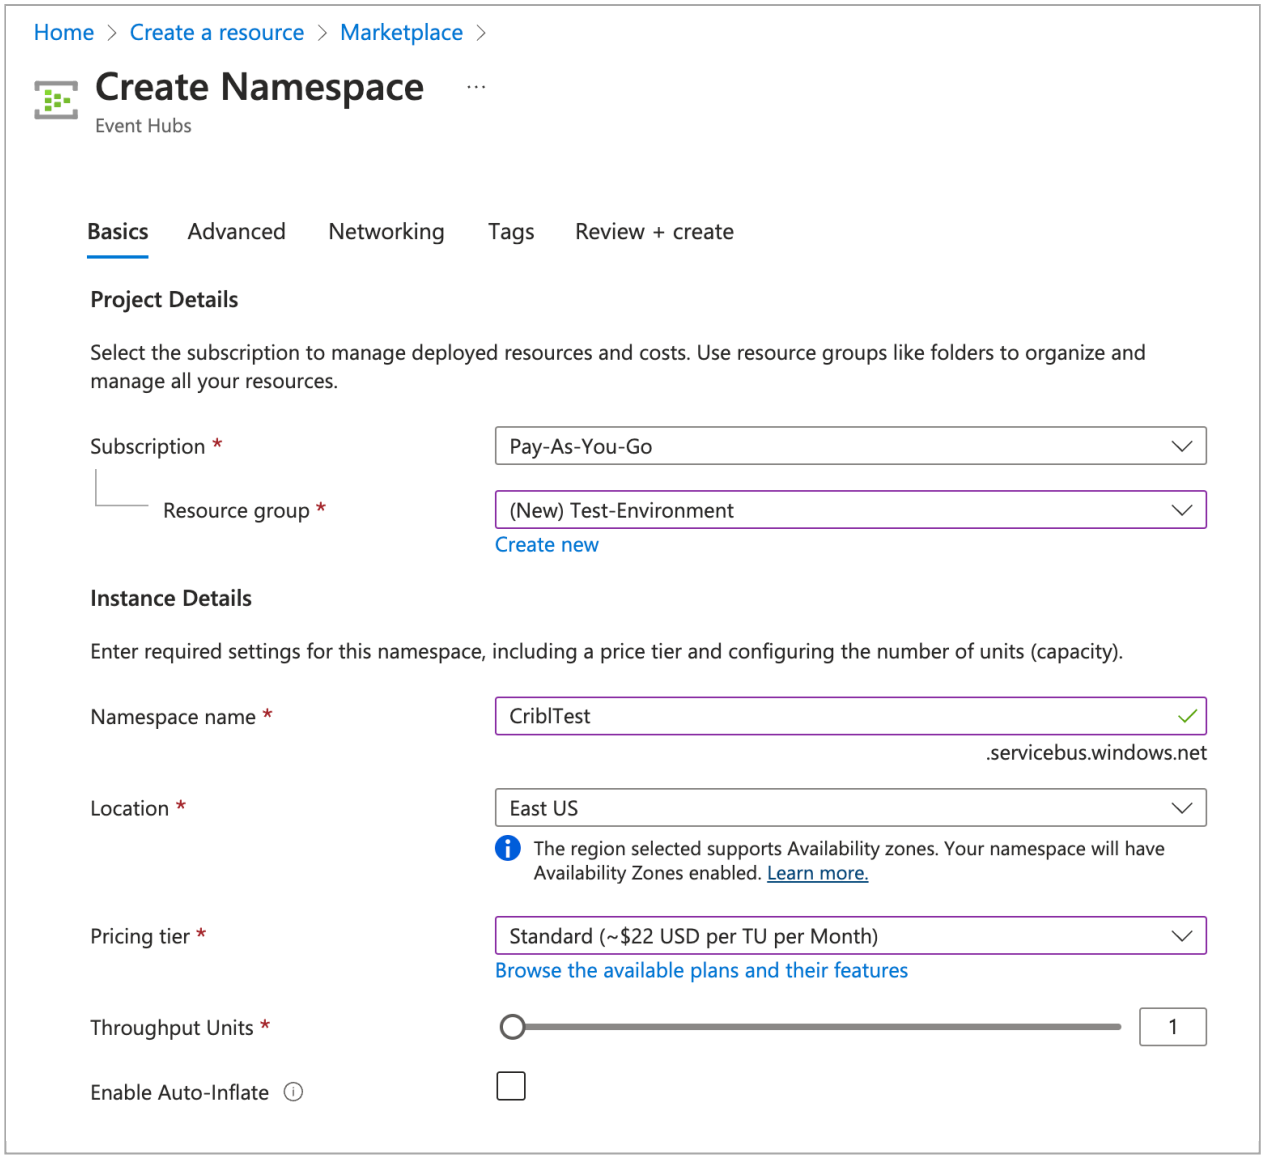

Creating an Event Hubs Namespace

Collect the information you will need when configuring Cribl Stream:

1. In the **Deployment** page, click **Go to Resource**.

2. Copy the **Host Name** and store it.

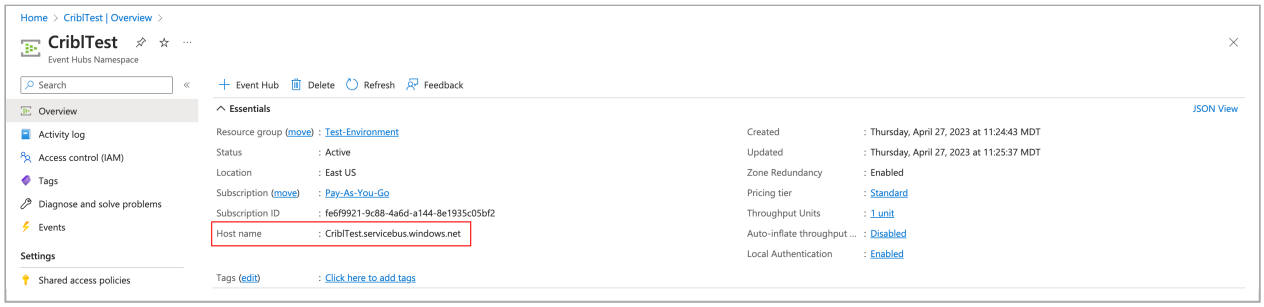

Finding the Host name and Shared access policies

3. Click **Shared Access Policies** to open the page where you can select policies for your Event Hubs Namespace, and then click `RootManageSharedAccessKey` to show details for that policy.

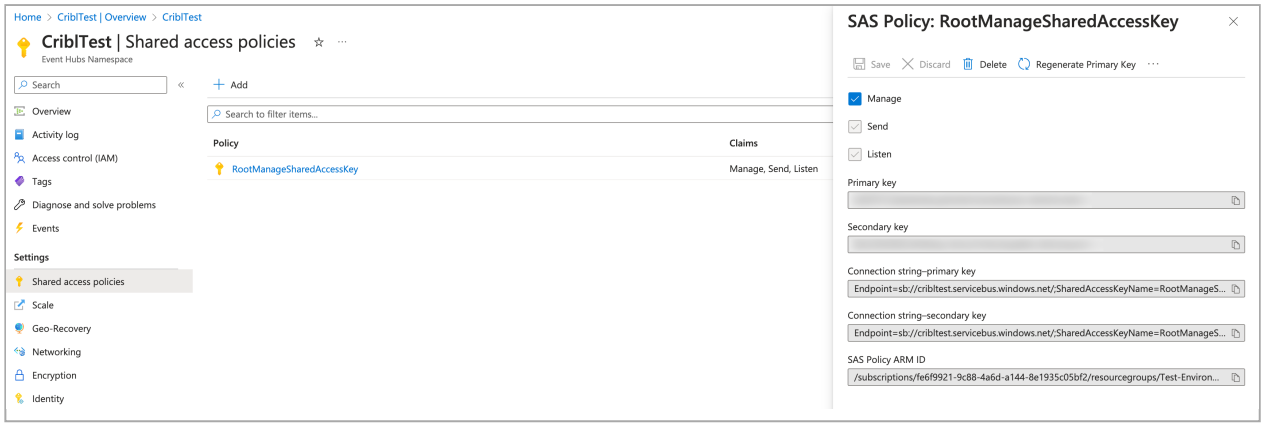

Viewing Shared access policies

4. Copy and securely store the **Connection String-primary key**.

5. Click on Event Hubs on the left-hand column and copy the Event Hubs name you want to ingest.

Configure the Azure Event Hubs Source in Cribl Stream

1. From a Cribl Stream instance's or Group's **Manage** submenu, select **Data** > **Sources**, then select **Azure Event Hubs** from the **Manage Sources** page's tiles or left nav. Click **New Source** to open the **Azure Event Hubs** > **New Source** modal.

2. In the **General Settings** tab, enter the following values:

   - **InputId**: An **InputId** of your choice. For example: `Stream`.
   - **Brokers**: End the Host Name you wrote down earlier and append port `9093`. For this example: `CriblTest.servicebus.windows.net:9093`.
   - **Event Hub Name**: The name of your Azure Event Hub. For this example: `AzureEH`. The **Event Hub Name** is equivalent to a Kafka topic. It should not be the same as the Azure Event Hubs namespace value you created above.
   - **Group ID**: This value can be `Cribl`, but the **Group ID** cannot be shared with other technologies. Sharing this value across technologies may cause unexpected behavior, such as failing to collect logs reliably.

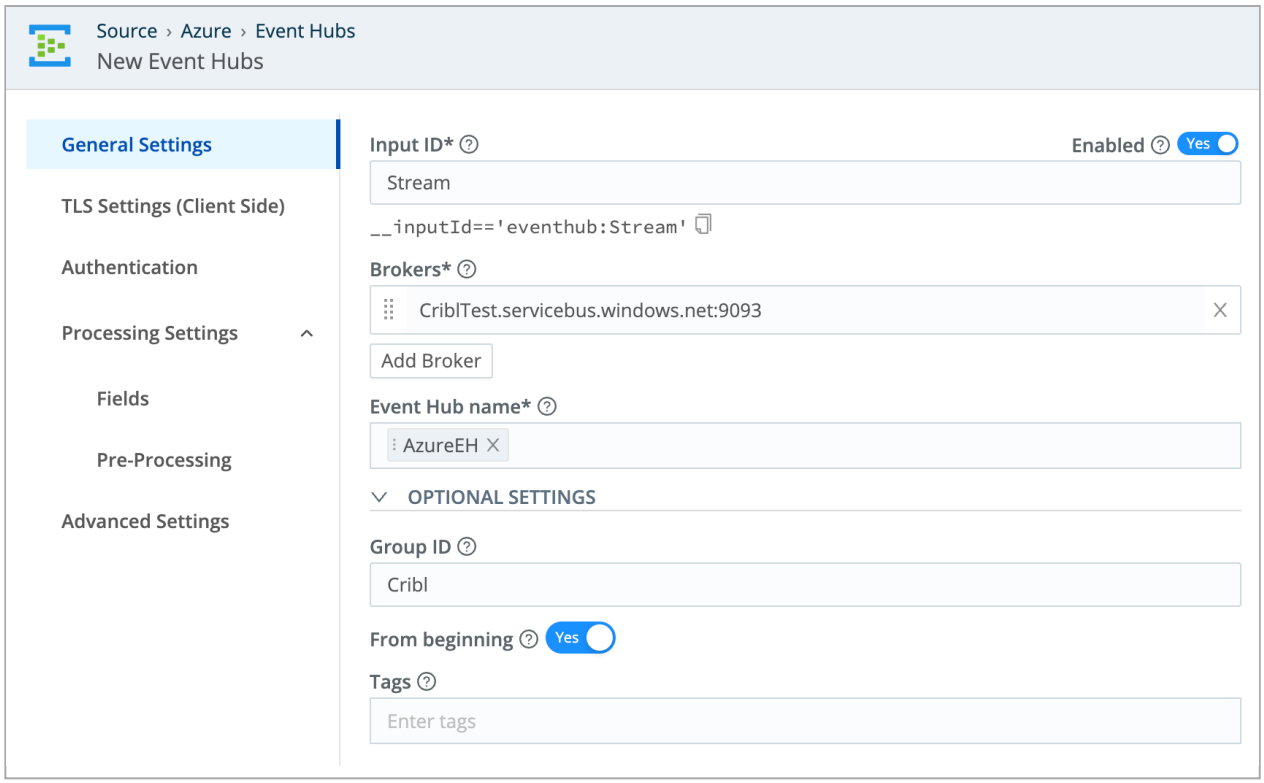

The General Settings tab

3. In the **Authentication** tab, enter or select the following values:

   - **SASL mechanism**: `PLAIN` (the only supported option).
   - **Username**: `$ConnectionString` (the default generated by Azure).
   - **Authentication Method**: Select `Manual` to use the Connection String Key generated by Azure Event Hubs.
   - **Password**: Enter the **Connection String-primary key** that you copied earlier.

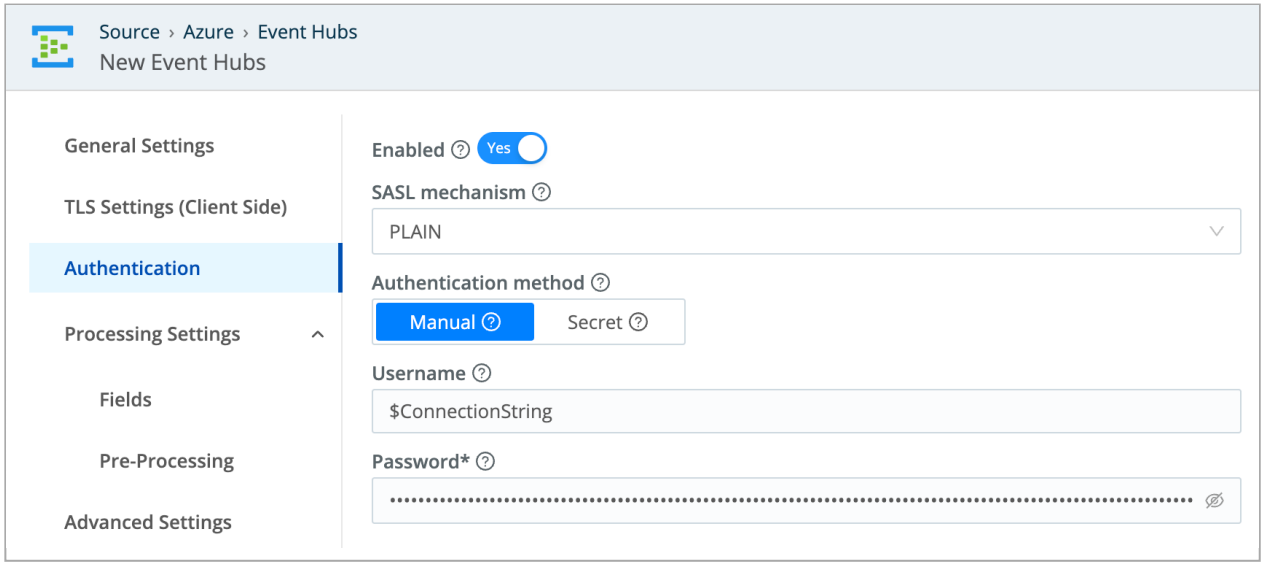

The Authentication tab

Verify that Data is Flowing from Your Azure Event Hub to Cribl Stream

Before you can verify that data is reaching Cribl Stream, you must ensure that it is flowing out of your Azure Event Hub in the first place.

One option is to configure a Datagen and a Route to send data to the Event Hub destination. We'll assume you have done that, or gotten data flowing from your Azure Event Hub in some other way.

1. In Cribl Stream, open the **Sources** > **Azure Event Hubs** > **Cribl Stream** page. This should show your Source, with a message confirming that it is working properly.

A working Source

2. Open the **Live Data** tab. You should see the data that is flowing from your Azure Event Hub to Cribl Stream.

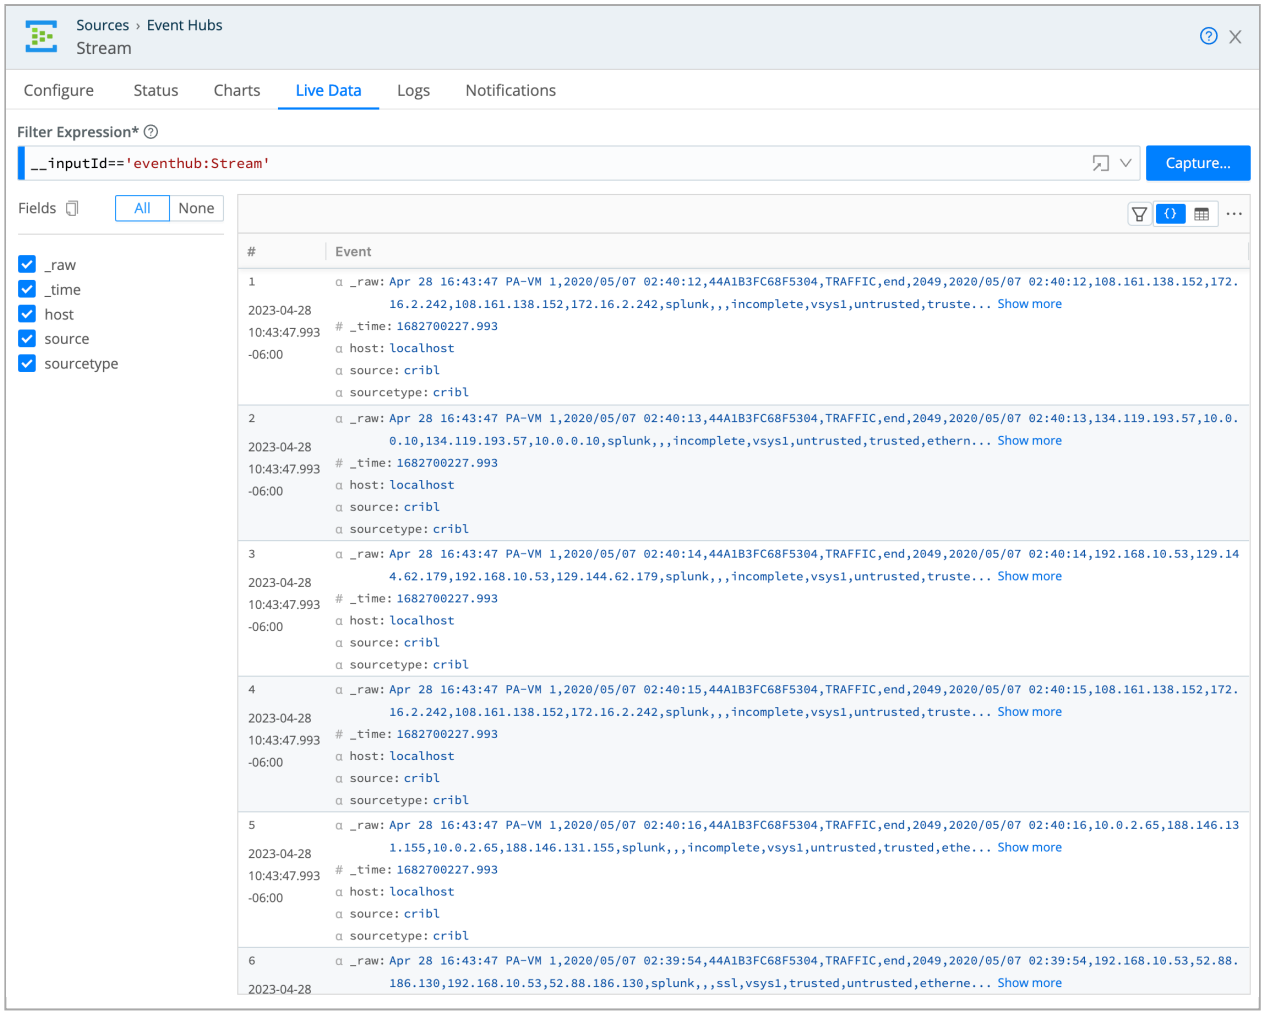

Viewing Live Data

15.6. Preparing the Azure Workspace

Currently, Cribl Stream supports sending data only to custom tables and certain native tables. For details, see Azure's Supported Tables topic.

To send data to custom tables from Cribl Stream, you must update a DCR Template with Stream definitions. We've provided an example DCR Template file.

Prepare the Azure Workspace

First, you must prepare the Azure Workspace to receive data from Cribl Stream, by registering Cribl Stream as an authorized application with the Microsoft Identity Platform.

> Use Copy buttons, where available, to copy complete values for later use without truncation.

Create Credentials for a New Azure Application

1. Log into the **Azure** portal as an `Administrator`.
2. Navigate to the portal's **App registration** section.
3. Click **New registration** to register an application.
4. Register a new application with the name `Cribl Stream`.

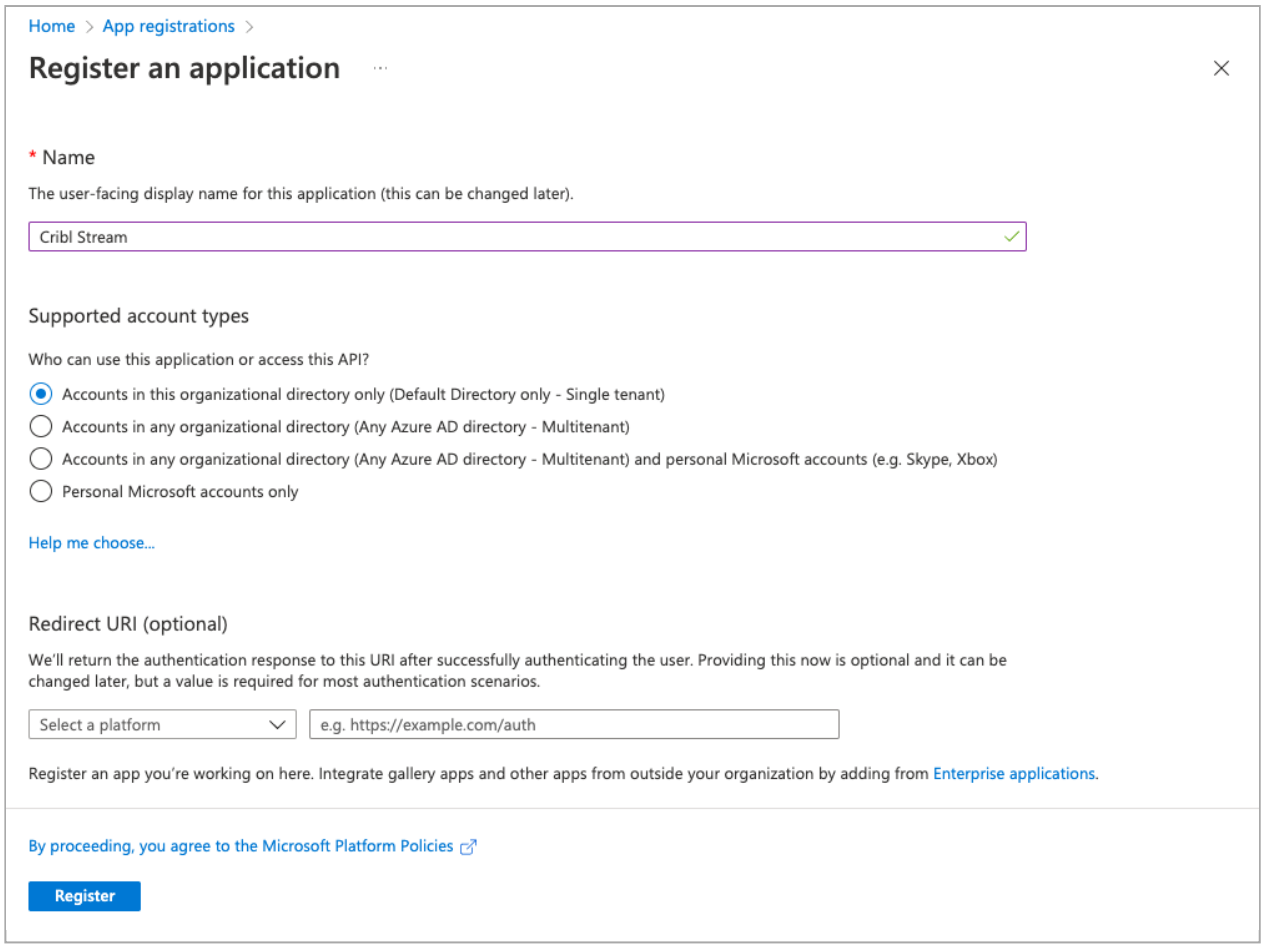

Registering an Application

5. Click **Register**.
6. Store the **Application (client) ID** and **Directory (tenant) ID** for later steps.
7. In your newly registered application, select the **Certificates & secrets** tab.
8. Create a **New client secret**.
9. Store the secret **Value** for later steps.

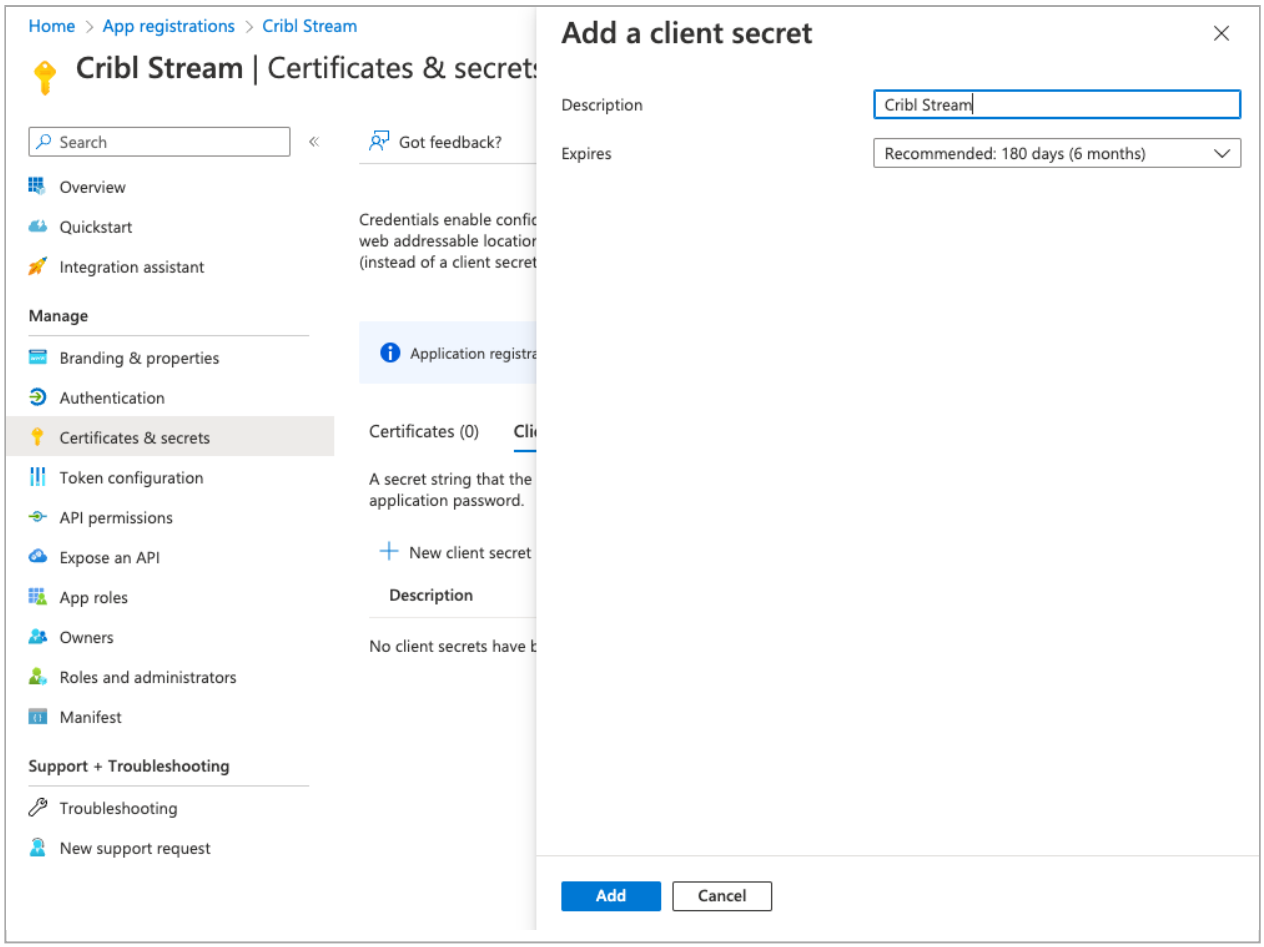

Creating a client secret

Create a Data Collection Endpoint

1. Navigate to the Azure portal's **Monitor** service.
2. Under **Settings**, select **Data Collection Endpoints**.
3. Select **Create** to add a new endpoint named `Cribl-Stream-Ingestion`.
4. Select the appropriate Subscription and Resource Group used by your organization.
5. Select **Review + create**, review your changes, then select **Create**.
6. In the list of **Data Collection Endpoints**, open the newly created endpoint. (You might need to refresh the page to see it.)

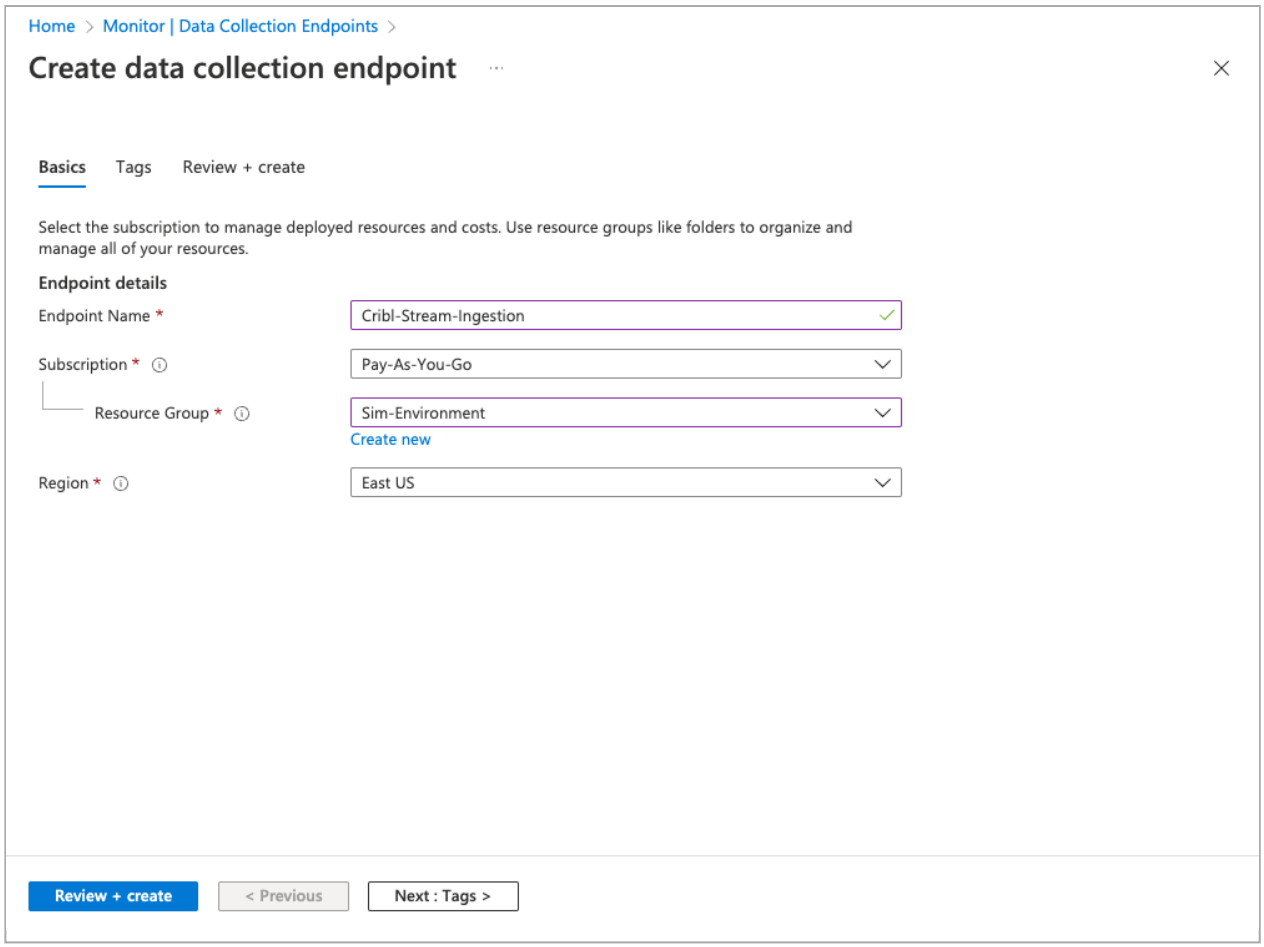

Creating a Data Collection Endpoint

7. Navigate to the **Overview** page, and copy and store the **Logs Ingestion** URL.
8. Select **JSON view**, and store the value of the **Resource ID** (gray box at the top) for later use.

Find the Log Analytics Workspace Resource ID

1. Navigate to the Azure portal's **Log Analytics workspaces** service.
2. Select the workspace that will receive data.
3. From the **Overview** page, select **JSON view**, and store the value of the **Resource ID** (gray box at the top) for later use.

Create Data Collection Rule

1. Navigate to the Azure portal's **Deploy a custom template** service.
2. Select **Build your own template in the editor**.
3. Select **Load file** and upload the DCR Template.
4. Click **Save**.

5. Select the appropriate Subscription and Resource Group used by your organization.
6. Name the new Data Collection Rule `Cribl-Stream-Ingestion-Rule`.
7. Enter the Log Analytics **Workspace Resource ID**, and the Data Collection **Endpoint Resource ID**, that you stored in the previous steps.
8. To create the Data Collection Rule, click **Review + create**, followed by **Create**.

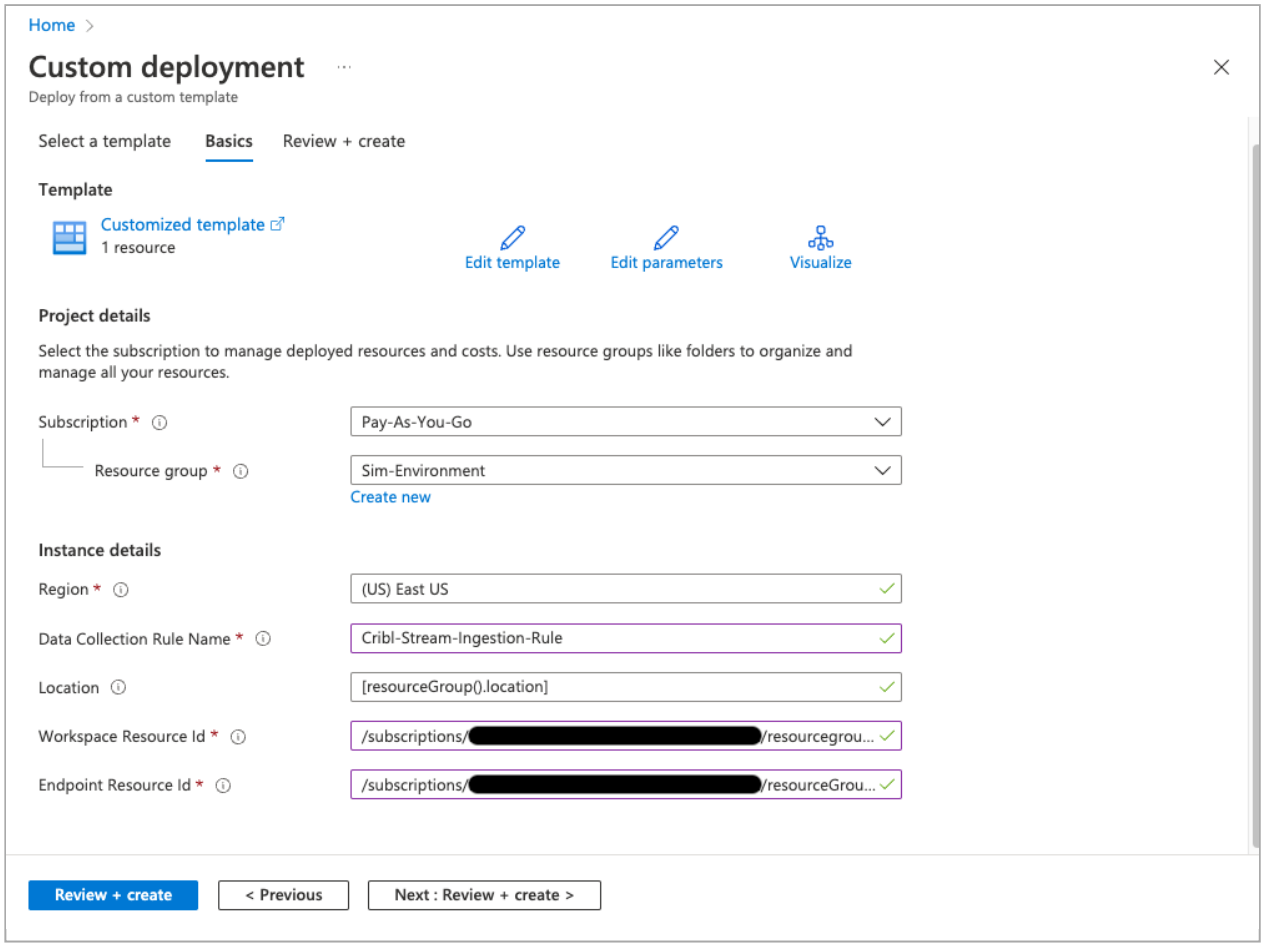

Registering an Application

Add Role Assignment

1. Once the template has been deployed, click **Go to resource**.
2. From the Overview page, select the **JSON view**, and store the **immutableId** from the JSON body (without quotes) for later use.
3. Click the Data Collection Rule's **Access control (IAM)**.
4. Click **Add role assignment**.
5. Select the **Monitoring Metrics Publisher** role, then click **Next**.
6. Click **+ Select members**.

7. Search for and select `Cribl Stream` (the app you created earlier), then click **Select** to confirm the selection.
8. Click **Review + assign** to review changes.
9. Click **Review + assign** again to implement the permissions update.

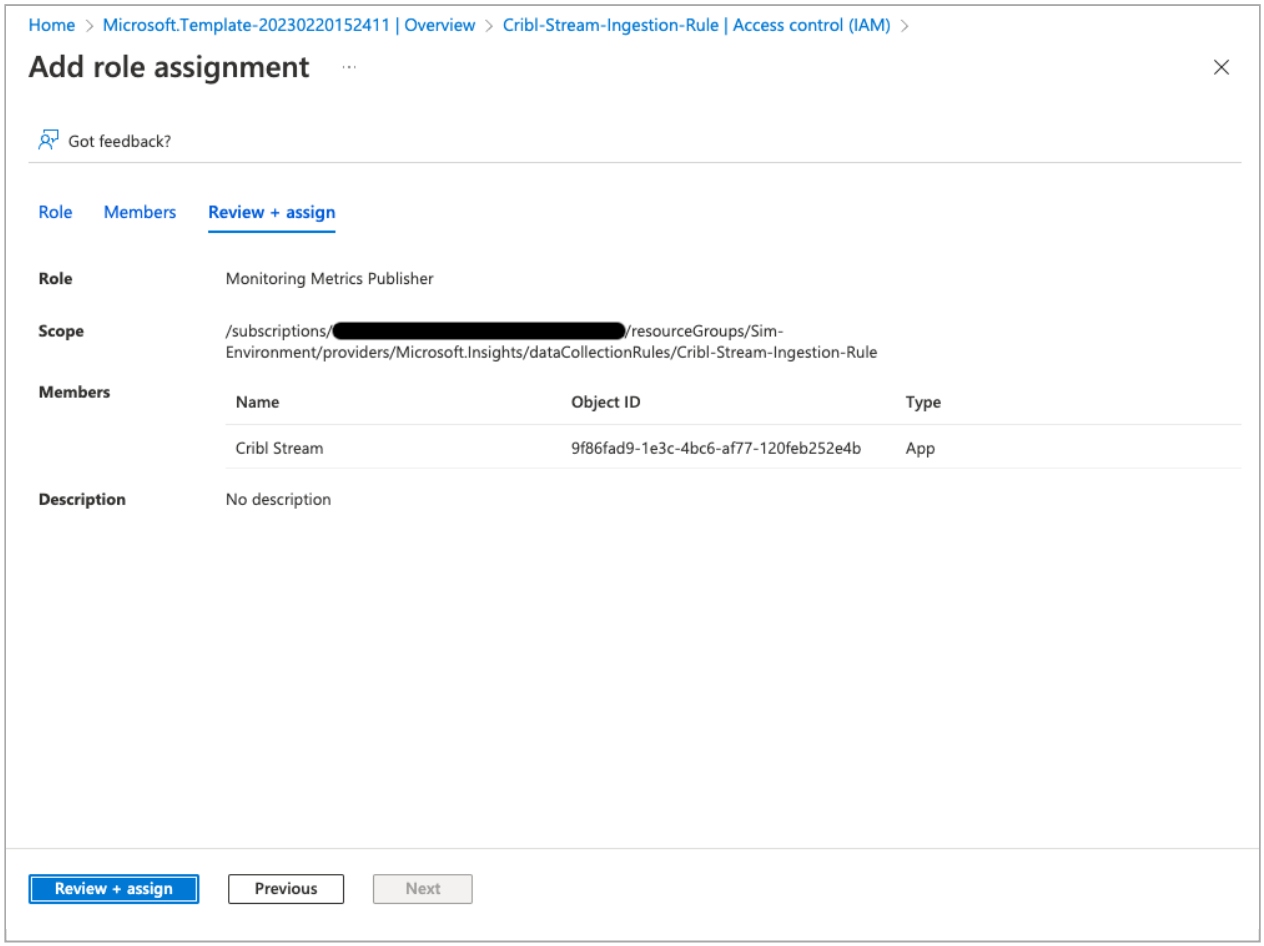

Adding a Role Assignment

15.7. BigPanda/Webhook Integration

You can configure Cribl Stream to send Webhook notifications to the BigPanda IT Ops platform. These notifications arrive in BigPanda as Alerts, which BigPanda correlates into Incidents.

Before you begin, you should have an Admin account on a BigPanda Cloud instance.

Prepare BigPanda to Receive Data from Cribl Stream

> The BigPanda **App Key** and **Access Token** are separate and independent. The **Access Token** is a 32-character string that is part of the value that BigPanda generates for the `Authorization` HTTP header. (It functions like an auth token or bearer token.)

1. Log into your BigPanda Cloud instance as an Admin.
2. In the **Integrations** tab, click **New Integration**.

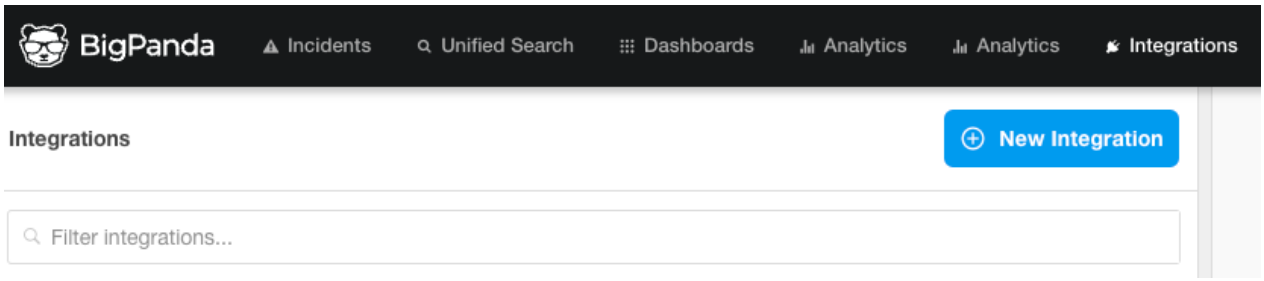

The **Integrations** tab

3. In the **Create a New Integration** modal, select the Cribl tile.

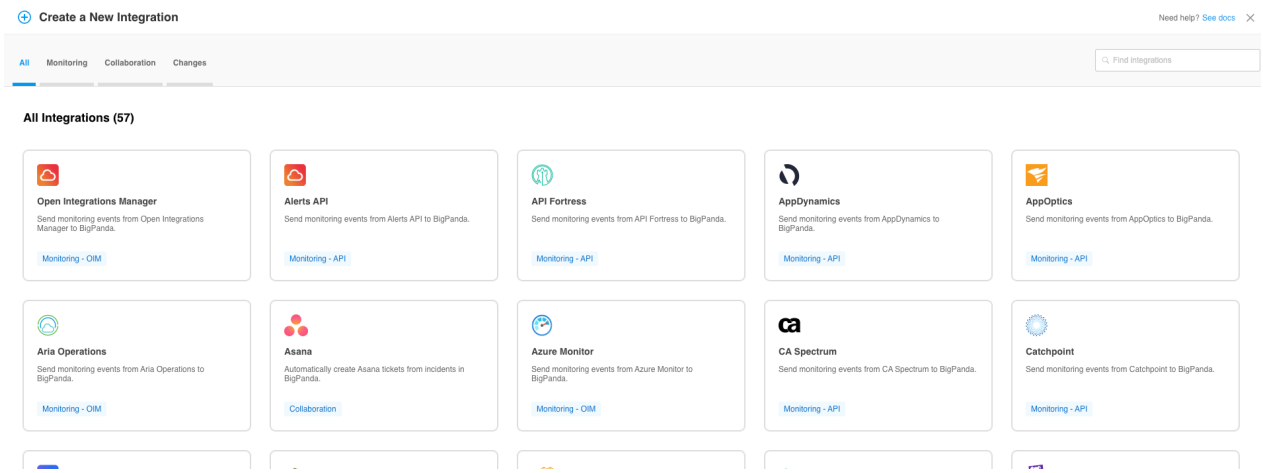

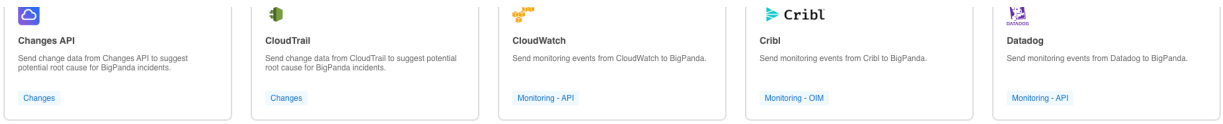

The **Create a New Integration** modal

- This opens the **Cribl Integration** page.

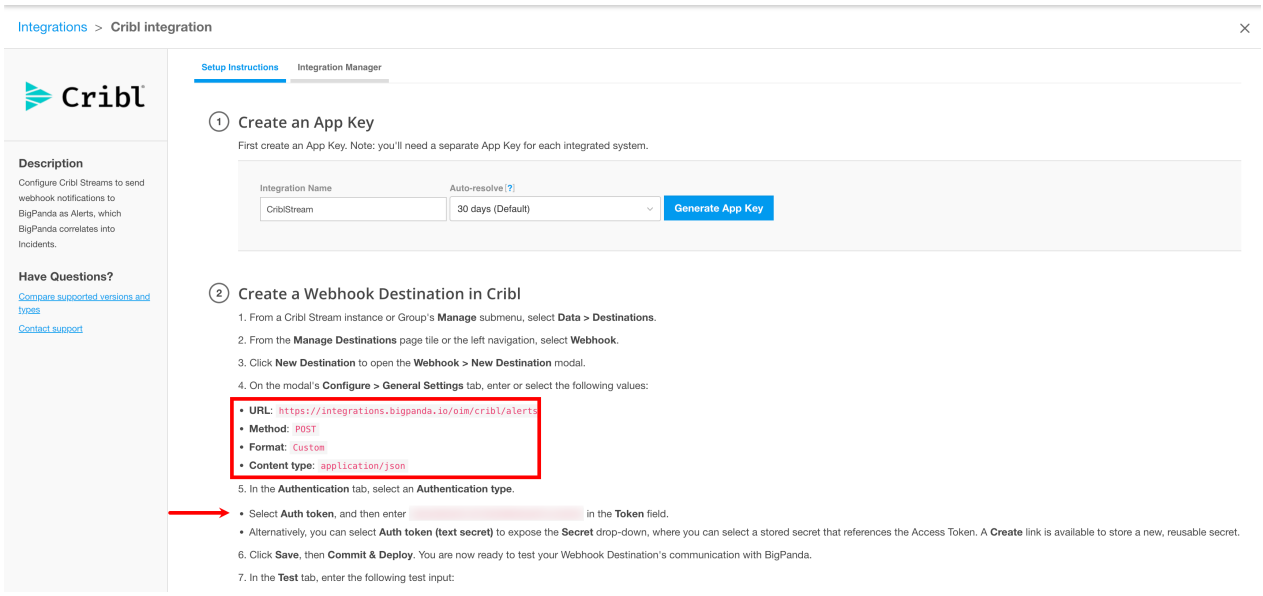

The **Cribl Integration** page

4. In the **Create an App Key** section, generate an App Key named `Cribl Stream`. You'll need the App Key when configuring Cribl Stream in the next section. Cribl Stream will insert the App Key into every event it sends to BigPanda.

5. BigPanda will generate a page containing setup instructions for the Cribl Stream Webhook Destination. Store the following information:

    - **URL**: `https://integrations.bigpanda.io/oim/cribl/alerts`.
    - **Method**: `POST`.
    - **Format**: `Custom`.
    - **Content Type**: `application/json`.
    - **Authentication token**: A 32-character `<auth-token>`.

    The BigPanda page will also contain test code. You'll need the preceding information and the test code when configuring Cribl Stream in the next section.

Configure the Webhook Destination in Cribl Stream

1. From a Cribl Stream instance's or Group's **Manage** submenu, select **Data** > **Destinations**. Then select **Webhook** from the **Manage Destinations** page's tiles or left nav. Click **New Destination** to open the **Webhook** > **New Destination** modal.

2. On the modal's **Configure** > **General Settings** tab, enter or select the following values:

   - **URL**: Enter the Alerts API endpoint URL, for example: `https://integrations.bigpanda.io/oim/cribl/alerts`.
   - **Method**: `POST`.
   - **Format**: `Custom`.
   - **Content type**: `application/json`.

3. In the **Authentication** tab, select an **Authentication type**.

   - You can select **Auth token**, and then enter the Access Token (the 32-character string you wrote down earlier) in the **Token** field.

   - Alternatively, select **Auth token (text secret)** to expose the **Secret** drop-down, in which you can select a stored secret that references the Access Token. A **Create** link is available to store a new, reusable secret.

4. Click **Save**, then **Commit & Deploy**. You are now ready to test your Webhook Destination's communication with Big Panda.

5. In the **Test** tab, enter the test code from the BigPanda setup instructions. It will look like this:

```
[
  {
      "app_key": "<your_app_key>",
      "status": "critical",
      "host": "production-database-1",
      "timestamp": 1402302570,
      "check": "CPU overloaded",
      "description": "CPU is above upper limit (70%)",
      "cluster": "production-databases",
      "my_unique_attribute": "myUniqueValue987654321"
  }
]
```

5. Click **Run Test**.

This should send an alert to BigPanda.

BigPanda Alerts API Requirements

HTTP payloads sent to the BigPanda Alerts API must satisfy rules that are beyond the scope of this topic. For details, see the BigPanda documentation about Alert Properties and Integration Diagnostics.

However, at at minimum, three fields are required:

1. `app_key`.
2. `status`.
3. `host` OR `service` OR `application` OR `device`.

Thus, the test input shown above works even if you omit all but the first three fields.

There are other possibilities for the third field, but they require understanding how BigPanda determines the `primary_property` of an Alert, plus some additional BigPanda configuration. See the BigPanda links above for details.

BigPanda Alert Deduplication

BigPanda processes an alert's Primary and Secondary properties on ingestion. These properties default to `host` and `check`.

When an alert has the same Primary and Secondary properties as those received in previous alerts, the Incident Console shows only the timestamp from the initial event.

For more information on this functionality, see the BigPanda pages Deduplication and Incident_identifier.

Verify that BigPanda is Receiving Notifications and Events

In the BigPanda **Incidents** tab, you should see an Incident whose Source is `Cribl Stream`. The details of the test input you sent from the Webhook Destination should appear in an Alert within that Incident. If so: It works!

15.8. Splunk Cloud and BYOL Integrations

Cribl Stream can send data to these flavors of Splunk Cloud:

- The free, single-instance trial version.
- A distributed Splunk Cloud instance with clustered indexers.
- A Bring Your Own License (BYOL) deployment, either in a non-Splunk cloud or on-prem.

You have a choice of two methods for sending the data:

- Splunk HEC (HTTP Event Collector).
- The S2S (Splunk-to-Splunk) protocol.

Of all the possible combinations, three have proven most useful in the field:

- Using Splunk HEC with the trial version of Splunk.
- Using S2S with a distributed instance of Splunk.
- Using S2S with a BYOL deployment of Splunk.

> Events sent to the Splunk HEC Destination will show higher outbound data volume than the same events sent to the Splunk Single Instance or Splunk Load Balanced Destinations, which use the S2S binary protocol.

When to Use Splunk HEC

Splunk HEC is fast and easy to set up. Under the hood, it uses the HTTP/S protocol. This offers better compression than S2S, which is a binary protocol.

The Splunk HEC endpoints are virtual endpoints, front-ended with load balancers – ELB for AWS, or GLB for GCP. This provides good load-balancing.

Cribl generally recommends using Splunk HEC for integrating with Splunk Cloud, because (1) it requires fewer connections than S2S, and therefore consumes less memory; and (2) because its superior compression yields lower egress costs.

When to Use S2S

S2S allows each Cribl Stream Worker Process to connect to multiple indexers concurrently, which distributes data very effectively. This helps significantly with Splunk search, by placing a smaller burden on a larger number of indexers. This support for concurrent connections is the main advantage of S2S. Consider S2S if you plan to route all your data through Cribl Stream first, and you prioritize search performance.

S2S enables TLS compression by default. Do not confuse TLS compression with the `compressed` setting in the Splunk `inputs.conf` file, which is a different thing, and is for non-TLS connections only.

See the Splunk documentation about the `compressed` setting, and about TLS, which Splunk configuration files still refer to as SSL.

Using Splunk HEC

Identify Your Splunk HEC Endpoint

In Splunk Cloud, identify your HEC endpoint, as described in the Splunk documentation. Here are some example URL patterns for HEC endpoints:

- Free version: `https://inputs.<cloud_stack_name>:8088/<endpoint>`
- Paid Version in AWS: `https://http-inputs-<cloud_stack_name>:443/<endpoint>`
- Paid version in GCP: `https://http-inputs.<cloud_stack_name>:443/<endpoint>`

A HEC endpoint for a paid version of Splunk Cloud on AWS with an endpoint for JSON-formatted events, for a company called "Acme Group," might look like this:

```
https://http-inputs-acmegroup.splunkcloud.com:443/services/collector/event
```

Copy the endpoint URL for use when configuring Cribl Stream in the next section.

Create HEC Tokens

You need to create at least one HEC token. For deployments where you set up routing to individual indexes, or you use HEC tokens for RBAC on Splunk, you will create multiple HEC tokens.

1. In the Splunk UI, open the **Settings** menu and click **Data Inputs**.

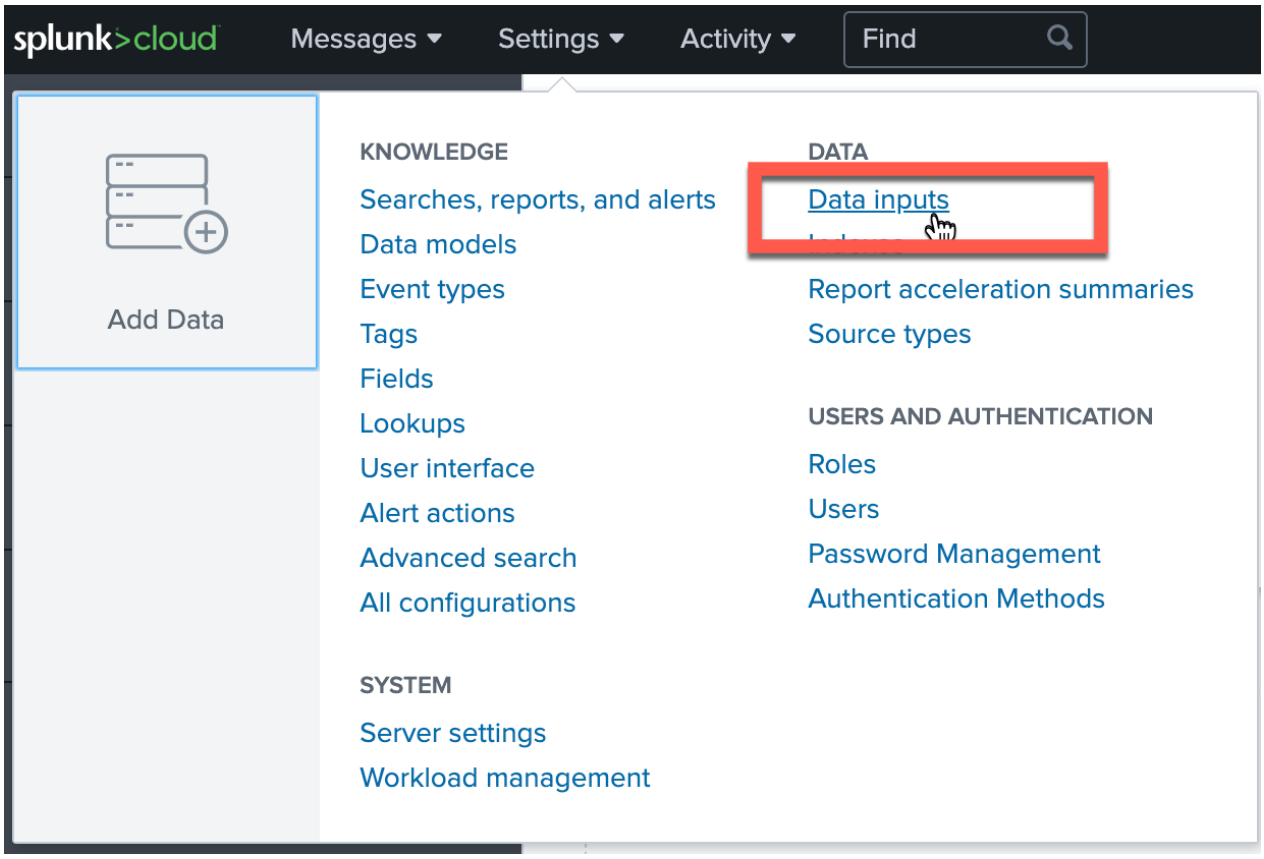

Settings > Data inputs

2. In the resulting modal's **HTTP Event Collector** section, click **+ Add new**.

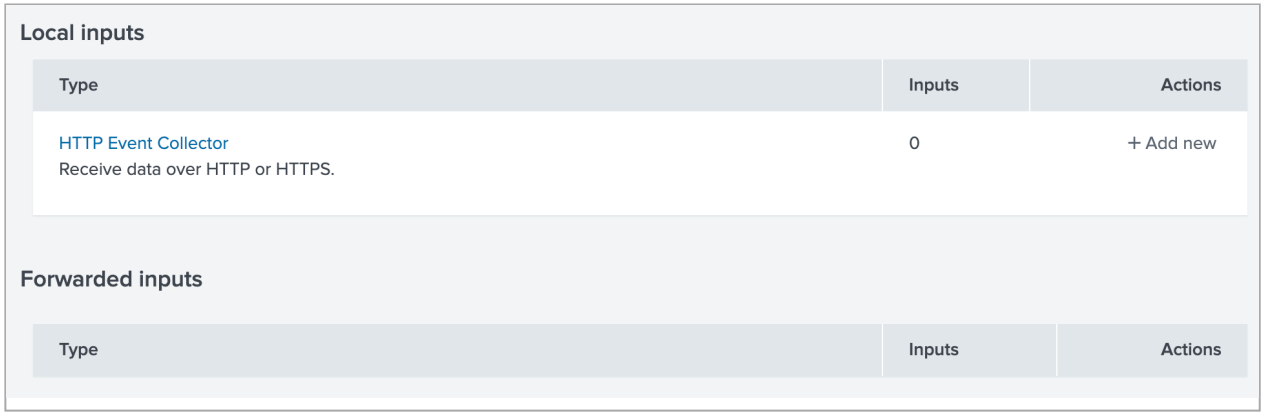

Adding a new HTTP Event Collector

3. Name the new token and click **Next**.

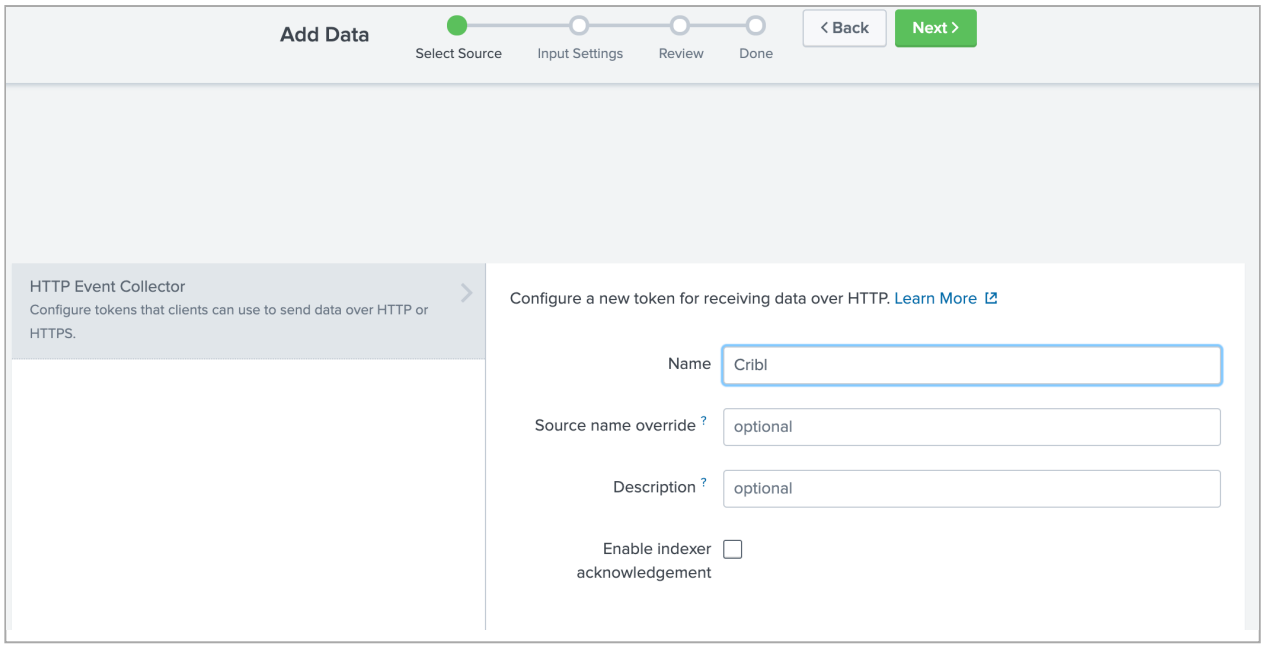

Adding a new token

4. Do not add any indexes. This way HEC can write to any index. If you prefer a default index other than `main`, choose it from the **Default index** drop-down.

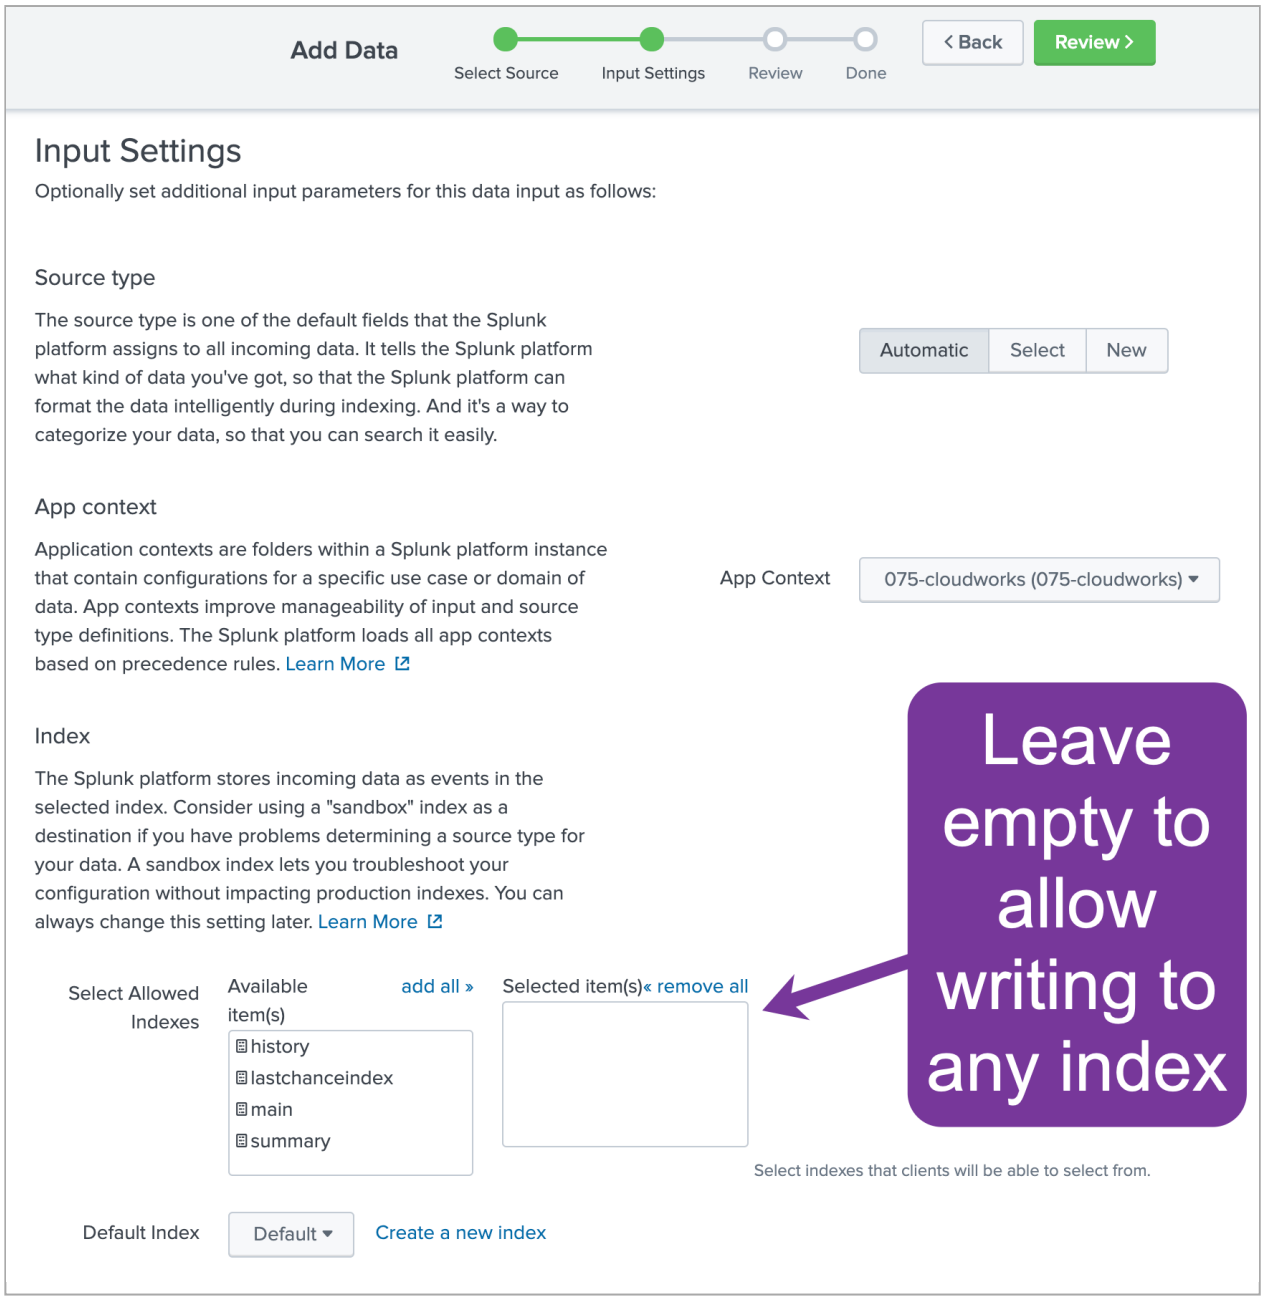

Indexes for the new token

5. Once the token has been created, copy it for use when configuring Cribl Stream in the next section.

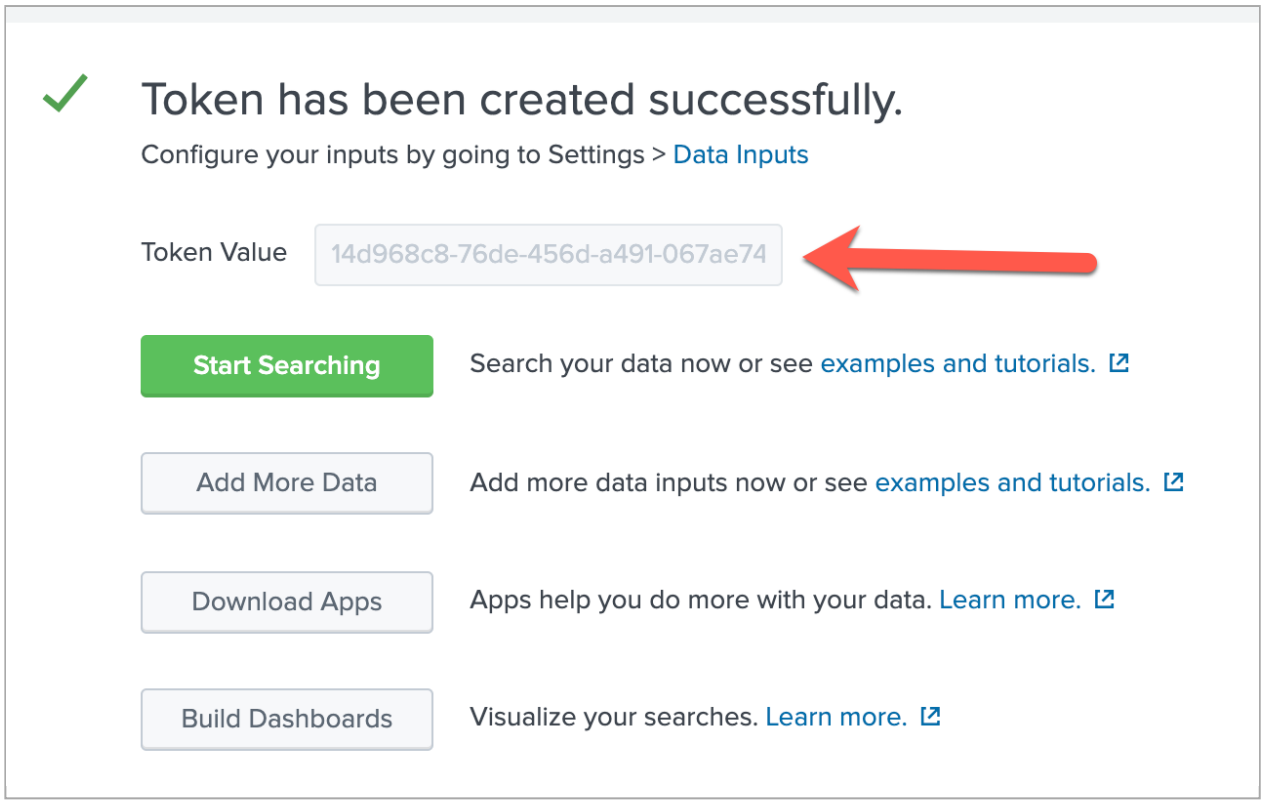

Copying the token value

Add a Splunk HEC Destination in Cribl Stream

From a Cribl Stream instance's or Group's **Manage** submenu, select **Data** > **Destinations**, then select **Splunk** > **HEC** from the **Manage Destinations** page's tiles or left nav. Click **Add New** to open the **HEC** > **New Destination** modal.

In the **General Settings** tab:

- Grab the values that you copied in the previous section, and paste them into the **Splunk HEC Endpoint** and **HEC Auth Token** fields, respectively. Be sure to specify HTTPS, because the endpoint will default to HTTP.
- Click **Save**.
- Click **Commit & Deploy**.

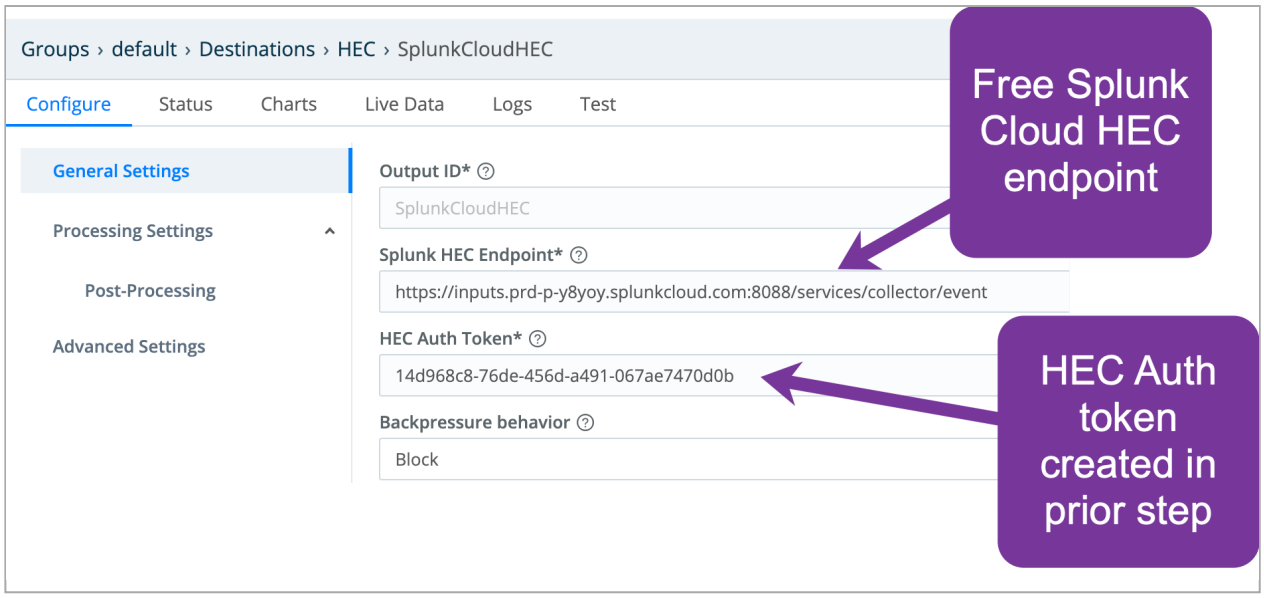

Populating General Settings with values from Splunk

Verify that Data is Flowing from Cribl Stream to Splunk Cloud

> Be sure you have committed and deployed the newly created configuration. Otherwise, data will not flow to Splunk Cloud, and verification will fail.

1. In Cribl Stream, open the Splunk HEC Destination that you created in the previous section.
    - In the configuration modal's **Test** tab, click **Run Test**.
    - You should see a **Success** message.

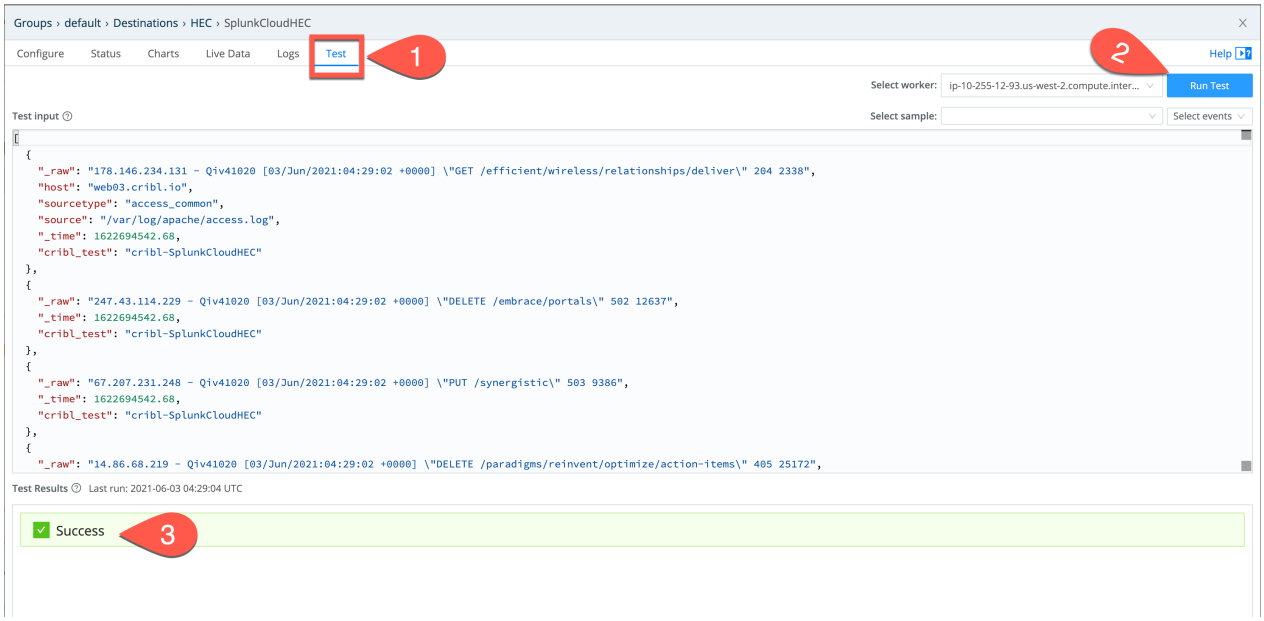

2. In Splunk, search on `index=main cribl_pipe=*`. Events that you sent from the Cribl Stream **Test** tab should appear in the search results.

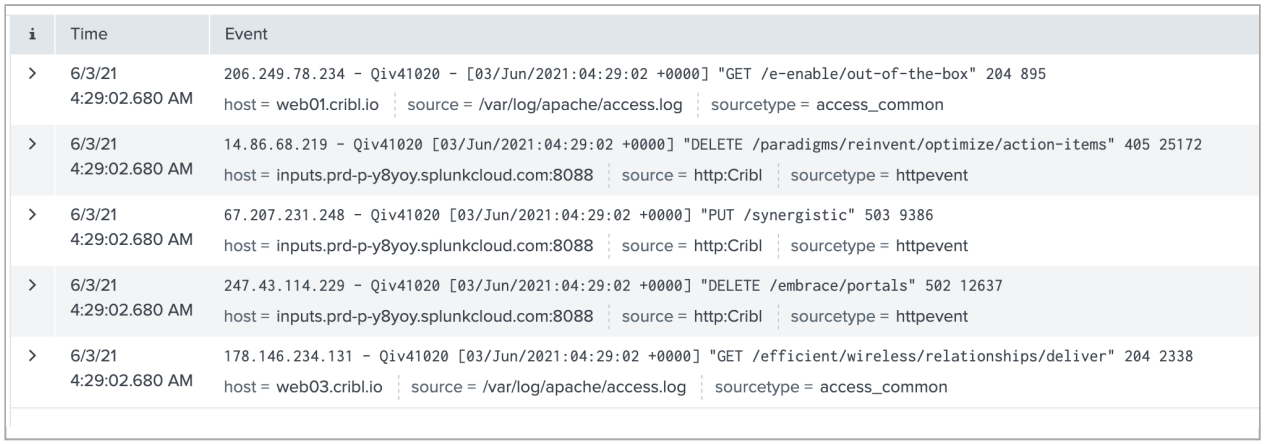

i	Time	Event
>	6/3/21 4:29:02.680 AM	206.249.78.234 - Qiv41020 - [03/Jun/2021:04:29:02 +0000] "GET /e-enable/out-of-the-box" 204 895 host = web01.cribl.io source = /var/log/apache/access.log sourcetype = access_common
>	6/3/21 4:29:02.680 AM	14.86.68.219 - Qiv41020 [03/Jun/2021:04:29:02 +0000] "DELETE /paradigms/reinvent/optimize/action-items" 405 25172 host = inputs.prd-p-y8yoy.splunkcloud.com:8088 source = http:Cribl sourcetype = httpevent
>	6/3/21 4:29:02.680 AM	67.207.231.248 - Qiv41020 [03/Jun/2021:04:29:02 +0000] "PUT /synergistic" 503 9386 host = inputs.prd-p-y8yoy.splunkcloud.com:8088 source = http:Cribl sourcetype = httpevent
>	6/3/21 4:29:02.680 AM	247.43.114.229 - Qiv41020 [03/Jun/2021:04:29:02 +0000] "DELETE /embrace/portals" 502 12637 host = inputs.prd-p-y8yoy.splunkcloud.com:8088 source = http:Cribl sourcetype = httpevent
>	6/3/21 4:29:02.680 AM	178.146.234.131 - Qiv41020 [03/Jun/2021:04:29:02 +0000] "GET /efficient/wireless/relationships/deliver" 204 2338 host = web03.cribl.io source = /var/log/apache/access.log sourcetype = access_common

Events flowing to Splunk

Using S2S

Prepare Splunk Cloud for Cribl Stream Integration

1. In Splunk Cloud, download the Splunk Cloud Universal Forwarder credentials app to your desktop.

2. Change the file suffix from `.spl` to `.tar.gz`.

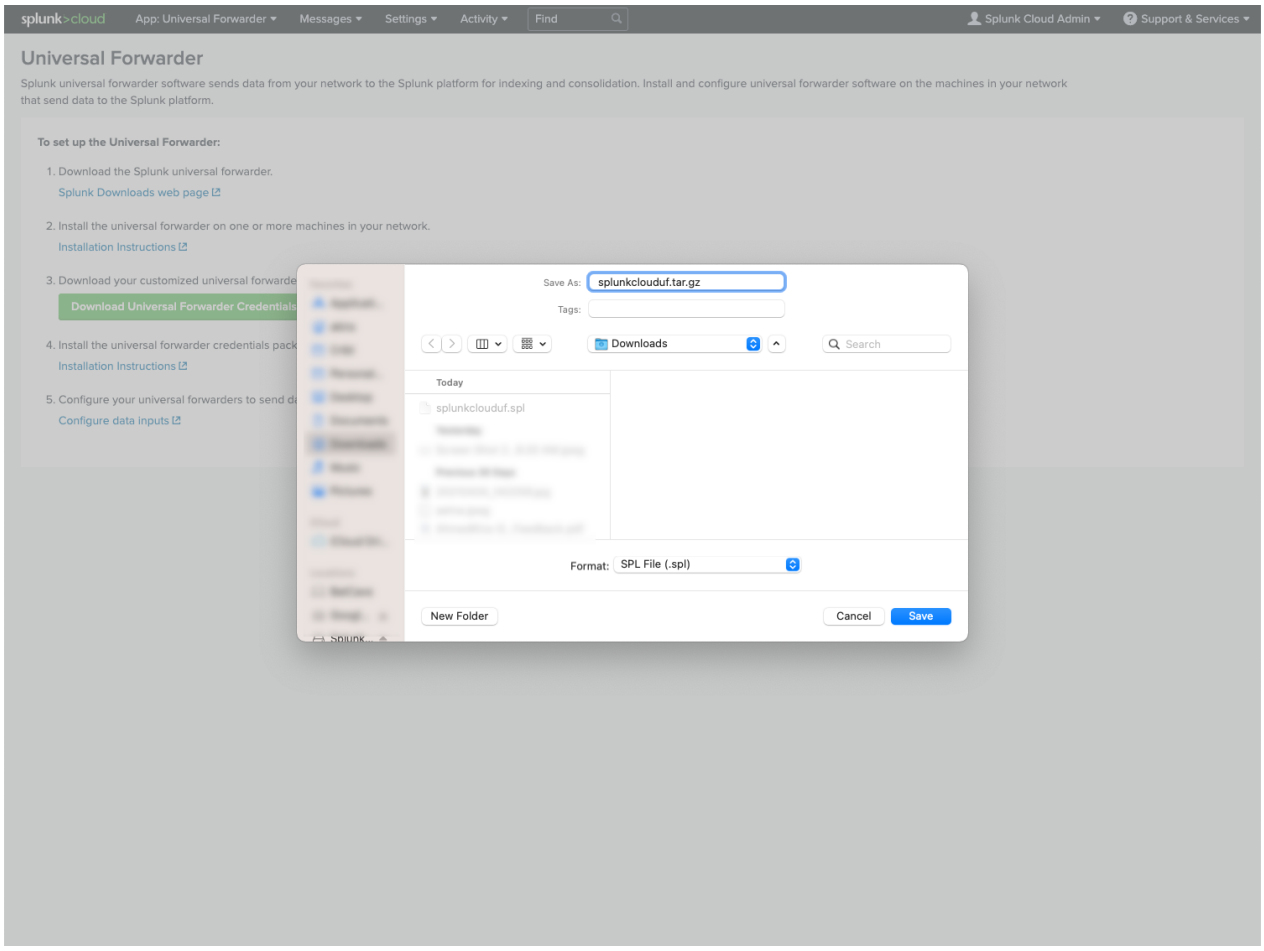

Changing the credentials app file suffix

3. Untar/unzip the directory to expose the files.

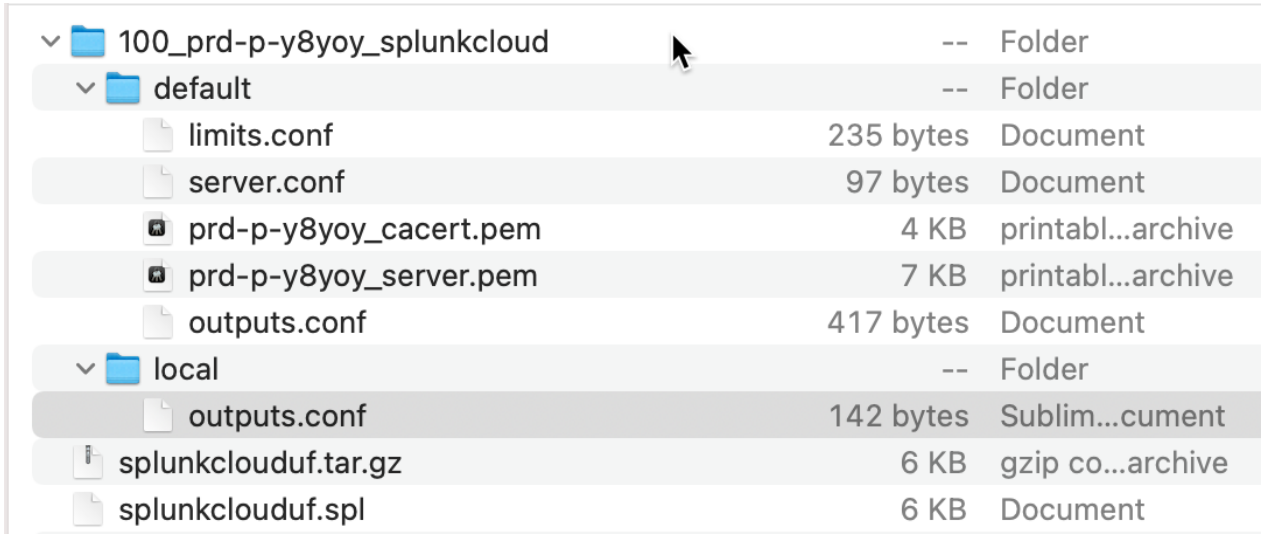

Credentials app files

4. Locate the following files. You will need them when you configure Cribl Stream in the next section.

- `./default/<SplunkCloudInstanceName>_cacert.pem`
- `./default/<SplunkCloudInstanceName>_server.pem`
- `./default/outputs.conf`
- `./local/outputs.conf`

Configure Certificate Settings in Cribl Stream

1. In a distributed deployment, select **Manage** > **Groups** and then the appropriate `<group-name>`. Then, at the upper right, select **Settings** > **Certificates**.

   (In a single-instance deployment, simply select the top nav's **Settings** tab.

2. From the resulting left nav, select **Security** > **Certificates**.

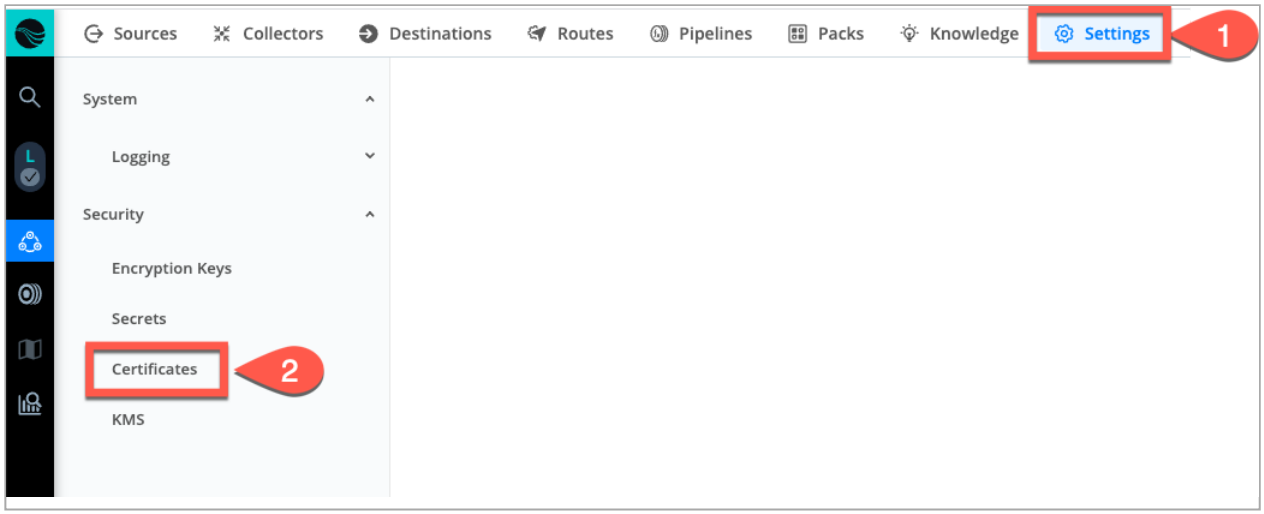

The Settings > Certificates submenu

3. Populate each field below with the specified content:

   - **Certificate**: Drag and drop the `server.pem` file.
   - **Private Key**: Copy and paste just the `private key` section of the `server.pem` file.
   - **Passphrase**: Copy and paste just the SSL password from the `../local/outputs.conf` file.
   - **CA certificate**: Drag and drop the `cacert.pem` file.

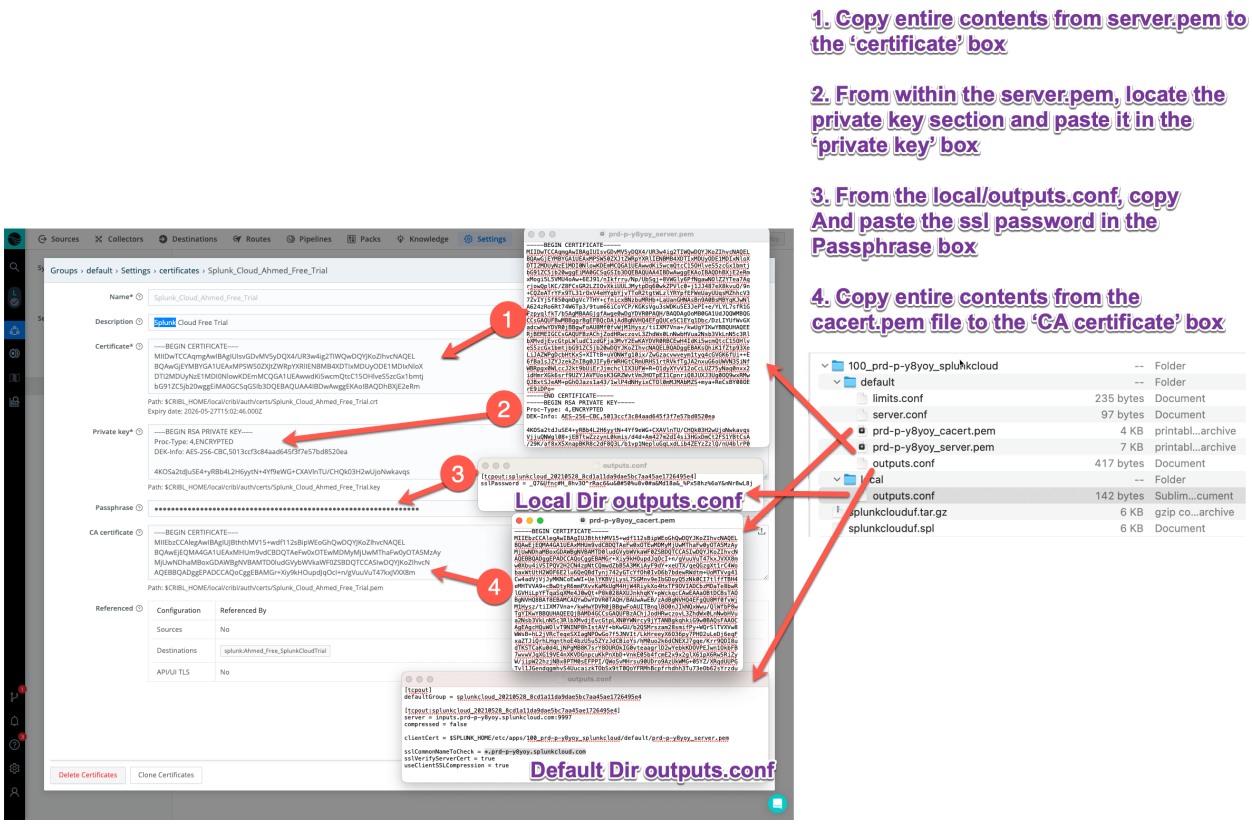

Copying certificate values

Add a Splunk Destination in Cribl Stream

The type of Destination to add depends on what form of Splunk you're using:

- For a trial version of Splunk Cloud, select **Splunk Single Instance**.
- For a paid version of Splunk Cloud, select **Splunk Load Balanced**. This is required because any paid version of Splunk Cloud will have multiple indexer entries in the `../default/outputs.conf` file.

1. From a Cribl Stream instance's or Group's **Manage** submenu, select **Data** > **Destinations**, then select either **Splunk** > **Load Balanced** or **Splunk** > **Single Instance** from the **Manage Destinations** page's tiles or left nav. Then click **New Destination** to open the corresponding **New Destination** modal.

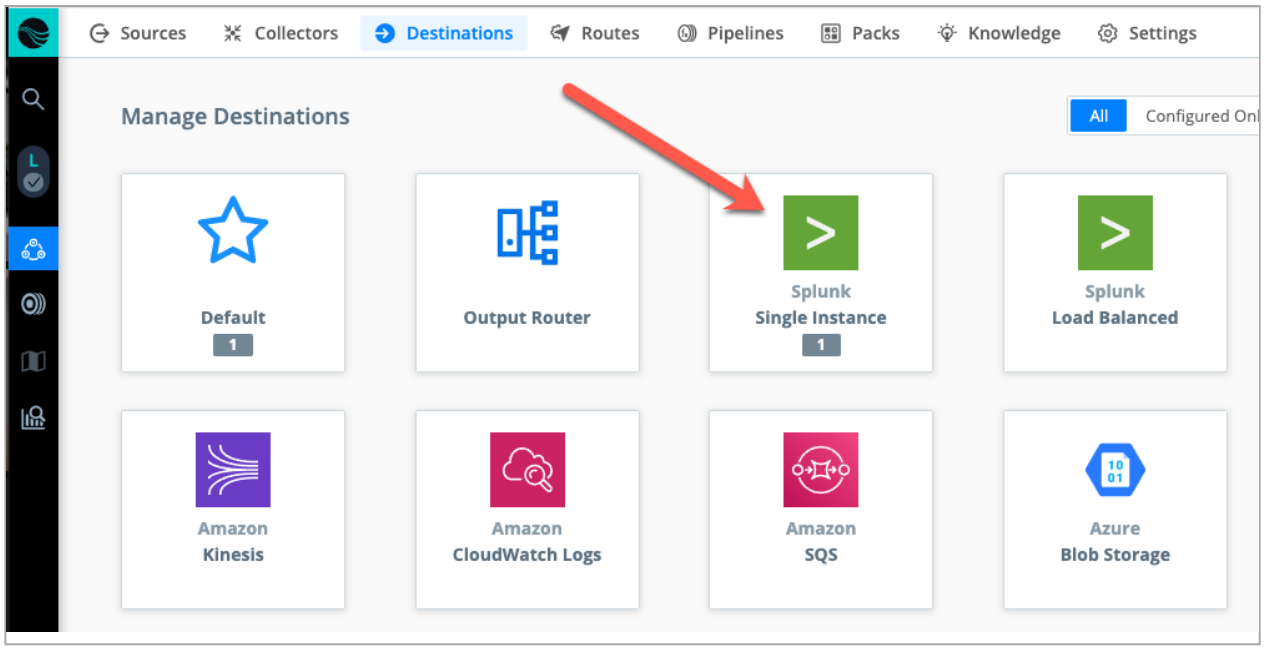

Creating the Splunk Destination

2. In the **General Settings** tab, populate the **Address** and **Port** fields.

   - From the `./default/outputs.conf` file you copied in the previous section, divide the value of the `server` line between the two fields shown in the screenshot below.

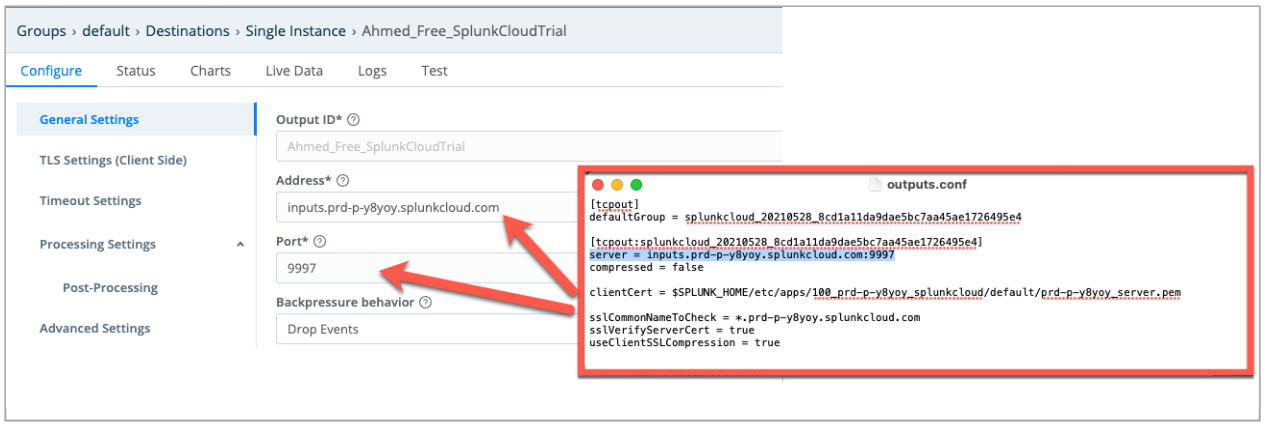

The General Settings tab

3. In the **TLS Settings (Client Side)** tab:

   - From the **Certificate name** drop-down, select the certificate that you created.
   - From the `./local/outputs.conf` file, paste the `sslPassword` value into the **Passphrase** field.
   - Click **Save**.
   - Click **Commit** and **Deploy**.

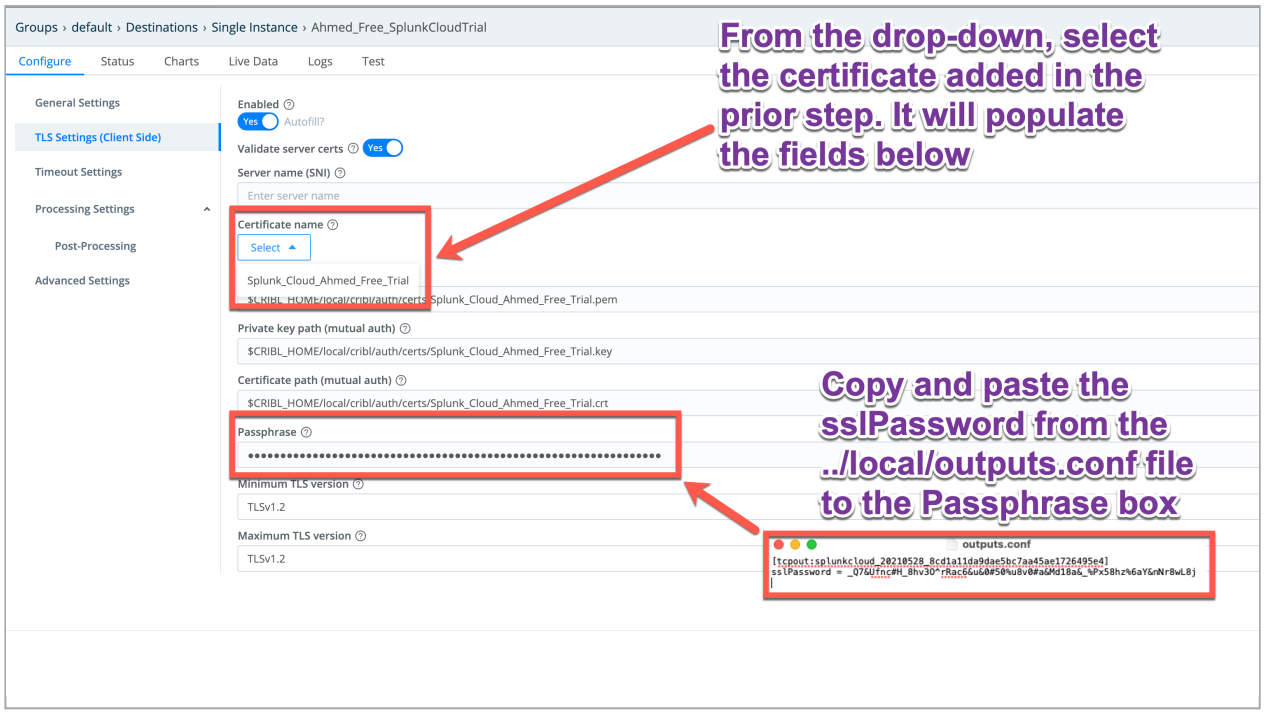

TLS Settings

Verify that Data is Flowing from Cribl Stream to Splunk Cloud

> Be sure you have committed and deployed the newly created configuration. Otherwise, data will not flow to Splunk Cloud, and verification will fail.

1. In Cribl Stream, open the Destination that you created in the previous section.
    - In the configuration modal's **Test** tab, click **Run Test**.
    - You should see a **Success** message.

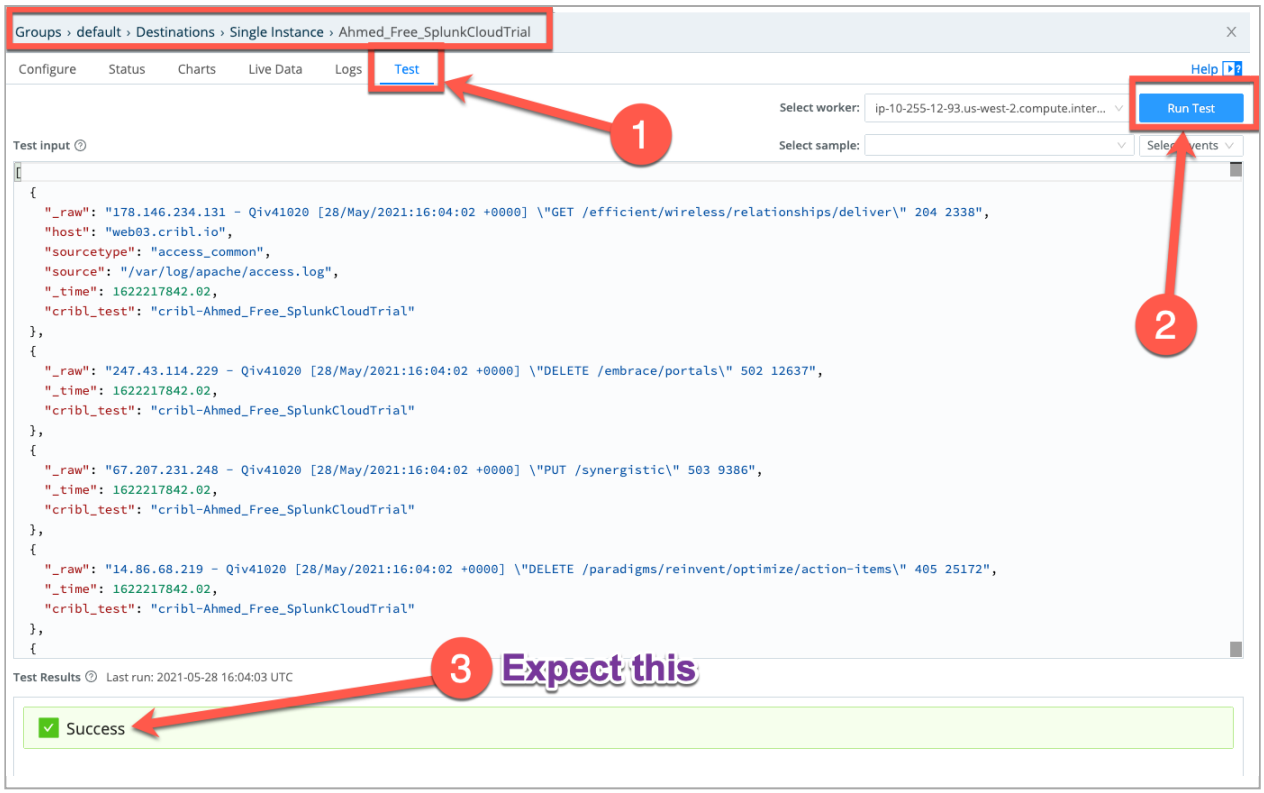

Testing the Splunk Destination

2. In Splunk, search on `index=main cribl_pipe=*`. Events that you sent from the Cribl Stream Test tab should appear in the search results.

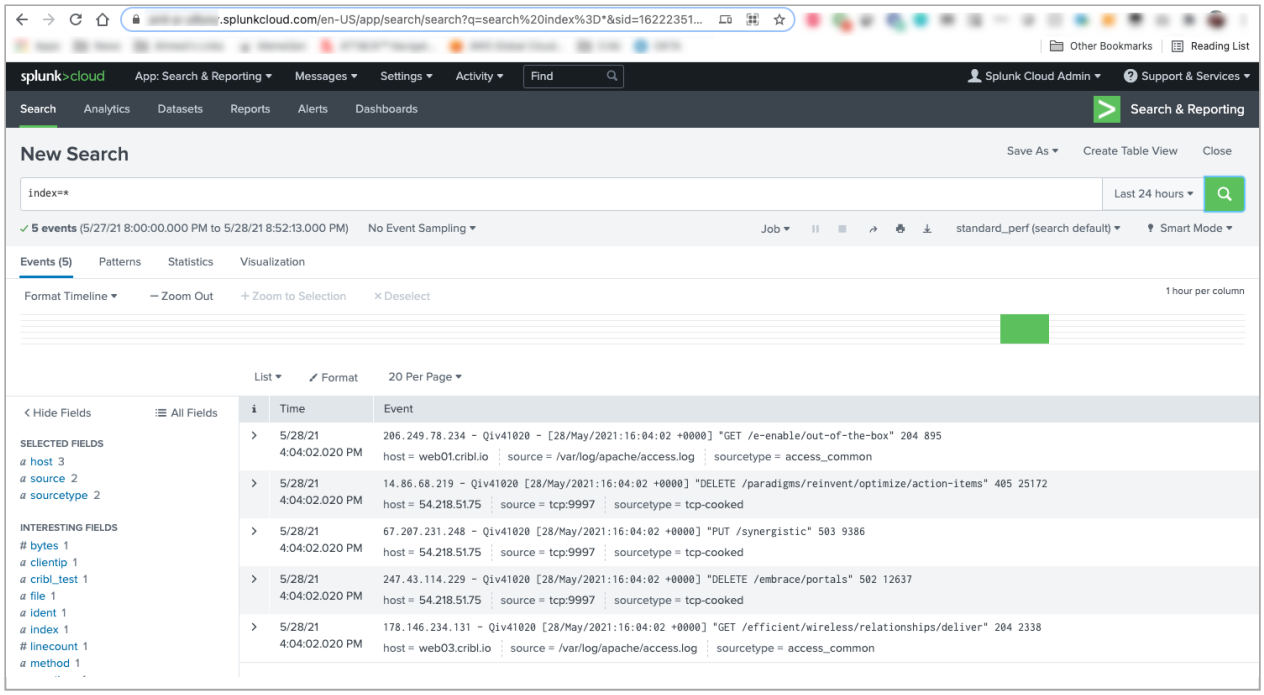

Events flowing to Splunk

Using S2S with Splunk BYOL

Before you begin configuring this option, you should already have Splunk Universal Forwarders configured to send data securely to your Splunk environment. This enables you to:

- Re-use content from the `.pem` and `outputs.conf` files already in use on those Forwarders.
- Follow the procedures in the in the previous section to add the certificate to Cribl Cloud.
- Then, reference the certificate in the Splunk Destination configuration.

If you need to secure your Splunk indexers, see the Splunk documentation.

When Your Data Source is a Splunk Forwarder

If a Splunk Universal or Heavy Forwarder is the source of the data you want to send to Splunk Cloud:

- In Cribl Stream, create a Splunk TCP Source to receive data from the Splunk Forwarder.
- This process includes configuring the Splunk Forwarder to point to the new Source in Cribl Stream, and (optionally) securing the communication with TLS.

15.9. Sumo Logic/Webhook Integration

You can configure Cribl Stream to send raw event data through a Webhook Destination to Sumo Logic's log management and analytics service.

Before you begin, you need the `Manage Collectors` role capability in Sumo Logic.

Prepare Sumo Logic

1. In Sumo Logic, navigate to **Manage Data** > **Collection**.
2. If you already have a Hosted Collector, select it and skip to Step 4. If you do not already have a Hosted Collector, click **Add Collector**.

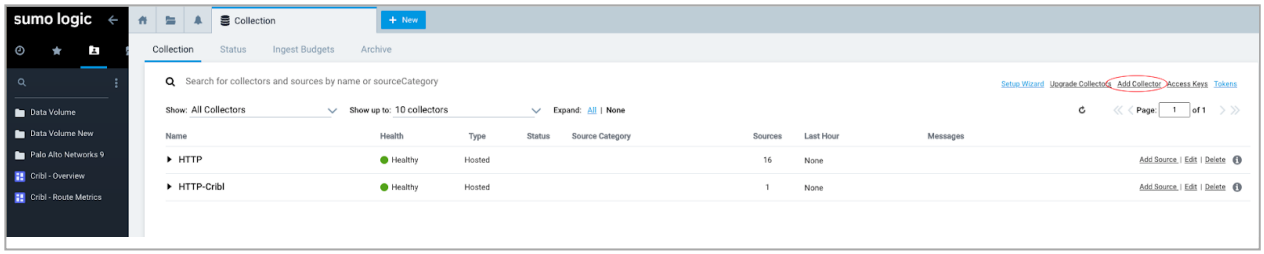

Adding a Hosted Collector

3. Select **Hosted Collector** and fill in the form.
4. Click **Add Source**.

Adding a Source for your Hosted Collector

5. Select **HTTP Logs & Metrics**. Fill in the form and click **Save**.
6. Sumo Logic then displays the HTTP Source URL, which you will need when configuring the Webhook Destination in Cribl Stream.

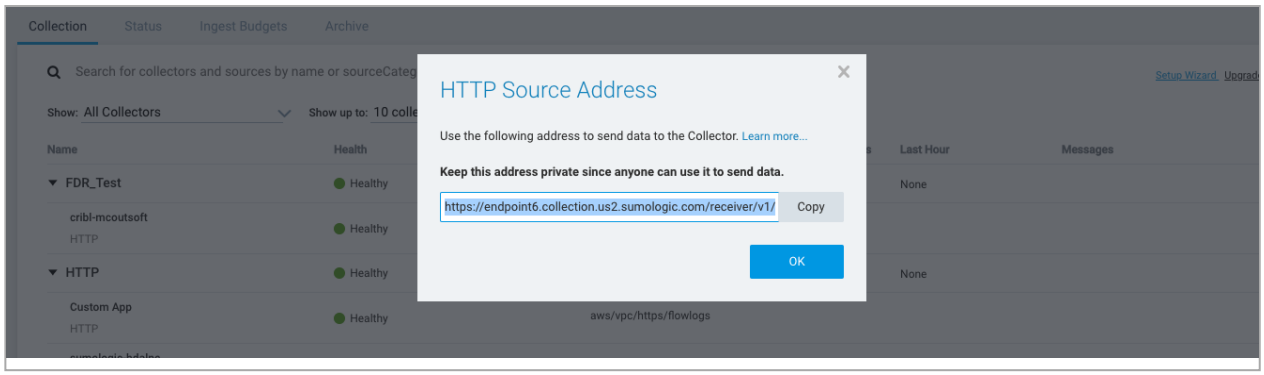

The HTTP Source URL

7. Click **Copy** to capture the URL.

8. Click **Next** to finish configuring the HTTP Source.

Configure Cribl Stream's Webhook Destination

From a Cribl Stream instance's or Group's **Manage** submenu, select **Data** > **Destinations**, then select **Webhook** from the **Manage Destinations** page's tiles or left nav. Click **New Destination** to open the **Webhook** > **New Destination** modal.

On the modal's **Configure** > **General Settings** tab, enter or select the following values:

- **URL**: Enter the Sumo Logic HTTP Source URL.
- **Method**: `POST`
- **Format**: `Custom`
- **Source Expression** = `_raw`. As needed, add more fields (e.g., `host`) for Webhook to include in the raw output.
- **Content type**: `application/text`

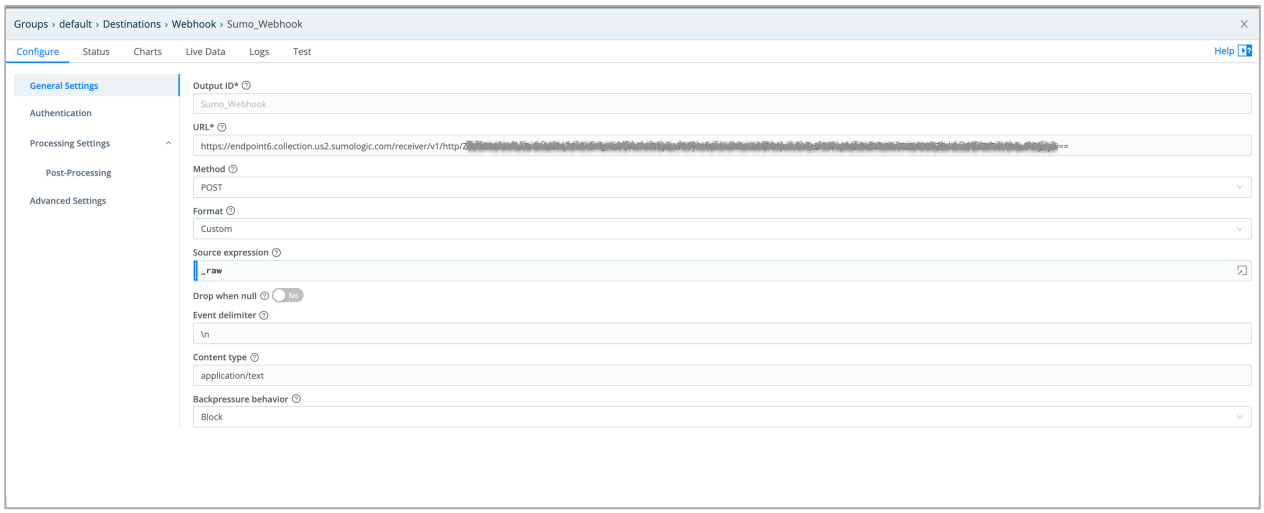

Webhook Destination General Settings

Next, in the **Authentication** tab, make sure that **Authentication type** is set to `None`.

In the **Post-Processing** tab, remove `cribl_pipe` from **System Fields**.

Click **Save**, then **Commit & Deploy**.

Create a Pipeline

Create a Cribl Stream Pipeline to remove all except the **Source Expression** fields. Add an Eval Function with the following values:

- **Keep Fields**: Specify the same field(s) you specified in **Source Expression** when you created the Webhook Destination (e.g., `_raw`, `host`).
- **Remove Fields**: `_*` and `*`, to remove all other fields.

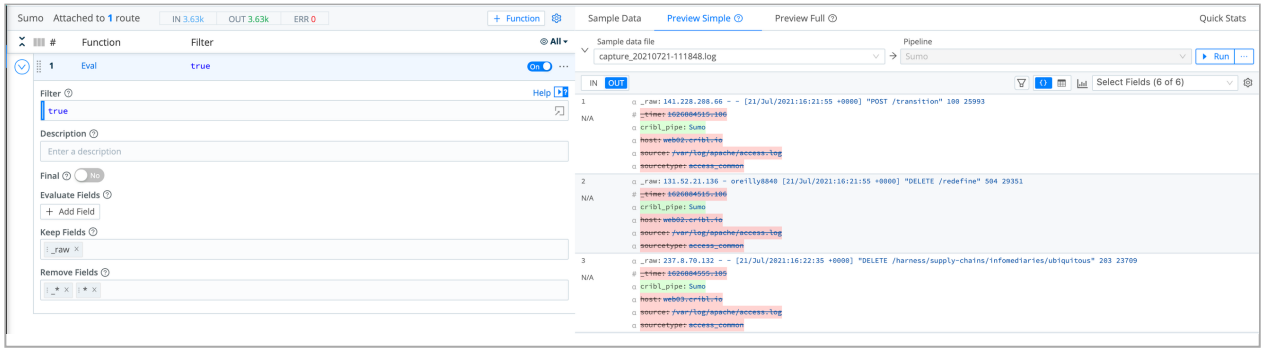

Example Pipeline

Create a Route

Configure a Route similar to the example below, replacing the names/IDs shown with the actual names/IDs from your setup.

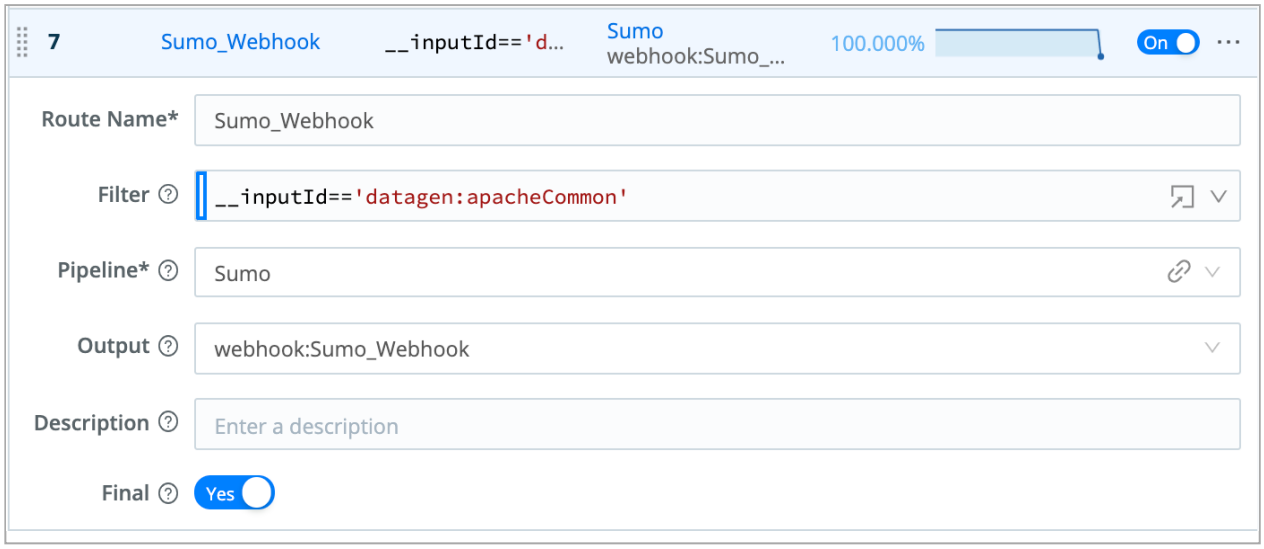

Example Route

Verify that Sumo Logic Is Receiving Data

In Sumo Logic, search for `_source=<name>`, replacing `<name>` with the name of the Source you created. The search should return event data that is broken out into fields.

If your Webhook Destination specifies **Source Expression** as `_raw, host`, you should see output similar to this, where the added field (`host`) appears at the end of the `_raw` string.

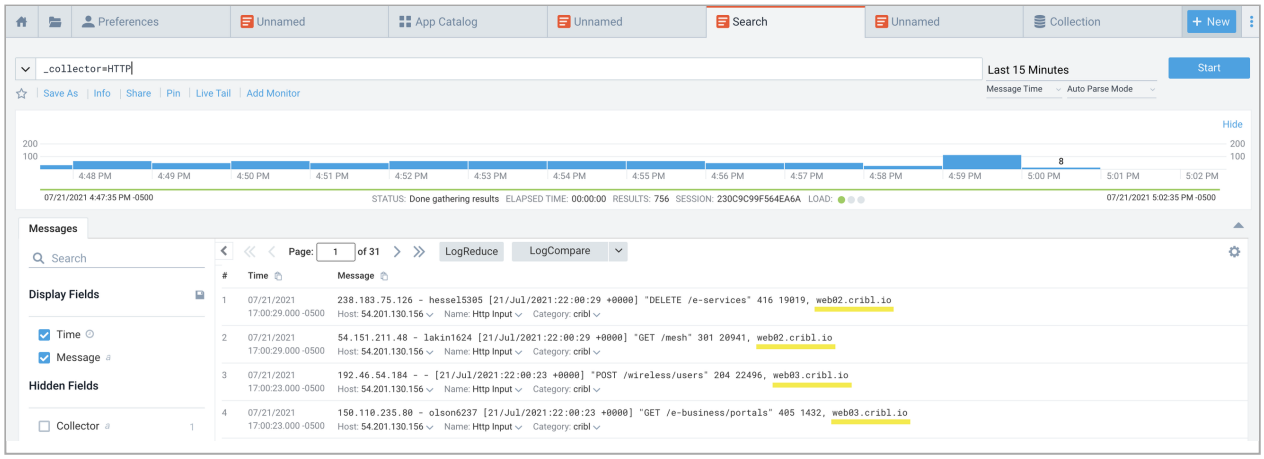

Sumo Logic Search Results with an Added Field

15.10. Configuring WEF for Cribl Stream

In Cribl.Cloud, you can configure Cribl Stream to receive Windows events from the Windows Event Forwarding (WEF) mechanism. To do this, you configure a Windows endpoint/sender to forward events to Cribl Stream's Windows Event Forwarder Source with mutual TLS authentication.

This page picks up where the Windows Event Forwarder Source doc's upstream sender configuration section leaves off. Before you begin, make sure that you are running PowerShell as an administrator.

Configuring Certificate Auto-Enrollment

Cribl recommends using certificate auto-enrollment, via Group Policy, to configure unique device certificates for WEF. (However, if your environment is small enough that auto-enrollment seems like too heavyweight a procedure, skip ahead to Generating a CA and Client Certificates.)

In your Windows domain controller, edit or create a new Group Policy Object (GPO). Then, navigate to **Computer Configuration** > **Policies** > **Windows Settings** > **Security Settings** > **Public Key Policies**.

Double-click the **Certificate Services Client - Auto Enrollment Properties** Object Type. In the resulting modal:

- From the **Configuration Model** drop-down, select `Enabled`.
- Select the check box labeled:
  `Renew expired certificates, update pending certificates, and remove revoked certificates.`
- Select the check box labeled:
  `Update certificates that use certificate templates.`
- Click **OK** and **Apply**.

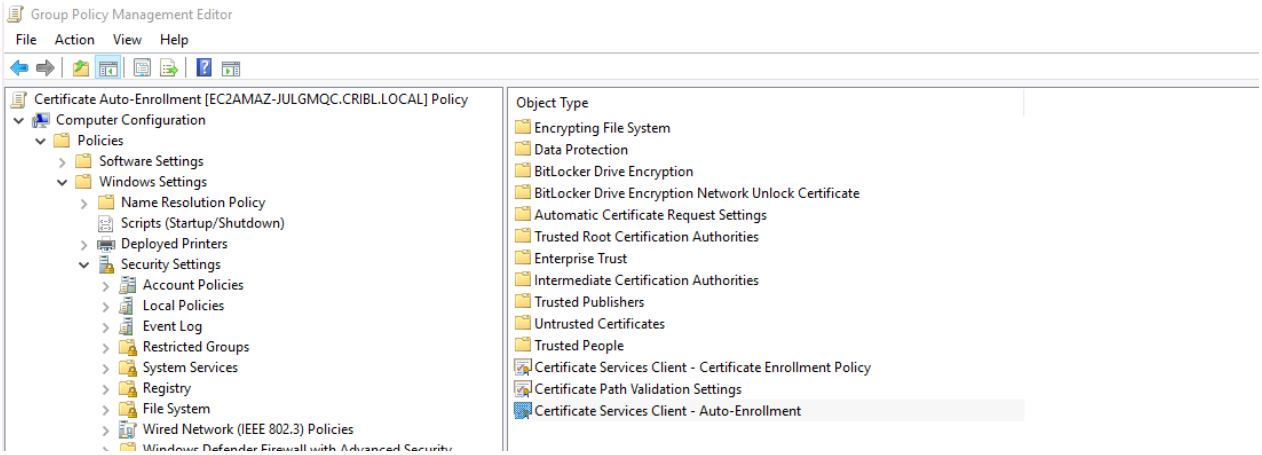

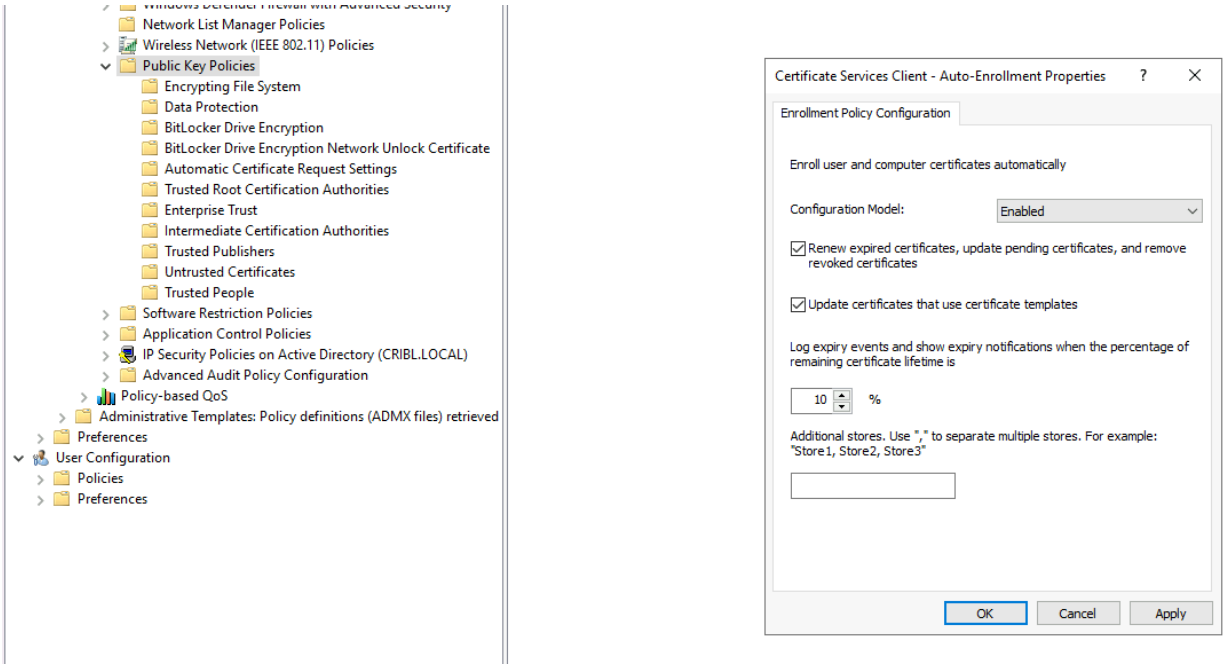

The Auto-Enrollment Properties modal

Select the **Certificate Services Client – Certificate Enrollment Policy** Object Type. In the resulting modal:

- From the **Configuration Model** drop-down, select `Enabled`.
- Click **OK** and **Apply**.

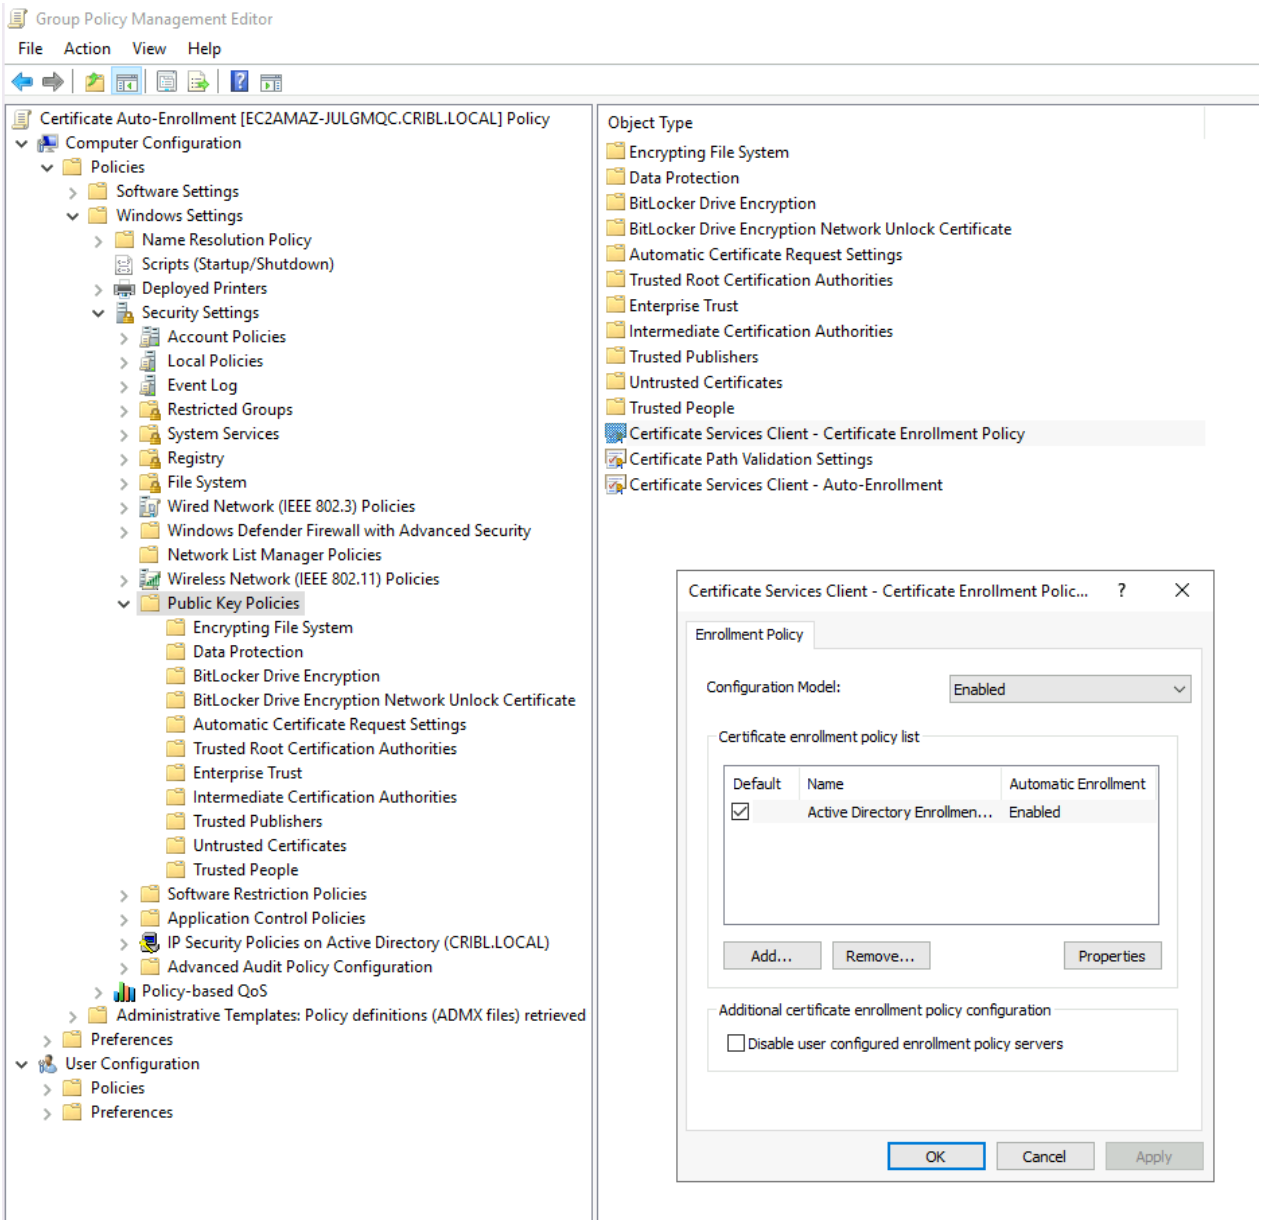

The Certificate Enrollment Policy modal

Double-click the **Automatic Certificate Request Settings** folder. In the resulting wizard:

- Select the **Computer** template, click **Next**, and follow the prompts to create a new automatic certificate request.

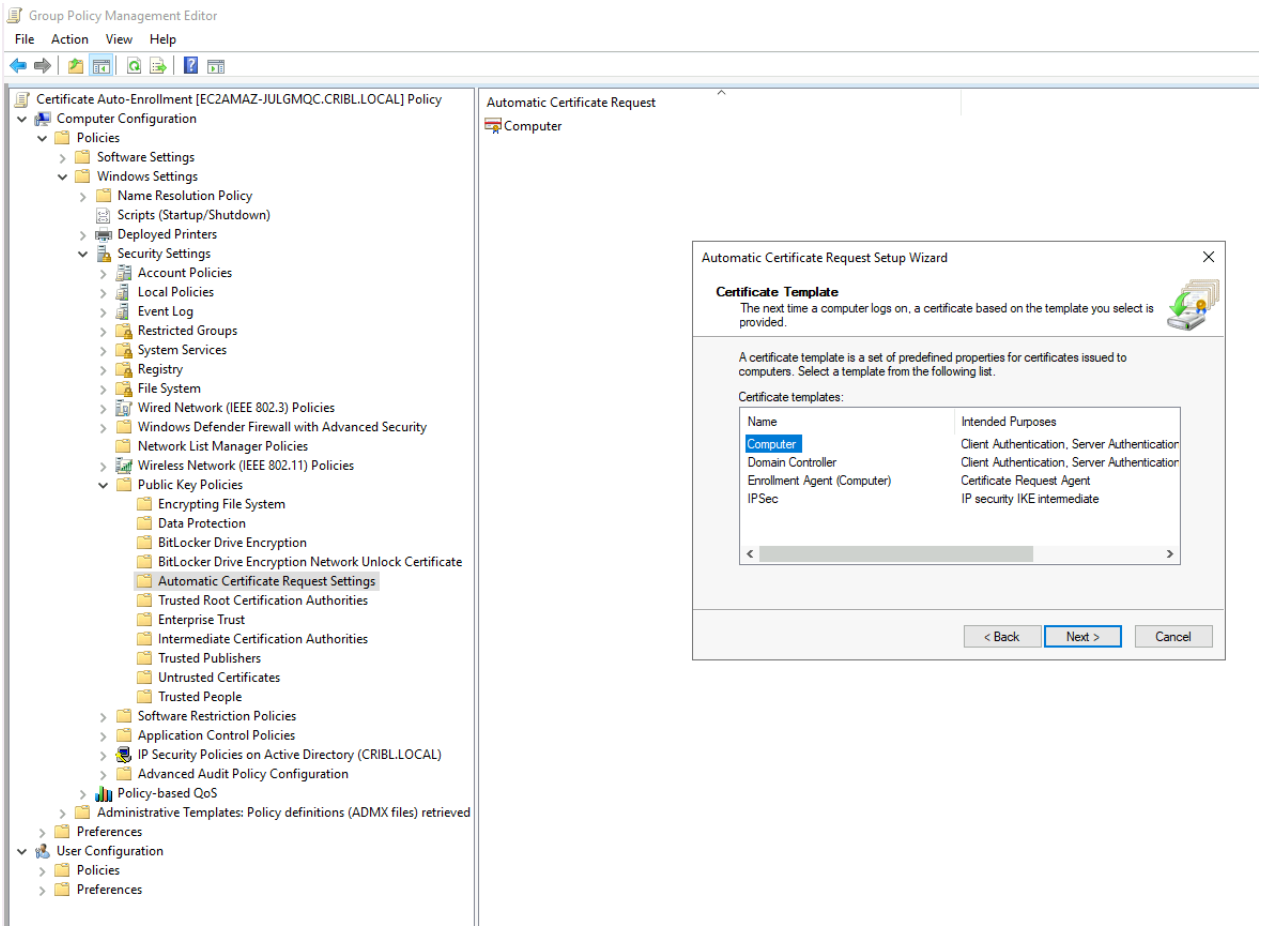

The Automatic Certificate Request Setup Wizard

Generating a CA and Client Certificates

If you followed the preceding Configuring Certificate Auto-Enrollment section to configure certificates, skip ahead to Setting Client Certificate Permissions.

To begin, generate a public/private key pair that constitute a new Cribl WEF Certificate Authority (CA) – i.e., the root CA. Then, import it into the local computer's Trusted Root CA store. The following PowerShell commands do all of this (run as Administrator):

```
$rootca = New-SelfSignedCertificate -CertStoreLocation cert:\LocalMachine\My -
DnsName "Cribl Windows Event Forwarding CA" -subject "CN=CRIBL-CA, DC=cribl,
DC=local" -KeyUsage CertSign
Export-Certificate -Cert $rootca -FilePath C:\temp\cribl-wef-ca.cer
Import-Certificate -FilePath C:\temp\cribl-wef-ca.cer -CertStoreLocation
cert:\LocalMachine\Root
```

Now, generate the client certificate.

```
New-SelfSignedCertificate -CertStoreLocation cert:\LocalMachine\My -DnsName cribl-wef-client -Signer $rootca
```

Setting Client Certificate Permissions

You can perform this step through the Windows UI, or on the command line.

Cert Permissions via UI

Open the Certificate Manager tool (`certlm.msc`).

- Right-click the `cribl-wef-client` certificate and select **All Tasks** > **Manage Private Keys...**.
- Add the `NETWORK SERVICE` user.

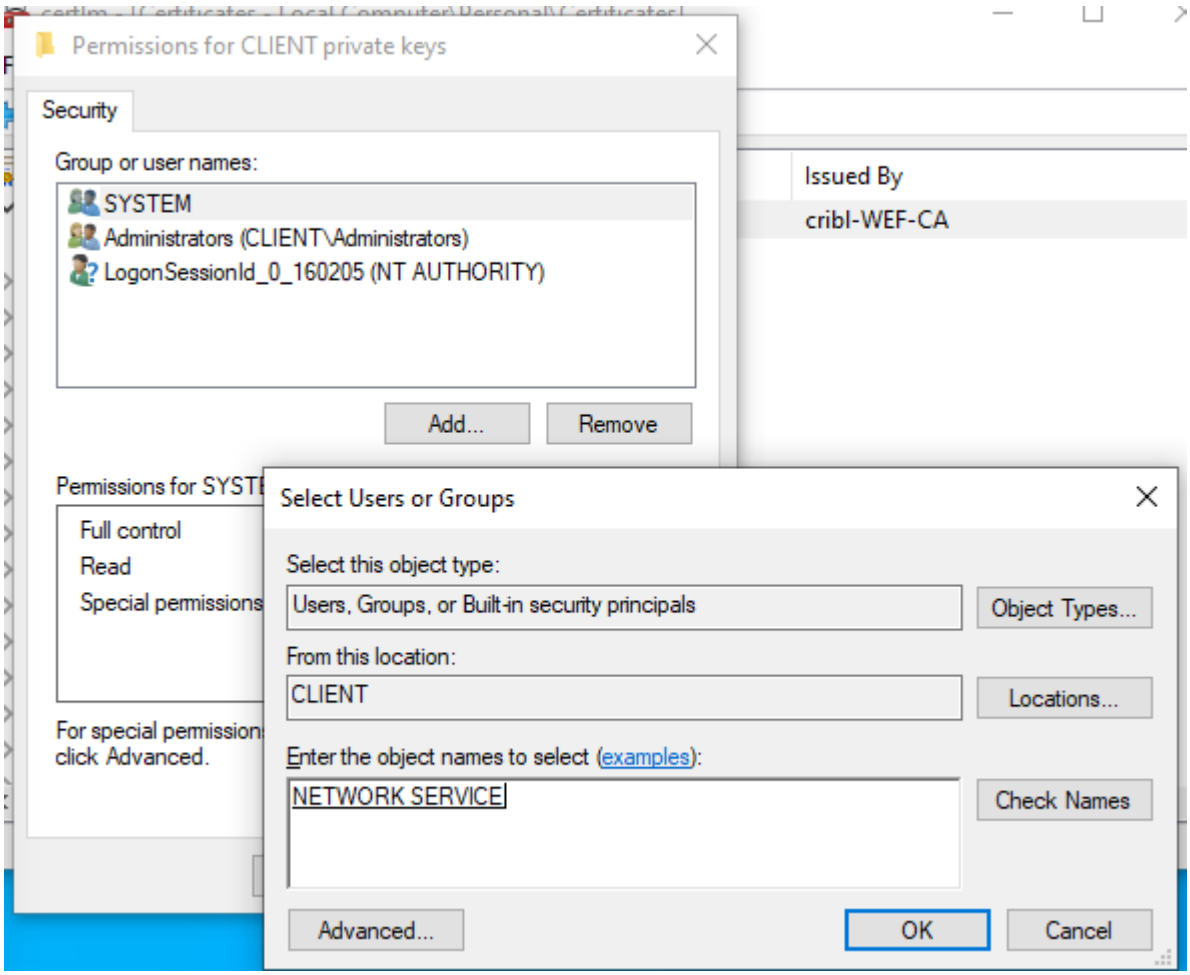

Adding the Network Service user

Cert Permissions via Command Line

As an alternative, you can run the following PowerShell script (as administrator):

```
$issuer = "CN=CRIBL-CA, DC=cribl, DC=local"
$certs = Get-ChildItem -Path cert:\LocalMachine\My | Where {$_.Issuer -eq $issuer}

Foreach ($cert in $certs)
{
  # Specify the user, the permissions, and the permission type
  $permission = "Network Service","FullControl","Allow"
  $accessRule = New-Object -TypeName
System.Security.AccessControl.FileSystemAccessRule -ArgumentList $permission

  # Location of the machine-related keys
  $keyPath = Join-Path -Path $env:ProgramData -ChildPath
"\Microsoft\Crypto\RSA\MachineKeys"
  $keyName = $cert.PrivateKey.CspKeyContainerInfo.UniqueKeyContainerName
  $keyFullPath = Join-Path -Path $keyPath -ChildPath $keyName

  # Get the current ACL (Access Control List) of the private key
  $acl = (Get-Item $keyFullPath).GetAccessControl('Access')

  # Add the new ACE to the ACL of the private key
  # An ACE (Access Control Entry) is an individual rule in an ACL
  $acl.SetAccessRule($accessRule)

  # Write back the new ACL
  Set-Acl -Path $keyFullPath -AclObject $acl -ErrorAction Stop

  # Observe the access rights currently assigned to this certificate.
  get-acl $keyFullPath| fl
}
```

(Source: Stack Overflow – NETWORK SERVICE user cannot read certificate Windows Server 2012.)

Configuring Log Forwarding Group Policies

Your goal here is to enable the Network Service to read the security logs. To do this, you'll configure access for the Event Log Service.

Open the Local Group Policy Editor tool (`gpedit.msc`).

Navigate to **Computer Configuration** > **Policies** > **Administrative Templates** > **Windows Components** > **Event Log Service**. Double-click **Security**, then in the **Settings** pane, select **Configure log access**.

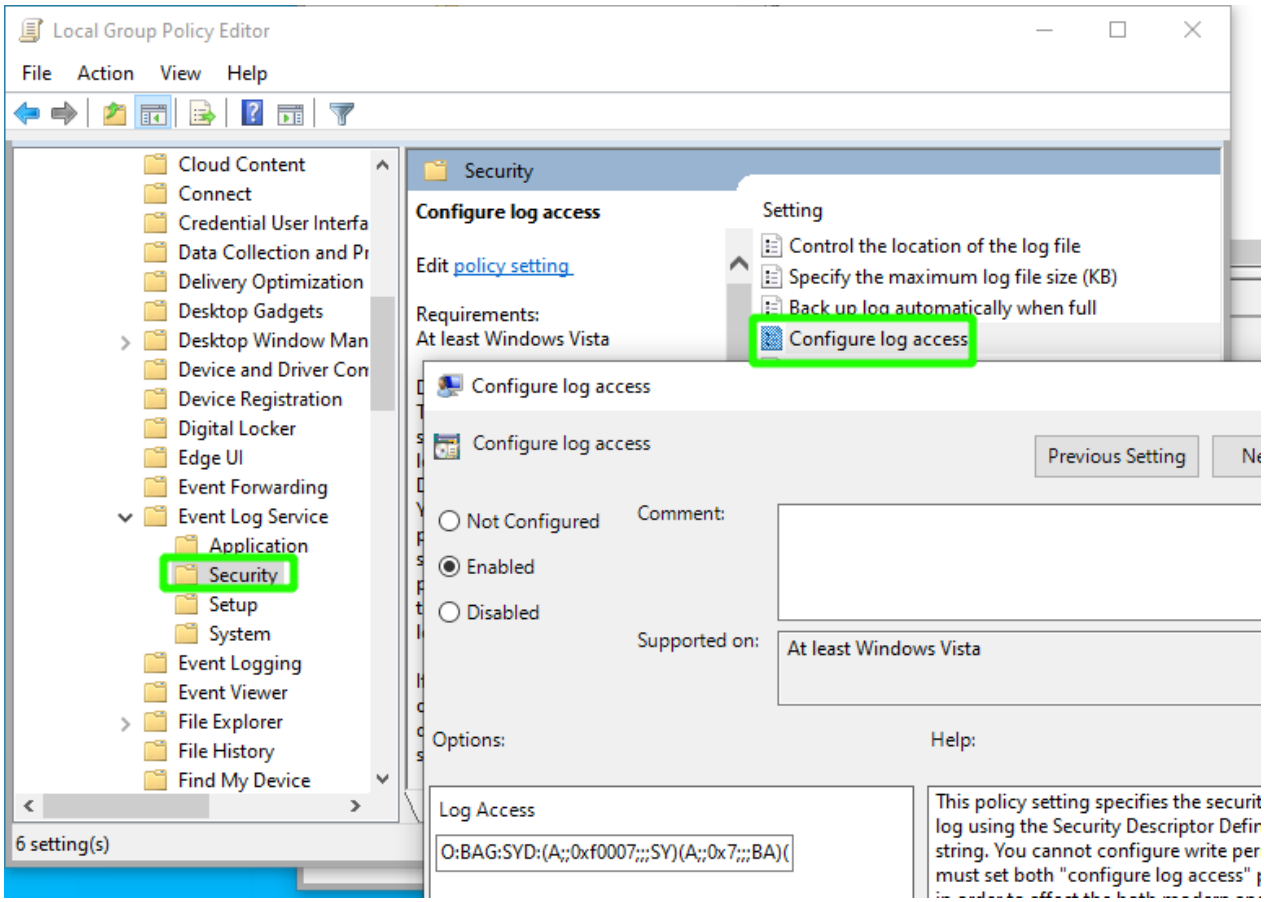

Configuring log access

In the resulting modal, under **Options** > **Log Access**, enter the following Log Access configuration:

```
O:BAG:SYD:(A;;0xf0007;;;SY)(A;;0x7;;;BA)(A;;0x1;;;BO)(A;;0x1;;;SO)(A;;0x1;;;S-1-5-32-573)(A;;0x1;;;S-1-5-20)
```

Then, reboot your Windows machine to apply this setting.

(Source: Microsoft's Security event log forwarding fails... topic.)

Configuring the Subscription Manager

Navigate to **Computer Configuration** > **Policies** > **Administrative Templates** > **Windows Components**. Select **Event Forwarding** to open the Local Group Policy Editor.

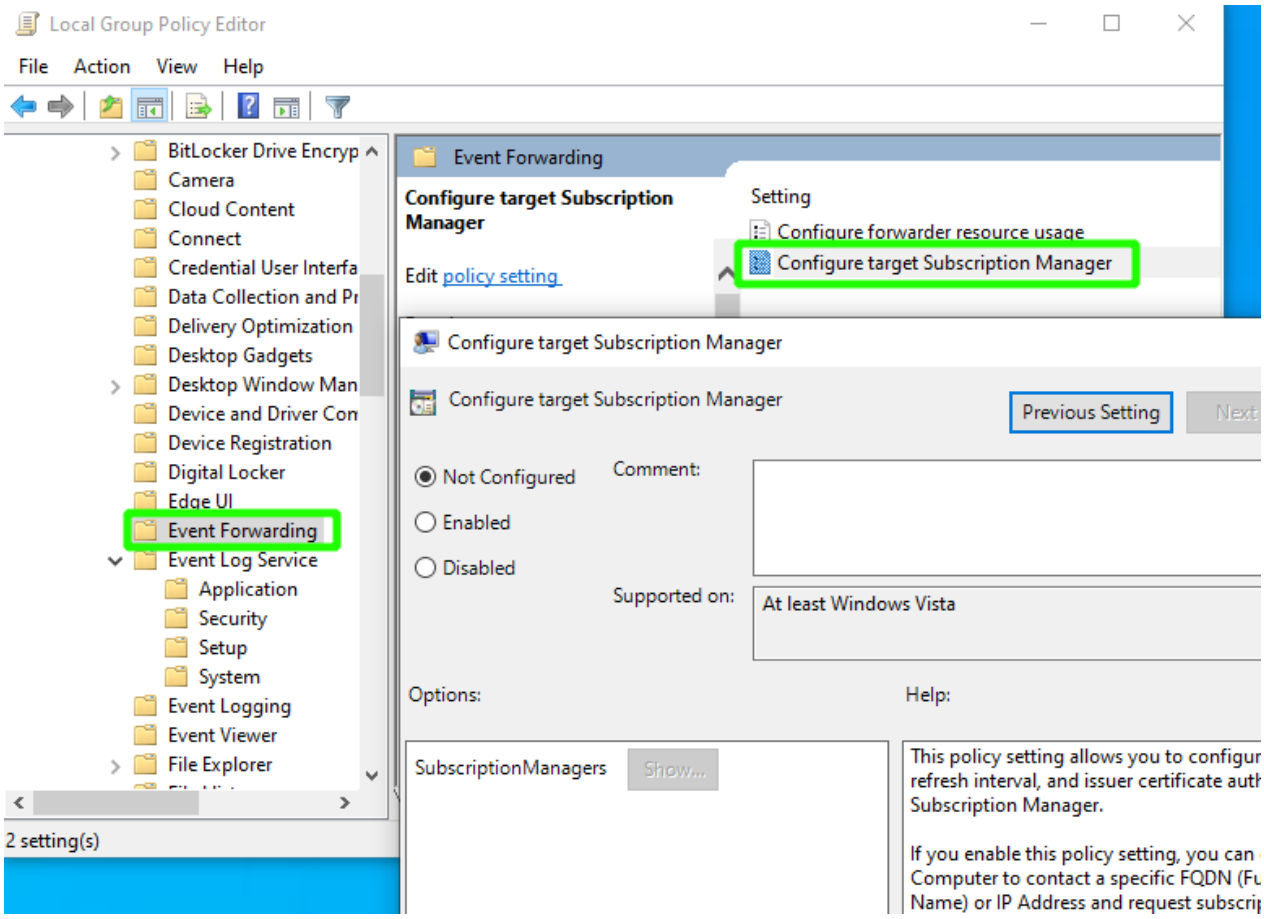

Configuring the Subscription Manager

Select **Configure target Subscription Manager** and enter the following template string, substituting the appropriate values for the placeholders:

```
Server=https://in.main-default-<organization>.cribl.cloud:
<port>/wsman/SubscriptionManager/WEC,Refresh=60,IssuerCA=<CA_thumbprint>
```

> If you forget your Client CA hash, run the following command to find it:
>
> ```
> Get-ChildItem cert:\LocalMachine\root | Where-Object {$_.Subject -Like
> "CN=Cribl*"}
> ```

Configuring the CA Certificate in Cribl.Cloud

Complete this section only if your deployment is in Cribl.Cloud. (If your Cribl Stream deployment is on-prem or hybrid, import the correct certificate for the appliance, then skip ahead to Configuring a New WEF Source.)

First, dump the CA certificate in PEM format:

```
$oMachineCert=get-item cert:\LocalMachine\Root\$($(Get-ChildItem
cert:\LocalMachine\root | Where-Object {$_.Subject -Like "CN=Cribl*"}).Thumbprint)
$oPem=new-object System.Text.StringBuilder
$oPem.AppendLine("-----BEGIN CERTIFICATE-----")
$oPem.AppendLine([System.Convert]::ToBase64String($oMachineCert.RawData,1))
$oPem.AppendLine("-----END CERTIFICATE-----")
$oPem.ToString() | out-file C:\cribl-wef-ca.pem
```

The `cribl-wef-ca` certificate should now be available at `C:\cribl-wef-ca.pem`.

Cribl Stream requires every CA certificate to be accompanied by a cert/key pair. Although Cribl Stream won't ever use the cert/key pair for the `cribl-wef-ca` certificate, you need to generate this pair to pass validation.

Run the following `openssl` command to generate a placeholder cert/key pair:

```
openssl req -x509 -newkey rsa:2048 -nodes -keyout key.pem -out cert.pem -sha256 -
days 365 -subj '/CN=placeholder'
cat cert.pem key.pem
```

In the Cribl Stream Worker Group UI, navigate to **Settings** > **Security** > **Certificates** > **New Certificates**.

Paste the placeholder certificate and key into the **Certificate** and **Private key** fields, respectively. Cribl Stream automatically pastes the `cribl-wef-ca` PEM contents into the **CA certificate** field.

If the client certificates contain a CA chain (root and intermediate signers), you must import the entire CA chain. Concatenate the PEM files together in the **CA certificate** field.

> Each certificate here must directly certify the one preceding it. This matches the order of traversing the chain from the host to the root CA cert.

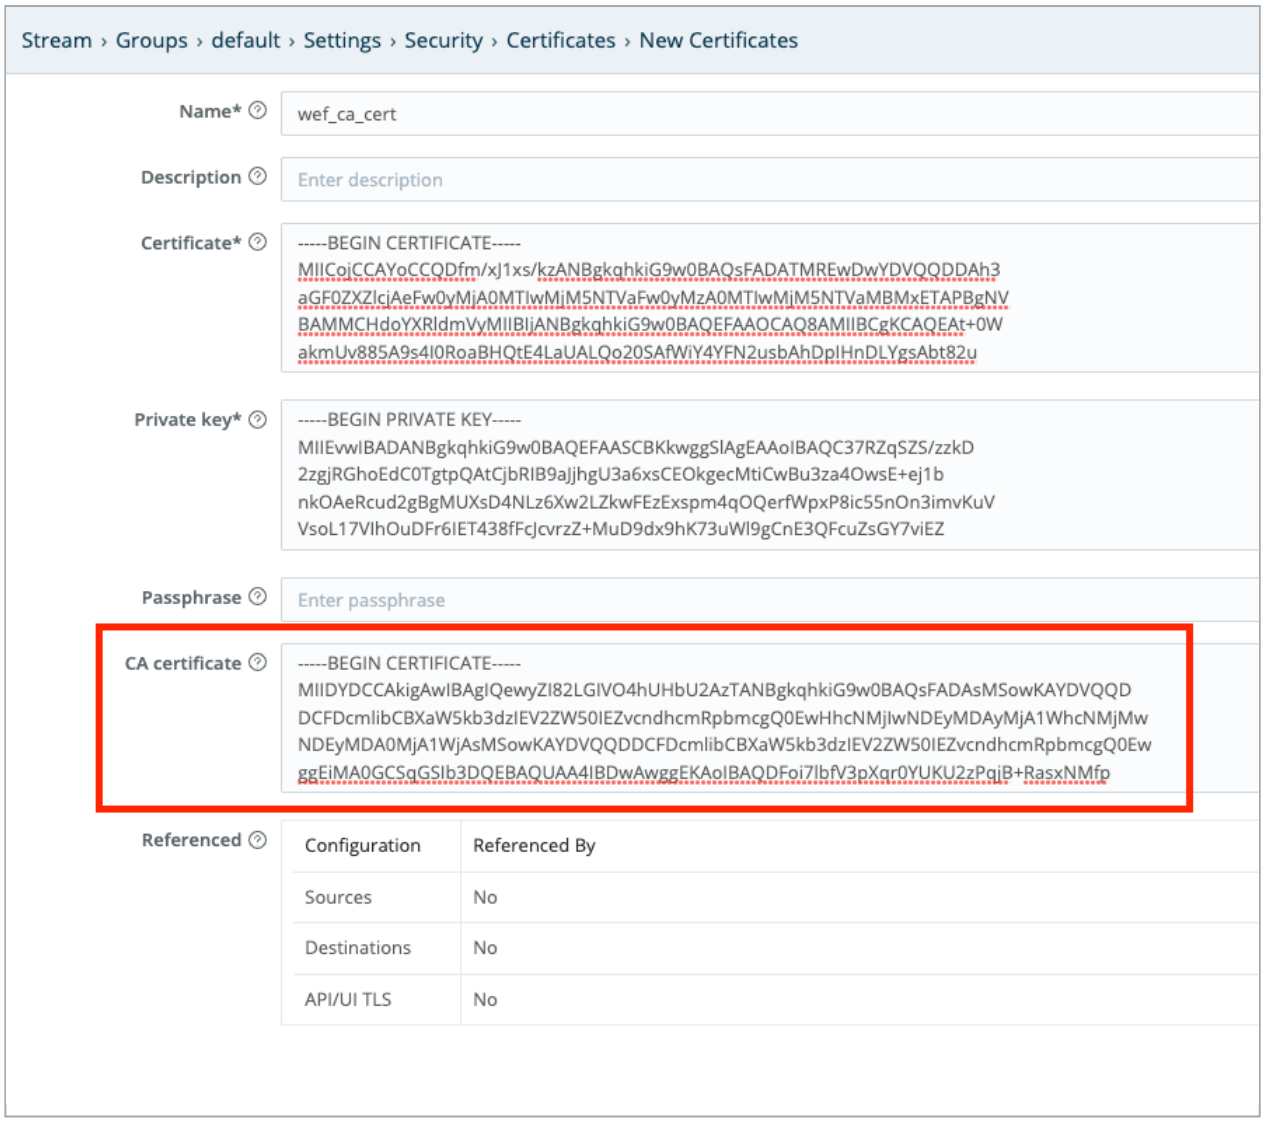

Configuring certificates

When the WEF machine connects to Cribl Stream, the machine presents its certificate to Cribl Stream. To authenticate clients that try to send logs from WEF, Cribl Stream compares the signer of the WEF machine's certificate against the CA list (which you imported in the previous step).

Configuring a New WEF Source

To create a new Windows Event Forwarder Source:

In the **QuickConnect** UI: Click **Add Source**. From the resulting drawer's tiles, select [**Push** >] **Windows Event Forwarder**. Next, click either **Add Destination** or (if displayed) **Select Existing** to open a Windows Event Forwarder Source drawer.

Or, in the **Data Routes** UI: From the top nav of a instance or Group, select **Data** > **Sources**. From the resulting page's tiles or the **Sources** left nav, select [**Push** >] **Windows Event Forwarder**. Next, click **New Source** to

open a **New Source** modal.

The drawer or modal will now provide the options and fields described in the Windows Event Forwarder Source topic. That topic describes the general case; this one covers only settings that are specific to the use case we're describing.

General Settings

In the **Port** field, enter a custom port between `20000` and `20010`. This is necessary because the default port (`5985`) is not available in Cribl.Cloud.

From the **Certificate name** drop-down, choose the certificate you just created.

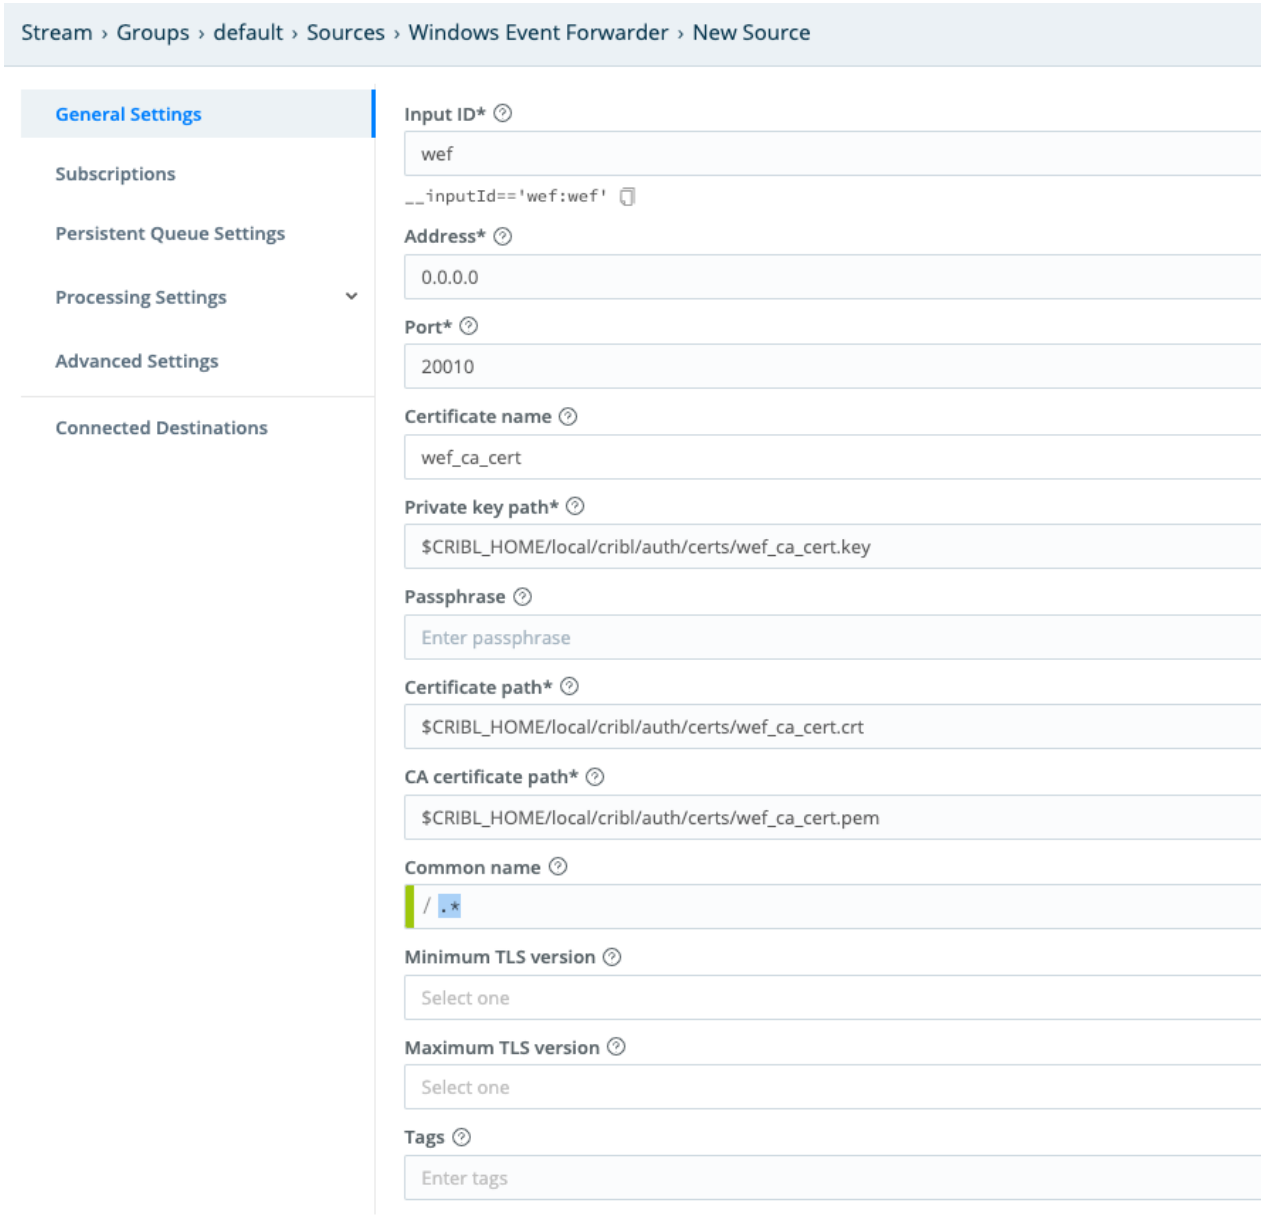

Replace the contents of **Private key path** with `/opt/criblcerts/criblcloud.key`, and the contents of **Certificate path** with `/opt/criblcerts/criblcloud.crt`. (These are the default certificates that ship with Cribl.Cloud.)

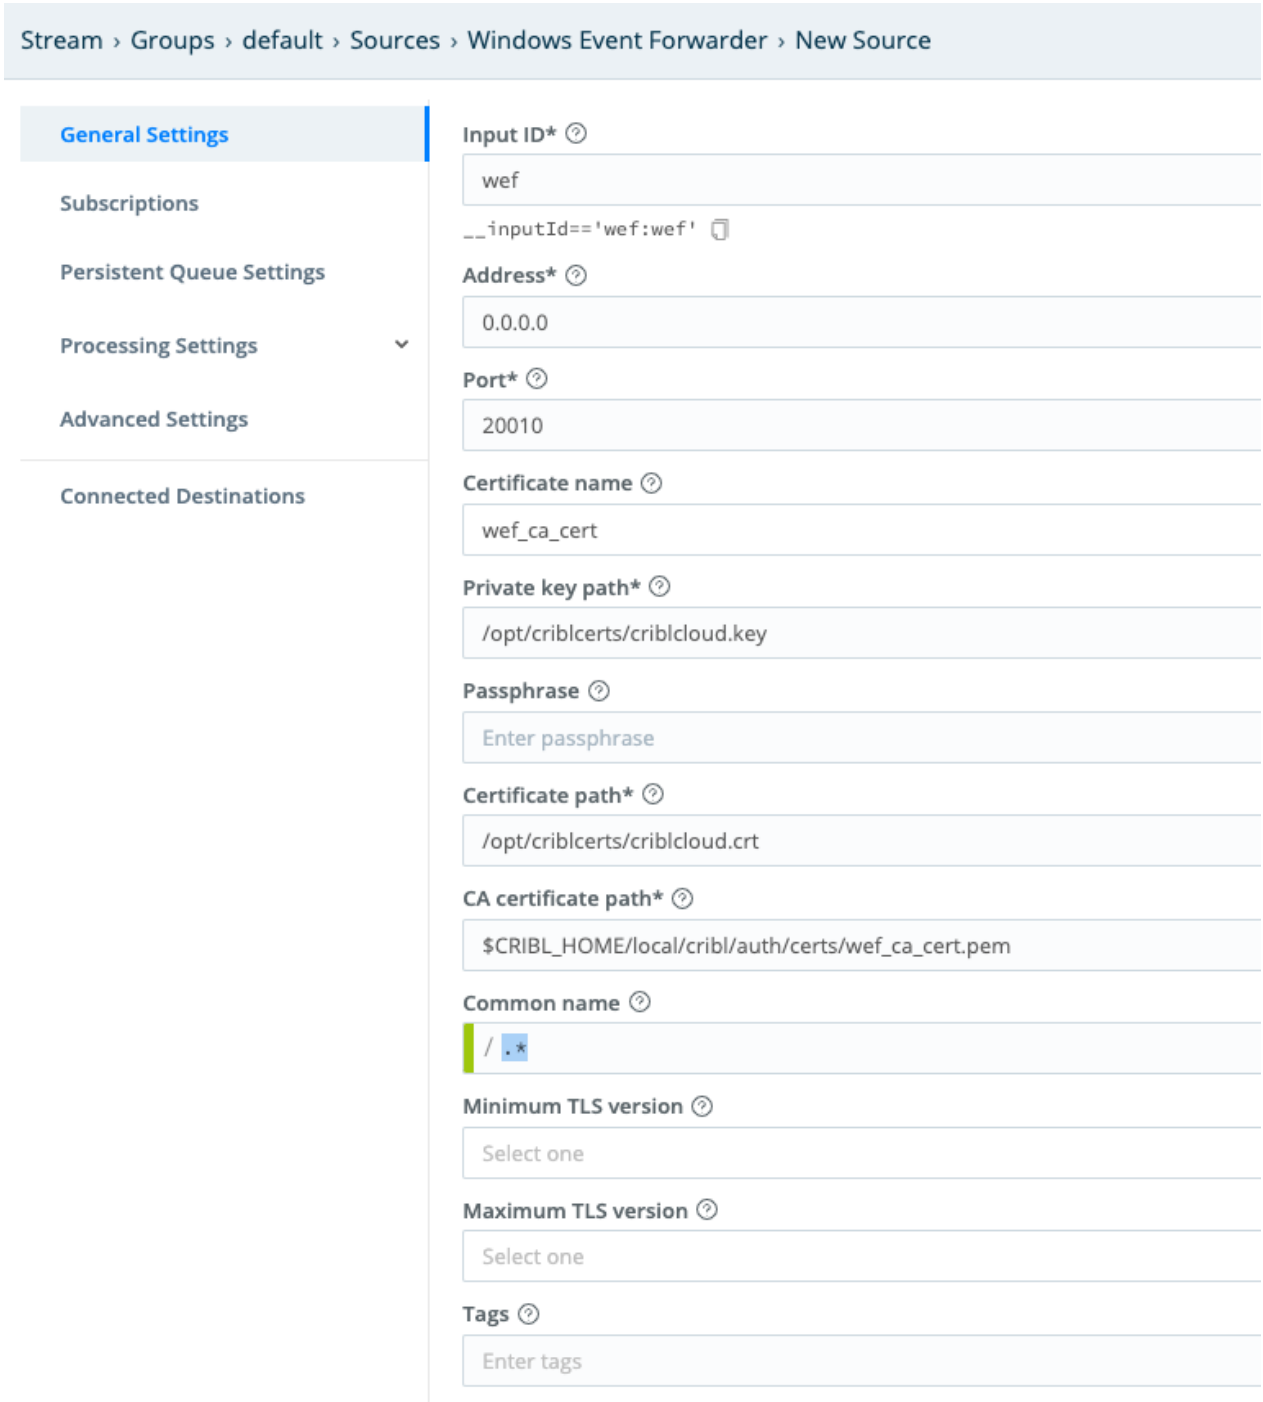

Configuring General Settings, continued

Advanced Settings

If you're using a shared certificate across multiple machines (meaning that your devices cannot be configured for certificate auto-enrollment), toggle **Allow MachineID mismatch** to `Yes`. This tells Cribl Stream to allow machine names that do not match the common name (CN) specified in the certificate. However, certificates will still need to be signed by the Certificate Authority that you uploaded.

If your devices **are** configured for certificate auto-enrollment, toggle **Allow MachineID mismatch** to `No`, because `MachineID`s will match the `Subject Name` specified the certificate. The `No` setting provides better security than `Yes`.

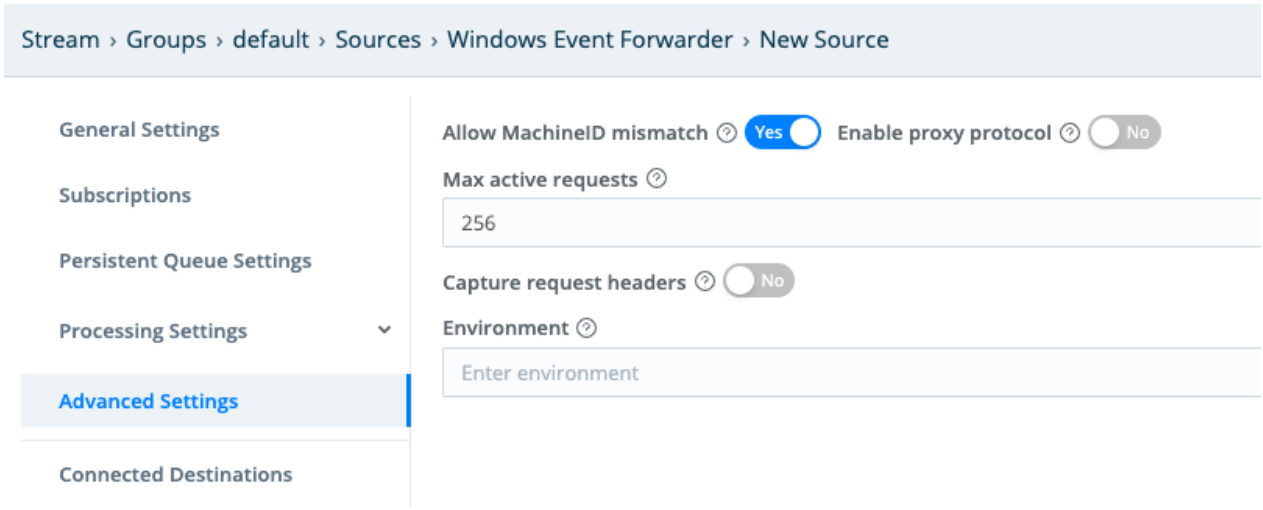

Configuring Advanced Settings

Subscriptions

Configure a subscription to forward the type of logs you're interested in. For example, to forward all Security logs:

- In **Query** > **Path**, enter `Security`.
- In **Query** > **Query expression**, enter `*[System]`.

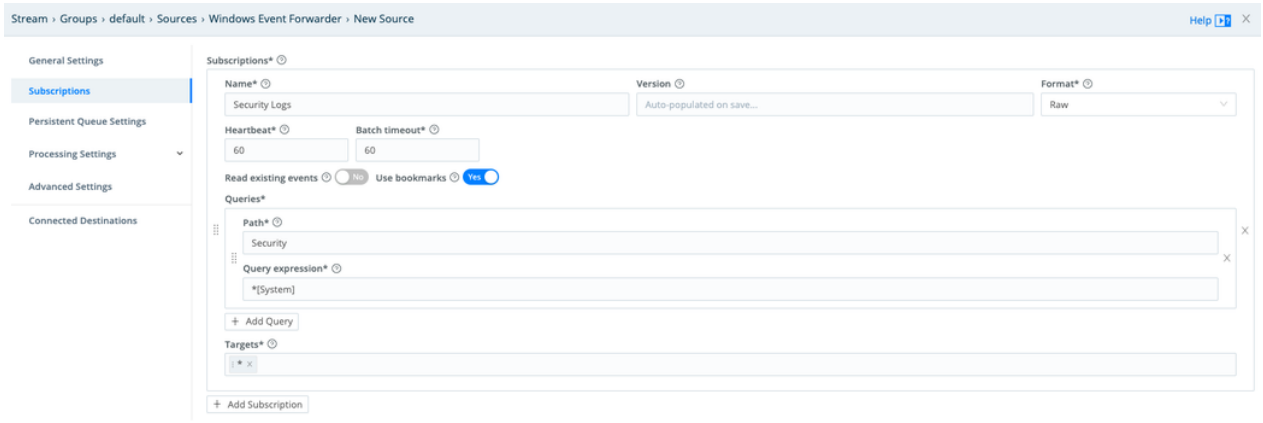

Configuring Subscriptions

> Remember to save, commit, and deploy your new configuration **as soon as you have configured Subscriptions**. This is required for the previous steps, beginning with Configuring the CA Certificate in Cribl.Cloud, to take effect.

Troubleshooting

A full account of how to troubleshoot WEF certificate administration is beyond the scope of this guide, but knowing about the following common errors is a good start.

Subscription Cannot be Created

Error:

```
The subscription <subscription> can not be created. The error code is 5004.
```

The error appears in the `Microsoft-Windows-Eventlog-ForwardingPlugin/Operational` log.

Resolution:

1. Apply the `O:BAG:SYD:...` permissions to make the log file readable.
2. Reboot the machine.

Cannot find the Certificate

Error:

```
The forwarder is having a problem communicating with subscription manager at address…
```

```
The WS-Management service cannot find the certificate that was requested.
```

For example:

```
The forwarder is having a problem communicating with subscription manager at address
https://<stream_worker>:5986/wsman/SubscriptionManager/WEC.

Error code is 2150858882 and Error Message is <f:WSManFault
xmlns:f=http://schemas.microsoft.com/wbem/wsman/1/wsmanfault Code="2150858882"
Machine="DELMD2273309.na.blkint.com"><f:Message>The WS-Management service cannot
find the certificate that was requested. </f:Message></f:WSManFault>.
```

Resolution:

- The `NETWORK SERVICE` user does not have permissions to use the private key of the certificate for authentication.
- Add the `NETWORK SERVICE` user to the list of users allowed to use the private key.

Further Reading

For more context and greater detail, see:

- System Center Dudes' blog post about using PowerShell to generate certs.
- ATA Learning's WEF tutorial.

For more about WEF subscriptions, including sample subscription querie, see:

- Microsoft's Use Windows Event Forwarding to Help with Intrusion Detection topic.
- The NSA Cybersecurity Directorate's WEF Guidance.
- Palantir's WEF Guidance.

15.11. Zscaler NSS Integration

Zscaler Nanolog Streaming Service (NSS) uses a VM to stream traffic logs in real time from the Zscaler Nanolog to a SIEM. Cribl Stream can take the place of the SIEM in this arrangement. Then you can use Cribl Stream to greatly reduce the size of ZScaler logs.

Configuring NSS to Send Data to Cribl Stream

Since Nanolog forwards data to a single IP address or FQDN, Cribl recommends that you use a load balancer to distribute data among Cribl Stream Workers.

Nanolog delivers data using a raw TCP connection.

In Zscaler:

- Go to **Administration** > **Nanolog Streaming Service**.
- In the **NSS Feeds** tab, click **Add NSS Feed** to open the following configuration window:

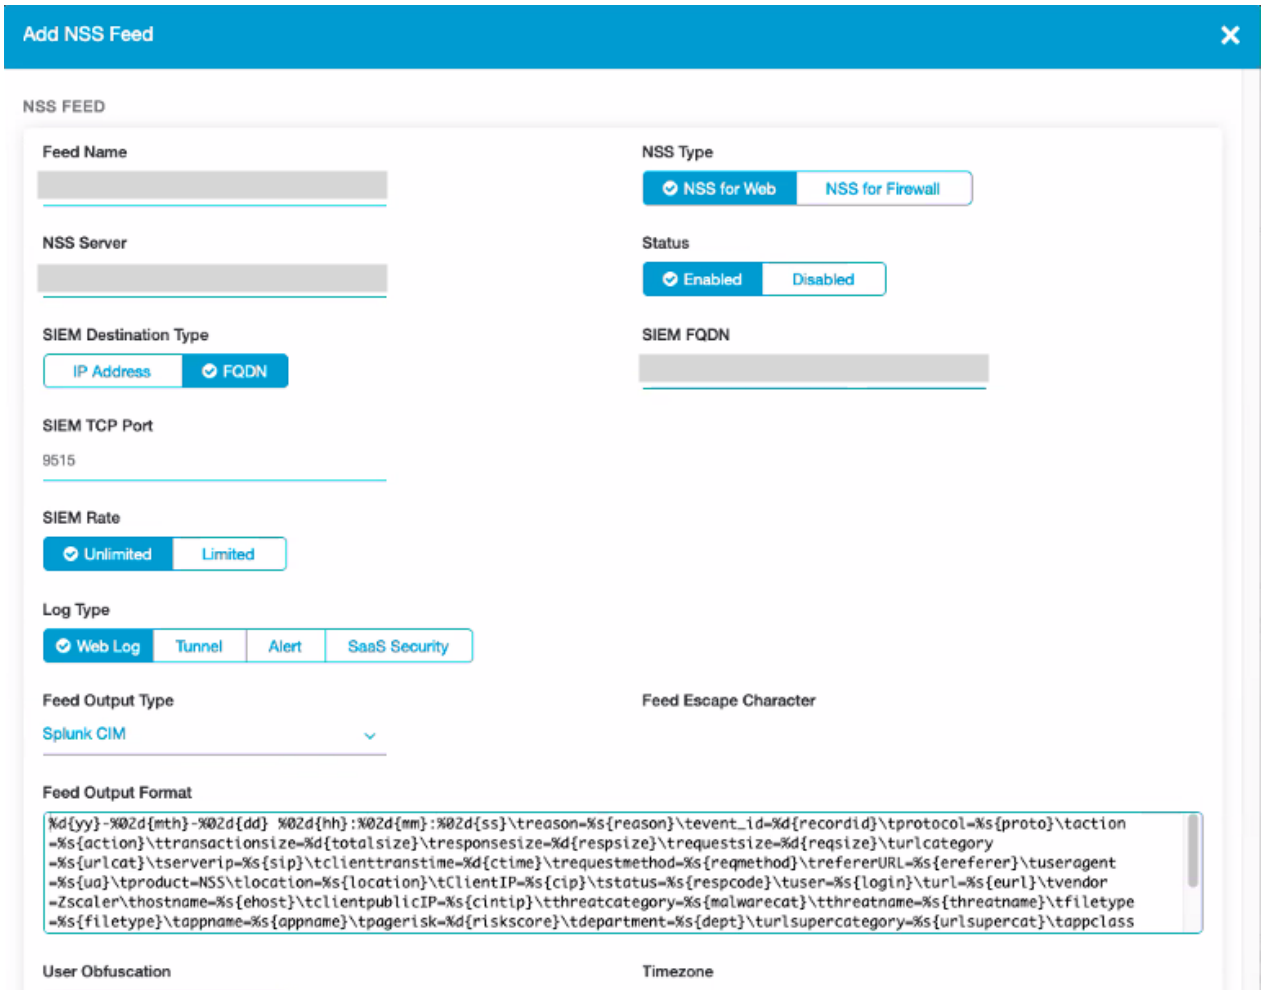

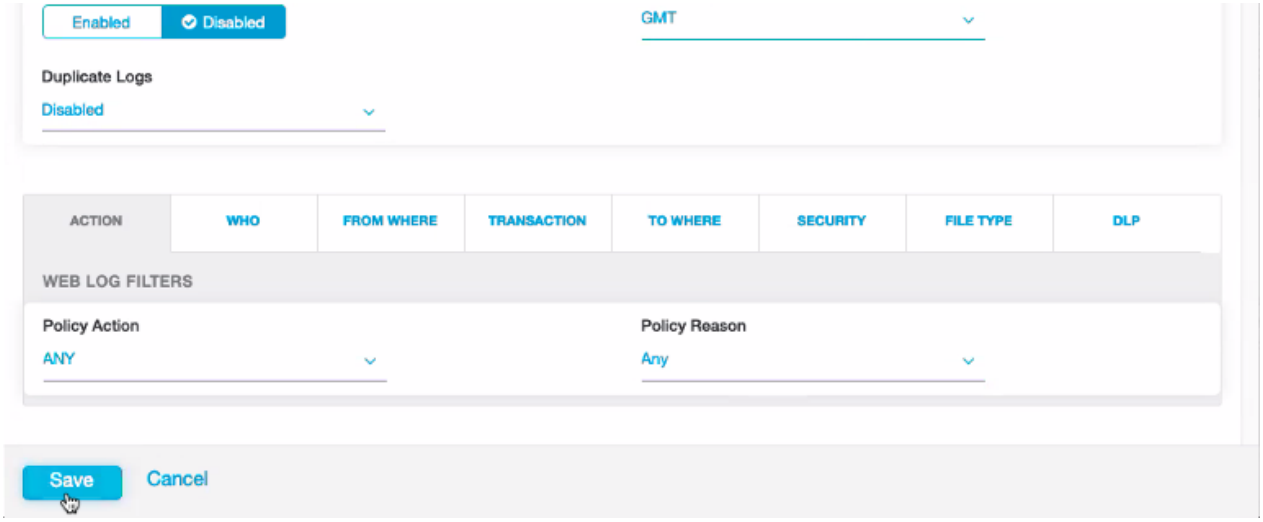

Adding a Zscaler NSS feed

- Enter a **Feed Name** that identifies this feed as one that sends data to Cribl Stream.
- Enter the IP address or FQDN for either your Cribl Stream instance, or the load balancer you're using with your Cribl Stream instances.
- Select a **Feed Output Type**. `Splunk CIM`, a tab-delimited key/value format, is a typical choice.

Alternatively, you choose a different option, such as CSV:

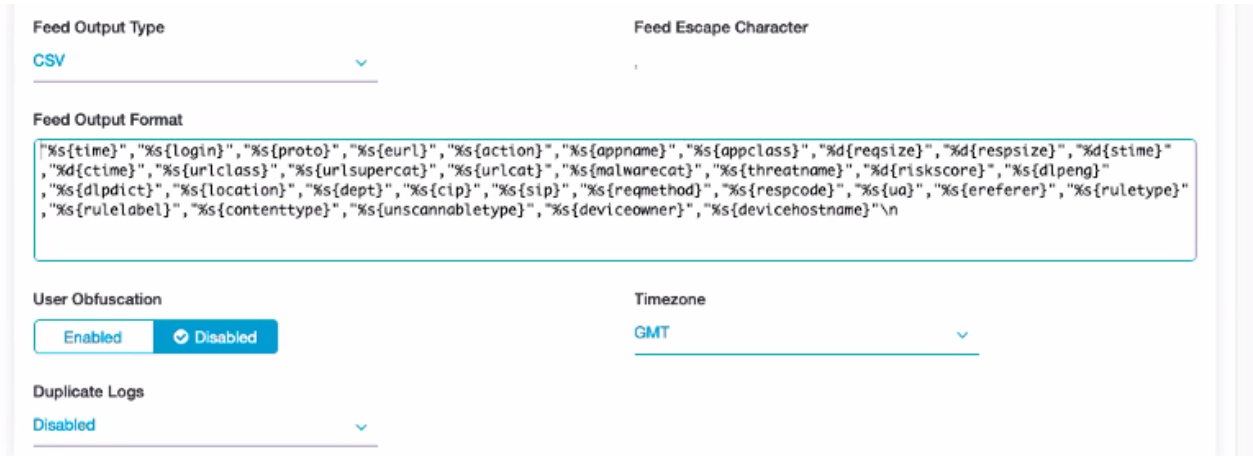

Choosing a CSV output format

Example Pipeline

Cribl Stream can reduce Zscaler log size by (1) reformatting and reshaping the data, and (2) suppressing, sampling, and dropping appropriate fields.

The following code block shows how to correctly parse tab-delimited key-value pairs.

```
let temp = {};

// Substr drops the timestamp from _raw, otherwise the split does not work correctly
__e['_raw'].substr(20).split('\t').forEach((element) => {
    // Split K=V on the first equal sign
    let eq = element.indexOf('=')
    let name = element.substr(0, eq);
    let value = element.substr(eq + 1);

    // if value is none or N/A, drop the field
    value !== 'None' && value !== 'NA' ? temp[name] = value : false;
    // otherwise use this line below
    // temp[name] = value;
})

__e['_raw'] = temp;
```

Here's an example Pipeline that uses the parsing code above. (You can directly import this Pipeline in JSON form.)

A Code Function parses the data:

Parsing with a Code Function

An Eval Function reshapes the data:

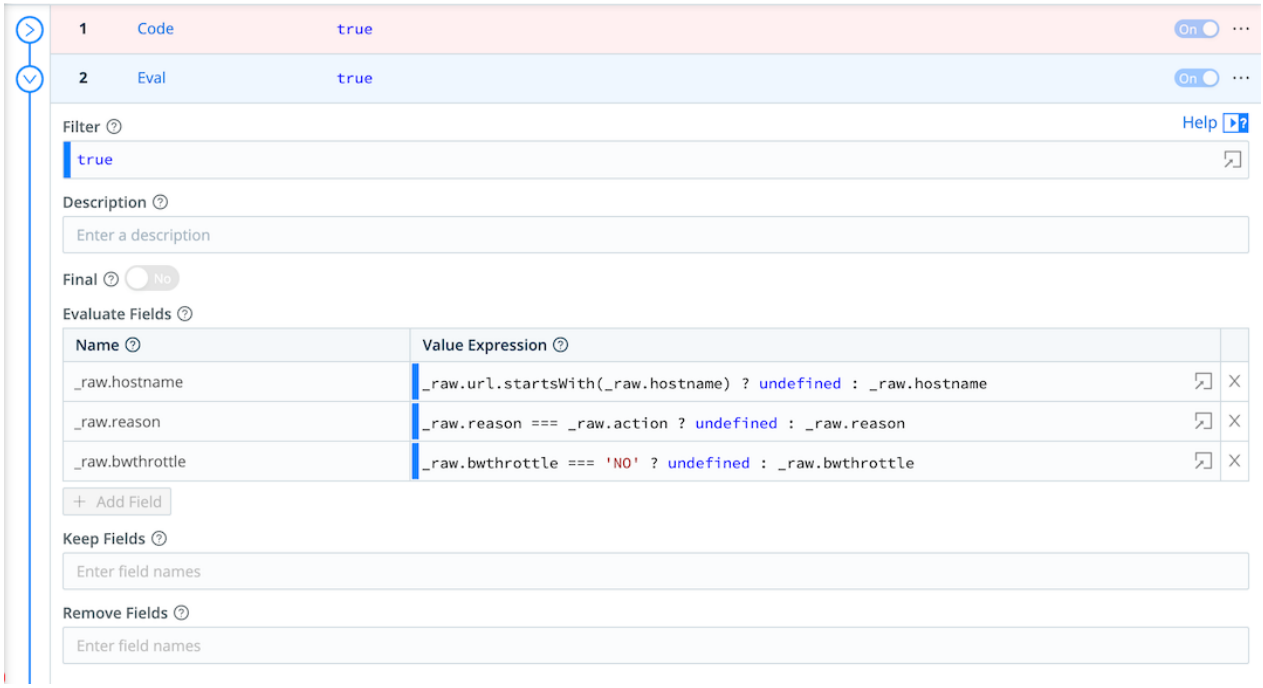

Reshaping with Eval

And finally, a Serialize Function drops unwanted fields:

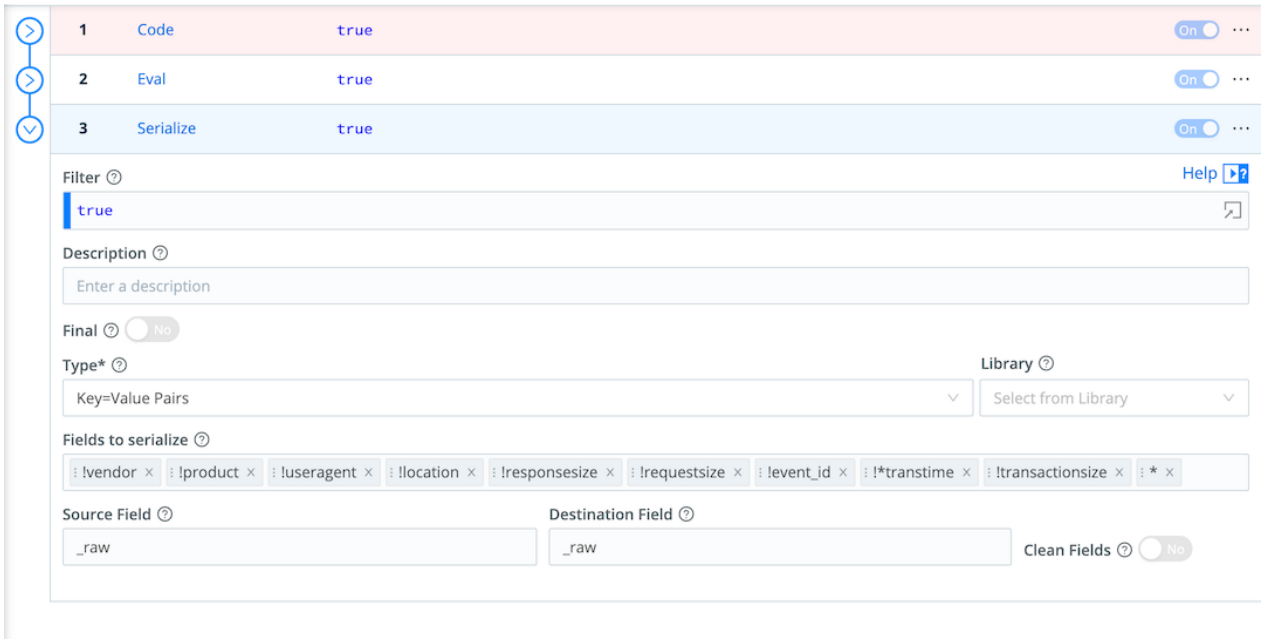

Dropping fields with Serialize

Example Pipeline JSON

To import the example Pipeline directly, copy and save the JSON below, then follow these instructions.

```
{
  "id": "zscaler",
  "conf": {
    "output": "default",
    "groups": {},
    "asyncFuncTimeout": 1000,
    "functions": [
      {
        "id": "code",
        "filter": "true",
        "disabled": false,
        "conf": {
          "maxNumOfIterations": 5000,
          "code": "let temp = {};\n\n// Substr drops the timestamp from _raw,
otherwise the split does not work
correctly\n__e['_raw'].substr(20).split('\\t').forEach((element) => {\n    // Split
K=V on the first equal sign\n    let eq = element.indexOf('=')\n    let name =
element.substr(0, eq);\n    let value = element.substr(eq + 1);\n\n    // if value
is none or N/A, drop the field\n    value !== 'None' && value !== 'NA' ? temp[name]
= value : false;\n    // otherwise use this line below\n    // temp[name] =
value;\n})\n\n__e['_raw'] = temp;"
        }
      },
      {
        "id": "eval",
        "filter": "true",
        "disabled": false,
        "conf": {
          "add": [
            {
              "name": "_raw.hostname",
              "value": "_raw.url.startsWith(_raw.hostname) ? undefined :
_raw.hostname"
            },
            {
              "name": "_raw.reason",
              "value": "_raw.reason === _raw.action ? undefined : _raw.reason"
            },
            {
              "name": "_raw.bwthrottle",
              "value": "_raw.bwthrottle === 'NO' ? undefined : _raw.bwthrottle"
            }
          ]
        }
      },
      {
        "id": "serialize",
        "filter": "true",
        "disabled": false,
        "conf": {
          "type": "kvp",
          "fields": [
            "!vendor",
            "!product",
            "!useragent",
            "!location",
            "!responsesize",
            "!requestsize",
            "!event_id",
```

```
            "!*transtime",
            "!transactionsize",
            "*"
          ],
          "dstField": "_raw",
          "cleanFields": false,
          "srcField": "_raw"
        }
      }
    ]
  }
}
```

16. Troubleshooting

16.1. Known Issues

This page lists known issues affecting Cribl Stream and/or Cribl Edge.

2023-07-27 - All Versions through Current - Recent Actions endpoint returns results for certain unauthorized users [CRIBL-18818]

Problem: The Recent Actions endpoint `GET /api/v1/ui/recentActions` returns more recent actions than intended for non-admin users.

Workaround: None.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-26 – v.4.2.0–4.2.1 – File Monitor Source causes memory leaks and Worker Node crashes [CRIBL-19154]

Problem: The File Monitor Source, when running in Manual Discovery mode, leaks memory and a file descriptor each time it rediscovers a file that it has already collected. The leaked resources increase with every polling interval, for every rediscovered file, eventually causing Worker Nodes to crash. This does not affect Auto Discovery mode, and does not affect deployments without an active File Monitor Source.

Workaround: File Monitor users should bypass (or roll back from) versions 4.2.0–4.2.1.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-20 – v.4.2.0–4.2.1 – AppScope Source might reference a nonexistent config [CRIBL-19044]

Problem: The 'sample_config' stock configuration was removed in v.4.2.0. This missing config causes the Appscope Source to disappear from the UI, and changes to other Sources also fail with validation errors.

Workaround: For on-premises/customer-managed deployments, clone one of the existing AppScope configurations and rename it to `sample_config`. For Cribl.Cloud customers, there is no workaround yet.

Fix: Version TBD.

2023-07-19 – v.4.2.0–4.2.1 – Users with the Admin Permission cannot view Notifications [CRIBL-19015]

Problem: Users with the **Admin** Permission receive a `You do not have sufficient permissions to access this resource` message when attempting to view Notifications. Users with this Permission should be able to access Notifications.

Workaround: None. Organization **Owners** can access these notifications.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-19 – v.4.2.0–4.2.1 – Users with the Admin Permission cannot bootstrap a Worker due to a missing auth token [CRIBL-19014]

Problem: Users with the **Admin** Permission can't add a Worker using **Add / Update Worker Node**, because the modal doesn't have the **Leader hostname/IP** or the **Auth token** fields populated. You can enter the hostname/IP into its field, but not the auth token. Users with the **Admin** Permission should see the auth token.

Workaround: Organization **Owners** can perform this action and share the auth token.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-19 – v.4.2.0 – Credential encryption errors preventing user access to Cribl Stream Sources and Destinations [SAAS-4823]

Problem: A critical regression caused Worker Groups to become unresponsive, preventing access to Sources and Destinations. This issue was caused by incorrectly encrypted credentials.

Workaround: Upgrade to Cribl Stream 4.2.1.

Fix: Fixed in Cribl Stream 4.2.1.

2023-07-18 – v.4.2.0–4.2.1 – Migrated Local Users appear in the Members UI with "No Access" [CRIBL-18973]

Problem: Local Users are incorrectly shown in the **Settings** > **Members** UI with `No Access`. However, their Roles still function as originally configured, and still display correctly at **Settings** > **Global Settings** > **Access Management** > **Local Users**.

Workaround: Rely on the **Local Users** UI.

Fix: Version TBD.

2023-07-18 – v.4.2.0–4.2.1 – Product-level Editor Permissions do not allow a commit/deploy action on the Worker Groups/Fleets page [CRIBL-18970]

Problem: Users with product-level Edge **Editor** or Stream **Editor** Permissions are unable to commit and deploy changes made to Worker Groups or Fleets from the Group or Fleet page. However, if the user navigates to the Group or Fleet where the change was saved, the **Commit and Deploy** button is available.

Workaround: Commit and deploy from the Worker or Group where you saved the change.

Fix: Version TBD.

2023-07-18 – v.4.2.0–4.2.1 – Users with the Edge Editor Permission cannot delete secrets under Fleet Settings [CRIBL-18969]

Problem: Users with the Edge **Editor** Permission can create secrets under **Fleet** > **Fleet Settings** > **Secrets** but they are unable to delete the secret once it is created. Edge **Editors** should have this capability.

Workaround: Assign the Edge **Admin** Permission to users that need to be able to delete secrets.

Fix: Version TBD.

2023-07-17 – v.4.2.0–4.2.1 – Edge Node Settings not visible when teleporting [CRIBL-18963]

Problem: When you teleport into an Edge Node, you can't view **Node Settings** in the UI.

Workaround: None.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-17 – v.4.2.0–4.2.1 – Users with the Edge Editor Permission cannot delete Sources, Destinations, or Pipelines [CRIBL-18951]

Problem: If you assign a user the Edge **Editor** permission at the product-level, the user will not be able to delete Sources, Destinations, or Pipelines. Edge **Editors** should have this capability.

Workaround: Assign the Edge **Admin** Permission to users that need to be able to delete these items.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-17 – v.4.2.0–4.2.1 – Change from Edge User to Edge Editor can fail to take effect [CRIBL-18950]

Problem: If you assign the **Editor** Permission to an Edge **User** at the Fleet-level and then later assign the Edge **Editor** Permission to the same User at the product-level (Edge **User** now becomes an Edge **Editor**), the **Editor** Permission at the product-level can fail to take effect. The user will have **Editor** access to the one Fleet at the Fleet-level but they will still show as an Edge User and will not have **Editor** Permissions at the product-level.

Workaround: None.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-17 – v.4.2.0–4.2.1 – Product logins for users with product-level Read Only and Editor Permissions can result in misleading log entries [CRIBL-18948]

Problem: When users that are assigned product-level **Read Only** or **Editor** Permissions log in to a product, the browser incorrectly makes requests for resources that users at this level are not allowed to access. While these requests are correctly denied and there is no risk of compromising security, Cribl admins may see misleading log entries indicating that these users tried to access something they are not allowed to access.

Workaround: None.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-16 – v.4.2.0–4.2.1 – After upgrading, Monitoring dashboards are not visible for users with `GroupRead` and

`GroupCollect` Policies [CRIBL-18925]

Problem: Users that were assigned `GroupRead` and `GroupCollect` Policies in Cribl Stream 4.1.x will no longer be able to access the **Monitoring** tab and dashboard after upgrading to Cribl Stream 4.2.

Workaround: For `GroupRead`, migrate the user to **Read Only** Permission at the Group-level in Members and Permissions. Assign the Member as Stream **User** then set their Permissions for the group as **Read Only**. For `GroupCollect`, there is no specific workaround but users can be assigned the `GroupEdit` Policy if they need to view Monitoring dashboards.

Fix: Version TBD.

2023-07-15 – v.4.2.0–4.2.1 – Edge users with the Fleet-level Editor Permissions cannot use manual file discovery [CRIBL-18923]

Problem: When using manual file discovery in Cribl Edge, users that have been assigned the **Editor** Permission at the Group/Fleet-level will not see any results.

Workaround: You can assign the **Admin** Permission for users that require the manual file discovery feature.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-13 – v.4.2.0–4.2.1 – Projects created in v.4.1.x will be deleted when upgrading to Stream v.4.2 [CRIBL-18920]

Problem: Any Projects you created in v.4.1.x will be deleted when you upgrade to v.4.2. You must re-create your Projects after you upgrade. You should also delete and re-create any Subscriptions that carry over during the upgrade.

Workaround: None. All Projects and Subscriptions must be recreated after you upgrade.

Fix: Version TBD.

2023-07-13 – v.4.2.0–4.2.1 – Stream Users are able to access the Monitoring page [CRIBL-18848]

Problem: Stream **Users** with no Group-level Permissions are able to access the **Monitoring** page. The **Monitoring** menu item is hidden, but the page can be access manually using a URL.

Workaround: None.

Fix: Version TBD.

2023-07-13 – All Versions through Current – When configuring an S3 Collector, JavaScript expressions break the "Auto-populate from" option for the Path field [CRIBL-18844]

Problem: When automatically populating an S3 Collector from an S3 Destination, the Collector **Path** field won't resolve JavaScript expressions, even if the expression was valid on the Destination that the field was populated from. The S3 Collector path is treated like a literal string and the software fails to warn you that the path is invalid.

Workaround: None.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-12 – v.4.2.0–4.2.1 – No Access to Subfleets for the Edge User Permission [CRIBL-18784]

Problem: Regardless of what Permissions are granted at the Fleet-level, Edge members assigned to the **User** Permission will not have access to Subfleets.

Workaround: At the (Edge) product level, you must grant your members **Read Only**, **Editor**, or **Admin** Permissions so that they can access Subfleets.

Fix: Planned for Cribl Stream 4.2.2.

2023-07-07 – v.4.1.3-4.2.1 – When configuring an HTTP Source, enabling Source PQ changes the inputId in events [CRIBL-18668]

Problem: When Source-side Persistent Queueing is enabled on an HTTP Source, the trailing colon is dropped from `__inputId`. This will break Routes and filters that are based on the Input ID if it is copied from the configuration page. Live captures will also stop working until you modify them.

Workaround: None.

Fix: Version TBD.

2023-07-06 – v.4.2.0–4.2.1 – Default Pack is not visible to Project Editor when a Project is shared with them [CRIBL-18639]

Problem: When a Cribl admin sets up a Project, a default Pack is included. If the Admin then shares that Project with a Project editor, the editor will not see the default Pack.

Workaround: In the Project view, the Project editor can add any Pack that has been made available by the admin, including the default Pack.

Fix: Version TBD.

2023-07-03 – v.4.2.0–4.2.1 – Users with Group-level Read Only Permissions can interact with logging level menus [CRIBL-18556]

Problem: Users with the **Read Only** Permission at the Group-level can access the **Add Channel** and **Delete** buttons under **Group** > **Manage** > **Group Settings** > **Logging** > **Levels**. However, they are unable to save changes. When performing these actions, **Read Only** users will see a **Forbidden** message displayed in the UI and no changes will be saved. The setting should not be accessible to users with this Permission.

Workaround: None.

Fix: Version TBD.

2023-06-29 – All Versions through v.4.1.3 – (Linux) System Metrics Source does not emit "Per interface" metrics when set to "All" [CRIBL-18473]

Problem: In the (Linux) **System Metrics** Source > **Host Metrics** tab, selecting **All** does not emit **Per Interface** metrics.

Workaround: In the **Host Metrics** tab, select **Custom** > **Network** > **Custom** then toggle **Per interface metrics** to `Yes`.

Fix: In Cribl Stream 4.2.

2023-06-28 – v.4.2.0–4.2.1 – Project editor can't delete Pipelines via Options menu [CRIBL-18447]

Problem: In a Project's **Pipelines** modal, when a Project editor opens a Pipeline's ••• (Options) menu, the **Delete** option is unavailable. Cribl Stream displays a spurious error about insufficient permissions.

Workaround: Use the list's check boxes to select Pipelines, then click **Delete Selected Pipelines**.

Fix: Planned for Cribl Stream 4.2.2.

2023-06-26 – All Versions through v.4.1.3 – High CPU usage in File Monitor Source's Manual mode [CRIBL-18400]

Problem: In the **File Monitor** Source and the **Explore** > **Files** tab UI, the **Manual** mode does not honor the **Max depth** setting. The API process consumes high CPU resources because the discovery logic (used in the **File Monitor** Source and **Files** tab) recurses in the directory tree.

Fix: In Cribl Stream 4.2.

2023-06-26 – All Versions through Current – Fleet Upgrade Errors [CRIBL-18374]

Problem: A Fleet's upgrade from a Leader can result in errors when the Edge Nodes use different `host` / `port` / `tls` settings than Worker Nodes.

Workaround: The Edge Nodes and Workers must connect to the leader using the `host` / `port` / `tls` connection details. If this is not possible, upgrade Edge Nodes separately using the boostrap script.

Fix: Version TBD.

2023-06-21 – v.3.5.2–4.1.3 – Using the Rename Function gives unexpected results due to skipped internal fields [CRIBL-18285]

Problem: When internal fields are present in the `Rename fields` list, the Rename Function may incorrectly assign field keys or values.

Workaround: This function is not intended to operate on internal fields. Avoid this operation.

Fix: In Cribl Stream 4.2.

2023-06-20 – All versions through 4.2.2 – HTTP Destinations sometimes send oversized payloads [CRIBL-18218]

Problem: HTTP-based Destinations do not strictly enforce the **Max Body Size** limit in all cases. This can cause payloads to be sent that exceed the maximum size some downstream receivers can accept.

Workaround: Experiment with lower **Max Body Size** values until downstream receivers are reliably accepting all events.

Fix: Planned for Cribl Stream 4.3.

2023-06-15 – v.4.1.3 – Amazon CloudWatch Destinations log error while flushing events older than 24 hours [CRIBL-18184]

Problem: Amazon CloudWatch Destination doesn't filter batches of events to ensure all events in the batch are within 24 hours of each other as required by the API, resulting in the batch being rejected by Cloudwatch.

Workaround: Add a Post-Processing Pipeline with a Drop Function using a Filter Expression of `_time<(Date.now() / 1000) - 86400`.

Fix: In Cribl Stream 4.2.

2023-06-14 – v.4.1.2–4.1.3 – The Office 365 Activity Source misses events [CRIBL-18164]

Problem: The Office 365 Activity Source misses events due to the current collection system. For services such as Exchange, SharePoint, OneDrive, and Teams, Microsoft indicates that audit record availability is typically 60 to 90 minutes after an event occurs. Our current collector methodology does not account for this availability window. Instead, the Source completes runs as scheduled and collects only events it finds during the configured time range, which can lead to missed events.

Workaround: None.

Fix: In Cribl Stream 4.2.

2023-06-08 – v.4.1.2 – AES-256-GCM security vulnerability [CRIBL-18038]

Problem: The AES-256-GCM encryption option introduced in v.4.1.2 included a security vulnerability.

Workaround: Do not use this option in v.4.1.2.

Fix: In Cribl Stream 4.1.3.

2023-06-01 – v.4.0.0–4.1.3 – GroupEdit is not able to commit changes [CRIBL-17939]

Problem: Users having the `GroupEdit` policy are able to make changes (e.g. create new Sources) but are unable to **Commit** their changes. These users should be able to **Commit**, but not **Deploy**, changes.

Workaround: Apply the `GroupFull` policy for users that need to be able to **Commit** changes. These users will also have the ability to deploy a Worker Group or Fleet.

Fix: In Cribl Stream 4.2.

2023-06-01 – v.4.1.0–4.1.2 – Kubernetes Logs Event Breaker Incorrectly Breaks Events [CRIBL-17907]

Problem: The **Kubernetes Logs** Event Breaker incorrectly breaks events with out-of-order timestamps.

Workaround: In the Event Breaker, move the logic that adjusts `_raw` into a **Pre-Processing** Pipeline.

Fix: In Cribl Stream 4.1.3.

2023-05-27 – v.4.1.1–4.1.2 – Perf bug: RPC consuming excessive CPU compiling expressions [CRIBL-17779]

Problem: In 4.1.1, to improve product security, we changed how we manage our RPC traffic from Leaders and Workers. This change can have a negative impact in larger environments with many Worker Processes. Following a 4.1.1 or 4.1.2 upgrade, the Leader can become non-responsive to UI requests due to a steady 100% CPU utilization. When this happens, you cannot manage or monitor Cribl Stream environments.

Workaround: Roll back to a previous stable version, such as 4.1.0.

Fix: In Cribl Stream 4.1.3.

2023-05-26 v.4.1.2–4.1.3 – Worker Nodes don't update from Cribl Stream Leader [CRIBL-17792]

Problem: In Cribl Stream 4.1.2–4.1.3, if you define the `baseURL` key on a Leader, Worker Nodes don't get the latest config version from the Leader. The log may also contain `checksum mismatch` warnings.

Workaround: Clear **URL base path** in **Settings** > **General Settings** > **Advanced** or specify an empty `baseURL` key in `cribl.yml`. If you need to define a base URL, do not upgrade to the affected versions.

Fix: In Cribl Stream 4.2.

2023-05-19 – v.4.1.2 – CrowdStrike Destination's "LogScale endpoint" field hidden from UI [CRIBL-17715]

Problem: The CrowdStrike Falcon LogScale Destination's **LogScale endpoint** field is hidden from the 4.1.2 configuration modal, but can be restored.

Workaround: Follow these steps, in sequence, for each LogScale Destination.
1. Populate the LogScale config modal, and save once.
2. Reopen the modal, then select **Manage as JSON**.
3. Change the `"loadbalanced":` key's value from `true` to `false`.
4. Copy this default nested element: `"url": "https://cloud.us.humio.com/api/v1/ingest/hec",`
5. Paste it above the whole `"urls"` element (typically at line 21).
6. Click **OK** to restore the visual UI, with the **LogScale endpoint** field now visible.
7. Enter your actual endpoint URL, and save the config.

Fix: In Cribl Stream 4.1.3.

2023-05-16 – v.4.1.1–4.1.2 – Expanding Status of Output Router Destination triggers error [CRIBL-17632]

Problem: When you attempt to expand a node on the **Status** tab for an Output Router Destination, the page crashes and the error `Cannot convert undefined or null to object` appears.

Fix: In Cribl Stream 4.1.3.

2023-05-12 – v.4.0–4.1.3 – Windows Event Forwarder Source causes duplicate events when experiencing backpressure [CRIBL-17614]

Problem: In certain cases where the Windows Event Forwarder Source experiences backpressure from a downstream Pipeline or Destination, it will return an incorrect error message to the client that sent the events. This causes that client to re-send the same events and results in duplicate events ingested in Stream.

Workaround: In cases where the cause of the backpressure can be resolved, this issue is mitigated. However if the backpressure cannot be completely removed, there is no additional workaround.

Fix: In Cribl Stream 4.2.

2023-05-12 – v.4.0–4.1.2 – The Kubernetes Logs Source drops events [CRIBL-17602]

Problem: Events from a running container will stall when the underlying container runtime rotates the log file. Any further rotation of log files will result in data loss.

Workaround: Restart the Kubernetes Logs Source to reconnect.

Fix: In Cribl Stream 4.1.3.

2023-05-05 – v.4.1.1 – S3 ingestion slows after upgrade [CRIBL-17317]

Problem: After upgrading to Cribl Stream 4.1.1, ingesting using any `JSON` Array Event Breaker (such as AWS CloudTrail) will slow or stop due to high CPU usage.

Workaround: Roll back to a previous stable version, such as 4.1.0.

Fix: In Cribl Stream 4.1.2.

2023-04-27 – v.4.1.1 – Worker Nodes integrated with `systemd/initd` can fail upon reconfig [CRIBL-17264]

Problem: Where 4.1.1 on-prem or hybrid Worker Nodes (on Linux) are integrated with `systemd/initd`, deploying new config bundles to those Worker Nodes can stop the Worker Nodes from processing data. The root cause is an incorrect backup step, which (depending on permissions) can also consume large amounts of disk space on their hosts.

Precondition: Cribl-managed Cloud instances are unaffected. This problem has been observed only if at least one of the following directories is populated, or exists with restricted permissions:

```
/data/
/default/cribl/
/default/edge/
/local/cribl/
/local/edge/
/default/<any-installed-Pack-name>/
/local/<any-installed-Pack-name>/
```

Workaround: Skip v.4.1.1 or roll back to your last stable version. To run v.4.1.1, this workaround is available on systemd's `Service` section: 1. In the script `/etc/systemd/system/cribl.service`, add the line: `WorkingDirectory=/opt/cribl`, (This is the default path - specify your own path equivalent to `$CRIBL_HOME`). 2. Then reload the systemd daemon: `systemctl daemon-reload`. 3. Then restart the Cribl Stream instance using `systemctl restart <service name>`.

Fix: In Cribl Stream 4.1.2.

2023-04-14 – v.2.2–4.1.x – Requests from Office 365 Message Trace Source failed intermittently [CRIBL-16929]

Problem: Microsoft has fixed this Office 365 Message Trace API problem with this patch (Microsoft login required). Before this patch, requests failed intermittently, often with `Non-whitespace` errors.

Fix: Fixed by Microsoft (not a Cribl problem).

2023-04-13 – v.4.1.1 – Monitoring incorrectly shows metrics for disconnected Subscriptions [CRIBL-16926]

Problem: Selecting **Monitoring** > **Data** > **Subscriptions** will falsely show statistics even for Subscriptions that are not connected to a Destination, and therefore have no data flow.

Workaround: Ignore these Monitoring statistics.

Fix: In Cribl Stream 4.1.2.

2023-04-03 – v.4.1.0 – Windows Event Logs Source should have a configurable Max Event Size [CRIBL-16549]

Problem: Events aren't broken properly when collecting logs from the PowerShell event log. The Source contains a Max Event Limit of `51200`, which is a hard-coded breaker config. This limit should be configurable.

Fix: In Cribl Stream 4.1.1.

2023-03-31 – v.4.1.0-4.1.1 – Cribl.Cloud API Credential's Roles aren't honored on tokens [SAAS-3681]

Problem: API Bearer tokens obtained through the Cribl.Cloud portal are all granted the `Admin` Role, regardless of the scope specified on the parent Credential.

Workaround: Use the pre-4.0 workaround to obtain Bearer tokens from the in-app API Reference.

Fix: In Cribl Stream 4.1.2.

2023-03-30 v.4.1.0 – Splunk Load Balanced Destination incorrectly re-creates all connections during DNS resolution [CRIBL-16494]

Problem: When **Minimize in-flight data loss** is enabled, the Splunk Load Balanced Destination re-creates all outbound connections during DNS resolution. This will cause the Destination to report a blocked status until the outbound connections refresh. If persistent queues (PQ) are enabled, PQ will engage while the Destination is blocked.

Workaround: Select the Destination's **Manage as JSON** option, to add the key-value pair: `"maxFailedHealthChecks": 1.`

Fix: In Cribl Stream 4.1.1.

2023-03-28 – v.4.1.0 – Add Kubernetes and Docker modals in the UI aren't checking the `CRIBL_BOOTSTRAP_HOST` environment variable [CRIBL-16432]

Problem: The Add Windows and Linux modals check for a bootstrap hostname to see if a user has configured a host override with the `CRIBL_BOOTSTRAP_HOST` environment variable. The Add Kubernetes and Docker modals aren't checking the environment variable as expected.

Fix: In Cribl Stream 4.1.1.

2023-03-23 – v.4.1.0 – Leader's config deployments to pre-4.1 Workers silently fail [CRIBL-16339]

Problem: A 4.1.x Leader requires Workers to also be upgraded to – v.4.1.x. If you attempt to deploy configs to Workers running earlier versions, the intended upgrade prompt might not appear. In this case, the deploy will silently hang.

Workaround: If you haven't enabled automatic upgrades of on-prem or hybrid Workers, upgrade all Worker Groups to 4.1.x before you deploy to them.

Fix: In Cribl Stream 4.1.1.

2023-03-22 – v.4.1.0-4.1.1 – Cribl Stream Database Collector cannot connect with SQL Server using AD authentication [CRIBL-16304]

Problem: On the indicated versions, the Database Collector cannot connect with SQL Server using Active Directory (AD) authentication. (Only local auth works.)

Workaround: Reverting to Cribl Stream v.4.0.4 restores the Database Collector's ability to connect using AD authentication.

Fix: In Cribl Stream 4.1.2.

2023-03-21 – v.4.1.0-4.2.1 – Unable to bind `CRIBL_DIST_MASTER_URL` to an IPv6 address [CRIBL-16284]

Problem: Due to an issue with the `CRIBL_DIST_MASTER_URL` environment variable, Cribl will not bind to a specified IPv6 address.

Workaround: Manually update the settings in the two relevant configuration files, `instance.yml` and `cribl.yml`, for RPC and UI communication respectively.

For the UI, manually define the host setting in the `cribl.yml` file:

```
api:
  host: "::"
```

To configure the instance as a Leader node and listen on all IPv6 and IPv4 addresses, manually configure the `instance.yml` file:

```
distributed:
  mode: master
  master:
    host: "::"
    port: 4200
    tls:
      disabled: true
    authToken: criblmaster
```

Fix: Planned for Cribl Stream 4.2.2.

2023-03-20 – v.3.5.0–4.1.0 – System Activity drawer on Windows Edge Nodes displays no data [CRIBL-16194]

Problem: When you navigate to a Fleet's **List View** and click a row containing a Windows Edge Node, the System Activity drawer displays no data.

Fix: In Cribl Stream 4.1.1.

2023-03-20 – v.4.1.0-4.2.1 – If a deployment fails, Workers will not automatically revert to the previous version [CRIBL-16203]

Problem: When a deployment fails, Workers cannot revert `default/cribl` to a previous version because that directory is no longer backed up. The Worker will enter a broken state if you provide an invalid deploy bundle, because it cannot revert to the last valid state.

Workaround: To resolve any broken Workers, you must deploy a valid configuration. The Worker will resume working once it picks up the new configuration.

Fix: Planned for Cribl Stream 4.2.2.

2023-03-15 – v.4.1.0 – QuickConnect Pipeline Settings button fails [CRIBL-16142]

Problem: When adding a new Pipeline using QuickConnect, clicking the gear () button fails to open Pipeline Settings.

Workaround: After saving the Pipeline in QuickConnect, use **Manage** > **Processing** > **Pipelines** to select your new Pipeline. Click the gear button here to access Pipeline Settings as expected.

Fix: In Cribl Stream 4.1.1.

2023-03-14 v.4.0.0–4.1.0 – Duplicate data with Event Hubs [CRIBL-16102]

Problem: When **Minimize Duplicates** is enabled, the Azure Event Hubs Source assigns partitions to multiple Worker Nodes in the same Worker Group, which generates duplicate data.

Workaround: Toggle **Minimize Duplicates** to `No` in **Azure** > **Event Hubs** > **Advanced Settings**.

Fix: In Cribl Stream 4.1.1.

2023-03-01 – v.4.0.4 – Kafka-based Sources are omitting the `_time` field [CRIBL-15696]

Problem: Kafka-based Sources (Kafka, Azure Event Hubs, Confluent Cloud) are not sending the `_time` field.

Workaround: If Cribl Stream is not retrieving the `_time` field, then in the affected Sources' config modals, use the **Processing Settings** > **Fields** tab to re-create `_time`. This new `_time` field will add the current

(ingestion) time instead of the message time.

Fix: In Cribl Stream 4.1.

2023-02-24 – v.4.1.0-4.2.1 – The Chain Function has a 10% impact on performance [CRIBL-15538]

Problem: Using the Chain Function to chain data processing from one Pipeline or Pack to another degrades performance by about 10%, compared to running the original Pipeline or Pack directly.

Fix: Planned for Cribl Stream 4.2.2.

2023-02-23 – v.4.0.x – DNS Resolution reconnects Cribl TCP connections every time [CRIBL-15363]

Problem: All Cribl TCP connections will reconnect every time DNS Resolution occurs, even when reconnection is not necessary.

Fix: In Cribl Stream 4.1.

2023-02-23 – v.4.0.4–4.1.2 – Enable Automatic Upgrades deletes remote repo's Git Settings [CRIBL-15502]

Problem: Enabling the Leader's **Upgrade** > **Enable Automatic Upgrade** setting deletes the corresponding remote repo's stored **Git Settings**.

Workaround: Reconfigure your repo at **Git Settings** > **Remote**.

Fix: In Cribl Stream 4.1.3.

2023-02-22 – v.4.0.4–4.1.0 – Sending data to an inactive Kafka, Confluent Cloud, or Azure Event Hubs Destination triggers an endless series of log errors [CRIBL-15455]

Problem: If you accidentally make a Kafka, Confluent Cloud, or Azure Event Hubs Destination inactive by putting a mismatched value in the **Advanced Settings** > **Environment** setting, Cribl Stream will send an endless series of errors to the log file.

Workaround: Correct the **Environment** value or leave it empty.

Fix: In Cribl Stream 4.1.1.

2023-02-20 – v.4.0.x–4.1.0 – Logging-level changes do not take effect for services [CRIBL-15365]

Problem: Changing logging levels in the Leader's Settings has no effect on the logs for the Connections, Lease Renewal, Metrics, or Notifications services.

Fix: In Cribl Stream 4.1.1.

2023-02-20 – v.4.0.3–4.1.0 – On-prem Worker Nodes automatically upgrade, ignoring Leader settings [CRIBL-15367]

Problem: Upgrading a Leader Node causes its on-prem Worker Nodes to automatically upgrade, even when the Leader's **Enable automatic upgrades** option is set to `No` (the default). This problem does not affect Cribl-managed Cloud Worker Nodes.

Workaround: 1. Toggle the UI's **Enable automatic upgrades** slider to `Yes` and save the configuration; then slide it back to `No` and save again. Or: 2. Edit `local/cribl/cribl.yml` to explicitly set `upgradeSettings.disableAutomaticUpgrade` to `true`.

Fix: In Cribl Stream 4.1.1.

2023-02-14 – v.4.0.0–4.0.4 – Pipeline is deselected in QuickConnect after modification [CRIBL-15246]

Problem: If you add a Pipeline in the QuickConnect UI, then modify it in the **Edit Pipeline** modal, the Pipeline is deselected in the **Add Pipeline to Connection** modal. If you then close the **Add Pipeline to Connection** modal, the Pipeline will disappear from the Route.

Workaround: Select the modified Pipeline in the **Add Pipeline to Connection** modal before closing it.

Fix: In Cribl Stream 4.1.

2023-02-14 – v.3.5.0 through Current – Cannot clear Messages drawer while in GitOps Push mode [CRIBL-15239]

Problem: When in GitOps `Push` mode, you cannot clear messages from the **Messages** drawer. Cribl Stream returns a `Forbidden` error.

Fix: Version TBD.

2023-02-06 – v.4.0.x–4.1.0 – Event Breaker timestamp extraction fails after configured time [CRIBL-15107]

Problem: Event Breakers' timestamp extraction stops working after the Rule's configured **Future timestamp allowed** value (if set). All subsequent events received get the current time as their timestamp.

Workaround: Set a sufficiently large value for **Future timestamp allowed** – e.g., one year from the date you re/configure the rule. Alternately, restore normal timestamp extraction by restarting Worker Processes.

Fix: In Cribl Stream 4.1.1.

2023-02-05 – v.3.0.3–4.0.4 – `CRIBL_DIST_WORKER_PROXY` env var is ignored when Leader Node's Master URL is set via `instance.yml` [CRIBL-15540]

Problem: Setting the Cribl Stream Leader's Master URL via `instance.yml` causes Worker Nodes to ignore the `CRIBL_DIST_WORKER_PROXY` env var. Instead of trying to connect to the proxy configured in `CRIBL_DIST_WORKER_PROXY`, Worker Nodes will try to connect to other entities (e.g., Leader Nodes) directly, producing unexpected results.

Workaround: Set the Cribl Stream Leader's Master URL via the `CRIBL_DIST_MASTER_URL` env var, rather than via `instance.yml`.

Fix: In Cribl Stream 4.1.

2023-02-03 – v.4.0.0–4.0.4 – Metrics blocklist can’t be changed on a global level [CRIBL-15081]

Problem: The Metrics blocklist cannot be modified from **Settings** > **Global Settings** > **General Settings** > **Limits**.

Workaround: Edit the `limits.yml` file's `metricsFieldsBlacklist` element. Add the event fields for which you want to disable metrics collection; remove any event fields for which you want to restore metrics collection.

Fix: In Cribl Stream 4.1.

2023-01-26 – v.3.5.0–4.0.3 – Preview Full > Send Out does not capture events [CRIBL-14914]

Problem: Selecting a Sample Data file's **Preview Full** > **Send out** option captures no events. This bug has been observed when capturing on Destinations.

Fix: In Cribl Stream 4.0.4.

2023-01-25 – v.3.5.x through Current – Cascading problems when Windows Event Logs Source collects from `ForwardedEvents` channel [CRIBL-14869]

Problem: Using the Windows Event Logs Source to collect events from a Windows `ForwardedEvents` channel can cause misattribution of logs to the local machine that hosts Cribl Edge, and undercollection of local logs from other logging channels (such as Security, System, or Application).

Workaround: Exclude the `ForwardedLogs` channel from your **Event Logs** selection.

Fix: Version TBD.

2023-01-17 – v.4.0.x–4.0.4 – GitOps Push/read-only confirmation banner has dead link [CRIBL-14681]

Problem: After you enable GitOps `Push` mode, the resulting red confirmation banner contains a dead link labeled **GitOps Workflow**.

Workaround: To switch off `Push` mode, navigate to **Settings** > **Global** > **Git Settings**, and then set **GitOps workflow** back to `None`.

Fix: In Cribl Stream 4.1.

2023-01-12 – v.3.5.x through Current – Recently added Worker Nodes fail to appear on the Monitoring page [CRIBL-14627]

Problem: When Worker Nodes are added, there may be a delay before the Worker count is updated on the Monitoring page.

Workaround: Refresh your web browser.

Fix: Version TBD.

2023-01-11 – Multiple versions through 4.1.x – Kafka-based Sources' rebalancing is logged with exaggerated severity [CRIBL-14609]

Problem: The Kafka, Azure Event Hubs, and Confluent Cloud Sources log `REBALANCE_IN_PROGRESS` events at the `error` level, even though only **frequent** rebalancing indicates a system-level or processing issue.

Workaround: Treat infrequent rebalancing events as `warn`.

Fix: Depends on a change to the underlying kafkajs library.

2023-01-10 – v.3.5.x through Current – Configuration updates not shared between primary and standby Leaders [CRIBL-12814, CRIBL-14556]

Problem: With high availability/failover enabled, updates to the active Leader's configuration are not automatically synced to the standby Leader. Workers might not be able to connect to the standby Leader when it takes over.

Workaround: Use the filesystem to explicitly sync the updated `instance.yml` file across the two Leaders' hosts.

Fix: In – v.4.0.3, as an intermediate fix, enabling HA will prevent further UI-based changes to **Distributed Settings**. This will enforce config changes via edits to portable `instance.yml` files. Version TBD for automatic synchronization between Leaders' hosts.

2023-01-02 – v.4.0.0–4.0.2 – Google Cloud Chronicle Destination drops changes in distributed deployments with custom log types [CRIBL-14453]

Problem: A new Google Cloud Chronicle Destination with a custom log type might fail to save changes. This issue affects only distributed deployments.

Fix: In Cribl Stream 4.0.3.

2022-12-15 – v.3.5.4–4.0.3 – Changes to a Lookup table on the Leader don't always propagate to Worker Nodes [CRIBL-14299]

Problem: Modifying a Lookup table on the Leader doesn't always propagate the changes to Worker Nodes, even after clicking **Commit** and **Deploy**.

Workaround: Manually restart the Worker Nodes to refresh Lookup tables.

Fix: In Cribl Stream 4.0.4.

2022-12-13 – v.4.0.0 through Current – Default commit message missing for non-admin users [CRIBL-14239]

Problem: For users who have Roles as high as `owner_all`, but not `admin`, the Commit modal fails to display any **Default commit message** saved in **Git Settings**.

Workaround: Enter (or paste) a message per commit.

Fix: Version TBD.

2022-12-09 – v.4.0.1–4.0.2 – Users assigned the `owner_all` role cannot perform commits [CRIBL-14180]

Problem: When a user with the `owner_all` role tries to perform a commit, the commit fails with the UI displaying a `Forbidden` modal.

Workaround: Modify the `GroupFull` policy, as follows:

1. As a user with the `owner_all` role, try a `POST /version/commit` API call with a request body of `{ "message": "test: hello" }`. The commit should fail, and the request payload should be `{ message: "test: hello" }`.
2. If `$CRIBL_HOME/local/cribl/policies.yml` does not exist, copy `$CRIBL_HOME/default/cribl/policies.yml` to `$CRIBL_HOME/local/cribl/policies.yml`.
3. If your OS is Linux, run the command `chmod 0744 policies.yml`.
4. In `$CRIBL_HOME/local/cribl/policies.yml`, edit the `GroupFull` policy to match the following:

```
GroupFull:
  args:
    - groupName
  template:
    - PATCH /master/groups/${groupName}/deploy
    - GroupEdit ${groupName}
    - POST /version/commit
    - GET /version
    - GET /version/*
```

5. Now retry the `POST /version/commit` API call, again with a request body of `{ "message": "test: hello" }`. The commit should succeed, and the request payload should be `{ message: "test: hello", "group": "default", "effective": true }`.

Fix: In Cribl Stream 4.0.3.

2022-12-08 – v.4.0.1–4.0.2 – Landing page not displaying system metrics from Edge Nodes when teleporting from the Leader [CRIBL-14169]

Problem: When you teleport from a Leader running v.4.0.1 or 4.0.2 to an Edge Node that's running v.4.0.0 or earlier, the system metrics for the landing page will not populate. This also affects the system metrics shown in the Node drawer for the honeycomb and Node List View pages.

Workaround: Upgrade Edge Nodes to v.4.0.2 or higher.

Fix: In Cribl Stream 4.0.3.

2022-12-07 – v.4.0.1 – Google Cloud Pub/Sub Source and Destination can break on field validation [CRIBL-14160]

Problem: The Google Cloud Pub/Sub Source and Destination strictly validated entries in the **Topic ID** and **Subscription ID** fields. If you entered a full path (rather than the expected ID substring) in these fields, this strict validation broke the integration and broke the UI.

Workaround: Trim **Topic ID** and **Subscription ID** field values to just the ID.

Fix: Validation is rolled back in Cribl Stream 4.0.2.

2022-12-01 – v.4.0.2 – CrowdStrike FDR Source needs 6-hour visibility timeout [CRIBL-14067]

Problem: With its default **Visibility timeout seconds** setting of `600` (10 minutes), the CrowdStrike FDR Source can accumulate large backlogs when pulling data from Crowdstrike buckets.

Workaround: Set the **Visibility timeout seconds** to `21600` (6 hours), as CrowdStrike recommends. Leave both **Max messages** and **Num receivers** at their default `1` settings.

Fix: In Cribl Stream 4.0.3.

2022-12-01 – v.4.0.0 – Amazon S3 Source stops receiving data after upgrade [CRIBL-14093]

Problem: Upgrading to Cribl Stream 4.0.0 can cause the Amazon S3 Source to stop receiving data. This is due to a race condition between (premature) SQS messaging versus the Source's initialization.

Workaround: Skip v.4.0.0 (or temporarily roll back to v.3.5.4).

Fix: In Cribl Stream 4.0.1.

2022-11-30 – v.4.0.2 – QuickConnect-configured Sources' misleading "Enabled" status while disconnected [CRIBL-14041]

Problem: As you configure a new Source from the QuickConnect UI, the Source's **Enabled** slider will initially switch to `Yes`. This is misleading, because the Source is not yet connected to a Destination, so no data can flow.

Workaround: Save the Source in its config drawer. This resets the **Enabled** slider to its accurate `No` status, until you connect the Source to a Destination.

Fix: In Cribl Stream 4.0.3.

2022-11-28 v.4.0–4.0.2 – “Unknown config version” error can appear when deploying changes [CRIBL-13910]

Problem: Attempting to commit and deploy a change can trigger errors of the form `Unknown config version: "[hash]"`.

Workaround: On the Leader's host, upgrade the `git` client to v.1.9.1 or later.

Fix: In Cribl Stream 4.0.3.

2022-11-28 – v.4.1.0 through Current – Diag bundles might fail to download from teleported Worker Nodes [CRIBL-13999]

Problem: When you're remotely accessing a Worker Node's UI, diag bundles might fail to download from **Global Settings** > **Diagnostics**.

Workaround: Refresh the page and **Export** the bundle again. Alternatively, log directly into the Worker Node's UI before creating the diag.

Fix: Version TBD.

2022-11-23 – All versions through 4.1.0 – Worker Nodes show incorrect configurations after upgrade or commit/deploy from Leader [CRIBL-13863, CRIBL-15507]

Problem: When you commit and deploy changes from the Leader, Worker Nodes sometimes fail to automatically restart with the correct configuration changes.

Workaround: Manually restart the Worker Nodes.

Fix: In Cribl Stream 4.1.1.

2022-11-23 – v.4.0.0 – Teleported Worker Nodes don't display Distributed Settings or Diagnostics Settings [CRIBL-13868]

Problem: When displayed via remote access from the Leader ("teleporting"), a Worker's/Edge Node's **Settings** UI omits the **Distributed Settings** and **Diagnostics** left-nav links. This blocks remote access to features like configuring TLS communications between Worker Node and Leader.

Workaround: Access the Worker's UI directly on its host's port 9000 (or other configured port). As a precondition, you might need to undo any Disable UI Access setting on the parent Worker Group.

Fix: In Cribl Stream 4.0.1.

2022-11-22 – v.3.2.0–4.0.0 – Chain Function creates extra Pipelines and Functions during initialization [CRIBL-13860]

Problem: Under certain circumstances, when initializing, the Chain Function created multiple unneeded Pipelines and Functions.

Fix: In Cribl Stream 4.0.1.

2022-11-21 – v.4.0.0 – Metrics service unavailable [CRIBL-13826]

Problem: The Monitoring and Fleet pages don't load, due to the systemd-tmpfiles service cleaning some of the Cribl socket files from the `/tmp/` directory.

Workaround: Stop the host system from cleaning the socket files from the `/tmp/cribl-*` directory. For example, on an Amazon EC2 instance, add a new file to `/etc/tmpfiles.d` with the line `X /tmp/cribl-*`. Then restart the tmpfiles cleanup service with: `systemctl restart systemd-tmpfiles-clean.service`. Finally, restart the Cribl server.

Fix: This issue no longer applies to Cloud.Cloud as of 4.0.1. On-prem customers should use the workaround, which will be added to the deployment documentation as a standard practice.

2022-11-18 – v.4.0.0–4.0.3 – License usage visible only for current day [CRIBL-13811]

Problem: In the listed versions, selecting **Monitoring** > **System** > **License** displays usage only for the current day.

Fix: In Cribl Stream v.4.0.4.

2022-11-16 – versions 3.4.0–4.0.4 – Source PQ in Smart mode can trigger excessive memory usage and OOM failures [CRIBL-13761]

Problem: Enabling Source-side Persistent Queues in Smart mode can trigger excessive memory usage, leading to out-of-memory failures and Worker Node instability.

Workaround: If you encounter OOM failures (most likely with high throughput), set PQ to `Always On` mode instead.

Fix: In Cribl Stream 4.1.

2022-11-14 – version 4.0.0 – `Forbidden` error banners mistakenly displayed to non-admin users [CRIBL-13681]

Problem: Non-admin users (with the `reader_all` Role) are mistakenly shown a continuous string of `Forbidden` error banners.

Workaround: Available upon request (documented in the ticket), but cumbersome. Cribl recommends upgrading instead.

Fix: In Cribl Stream 4.0.1.

2022-11-13 – v.4.0.0–4.0.2 – Edge/Kubernetes Logs Source repeats logs due to incorrect timestamp [CRIBL-13900]

Problem: The Kubernetes Logs Source is collecting redundant information for containers that don't emit their own timestamps. This Source assumes "current time" when the timestamps are missing, causing it to incorrectly stream older logs during restarts.

Fix: In Cribl Edge 4.0.3.

2022-11-08 – v.4.0.0 – Cribl Edge honeycomb display doesn't render null values [CRIBL-13595]

Problem: When you view Edge Nodes in **Map View**, a honeycomb displays values for each of the metrics you select in the **Measure** drop-down. When a value is null for a particular the Edge Node, the honeycomb should display `null`; instead, the value incorrectly renders as `ul i`.

Fix: In Cribl Stream 4.0.1.

2022-11-08 – v.4.0.0 – Broken in-app doc links [DOC-100]

Problem: The following Sources have broken in-app help links: Kubernetes Logs, Kubernetes Metrics, Windows Event Logs, and Windows Metrics.

Workaround: Use the above links to access these Sources' online documentation.

Fix: In Cribl Stream 4.0.1.

2022-11-07 – v.4.0.0 – Spurious “Secret decrypt failed with error" log messages appear after upgrade [CRIBL-13554]

Problem: After upgrading to Cribl Stream 4.0.0, multiple `Secret decrypt failed with error` messages might appear in logs. These are spurious, and you can disregard them.

Fix: In Cribl Stream 4.0.1.

2022-11-07 – v.4.0.0 – Upgrade status shown on Group Upgrade page doesn't match Global Settings [CRIBL-13566]

Problem: The **Enable automatic upgrades** status shown on the **Settings > Group Upgrade** page doesn't match the slider selection on the **Settings > Global Settings > Upgrade** tab.

Workaround: View the **Enable automatic upgrades** slider on the **Settings > Global Settings > Upgrade** tab to verify the current upgrade status.

Fix: In Cribl Stream 4.0.1.

2022-11-04 – v.3.5.1–4.0.4 – Avg Thruput (Bytes Per Second) not displayed for internal logs or metrics [CRIBL-13530]

Problem: No **Avg Thruput (Bytes Per Second)** data is displayed on Cribl Internal logs and metrics Sources' **Charts** tab, nor for these Sources on their attached Routes. This is by design, because Cribl Stream does not perform BPS calculations for internal logs or metrics. But the visual disparity can be confusing.

Fix: In Cribl Stream 4.1.

2022-11-03 – v.4.0.0 – Sorting by column on Manage > Worker Node page results in blank list [CRIBL-13505]

Problem: When you click a column header on the **Manage** > **Worker Node** page, the list goes blank and rows are not sorted.

Workaround: Click the heading a couple of times to refresh the list.

Fix: In Cribl Stream 4.0.1.

2022-11-01 – All versions through Current – Source PQ in Smart mode could cause premature backpressure [CRIBL-13414]

Problem: Source-side persistent queuing enabled in `Smart` mode might trigger backpressure before the configured maximum queue size is reached. For TCP Sources, this will send backpressure back to the sender. For Sources using the UDP protocol, it will cause events to be dropped.

Fix: Version TBD.

2022-11-01 – v.4.0.0 through Current – Default AppScope Config file can't be restored when in use [CRIBL-13400]

Problem: When the default AppScope Config file is assigned to an AppScope Source filter, you can't restore it to its default settings. You'll see an error message that the AppScope Config file is currently in use.

Workaround: On the AppScope Source's **AppScope Filter Settings** tab, delete the default AppScope Config from the **Allowlist**. Then, edit the AppScope Config Knowledge object to restore its default settings. You can now add this AppScope Config, with its restored settings, back to the AppScope Source's Allowlist.

Fix: Version TBD.

2022–10-20 – v.4.0.0 through Current – Pipelines with Clone and other Functions can show inconsistent total processing times [CRIBL-13125]

Problem: For Pipelines containing both a Clone Function and an async Functions (like Redis), the Pipeline Diagnostics modal's **Pipeline Profile** > **Process Time** graph will sum up the duration of all Functions' processing times. This sum can exceed the Pipeline's total duration displayed in the **Summary**.

Fix: Version TBD.

2022-11-03 – v.4.0.0 – Git settings don't immediately populate Commit modals [CRIBL-13501]

Problem: After you save Git settings (such as a default commit message), the new settings do not immediately appear in Commit/Git Changes modals.

Workaround: A hard or soft refresh will close the modal, but when you reopen it, it will reflect your new settings.

Fix: In Cribl Stream 4.0.1.

2022-10-12 – All versions through 3.5.4 – Event preview can hide some fields [CRIBL-12914]

Problem: Preview panes can hide some fields at the bottom of each event.

Workaround: Resize your browser window to give the preview pane more depth.

Fix: In Cribl Stream 4.0.

2022-10-11 – All versions through Current – GitOps Push mode doesn't support ad hoc Collection jobs [CRIBL-12868]

Problem: If you've enabled the GitOps Push workflow, you will be unable to run ad hoc Collection jobs.

Workaround: There are two options. 1. Temporarily disable the Push workflow in your environment. 2. Create a scheduled Collection job (with a relaxed cron schedule) on your dev branch, and push it to production through your Push workflow.

Fix: Version TBD.

2022-10-04 – All versions through 3.5.4 – File Monitor Source fails with high-volume logs and file rotation [CRIBL-12762]

Problem: The File Monitor Source might stop reading logs from an open file, if the log rotation service renames that file.

Workaround: Restart the File Monitor Source.

Fix: In Cribl Stream 4.0.

2022-10-03 – All versions through 4.0.4 – New Help drawers open under pinned Help drawers [CRIBL-12737]

Problem: If you've pinned a Help drawer open, it's possible to open additional Help drawers behind the pinned drawer.

Workaround: Close the pinned drawer to see the newly opened drawer.

Fix: In Cribl Stream 4.1.

2022–09-26 – All versions through 4.0.0 – Manage Groups/Fleets pages count Packs in Pipeline totals [CRIBL-12602]

Problem: On the **Manage Groups** and **Manage Fleets** pages, the **Pipelines** column overstates the actual number of Pipelines, because it includes Packs in each Worker Group's total count.

Workaround: For each Worker Group, click the link in its **Pipelines** column to see the Worker Group's actual list of Pipelines.

Fix: In Cribl Stream 4.0.1.

2022-09-19 – v.4.0.0 – Subfleet search doesn't return parent Fleets [CRIBL-12465]

Problem: On the **Manage Fleets** page's **Fleets** tab, searching for a Subfleet name returns only the Subfleet, without information about its parent Fleets.

Fix: In Cribl Edge 4.0.1.

2022-09-06 – v.3.3.0–3.5.4 – Load-balanced Destinations with PQ enabled: Buffer flush errors and memory leaks [CRIBL-12203]

Problem: Destination logs might show errors of the form: `Attempted to flush previously flushed buffer token`. No data has been lost, but this will lead to a memory leak until the Worker Node is restarted. This is most likely to occur when there are more available downstream hosts than a **Max connections** limit configured on the Destination.

Workaround: To prevent the bug from occurring, set **Max connections** to the default `0` (enabling unlimited connections). This will ensure that all discovered hosts enter the connection pool. If you encounter the bug, restarting the affected Worker Nodes (or letting an OOM the killer do so) will clear the memory leak.

Fix: In Cribl Stream 4.0.

2022-08-29 – All versions through 3.5.4 – Sources reject connections on ACME certs with no Subject [CRIBL-12097]

Problem: With multiple Sources, if you configure TLS mutual authentication using an ACME certificate with an empty `Subject` field, Cribl Stream will reject connections – even though RFC 6125 allows for `Subject` to be empty. This affects: Splunk Sources, Cribl internal Sources, Syslog, TCP, TCP JSON, Metrics, HTTP/S, Amazon Firehose, Elasticsearch API, DataDog, Grafana, Loki, Prometheus, and Windows Event Forwarder.

Workaround: Enter any value in the certificate's `CN` field. Any entry will cause CCribl Stream to match on the certificate's SAN (`subjectAltName`) extension.

Fix: In Cribl Stream 4.0.

2022-08-20 – v.3.2.0–4.0.3 – Deleting or modifying default Mapping Rule reclassifies Cribl-managed Cloud Workers as hybrid Workers [CRIBL-11983]

Problem: Cribl.Cloud's UI currently allows deleting or modifying the `default` Mapping Rule. By doing so, an admin can inadvertently reclassify Cribl-managed Cloud Workers as hybrid Workers. These might not be supported by your Cribl.Cloud plan.

Workaround: If you have an Enterprise plan, create a hybrid Worker Group to manage the resulting hybrid Workers.

Fix: In Cribl Stream 4.0.4.

2022-08-19 – v.3.5.1–3.5.4 – Using GitOps environment variables crashes the Leader [CRIBL-11972]

Problem: Where deployments rely on `CRIBL_GIT_*` environment variables, the Leader might crash on startup.

Workaround Restart the Leader, disabling the environment variables if necessary.

Fix: In Cribl Stream 4.0.

2022-08-27 – All versions through 4.1.3 – Azure Event Hubs Destination with PQ drops events when inbound data is interrupted [CRIBL-17661, replaces CRIBL-12649]

Problem: When Azure Event Hubs (and other Kafka-based Destinations) have persistent queues (PQs) configured, an interruption of inbound data flow (e.g., due to network issues) can cause the Destination to start dropping events.

Workaround: On the Source whose events are being interrupted, configure an Always On persistent queue. This buffering will cause the Destination to drop fewer events. Note that persistent queuing will not engage until Cribl Stream has exhausted all attempts to send the data to the Kafka receiver.

Fix: In Cribl Stream 4.2.

2022-08-25 – Versions 3.4.1 through Current – Splunk Load Balanced Destination degradation with acks enabled

[CRIBL-12066]

Problem: On a Splunk Load Balanced Destination, enabling the **Minimize in-flight data loss** (acknowledgments) field can cause high CPU drain and backpressure.

Workaround: On the Splunk LB Destination's **Advanced Settings** tab, disable **Minimize in-flight data loss**.

Fix: Planned for Cribl Stream 4.2.2.

2022-08-16 – All versions through Current – Splunk HEC shows higher outbound data volume than other Splunk Destinations

Problem: Events sent to the Splunk HEC Destination will show higher outbound data volume than the same events sent to the Splunk Single Instance or Splunk Load Balanced Destinations, which use the S2S binary protocol.

Fix: Version TBD.

2022-08-16 – v.3.1.2–3.5.2 – Auto timestamping randomly begins using current time [CRIBL-11925]

Problem: After a random interval, the auto timestamping feature might insert the current time into the `_time` field instead of using the timestamp from the event.

Workarounds: Restart the Stream instances to temporarily remedy the problem, or enable an Event Breaker rule's Manual Timestamp Format option.

Fix: In Cribl Stream v.3.5.3.

2022-08-10 – v.3.5.1-3.5.2 – Changing Notification target type crashes New Target modal [CRIBL-11848]

Problem: Changing the **Target Type** while configuring a new Notification target crashes the **New Target** modal.

Workaround: Set the **Target type** once only while the modal is open.

Fix: In Cribl Stream 3.5.3.

2022-08-08 – v.3.x through Current – `cidr-matcher` does not support IPv6 addresses [CRIBL-11767]

Problem: The version of `cidr-matcher` supported by Cribl only supports IPv4 CIDR matching.

Fix: Version TBD.

2022-08-03 – v.3.5.0–3.5.1 – Cribl HTTP and Cribl TCP Sources are not enabled on Cribl.Cloud [SAAS-1905]

Problem: Cribl.Cloud's **Network Settings** >: **Data Sources** tab lists **Ingest Address** ports for the new Cribl HTTP and Cribl TCP Sources. However, these ports are not yet enabled.

Workaround: If you need these ports enabled before the next maintenance release, contact Cribl Support or your Solutions Engineer.

Fix: In Cribl Stream 3.5.2.

2022-08-02 – v.3.3.0–3.5.1 – Managed Edge Nodes mistakenly display "Unregistered" button [CRIBL-11652]

Problem: Managed Edge instances erroneously display an **Unregistered** button. Managed Edge Nodes cannot be registered, because they pull their registration/licensing information from the Leader. So this button should not appear.

Workaround: Ignore the scary button. Your managed Edge Node has inherited its Leader's registration.

Fix: In Cribl Stream 3.5.2.

2022-08-02 – v.3.x through 3.5.1 – Cribl.Cloud displays unsupported Sharing settings [SAAS-1899]

Problem: On Cribl.Cloud, Cribl Stream's **General Settings** > **Upgrade & Share Settings** display a **Sharing and live help** toggle, even though you cannot turn off telemetry on Cribl- or customer-managed (hybrid) Cloud Workers.

Workaround: Ignore this toggle. The UI controls enable you to slide the toggle to `No` and save the result, but this will have no effect.

Fix: In Cribl Stream 3.5.2.

2022-07-21 – v.3.5.0–3.5.2 – Job Inspector shows higher Bytes In than Monitoring dashboards [CRIBL-11482]

Problem: The Job Inspector sometimes displays a higher byte count than other Monitoring dashboards display for the same collection job. The Job Inspector overstates the throughput because it disregards any Event Breakers and Filter expressions applied between initial collection and Pipelines.

Workaround: Rely on the Monitoring metrics to judge accurate data flow through Pipelines to downstream services.

Fix: In Cribl Stream 3.5.3.

2022-07-21 – v.3.4.0–3.5.1 – Data loss with Source-side persistent queueing enabled [CRIBL-11478]

Problem: With Source-side PQ enabled, events got stuck and did not process through Pipelines. The root cause was a Rename Function that used wildcards to rename required internal fields (specifically, `__pqSliceId` and `__offset`).

Workaround: Where Rename Functions potentially rename internal fields (especially via **Rename expressions** that include wildcards), either disable PQ on Sources that feed the parent Pipeline, or test and narrow the expression to affect only the desired fields.

Fix: In Cribl Stream 3.5.2.

2022-07-21 – v3.5.1-3.5.4 – Fake Pack appears after upgrading to v.3.5.1. [CRIBL-11481]

Problem: After an upgrade to v.3.5.1., a new Pack appears on the **Manage Packs** page. This Pack has no **Display Name** and no contents.

Workaround: Delete the ghost Pack.

Fix: Not observed as of Cribl Stream 4.0.

2022-07-20 – v3.5.0–3.5.1 – Manage Worker Nodes page fails to lazy-load Workers when scrolled [CRIBL-11474]

Problem: Scrolling the **Manage Worker Nodes** page fails to load more than 50 Worker Nodes.

Fix: In Cribl Stream 3.5.2.

2022-07-20 – v3.5.0–4.0.4 – Cribl Edge/Windows: Upgrading ignores existing mode (etc.) settings [CRIBL-11467]

Problem: When re-running Windows installers on a system that hosts a previous Cribl version as a managed Edge Node, the installer does not read the distributed mode or other settings. The new version might install as a Leader instance.

Workaround: Run the new version's installer using the same mode and other options you used when installing the preceding version.

Fix: In Cribl Stream 4.1.

2022-07-19 – v.3.5.0–3.5.1 – Cribl Edge/Windows: Syslog Source disallows UDP binding [CRIBL-11439]

Problem: On Cribl Edge/Windows, attempting to bind the Syslog Source to a UDP port might trigger an error of the form: `bind EADDRINUSE 0.0.0.0:<port number>`. The reason is that Edge currently does not fully support the `socket.bind` on Windows.

Fix: In Cribl Stream 3.5.2.

2022-07-13 – v.3.5.0–3.5.1 – Cribl Edge: Fleet > List View tab doesn't correctly filter Edge Nodes [CRIBL-11183]

Problem: A Fleet Home page's **List View** tab doesn't correctly filter Edge Nodes. This tab displays all the Edge Nodes across all Fleets, instead of only those assigned to the Fleet.

Workaround: The **Map View** page is filtered correctly.

Fix: In Cribl Edge 3.5.2.

2022-07-04 – All versions through v.3.5.3 – No extended characters in Publish Metrics Function > Event field name field [CRIBL-8968, CRIBL-10984]

Problem: A Publish Metrics Function's **Event field name** values should contain only letters, numbers, underscores (_), and `.` characters (to separate names in nested structures). Using other characters will

cause the parent Pipeline to stop sending events. Cribl Stream 3.5.0 and above check for valid characters when you save the Function's configuration, but in prior versions, the invalid config will save without an error message – the failure will happen at runtime, with errors echoed only in the logs.

Workaround: Ensure that **Event field name** values contain no extended characters.

Fix: In Cribl Edge 3.5.4.

2022-07-01 – All versions through 3.5.0 – S3-based Sources' unread Region triggers auth errors [CRIBL-10981]

Problem: On Amazon S3–based Sources, if you concatenate the AWS Region into the **Queue** field's URL or ARN, the SQS client is correctly configured to that region, but the S3 client is not. You will see authentication errors of the form: `The AWS Access Key ID you provided does not exist in our records.`

Workaround: Explicitly set the **Region** drop-down, even if the URL/ARN already contains the same Region.

Fix: In Cribl Stream 3.5.1.

2022-06-30 – All versions through Current – Persistent queue with compression requires oversize max queue limit [CRIBL-10965]

Problem: If you configure persistent queueing to both enable **Compression** and set a **Max queue size** limit, set that limit optimistically and monitor the results. Due to an error in computing the compression factor, Cribl Stream will not fully use **Max queue size** values below or equal to the volume's available disk space. This can lead to a mostly empty disk, lost data (either blocked or dropped), and/or excessive backpressure.

Workaround: With **Compression** enabled, set the **Max queue size** to a value **higher** than the volume's total available physical disk space (disregarding compression). Alternatively, leave **Max queue size** empty, to impose no limit. Monitor overall throughput and the queue size (if PQ engages), to verify that Cribl Stream is maximizing the queue.

Fix: Version TBD.

2022-06-29 – v.3.4.2–3.5.1 – Can't install a new Cribl Stream instance as a named user [CRIBL-10907, CRIBL-11457]

Problem: Bootstrapping a new Leader or Worker with a command of this form fails, with no systemd service created: `cribl boot-start enable -u <username>`

The symptom is an error of the form:
`error: found user=0 as owner for path=/opt/cribl/local, expected uid=1001.` This does not affect upgrades to existing instances.

Workaround: Issue the `[sudo] chown -R <username>: /opt/cribl` command a second time. Then reattempt the `cribl boot-start` command.

Fix: In Cribl Stream 3.5.2.

2022-06-28 – v.3.5.x through Current – Cribl Edge/Windows Limitation: Cannot upgrade Edge Nodes from the Leader's UI [CRIBL-10870]

Problem: Cribl Edge/Windows does not support upgrading Edge Nodes via the Leader's UI.

Workaround: Re-run the Windows installer on each Edge Node, specifying the same installation options/parameters you used when installing the preceding version.

Fix: Planned for Cribl Stream 4.2.2.

2022-06-27 – v.3.3.0–3.5.1 – Edge vs. Stream conflict in `/tmp` directory [CRIBL-10806]

Problem: If you install Cribl Edge and Cribl Stream on the same machine or VM – e.g., running Edge as `root` and Stream as a `cribl` user – both services attempt to use the `tmp/cribl_temp` subdirectory. Starting Stream after Edge will throw an error of the form: `EPERM: operation not permitted, rmdir '/tmp/cribl_temp'`. Starting Edge after Stream will change the folder's ownership, blocking subsequent restarts of Stream.

Workaround: For either Cribl Edge or Cribl Stream, set the `CRIBL_TMP_DIR` variable to a separate base subdirectory like `/tmp/stream/` or `/tmp/edge/` before starting the app.

Fix: Cribl Stream 3.5.2 and later set separate `tmp/` subdirectories by default.

2022-06-24 – v.3.5.0 – Leader takes excessive time to report healthy status [CRIBL-10768, CRIBL-11127]

Problem: Upgrading from v.3.4.x to v.3.5.0 tripled the latency before some Leaders reported healthy status. The presumed cause was that load time increased due to an accumulation of persistent metrics, which progressively increased with more Worker Nodes and more uptime.

Workaround: If upgrading is not possible or insufficient, move the existing metrics subdirectory away from `$CRIBL_HOME/state/metrics/`. Cribl Stream will re-create that as an empty subdirectory, and begin accruing fresh metrics there.

Fix: In Cribl Stream 3.5.1.

2022-06-23 – v.3.5.0 – Logs not viewable at Worker Group level [CRIBL-10665]

Problem: If you select **Monitoring** > **Logs**, and then select a Worker Group from the drop-down at upper left, you might see no logs at the Group level. Instead, you will see an error banner of the form:
`ENOENT: no such file or directory, scandir '/opt/cribl_data/failover/log/group/<group-name>'`

Workaround: From the drop-down at upper left, select individual Worker Nodes to view their logs.

Fix: In Cribl Stream 3.5.1.

2022-06-09 – v.4.0.x–4.1.0 – Edge Settings mistakenly display Process Count controls [CRIBL-10402]

Problem: Edge Fleets' **Fleet Settings** > **Worker Processes** page incorrectly includes editable **Process Count** and **Minimum Process Count** controls. Each Edge Node is locked to `1` Worker Process, so changes to these fields' values will have no effect.

Workaround: Ignore these two fields.

Fix: In Cribl Stream 4.1.1.

2022-06-01 – v.3.4.2-3.5.0 – Bootstrapping fails to create SystemD service file, or starts wrong service [CRIBL-10250]

Problem: Bootstrapping a 3.4.2 Worker fails. The terminal displays no `Enabled Cribl to be managed by ...` confirmation message.

Workaround: Explicitly run the `boot-start` CLI command.

Fix: In Cribl Stream 3.5.1.

2022-05-31 – v.3.4.2 – Cloning/loading Groups page breaks with `Config Helper service is not available...` error [CRIBL-10228, CRIBL-10229]

Problem: After cloning a Group containing at least one Pack, the UI hangs with a spinning pinwheel and an error banner reading `Config Helper service is not available...`. The root cause is that cloning the Group failed to copy over the Pack, leaving the new Group with broken references to it.

Workaround: Use the filesystem to manually copy missing Packs from the original Group to the cloned Group. If these Packs' contents are not needed in the new Group, it's sufficient to just create the parallel subdirectory with: `mkdir $CRIBL_HOME/groups/$destGroup/default/$packName`.

Fix: In Cribl Stream 3.5.

2022-05-19 – v.3.3.0–3.5.1 – System Metrics Source skips filesystem events on LVM volumes [CRIBL-10092]

Problem: When monitoring LVM logical volumes, the System Metrics Source omits `node_filesystem_*` events.

Fix: In Cribl Stream 3.5.2.

2022-05-06 – v.3.5.0-3.5.4 – Running ~1,000 Edge Nodes crashes Leader [CRIBL-9859]

Problem: Attempting to bring up approximately 1,000 Edge Nodes (even in small batches) can crash the Leader.

Workaround: To support up to 1,000 Nodes, apply this Node.js setting:
`export NODE_OPTIONS=--max-old-space-size=8192`

Fix: In Cribl Stream 4.0.

2022-04-28 – v.3.4.0–3.4.1 – REST Collector Misinterprets `.` character in Response Attributes [CRIBL-9708]

Problem: Where a REST Collector's Response Attributes contain a `.` character, it misinterprets this as an attribute nested within an object, not a literal character.

Workaround: If possible, use other Response Attributes to fetch the next page. Otherwise, skip this version, or downgrade to a known well-behaved version.

Fix: In Cribl Stream 3.4.2.

2022-04-27 – v.3.4.1 – Git Changes drop-down returns `Invalid Date` [CRIBL-9698]

Problem: After opening the left nav's **Changes** fly-out, the **Version** drop-down can display `Invalid Date` instead of commits' dates.

Workaround: Upgrade your installed `git` client to v.2.1.1 or newer; or skip this Cribl Stream version.

Fix: In Cribl Stream 3.4.2.

2022-04-26 – v.3.4.1 – HTTP 500 error when git is absent [CRIBL-9684]

Problem: A `500–Internal Server Error` error banner can indicate that `git` is not installed on Cribl Stream's host.

Workaround: Install `git` on the Leader or single instance. On affected Worker Nodes, install `git`, followed by a `git init` and an empty push to a new `master` branch. A simpler workaround for Worker Nodes is to just enable remote access (Stream, Edge) from the Leader.

Fix: In Cribl Stream 3.4.2.

2022-04-22 – v.3.3.0-3.4.1 – Datadog Agent API key ignored when forwarding metrics to Datadog [CRIBL-9633]

Problem: On a Datadog Destination, when **Allow API key from events** is set to `Yes`, the API key from a Datadog Agent Source is not correctly emitted with metric events sent to Datadog. Instead, Cribl Stream simply sends the static **API key** configured in the Destination. (This affects metrics events only; other data types correctly forward the event's API key.)

Workaround: Set **Allow API key from events**. to `No`. Configure the desired API key in the Destination's static **API key** field. (If you need multiple API keys, can create multiple Destinations, and route events to each based on the `__agent_api_key` field value. This value contains the Agent API key per event.)

Fix: In Cribl Stream 3.4.2.

2022-04-21 – v.3.4.1 – Failed restart, `Uncaught (in promise)` error, after changing Authentication settings [CRIBL-9614]

Problem: After changing Authentication settings, or configuring an external auth provider, Cribl Stream might fail to restart. Indications are errors of the form: `Uncaught (in promise) TypeError: Cannot read properties of undefined (reading 'workerRemoteAccess')`, or: `Uncaught (in promise) TypeError: l.api is undefined.`

Workaround: Directly edit the `cribl.yml` file's `auth:` section.

Fix: In Cribl Stream 3.4.2.

2022-04-21 – All versions – Cribl.Cloud login page distorted on iPad [SAAS-1141]

Problem: On certain iPads, we've seen the Cribl.Cloud login page's left text column repeated twice more across the display. These unintended overlaps prevent you from selecting (or tabbing to) the **Log in with Google** button.

Workaround: If you encounter this, the only current workarounds are to either use Google SSO on a desktop browser, or else use a different login method.

Fix: No planned fix.

2022-04-19 – v.3.3.0–3.4.2 – Spurious buffer token flush error in TCP-based Destinations with PQ enabled [CRIBL-9565]

Problem: This error message can mistakenly appear in logs: `Attempted to flush previously flushed buffer token`. You can ignore it on TCP-based, load-balanced Destinations (Splunk Load Balanced, TCP JSON, Syslog/TCP, and Cribl Stream) with persistent queueing enabled.

Fix: In Cribl Stream 3.5.

2022-04-18 – All versions through Current – Upgrade Version List is Limited to Latest Version [CRIBL-9568]

Problem: The **Choose Version** drop-down list displays the latest version only. This creates an issue when you want to incrementally upgrade between prior versions.

Fix: Version TBD.

2022-04-18 – v.3.3.1–4.0.0 – Lookup Functions intermittently fail [CRIBL-9539]

Problem: Lookup Functions within some Pipelines were skipped up to ~20% of the time. Restarting Cribl Stream resolves this temporarily, but the failure eventually resurfaces as the new session proceeds.

Workaround: Where a Lookup Function fails, substitute an Eval Function, building a ternary JS expression around a `C.Lookup` method.

Fix: In Cribl Stream 4.0.1.

2022-04-15 – All versions through 3.4.1 – Git permission errors [CRIBL-9530]

Problem: Multiple Linux distro's have backported a permissions-restriction patch from `git-2.35.1` to earlier versions, notably including Ubuntu 20.04 LTS. If you see errors of the form `fatal: unsafe repository ('/opt/cribl' is owned by someone else)` on the command line or in the Cribl Stream UI, this indicates an ownership mismatch (current user versus file base) on the directory corresponding to `$CRIBL_HOME` or `$CRIBL_VOLUME_DIR`.

Workaround: Use `chown` to recursively set permissions on all files in `/opt/cribl/` (or in or `$CRIBL_VOLUME_DIR`'s target directory) to match the user running Cribl Stream.

Fix: In Cribl Stream 3.4.2.

2022-04-15 – v.3.4.0 – Workers report incomplete metrics [CRIBL-9524]

Problem: After upgrading to v.3.4.0, Worker Nodes failed to report all metrics. Missing metrics were logged with a warning of the form: `failed to report metrics`, and with a reason of the form: `Cannot read property 'size' of undefined`.

Fix: In Cribl Stream 3.4.1.

2022-04-14 – v.3.4.0-3.4.1 – Monitoring visualizations lack color indicators [CRIBL-9510]

Problem: When you hover over the Monitoring page's graphs, the expected red/yellow/green status indicators are missing.

Fix: In Cribl Stream 3.4.2.

2022-04-07 – v.3.4.0–3.4.1 – Chain Function referencing a Pack triggers errors on Pack's Functions [CRIBL-9235]

Problem: After you define a Chain Function that references a Pack, Functions on Pipelines within that Pack will throw errors of the form: `Failed to load. Function <Function-name> is missing. Please fix, disable, or remove the Function.` You might also find that you cannot add more Functions within the Pack. (However, data might continue to flow, despite these errors.)

Workaround: Remove the Chain Function, or its Pack reference. Refactor your flow logic to avoid this combination.

Fix: In Cribl Stream 3.4.2.

2022-04-05 – v.3.4.0 through Current – Upgrade to 3.4.0 disables Worker/Node UI access [CRIBL-9175]

Problem: Upon upgrading to v.3.4.0, even if the (prior, global) Worker/Node **UI access** option was set to `Yes`, the new per–Worker Group toggles are all set to `No` by default.

Workaround: On the **Manage Worker Groups** page, re-enable the **UI access** toggles as desired. If these toggles are not displayed (with a Free license), edit `groups.yml` to add the key-value pair `workerRemoteAccess: true` within each desired Worker Group.

Fix: Version TBD.

2022-03-29 – v.3.4.0 – `this.dLogger.isSilly is not a function` errors [CRIBL-9019]

Problem: Errors of this form have been observed with multiple triggers: 1. Disabling a customized Source or Destination (it remains enabled). 2. Importing and deleting a Pack. 3. Changing a channel's logging level.

Workaround: Delete and re-create affected Sources and Destinations. (No workaround has been identified for the Pack or logging errors.)

Fix: In 3.4.1.

2022-03-23 – v.3.4.0 – Monitoring page error in distributed environments with many Worker Nodes [CRIBL-8938]

Problem: The Monitoring page displays an error where distributed environments have more than 30 Worker Nodes.

Fix: In 3.4.1.

2022-03-23 – Collect parameters values not evaluated as expressions [CRIBL-8932]

Problem: In a REST Collector's **Collect parameters** table, entering a parameter name like "earliest" as plain text will cause it to be interpreted as a literal string. This will not be evaluated as the `earliest` time-range parameter.

Workaround: Backtick the parameter name, e.g.: `` `earliest` ``.

Fix: Tooltip clarified in Cribl Stream 4.0.

2022-03-23 – Upgrading v.3.3.1 Leader to v.3.4.0 blocks upgrade to Workers [CRIBL-8918]

Problem: When you explicitly upgrade a Leader Node to 3.4.0, you can't push upgrades to Workers.

Workaround: Automatic upgrades work as expected. At **Settings** > **Global Settings** > **System > Upgrade**, set **Disable Automatic upgrades** to `No`.

Fix: In 3.4.1.

2022-03-17 – All versions through 3.4.0 – Failed systemd restarts due to erroneous `ExecStopPost` command [CRIBL-8807]

Problem: On systemd, the Cribl service can stop with an unsuccessful return code. This was caused by a malformed `ExecStopPost` command in Cribl's provided `cribl.service` file.

Workaround: In `cribl.service`, delete the whole `ExecStopPost=...` line, and change the `Restart` parameter's value from `on-failure` to `always`. (The first deletion necessitates the second change.)

Fix: Versions 3.4.1 and later install a `cribl.service` file incorporating both the above changes. **If you are upgrading from v.3.4.0 or earlier, and you notice dead Workers, check and update your existing `cribl.service` configuration to match the changes above.**

2022-03-17 – v.3.4.0 – Source PQ re-engages while draining, causing blockage/backpressure [CRIBL-8800]

Problem: A Source with Persistent Queueing enabled can mistakenly re-engage queueing while still draining its queue – leading to blocked throughput and backpressure. This occurs after a Destination goes offline and back online, once or more, leaving the Source in an undetermined queue state.

Workaround: Wait 60 seconds for another queue drain event, to see if PQ behavior goes back to normal. If the problem persists, restart Cribl Stream.

Fix: In Cribl Stream 3.4.1.

2022-03-17 – v.3.4.0 – Monitoring pages break without git [CRIBL-8799]

Problem: Unless git is installed locally, two Monitoring pages fail to display, with errors of the form `Versioning not supported`. The pages are **Monitoring** > **Overview** and **Monitoring** > **System** > **Licensing**. To resolve the errors, git must be installed even on single-instance deployments.

Workaround: Install git.

Fix: In 3.4.1.

2022-03-16 – v.3.2.2-3.4.0 – Upgrading from earlier versions degrades performance [CRIBL-8784]

Problem: After upgrading to any of the indicated versions, customers with active Splunk Destinations noticed that CPU load increased, triggering backpressure more readily.

Workaround: Skip these versions, or downgrade to a known well-behaved version.

Fix: In 3.4.1.

2022-03-11 – v.3.4.0 – In Free versions, Worker/Node UI access can't be accessed via UI [CRIBL-8707, CRIBL-8945]

Problem: In v.3.4, Cribl moved the Worker/Node **UI access** toggle from global **Settings** > **System** > **Distributed Settings** to per–Worker Group toggles on the **Manage Worker Groups** page. But with a Free license, these controls aren't displayed in the UI at all.

Workaround: Directly edit `groups.yml` to add the key-value pair `workerRemoteAccess: true` within each desired Worker Group.

Fix: In 3.4.1.

2022-03-08 – v.3.3.1 through Current – GitOps + License expiration = Catch-22 [CRIBL-8600]

Problem: If your Enterprise license expires while you have enabled the GitOps Push workflow, you will encounter the following block: Cribl Stream is in read-only mode, triggering a `Forbidden` error when you try to update your license key. But you also cannot reset the workflow from `Push` to `None`, because the expired license disables GitOps features.

Workaround: Contact Cribl Support for help updating your license.

Fix: Version TBD.

2022-03-07 – v.3.2.x-3.4.x – Undercounted `total.in_bytes` dimension metrics [CRIBL-8572]

Problem: The `cribl.logstream.total.in_bytes` dimension sent to Destinations can show a lower data volume (against license quota) than `cribl.logstream.index.in_bytes`. This latter `index.in_bytes` dimension displays the correct license usage, and matches what's reported on the **Monitoring** dashboard.

Workaround: Within the `cribl_metrics_rollup` Pipeline that ships with Cribl Stream, disable the Rollup Metrics Function.

Fix: Couldn't reproduce the error.

2022-03-03 – v.3.3.x – Elasticsearch API Source (distributed mode) stops receiving data after upgrade to 3.3.x [CRIBL-8515]

Problem: After upgrading a distributed deployment to version 3.3.x, the ElasticSearch API Source might stop receiving data. This occurs when your existing Source config's **Authentication type** was set to `Auth Token`. The root cause is a 3.3.x schema change that unset this auth type to `None`.

Workaround: In the Elasticsearch API Source configuration, reset the **Authentication type** to `Auth Token`. Then commit and deploy the restored config.

Fix: In Cribl Stream 3.4.

2022-02-24 – v.3.3.x – After upgrade to 3.3.0, ElasticSearch Destination can't write to indexes whose name includes - [CRIBL-8451]

Problem: After upgrade to version 3.3.x, LogStream cannot send data to Elasticsearch indexes whose name includes a hyphen (-).

Workaround: In the Elasticsearch Destinations's **Index or Data Stream** field, surround these index names in "quotes" or backticks.

Fix: LogStream 3.3.1 added format validation and error-checking.

2022-02-18 – v.3.3.x – Worker/Leader communications blocked by untrusted TLS certificate after upgrade to 3.3.0 [CRIBL-8361]

Problem: With TLS enabled on Worker/Leader communications, after an upgrade from LogStream 3.2.x to v.3.3.x, Workers might fail to communicate with the Leader due to an untrusted SSL certificate on the Leader. Logs will show `connection errors` of the form: `"unable to verify the first certificate"` or `self signed certificate in certificate chain`.

Workaround: On each affected Worker: In the `instance.yml` file's' `distributed: master: tls:` section, set: `"rejectUnauthorized: false"`. Then restart Cribl Stream.

Fix: In 3.4.1.

2022-02-18 – v.3.3.x – Can't upgrade Workers to 3.3.x via UI [CRIBL-8346]

Problem: Attempting to upgrade on-prem Workers to version 3.3.x via the UI can fail, with an error of the form: `Group <group-name> is a managed group.`

Workaround: Edit the Leader's `$CRIBL_HOME/local/cribl/groups.yml` file to delete all instances of the key-value pair `onPrem: false`. Then, resave the file and reload the Leader.

Fix: In Cribl Stream 3.4.

2022-02-17 – v.3.2.2-3.3.x – REST Collector pagination fails on duplicate/nested attribute names [CRIBL-8352]

Problem: The REST Collector does not consistently differentiate between multiple (nested) attributes that share the same name. This can break pagination that relies on a `Response Body Attribute`.

Workaround: If possible, select a different Pagination method, or specify a unique attribute name.

Fix: In Cribl Stream 3.4.

2022-02-17 – v.3.3.0 – Do not configure InfluxDB Destination on LogStream 3.3.0 [CRIBL-8354]

Problem: Configuring InfluxDB Destinations can fail on LogStream 3.3.0. This problem has been observed only on distributed deployments, and data does flow to InfluxDB. But the InfluxDB config will not appear in LogStream's UI, and the broken config will block editing of other Destinations.

Workaround: If you need to send data to InfluxDB, skip v.3.3.0, and wait for the next release. If you encounter the broken UI, edit `outputs.yml` to remove any `influxdb_output` sections, and then restart LogStream. This will unblock UI-based editing of other Destinations.

Fix: In LogStream 3.3.1.

2022-02-10 – All versions, 3.2.1+ – Syslog Source's previewed data doesn't proceed through Routes [CRIBL-8210]

Problem: The Syslog Source's **General Settings** > **Input ID** field's default filter expression is `__inputId.startsWith('syslog:in_syslog:')`. The same filter appears in the **Preview Full** tab's **Entry Point** drop-down, except without the final colon. This means that data sent using **Preview Full**'s version of the filter will not go through Routes that use the **Input ID** version.

Workaround: When sending data from **Preview Full** to a Route, if both use the `syslog:in_syslog` filter, edit the Route's filter to remove the final colon. This will make the filter identical in both places, routing data correctly.

2022-02-10 – v.3.3.0-3.5.x – Slow-Mo Notification Notifications [CRIBL-8205]

Problem: After you create a Notification on a Destination, the new Notification might take up to several minutes to appear on the Destination config modal's **Notifications** tab.

Details: This delay has not been reproduced consistently. Some Notifications appear immediately.

Fix: In Cribl Stream 4.0.

2022-02-08 – v.3.3.x – Missing event from Datadog Agent v.7.33.0+ [CRIBL-8132]

Problem: If ingesting metrics from Datadog Agent 7.33.0 or later (i.e., you have set the `DD_DD_URL` environment variable or the `dd_url` YAML config key), LogStream's Datadog Agent Source will not ingest `agent_metadata` events. This is due to a breaking change in Datadog Agent 7.33.0, which split out part of the prior `/intake/` endpoint into a new `/api/v1/metadata` endpoint.

Workaround: Use Datadog Agent v.7.32.4 or earlier.

Fix: In Cribl Stream 3.4.

2022-02-08 – All versions through 3.3.x – Syslog and Metrics Sources' default filter expression needs correction [CRIBL-8115]

Problem: In the Syslog and Metrics Sources's **Logs** tab, the auto-generated filter expression (`channel =='input:in_syslog'`) is not specific enough and yields no results, because it doesn't address these Sources' two channels (`input:in_syslog:tcp` and `input:in_syslog:udp`).

Workaround: Replace this default filter expression with `channel.startsWith('input:<input_ID>')`. For example: `channel.startsWith('input:in_syslog:')`.

Fix: In Cribl Stream 3.4.

2022-02-07 – v.3.2.2-3.4.0 – Okta integration fails after upgrading from v.3.1.3 to v.3.2.2 [CRIBL-8105]

Problem: Okta (OpenID Connect) authentication on Cribl Stream fails behind a proxy, when using environment variables (`http_proxy` or `https_proxy`).

Workaround: Configure the proxy to work in transparent mode, to bypass the `http*_proxy` variables. If the proxy is required, leave the `User Info URL` empty, and Cribl Stream can obtain user details from the `JWT token`.

Fix: In 3.4.1.

2022-02-04 – v.3.2.2-3.4.0 – Mask Function slows down post-processing Pipeline [CRIBL-8043]

Problem: A post-processing Pipeline with a Mask Function can slow down drastically, showing high CPU usage on Workers.

Workaround: If practical, promote the same Mask Function to a pre-processing or processing Pipeline.

Fix: In Cribl Stream 3.4.1.

2022-2-03 – All versions though 3.4.0 – JSON Serialize Function in post-processing Pipeline won't process [CRIBL-8013]

Problem: A JSON Serialize Function in a post-processing Pipeline will throw errors of the form: `Failed to process event in Function: Maximum call stack size exceeded.`

Workaround: Promote the Serialize Function to a processing Pipeline, upstream from the Destination.

Fix: In 3.4.1.

2022-02-02 – v.3.0.0 through Current – Upgrading a Pack overwrites Lookup and sample-data customizations [CRIBL-7998]

Problem: Upgrading a Pack overwrites any customizations you've made to the Pack's original/default Lookup tables and sample-data files.

Workaround: Duplicate the Pack's default Lookup tables and sample-data files, and customize your duplicate copies. Upgrading the Pack will not overwrite your local copies.

Fix: Version TBD.

2022-01-11 – v.3.2.2 – Git Collapse Actions disaggregates [CRIBL-7638]

Problem: With **Git Settings** > **Collapsed actions** enabled, the combined **Commit & Push** button appears in the modal as expected, but then saving a new change splits it back into two separate buttons: **Commit** and **Deploy**.

Workaround: Disable the **Collapse actions** setting, then commit and deploy separately.

Fix: In LogStream 3.3.

2022-01-19 – v.3.2.2 – Usernames containing certain letters cause some API requests to fail [CRIBL-7728]

Problem: Usernames containing certain letters can cause some API requests to fail with an `Invalid character in header content ["cribl-user"]` error. This can happen even when the username is valid for an Identity Provider.

Workaround: In your usernames, make sure that the letters you use are limited to the letters in Latin alphabet no. 1 as defined in the ISO/IEC 8859-1 standard.

Fix: In LogStream 3.3.

2022-01-18 – v.3.2.0-3.4.0 – Diagnostics > System Info page omits some entries [CRIBL-7731]

Problem: In current Cribl Stream versions, the **Diagnostics > System Info** page/tab omits certain statistics (`sysctl`, `ulimits`, `network stats`, etc.) that were previously displayed below the `cpus` and `nets` elements.

Workaround: The hidden information is nevertheless available within diagnostic bundles.

Fix: In Cribl Stream 3.4.1.

2022-01-04 – v.3.2.x – Enabling GitOps deletes LogStream's `bin`, `logs`, and `pid` subdirectories [CRIBL-7513]

Problem: Enabling GitOps with LogStream 3.2.x, via either CLI or UI, can cause the deletion of the `bin`, `logs`, and `pid` subdirectories. This disables LogStream. The root cause is that `git` versions 2.13.1 and lower did not fully respect paths listed in `.gitignore`.

Workaround: Upgrade your `git` client to v.2.13.2 or higher, to correct the underlying behavior.

Fix: In LogStream 3.3.

2021-12-21 – v.3.2.2-4.0.x – Chain Function degrades CPU load and throughput [CRIBL-7445]

Problem: Chaining Pipelines via the Chain Function can increase CPU load, and can signficantly slow down data throughput.

Workaround: Consolidate all Functions – per processing scenario – into a single Pipeline.

Fix: In Cribl Stream 4.1.

2021-12-15 – v.3.2.1-3.2.2 – Backpressure when writing to S3 and other file-based Destinations [CRIBL-7364]

Problem: On file-based Destinations, enabling the **Remove staging dirs** toggle can trigger a race condition when inbound events per second reach a high rate. This leads to backpressure.

Workaround: Disable LogStream's native **Remove staging dirs** option. Instead, as the user running LogStream, set up a cron job like this:

```
crontab -e
0 1 * * * find <stagingdir> -type d -empty -mtime +1 -delete
```

Fix: In LogStream 3.3.

2021-12-13 – v.2.4.4-3.1.1 – Upgrades via UI delete sample files [CRIBL-7347]

Problem: Using the UI to upgrade LogStream versions prior to 3.1.2 will silently delete sample data files created by users. This affects using a Leader's UI (any version) to upgrade Workers running LogStream version 3.1.1 or earlier. It also affects using the UI to upgrade the Leader itself, or a Single-Instance deployment, from v.3.1.1 or earlier to any newer version.

Workarounds: 1. Upgrade pre-3.1.2 versions via the filesystem. 2. If you choose to upgrade pre-3.1.2 versions via the UI, first save to the filesystem any custom sample files that you want to preserve. (Or, to copy directly from the filesystem, LogStream stores sample files internally at `$CRIBL_HOME/data/samples`, and stores an index of all sample files in `/$CRIBL_HOME/local/cribl/samples.yml`.)

Fix: Does not affect Workers running Cribl Stream (LogStream) 3.1.2 or higher. Does not affect self-upgrades of Leaders or Single Instances running v.3.1.2 or higher.

2021-12-10 – All Versions – API Reference is temporarily unstyled

Problem: Our documentation's API Reference has temporarily lost some visual styling, while we swap in a new rendering component.

Workaround: Manually expand accordions, as needed.

Fix: Published as of 12/20/2021.

2021-12-09 – v.3.2.1 – File-based Destinations display an unavailable Persistent Queue option [CRIBL-7293]

Problem: File-based Destinations' **Backpressure behavior** drop-down misleadingly displays a `Persistent Queue` option, which is not really available on these Destinations. (Applies to Filesystem and some Amazon, Azure, and Google Cloud Destinations.) Selecting this option displays an error, and the configuration cannot be saved.

Workaround: Don't fall for clicking that fake `Persistent Queue` option.

Fix: In LogStream 3.2.2.

2021-12-07 – v.3.2.1 – System Metrics Source's documentation doesn't open in Help drawer

Problem: After clicking the System Metrics Source's Help link, the drawer displays the error: "Unable to load docs. Please check LogStream's online documentation instead." This Source's documentation is also missing from the 3.2.1 docs PDF.

Workaround: Go to the live System Metrics docs page.

Fix: In LogStream 3.2.1, as duplicate of CRIBL-6319.

2021-12-07 – v.3.1.2-3.1.3 – Increasing CPU load over time [CRIBL-7268]

Problem: CPU load increases over time, with a slow increase in memory usage. Restarting LogStream temporarily resolves these symptoms. The root cause is needlessly collecting a high volume of full-fidelity metrics from the CriblMetrics source.

Workaround: Disable the CriblMetrics Source.

Fix: Upgrade to LogStream 3.2.1, which provides an option to disable the CriblMetrics Source's **Full Fidelity** toggle.

2021-11-24 – v.3.2.0 through Current – With processing Pipelines in QuickConnect, Preview Full doesn't show Functions' results [CRIBL-7113]

Problem: If a processing Pipeline has been inserted between a QuickConnect Source and Destination, selecting the **Pipelines** page, and then selecting **Preview Full** with a data sample, doesn't show the Pipeline's effects on the **OUT** tab. This affects only Pipelines inserted in a QuickConnect connection line. (Attaching a pre-processing Pipeline to a QuickConnect Source doesn't inhibit Preview.)

Workarounds: 1. Remove the Pipeline from QuickConnect, and re-create the same Source -> Pipeline -> Destination architecture under **Routing** > **Data Routes**. 2. Rely on **Preview Simple**.

Fix: Version TBD.

2021-11-24 – v3.2.0 – Data from Collectors and Collector-based Sources isn't reaching Routes [CRIBL-7109]

Problem: Routes are not recognizing data from Collectors and from the following Collector-based Sources: Prometheus Scraper, Office 365 Activity, Office 365 Services, and Office 365 Message Trace. This data will not flow through Routes, but **will** be sent to the default Destination(s).

Workarounds: 1. In Collectors' config modals, open the **Result Routing** tab, Disable the **Send to Routes** default, and directly specify a **Pipeline** and **Destination**. (This option is not available in Prometheus Scraper or in the Office 365 Sources.) 2. Skip v.3.2.0.

Fix: In LogStream 3.2.1.

2021-11-17 – v.3.2.0 – TLS certs that use passphrases won't decrypt private keys [CRIBL-7049]

Problem: Sources whose TLS config uses a (known good) passphrase will fail to decrypt private keys. You will see a connect error, or an error of the form: `TLS validation error, is passphrase correct?`

Workarounds: 1. Edit the Leader's or single instance's `inputs.yml` file to insert a plaintext TLS passphrase. (See paths here.) Then commit and deploy the new config (distributed mode), or reload or restart the LogStream server (single instance). 2. Use a cert and key that do not require a passphrase. 3. Skip v.3.2.0.

Fix: In LogStream 3.2.1.

2021-11-17 – v.3.2.0 – Only one Chain Function works per Pipeline [CRIBL-7044]

Problem: If you add more than one Chain Function to a Pipeline, only the first will take effect. Chain Functions lower in the stack will simply pass the data down to the next Function.

Workaround: Design your data flow to require at most one Chain Function per Pipeline.

Fix: In 3.2.1.

2021-11-17 – v.3.2.0 – Exporting a Pack to another Group requires a Leader restart [CRIBL-7043]

Problem: Exporting a Pack to a different Worker Group via the UI succeeds, but opening the Pack on the target Group fails with a `Cannot read property...undefined` error.

Workaround: To resolve the error and make the target Pack accessible, restart the Leader. To prevent the error, export and import the Pack as a file.

Fix: In LogStream 3.2.1.

2021-11-17 – v.2.1.0 through Current – Re-enabling a Function group mistakenly re-enables all its Functions [CRIBL-7053]

Problem: When you change a Function group from disabled to enabled, all of its Functions are enabled, regardless of their individual enabled/disabled states when the group was disabled.

Workaround: Avoid disabling and re-enabling Functions as a group (e.g., for testing or stepwise debugging purposes).

Fix: Version TBD.

2021-11-16 – v.3.2.0 – QuickConnected Source goes to wrong Destination [CRIBL-7013, CRIBL-7047]

Problem: Some QuickConnect connections send data to an unintended Destination. We've observed this in single-instance deployments that include the Cribl-supplied `cribl_metrics_rollup` Pipeline, or include other Pipelines/Packs with stateful Functions like Rollup Metrics or Aggregations. Data will either flow through Routes instead of your specified QuickConnect Destination, or will continue flowing to the original QuickConnect Destination after you drag the connection to a different Destination.

Workaround: Use the **Data Routes** interface to manage the Pipeline and stateful Functions indicated above. If your QuickConnect data doesn't oblige a changed QuickConnect Destination, restart LogStream. This will stop data flow to the unintended Destination, and redirect it to the intended Destination.

Fix: In Cribl Stream 3.2.1.

2021-11-10 – v.3.2.0 – GitOps `Push` workflow displayed unsupported Revert button [CRIBL-6961]

Problem: When a GitOps `Push` workflow has placed the UI in read-only mode, the Commit UI displayed a **Revert** button, even though reverting changes was not supported. Pressing the button simply triggered an error message.

Fix: In Cribl Stream/LogStream 3.2.1.

2021-10-11 – v.2.x-3.2.1 – Collectors do not filter correctly by date/time range [CRIBL-6440]

Problem: Collectors can retrieve data from undesired time ranges, instead of from the range specified. If paths are organized by date/time, this can also cause Collectors to retrieve data from the wrong paths. The root cause is that in the Collector's Run and Schedule configuration modals, time ranges are set based on the browser's time zone, whereas LogStream's backend assumes UTC.

Workaround: Offset the **Earliest** and **Latest** date/time values based on your browser's offset from UTC.

Fix: In Cribl Stream/LogStream 3.2.2 and later, the Run and Schedule modals provide a **Range Timezone** drop-down to prevent these errors.

2021-10-06 – v.3.1.2 – Monitoring page omits Collector Sources' data [CRIBL-6412]

Problem: With functioning Office 365 Activity and Office 365 Services Sources, the Job Inspector reports data being retrieved, and **Monitoring** > **Data** > **Destinations** reports data being sent out. However, **Monitoring** > **Data** > **Sources** falsely reports no data being received. The problem is isolated to this **Sources** page. It might also affect the Office 365 Message Trace and Prometheus Scraper Sources.

Workaround: Use the Source modal's **Live Data** tab, the **Monitoring** > **System** > **Job Inspector** page, and/or the **Monitoring** > **Data** > **Destinations** page to monitor throughput.

Fix: In LogStream 3.1.3.

2021-10-02 – v.3.2.x through Current – Kafka with Kerberos causes Workers' continuous restart [CRIBL-6674]

Problem: Configuring the Kafka Source or Destination with Kerberos authentication can send LogStream Workers into a continuous loop of restarts.

Workaround (multi-step):
1. In `krb5.conf`, set `dns_lookup_realm = false` and `dns_lookup_kdc = false`.
2. From `krb5.conf`'s `[realms]` section, extract the realm name (from the element name) and the FQDN (from the `kdc` key's value, stripping any port number).
3. Run `nslookup` on either or both of the realm name and the FQDN. E.g.:
`nslookup mysubdomain.confluent.io` and `nslookup kdc.kerberos-123.local`.
4. Add at least one of the returned IP addresses (which might be identical) to the `etc/hosts` file, as values in the format your platform expects.

Fix: Version TBD.

2021-09-30 – v.3.1.2 – High CPU load with CriblMetrics Source [CRIBL-6319]

Problem: Enabling the CriblMetrics Source causes high event count and high CPU load.

Workaround: Adjust the `cribl_metrics_rollup` pre-processing Pipeline to roll up a wider **Time Window** of metrics.

Fix: Upgrade to LogStream 3.2.1, which provides an option to disable the CriblMetrics Source's **Full Fidelity** toggle.

2021-09-29 – v.3.0.2-3.1.2 – Memory leak with multiple Collectors [CRIBL-6310]

Problem: Configuring multiple Collectors can lead to gradual but cumulative memory leaks. Due to a caching error, the memory can be recovered only by restarting LogStream.

Workaround: Restart LogStream on the affected Worker Nodes.

Fix: In LogStream 3.1.3.

2021-09-21 – v.3.1.1 – Azure Blob Storage Source/Destination authentication error on upgrade from v.3.0.4 [CRIBL-6236]

Problem: Upon upgrading the Azure Blob Source and/or Destination from v.3.0.4 to v.3.1.1, you might receive an error of the form: `Unable to extract accountName with provided information.`

Workaround: Change the key, and then reset it back to your desired connection string.

Fix: Not observed as of Cribl LogStream 3.1.1.

2021-09-15 – v.3.0.0–3.1.3 – High CPU usage with Google Cloud Pub/Sub Source [CRIBL-6182]

Problem: The Google Cloud Pub/Sub Source substantially increases CPU usage, which stays high even after data stops flowing. This causes throughput degradation, and more-frequent `failed to acknowledge` errors.

Workaround: Configure the Google Cloud Pub/Sub Source's **Advanced Settings** > **Max backlog** to `1000`.

Fix: In 3.2.0, which defaults the **Max backlog** to `1000`, and also relaxes the retry interval from 10 seconds to 30 seconds.

2021-09-14 – v.3.1.1 – Modifying Collector > Preview > Capture settings can break Capture elsewhere [CRIBL-6166]

Problem: Modifying the capture settings in a Collector's Run > Preview > Capture modal can improperly modify the Filter expression in Capture modals for other Collectors, Sources, and Routes/Pipelines.

Fix: In LogStream 3.1.2.

2021-09-10 – v.3.1.1 – Worker Group certificate name drop-down shows certificates from the Leader [CRIBL-6142]

Problem: When configuring certificates at **Groups** > `<group-name>` > **Settings** > **API Server Settings** > **TLS**, certificates configured on the Leader incorrectly appear on the **Certificate name** drop-down.

Fix: In LogStream 3.1.2.

2021-09-10 – v.3.1.1 – Git Collapsed Actions broken in 3.1.1 [CRIBL-6134]

Problem: With **Collapsed Actions** enabled, clicking the **Commit & Push** button has no effect. (The **Commit & Deploy** button works properly.)

Workaround: Disable **Collapsed Actions**, to restore separate **Commit** and **Git Push** buttons.

Fix: In LogStream 3.1.2.

2021-09-08 – All versions through v.3.1.1 – UDP support is currently IPv4-only [CRIBL-6106, CRIBL-6115]

Problem: Where Sources and Destinations connect over UDP, they currently support IPv4 only, not IPv6. This applies to Syslog, Metrics, and SNMP Trap Sources; and to Syslog, SNMP Trap, StatsD, StatsD Extended, and Graphite Destinations.

Workaround: Integrate via IPv4 if possible.

Fix: UDP Sources and Destinations gained IPv6 support in LogStream 3.1.2.

2021-09-02 – v.3.1.0-3.1.1 – Google Pub/Sub authentication via proxy environment variable fails [CRIBL-6086]

Problem: When LogStream's Google Cloud Pub/Sub Source and Destination attempt authentication through a proxy, using the `https_proxy` environment variable, they send an HTTP request to http://www.googleapis.com:443/oauth2/v4/token. This request fails with 504/502 errors. The root cause is a mismatch in dependency libraries, whose correction has been identified, but requires broader testing.

Workaround: Configure the proxy in `transparent` mode, to avoid relying on environment variables.

Fix: In 3.1.2.

2021-08-24 – v.3.1.0 – High CPU load with LogStream version 3.1.0 [CRIBL-6039, CRIBL-6044]

Problem: LogStream 3.1.0 added code-execution safeguards that inadvertently increased CPU load, and decreased throughput, with several Functions and most expressions.

Workaround: Downgrade to version 3.0.4.

Fix: Upgrade to version 3.1.1 or later.

2021-08-18 – v.3.1.0 – Clone Collector option broken [CRIBL-5977]

Problem: Clicking a 3.1.0 Collector modal's **Clone Collector** button simply closes the modal. (If you have unsaved changes, you'll first be challenged to confirm closing the parent modal – but the expected cloned modal won't open.)

Workaround: Click **+ Add New** to re-create your original Collector's config from scratch, adding any desired modifications.

Fix: In LogStream 3.1.1.

2021-08-18 – All versions through 3.1.0 – Tabbed code blocks broken on in-app docs [CRIBL-5972]

Problem: When docs with tabbed code blocks are opened in the Help drawer, the default (leftmost) tab seizes focus. Other tabs will not display when clicked.

Workaround: Click the blue/linked page title atop the Help drawer to open the same page on docs.cribl.io, where all tabs can be selected.

Fix: In LogStream 3.1.1.

2021-08-14 – v.3.1.0 – Splunk Load Balanced Destination does not migrate auth type [CRIBL-5940]

Problem: In a Splunk Load Balanced Destination with **Indexer discovery** enabled and a corresponding **Auth token** defined, upgrading to LogStream 3.1.0 corrupts the **Auth token** field's value.

Workaround: Set the **Authentication method** to **Manual** and resave the token's value.

Fix: In 3.1.1.

2021-08-11 – v.3.1.0 – `C.Secret()` values are undefined in Collectors [CRIBL-5926]

Problem: Calling the C.Secret() internal method within a Collector field resolves incorrectly to an `undefined` substring. E.g., in URL fields, `C.Secret()` values will resolve to `/undefined/` path substrings.

Workarounds: 1. Use `C.vars` and a Global Variable, instead of using this method. 2. Root cause is that `C.Secret()` in Collectors and Pipeline Functions has access only to secrets that were created before the last restart. Therefore, restart Worker Processes to refresh the method's access.

Fix: In 3.1.1.

2021-08-10 – v.3.1.0 – Pre-processing Pipelines break Flows display [CRIBL-5909]

Problem: Attaching a pre-processing Pipeline to a Source breaks the **Monitoring** > **Flows (beta)** page's display. Attempting to remove Sources/Destinations from that page's selectors throws a cryptic `Sankey` error.

Workaround: Temporarily detach pre-processing Pipelines if you want to check Flows.

Fix: Upgrade to version 3.1.1 or later.

2021-07-29 – v.3.0.2-3.0.4 – Upgrades via UI require broader permissions [CRIBL-5774]

Problem: Upgrading from v.3.0.x via the UI requires the `cribl` user to be granted write permission on the parent directory above `$CRIBL_HOME`. The symptom is an error message of the form: `Upgrade failed: EACCES: permission denied, mkdir '/opt/unpack.xxxxxxx.tmp'`.

Workaround: Either adjust permissions, or upgrade via the filesystem. For complete instructions, see Upgrading.

Fix: Does not affect LogStream 3.1 or higher.

2021-07-26 – v.3.0.x–3.1.0 – Packs with orphaned lookups block access to Worker Groups [CRIBL-5738]

Problem: If a Pack references a lookup file that's missing from the Pack, pushing the Pack to a Worker Group will block access to the Group's UI. You will see an error message of the form: "The Config Helper service is not available because a configuration file doesn't exist... Please fix it and restart LogStream."

Workaround: On the Leader Node, review the config helper logs (`$CRIBL_HOME/log/groups/<group>/*.log`) to see which references are broken. (In a single-instance deployment, see `$CRIBL_HOME/log/*.log`.) Then manually resolve these references in the Pack's configuration.

Fix: Upgrade to version 3.1.1 or later.

2021-07-20 – v.3.0.3-3.4.0 – Can't add Functions to a Pipeline named `config` [CRIBL-5706]

Problem: You cannot add Functions to a Pipeline if the Pipeline is named `config`, because this name conflicts with the reserved route for the **Create Pipeline** dialog.

Workarounds: Don'tcha name your Pipelines `config`.

Fix: In Cribl Stream 3.4.1.

2021-07-06 – All versions through Current – Duplicate Workers/ Worker GUIDs [CRIBL-5611]

Problem: Multiple Workers have identical GUIDs. This creates problems in Monitoring, upgrading and versioning, etc., because all Workers show up as one.

Cause: This is caused by configuring one Worker and then copying its `cribl/` directory to other Workers, to quickly bootstrap a deployment.

Workaround: Don't do this! Instead, use the Bootstrap Workers from Leader endpoint.

Fix: Version TBD.

2021-07-02 – v.3.0.2–3.0.3 – Sample file's last line not displayed upon upload [CRIBL-5595]

Problem: When uploading (attaching) a sample data file, the file's final line is not displayed in the **Add Sample Data** modal.

Workarounds: This is a UI bug only. LogStream correctly processes the complete sample data, which should show up when viewing the sample afterwards (e.g., within a Pipeline's preview pane).

Fix: In LogStream 3.1.0.

2021-07-02 – All versions through 3.0.x – Date fields misleadingly preview with string symbol [CRIBL-5594]

Problem: In Preview or Capture, incoming events like `_raw` will be displayed in the right pane with an `α` symbol that indicates string data. However, calling `new Date()` and then `C.Time.strptime()` methods in an Eval Function will return `null` on the OUT tab.

Cause: Due to the nature of JSON serialization, the incoming event's `Date` field is misleadingly subsumed under the event's `α` string symbol. It's actually a structured type, not a string...yet.

Workaround: If you see unexpected `null` results, stringify the datetime field as you extract it, e.g.: `new Date().toISOString()`. Feeding the resulting field to Time methods should return datetime strings as expected.

Fix: In LogStream 3.1.0.

2021-06-22 – v.3.0.0–3.0.3 – Internal `C.Text.relativeEntropy()` method – broken typeahead and preview [CRIBL-5534]

Problem: The `C.Text.relativeEntropy()` internal method is missing from JavaScript expressions' typeahead drop-downs. You can manually type or paste in the method, and save your Function and Pipeline, but LogStream's right Preview pane will (misleadingly) always show the method returning `0`.

Workarounds: Use other means (such as the **Live** button) to preview and verify that the method is (in fact) returning valid results.

Fix: In LogStream 3.1.0.

2021-05-20 – v.3.0.0 – Multiple Functions Break LogStream 3.0 Pipelines [CRIBL-5311, CRIBL-5766]

Problem: After upgrade to LogStream 3.0.0, including any of the following Functions in a Pipeline can break the Pipeline: GeoIP, Redis, DNS Lookup, Reverse DNS, Tee. Symptom is an error of the form: `Pipeline process timeout has occurred.` Less seriously, including these Functions in a Pipeline can suppress Preview's display of fields/values.

Workarounds: If you use these Functions in your Pipelines, stay with (or restore) a pre-3.0 version until LogStream 3.0.1 is available.

Fix: CRIBL-5311 fixed in LogStream 3.0.1. CRIBL-5766 fixed in LogStream 3.2.1.

2021-05-19 – v.3.0.0 – Leader's Changes fly-out stays open after Commit

Problem: In the Leader's left nav, the Changes fly-out remains stuck open after you commit pending changes.

Workarounds: Hover or click away. Then hover or click back to reopen the fly-out.

Fix: In LogStream 3.0.1.

2021-05-18 – v.3.0.0 – Packs > Export in "Merge" mode omits schemas and custom Functions

Problem: Exporting a Pack with the export mode set to `Merge` omits schemas and custom Functions configured within the Pack's **Knowledge > Schemas**.

Workarounds: 1. Change the export mode to `Merge safe`, and export again. 2. If that doesn't preserve the schema and Functions, revert to `Merge` export mode; install the resulting Pack onto its target(s); and then manually copy/paste the schema(s) and Functions from the source Pack's UI to the target Pack's UI.

Fix: In LogStream 3.0.1.

2021-05-17 – v.3.0.0–3.2.0 – Can't Enable KMS on Worker Group after installing license

Problem: Enabling HashiCorp Vault or AWS KMS on a Worker Group, after installing a LogStream license on the same Group, fails with a spurious `External KMS is prohibited by the current license` error message.

Workaround: On the Leader, navigate to **Settings** > **Worker Processes**. Restart the affected Worker Group's `CONFIG_HELPER` process. Then return to that Worker Group's **Security** > **KMS** Settings, re-enter the same KMS configuration, and save.

Fix: Version TBD.

2021-05-10 – v.2.4.5-3.0.3 – Elasticsearch Destination, with Auto version discovery, doesn't send Authorization header

Problem: When the Elasticsearch Destination has Basic Authentication enabled, and its **Elastic version** field specifies `Auto` version discovery, LogStream fails to send the configured username and password credentials along with its API initial request. Elasticsearch responds with an HTTP 401 error.

Workaround: Explicitly set the **Elastic version** to either `7.x` or `6.x` (depending on your Elasticsearch cluster's version); then stop and restart LogStream to pick up this configuration change.

Fix: In LogStream 3.1.0.

2021-05-04 – v.2.4.5-3.0.1 – Office 365 Message Trace Source skips events

Problem: The Event Breaker Rule provided for the Office 365 Message Trace Source mistakenly presets the **Default timezone** to `ETC/GMT-0`. This setting causes LogStream to discover events but not collect them.

Workaround: Reset the Rule's **Default timezone** to `UTC`, then click **OK** and resave the Ruleset.

Fix: In 3.0.2.

2021-05-03 – v.2.4.4–3.0.1 – Rollup Function suppresses `sourcetype` metrics

Problem: `sourcetype` metrics can be suppressed when the Cribl Internal > CriblMetrics Source is enabled and the `cribl_metrics_rollup` pre-processing Pipeline is attached to a Source.

Workarounds: Disabling the pre-processing pipeline restores `sourcetype` and any other missing data. However, without the rollup, a much higher data volume will be sent to the indexing tier.

Fix: In LogStream 3.0.2.

2021-04-20 – v.2.4.3–2.4.5 – Orphaned S3 staging directories

Problem: Using the S3 Destination, defining a partitioning expression with high cardinality can proliferate a large number (up to millions) of empty directories. This is because LogStream cleans up staged files, but not staging directories.

Workaround: Programmatically or manually delete stale staging directories (e.g., those older than 30 days).

Fix: In LogStream 3.0.2.

2021-04-12 – v.2.4.4-3.0.0 – Splunk Sources do not support multiple-metric events

Problem: LogStream's Splunk Sources do not support multiple-measurement metric data points. (LogStream's Splunk Load Balanced Destination does.)

Fix: In LogStream 3.0.1.

2021-04-07 – v.2.4.2–2.4.5 – Google Cloud Storage Destination fails to upload files > 5 MB

Problem: The Google Cloud Storage Destination might fail to put objects into GCS buckets. This happens with files larger than 5 MB, and causes the Google Cloud API to report a vague `Invalid argument` error.

Workaround: Set the **Max file size (MB)** to 5 MB. Also, reduce the **Max file open time (sec)** limit from its default `300` (5 minutes) to a shorter interval, to prevent files from growing to the 5 MB threshold. (Tune this limit based on your observed rate of traffic flow through the Destination.)

Fix: In LogStream 3.0.0.

2021-03-31 – v.2.4.4-2.4.5 – Local login option visible even when disabled

Problem: The **Log in with local user** option is displayed to users even when you have disabled **Settings > Authentication > Allow local auth** for an OpenID Connect identity provider.

Workaround: Advise users to ignore this button. Although visible, it will not function.

Fix: In LogStream 3.0.0.

2021-03-31 – v.2.4.0–2.4.4 – Splunk TCP and LB Destinations' Workers trigger OOM errors and restart

Problem: With a Splunk TCP or Splunk Load Balanced Destination created after upgrading to LogStream 2.4.x, Workers' memory consumption may grow without bound, leading to out-of-memory errors. The API Process will restart the Workers, but there might be temporary outages.

Workaround: Toggle the Destination's **Advanced Settings > Minimize in-flight data loss** slider to `No`. This will preserve Processes killed by OOM conditions.

Fix: In LogStream 2.4.5.

2021-03-31 – v.2.4.4-2.4.5 – OpenID Connect authentication always shows local-auth fallback

Problem: Even if OpenID Connect external authentication is configured to disable **Allow local auth**, LogStream's login page displays a **Log in with local user** button.

Workaround: Do not click that button.

Fix: In LogStream 3.0.0.

2021-03-31 – v.2.4.4 – Authentication options mistakenly display Cribl Cloud

Problem: The **Settings > Authentication > Type** drop-down offers a `Cribl Cloud` option, which is not currently functional. Attempting to configure and save this option could lock the `admin` user out of LogStream.

Workaround: Do not select, configure, or save that option.

Fix: In LogStream 2.4.5.

2021-03-30 – v.2.4.4 – Can't disable some Sources from within their config modals

Problem: In configuration modals for the Azure Blob Storage and Office 365 Message Trace Sources, the **Enabled** slider cannot be toggled off, and its tooltip doesn't appear.

Workaround: Disable your configured Source (where required) from the **Manage Blob Storage Sources** or the **Manage Message Trace Sources** page.

Fix: In LogStream 2.4.5.

2021-03-29 – v.2.4.x – SpaceOut Destination is broken

Problem: Within the SpaceOut game, you cannot shoot, and your player is immortal.

Workaround: There are other video games. After we defeat COVID, you'll even be able to buy a PS5.

Fix: Restored in LogStream 2.4.5.

2021-03-24 – v.2.4.x – Cribl App for Splunk blocks admin password changes, configuration changes, and Splunk-based authentication

Problem: Attempting to change the admin password via the UI triggers a 403/Forbidden message. You can reset the password by editing `users.json`, but can't save configuration changes to Settings, Pipelines, etc., because RBAC Roles are not properly applied.

Workaround: Using a 2.3.x version of the App enables **local** authentication and enables changes to Cribl/LogStream passwords and configuration/settings.

Fix: In LogStream 2.4.4.

2021-03-22 – v.1.7.0-2.4.3 – Azure Event Hubs Destination: Compression must be manually disabled

Problem: LogStream's Azure Event Hubs Destination provides a **Compression** option that defaults to `Gzip`. However, compressed Kafka messages are not yet supported on Azure Event Hubs.

Workaround: Manually reset **Compression** to `None`, then resave Azure Event Hubs Destinations.

Fix: In LogStream 2.4.4.

2021-03-17 – v.2.4.2-2.4.3 – Parser Function > List of Fields copy/paste fails

Problem: When copying/pasting **List of Fields** contents between Parser Functions via the Copy button, the paste operation inserts unintended metadata instead of the original field references.

Workaround: Manually re-enter the second Parser Function's **List of Fields**.

Fix: In LogStream 2.4.4.

2021-03-13 – v.2.4.3 – UI can't find valid TLS .key files, blocking Master restarts and Worker reconfiguration

Problem: After upgrading to v.2.4.3, the UI fails to recognize valid TLS `.key` files, displaying spurious error messages of the form: "File does not exist: `$CRIBL_HOME/local/cribl/auth/certs/<keyname>key`." An affected Master will not restart. Affected Workers will restart, but will not apply changes made through the UI.

Workaround: Ideally, specify an absolute path to each key file, rather than relying on environment variables. If you're locked out of the UI, you'll need to manually edit the referenced paths within these configuration files in LogStream subdirectories: `local/cribl/cribl.yml` (General > API Server TLS settings) and/or `local/_system/instance.yml` (Distributed > TLS settings). Contact Cribl Support if you need assistance. A more drastic workaround is to disable TLS for the affected connections.

Fix: In LogStream 2.4.4.

2021-03-12 – v.2.4.2-2.4.5 – Redis Function with specific username can't authenticate against Redis 6.x ACLs

Problem: The Redis Function, when used with a specific username and Redis 6.x's Access Control List feature, fails due to authentication problems.

Workaround: In the Function's **Redis URL** field, point to the Redis `default` account, either with a password (e.g., `redis://default:Password1@192.168.1.20:6379`) or with no password (redis://192.168.1.20:6379). Do not specify a user other than `default`.

Fix: In LogStream 3.0.

2021-03-09 – v.2.4.3 – Splunk Destinations' in-app docs mismatch UI's current field order

Problem: For the Splunk Single Instance and Splunk Load Balanced Destinations, the in-app documentation omits the UI's **Advanced Settings** section. Some fields are documented out-of-sequence, or are omitted.

Workaround: Refer to the UI's tooltips, to the corrected Splunk Single Instance and Splunk Load Balanced online docs, and/or to the corrected PDF.

Fix: In LogStream 2.4.4.

2021-03-08 – v.2.4.3 – Enabling Git Collapse Actions breaks Commit & Deploy

Problem: After enabling **Settings > Distributed Settings > Git Settings > General > Collapse Actions**, selecting **Commit & Deploy** throws a 500 error.

Workaround: Disable the **Collapse Actions** setting, then commit and deploy separately.

Fix: In LogStream 2.4.4.

2021-03-08 – v.2.4.3 – S3 Collector lacks options to reuse HTTP connections and allow-self signed certs

Problem: As of v.2.4.3, LogStream's AWS-related Sources & Destinations provide options to reuse HTTP connections, and to establish TLS connections to servers with self-signed certificates. However, the S3 Collector does not yet provide these options.

Fix: In LogStream 2.4.4.

2021-03-04 – v.2.4.2 – Esc key closes both Event Breaker Ruleset modals

Problem: After adding a rule to a **Knowledge > Event Breaker Ruleset**, pressing `Esc` closes the parent Ruleset modal along with the child Rule modal.

Workaround: Close the Rule modal by clicking either its **Cancel** button or its close box.

Fix: In LogStream 2.4.3.

2021-03-04 – v.2.4.2 – Aggregations Function in post-processing Pipeline addresses wrong Destination

Problem: An Aggregations Function, when used in a post-processing Pipeline, sends data to LogStream's Default Destination rather than to the Pipeline's attached Destination.

Workaround: If applicable, use the Function in a processing or pre-processing Pipeline instead.

Fix: In LogStream 2.4.3.

2021-02-25 – v.2.4.2 – On Safari, Event Breaker shows no OUT events

Problem: When viewing an Event Breaker's results on Safari, no events are displayed on the Preview pane's **OUT** tab.

Workaround: Use another supported browser.

Fix: In LogStream 2.4.3.

2021-02-22 – v.2.4.3 – Collection jobs UI errors

Problem: Collection jobs are missing from the **Monitoring > Sources** page, even though they are returned by metric queries. Also, the **Job Inspector > Live** modal displays an empty, unintended **Configure** tab.

Workaround: Use the Job Inspector to access collection results. Ignore the **Configure** tab.

Fix: In LogStream 2.4.4.

2021-02-19 – v.2.4.2 – Upon upgrade, Git remote repo setting breaks, blocking Worker Groups

Problem: If a Git remote repo was previously configured, upgrading to LogStream v.2.4.2 throws errors of this form upon startup: `Failed to initialize git repository. Config versioning will not be available...Invalid URL...`. The Master cannot commit or deploy to any Worker Group.

Workarounds: 1. Downgrade back to v.2.4.1 (or your previous working version). 2. Switch from Basic authentication to SSH authentication against the repo, to remove the username from requests.
(The apparent root cause is Basic/http auth using a valid URL and username, but missing a password.)

Fix: In LogStream 2.4.3.

2021-02-19 – v.2.4.0-2.4.2 – Splunk (S2S) Forwarder access control blocks upon upgrade to LogStream 2.4.x

Problem: If Splunk indexers have forwarder tokens enabled, and worked with LogStream 2.3.x before, upgrading to LogStream 2.4.x causes data to stop flowing.

Workaround: If you encounter this problem, rolling back to your previously installed LogStream version (such as v.2.3.4) resolves it.

Fix: In LogStream 2.4.3.

2021-02-10 – v.2.4.0-2.4.1 – With Splunk HEC Source, JSON payloads containing embedded objects trigger high CPU usage

Problem: Splunk HEC JSON payloads containing nested objects trigger high CPU usage, due to a flaw in JSON parsing.

Workaround: If you encounter this problem, rolling back to your previously installed LogStream version (such as v.2.3.4) resolves it.

Fix: In LogStream 2.4.2.

2021-01-30 – v.2.4.0 – Worker Nodes cannot connect to Master

Problem: Worker Nodes cannot connect to the Master after the Master is upgraded to v.2.4.0.

Workaround: Disable compression on the Workers. You can do so through the Workers' UI at **System Settings > Distributed Settings > Master Settings > Compression**, or by commenting out this line in each Worker's `cribl.yml` config file:

```
compression: gzip
```

Fix: In LogStream 2.4.1.

2021-01-25 – v.2.4.0 – S3 collection stops working due to auth secret key issues.

Problem: S3 collection stops after upgrade to 2.4.0 due to secret key re-encryption.

Workaround: Re-configure S3, save and re-deploy.

Fix: In LogStream 2.4.1.

2021-01-14 – v.2.4.0 – Google Cloud Storage Destination Needs Extra Endpoint to Initialize

Problem: The Google Cloud Storage Destination fails to initialize, displaying an error of the form: `Bucket does not exist!`

Workaround: In the `outputs.yml` file, under your `cribl-gcp-bucket` key endpoint, add: `https://storage.googleapis.com`. (in a single-instance deployment, locate this file at `$CRIBL_HOME/local/cribl/outputs.yml`. In a distributed deployment, locate it at `$CRIBL_HOME/groups/<group name>/local/cribl/outputs.yml`.)

Fix: In LogStream 2.4.1.

2021-01-14 – v.2.4.0 – Worker Groups' Settings > Access Management Is Absent from UI

Problem: In this release, the **Worker Groups > <group-name> > System Settings** UI did not display the expected **Access Management**, **Authentication**, and **Local Users** sections.

Workaround: Manually edit the `users.json` file.

Fix: In LogStream 2.4.1.

2021-01-13 – v.2.4.0 – Route Filters Aren't Copied to Capture Modal

Problem: On the **Routes** page, selecting **Capture New** in the right pane does not copy custom **Filter** expressions to the resulting **Capture Sample Data** modal. That modal's **Filter Expression** field always defaults to `true`.

Workarounds: 1. Bypass the **Capture New** button. Instead, from the Route's own ••• (Options) menu, select **Capture**. This initiates a capture with the **Filter Expression** correctly populated. 2. Copy/paste the expression into the **Capture Sample Data** modal's **Filter Expression** field. Or, if the expression is displayed in that field's history drop-down, retrieve it.

Fix: In LogStream 2.4.1.

2021-01-13 – v.2.4.0 – Destinations' Documentation Doesn't Render from UI

Problem: Clicking the **Help** Help link in a Destination's configuration modal displays the error message: "Unable to load docs. Please check LogStream's online documentation instead."

Workarounds: 1. Go directly to the online Destinations docs, starting here. 2. Follow the UI link to the docs landing page, click through to open or download the current PDF, and scroll to its Destinations section.

Fix: In LogStream 2.4.1.

2021-01-13 – v.2.4.0 – `Esc` Key Doesn't Consistently Close Modals

Problem: Pressing `Esc` with focus on a modal's drop-down or slider doesn't close the modal as expected. (Pressing `Esc` with focus on a free-text field, combo box, or nothing does close the modal – displaying a confirmation dialog first, if you have unsaved changes.)

Workarounds: Click the **X** close box at upper right, or click **Cancel** at lower right.

Fix: In LogStream 2.4.1.

2020-12-17 – v.2.3.0-2.4.0 – Free-License Expiration Notice, Blocked Inputs

Problem: LogStream reports an expired Free license, and blocks inputs, even though Free licenses in v.2.3.0 do not expire.

Workaround: This is caused by time-limited Free license key originally entered in a LogStream version prior to 2.3.0. Go to **Settings > Licensing**, click to select and expand your expired Free license, and click **Delete license**. LogStream will recognize the new, permanent Free license, and will restore throughput.

Fix: In LogStream 2.4.1.

2020-11-14 – v.2.3.3 – Null Fields Redacted in Preview, but Still Forwarded

Problem: Where event fields have null values, LogStream (by default) displays them as struck-out in the right Preview pane. The preview is misleading, because the events are still sent to the output.

Workaround: If you do want to prevent fields with null values from reaching the output, use an Eval Function, with an appropriate Filter expression, to remove them.

Fix: Preview corrected in LogStream 2.3.4.

2020-10-27 – v.2.3.2 – Cannot Name or Save New Event Breaker Rule

Problem: After clicking **Add Rule** in a new or existing Event Breaker Ruleset, the **Event Breaker Rule** modal's **Rule Name** field is disabled. Because **Rule Name** is mandatory field, this also disables saving the Rule via the **OK** button.

Fix: In LogStream 2.3.3.

2020-10-12 – v.2.3.1 – Deleting One Function Deletes Others in Same Group

Problem: After inserting a new Function into a group and saving the Pipeline, deleting the Function also deletes other Functions lower down in the same group.

Fix: In LogStream 2.3.2.

Workaround: Move the target Function out of the group, resave the Pipeline, and only then delete the Function.

2020-09-27 – v.2.3.1 – Enabling Boot Start as Different User Fails

Problem: When a root user tries to enable boot-start as a different user (e.g., using `/opt/cribl/bin/cribl boot-start enable -u <some-username>`), they receive an error of this form:

```
error: found user=0 as owner for path=/opt/cribl, expected uid=NaN.
Please make sure CRIBL_HOME and its contents are owned by the uid=NaN by running:
[sudo] chown -R NaN:[$group] /opt/cribl
```

Fix: In LogStream 2.3.2.

Workaround: Install LogStream 2.2.3 (which you can download here), then upgrade to 2.3.1.

2020-09-17 – v.2.3.0 – Worker Groups menu tab hidden after upgrade to LogStream 2.3.0

Problem: Upon upgrading an earlier, licensed LogStream installation to v.2.3.0, the **Worker Groups** tab might be absent from the Master Node's top menu.

Fix: In LogStream 2.3.1.

Workaround: Click the **Home > Worker Groups** tile to access Worker Groups.

2020-09-17 – v.2.3.0 – Cannot Start LogStream 2.3.0 on RHEL 6, RHEL 7

Problem: Upon upgrading to v.2.3.0, LogStream might fail to start on RHEL 6 or 7, with an error message of the following form. This occurs when the user running LogStream doesn't match the LogStream binary's owner. LogStream 2.3.0 applies a restrictive permissions check using `id -un <uid>`, which does not work with the version of `id` that ships with these RHEL releases.

```
id: 0: No such user
ERROR: Cannot run command because user=root with uid=0 does not own executable
```

Fix: In LogStream 2.3.1.

Workaround: Update your RHEL environment's `id` version, if possible.

2020-09-17 – v.2.3.0 – Cannot Start LogStream 2.3.0 with OpenId Connect

Problem: Upon upgrading an earlier LogStream installation to v.2.3.0, OIDC users might be unable to restart the LogStream server.

Fix: In LogStream 2.3.1.

Workaround: Edit `$CRIBL_HOME/default/cribl/cribl.yml` to add the following lines to its the `auth` section:

```
filter_type: email_whitelist
scope: openid profile email
```

2020-06-11 – v.2.1.x – Can't switch from Worker to Master Mode

Problem: In a Distributed deployment, attempting to switch Distributed Settings from Worker to Master Mode blocks with a spurious "Git not available...Please install and try again" error message.

Fix: In LogStream 2.3.0.

Workaround: To initialize `git`, switch first from Worker to Single mode, and then from Single to Master mode.

2020-05-19 – v.2.1.x – Login page blocks

Problem: Entering valid credentials on the login page (e.g., `http://localhost:9000/login`) yields only a spinner.

Fix: In LogStream 2.3.0.

Workaround: Trim `/login` from the URL.

2020-02-22 – v.2.1.x – Deleting resources in `default/`

Problem: In a Distributed deployment, deleting resources in `default/` causes them to reappear on restart.

Workaround/Fix: In progress.

2019-10-22 – v.2.0.0 – In-product upgrade issue on v2.0

Problem: Using in-product upgrade feature in v.1.7 (or earlier) fails to upgrade to v.2.0, due to package-name convention change.

Workaround/Fix: Download the new version and upgrade per steps laid out here.

2019-08-27 – v.1.7 – In-product upgrade issue on v.1.7

Problem: Using in-product upgrade feature in v.1.6 (or earlier) fails to upgrade to v.1.7 due to package name convention change.

Workaround/Fix: Download the new package and upgrade per steps laid out here.

2019-03-21 – v.1.4 – S3 stagePath issue on upgrade to v.1.4+

Problem: When upgrading from v.1.2 with a S3 output configured, `stagePath` was allowed to be undefined. In v.1.4+, `stagePath` is a required field. This might causing schema violations when upgrading older configs.

Workaround/Fix: Reconfigure the output with a valid `stagePath` filesystem path.

16.2. Working with Cribl Support

If you run into issues with Cribl Stream, please first check our Known Issues page for recommended resolutions or workarounds. For questions not addressed there, this page outlines how to engage with the Cribl Support staff to resolve problems as quickly as possible.

Contacting Cribl Support

You can contact Cribl Support in multiple ways, outlined below:

- Email
- Community Slack
- Cribl Curious
- Support Portal (login required)

The best method depends on your reason for contacting Support. For quick, question-and-answer discussions, Community Slack or Cribl Curious might be sufficient. For in-depth discussions, or to troubleshoot technical issues, create a support case for better tracking and exchange of information.

Creating a Support Case

You have two options for opening a support case: via email or via the Support Portal (access here, details below).

If you exchange diags or other files with us, note that all file-transfer methods **except** for email are encrypted.

Email communication imposes a total message-size limit of 25 MB (after MIME-encoding attachments). The Support Portal allows file attachments of up to 100 MB each.

Contact via Email

The simplest way to engage with Support is to email support@cribl.io, with the information outlined below. This will automatically open a case for us to track, and will send you an auto-confirmation email that includes your case number. A Support engineer will then contact you to begin troubleshooting.

Email via Support Drawer

Within Cribl Stream's UI, you can click the top-right **Support** button and, in the resulting **Support** drawer, select the **Get Help** upper tab. Then click **Email support** This will trigger creating a new email to us in your email client.

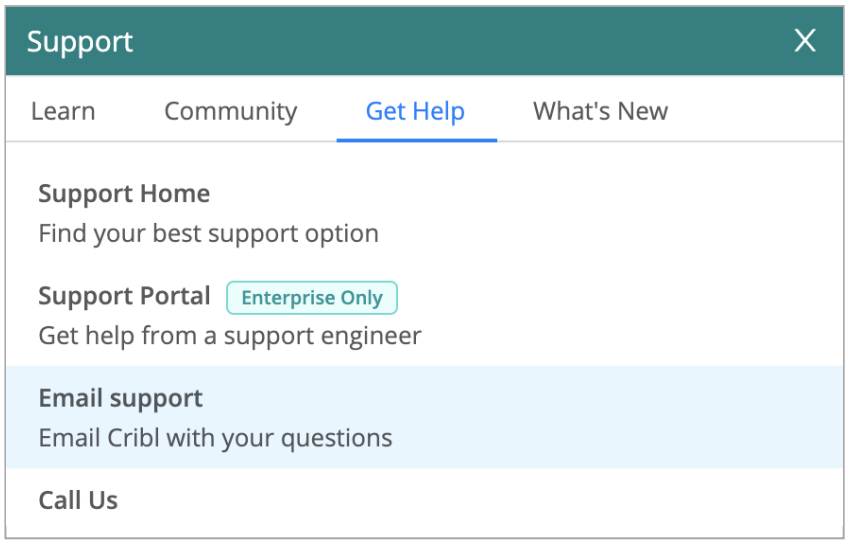

Email from the UI

Contact via Community Slack

Our Support staff monitors Cribl's Community Slack for any issues customers are experiencing: https://cribl-community.slack.com/. If you are not already registered for our Community Slack, please register at https://cribl.io/community/ to get started.

Slack might not get you the same timely response as an email, but it's a great way to get questions about Cribl Stream answered by a wide range of Cribl insiders, and expert peer users, who enjoy sharing their knowledge of the product. Check out individual channels dedicated to feature requests, docs, and other concerns.

Private Slack Channels

Our Enterprise customers have their own private channels where they can communicate directly with their Cribl account team.

Contact via Cribl Curious

Cribl Curious is a threaded community Q&A site. Our support staff monitors it, as do other Cribl teams. As with Community Slack, it's best for issues that aren't critical or urgent.

Contact via Support Portal

The Cribl Support Portal is available to our licensed customers. It facilitates encrypted transfer of large files, and maintains support cases' history so that you can easily review them.

The Support Portal uses single sign-on (SSO) through an integration with Cribl.Cloud accounts. So as part of Support Portal signup, you'll receive an invitation to create a Cribl Cloud account, if you don't already have one. You have no obligation to use your Cribl.Cloud Organization for purposes other than SSO, if it doesn't meet your needs.

> For details about navigating Cribl.Cloud, see the Cribl Cloud Launch Guide.

The Support Portal enables two types of users: Standard and Admin. You can have up to four user logins per customer account, one of which can be (but is not required to be) an Admin user.

Standard Versus Admin Users

Standard users can:

- Create cases.
- Manage cases.
- Search cases.
- Upload files to cases.
- Access other Cribl resources via their Cribl.Cloud portal.

Admin users can do all of the above, plus:

- View all cases on the customer's account.
- Edit case information, post-creation.
- Invite Standard users to the portal.

Signing Up

You'll need to receive a Cribl.Cloud invitation from Cribl or your Support Portal Admin, and follow the directions in the email to sign up. Both scenarios are summarized below. But first, a word from our sponsor, us:

Video Tutorial: Signing Up, Submitting Cases

This video walks you through signing up for the Support Portal, and then submitting cases with enough detail for Cribl Support to rapidly help you.

How to Access the Cribl Support Portal

06:01

Accessing the Cribl Support Portal

Standard User Signup

To access the Cribl Support Portal if you already have a Cribl.Cloud account:

1. Contact Cribl Support to request a user login to the Support Portal.
2. Cribl Support will send an invitation to you via email.
3. Follow the link in the email to sign up, using the same email address at which you received the invitation.
4. Log in with your existing Cribl.Cloud account.
5. Once logged in, you can create support cases, view any of your open or closed cases, etc.

To access the Cribl Support Portal without an existing Cribl.Cloud account:

1. Contact Cribl Support at support@cribl.io to request to be added. Cribl Support will email you an invitation. (Your account's Support Portal Admin has the capability to invite you too.)
2. Follow the link in the email to sign up, using the same email address at which you received the invitation.
3. Register your new Cribl.Cloud account.
4. Then log into https://portal.support.cribl.io with your new Cribl.Cloud account.
5. Once logged in, you can create support cases, view any of your open or closed cases, etc.

Admin User Signup

To access the Cribl Support Portal as an Admin user:

1. Contact Cribl Support to request Admin access.

2. If your customer account already has an Admin user, the current Admin must also contact Cribl, requesting to transfer the account's sole Admin user role to you.
   The request from the current Portal Admin must originate from the email address we have on file for that Admin user. We can tell you who the current Admin is, if you do not know.

3. If you have an existing Cribl.Cloud account then Cribl Support will promote your account to Admin.
   If you do not yet have a Cribl.Cloud account, Cribl Support will email you a Support Portal signup invitation. Follow the link in the email to accept the invitation, using the same email address at which you received the invitation.

Submitting Cases via the Portal

All support cases must be submitted by an individual account (i.e., no shared or group accounts). However, there are broader notification options.

When you create a new case, note the two fields for **Related Teammates**. Each name entered here must be an existing Contact on your customer account. If you want to enter one of your own organization's **group** email addresses, contact Cribl Support to create a contact entry for that address.

Relevant Information We Need

When contacting Cribl Support via any means, please provide as many of the following details as you can – the more, the better:

- Your name.
- Preferred contact method (phone or email).
- Cribl Stream version number affected.
- Description of the issue you're having.
- What's the issue's scope? (Leader Node, specific Worker Nodes or Groups, or entire deployment; number of nodes impacted).
- When did the issue begin, or when was it first noticed?
- Did you make any known changes around that time? (Upgrade, config change, network change, etc.).
- Diags for one or more affected systems (the Leader Node does not process data, so typically, only diags from Workers are necessary).
- Sample event data for testing Pipeline issues (provide a text file, rather than screenshots).
- Any troubleshooting steps that you've already taken.

Pulling Diags

Providing us diags from your environment will speed up the time to resolution. For instructions on how to pull a diag file, see Diagnosing Issues.

With Cribl Stream (LogStream) 2.4.1 or later, the diag is uploaded from the browser, rather than from the LogStream Node. This means that your LogStream Worker Nodes do not need Internet access. With LogStream 2.4.0 or earlier, you'll need to transfer the diags from your Worker Nodes.

> Diag bundles for Leader Nodes do not include diag bundles for any Worker Nodes.
>
> If you would like to upload your diag file via the GUI or CLI, you'll need outbound Internet access to https://diag-upload.cribl.io, plus a valid support case number (provided in your case confirmation email).

Diag Workarounds

If your organization does not permit outbound access to https://diag-upload.cribl.io to upload from within Cribl Stream, you can also submit diags directly via the Support Portal (login required).

If none of these options work with your organization's policies, please work directly with your Support engineer to find a solution.

16.3. Diagnosing Issues

To help diagnose Cribl Stream problems, you can share a diagnostic bundle with Cribl Support. The bundle contains a snapshot of configuration files and logs at the time the bundle was created, and gives troubleshooters insights into how Cribl Stream was configured and operating at that time.

What's in the Diagnostic Bundle

The following subdirectories (and their contents) of `$CRIBL_HOME` are included:

- `.../default/*`
- `.../local/*` – except for `/local/cribl/auth/`, to exclude sensitive files.
- `.../log/*`
- `.../groups/*`
- `.../state/jobs/*` – will return all jobs if left empty.

As a security measure, the bundle excludes all `.crt`, `.pem`, `.cer`, and `.key` files from all `$CRIBL_HOME` subdirectories.

Creating and Exporting a Diagnostic Bundle

If you're managing your own Cribl Stream deployment (single-instance or distributed), you can create and securely share bundles with Cribl Support, either from the UI or via the CLI.

> With a Cribl.Cloud deployment, create bundles and securely share them with Cribl Support directly from the UI. In the Using the UI instructions below, **Send to Cribl Support** will always be enabled, and the **Export**/download option will be unavailable.

Requirements

Using either medium, you'll need outbound internet access to `https://diag-upload.cribl.io` and a valid support case number. The above URL works only when using the `cribl diag` command or uploading using the Cribl Stream UI. (So connecting directly to it with your web browser will fail.)

Open your support case before sending a diagnostic bundle to Cribl Support. Then, when creating the bundle, be sure to use the case number provided. Case numbers are 8 digits in length, and you must include any leading zeros. For example, `00001234`.

Using the UI

Depending on the issue you're debugging, you can create a bundle either from the Leader or from an individual Worker's host.

From the Leader

To create a bundle from the Leader, go to **Settings** > **Global Settings** > **Diagnostics > Diagnostic Bundle** and click **Create Diagnostic Bundle**.

- To share the bundle with Cribl Support, toggle **Send to Cribl Support** to **Yes**. Enter your case number, and then click **Export**.
- To download the bundle locally to your machine (on-prem only), click **Export**.

From a Worker

To create a bundle from individual Workers, you must be able to access the Worker's UI. You can easily use the Leader to get authenticated access to each Worker, if you first enable the parent Group's UI Access (Teleporting) setting:

1. Go to **Manage** > **Groups**.
2. Make sure the relevant Group's **UI Access** toggle is on.
3. Click the Group's **Workers** link.
4. Click the link for the Worker you're debugging.
5. Look for the magenta border to confirm that you've teleported to that Worker.
6. Click **Worker Settings** (top right) > **Diagnostics** (lower left) > **Diagnostic Bundle**, and click **Create Diagnostic Bundle**.
7. Use the appropriate **Export** option listed above for the Leader.

On customer-managed/on-prem deployments, new and previously created bundles are stored in `$CRIBL_HOME/diag`. They're also listed in the UI, where you can re-download them or share them with Cribl Support.

UI Options

The **Create & Export Diag Bundle** modal includes:

- **Rename .js files** toggle (defaults to `Yes`).
- **Include metrics** toggle (defaults to `Yes`).
- **Latest number of jobs to include** field (defaults to empty = unlimited).

Cribl Support will advise you on changing the defaults here. Disabling **Include metrics** can reduce the diag bundle's size, where necessary.

Using the CLI

To create a bundle using the CLI, use the `diag` command. (This option is on-prem only.) Depending on the issue you're debugging, you can create a bundle either from the Leader's host or from an individual Worker's host.

```
# $CRIBL_HOME/bin/cribl diag
Usage: [sub-command] [options] [args]

Commands:
get    - List existing Cribl Stream diagnostic bundles
create - Creates diagnostic bundle for Cribl Stream
send   - Send Cribl Stream diagnostic bundle to Cribl Support, args:
   -c <caseNumber> - Cribl Case Number
  [-p <path>]      - Diagnostic bundle path (if empty, then new bundle will be
created)

## Creating a diagnostic bundle
# $CRIBL_HOME/bin/cribl diag create
Created Cribl Stream diagnostic bundle at /opt/cribl/diag/cribl-logstream-
<hostname>-<datetime>.tar.gz.

## Creating and sending a diagnostic bundle
# $CRIBL_HOME/bin/cribl diag send -c <caseNumber>
Sent Cribl Stream diagnostic bundle to Cribl Support

## Sending a previously created diagnostic bundle
# $CRIBL_HOME/bin/cribl diag send -p /opt/cribl/diag/cribl-logstream-<hostname>-
<datetime>.tar.gz -c <caseNumber>
Sent Cribl Stream diagnostic bundle to Cribl Support
```

For complete command syntax, see `diag`.

Including CPU Profiles

If Cribl Support asks you to grab CPU profiles of Worker Processes, follow these steps:

1. Use `top` or `htop` on the Worker Node to identify Worker PIDs consuming a lot of CPU.

2. See Sizing & Scaling > CPU Profiling for instructions on accessing the UI's **Profile** options (for your deployment type), and generating and saving profiles.
3. Find the Worker Processes matching the PIDs you identified above.
4. Click **Profile** on each. Start with the default 10-second **Duration**.
5. Once the profile is displayed, save it to a JSON file. (See details at the above link.)
6. Repeat steps 3–6 for other CPU-intensive Worker Processes.
7. Upload the profile JSON files to Cribl Support.

> On an already CPU-starved Worker Node, profiling might fail with an error message, or just hang. In this case, you might need a few retries to get a successful profile.

Including Memory Snapshots

> Cribl.Cloud does not support taking memory snapshots. This feature is for on-prem deployments only.

If you encounter a memory leak, Cribl Support might request a memory snapshot of a `cribl` process to better understand where the leak is occurring. To capture the memory snapshot:

1. Note the PID of the process of interest.
2. In a terminal, `cd` to the directory where Cribl Stream is installed:

```
cd $CRIBL_HOME/bin
```

3. Run the `diag heapsnapshot` command with the PID you noted in step 1:

```
./cribl diag heapsnapshot -p <pid>
```

Cribl will capture the memory snapshot in `$CRIBL_HOME/diag/`.

Example output:

```
Heap-1690906031148-2458958.heapsnapshot
```

16.4. Common Errors and Warnings

This page lists common error and warning messages that you might find in Cribl Stream's internal logs and/or UI. It includes recommendations for resolving the errors/warnings. Messages are grouped by component (Sources, Destinations, etc.). Note that:

- We've excerpted only the salient part of the error message from each event. We haven't listed full events.
- Examples don't preserve case sensitivity from the original events.
- NodeJS serves as the Cribl Stream backend and has a large collection of well documented errors of its own. Some of system-level are listed below with the appropriate action to take. The remainder are documented at https://nodejs.org/docs/latest-v14.x/api/errors.html#errors_node_js_error_codes, specifically in the `Common system errors` section of that page.
- Where events are written to log files, they might reside in different logs variously devoted to data processing, cluster communication, or the REST API. (For details, see Types of Logs.) We note the log type where necessary.

Web UI

Where: In Cribl Stream's UI.

Error: "Failed to fetch"

Cause: This occurs only when accessing **Data** > **Collectors**. It can occur with ad blockers, and occurs with the Brave browser (because the newly loaded page's URL includes the string `collector`).

Recommendation: If you have an ad blocker, allowlist the `https://<hostname>:9000/jobs/collectors` (single-instance) URL or the `https://<masternode>:9000/m/<group_name>/jobs/collectors` (Leader) URL.

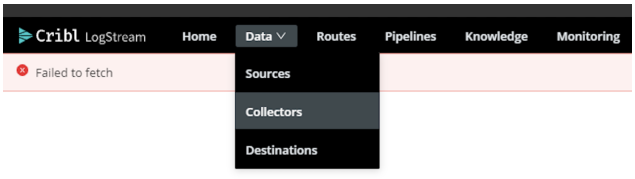

Error: "The Config Helper service is not available because a configuration file doesn't exist or the settings are invalid. Please fix it and restart Cribl Stream."

Cause: Occurs only on Leader Nodes. Each Worker Group relies on a config helper process that runs on its behalf on a Leader Node, and that process is not currently running. This error is usually triggered by restarting Cribl Stream on the Leader Node, and then trying to access one of these UI features before the Cribl Stream server is fully up:

- **Groups** or **Configure** link (3.x).
- **Worker Groups** menu (2.x).
- **Manage** > **Groups** or **Manage** > **Workers** tabs (4.x).

Recommendation: Try again in a few seconds. If you've made changes to the backend or filesystem permissions, stop Cribl Stream, and make sure the `cribl` user owns all relevant assets, before restarting: `sudo chown -R cribl.cribl /opt/cribl`

Warning: "KMS saved, but secret exists in destination location. No data migrated."

Cause: This will appear when you attempt to save KMS Settings with a **Secret Path** entry that references a secret that already exists in HashiCorp Vault. It can also occur with OpenID Connect remote authentication. Cribl Stream has aborted the remote write to avoid overwriting an external shared secret.

Recommendation: On the Leader Node, manually edit `kms.yml` to use `provider: local`. Then restart Cribl Stream to correct the path conflict.

Sources (General)

Where: These events will be in the Worker process logs.

Error: "bind EACCES 0.0.0.0:514"

Cause: Cribl Stream doesn't have proper privileges to bind to the specified IP and port. Usually, this simply indicates that Cribl Stream is running as a non-root user, but a Source was accidentally configured to use a

privileged port below 1024.

Recommendation: Check your Cribl Stream Sources' configuration. The error's `channel` field will indicate which input is affected. If you choose to enable access to the port range below 1024, see our configuration instructions for systemd and initd.

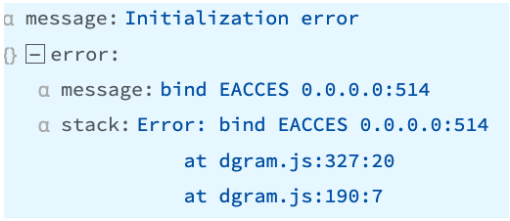

EACCES error

Error: “bind EADDRINUSE 0.0.0.0:9514”

Cause: The interface and port combination is already in use by another process, which might or might not be Cribl Stream.

Recommendation: Check your Cribl Stream Sources' configuration. The error's `channel` field will indicate which Source is affected, but this error means that one or more other inputs are also using the same IP/port combination.

ADDRINUSE error

HTTP-based Source

Where: These events will be in the Worker Process logs.

Message: "Dropping request because token invalid","authToken": "Bas...Njc="" (v2.4.5 and later)

Cause: The specified token is invalid. Note the above message is logged only at debug level.

Kafka-based Source

Where: These events will be in the Worker Process logs.

Error: "KafkaJSProtocolError: Not authorized to access topics: [Topic authorization failed]"

Cause: The username does not have read permissions for the specified topic.

Splunk TCP Source

Where: These events will be in the Worker Process logs.

Error: "connection rejected" with a `reason` of "Too many connections"

Cause: The maximum number of active Splunk TCP connections has been exceeded per worker process. The default is 1000.

Recommendation: In the Splunk TCP input's Advanced Settings configuration, increase the Max Active Connections value, set it to 0 for unlimited, and/or increase the # of worker processes the Worker Node(s) are using..

Splunk HEC Source

Where: These events will be in the Worker Process logs.

Error: "Malformed HEC event"

Cause: The event is missing both `event` and `fields` fields.

Error: "Invalid token"

Cause: Auth token(s) are defined, but the token specified in the HEC request doesn't match any defined tokens, therefore it's invalid.

Error: "Invalid index"

Cause: The Splunk HEC Source's **Allowed Indexes** field is configured with specific indexes, but the client's HTTP request didn't specify any of them.

Error: "{"text":"Server is busy","code":9,"invalid-event-number":0}"

Note: This is not logged in Cribl Stream, but would be found in the response payload sent to your HEC client.

Cause: "Server is busy" is the equivalent of a 503 HTTP response code. The most likely cause is the **Max active requests** setting in the HEC input's Advanced Settings is insufficient to service the number of simultaneous HEC requests. Increase the value and monitor your clients to see if the 503 response is eliminated.

TLS Errors

Where: These events can be in Worker Process or API logs on the Workers or Leader, depending on whether the issue is associated with a Source or Destination, etc.

Error: "certificate has expired"

Cause: Validate server certs or **Validate client certs** is enabled, and the peer's certificate has expired.

Recommendation: Disable **Validate server certs** or **Validate client certs** (depending on whether Cribl Stream is serving as the client or server), so that encryption can still occur without authentication. Or renew the expired certificate.

Error: "Client network socket disconnected before secure TLS connection was established"

Cause: Typically caused by a TLS protocol version mismatch between the client and server.

Recommendation: Verify that client's and server's TLS settings use the same minimum/maximum TLS version.

Error: "Unable to get local issuer certificate"

Cause: Client can't validate the server certificate's CA (i.e., the issuer) because it doesn't trust the CA cert. Or vice versa (server can't validate client's certificate CA) if mutual auth is enabled.

Recommendation: The CA certificates used by the server's leaf certificate must be trusted by the client. See Configuring CA certs.

Error: "self signed certificate"

Cause: The client or server was presented with a self-signed cert from the peer, but that cert is not trusted.

Recommendation: The self-signed certificate must be trusted by the peer to which it's presented. See Configuring CA certs.

Error: "Hostname/IP does not match certificate's altnames"

Variations: "Hostname/IP does not match certificate's altnames: host: <server hostname> is not in the cert's list" or: "Hostname/IP does not match certificate's altnames: IP: <server IP> is not in the cert's list"

Cause: The server's hostname/FQDN used on the client is not found in the CN or SAN attribute of the server's certificate.

Recommendation: Examine the CN and/or SAN attribute, to see which names are listed that can be used as the server hostname/FQDN on the client. **CN values with spaces are not supported as hostnames/FQDNS.** If there isn't a SAN attribute, then a new cert will need to be issued.

Error: "140244944713600:error:141E70BF:SSL routines:tls_construct_client_hello:no protocols available:"

Cause: The highest TLS protocol available by the client is still too low for the server to support.

Recommendation: Review the minimum/maximum TLS version settings on the client and server, to ensure that they overlap.

Error: "140251374995328:error:1408F10B:SSL routines:ssl3_get_record:wrong version number"

Cause: The client is using TLS but the server is probably not configured for TLS.

Recommendation: Review the TLS settings on the server.

REST API Collector

Where: These events will be in the Worker Process logs.

Error: "reason.stack == `TypeError [ERR_INVALID_URL]: Invalid URL: https%3A%2F%2Ftype.fit%2Fapi%2Fquotes" at onParseError (internal/url.js:258:9)"

Cause: This is due to unnecessarily encoding the Discover/Collect URL.

Recommendation: Remove the encoding function for the URL. URLs will rarely need text be encoded and when they do it's only the parts that need it that should be encoded, otherwise if the entire URL is encoded unnecessarily then errors like this will occur.

Invalid URL

Error: "statusCode: 429...Too many requests"

Cause: This response is triggered by rapidly repeated authentication requests from the Collector's Discover and Collect phases. It's especially likely when different Workers run multiple Collect tasks.

Recommendation: Gradually increase the **Login rate limit** threshold until you no longer receive this error response. On the Leader or a single-instance deployment, access this option at **Global Settings** > **General Settings** > **API Server Settings** > **Advanced**. In a distributed deployment, select **Manage**, select the Worker Group, and then navigate to **Group Settings** > **General Settings** > **API Server Settings** > **Advanced**.

AWS Sources/Destinations & S3-Compatible Stores

Where: These events will be in the Worker Process logs.

Error: "message":"Inaccessible host: 'sqs.us-east-1.amazonaws.com'. This service may not be available..."

Full Error Text: `"message":"Inaccessible host: 'sqs.us-east-1.amazonaws.com'. This service may not be available in the 'us-east-1' region.","stack":"UnknownEndpoint: Inaccessible host: 'sqs.us-east-1.amazonaws.com'. This service may not be available in the 'us-east-1' region.`

Cause: If this is persistent rather than intermittent then it could be caused by TLS negotiation failures. For example, AWS SQS currently does not support TLS 1.3. If intermittent then a network-related issue could be occurring such as DNS-related problems.

Error: "Missing credentials in config" or "stack:Error: connect ETIMEDOUT 169.254.169.254:80"

Cause 1: Can occur when **Authentication** is set to **Auto**, but no IAM role is attached.

Cause 2: Can occur on LogStream 2.4.4 or earlier, when an IAM role is attached to the EC2 instance, but the instance is using instance metadata v2.

Recommendations: Change to Manual Authentication; attach an IAM role; or if using IMDv2, switch to IMDv1 (if possible) or upgrade to LogStream 2.4.5 or later.

Missing credentials in config

Error: "message":"Bucket does not exist - self signed certificate

Example Error Text: `message: Bucket does not exist - self signed certificate stack: Error: self signed certificate at TLSSocket.onConnectSecure (node:_tls_wrap_1535:34) at TLSSocket.emit (node:events:513:28) at TLSSocket.emit (node:events:489:12) at TLSSocket._fini... Show more tmpPath: /opt/cribl/s3_bucket/cribl/2023/03/28/CriblOut-XTNGh5.0.json.tmp`

Cause 1: Can occur when the Destination uses a self-signed cert that has not yet been trusted by Cribl Stream.

Cause 2: Can occur when the user does not have appropriate permissions to view the bucket.

Cause 3: Can occur when the authentication token generated by your computer has a timestamp that is out of sync with the server's time, resulting in an authentication failure.

Recommendations: Disable **Advanced Settings** > **Reject unauthorized certificates** or; get the sender's cert and add it to the `NODE_EXTRA_CA_CERTS` path for validation; or verify that the user has appropriate permissions.

Destinations (General)

Where: These events will be in the Worker Process logs, unless otherwise noted.

Warning: “sending is blocked”

Cause: The Destination is blocking. This can occur with any TCP-based Destination, and is logged only after 1 second of blocking. This can also occur between Worker and Leader when the Worker can't connect to the Leader Node to send metrics data. When triggered by cluster communication, the warning will be in the Worker's API log.

Warning: "exerting backpressure" (v2.4.0-2.4.1)

Cause: The Destination is blocking. This message is logged immediately upon detecting backpressure, for Destinations using any protocol. Some backpressure is normal when measured over timescales under 1 second, therefore this message can appear quite frequently, and is not indicative of a problem (which is why it's a warning).

Warning: "begin backpressure" and "end backpressure" (v2.4.2 and later)

Cause: The Destination is blocking. Like the "sending is blocked" message, "begin backpressure" is logged only after 1 second of blocking. Unlike the "exerting backpressure" message, it is logged only once while backpressure is occurring (at the start), and it will always be followed by the "end backpressure" message.

MinIO Destination

Where: These events will be in the Worker Process logs.

Error: "Parse Error: Expected HTTP/"

Cause: The Worker is trying to use HTTP, but the server is expecting HTTPS.

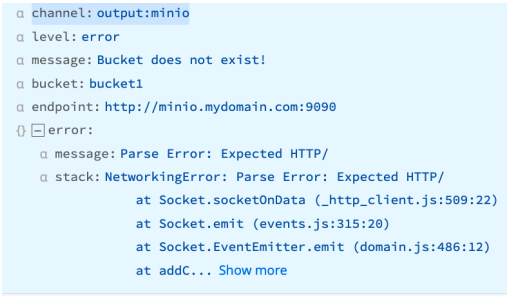

Parse Error: Expected HTTP

Pipelines/Functions

Where: These events will be in the Worker Process logs.

Error: "failed to load function...Value undefined out of range..."

Cause: A Lookup Function attempted to load a lookup table that exceeded Node.js' hard size limit of 16,777,216 (i.e., 2^{24}) rows.

Recommendation: Split the lookup table to smaller tables, or use the Redis Function.

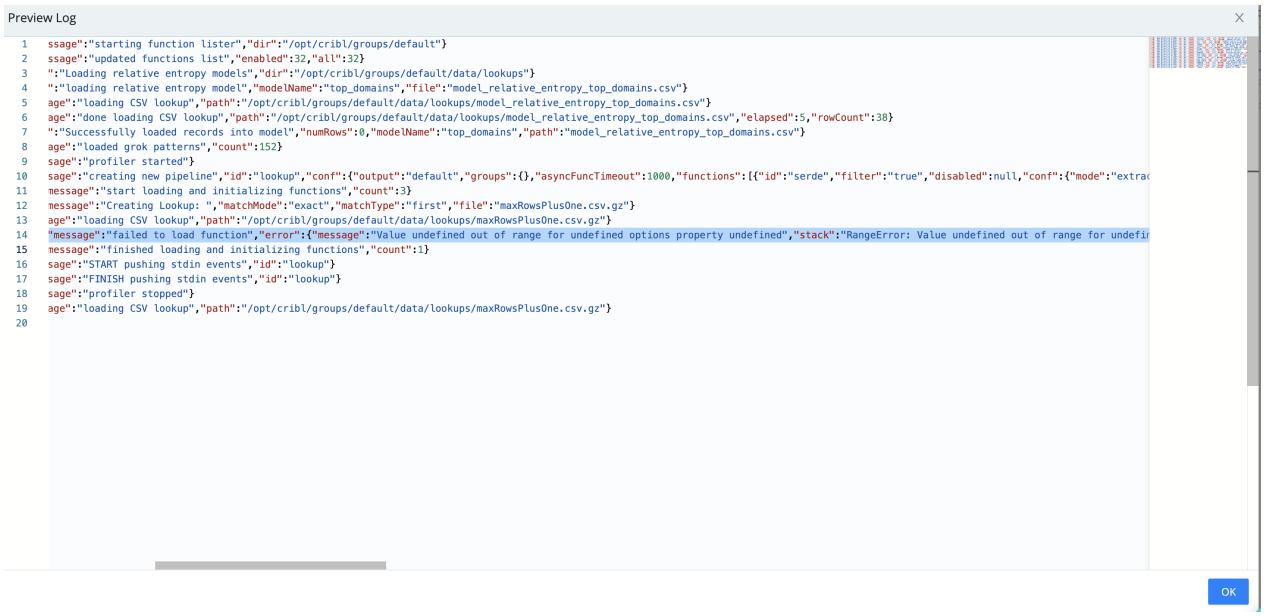

Oversized lookup table error

Diag Command

Where: On stdout

Warning: "You are running Cribl Stream CLI as user=root, while the binary is owned by the user=cribl."

Full Text: "WARNING: You are running Cribl Stream CLI as user=root, while the binary is owned by the user=cribl. This may change the ownership of some files under CRIBL_HOME=/opt/cribl. Please make sure all files under CRIBL_HOME=/opt/cribl are owned by the user=cribl."

Cause: This is caused by improper ownership on `$CRIBL_HOME`, and will cause some files to be missing from the diag.

Recommendation: Execute the `chown` command on the entire `$CRIBL_HOME` directory, so that everything can be owned by the proper user. Afterward, run the `./cribl diag create` command again.

Cluster

Where: These events will be in the Workers' API logs.

Error: "access denied"

Cause: The Worker's authtoken (located in `$CRIBL_HOME/local/_system/instance.yml`) is missing or doesn’t match the Leader's.

16.5. Git Push Errors

This page anticipates common errors you might see in Cribl Stream's UI, or in the `git` CLI, when pushing a commit.

Failed to Push Some Refs

Your first push to a remote repo might fail with one of several `failed to push some refs` errors.

As a first step in debugging these errors, edit the `$CRIBL_HOME/.git/config` file to make sure that its `name` and `email` key values match the credentials you've set on your repo provider or git server.

Also make sure that the `remote "origin"` key value matches the remote you set when you connected to the remote repo. This example shows all three keys, with placeholder values:

```
[user]
    name = <your-login-name>
    email = <email@example.com>
[remote "origin"]
    url = https://<user-name>:<token>@github.com/<username>/<repo-name>
```

Next, verify the remote repo from the command line, as follows:

```
cd $CRIBL_HOME/.git
git remote -v
```

In response, `git` should echo your configured remote twice – once for `fetch` and once for `push` operations.

If all of the above settings are correct, the `push` is very likely blocking because the remote repo has some commit history, or was simply created with a `readme.md` file. For command-line instructions to remedy this – by syncing your local repo to its remote – see GitHub's Dealing with Non-Fast-Forward Errors topic.

Large Files Detected

A push command might also trigger "large file" warnings or, more seriously, errors of this form (CLI/GitHub example):

```
remote: warning: File data/lookups/geo.mmdb is 60.12 MB; this is larger than
GitHub's recommended maximum file size of 50.00 MB
remote: error: GH001: Large files detected. You may want to try Git Large File
Storage - https://git-lfs.github.com.
remote: error: Trace:
[############################################################]
remote: error: See http://git.io/iEPt8g for more information.
remote: error: File groups/default/data/lookups/largelookup.csv is 313.91 MB; this
exceeds GitHub's file size limit of 100.00 MB
```

Cribl recommends adding such large files to `.gitignore`, to exclude them from subsequent `push` commands. As the above examples show, typical culprits are large `.csv` or `.mmdb` lookup files. A simple option is to place these files in a `$CRIBL_HOME` subdirectory that's already listed in `.gitignore` – for details, see Managing Large Lookups.

Other available workarounds include staging such files **outside** `$CRIBL_HOME`, or using plugins to accommodate the large files. For GitHub-specific options, see Working with Large Files.

See Also

- Git Remote Repos with Trusted CAs

16.6. Git Remote Repos & Trusted CAs

If you are using an internal Git server, a self-signed certificate might prevent Cribl Stream from successfully pushing commits to the origin. You might see errors like these when pushing (or pulling) via the CLI:

```
SSL certificate problem: self signed certificate in certificate chain
SSL certificate problem: unable to get local issuer certificate
```

Resolving the Errors

To ensure that Git trusts your self-signed certificate, follow these steps:

1. Obtain the certificate chain (root, intermediates, and leaf) for the Git server.
2. As the `cribl` user, run this command: `git config http.sslCAInfo /path/to/certs.pem`
3. Test with this command: `git push origin` Verify that this throws no errors.

Obtain the Certificate Chain (TLS/SSL)

Use these steps to enable Worker-to-Leader mutual authentication:

A. Validate the Client Certs

If you are using an internal certificate authority, obtain a copy of the CA public certificate, then add it to `/etc/systemd/system/cribl.service`:

```
...
[Service]
Environment="NODE_EXTRA_CA_CERTS=/opt/cribl/local/cribl/auth/certs/ca.pem"
...
```

For details, see CA Certificates and Environment Variables.

B. Simplify the Common-Name Regex

The common-name regex (if required) should omit the `CN=` at the beginning of the **Common Name** field. The example below will match all immediate subdomains of `se.lab.cribl.io`, like `madsci.se.lab.cribl.io`.

If you disable **Validate Client Certs**, Cribl Stream will match only on common names.

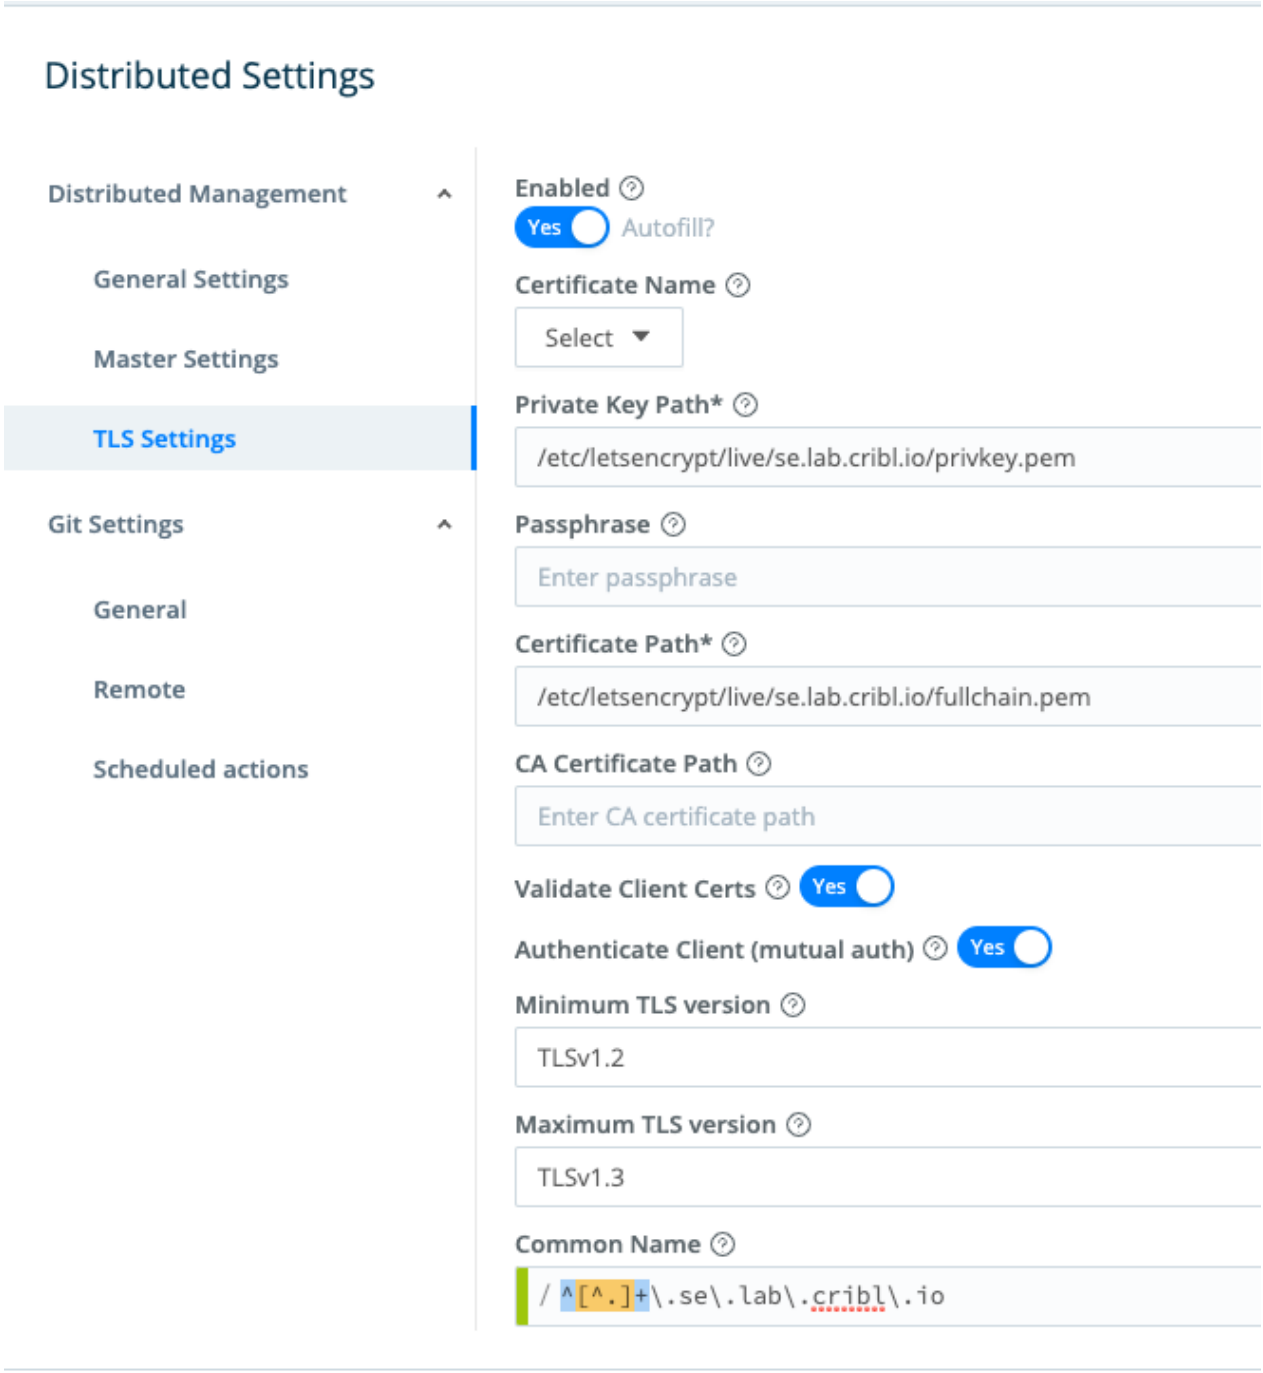

Common Name example

C. Extract SSL Certificate Info

As in this example:

```
openssl x509 -in certificate.pem -text -noout
```

D. Dump the Certificate Chain from the Server

As in this example:

```
echo "" | openssl s_client -host www.google.com -port 443 -showcerts 2>&1 | sed -n
'/BEGIN CERTIFICATE/,/END CERTIFICATE/p'
```

16.7. Sample Logs for Login Scenarios

This page lists sample event series that Cribl Stream records in common login scenarios. Cribl Stream captures event series for both successful and failed login attempts. Note that these samples omit the following repeating fields that are captured in each log:

- `cid:api`
- `channel:cribl`
- `level:info`

Successful Authentication Using the `memberOf` Attribute


```
{"time":"2022-03-30T03:09:55.569Z","message":"Running LDAP
search","searchBase":"dc=mydomain,dc=com","filter":"(sAMAccountName=admin)","options":
{"scope":"sub","filter":"(sAMAccountName=admin)"}}

{"time":"2022-03-30T03:09:55.575Z","message":"LDAP user search
results","count":1,"username":"REDACTED","user":
{"dn":"CN=admin,CN=Users,DC=mydomain,DC=com","memberOf":
["CN=admingrp,CN=Users,DC=mydomain,DC=com"]}}

{"time":"2022-03-
30T03:09:55.582Z","channel":"LDAPMapper","level":"debug","message":"External groups
found","groups":["admingrp","Users"]}

{"time":"2022-03-30T03:09:55.583Z","message":"Successful
login","user":"admin","provider":"ldap:win2008ad1.mydomain.com:389"}
```


Successful Authentication With Fallback When a Bad Login Is Triggered


```
{"time":"2022-03-30T03:10:48.389Z","message":"Running LDAP
search","searchBase":"dc=mydomain,dc=com","filter":"(sAMAccountName=admin)","options":
{"scope":"sub","filter":"(sAMAccountName=admin)"}}

{"time":"2022-03-30T03:10:48.393Z","message":"LDAP user search
results","count":1,"username":"REDACTED","user":
```

{"dn":"CN=admin,CN=Users,DC=mydomain,DC=com","memberOf":
["CN=admingrp,CN=Users,DC=mydomain,DC=com"]}}

{"time":"2022-03-30T03:10:48.399Z","message":"Attempting fallback to local
authentication","reason":"failed
login","provider":"ldap:win2008ad1.mydomain.com:389","user":"admin"}

{"time":"2022-03-30T03:10:48.400Z","message":"Successful
login","user":"admin","provider":"local"}

Failed Authentication with Fallback When a Bad Login Is Disabled

{"time":"2022-03-30T03:11:54.175Z","message":"Running LDAP
search","searchBase":"dc=mydomain,dc=com","filter":"(sAMAccountName=admin)","options":
{"scope":"sub","filter":"(sAMAccountName=admin)"}}

{"time":"2022-03-30T03:11:54.178Z","message":"LDAP user search
results","count":1,"username":"REDACTED","user":
{"dn":"CN=admin,CN=Users,DC=mydomain,DC=com","memberOf":
["CN=admingrp,CN=Users,DC=mydomain,DC=com"]}}

{"time":"2022-03-30T03:11:54.184Z","level":"warn","message":"Failed
login","user":"admin","provider":"ldap:win2008ad1.mydomain.com:389","details":
{"message":"80090308: LdapErr: DSID-0C0903A9, comment: AcceptSecurityContext error, data
52e, v1db1\u0000 Code: 0x31","stack":"Error: 80090308: LdapErr: DSID-0C0903A9, comment:
AcceptSecurityContext error, data 52e, v1db1\u0000 Code: 0x31

Incorrect Proxy Bind Password With Fallback When a Fatal Error Is Triggered

{"time":"2022-03-30T03:04:16.400Z","level":"warn","message":"Authentication Provider
Error","provider":"ldap:win2008ad1.mydomain.com:389","fatal":{"message":"80090308:
LdapErr: DSID-0C0903A9, comment: AcceptSecurityContext error, data 52e, v1db1\u0000
Code: 0x31","stack":"Error: 80090308: LdapErr: DSID-0C0903A9, comment:
AcceptSecurityContext error, data 52e, v1db1\u0000 Code: 0x31\n at Function.parse [snip]

{"time":"2022-03-30T03:04:16.401Z","message":"Attempting fallback to local
authentication","reason":"provider

error","provider":"ldap:win2008ad1.mydomain.com:389","user":"admin","error":
{"message":"80090308: LdapErr: DSID-0C0903A9, comment: AcceptSecurityContext error, data
52e, v1db1\u0000 Code: 0x31","stack":"Error: 80090308: LdapErr: DSID-0C0903A9, comment:
AcceptSecurityContext error, data 52e, v1db1\u0000 Code: 0x31

Successful Authentication Without `memberOf` to Trigger Group Search but Without Group Memberships

{"time":"2022-03-30T03:15:21.410Z","message":"Running LDAP
search","searchBase":"dc=mydomain,dc=com","filter":"(sAMAccountName=admin)","options":
{"scope":"sub","filter":"(sAMAccountName=admin)"}}

{"time":"2022-03-30T03:15:21.416Z","message":"LDAP user search
results","count":1,"username":"REDACTED","user":
{"dn":"CN=admin,CN=Users,DC=mydomain,DC=com"}}

{"time":"2022-03-30T03:15:21.422Z","message":"Running LDAP
search","searchBase":"dc=mydomain,dc=com","filter":"
(member=CN=admin,CN=Users,DC=mydomain,DC=com)","options":{"scope":"sub","filter":"
(member=CN=admin,CN=Users,DC=mydomain,DC=com)"}}

{"time":"2022-03-30T03:15:21.424Z","message":"LDAP groups search
results","count":0,"opts":{"groupSearchBase":"dc=mydomain,dc=com","memberSearch":
{"memberField":"member","memberDN":"CN=admin,CN=Users,DC=mydomain,DC=com"}},"groups":[]}

{"time":"2022-03-
30T03:15:21.425Z","channel":"LDAPMapper","level":"debug","message":"External groups
found","groups":[]}

{"time":"2022-03-30T03:15:21.427Z","message":"Successful
login","user":"admin","provider":"ldap:win2008ad1.mydomain.com:389"}

17. Third-Party Software

17.1. Credits

Various components in Cribl Stream are built and enhanced with software under free or open source licenses. We thank those projects' contributors!

PACKAGE NAME	VERSION	LICENSE	COPYRIGHT
@ant-design/icons	4.7.0	MIT	Copyright (c) 2018-present Ant UED, https://xtech.antfin.com/
@apache-arrow/es2015-cjs	12.0.0	Apache-2.0	Copyright 2015 The TensorFlow Authors. All Rights Reserved.
@auth0/auth0-react	2.0.0	MIT	Copyright (c) 2020 Auth0
@azure/msal-node	1.14.6	MIT	Copyright (c) 2020 Microsoft
@azure/storage-queue	12.10.0	MIT	Copyright (c) 2020 Microsoft
@google-cloud/pubsub	3.1.0	Apache-2.0	Google Inc.
@google-cloud/storage	5.18.1	Apache-2.0	Google Inc.
@grpc/grpc-js	1.6.8	Apache-2.0	Google Inc.
@jm18457/kafkajs-msk-iam-authentication-mechanism	3.1.1	MIT	Copyright (c) 2021 Jaka Maver
@reduxjs/toolkit	1.9.5	MIT	Copyright (c) 2018 Mark Erikson
@techteamer/ocsp	1.0.0	MIT	Fedor Indutny <fedor@indutny.com>
Apache Arrow	9.0.0	Apache-2.0	© 2016-2023 The Apache Software Foundation
ag-grid-community	19.1.2	MIT	Copyright (c) 2015-2016 AG GRID LTD
ag-grid-react	19.1.2	MIT	Copyright (c) 2015-2016 AG GRID LTD
ajv	6.12.3	MIT	Copyright (c) 2015-2017 Evgeny Poberezkin

PACKAGE NAME	VERSION	LICENSE	COPYRIGHT
ajv-errors	1.0.1	MIT	Copyright (c) 2017 Evgeny Poberezkin
alphanum-sort	1.0.2	MIT	Copyright (c) Bogdan Chadkin <trysound@yandex.ru>
antd	4.23.6	MIT	Copyright (c) 2015-present Ant UED, https://xtech.antfin.com/
antlr4	4.12.0	BSD-3-Clause	
antlr4-c3	3.0.1	MIT	Copyright (c) 2016, 2017, Mike Lischke
antlr4ts	0.5.0-alpha.4	BSD	Copyright (c) 2016 The ANTLR Project
as-table	1.0.55	MIT	Copyright (c) 2016 Vitaly Gordon (https://github.com/xpl)
avsc	5.7.4	MIT	Copyright (c) 2015-2017, Matthieu Monsch.
aws-sdk	2.1189.0	Apache-2.0	Amazon Web Services https://aws.amazon.com/
aws4	1.11.0	MIT	Copyright 2013 Michael Hart (michael.hart.au@gmail.com)
bl	4.0.3	MIT	Copyright (c) 2013-2019 bl contributors
blueimp-md5	2.19.0	MIT	Copyright © 2011 Sebastian Tschan, https://blueimp.net
bson	4.6.5	Apache-2.0	The MongoDB NodeJS Team dbx-node@mongodb.com
cidr-matcher	1.0.5	MIT	Copyright (c) 2015, Marco Pracucci <marco@pracucci.com>
clarinet	0.12.4	BSD-2-Clause	Copyright (c) Isaac Z. Schlueter ("Author")
classnames	2.3.2	MIT	Copyright (c) 2018 Jed Watson
color-hash	1.0.3	MIT	Copyright (c) 2015 Zeno Zeng
cron-parser	4.6.0	MIT	Copyright (c) 2014-2016 Harri Siirak

PACKAGE NAME	VERSION	LICENSE	COPYRIGHT
d3-time	1.1.0	BSD-3-Clause	Copyright 2010-2016 Mike Bostock
d3-time-format	2.2.3	BSD-3-Clause	Copyright 2010-2017 Mike Bostock
date-fns	1.29.0	MIT	Sasha Koss <koss@nocorp.me>
diff2html	3.4.35	MIT	Copyright 2014-2016 Rodrigo Fernandes https://rtfpessoa.github.io/
echarts	5.4.1	Apache-2.0	Copyright 2017-2022 The Apache Software Foundation
escodegen	1.11.1	BSD-2-Clause	Copyright (C) 2012 Yusuke Suzuki
esprima	4.0.1	BSD-2-Clause	Copyright JS Foundation and other contributors, https://js.foundation/
express	4.18.1	MIT	Copyright (c) 2009-2014 TJ Holowaychuk <tj@vision-media.ca>
fast-array-diff	1.0.1	MIT	Copyright (c) 2016 Yu Jianrong
fast-deep-equal	3.1.3	MIT	Copyright (c) 2017 Evgeny Poberezkin
file-saver	2.0.5	MIT	Copyright © 2016 [Eli Grey][1].
fzstd	0.1.0	MIT	Copyright (c) 2020 Arjun Barrett
google-protobuf	3.21.0	BSD-3-Clause	Copyright (c) 2022, Google Inc.
http-proxy-agent	3.0.0	MIT	Copyright (c) 2013 Nathan Rajlich <nathan@tootallnate.net>
https-proxy-agent	4.0.0	MIT	Copyright (c) 2013 Nathan Rajlich <nathan@tootallnate.net>
ioredis	5.2.2	MIT	Copyright (c) 2015-2022 Zihua Li
ip-num	1.4.0	MIT	Dadepo Aderemi
jstat	1.9.5		Copyright (c) 2013 jStat
jwt-decode	3.1.2	MIT	Copyright (c) 2015 Auth0, Inc. <support@auth0.com>

PACKAGE NAME	VERSION	LICENSE	COPYRIGHT
			(http://auth0.com)
jwt-simple	0.5.6	MIT	Copyright (c) 2011 Kazuhito Hokamura <k.hokamura@gmail.com>
kafkajs	2.2.4	MIT	Copyright (c) 2018 Túlio Ornelas (ornelas.tulio@gmail.com)
kafkajs-snappy	1.1.0	MIT	Copyright (c) 2018 Túlio Ornelas (ornelas.tulio@gmail.com)
ldapts	1.10.0	MIT	Copyright (c) 2018 jim@biacreations.com
limiter	1.1.4		Copyright (C) 2011 by John Hurliman
lodash	4.17.21	MIT	Copyright OpenJS Foundation and other contributors <https://openjsf.org/>
lottie-react	2.3.1	MIT	Copyright David Gamote and other contributors.
lz4js	0.2.0	ISC	John Chadwick
maxmind	3.1.2	MIT	Copyright (c) 2019 Dmitry Shirokov
monaco-editor	0.33.0	MIT	Copyright (c) 2016 - present Microsoft Corporation
mssql	8.1.4	MIT	Copyright (c) 2013-2018 Patrik Simek and contributors
mysql2	2.3.3	MIT	Andrey Sidorov <sidorares@yandex.ru>
nlohmann/json	3.10.5	MIT	Copyright © 2013-2022 Niels Lohmann
node-cache	4.2.0	MIT	Copyright (c) 2016 mpneuried
numeral	2.0.6	MIT	Copyright (c) 2016 Adam Draper
pako	1.0.10	(MIT AND Zlib)	Copyright (C) 2014-2017 by Vitaly Puzrin and Andrei Tuputcyn
papaparse	5.0.0-beta.0	MIT	Copyright (c) 2015 Matthew Holt
pbf	3.2.1	BSD-3-Clause	Copyright (c) 2017, Mapbox
pg	8.8.0	MIT	Copyright (c) 2010 - 2021 Brian Carlson

PACKAGE NAME	VERSION	LICENSE	COPYRIGHT
pg-query-stream	4.2.4	MIT	Copyright (c) 2013 Brian M. Carlson
proxy-from-env	1.1.0	MIT	Copyright (C) 2016-2018 Rob Wu <rob@robwu.nl>
query-string	7.1.3	MIT	Copyright (c) Sindre Sorhus <sindresorhus@gmail.com> (http://sindresorhus.com)
react	17.0.2	MIT	Copyright (c) Facebook, Inc. and its affiliates.
react-color	2.19.3	MIT	Copyright (c) 2015 Case Sandberg
react-dom	17.0.2	MIT	Copyright (c) Facebook, Inc. and its affiliates.
react-grid-layout	0.18.3	MIT	Copyright (c) 2016 Samuel Reed
react-js-cron	3.2.0	MIT	Copyright (c) Xavier Rutayisire
react-markdown	6.0.2	MIT	Copyright (c) 2015 Espen Hovlandsdal
react-redux	7.2.3	MIT	Copyright (c) 2015-present Dan Abramov
react-router-dom	5.1.2	MIT	Copyright (c) React Training 2016-2018
react-router-dom-v5-compat	6.9.0	MIT	Copyright (c) React Training 2015-2019
react-sortable-hoc	1.11.0	MIT	Copyright (c) 2016, Claudéric Demers
react-split-pane	0.1.91	MIT	Copyright (c) 2015 tomkp
react-virtual	2.6.1	MIT	Copyright (c) 2019 Tanner Linsley
redis	3.1.2	MIT	Copyright (c) 2016-present Node Redis contributors.
regexpp	2.0.0	MIT	Copyright (c) 2018 Toru Nagashima
remark-gfm	1.0.0	MIT	Copyright (c) 2020 Titus Wormer <tituswormer@gmail.com>
requirejs	2.3.6	MIT	James Burke <jrburke@gmail.com> (http://github.com/jrburke)
resize-observer-polyfill	1.5.1	MIT	Copyright (c) 2016 Denis Rul
rxjs	6.5.5	Apache-2.0	Ben Lesh <ben@benlesh.com>

PACKAGE NAME	VERSION	LICENSE	COPYRIGHT
samlify	2.8.10	MIT	Copyright (c) 2016-present Tony Ngan
sasazka	0.1.0	MIT	Copyright (c) 2014 Moto Ishizawa
saxen	8.1.2	MIT	Copyright (c) 2012 Vopilovskii Konstantin <flash.vkv@gmail.com>
semver	7.3.7	ISC	Copyright (c) Isaac Z. Schlueter and Contributors
simple-git	3.16.0	MIT	Steve King <steve@mydev.co>
snappyjs	0.6.0	MIT	Copyright (c) 2016 Zhipeng Jia
snmp-native	1.2.0	MIT	Copyright (C) 2012 Jakob Borg
socks	2.6.2	MIT	Copyright (c) 2013 Josh Glazebrook
streamcount	1.0.1	MIT	Copyright (C) 2013 by John Hurliman <jhurliman@jhurliman.org>
tar-stream	2.2.0	MIT	Copyright (c) 2014 Mathias Buus
thrift	0.16.0	Apache-2.0	Apache Thrift Developers dev@thrift.apache.org http://thrift.apache.org
timezone-support	2.0.2	MIT	Copyright (c) 2018-2019 Ferdinand Prantl
tiny-typed-emitter	2.1.0	MIT	Copyright (c) 2020 Zurab Benashvili (binier) <zura.bena@gmail.com>
uuid	8.3.2	MIT	Copyright (c) 2010-2020 Robert Kieffer and other contributors
vm2	3.9.19	MIT	Copyright (c) 2014-2022 Patrik Simek and contributors
vscode-languageserver-textdocument	1.0.5	MIT	Microsoft Corporation
vscode-languageserver-types	3.17.2	MIT	Microsoft Corporation
winston	3.7.2	MIT	Copyright (c) 2010 Charlie Robbins
winston-transport	4.5.0	MIT	Copyright (c) 2015 Charlie Robbins & the contributors.
xmlbuilder	10.0.0	MIT	Copyright (c) 2013 Ozgur Ozcitak

PACKAGE NAME	VERSION	LICENSE	COPYRIGHT
xxhashjs	0.2.2	MIT	Pierre Curto
yaml	1.10.2	ISC	Copyright 2018 Eemeli Aro <eemeli@gmail.com>